


## Appendix B. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Gary Chu	<b>Configurations</b>	2.4GHz + Zigbee

Horizontal

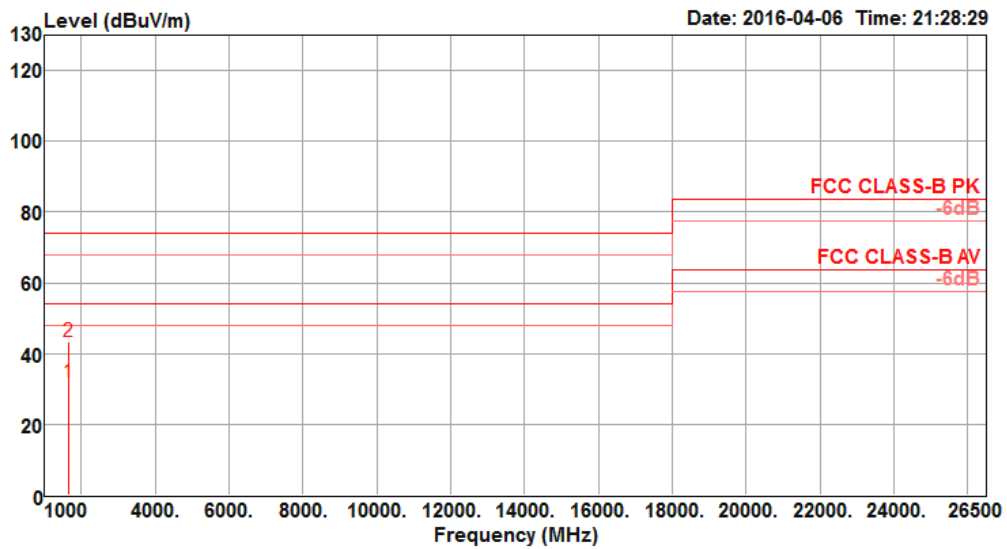

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1675.84	31.99	54.00	-22.01	36.27	4.03	26.24	34.55	153	316 Average	HORIZONTAL
2	1676.64	43.18	74.00	-30.82	47.46	4.03	26.24	34.55	153	316 Peak	HORIZONTAL

Vertical

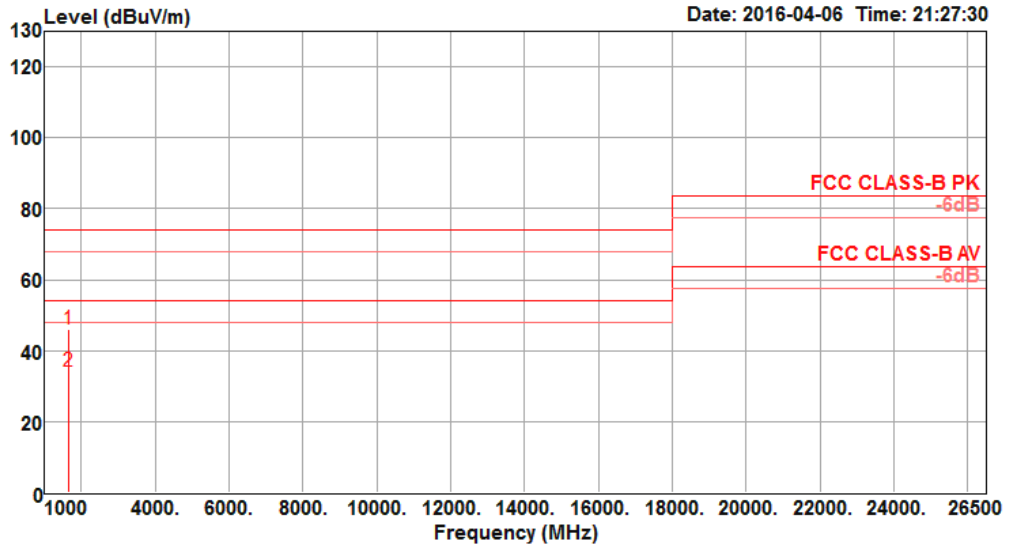

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1673.96	46.06	74.00	-27.94	50.38	4.02	26.21	34.55	165	358 Peak	VERTICAL
2	1674.04	34.10	54.00	-19.90	38.42	4.02	26.21	34.55	165	358 Average	VERTICAL