## Safety Label Note:

- 1. Printing color: Black
- 2. 製造國家(MFG Country):

Decide by import and export country for example:

- 1. MADE IN TAIWAN
- 2. MADE IN CHINA

印刷廠商代號(Vender ID): (CSA 要求標示)

Decide by Vendor

粘胶剂:永久性丙烯酸乳胶


製造工廠代號(MFG Factory): (UL要求標示)


視代工廠而定(Decide by MFG Factory)

- 1. 昊陽 / Joytech (深圳 / ShenZhen)-----> None
- 2. Accton -----> AC

## 材質與背膠請用下列規格或相同等級之材料:

Fasson<sup>®</sup> 50micron Matte Silver PET TC/S333/BG50#WH 法森牌 50 微米亚银聚酯薄膜 TC/S333/80 克白格拉辛底纸

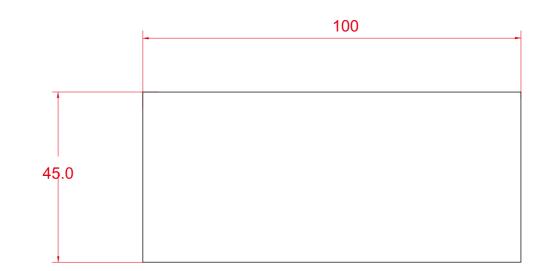

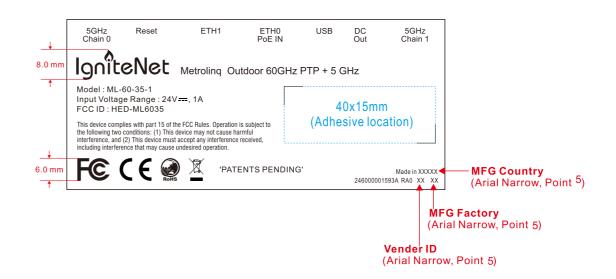

Modification	Card Paper / Top lineboard	Corrugate list Cardboard Die Cut Legend	Unspecialized = +/ -0.3 mm	Bag (A Degree) Clear	Pink	Label list	(Total Thick	ness = mm <u>±</u> 10%)	Comply with RoHs	Acatas	
1	GSM CCNB SBS Double SBS	e Single wall Double wall GSM gimtirademone) Bursting Bursting Strength (Top lineboard/Medium/Bottom lineboard) (Igd run) [Igd run] End Crush [Igd run] [Igd	GRADE 0 1 2 3 4 5 - 0 16 0.05 0.1 0.15 0.2 0.2 0.5	Normal Anti-Static ESD Value	Ω <sub>nm</sub> = 9-11	Material &	Thickness	Adhesive	Others	ACCTON TECHNO	OLOGY CORP.
2	250	Taiwan 230 X 180 X 230 16 33.6 (CT) rease Line	. 16 — 63 0.05 0.15 0.2 0.3 0.3 0.8 /A	Anti-Static Electronic ESD Value	Ω nm < 5	Art paper 0	0.025mm / 25# / 1mil	Acrylic T=0.022mm	Material Spec:	5 (1) 04000004500	DE) ( 4.0
3 4	280	B Silvan 230 x 100 x 230 14 26.2 (PBL) Partial Blunt Li	250 — 500 01 023 03 0.6 0.8 1.8 Thick	kness/mm 0.04 0.06	0.08	Metalized 🗸 0	0.050mm / 50# / 2mil	/ Acrylic UL approved T=0.022mm		Part No. 246000001593	REV. A0
5	300	E Taiwan 230 X 100 X 230 14 22.5 (SO) Slit-Score Line  AB Taiwan 230 X 100 X 250 14 22.5 (SU) Slit-Score Line  AB Taiwan 230 X 100 X 250 14 22.5 (SU) Slit-Score Line	Printing Tolerance = +/ - Printing Tolerance	oble Bag   Single Put-in materi	l >= 8 kg 00M / Length) —		0.076mm / 75# / 3mil	"R" Adhesive T=0.022mm	IQC Inspect Color	Description:	
6	340	BC China 250X100X00X150X250 18 37.1	Recycle Kraft 80%	Bubble Double Put-in materi	l >= 16 kg	(* · ): -   -   -	0.178mm / 7mil	Water Adhesive T=0.022mm	Please refer to	UL LABEL OAP920920PML-0415-ACN U	IS(ML-60-35-1-US)
7	350	A/C China 205 X 140 X 20 16 26 Direction		PE Foam White	Pink	1 0 0800	0.254mm / 10mil	3M 467 T=0.05mm / 2mil	Typhore   Melody  DEC00 1	5 <del> </del>	<u>'</u>
This document and the technical data disclose are proprietary to Accton Tech. Corp. and shall		nt S Taiwan 220 X 100 X 200 1 10 6 Stamp		1		<del> </del>			Check	UNII SCALE 1 / 1	SIZE A3
duplicated, used, released, or disclosed witho expressed written permission.		AB Taiwan 230X100X100X100X100X300 18 37M Joint BC China 175X100X100X100X100X300 18 37M Joint		Laminated Non - lam		PP Film V	LF ( T = 0.025mm )	<b>DF</b> (T = 0.025mm)	Design Carry DEC08'1	5 MM (tN) Outside View	Sheet 1 of 1
are proprietary to Accton Tech. Corp. and shal duplicated, used, released, or disclosed witho	not be	S E China 175 X 100 X 250 12 18.6 Stamp	Thickness/mm 1.5 2.0 Del	ensity ( kg / m³) 27 ≥ 0	Other	Other 0	0.381mm / 15mil 0.500mm / 20mil LF ( T = 0.025mm )	3M 468 T=0.127mm / 5mil 3M 7945 T=0.127mm / 5mil  DF ( T = 0.025mm )	Check	UNIT SCALE 1 / 1  MM (M) Outside View	+

## Safety Label Note:

- 1. Printing color: Black
- 2. 製造國家(MFG Country):

Decide by import and export country for example:

- 1. MADE IN TAIWAN
- 2. MADE IN CHINA

印刷廠商代號(Vender ID): (CSA 要求標示)

Decide by Vendor


製造工廠代號(MFG Factory): (UL要求標示)


視代工廠而定(Decide by MFG Factory)

- 1. 吴陽 / Joytech (深圳 / ShenZhen)-----> None
- 2. Accton -----> AC


## 材質與背膠請用下列規格或相同等級之材料:


Fasson® 50micron Matte Silver PET TC/S333/BG50#WH 法森牌 50 微米亚银聚酯薄膜 TC/S333/80 克白格拉辛底纸 粘胶剂:永久性丙烯酸乳胶

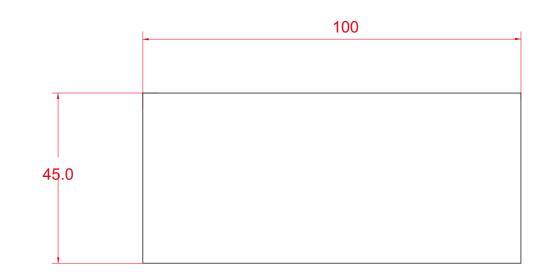

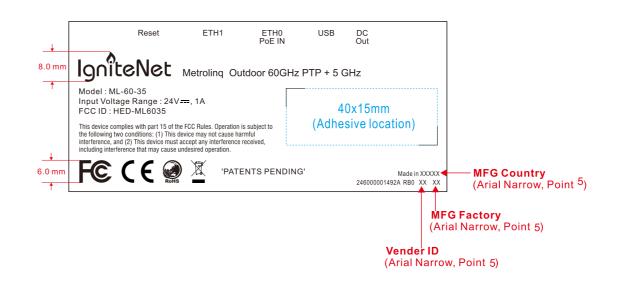

Modification	Card Paper / Top lineboard	Corrugate list Cardboard Die Cut Legend	Unspecialized = +/-0.3mm	PE Bag (A Degree)	Clear Pink	Label list	(Total Thickn	ness = mm <u>±</u> 10%)	Comply with RoHs	Acatac	
1	GSM CCNB SBS Double SBS	Fig. 1 Single wall Double wall GSM gimi <sub>Reference</sub> ) Bursting End Crush (CA Degree) (Top lineboard/Medium/Bottom lineboard) Strength (Ing. 1 Strength Ing. 1 St	0 16 0.05 0.1 0.15 0.2 0.2 0.5	Normal Anti-Stati	ESD Value/ $_{ohm}^{\Omega}$ = 9-11	Material &	Thickness	Adhesive (Except all leds in FP label )	Others	ACCION TE	CHNOLOGY CORP.
2	250	AV Taiwan 230 X 180 X 230 16 33.6 (CT) Crease Line	16 — 63 0.05 0.15 0.2 0.3 0.3 0.8 63 — 250 0.05 0.2 0.25 0.4 0.5 1.2	Anti-Static Electronic	ESD Value/ <sub>ohm</sub> < 5	Art paper	0.025mm / 25# / 1mil	ACTYLIC 1=0.022mm	Material Spec:	Dort No. 24600001	100A DEV DO
4	280	B China 250 x 112 x 250	250 — 500 01 025 03 06 08 18	Thickness/mm 0.04	0.06   0.08	✓ Metalized	0.050mm / 50# / 2mil 🗸	Acrylic UL approved T=0.022mm	IOC Ingrest Color	Part No. 2460000014	192A REV. B0
5	300	≻   L   China   \$50 x 100 x 250   14   22.5   1	Printing Tolerance = +/ - mm	Bubble Bag   Single layer	Put-in material >= 8 kg (By 1.5M/Width x 100M/Length)	White Polyester	0.076mm / 75# / 3mil	"R" Adhesive T=0.022mm	IQC Inspect Color	Description:	
6	340	BC China 250X100X00X150X250 18 37.1 (CE) SILE III	Pulo Tray Recycle Kraft 80% + Newspaper 20%	( Bubble Double	Put-in material >= 16 kg	(PP)Pepa paper	0.178mm / 7mil	Water Adhesive T=0.022mm	Please refer to	UL LABEL OAP920920PML-041	5_A CN US/ML-60-35-US)
7	350	A/C   China   205 X 140 X 280   16   26   Direction   201 X 100 X 280   16   26   Direction   201 X 100 X 280   201 X 10		EDE E	(By 1.5M/Width x 100M / Length)	PC 8B35	0.254mm / 10mil	3M 467 T=0.05mm / 2mil	Approve Melody DEC07'15		
This document and the technical data disclosed	Coated UV Rasistant	B China 175 X 140 X 230 14 28.5 Manufactory Inchina 220 X 100 X 200 14 19.6 Stamp		EPE Foam	vvnite Pink	PC 8010	0.381mm / 15mil	3M 468 T=0.127mm / 5mil	Check	UNIT   SCALE 1	/ 1   SIZE A3
are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without	PP Film LF / 0.15 DF / 0.18	S E China 175 X 100 X 250 12 18.6 Glue	Thickness/mm 1.5 2.0	Density ( kg / m³)	2/≥0   Other	Other	0.500mm / 20mil	3M 7945 T=0.127mm / 5mil	B 1	MM (1N) Outside Vie	w Sheet 1 of 1
expressed written permission.	FF FIIIII LF / 0.15 DF / 0.00	BC China 175X100X100X150X250 18 3 1 Joint	Draπ Angle 3 Hydrous % 7-1%	Laminated	Non - laminated	PP Film V	<b>LF</b> (T = 0.025mm)	<b>DF</b> ( T = 0.025mm )	Design   Carry   DEC07'15	IIIII   (IIII)   Odtolde vie	21.001 1 01 1





Label location