



## **ELECTROMAGNETIC INTERFERENCE TEST REPORT**

Company : ACCTON TECHNOLOGY CORP.  
Address : NO.1, Creatain Rd. III, Science-Based Industrial Park, Hsinchu  
30077, Taiwan, R.O.C.  
Sample Name : USB Serial Converter/Soho Basic  
Model : US 1000A/USB Serial 202  
Date Received : JAN. 16, 1998  
Date Tested : FEB. 17, 1998

MEASUREMENT PROCEDURE USED :  
CISPR 22, CLASS B, 1996

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.

	Name	Signature	Date
Testing Engineer	C.F.Wu/NVLAP	C.F.Wu	FEB. 27, 1998
Approving Manager	Paul Y. Liao/NVLAP	Paul Y. Liao	Feb. 27, 1998

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to test, and is invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the date issued.
5. This is a NIST/NVLAP accredited report but not constituted and endorsed by US government.



---

## **TABLE OF CONTENTS**

<b>TITLE</b>	<b>PAGE NO.</b>
<b>TEST REPORT CERTIFICATION</b>	
<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 DESCRIPTION OF EUT .....	3
1.2 DESCRIPTION OF PERIPHERALS.....	4
1.3 EUT & PERIPHERALS SETUP DIAGRAM.....	5
1.4 EUT OPERATING CONDITION.....	6
1.5 DESCRIPTION OF TEST SITE .....	6
<b>2. CONDUCTED POWERLINE TEST .....</b>	<b>7</b>
2.1 TEST EQUIPMENTS .....	7
2.2 TEST SETUP.....	7
2.3 CONDUCTED POWER LINE EMISSION LIMIT.....	8
2.4 TEST PROCEDURE.....	8
2.5 UNCERTAINTY OF CONDUCTED EMISSION .....	8
2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT .....	9
2.7 PHOTOS OF CONDUCTION TEST.....	10
<b>3. RADIATED EMISSION TEST .....</b>	<b>11</b>
3.1 TEST EQUIPMENTS .....	11
3.2 TEST SETUP.....	11
3.3 RADIATION LIMIT .....	12
3.4 TEST PROCEDURE.....	12
3.5 UNCERTAINTY OF RADIATED EMISSION.....	12
3.6 RADIATED RF NOISE MEASUREMENT .....	13
3.7 PHOTOS OF OPEN SITE.....	14-15



## **1. GENERAL INFORMATION**

### **1.1 DESCRIPTION OF EUT**

MANUFACTURER : ACCTON TECHNOLOGY CORP.

SAMPLE NAME : USB Serial Converter/Soho Basic

MODEL NUMBER : US 1000A/USB Serial 202

POWER SUPPLY : 120VAC/60Hz

POWER CORD : Unshielded cable



## 1.2 DESCRIPTION OF PERIPHERALS

### (1) PC

MODEL NUMBER : 32U  
SERIAL NUMBER : 78VZHK1  
MANUFACTURER : IBM CORP.  
F.C.C. ID : ANO6282F  
POWER CORD : Unshielded , Detachable , 1.8m

### (2) MONITOR

MODEL NUMBER : 6541-02N  
SERIAL NUMBER : 66-32602  
MANUFACTURER : IBM CORP.  
F.C.C. ID : H4ICM15010  
POWER CORD : Unshielded , Detachable , 1.8m

### (3) KEYBOARD

MODEL NUMBER : KB-8923  
SERIAL NUMBER : 1849106  
MANUFACTURER : IBM CORP.  
F.C.C. ID : E8HKB-5923

### (4) MOUSE

MODEL NUMBER : M-S34  
SERIAL NUMBER : -----  
MANUFACTURER : Logitech CORP.  
F.C.C. ID : DZL211029

### (5) PRINTER


MODEL NUMBER : 5152-002  
SERIAL NUMBER : 0754365  
MANUFACTURER : IBM CORP.  
F.C.C. ID : BKM9A85152002

### (6) MODEM

MODEL NUMBER : 4007AM  
SERIAL NUMBER : A10740073303  
MANUFACTURER : Hayes CORP.  
F.C.C. ID : BFJ4000AM



### 1.3 EUT & PERIPHERALS SETUP DIAGRAM

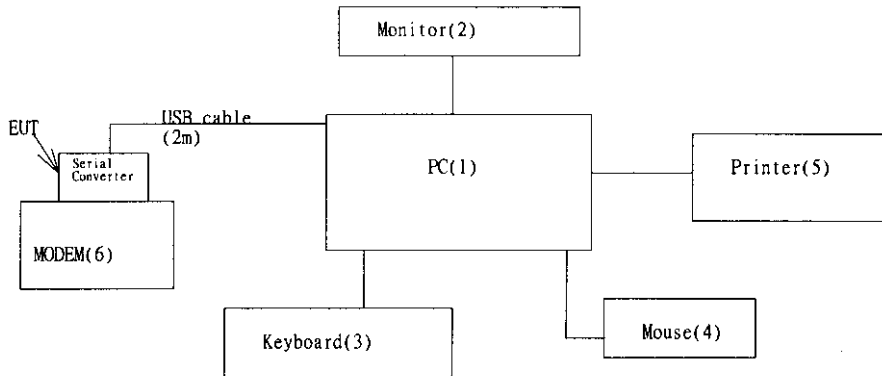

The indicated numbers (1)(2)-----please refer to item 1.2.



## 1.4 EUT OPERATING CONDITION

1. Powered on all equipments.
2. USB serial converter connected to MODEM.
3. Ran "Usbcheck" Program on PC.
4. Started to test.

## 1.5 DESCRIPTION OF TEST SITE

SITE DESCRIPTION : FCC certificate No. : 31040/SIT  
DNV certificate No. : 510-96-1016  
TÜV R. certificate No. : I9664582-9610  
Lloyd's certificate No. : LA003  
BCIQ certificate No. : SL2-IN-E-02  
NVLAP Lab. code : 200118-0  
CNLA certificate No. : CNLA-ZL97018  
VCCI certificate No. : R-629, C-650

NAME OF SITE : Electronics Research & Service Organization  
Industrial Technology Research Institute

SITE LOCATION : K500, 195-4, sec. 4, Chung Hsing Rd.,  
Chu-Tung Chen. Hsin-Chu, Taiwan 31015 R.O.C.




## 2. CONDUCTED POWERLINE TEST

### 2.1 TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests :

MANUFACTURER OR TYPE	MODEL No	DATE OF CALIBRATION
SPECTRUM ANALYZER & DISPLAY	HP 8568 A	MAR. 08, 1997
QUASI-PEAK ADAPTER	HP 85650 A	MAR. 08, 1997
ISOLATION TRANSFORMER	SOLAR 7032-1	N/A
L.I.S.N.	EMCO 3850/2	MAR. 25, 1997
L.I.S.N.	EMCO 3850/2	MAR. 25, 1997
TEST RECEIVER	R/S ESH3	MAR. 08, 1997
SHIELDED ROOM	KEENE 5983	N/A

### 2.2 TEST SETUP

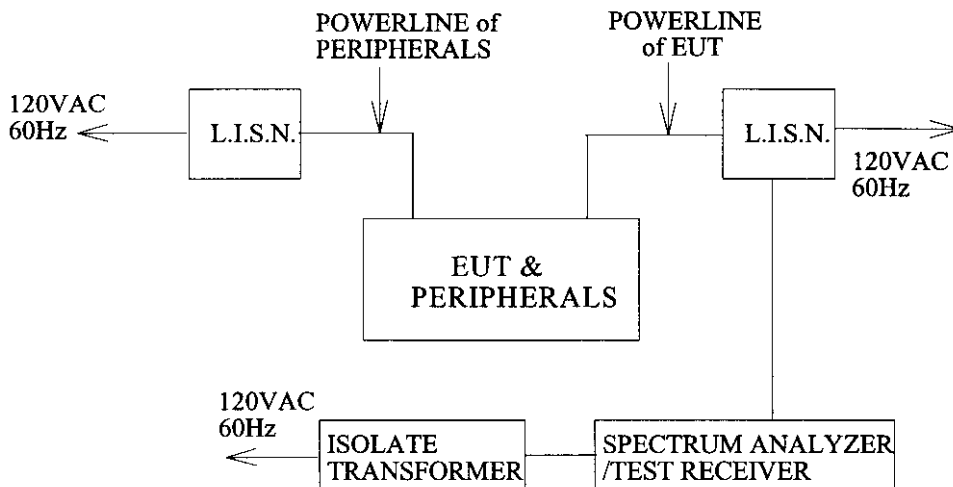



## 2.3 CONDUCTED POWER LINE EMISSION LIMIT

FREQUENCY (MHz)	MAXIMUM RF LINE VOLTAGE (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


## 2.4 TEST PROCEDURE

The test procedure is performed in a 12ft  $\times$  12ft  $\times$  8ft(L  $\times$  W  $\times$  H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W)  $\times$  1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

## 2.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is  $\pm 1.36$ dB.





## 2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.45 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are Quasi-peak values.

Temperature : 21°C

Humidity : 52 % RH

FREQUENCY (MHz)	READING(dB $\mu$ V)				LIMITS (dB $\mu$ V)	
	ONE END & GRD'D		THE OTHER END & GRD'D		Q.P.	Ave.
	Q.P.	Ave.	Q.P.	Ave.		
0.150	*	*	*	*	66.00	56.00
0.166	*	*	40.40	*	65.16	55.16
0.167	40.00	*	*	*	65.12	55.12
0.200	36.40	*	36.40	*	63.62	53.62
0.207	38.80	*	39.80	*	63.32	53.32
0.230	51.96	*	*	*	62.44	52.44
0.233	*	*	48.06	*	62.35	52.35
0.305	45.18	*	*	*	60.10	50.10
0.310	*	*	46.38	*	59.97	49.97
0.621	*	*	36.01	*	60.00	50.00
0.624	34.31	*	*	*	60.00	50.00
9.059	36.94	*	36.64	*	60.00	50.00
21.147	38.78	*	38.58	*	60.00	50.00
24.000	51.00	41.50	50.70	36.20	60.00	50.00
26.418	41.89	*	41.59	*	60.00	50.00
30.000	*	*	*	*	60.00	50.00

REMARKS : 1. \* Undetectable



### 3. RADIATED EMISSION TEST


#### 3.1 TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.

MANUFACTURER OR TYPE	MODEL NO	DATE OF CALIBRATION
CHASE BILOG ANTENNA	CBL6111A	MAY.26,1997
R/S TEST RECEIVER	ESMI	MAY.22, 1997
ANECHOIC/SHIELDED ROOM	KEENE 5981	N/A

#### 3.2 TEST SETUP

The diagram below shows the test setup which is utilized to make these measurements.

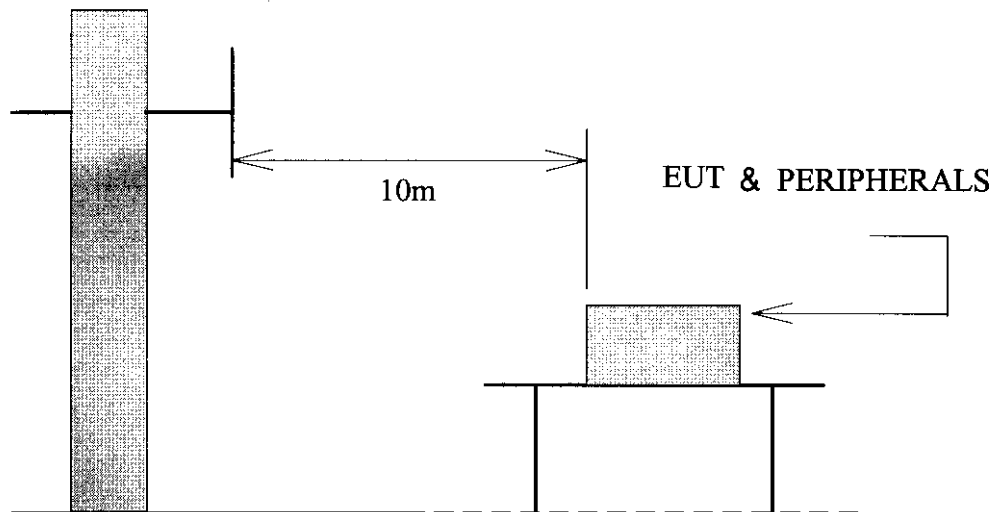

Antenna Elevation Variable



### 3.3 RADIATION LIMIT

All emanation from a class B computing device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below :

FREQUENCY (MHz)	DISTANCE (METERS)	FIELD STRENGTHS(dB $\mu$ V/M)	
		CLASS A	CLASS B
30-230	10	40	30
230-1000	10	47	37

Note : (1)The tighter limit shall apply at the edge between two frequency bands.

(2)Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

### 3.4 TEST PROCEDURE

The devices under test were placed on a rotatable table top 0.8 meter above ground. The table was rotated 360 degrees to determine the position of the highest radiation. EUT is set 10 meters from the interference receiving antenna which is mounted on the top of a variable height mast. The antenna height is varied between one meter and four meters above ground to find the maximum value of the field strength Both horizontal polarization and vertical polarization of the antenna are set to make the measurement.

The bandwidth setting on the E.M.I. meter (R/S TEST RECEIVER ESMI) is 120 KHz.

The levels are quasi peak value readings. The frequency spectrum from 30MHz to 1000MHz was investigated.

### 3.5 UNCERTAINTY OF RADIATED EMISSION

The uncertainty of radiated emission is  $\pm 2.72$ dB.



### 3.6 RADIATED RF NOISE MEASUREMENT

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 12°C

Humidity : 68% RH

FREQ- UENCY  (MHz)	ANTENNA FACTOR  (dB)	CABLE LOSS  (dB)	METER READING AT10m(dB $\mu$ V/M)		LIMITS  (dB $\mu$ V/M)	EMISSION LEVEL AT10m(dB $\mu$ V/M)	
			HORIZON- TAL	VERTICAL		HORIZON- TAL	VERTICAL
30.00	19.71	1.20	*	*	30.00	*	*
180.01	9.18	2.70	5.06	7.02	30.00	16.94	18.90
192.02	9.04	2.76	5.62	8.98	30.00	17.42	20.78
228.02	10.90	2.97	8.42	4.78	30.00	22.29	18.65
465.30	17.13	4.06	*	11.50	37.00	*	32.69
465.32	17.13	4.06	7.30	*	37.00	28.49	*
731.22	21.32	4.99	5.90	*	37.00	32.21	*
1000.00	24.69	5.70	*	*	37.00	*	*

REMARKS : 1. \* Undetectable

2. Emission level (dB  $\mu$  V/M) = Antenna Factor (dB) + Cable loss (dB)  
+ Meter Reading (dB  $\mu$  V/M).