



FCC TEST REPORT

REPORT NO.: RF920409H04

MODEL NO.: SMC7004AWBR, WG3005C 1-17

RECEIVED: Apr. 09, 2003

TESTED: Apr. 14 to May 07, 2003

APPLICANT: Accton Technology Corporation

ADDRESS: No.1, Creation Rd. III, Science-based Industrial
Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 50 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



Lab Code: 200376-0



Table of Contents

| | | |
|-------|---|----|
| 1 | CERTIFICATION..... | 4 |
| 2 | SUMMARY OF TEST RESULTS | 5 |
| 3 | GENERAL INFORMATION | 6 |
| 3.1 | GENERAL DESCRIPTION OF EUT..... | 6 |
| 3.2 | DESCRIPTION OF TEST MODES..... | 7 |
| 3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS | 7 |
| 3.4 | DESCRIPTION OF SUPPORT UNITS | 8 |
| 4 | TEST TYPES AND RESULTS | 10 |
| 4.1 | CONDUCTED EMISSION MEASUREMENT | 10 |
| 4.1.1 | TEST INSTRUMENTS..... | 10 |
| 4.1.2 | TEST PROCEDURES..... | 11 |
| 4.1.3 | DEVIATION FROM TEST STANDARD | 11 |
| 4.1.4 | TEST SETUP | 12 |
| 4.1.5 | EUT OPERATING CONDITIONS | 13 |
| 4.1.6 | TEST RESULTS..... | 14 |
| 4.2 | RADIATED EMISSION MEASUREMENT | 20 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 20 |
| 4.2.2 | TEST INSTRUMENTS..... | 21 |
| 4.2.3 | TEST PROCEDURES..... | 22 |
| 4.2.4 | DEVIATION FROM TEST STANDARD | 22 |
| 4.2.5 | TEST SETUP | 23 |
| 4.2.6 | EUT OPERATING CONDITIONS | 23 |
| 4.2.7 | TEST RESULTS..... | 24 |
| 4.3 | 6dB BANDWIDTH MEASUREMENT | 28 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT | 28 |
| 4.3.2 | TEST INSTRUMENTS..... | 28 |
| 4.3.3 | TEST PROCEDURE..... | 29 |
| 4.3.4 | DEVIATION FROM TEST STANDARD | 29 |
| 4.3.5 | TEST SETUP | 29 |
| 4.3.6 | EUT OPERATING CONDITIONS | 29 |
| 4.3.7 | TEST RESULTS..... | 30 |
| 4.4 | MAXIMUM PEAK OUTPUT POWER..... | 34 |
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 34 |
| 4.4.2 | INSTRUMENTS | 34 |
| 4.4.3 | TEST PROCEDURES..... | 35 |
| 4.4.4 | DEVIATION FROM TEST STANDARD | 35 |
| 4.4.5 | TEST SETUP | 35 |



4.4.6 EUT OPERATING CONDITIONS 35

4.4.7 TEST RESULTS..... 36

4.4.8 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT 37

4.4.9 TEST INSTRUMENTS 37

4.4.10 TEST PROCEDURE..... 38

4.4.11 DEVIATION FROM TEST STANDARD 38

4.4.12 TEST SETUP 38

4.4.13 EUT OPERATING CONDITION..... 38

4.4.14 TEST RESULTS..... 39

4.5 BAND EDGES MEASUREMENT43

4.5.1 LIMITS OF BAND EDGES MEASUREMENT 43

4.5.2 TEST INSTRUMENTS 43

4.5.3 TEST PROCEDURE 43

4.5.4 DEVIATION FROM TEST STANDARD 43

4.5.5 EUT OPERATING CONDITION..... 44

4.5.6 TEST RESULTS..... 44

4.6 ANTENNA REQUIREMENT47

4.6.1 STANDARD APPLICABLE..... 47

4.6.2 ANTENNA CONNECTED CONSTRUCTION..... 47

5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....48

6 INFORMATION ON THE TESTING LABORATORIES.....50



1 CERTIFICATION

PRODUCT : Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server, Wireless Router
MODEL NO. : SMC7004AWBR, WG3005C 1-17
BRAND : SMC, Accton
APPLICANT : Accton Technology Corporation
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247), ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Apr. 14 to May 07, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: *Amanda Chu*, **DATE:** *May 14, 2003*
(Amanda Chu)

APPROVED BY: *Eric Lin*, **DATE:** *May 14, 2003*
(Eric Lin, Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: 47 CFR Part 15, Subpart C | | | |
|--|--|---------------|--|
| Standard Section | Test Type and Limit | Result | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit Minimum passing margin is -15.05dBuV at 23.133MHz |
| 15.247(a)(2) | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz | PASS | Meet the requirement of limit |
| 15.247(b) | Maximum Peak Output Power Limit: max. 30dBm | PASS | Meet the requirement of limit |
| 15.247(c) | Radiated Emissions Limit: Table 15.209 | PASS | Meet the requirement of limit Minimum passing margin is -2.8dBuV at 125.02MHz |
| 15.247(d) | Power Spectral Density Limit: max. 8dBm | PASS | Meet the requirement of limit |
| 15.247(c) | Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency | PASS | Meet the requirement of limit |



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|---------------------------|--|
| PRODUCT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server, Wireless Router |
| MODEL NO. | SMC7004AWBR, WG3005C 1-17 |
| POWER SUPPLY | 9.0VDC from AC Adapter |
| MODULATION TYPE | DBPSK for 1Mbps DQPSK for 2Mbps CCK for 5.5/11Mbps |
| RADIO TECHNOLOGY | DSSS |
| TRANSFER RATE | 1/2/5.5/11Mbps |
| FREQUENCY RANGE | 2412MHz ~ 2462MHz |
| NUMBER OF CHANNEL | 11 |
| OUTPUT POWER | 15.6dBm |
| DATA CABLE | NA |
| IF, L.O. | IF= 374MHz, 748MHz, LO= 2038 ~ 2088MHz |
| ANTENNA TYPE | Dipole Antenna |
| I/O PORTS | RJ 45 Port x 4 (LAN port x 3, WAN port x 1) Printer port x 1, Console port x 1 |
| ASSOCIATED DEVICES | NA |

NOTE:

- The EUT has two model names which are identical to each other in all aspects except for the followings:

| Product Name | Brand | Model |
|---|--------|--------------|
| Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | SMC | SMC7004AWBR |
| Wireless Router | Accton | WG3005C 1-17 |

- The EUT was powered by the following power adapter:

| | |
|-----------------------|-----------------|
| Brand: | DVE |
| Model No.: | DV-91A |
| Input power : | 120Vac 60Hz 16W |
| Output power : | 9Vdc, 1000mA |

- For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1 | 2412 MHz | 7 | 2442 MHz |
| 2 | 2417 MHz | 8 | 2447 MHz |
| 3 | 2422 MHz | 9 | 2452 MHz |
| 4 | 2427 MHz | 10 | 2457 MHz |
| 5 | 2432 MHz | 11 | 2462 MHz |
| 6 | 2437 MHz | | |

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.




3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Product | Brand | Model No. | Serial No. | FCC ID |
|-----|-------------------|-------|------------|------------------------------|------------|
| 1 | PERSONAL COMPUTER | HP | DTPC 27 | SG21103561 | FCC DoC |
| 2 | MONITOR | ADI | CM100 | 026058T10200538 | FCC DoC |
| 3 | PRINTER | HP | C2642A | MY7961C1FQ | B94C2642X |
| 4 | MODEM | ACEEX | 1414 | 0206026776 | IFAXDM1414 |
| 5 | KEYBOARD | IBM | KB-9910 | 0035265 | FCC DoC |
| 6 | MOUSE | IBM | M-SAU-IBM6 | 23-225152 | JNZ211220 |
| 7 | NOTEBOOK COMPUTER | DELL | PP01L | TW-09C748-12800-1 7Q-C504 | FCC DoC |
| 8 | NOTEBOOK COMPUTER | DELL | PP01L | TW-09C748-12800-1 A3-1999 | FCC DoC |

| No. | Signal cable description |
|-----|--|
| 1 | NA |
| 2 | 1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core. |
| 3 | 1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core |
| 4 | 1.0m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core. |
| 5 | 1.8 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core. |
| 6 | 1.9 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core. |
| 7 | NA |
| 8 | NA |

Note: 1. All power cords of the above support units are unshielded (1.8m).

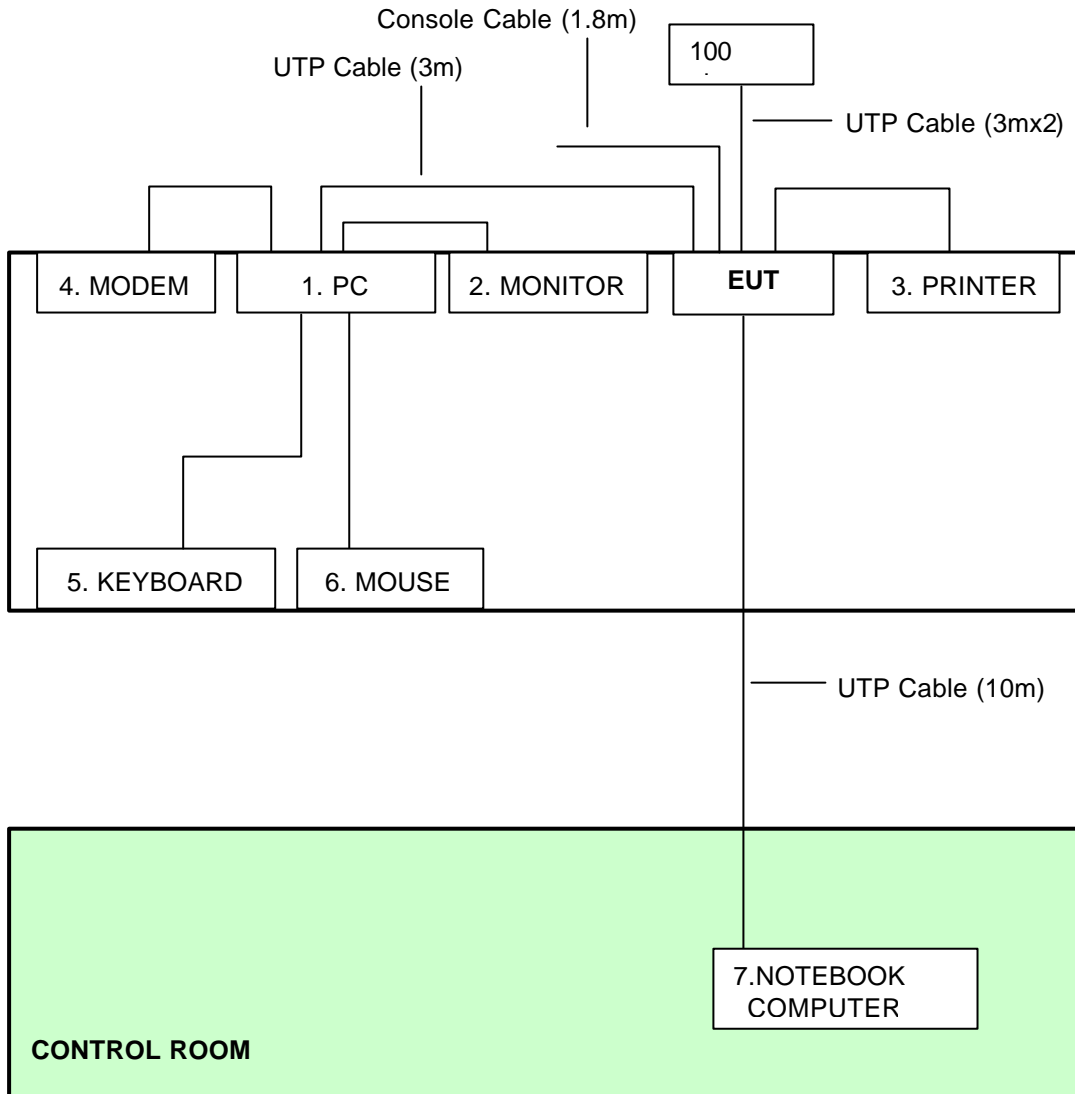

NOTE: 1. Support unit 7 was kept in the control room during the test.
2. Please refer to the photos of test configuration in Item 5 also.



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.1 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|-----------------------------------|-----------|-------------|------------------|
| ROHDE & SCHWARZ Test Receiver | ESCS 30 | 847124/029 | Nov. 17, 2003 |
| ROHDE & SCHWARZ LISN (for EUT) | ESHS-Z5 | 848773/004 | Nov. 13, 2003 |
| KYORITSU LISN (for peripheral) | KNW-407 | 8/1395/12 | Jul. 23, 2003 |
| RF Cable (JETBAO) | RG233/U | Cable_CA_01 | Jul. 03, 2003 |
| Terminator(for KYORITSU) | 50 | #1 | Apr. 11, 2004 |
| Software | Cond-V2e | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. A.
 3. The VCCI Con A Registration No. is C-817.




4.1.2 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

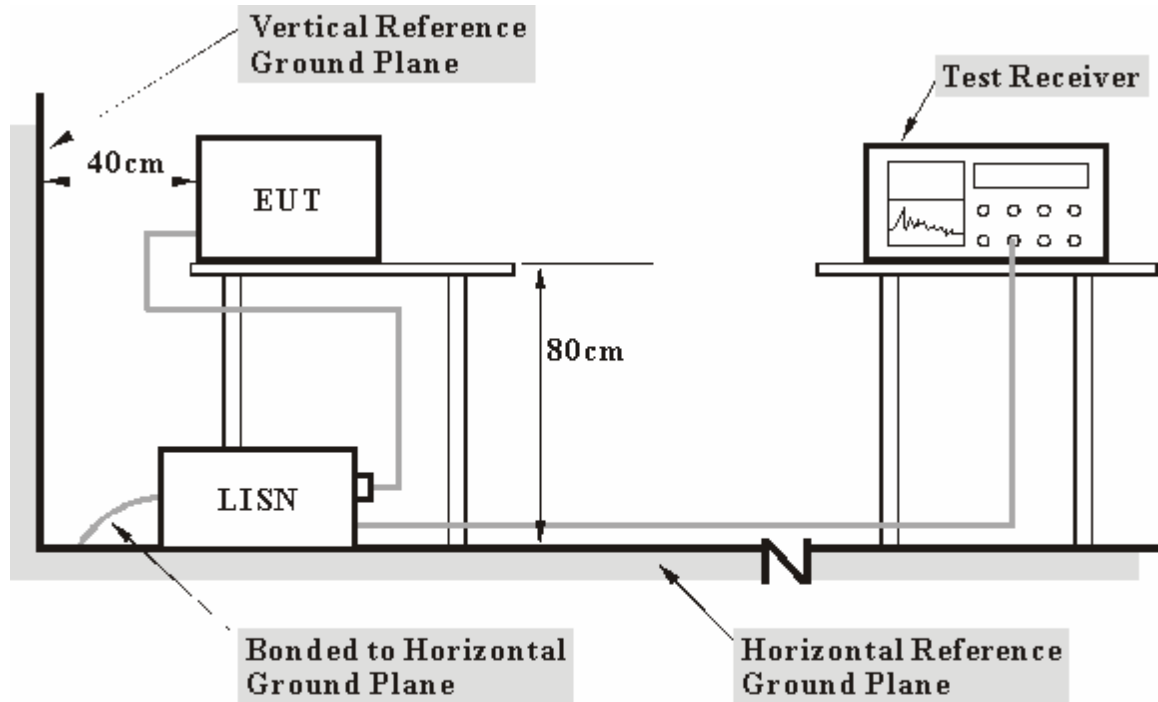

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via RJ 45 cables and wireless.
- d. The communication partner sent data to EUT by command "PING".




4.1.6 TEST RESULTS

| | | | |
|---------------------------------|---|----------------------|-----------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 24 deg. C, 57%RH, 978 hPa | TESTED BY | Tony Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.752 | 0.10 | 17.32 | - | 17.42 | - | 56.00 | 46.00 | -38.58 | - |
| 2 | 11.895 | 0.68 | 31.33 | - | 32.01 | - | 60.00 | 50.00 | -27.99 | - |
| 3 | 13.418 | 0.74 | 31.36 | - | 32.10 | - | 60.00 | 50.00 | -27.90 | - |
| 4 | 16.230 | 0.85 | 36.50 | - | 37.35 | - | 60.00 | 50.00 | -22.65 | - |
| 5 | 23.133 | 1.13 | 41.99 | - | 43.12 | - | 60.00 | 50.00 | -16.88 | - |
| 6 | 26.613 | 1.20 | 36.02 | - | 37.22 | - | 60.00 | 50.00 | -22.78 | - |

- NOTES: (1) "**": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

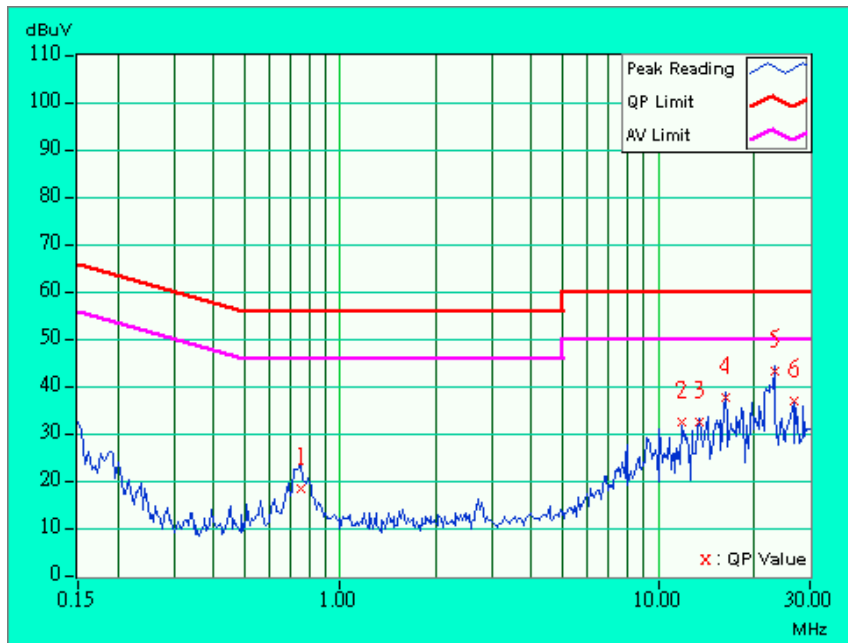




| | | | |
|---------------------------------|---|----------------------|-------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 23 deg. C, 55%RH, 978 hPa | TESTED BY | Tony Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.740 | 0.10 | 21.36 | - | 21.46 | - | 56.00 | 46.00 | -34.54 | - |
| 2 | 11.895 | 0.54 | 29.97 | - | 30.51 | - | 60.00 | 50.00 | -29.49 | - |
| 3 | 13.480 | 0.57 | 30.42 | - | 30.99 | - | 60.00 | 50.00 | -29.01 | - |
| 4 | 17.695 | 0.65 | 32.93 | - | 33.58 | - | 60.00 | 50.00 | -26.42 | - |
| 5 | 23.133 | 0.83 | 42.67 | - | 43.50 | - | 60.00 | 50.00 | -16.50 | - |
| 6 | 26.491 | 0.90 | 40.19 | - | 41.09 | - | 60.00 | 50.00 | -18.91 | - |

- NOTES: (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

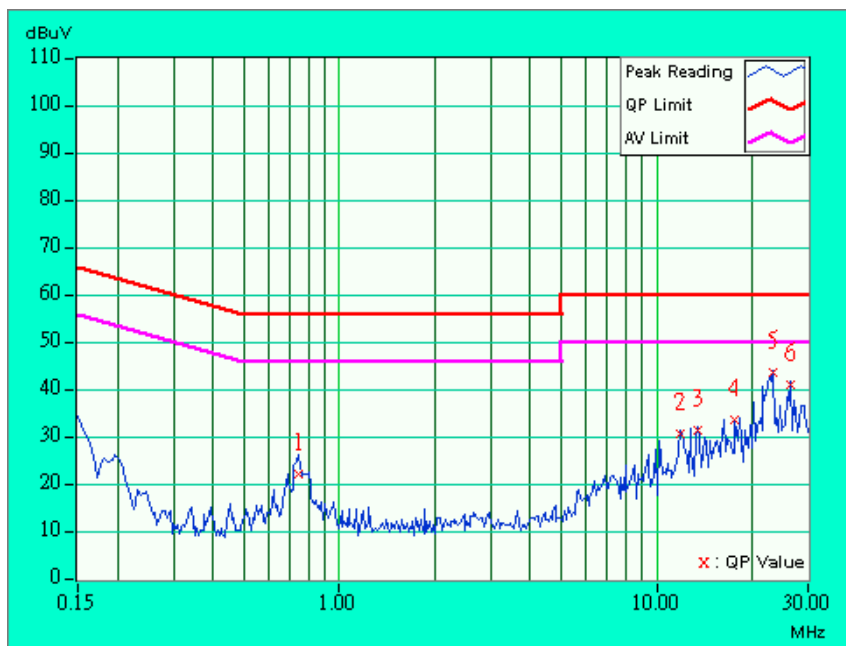




| | | | |
|---------------------------------|---|----------------------|-----------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 23 deg. C, 55%RH, 978 hPa | TESTED BY | Tony Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.740 | 0.10 | 18.97 | - | 19.07 | - | 56.00 | 46.00 | -36.93 | - |
| 2 | 12.199 | 0.69 | 29.86 | - | 30.55 | - | 60.00 | 50.00 | -29.45 | - |
| 3 | 16.230 | 0.85 | 37.57 | - | 38.42 | - | 60.00 | 50.00 | -21.58 | - |
| 4 | 18.918 | 0.96 | 34.34 | - | 35.30 | - | 60.00 | 50.00 | -24.70 | - |
| 5 | 23.133 | 1.13 | 41.97 | - | 43.10 | - | 60.00 | 50.00 | -16.90 | - |
| 6 | 26.492 | 1.20 | 34.31 | - | 35.51 | - | 60.00 | 50.00 | -24.49 | - |

- NOTES: (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

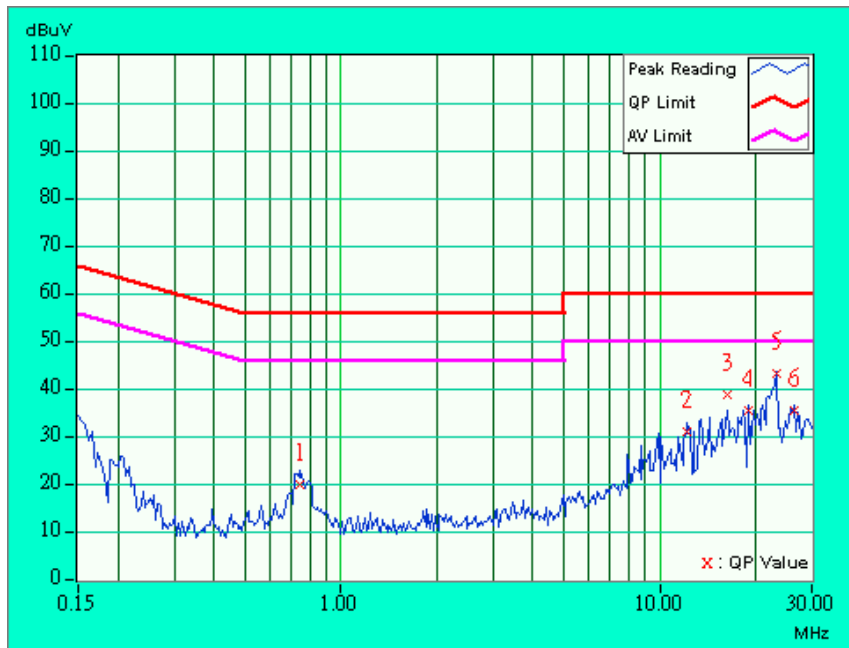




| | | | |
|---------------------------------|---|----------------------|-------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 23 deg. C, 55%RH, 978 hPa | TESTED BY | Tony Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.740 | 0.10 | 21.32 | - | 21.42 | - | 56.00 | 46.00 | -34.58 | - |
| 2 | 12.809 | 0.56 | 30.45 | - | 31.01 | - | 60.00 | 50.00 | -28.99 | - |
| 3 | 16.230 | 0.62 | 34.56 | - | 35.18 | - | 60.00 | 50.00 | -24.82 | - |
| 4 | 17.695 | 0.65 | 32.25 | - | 32.90 | - | 60.00 | 50.00 | -27.10 | - |
| 5 | 23.133 | 0.83 | 43.60 | - | 44.43 | - | 60.00 | 50.00 | -15.57 | - |
| 6 | 29.238 | 0.90 | 38.08 | - | 38.98 | - | 60.00 | 50.00 | -21.02 | - |

- NOTES: (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

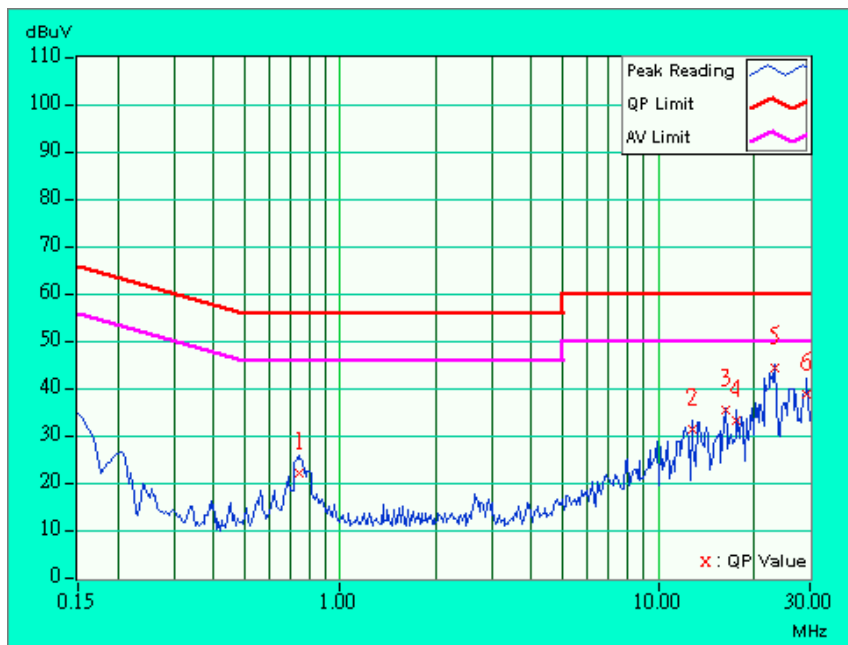




| | | | |
|---------------------------------|---|----------------------|-----------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | PHASE | Line (L) |
| ENVIRONMENTAL CONDITIONS | 23 deg. C, 55%RH, 978 hPa | TESTED BY | Tony Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.759 | 0.10 | 17.36 | - | 17.46 | - | 56.00 | 46.00 | -38.54 | - |
| 2 | 9.938 | 0.60 | 29.58 | - | 30.18 | - | 60.00 | 50.00 | -29.82 | - |
| 3 | 12.199 | 0.69 | 31.50 | - | 32.19 | - | 60.00 | 50.00 | -27.81 | - |
| 4 | 16.230 | 0.85 | 36.97 | - | 37.82 | - | 60.00 | 50.00 | -22.18 | - |
| 5 | 21.668 | 1.07 | 38.52 | - | 39.59 | - | 60.00 | 50.00 | -20.41 | - |
| 6 | 23.133 | 1.13 | 42.39 | - | 43.52 | - | 60.00 | 50.00 | -16.48 | - |

- NOTES: (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

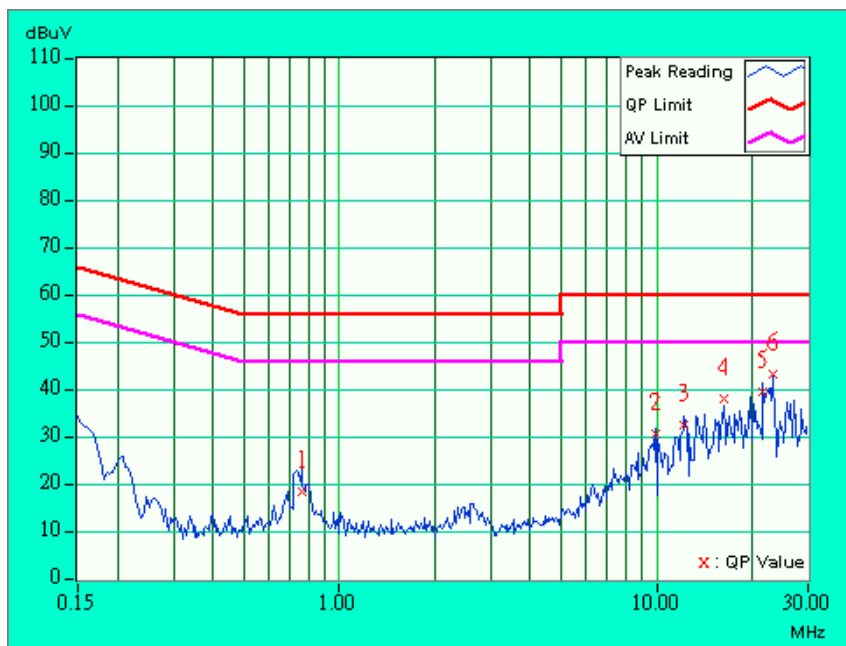




| | | | |
|---------------------------------|---|----------------------|-------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | PHASE | Neutral (N) |
| ENVIRONMENTAL CONDITIONS | 23 deg. C, 55%RH, 978 hPa | TESTED BY | Tony Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----------|---------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|--------------|---------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.748 | 0.10 | 19.49 | - | 19.59 | - | 56.00 | 46.00 | -36.41 | - |
| 2 | 13.359 | 0.57 | 31.90 | - | 32.47 | - | 60.00 | 50.00 | -27.53 | - |
| 3 | 16.230 | 0.62 | 34.62 | - | 35.24 | - | 60.00 | 50.00 | -24.76 | - |
| 4 | 23.133 | 0.83 | 44.12 | - | 44.95 | - | 60.00 | 50.00 | -15.05 | - |
| 5 | 26.488 | 0.90 | 38.12 | - | 39.02 | - | 60.00 | 50.00 | -20.98 | - |
| 6 | 29.238 | 0.90 | 38.86 | - | 39.76 | - | 60.00 | 50.00 | -20.24 | - |

- NOTES: (1) "": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

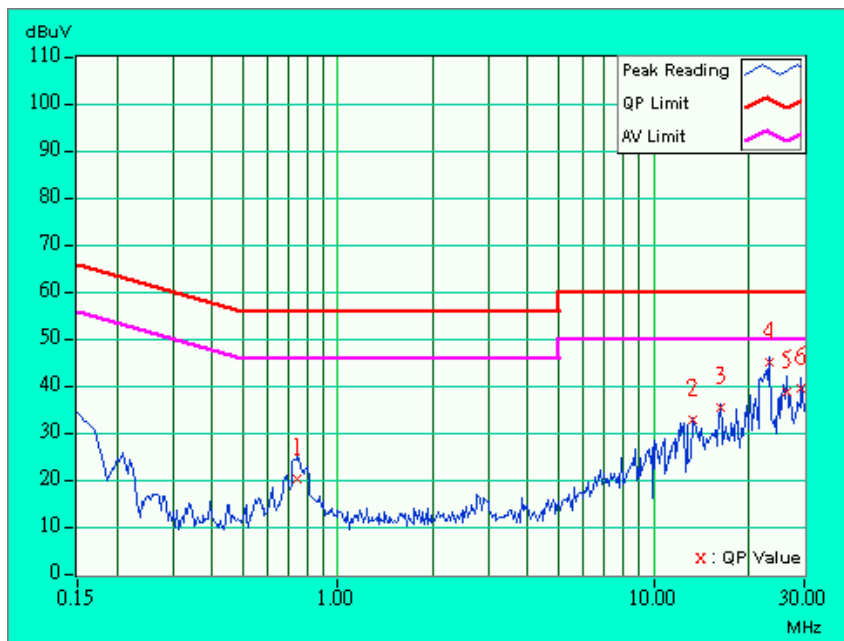



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field Strength of Fundamental | |
|----------------------|-------------------------------|--------|
| | uV/m | dBuV/m |
| 30-88 | 100 | 40.0 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46.0 |
| Above 960 | 500 | 54.0 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---------------------------------------|-------------|-------------------------|------------------|
| HP Spectrum Analyzer | 8594ER | 3829U04676 | Jul. 14, 2003 |
| ADVANTEST Spectrum Analyzer | R3271A | 85060311 | May 21, 2003 |
| CHASE RF Pre_Amplifier | CPA9232 | 1057 | Apr. 24, 2004 |
| HP Pre_Amplifier | 8449B | 3008A01281 | June 27, 2004 |
| ROHDE & SCHWARZ Test Receiver | ESVS 10 | 849231 /019 | Nov. 03, 2003 |
| CHASE Broadband Antenna | CBL6111c | 2730 | Jul 17, 2003 |
| Schwarzbeck Horn_Antenna | BBHA9120-D1 | D123 | Jul. 31, 2003 |
| SCHWARZBECK Tunable Dipole Antenna | UHAP | 897 | Mar. 07, 2005 |
| SCHWARZBECK Tunable Dipole Antenna | VHAP | 880 | Mar. 07, 2005 |
| RF Switches (ARNITSU) | CS-201 | 1565157 | Jul. 29, 2003 |
| RF CABLE (Chaintek) 1GHz-20GHz | Ak 9515-D | 001 | Aug, 20.2003 |
| RF Cable(RICHTEC) | 9913-30M | STCCAB-30M-1GH z-021 | Nov. 5, 2003 |
| Software | AS60P8 | NA | NA |
| CHANCE MOST Antenna Tower | AT-100 | 0203 | NA |
| CHANCE MOST Turn Table | TT-100 | 0203 | NA |

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

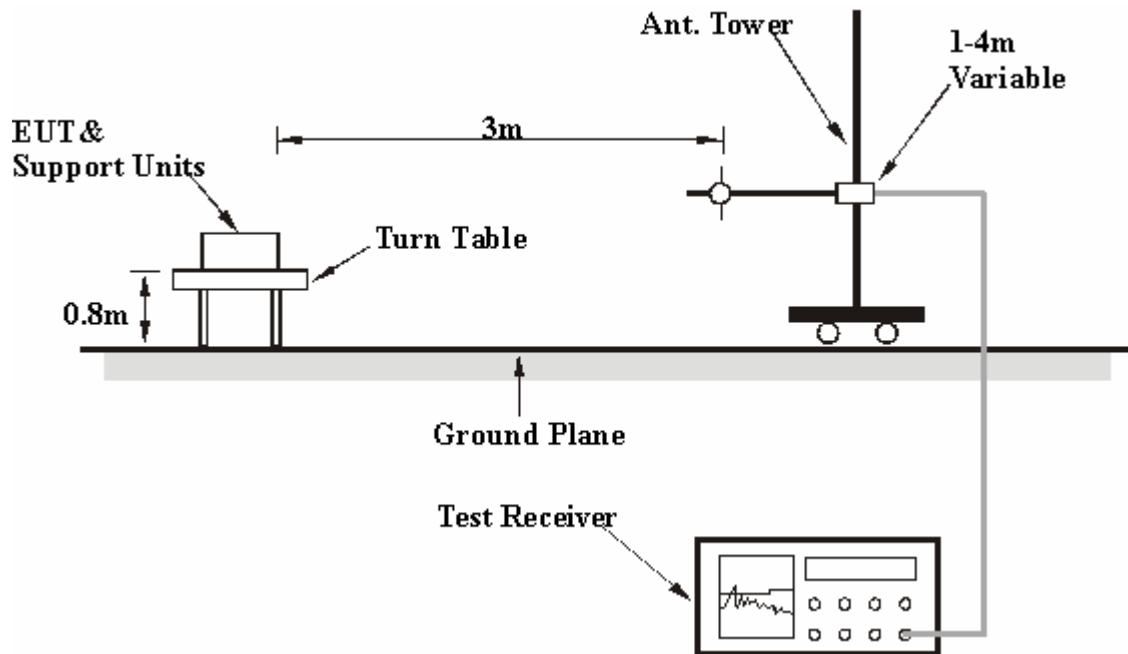

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

| | | | |
|---------------------------------|---|--------------------------|-------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 11 | FREQUENCY RANGE | 30-1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 24 deg. C, 59%RH, 978 hPa | TESTED BY | Tony Chen |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 125.03 | 27.4 QP | 43.50 | -16.10 | 1.67 H | 250 | 15.30 | 12.00 |
| 2 | 168.02 | 21.1 QP | 43.50 | -22.40 | 2.27 H | 344 | 11.30 | 9.80 |
| 3 | 216.02 | 21.7 QP | 46.00 | -24.30 | 1.37 H | 137 | 12.60 | 9.10 |
| 4 | 240.02 | 23.2 QP | 46.00 | -22.80 | 1.62 H | 144 | 11.30 | 11.80 |
| 5 | 250.02 | 32.5 QP | 46.00 | -13.50 | 1.79 H | 264 | 19.50 | 13.00 |
| 6 | 375.04 | 41.6 QP | 46.00 | -4.40 | 1.33 H | 208 | 25.40 | 16.20 |
| 7 | 456.04 | 24.6 QP | 46.00 | -21.40 | 2.06 H | 31 | 6.30 | 18.20 |
| 8 | 792.06 | 29.8 QP | 46.00 | -16.20 | 2.27 H | 100 | 6.00 | 23.80 |
| 9 | 912.07 | 30.4 QP | 46.00 | -15.60 | 1.71 H | 343 | 5.30 | 25.10 |
| 10 | 936.07 | 30.0 QP | 46.00 | -16.00 | 1.78 H | 341 | 3.80 | 26.10 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 53.96 | 27.8 QP | 40.00 | -12.20 | 1.00 V | 243 | 20.70 | 7.00 |
| 2 | 125.02 | 40.7 QP | 43.50 | -2.80 | 1.00 V | 304 | 28.70 | 12.00 |
| 3 | 250.02 | 32.2 QP | 46.00 | -13.80 | 1.12 V | 251 | 19.20 | 13.00 |
| 4 | 375.04 | 41.6 QP | 46.00 | -4.40 | 1.31 V | 164 | 25.40 | 16.20 |
| 5 | 400.04 | 26.2 QP | 46.00 | -19.80 | 1.26 V | 157 | 9.10 | 17.10 |
| 6 | 480.04 | 28.7 QP | 46.00 | -17.30 | 1.30 V | 123 | 9.80 | 18.90 |
| 7 | 672.04 | 27.2 QP | 46.00 | -18.80 | 1.06 V | 352 | 5.00 | 22.10 |
| 8 | 840.06 | 32.3 QP | 46.00 | -13.70 | 1.28 V | 10 | 7.50 | 24.80 |
| 9 | 864.06 | 31.2 QP | 46.00 | -14.80 | 1.27 V | 1 | 6.20 | 25.10 |
| 10 | 912.07 | 31.1 QP | 46.00 | -14.90 | 1.16 V | 195 | 6.00 | 25.10 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



| | | | |
|---------------------------------|---|--------------------------|--------------------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 1 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24 deg. C, 59%RH, 978 hPa | TESTED BY | Tony Chen |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2038.00 | 35.7 PK | 74.00 | -38.30 | 1.05 H | 225 | 6.80 | 28.90 |
| 2 | 2389.00 | 43.5 PK | 74.00 | -30.50 | 1.82 H | 275 | 10.00 | 33.50 |
| 3 | *2412.00 | 88.8 PK | | | 2.15 H | 225 | 58.90 | 29.90 |
| 3 | *2412.00 | 86.3 AV | | | 2.15 H | 225 | 56.40 | 28.90 |
| 4 | 2493.00 | 38.8 PK | 74.00 | -35.20 | 1.41 H | 265 | 4.40 | 34.50 |
| 5 | 4076.00 | 37.5 PK | 74.00 | -36.50 | 1.86 H | 282 | 3.50 | 34.00 |
| 6 | 4824.00 | 39.6 PK | 74.00 | -34.40 | 1.24 H | 244 | 3.40 | 36.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2038.00 | 37.2 PK | 74.00 | -36.80 | 1.53 V | 276 | 8.30 | 28.90 |
| 2 | 2389.00 | 53.9 PK | 74.00 | -20.10 | 1.69 V | 227 | 20.40 | 33.50 |
| 2 | 2389.00 | 46.9 AV | 54.00 | -7.10 | 1.69 V | 227 | 13.40 | 28.90 |
| 3 | *2412.00 | 101.7 PK | | | 1.13 V | 325 | 71.80 | 29.90 |
| 3 | *2412.00 | 98.6 AV | | | 1.13 V | 325 | 68.70 | 33.50 |
| 4 | 2496.00 | 43.6 PK | 74.00 | -30.40 | 2.12 V | 238 | 10.80 | 32.80 |
| 5 | 4076.00 | 37.7 PK | 74.00 | -36.30 | 1.62 V | 305 | 3.70 | 34.00 |
| 6 | 4824.00 | 40.8 PK | 74.00 | -33.20 | 1.71 V | 302 | 4.60 | 36.20 |

- REMARKS:**
1. Emission level(dBuV/m)= Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



| | | | |
|---------------------------------|---|--------------------------|--------------------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 6 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24 deg. C, 59%RH, 978 hPa | TESTED BY | Tony Chen |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2063.00 | 36.9 PK | 74.00 | -37.10 | 1.00 H | 2 | 7.90 | 29.10 |
| 2 | 2374.00 | 39.6 PK | 74.00 | -34.40 | 1.05 H | 113 | 8.90 | 30.70 |
| 3 | *2437.00 | 94.2 PK | | | 1.11 H | 330 | 64.20 | 30.00 |
| 3 | *2437.00 | 91.9 AV | | | 1.11 H | 330 | 61.90 | 29.10 |
| 4 | 2492.00 | 39.7 PK | 74.00 | -34.30 | 1.96 H | 107 | 4.60 | 35.00 |
| 5 | 4126.00 | 38.0 PK | 74.00 | -36.00 | 1.29 H | 67 | 3.90 | 34.10 |
| 6 | 4874.00 | 39.4 PK | 74.00 | -34.60 | 1.17 H | 28 | 3.00 | 36.50 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2063.00 | 40.6 PK | 74.00 | -33.40 | 1.24 V | 20 | 11.50 | 29.10 |
| 2 | 2384.00 | 49.5 PK | 74.00 | -24.50 | 1.43 V | 11 | 17.60 | 32.00 |
| 3 | *2437.00 | 101.0 PK | | | 1.72 V | 34 | 71.00 | 30.00 |
| 3 | *2437.00 | 99.0 AV | | | 1.72 V | 34 | 69.00 | 29.10 |
| 4 | 2497.00 | 46.4 PK | 74.00 | -27.60 | 1.33 V | 24 | 14.20 | 32.20 |
| 5 | 4126.00 | 39.0 PK | 74.00 | -35.00 | 1.45 V | 66 | 5.00 | 34.10 |
| 6 | 4874.00 | 41.1 PK | 74.00 | -32.90 | 1.53 V | 60 | 4.60 | 36.50 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



| | | | |
|---------------------------------|---|--------------------------|--------------------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| MODE | Channel 11 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 24 deg. C, 59%RH, 978 hPa | TESTED BY | Tony Chen |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2088.00 | 34.4 PK | 74.00 | -39.60 | 1.69 H | 121 | 5.20 | 29.20 |
| 2 | 2365.00 | 35.7 PK | 74.00 | -38.30 | 1.53 H | 120 | 5.00 | 30.60 |
| 3 | *2462.00 | 91.5 PK | | | 2.20 H | 322 | 61.40 | 30.10 |
| 3 | *2462.00 | 87.6 AV | | | 2.20 H | 322 | 57.60 | 29.20 |
| 4 | 2488.00 | 36.6 PK | 74.00 | -37.40 | 1.38 H | 40 | 6.50 | 30.10 |
| 5 | 4176.00 | 37.9 PK | 74.00 | -36.10 | 1.54 H | 322 | 3.70 | 34.20 |
| 6 | 4924.00 | 39.1 PK | 74.00 | -34.90 | 1.96 H | 65 | 2.40 | 36.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2088.00 | 38.1 PK | 74.00 | -35.90 | 1.19 V | 159 | 8.90 | 29.20 |
| 2 | 2378.00 | 44.5 PK | 74.00 | -29.50 | 1.70 V | 251 | 13.80 | 30.70 |
| 3 | *2462.00 | 102.8 PK | | | 1.39 V | 45 | 72.70 | 30.10 |
| 3 | *2462.00 | 98.9 AV | | | 1.39 V | 45 | 68.80 | 29.20 |
| 4 | 2491.00 | 51.7 PK | 74.00 | -22.30 | 2.14 V | 239 | 16.10 | 35.60 |
| 4 | 2491.00 | 44.9 AV | 54.00 | -9.10 | 2.14 V | 239 | 9.30 | 30.70 |
| 5 | 4176.00 | 39.2 PK | 74.00 | -34.80 | 1.46 V | 264 | 5.00 | 34.20 |
| 6 | 4924.00 | 40.7 PK | 74.00 | -33.30 | 1.45 V | 314 | 4.00 | 36.70 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|--------------|------------------|
| R&S SPECTRUM ANALYZER | FSP | 1093.4495.30 | Dec. 19, 2003 |

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

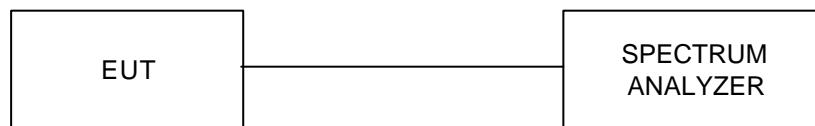

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

| | | | |
|-----------------------------|---|---------------------------------|--------------------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 24deg. C, 66%RH, 978 hPa |
| TEST BY | Tony Chen | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6 dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|----------------|--------------------------------|-----------------------------|----------------------------|------------------|
| 1 | 2412 | 11.48 | 0.5 | PASS |
| 6 | 2437 | 11.24 | 0.5 | PASS |
| 11 | 2462 | 11.20 | 0.5 | PASS |




CH1

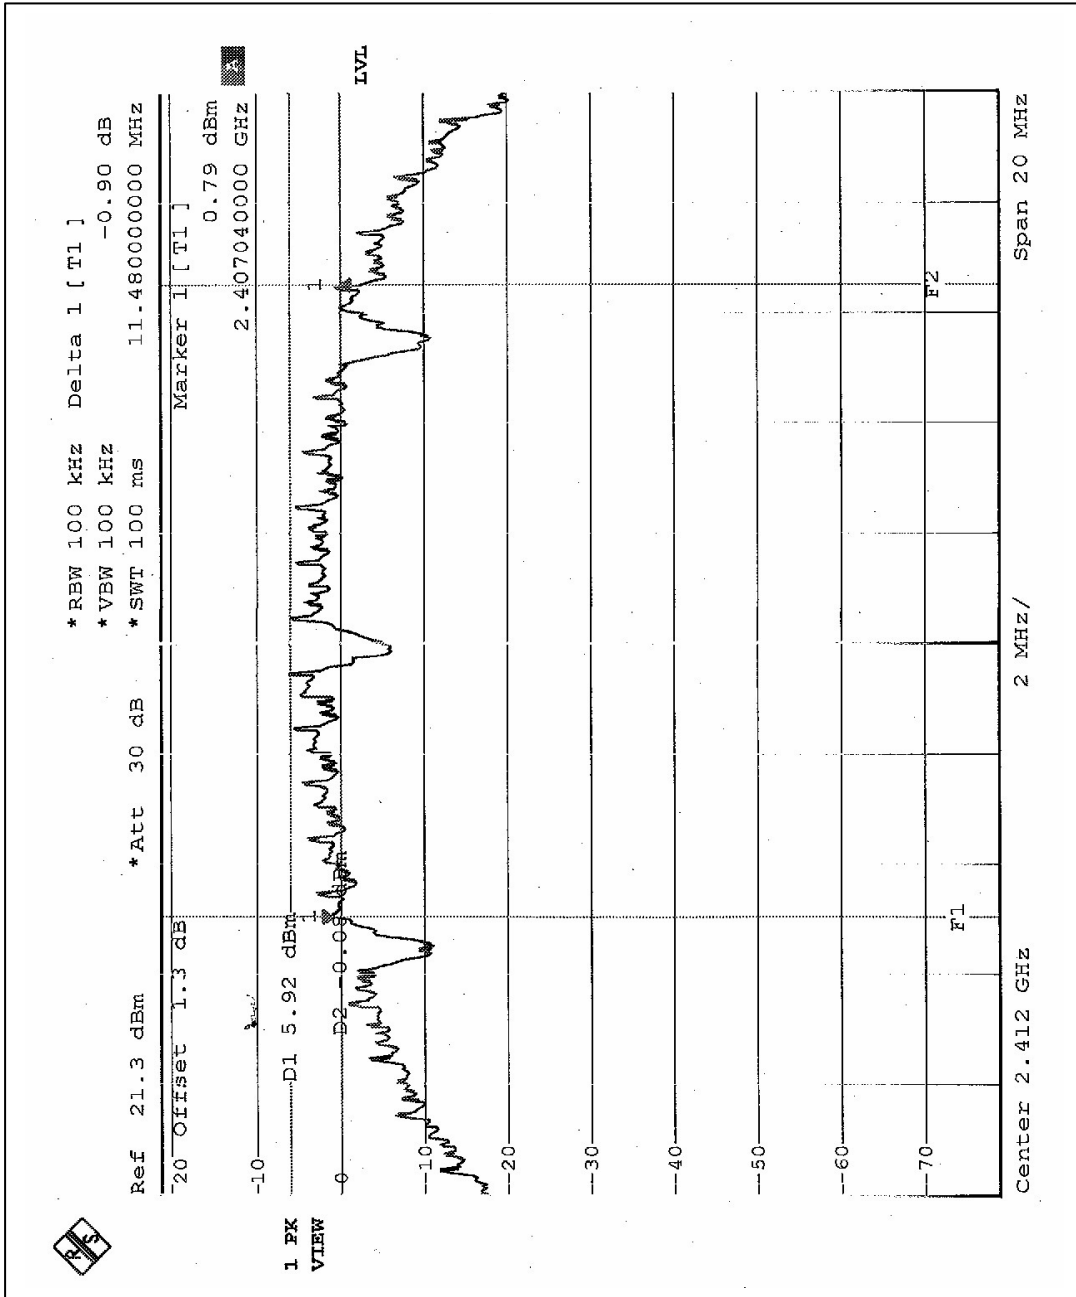




CH6

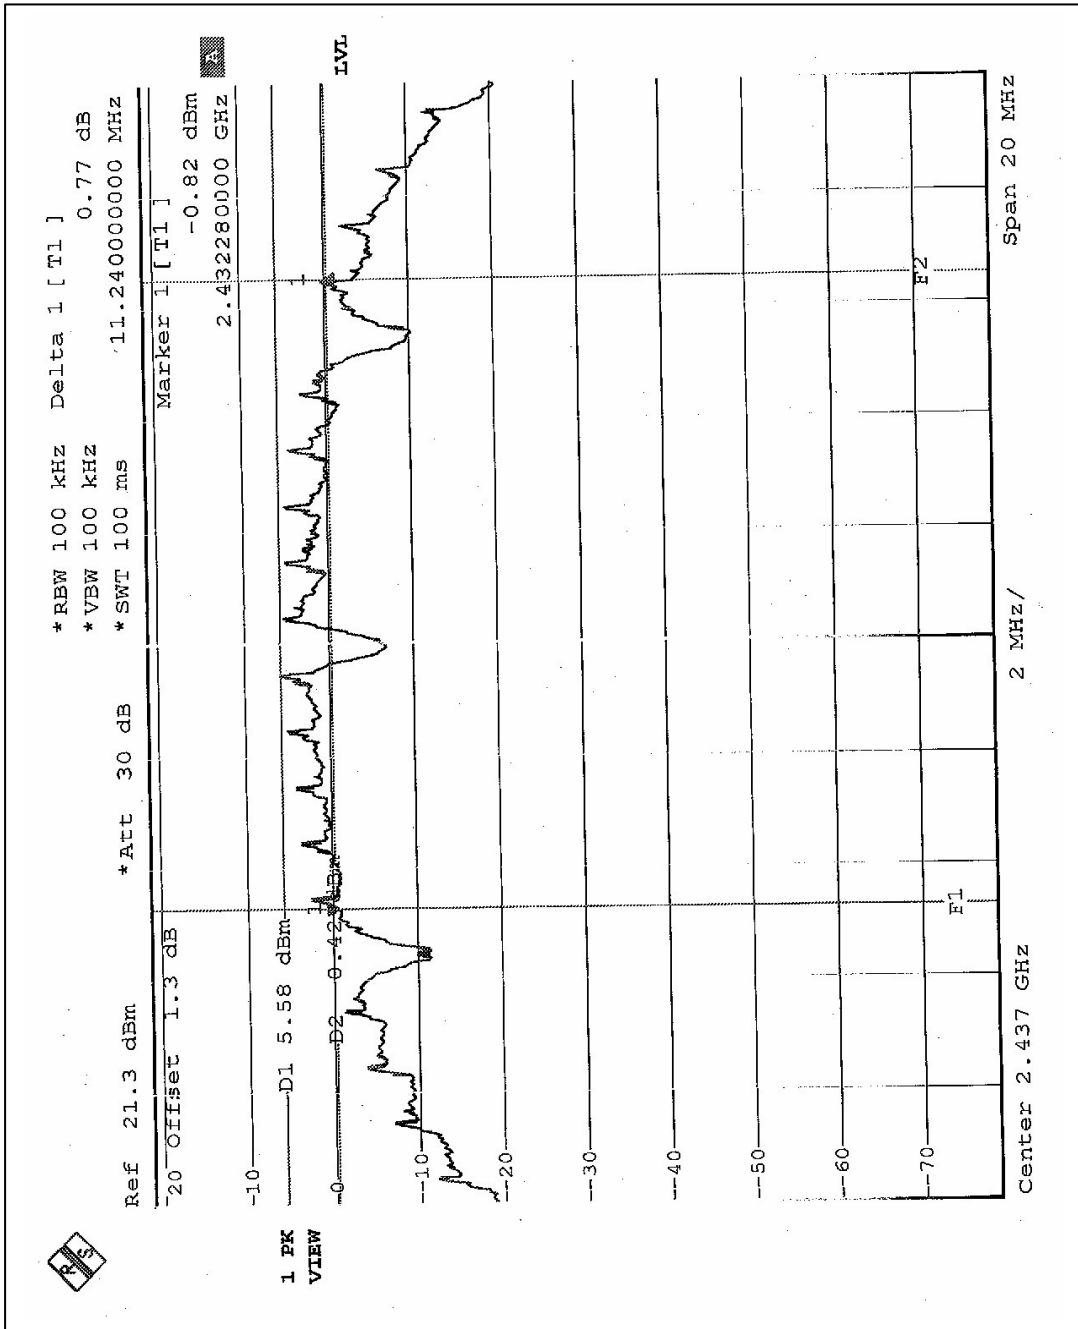



CH11

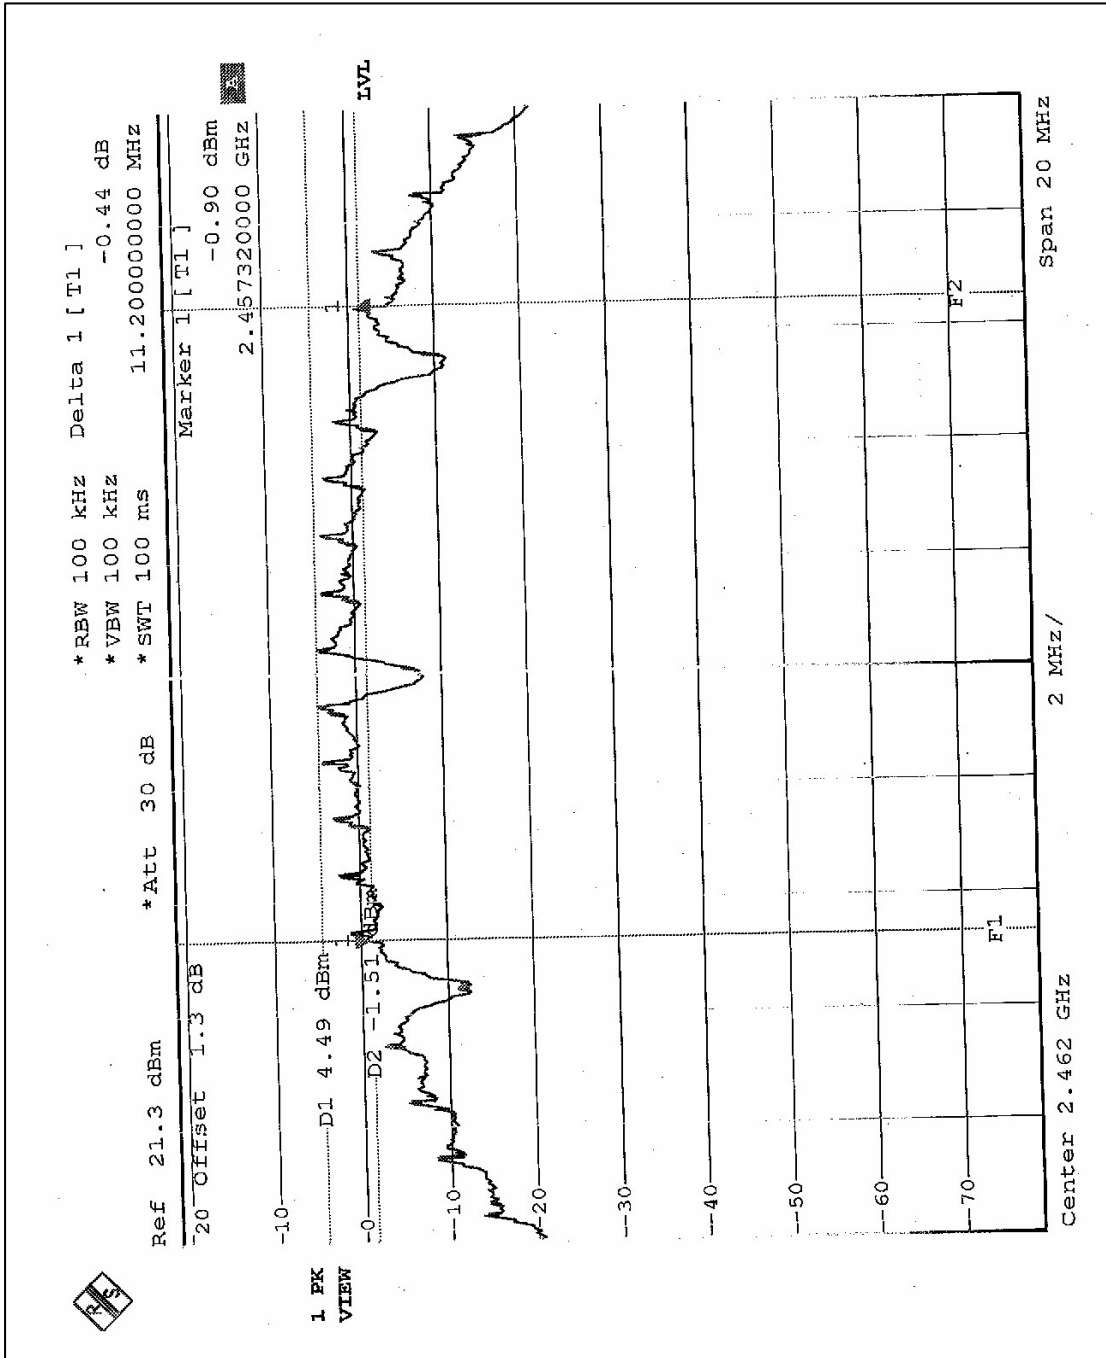



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SINGLE CHANNEL POWER METER | NRVS | 100026 | Mar. 06, 2004 |
| PEAK POWER SENSOR | NRV-Z32 | 100013 | Mar. 06, 2004 |

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

| | | | |
|-----------------------------|---|---------------------------------|-------------------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 24deg.C, 66%RH, 978 hPa |
| TEST BY | Tony Chen | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|----------------|--------------------------------|--------------------------------|-------------------------------|------------------|
| 1 | 2412 | 15.60 | 30 | PASS |
| 6 | 2437 | 15.05 | 30 | PASS |
| 11 | 2462 | 15.49 | 30 | PASS |



4.4.8 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.4.9 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|--------------|------------------|
| R&S SPECTRUM ANALYZER | FSP | 1093.4495.30 | Dec. 19, 2003 |

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.10 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.4.11 DEVIATION FROM TEST STANDARD

No deviation

4.4.12 TEST SETUP

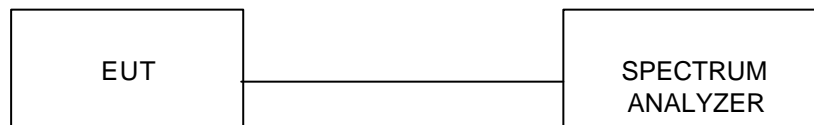

4.4.13 EUT OPERATING CONDITION

Same as Item 4.3.6




4.4.14 TEST RESULTS

| | | | |
|-----------------------------|---|---------------------------------|--------------------------|
| EUT | Barricade 2.4GHz 11Mbps Wireless Cable/DSL Broadband Router with Print Server | | |
| MODEL | SMC7004AWBR | | |
| INPUT POWER (SYSTEM) | 120Vac, 60Hz | ENVIRONMENTAL CONDITIONS | 24deg. C, 66%RH, 978 hPa |
| TEST BY | Tony Chen | | |

| CHANNEL NUMBER | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3 kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|-----------------------|---------------------------------|---|----------------------------|------------------|
| 1 | 2412 | -8.82 | 8 | PASS |
| 6 | 2437 | -9.35 | 8 | PASS |
| 11 | 2462 | -9.34 | 8 | PASS |




CH1

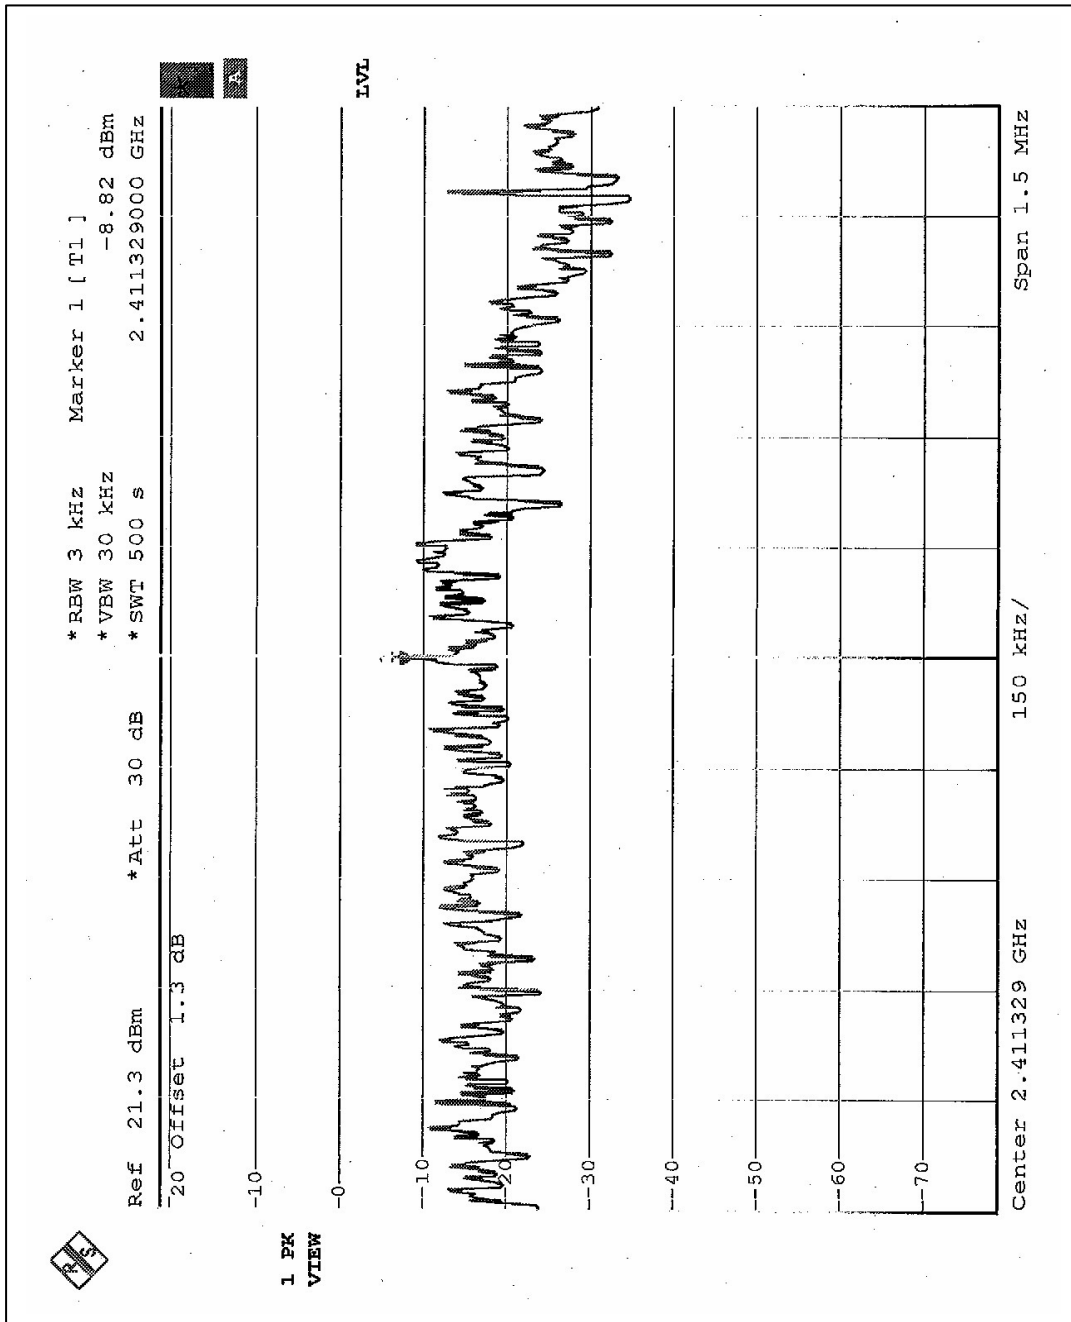




CH6

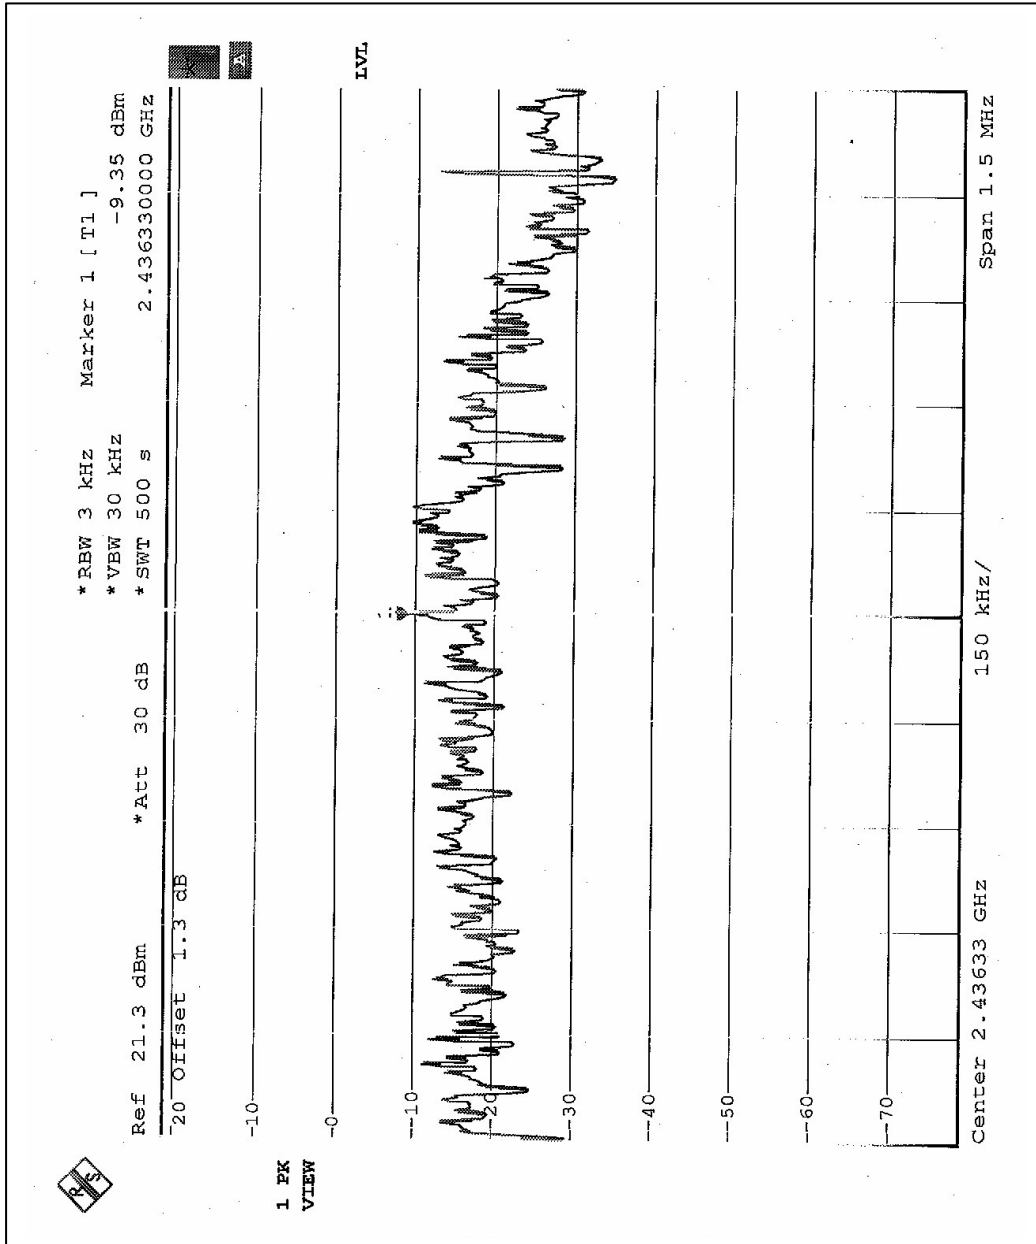



CH11

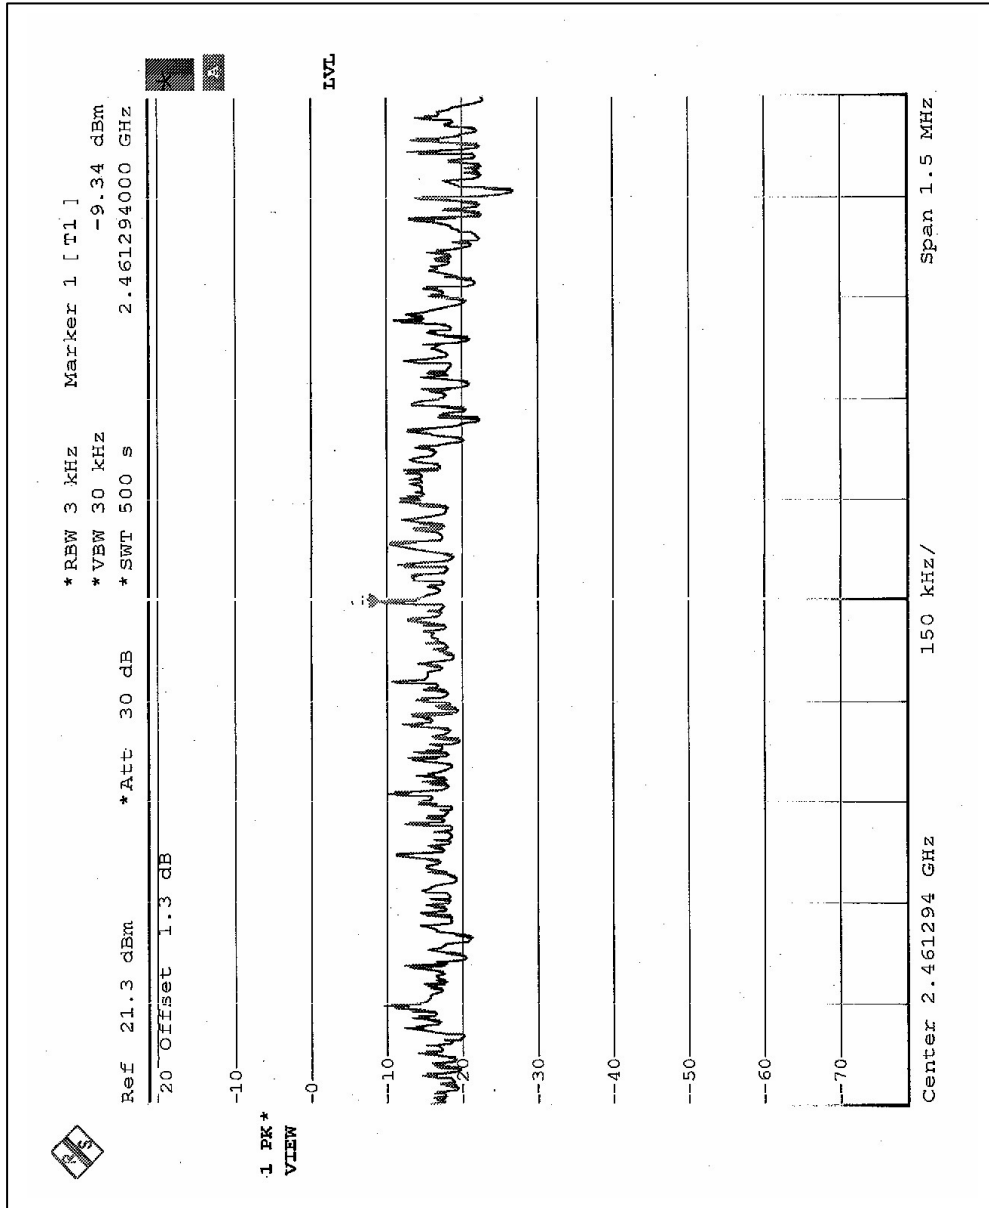



4.5 BAND EDGES MEASUREMENT

4.5.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.5.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|--------------|------------------|
| R&S SPECTRUM ANALYZER | FSP | 1093.4495.30 | Dec. 19, 2003 |

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation



4.5.5 EUT OPERATING CONDITION


Same as Item 4.3.6


4.5.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 46.73dB delta between carrier maximum power and local maximum emission in restrict band (2.3890GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.6dBuV/m, so the maximum field strength in restrict band is $98.6 - 46.73 = 51.87$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 56.11dB delta between carrier maximum power and local maximum emission in restrict band (2.5242GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.9dBuV/m, so the maximum field strength in restrict band is $98.9 - 56.11 = 42.79$ dBuV/m which is under 54 dBuV/m limit.

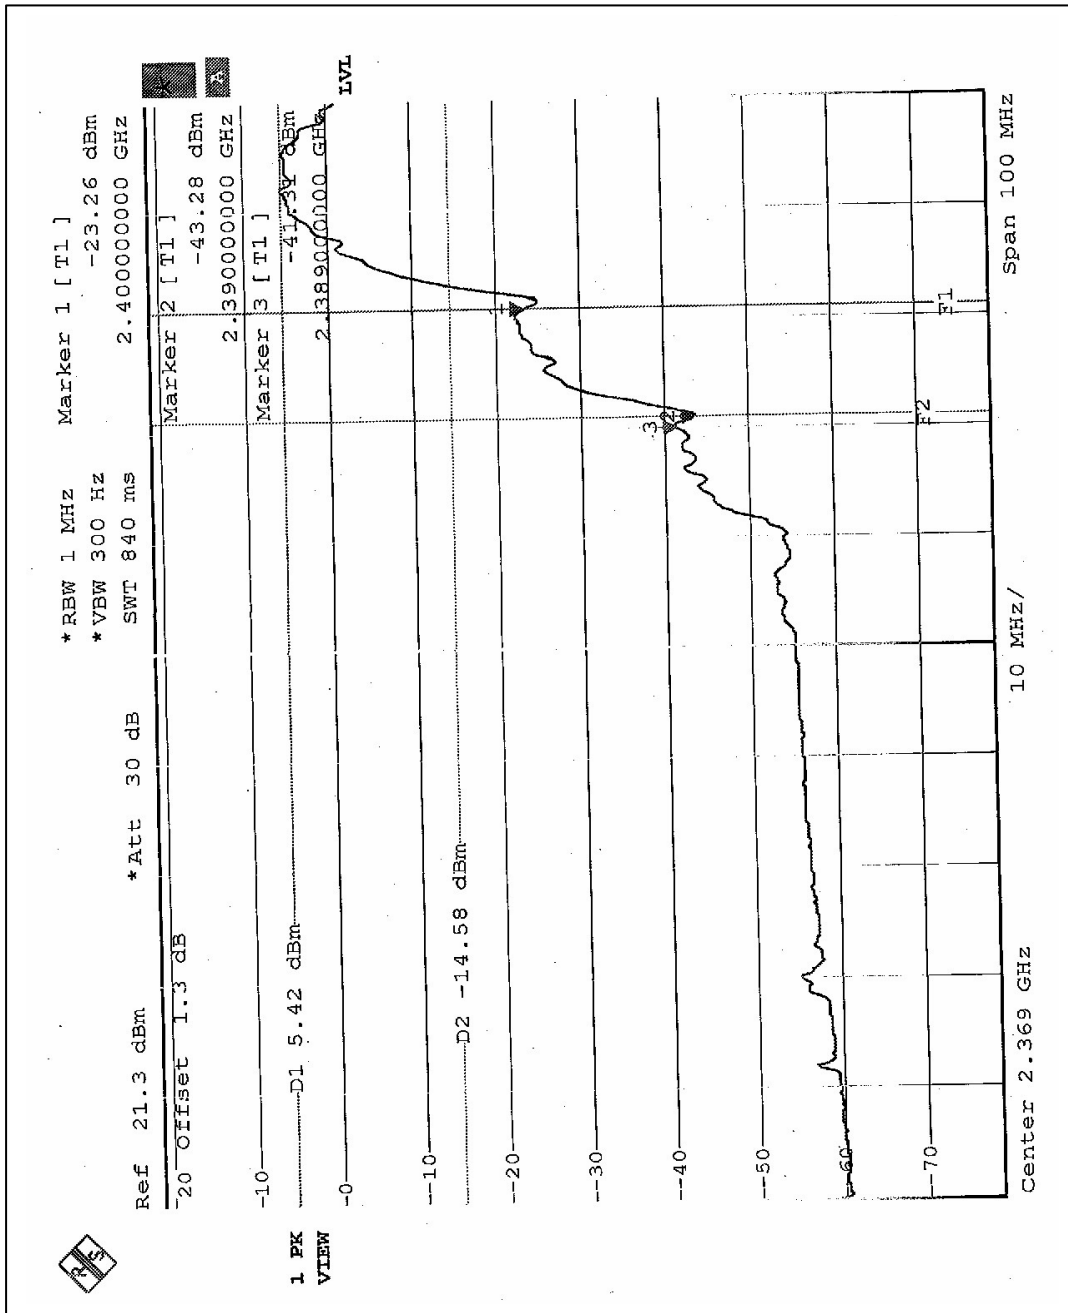

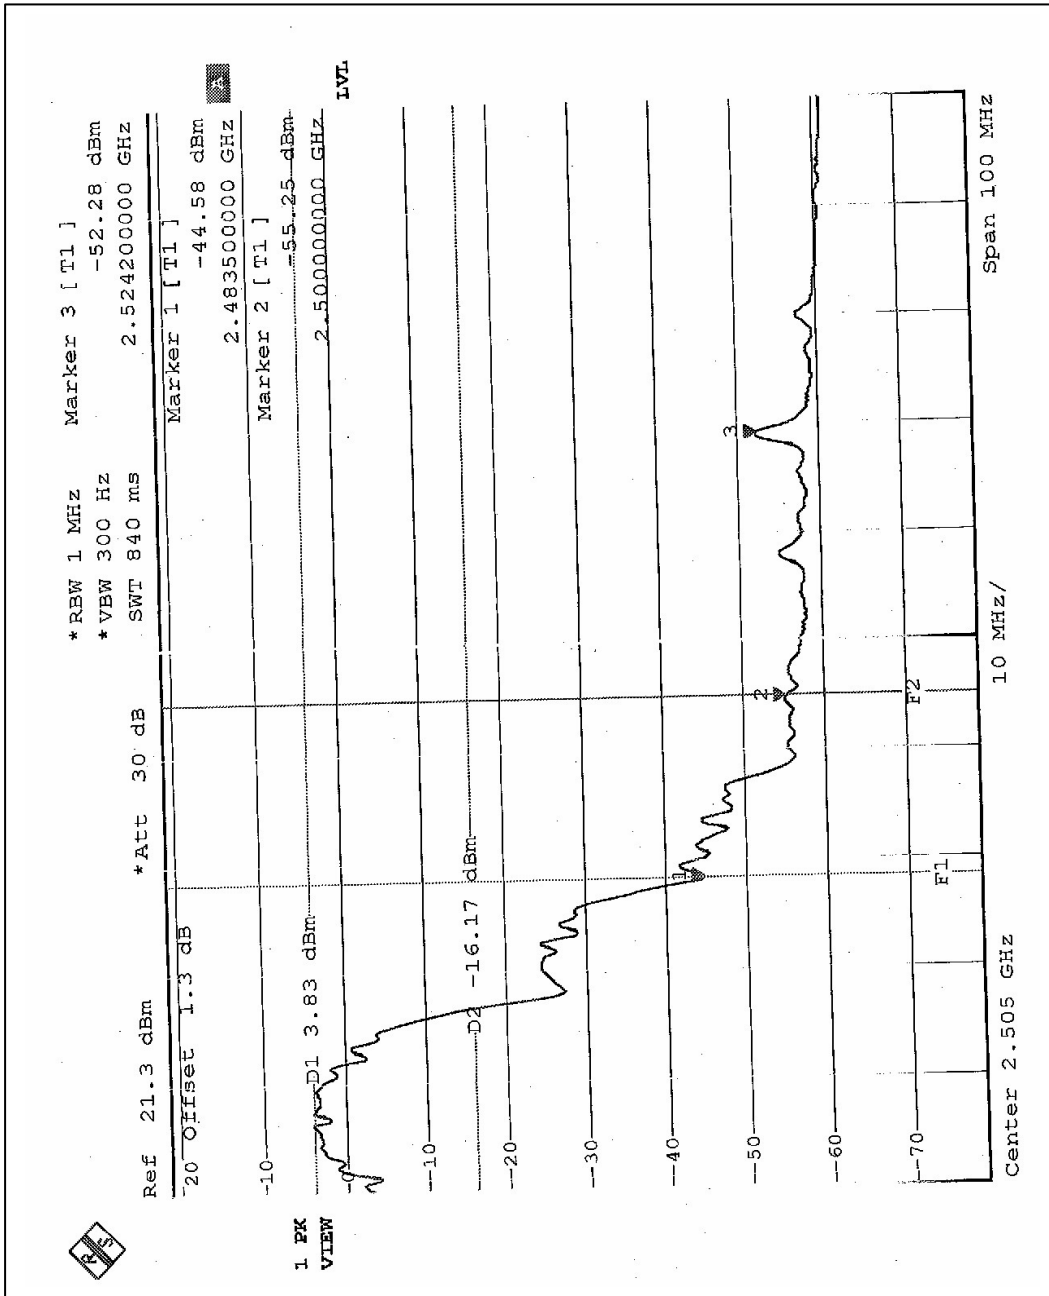



4.6 ANTENNA REQUIREMENT

4.6.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.6.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna with Integral connector. The maximum Gain of the antenna is 1.8dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

| | |
|--------------------|-----------------|
| USA | FCC, NVLAP, UL |
| Germany | TUV Rheinland |
| Japan | VCCI |
| New Zealand | MoC |
| Norway | NEMKO |
| R.O.C. | BSMI, DGT, CNLA |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.