



FCC RADIO TEST REPORT

FCC ID : HEDMLTGCN
Equipment : 60GHz Access Point
Brand Name : Edgecore
Model Name : MLTG-CN
Applicant : Accton Technology Corp
No. 1, Creation Rd. III, Science-based Industrial Park Hsin Chu 30077, Taiwan R.O.C.
Manufacturer(1) : Accton Technology Corp
No. 1, Creation Rd. III, Science-based Industrial Park Hsin Chu 30077, Taiwan R.O.C.
Manufacturer(2) : Accton Technology Corporation Zhunan Factory
1F & 4F & 5F , No. 1, Keyi St., Zhunan Township, Miaoli County 350, Taiwan
Standard : 47 CFR FCC Part 15.255

The product was received on Sep. 03, 2020, and testing was started from Sep. 12, 2020 and completed on Oct. 22, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 47 CFR FCC Part 15.255 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards8

1.3 Testing Location8

2 Test Configuration of Equipment under Test.....9

2.1 Parameters of Test Software Setting9

2.2 Conformance Tests and Related Test Frequencies.....9

2.3 EUT Operation during Test9

2.4 Accessories9

2.5 Support Equipment.....10

2.6 Far Field Boundary Calculations10

2.7 Test Setup Diagram11

3 Transmitter Test Result14

3.1 AC Power Conducted Emissions14

3.2 Occupied Bandwidth19

3.3 EIRP Power.....25

3.4 Peak Conducted Power.....28

3.5 Transmitter Spurious Emissions.....30

3.6 Frequency Stability.....49

3.7 Operation Restriction and Group Installation52

4 Test Equipment and Calibration Data53

5 Measurement Uncertainty56

Appendix A. Test Photos

Photographs of EUT v01



History of this test report

Report No.	Version	Description	Issued Date
FR083103	01	Initial issue of report	Nov. 06, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Conducted Emissions	PASS	-
3.2	15.255(e)	Occupied Bandwidth	PASS	-
3.3	15.255(c)	EIRP Power	PASS	-
3.4	15.255(c)	Peak Conducted Power	PASS	-
3.5	15.255(d)	Transmitter Spurious Emissions	PASS	-
3.6	15.255(f)	Frequency Stability	PASS	-
3.7	15.255(a),(h)	Operation Restriction and Group Installation	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Sam Chen**

Report Producer: **Vicky Huang**



1 General Description

1.1 Information

1.1.1 The Channel Plan(s)

Frequency Range	57-71 GHz
The Channel Plan(s)	Channel 1: 58.32 GHz Channel 2: 60.48 GHz Channel 3: 62.64 GHz Channel 4: 64.80 GHz

1.1.2 Modulation

Modulation	OFDM
------------	------

1.1.3 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	muRata	MLTG-CN	Array Antenna	N/A	21.36

Note: The above information was declared by manufacturer.



1.1.4 Power Levels

Worst Power Levels for Channel 1			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Frequency (GHz)	Highest (P _{high}):		
	Mode	AV Power (dBm)	Peak Power (dBm)
58.32	MCS0	36.23	36.66

Worst Power Levels for Channel 3			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Frequency (GHz)	Highest (P _{high}):		
	Mode	AV Power (dBm)	Peak Power (dBm)
62.64	MCS0	36.32	37.26

Worst Power Levels for Channel 4			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Frequency (GHz)	Highest (P _{high}):		
	Mode	AV Power (dBm)	Peak Power (dBm)
64.80	MCS0	37.10	37.44

1.1.5 Operating Conditions

Operating Conditions			
<input checked="" type="checkbox"/> -30 °C to +80 °C			
<input type="checkbox"/> 0 °C to +40 °C			
<input type="checkbox"/> Other:			
EUT Power Type	From PoE		
Test Software Version	QRCT Ver4.0.00158.0		
Supply Voltage	<input type="checkbox"/> AC	State AC voltage	V
Supply Voltage	<input checked="" type="checkbox"/> DC	State DC voltage	48 V

1.1.6 Equipment Use Condition

Equipment Use Condition
<input type="checkbox"/> Fixed field disturbance sensors at 61-61.5GHz
<input type="checkbox"/> Except fixed field disturbance sensors at 61-61.5GHz
<input checked="" type="checkbox"/> Except fixed field disturbance sensors



1.1.7 User Condition

Intended Operation	
<input type="checkbox"/>	Indoor
<input checked="" type="checkbox"/>	Outdoor (except outdoor fixed Point to Point)
<input type="checkbox"/>	Outdoor fixed Point to Point

Note: The above information was declared by manufacturer.

1.1.8 Duty Cycle

Duty Cycle			Duty Cycle Factor
The transmitter is intended for	Channel 1	100%	0.00
	Channel 3	100%	0.00
	Channel 4	100%	0.00



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2013 Section 9. "Procedures for testing millimeter-wave systems"

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO02-CB	Peter Wu	23~24°C / 61~62%	Sep. 18, 2020
Radiated (Below 1GHz)	03CH04-CB	Brian Sun	23.1-23.6°C / 54-57%	Sep. 15, 2020~Sep. 17, 2020
Radiated (Above 1GHz)	03CH05-CB	Eddie Weng	24.2-25.7°C / 52-54%	Sep. 12, 2020~Oct. 22, 2020
RF Conducted	TH03-CB	Eddie Weng	25.1-25.6°C / 55-59%	Sep. 12, 2020

Test site Designation No. TW0006 with FCC.
Test site registered number IC 4086D with Industry Canada.



2 Test Configuration of Equipment under Test

2.1 Parameters of Test Software Setting

Channel Plan (GHz)		Software Setting
Channel 1 (GHz)	58.32	0
Channel 3 (GHz)	62.64	0
Channel 4 (GHz)	64.80	0

2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)
AC Power Conducted Emissions	64.80
Occupied Bandwidth	58.32, 62.64, 64.80
EIRP Power	58.32, 62.64, 64.80
Peak Conducted Power	58.32, 62.64, 64.80
Transmitter Spurious Emissions (below 1 GHz)	64.80
Transmitter Spurious Emissions (1 GHz-40 GHz)	58.32, 62.64, 64.80
Transmitter Spurious Emissions (above 40 GHz)	58.32, 62.64, 64.80
Frequency Stability	58.32

Note: The EUT can only be used at Y axis position.

2.3 EUT Operation during Test

During the test, executed the test program to control the EUT continuously transmit RF signal.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
PoE	Gospower	G0720-480-050	INPUT: 100-240V~50/60Hz, 0.75A Max OUTPUT:48V, 0.5A
Others			
Power cable*1, non-shielded 0.9m			
Metal belt*2			
Waterproof plug*2			



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE NB	DELL	E6430	N/A
B	60GHz Access Point (Device)	Edgecore	MLTG-CN	N/A
C	Device NB	DELL	E6430	N/A
D	LAN NB	DELL	E6430	N/A

For Radiated (Below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Device NB	DELL	E4300	N/A
B	PoE NB	DELL	E4300	N/A
C	LAN NB	DELL	E4300	N/A
D	60GHz Access Point (Device)	Edgecore	MLTG-CN	N/A

For Radiated (Above 1GHz) and RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

2.6 Far Field Boundary Calculations

The far-field boundary is given as:

$$\text{far field} = (2 * L^2) / \lambda$$


where:

L = Largest Antenna Dimension, including the reflector, in meters


λ= wavelength in meters

Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.03	0.0051440	0.350	34.99
62.64	0.03	0.0047893	0.376	37.58
64.80	0.03	0.0046296	0.389	38.88

2.7 Test Setup Diagram

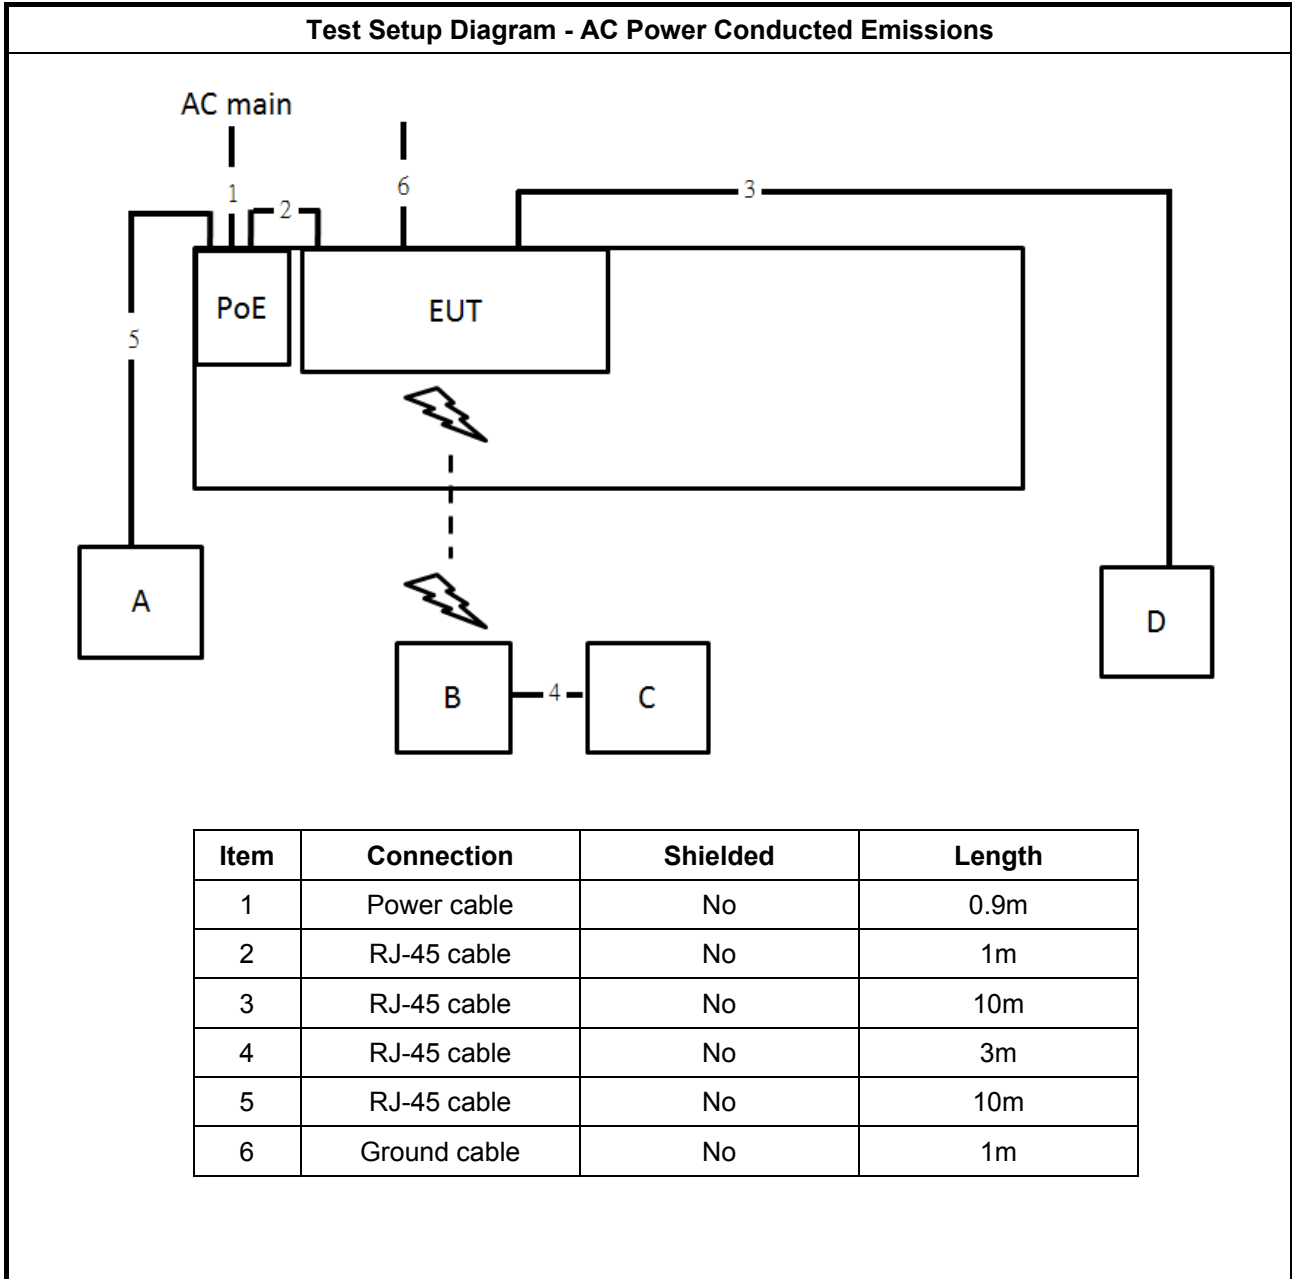


Test Setup Diagram - Transmitter Spurious Emissions below 1 GHz

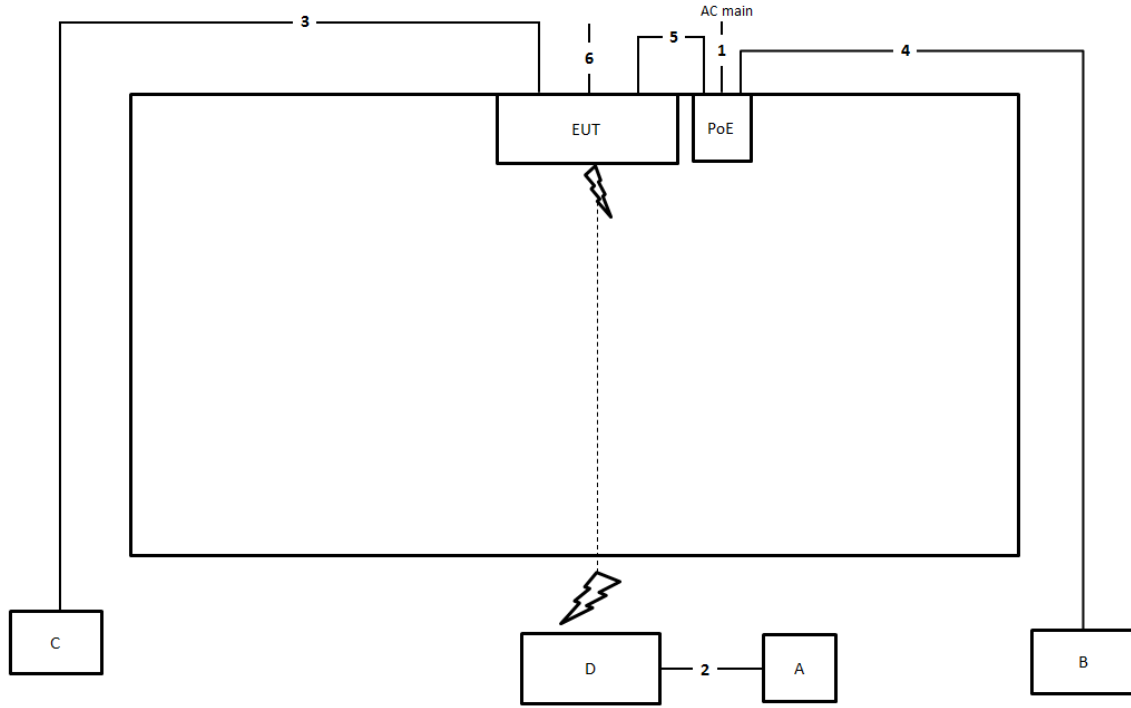

Item	Connection	Shielded	Length
1	Power cable	No	0.9m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	1.5m
6	Ground cable	No	1.5m

Test Setup Diagram - Transmitter Spurious Emissions above 1 GHz

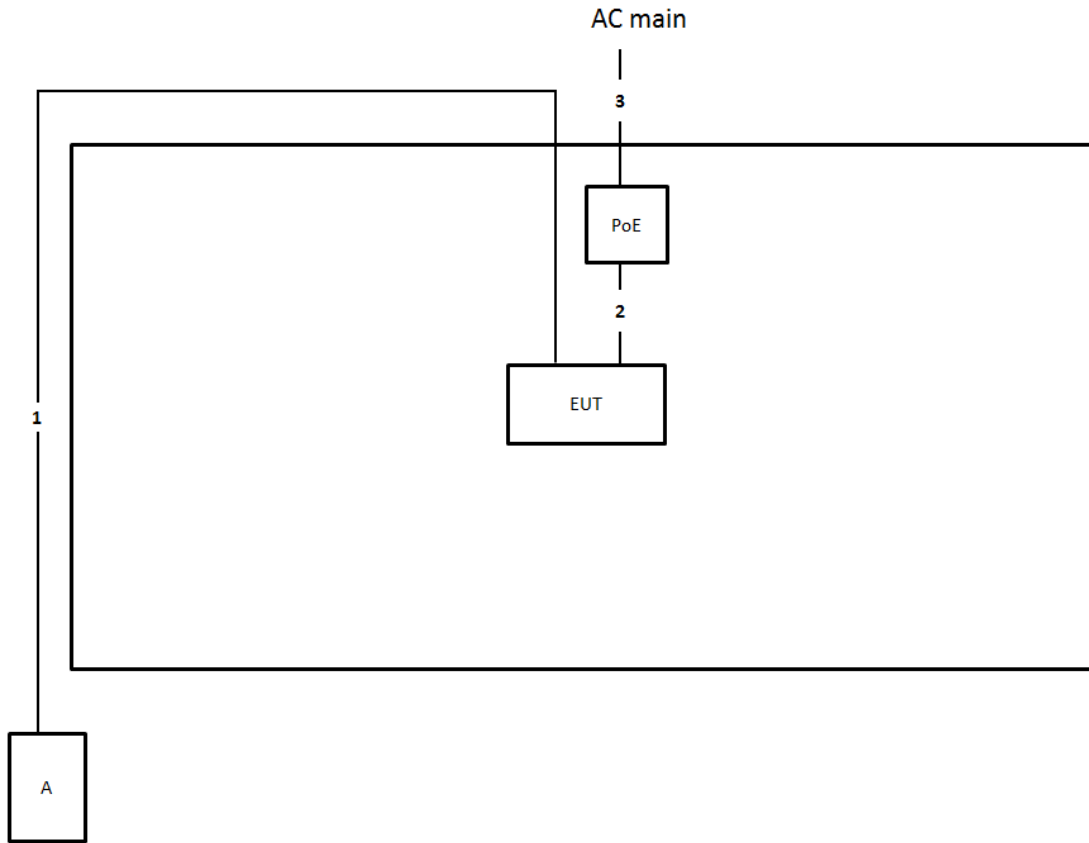

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	Power cable	No	0.8m



3 Transmitter Test Result

3.1 AC Power Conducted Emissions

3.1.1 Limit of AC Power Conducted Emissions

AC Power Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.1.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 6.2.

3.1.4 Test Setup

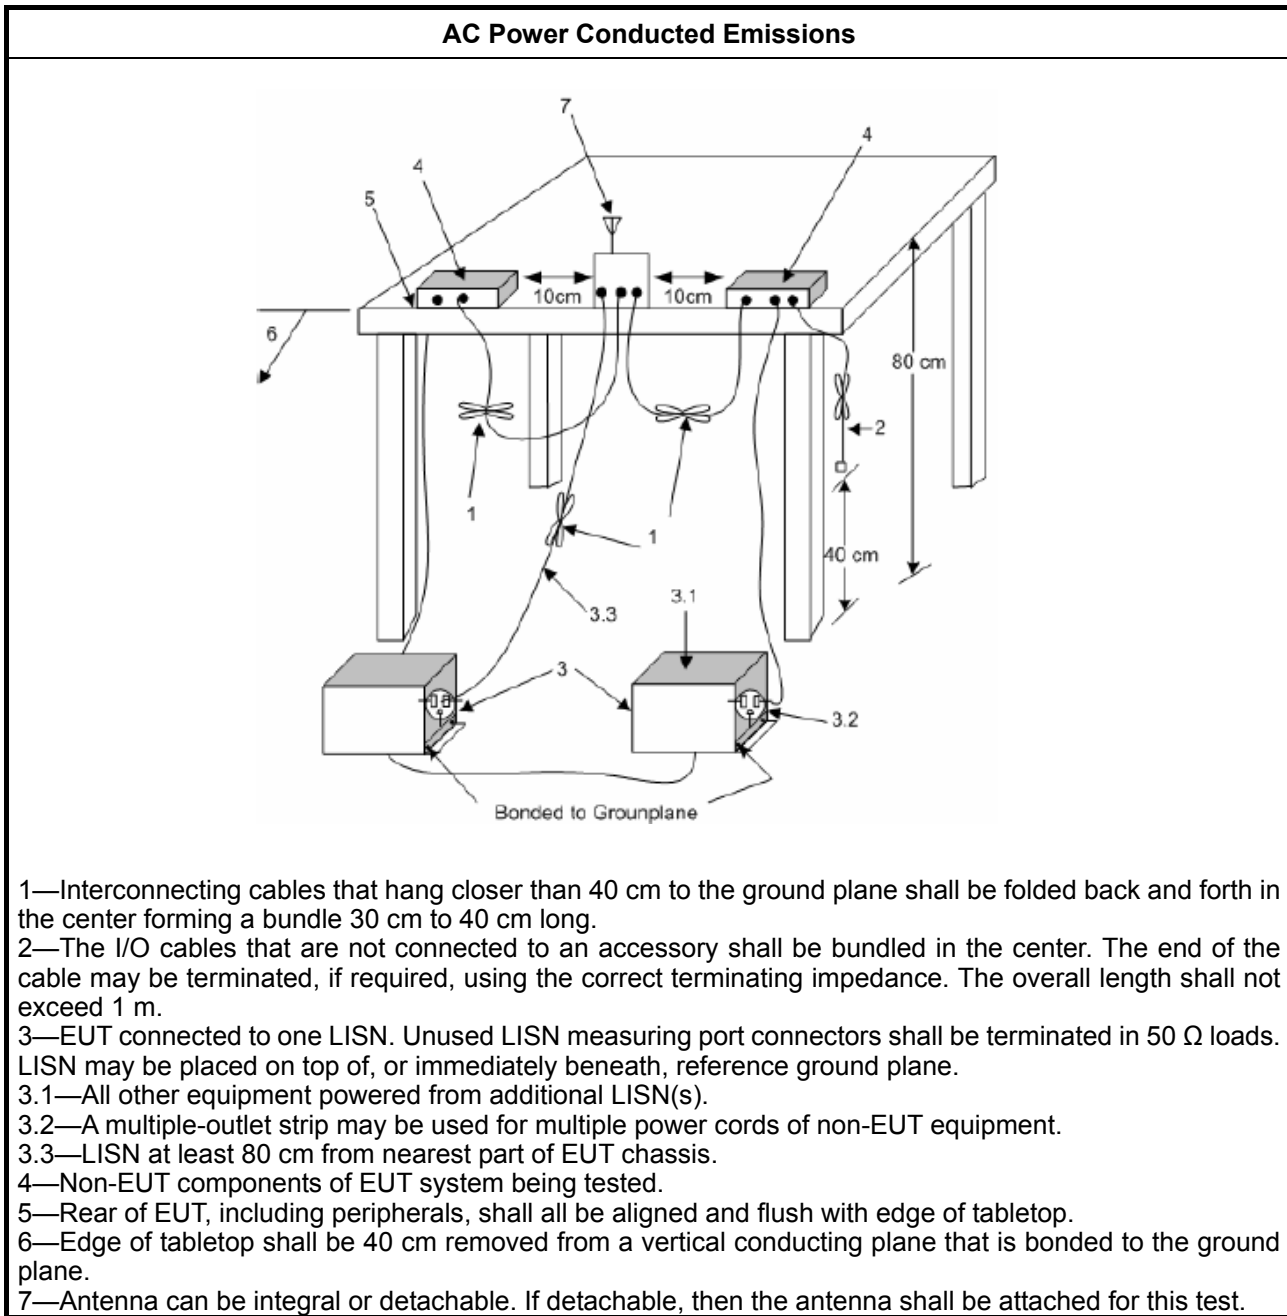

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level



3.1.6 Test Result of AC Power Conducted Emissions

Test Conditions see ANSI C63.10, clause 5.11

Test Setup see ANSI C63.10, clause 6.2.3


NOTE 1: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes. If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.

NOTE 2: “>20dB” means the tables in this clause should only list values of spurious emissions that exceed the level of 20 dB below the applicable limit, see ANSI C63.4, clause 10.1.8.1.



Phase	Line	Configuration	CTX
-------	------	---------------	-----

18/09/2020

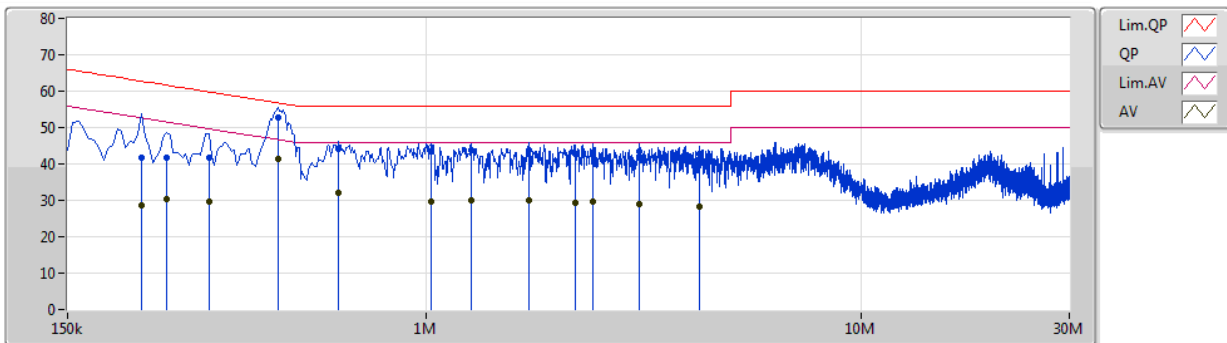


--	--	--	--	--	--	--	--	--	--	--	--

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	222k	41.81	62.75	-20.94	10.28	Line	-	31.53	0.05	0.07	10.16			
AV	222k	28.54	52.75	-24.21	10.28	Line	-	18.26	0.05	0.07	10.16			
QP	253.5k	41.71	61.64	-19.93	10.27	Line	-	31.44	0.05	0.07	10.15			
AV	253.5k	30.33	51.64	-21.31	10.27	Line	-	20.06	0.05	0.07	10.15			
QP	316.5k	41.83	59.80	-17.97	10.25	Line	-	31.58	0.05	0.08	10.12			
AV	316.5k	29.70	49.80	-20.10	10.25	Line	-	19.45	0.05	0.08	10.12			
QP	456k	52.71	56.76	-4.05	10.24	Line	"Worst"	42.47	0.05	0.09	10.10			
AV	456k	41.45	46.76	-5.31	10.24	Line	-	31.21	0.05	0.09	10.10			
QP	627k	43.98	56.00	-12.02	10.25	Line	-	33.73	0.05	0.10	10.10			
AV	627k	32.00	46.00	-14.00	10.25	Line	-	21.75	0.05	0.10	10.10			
QP	1.028M	43.48	56.00	-12.52	10.29	Line	-	33.19	0.06	0.12	10.11			
AV	1.028M	29.50	46.00	-16.50	10.29	Line	-	19.21	0.06	0.12	10.11			
QP	1.266M	43.67	56.00	-12.33	10.32	Line	-	33.35	0.07	0.13	10.12			
AV	1.266M	29.85	46.00	-16.15	10.32	Line	-	19.53	0.07	0.13	10.12			
QP	1.721M	43.77	56.00	-12.23	10.36	Line	-	33.41	0.08	0.15	10.13			
AV	1.721M	29.97	46.00	-16.03	10.36	Line	-	19.61	0.08	0.15	10.13			
QP	2.193M	42.83	56.00	-13.17	10.38	Line	-	32.45	0.09	0.16	10.13			
AV	2.193M	29.40	46.00	-16.60	10.38	Line	-	19.02	0.09	0.16	10.13			
QP	2.418M	42.97	56.00	-13.03	10.40	Line	-	32.57	0.10	0.16	10.14			
AV	2.418M	29.61	46.00	-16.39	10.40	Line	-	19.21	0.10	0.16	10.14			
QP	3.089M	43.52	56.00	-12.48	10.40	Line	-	33.12	0.11	0.15	10.14			
AV	3.089M	29.13	46.00	-16.87	10.40	Line	-	18.73	0.11	0.15	10.14			
QP	4.245M	42.92	56.00	-13.08	10.43	Line	-	32.49	0.13	0.15	10.15			
AV	4.245M	28.37	46.00	-17.63	10.43	Line	-	17.94	0.13	0.15	10.15			



Phase	Neutral	Configuration	CTX
-------	---------	---------------	-----

18/09/2020

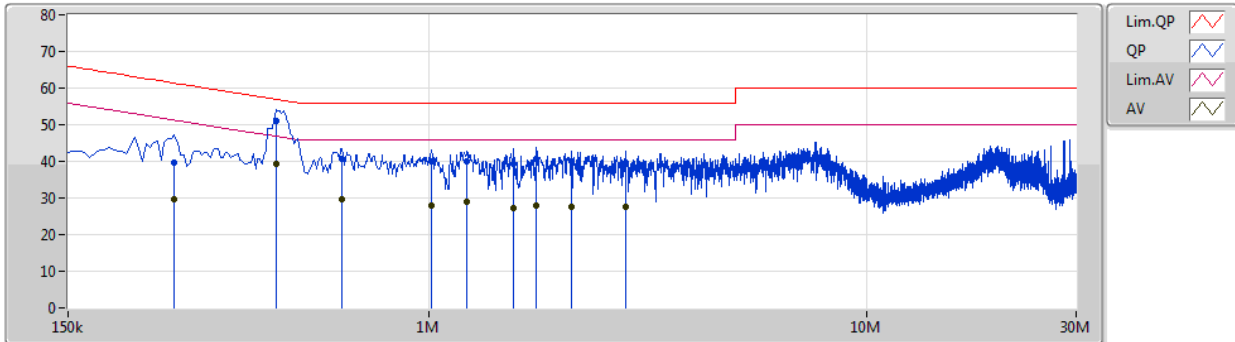

--	--	--	--	--	--	--	--	--	--	--	--

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	262.5k	39.82	61.35	-21.53	10.26	Neutral	-	29.56	0.05	0.07	10.14			
AV	262.5k	29.67	51.35	-21.68	10.26	Neutral	-	19.41	0.05	0.07	10.14			
QP	447k	51.14	56.94	-5.80	10.23	Neutral	"Worst"	40.91	0.05	0.08	10.10			
AV	447k	39.29	46.94	-7.65	10.23	Neutral	-	29.06	0.05	0.08	10.10			
QP	631.5k	40.57	56.00	-15.43	10.25	Neutral	-	30.32	0.05	0.10	10.10			
AV	631.5k	29.70	46.00	-16.30	10.25	Neutral	-	19.45	0.05	0.10	10.10			
QP	1.01M	40.02	56.00	-15.98	10.29	Neutral	-	29.73	0.06	0.12	10.11			
AV	1.01M	27.85	46.00	-18.15	10.29	Neutral	-	17.56	0.06	0.12	10.11			
QP	1.221M	40.07	56.00	-15.93	10.32	Neutral	-	29.75	0.07	0.13	10.12			
AV	1.221M	29.09	46.00	-16.91	10.32	Neutral	-	18.77	0.07	0.13	10.12			
QP	1.563M	39.26	56.00	-16.74	10.34	Neutral	-	28.92	0.07	0.15	10.12			
AV	1.563M	27.33	46.00	-18.67	10.34	Neutral	-	16.99	0.07	0.15	10.12			
QP	1.761M	40.69	56.00	-15.31	10.36	Neutral	-	30.33	0.08	0.15	10.13			
AV	1.761M	28.06	46.00	-17.94	10.36	Neutral	-	17.70	0.08	0.15	10.13			
QP	2.117M	39.91	56.00	-16.09	10.37	Neutral	-	29.54	0.08	0.16	10.13			
AV	2.117M	27.75	46.00	-18.25	10.37	Neutral	-	17.38	0.08	0.16	10.13			
QP	2.81M	39.75	56.00	-16.25	10.39	Neutral	-	29.36	0.09	0.16	10.14			
AV	2.81M	27.53	46.00	-18.47	10.39	Neutral	-	17.14	0.09	0.16	10.14			



3.2 Occupied Bandwidth

3.2.1 Limit of Occupied Bandwidth

6dBc Bandwidth (see Note 1)	None
99% Occupied Bandwidth (see Note 2)	None

NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.

NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.


3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 6.9.2.

3.2.4 Test Setup

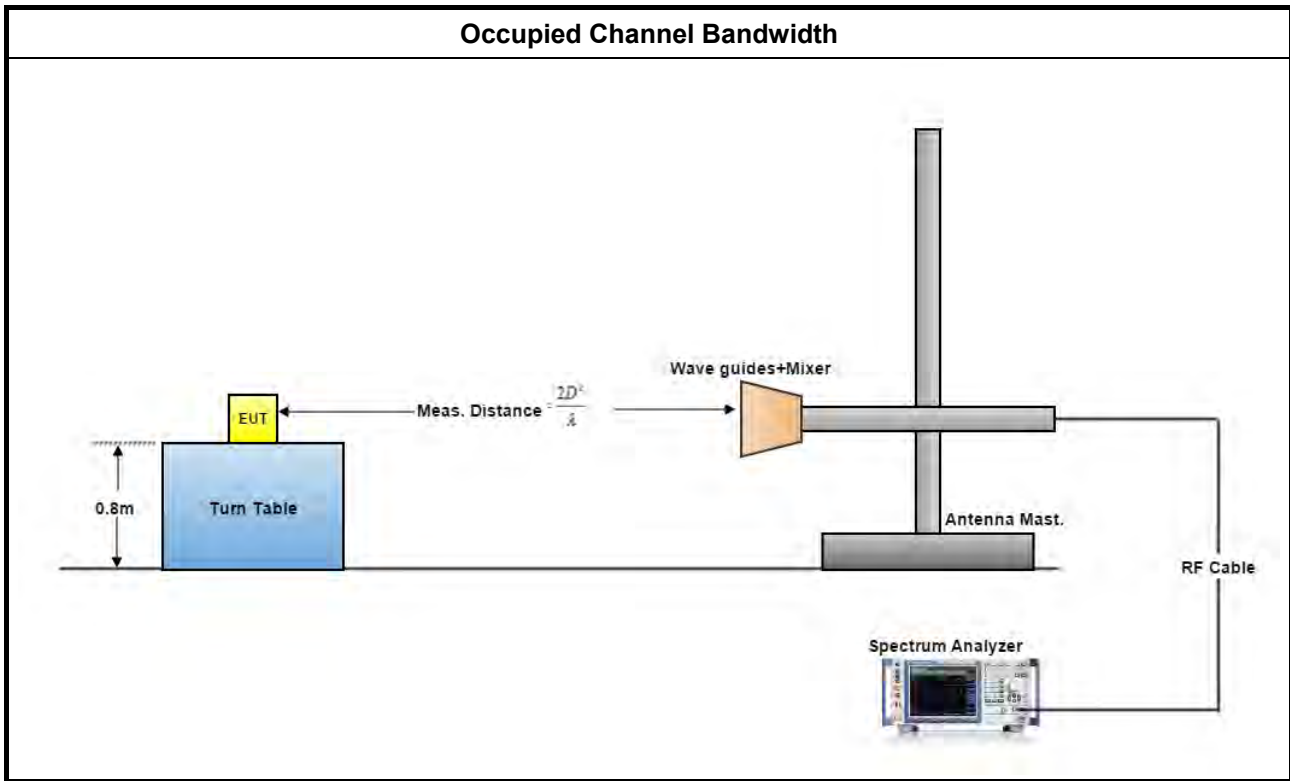




3.2.5 Test Result of Occupied Bandwidth

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.9.2
<p>NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 15, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.</p>	


Test Results			
Test Freq. (GHz)	6 dBc Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
58.32	1396.50	2044.860	N/A
62.64	1570.20	2044.860	N/A
64.80	1613.60	2053.540	N/A



3.2.5.1 Bandwidth Plots

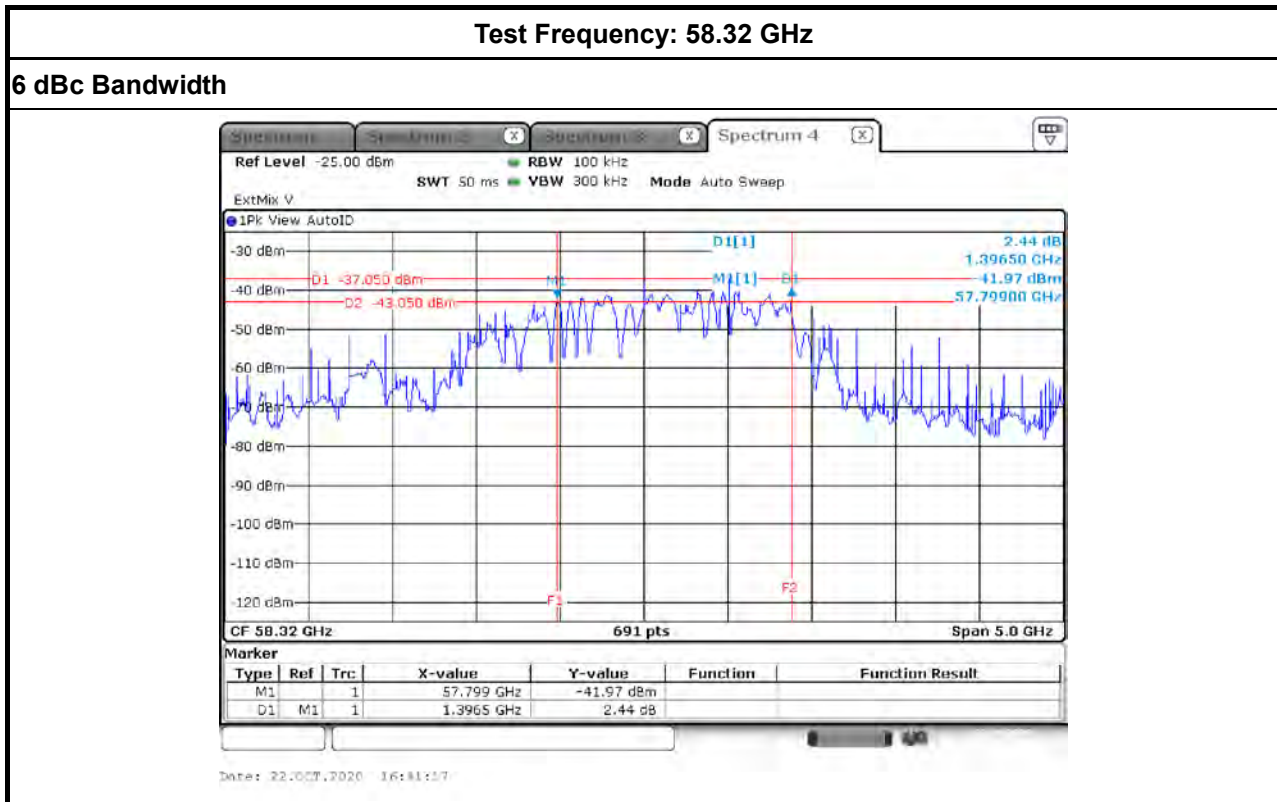


Occupied Bandwidth

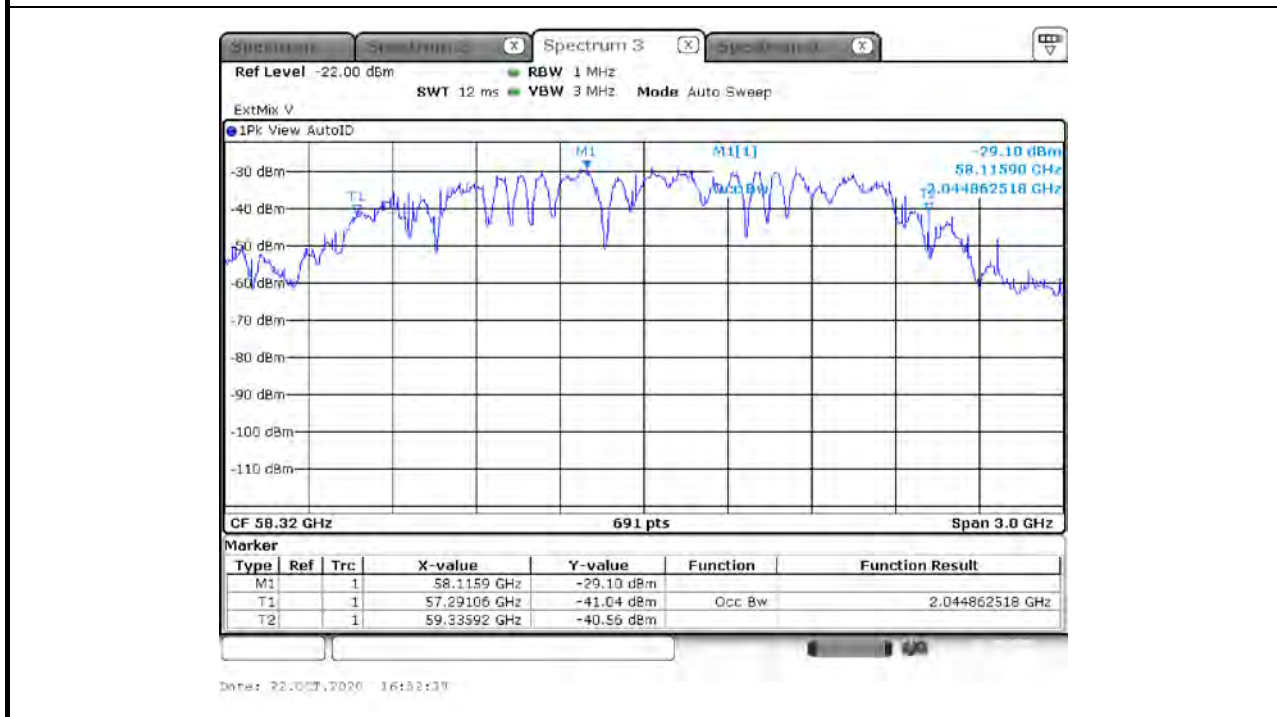




Test Frequency: 62.64 GHz

6 dBc Bandwidth

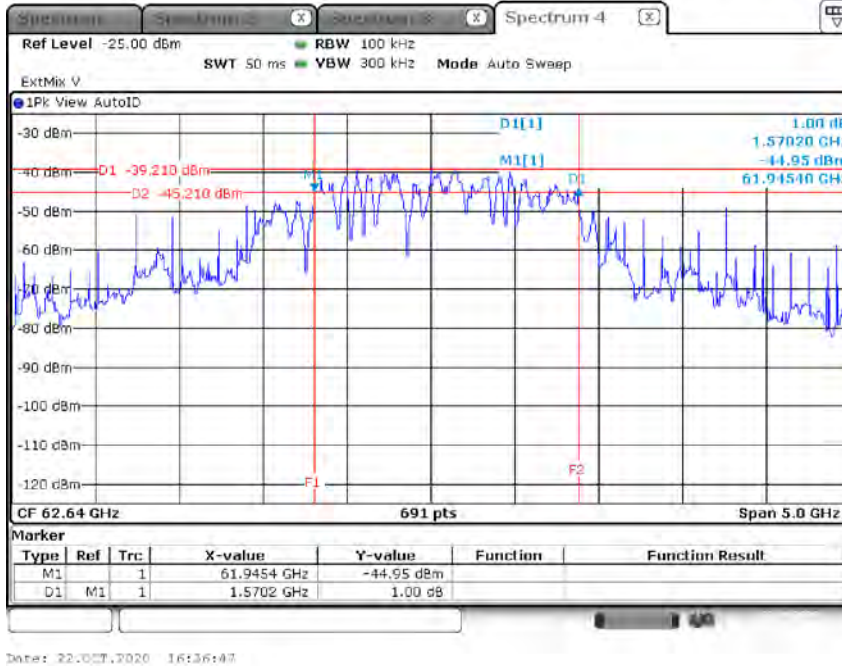


Occupied Bandwidth

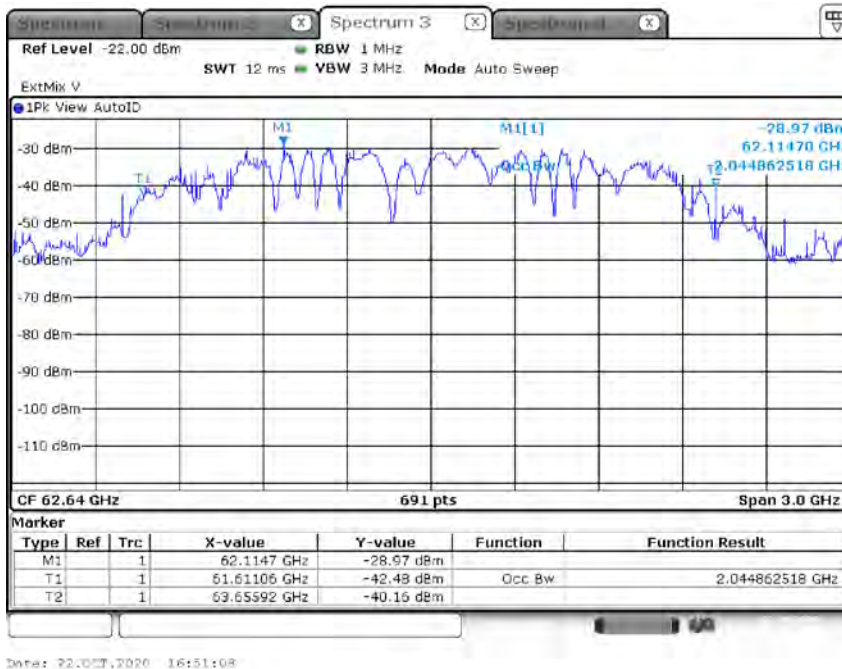




Test Frequency: 64.80 GHz

6 dBc Bandwidth

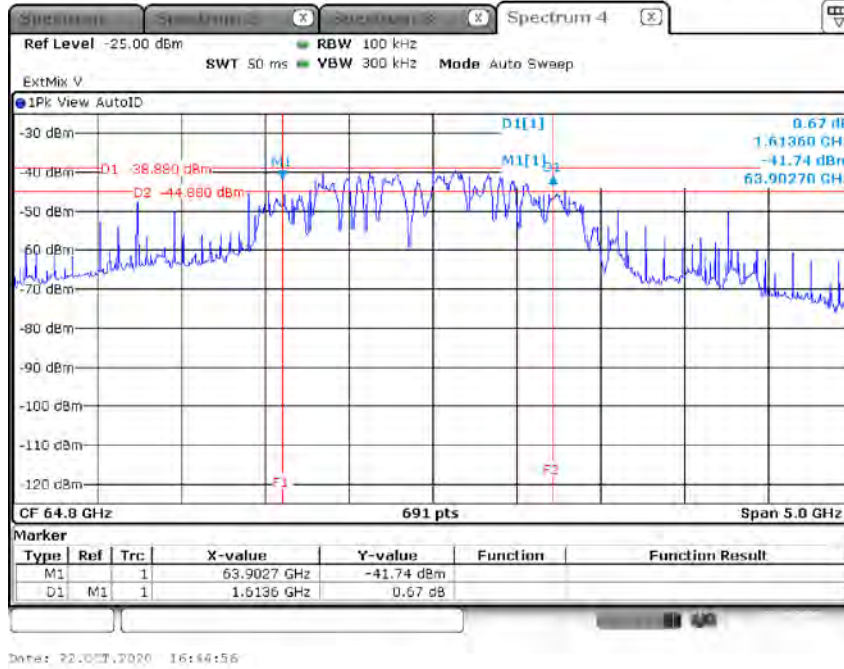

Date: 22.OCT.2020 16:44:56

Occupied Bandwidth

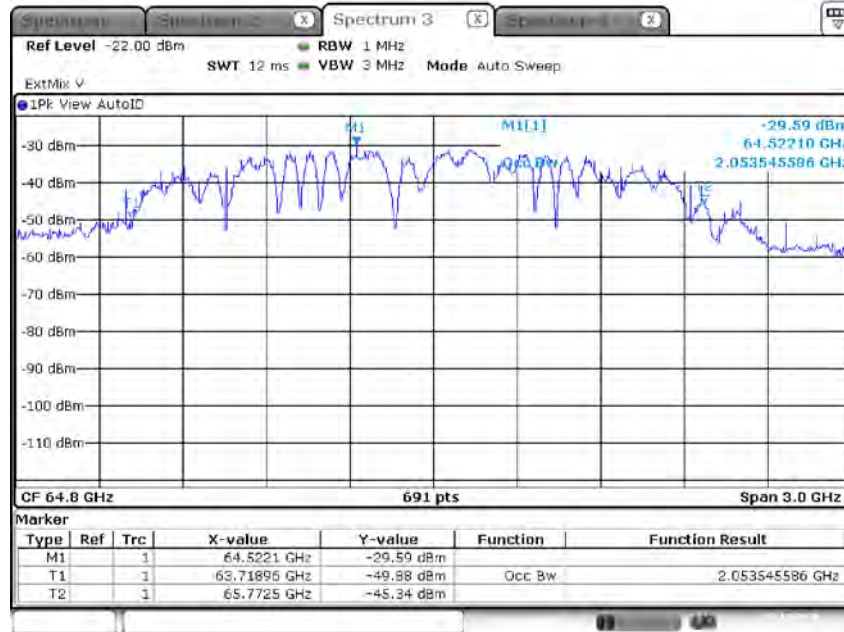

Date: 22.OCT.2020 16:50:12



3.3 EIRP Power

3.3.1 Limit of EIRP Power

EIRP Power Limit		
Use Condition	EIRP Average Power	EIRP Peak Power
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	40 dBm	43 dBm
Fixed field disturbance sensors at outside of the band 61-61.5GHz	10 dBm	13 dBm
Except fixed field disturbance sensors at 61-61.5GHz	N/A	10 dBm
Except outdoor fixed Point to Point	40 dBm	43 dBm
Outdoor fixed Point to Point	82 dBm	85 dBm

Note: For fixed point-to-point transmitters located outdoors, the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.

NOTE: For the applicable limit, see 15.255 (c)


3.3.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.3.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013 clause 9.3 & 9.5.

3.3.4 Test Setup

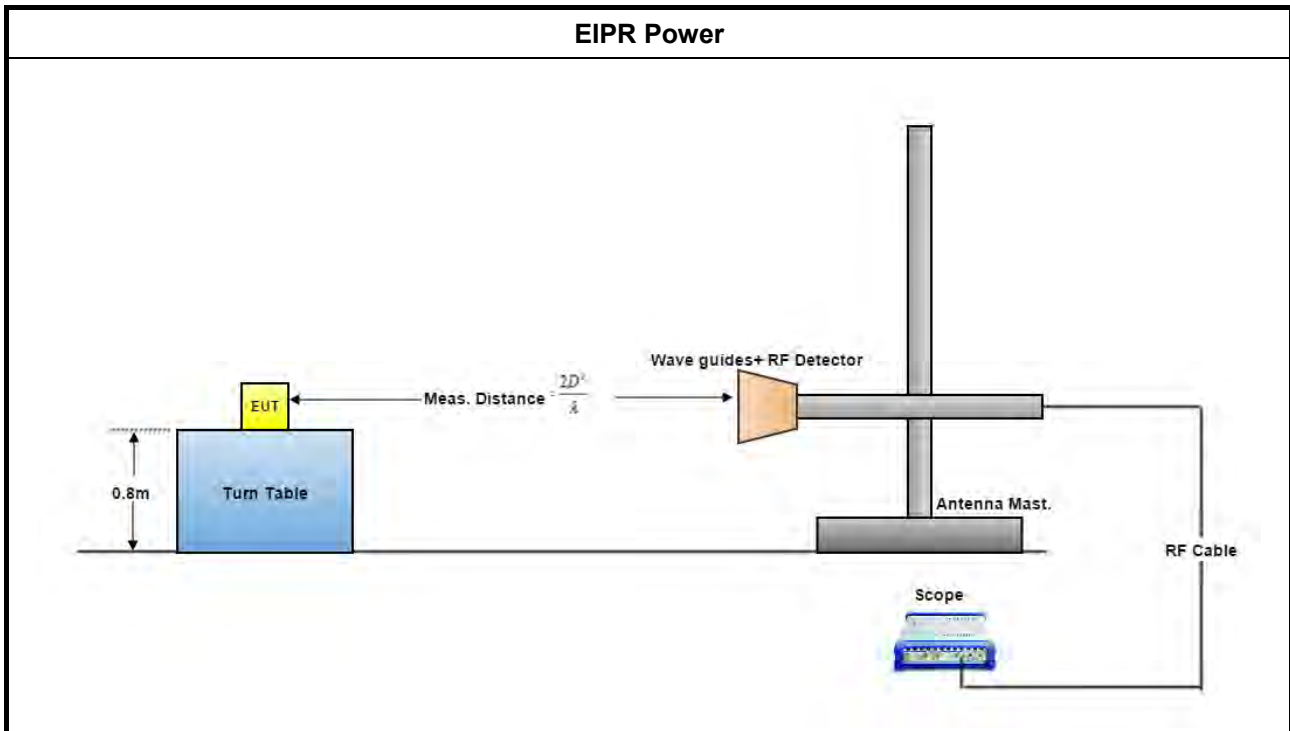

3.3.5 Test Result of EIRP Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
<p>NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.</p>	



3.3.5.1 Test Result of EIRP Power

Test Distance		0.50 m									
Test Results											
Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E _{Meas} (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
58.32	23.6	53.05	49.15	-1.49	-1.92	147.48	147.05	36.66	36.23	43	40
62.64	23.6	52.86	44.71	-1.51	-2.45	148.08	147.14	37.26	36.32	43	40
64.80	23.6	51.78	48.70	-1.63	-1.97	148.26	147.92	37.44	37.10	43	40

The measured power level is converted to EIRP using the Friis equation:
 For radiated emissions, calculate the field strength (E) in dBµV/meter.
 $E = 126.8 - 20\log(\lambda) + P - G$
 where:
 E : is the field strength of the emission at the measurement distance, in dBµV/m
 P : is the power measured at the output of the test antenna, in dBm
 λ : is the wavelength of the emission under investigation [300/fMHz], in m
 G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.
 $EIRP = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$
 where:
 EIRP : is the equivalent isotopically radiated power, in dBm
 E-meas. : is the field strength of the emission at the measurement distance, in dBµV/m
 d-meas. : is the measurement distance, in m
 NOTE 1: For the applicable limit, see 15.255 (c)
 NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between “DSO(mV)” & “Power Measured(dBm)”.



3.4 Peak Conducted Power

3.4.1 Limit of Peak Conducted Power

Peak Conducted Power Limit			
Use Condition	6dBc Bandwidth	Occupied Bandwidth	Peak Conducted Power (note 1)
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	> 100MHz	≤ 500MHz	500mW
	≤ 100MHz		500mW x (BW/100) (see note 2)
Fixed field disturbance sensors at outside of the band 61-61.5GHz and within 57 -71 GHz	> 100MHz	N/A	500mW
	≤ 100MHz		500mW x (BW/100) (see note 2)
Except fixed field disturbance sensors at 61-61.5GHz	N/A	> 500MHz	-10 dBm
Except outdoor fixed Point to Point,	> 100MHz	-	500mW
Outdoor fixed Point to Point	≤ 100MHz	-	500mW x (BW/100) (see note 2)

NOTE 1: For the applicable limit, see FCC 15.255(c)
NOTE 2: BW= 6dB bandwidth (measured at RBW 100kHz)

3.4.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.4.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.5

3.4.4 Test Result of Peak Conducted Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.	



3.4.4.1 Peak Conducted Power

Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
58.32	36.66	21.36	15.30	33.910	1396.50	500.00
62.64	37.26	21.36	15.90	38.940	1570.20	500.00
64.80	37.44	21.36	16.08	40.537	1613.60	500.00

NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.

NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5.

NOTE 3: For the applicable limit, see FCC 15.255(c)

NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm)

$P(\text{cond}) = \text{EIRP} - G(\text{dBi})$

where:

G(dBi) is gain of EUT antenna.

3.5 Transmitter Spurious Emissions


3.5.1 Limit of Transmitter Spurious Emissions


Frequency Range	Limit
Radiated emissions below 40 GHz	15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm ² @ 3 m (Equivalent EIRP 102 μW, -9.91dBm)
NOTE 1: For the applicable limit, see 15.255(d)	
NOTE 2: Spurious emissions shall not exceed the level of the fundamental emission.	


3.5.2 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.12

3.5.3 Test Setup

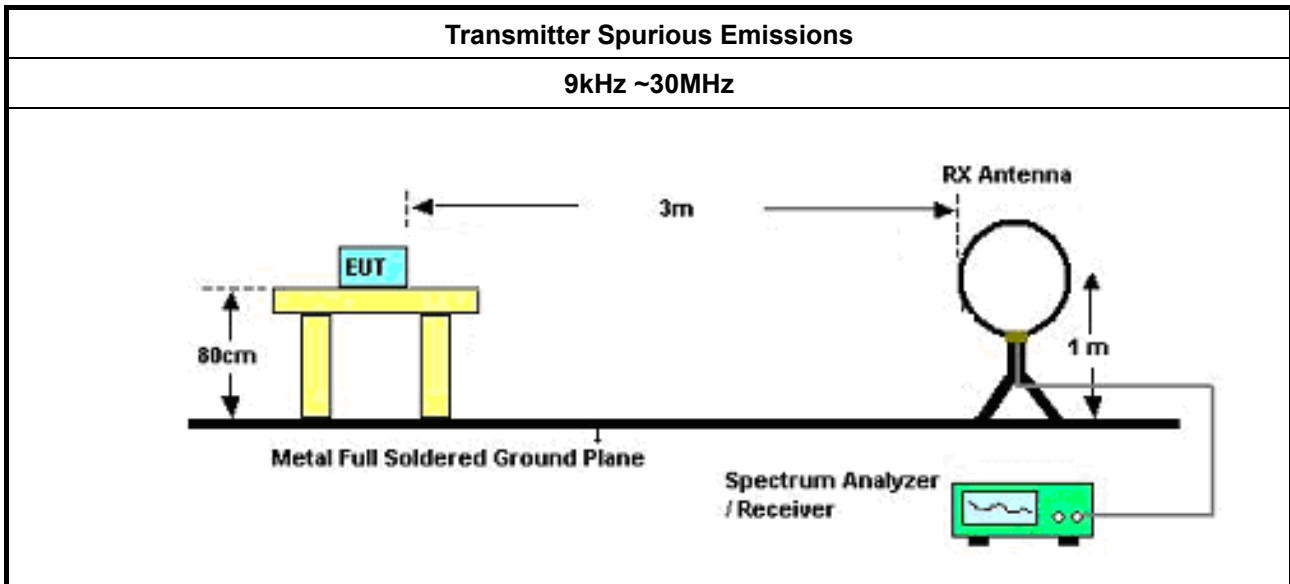

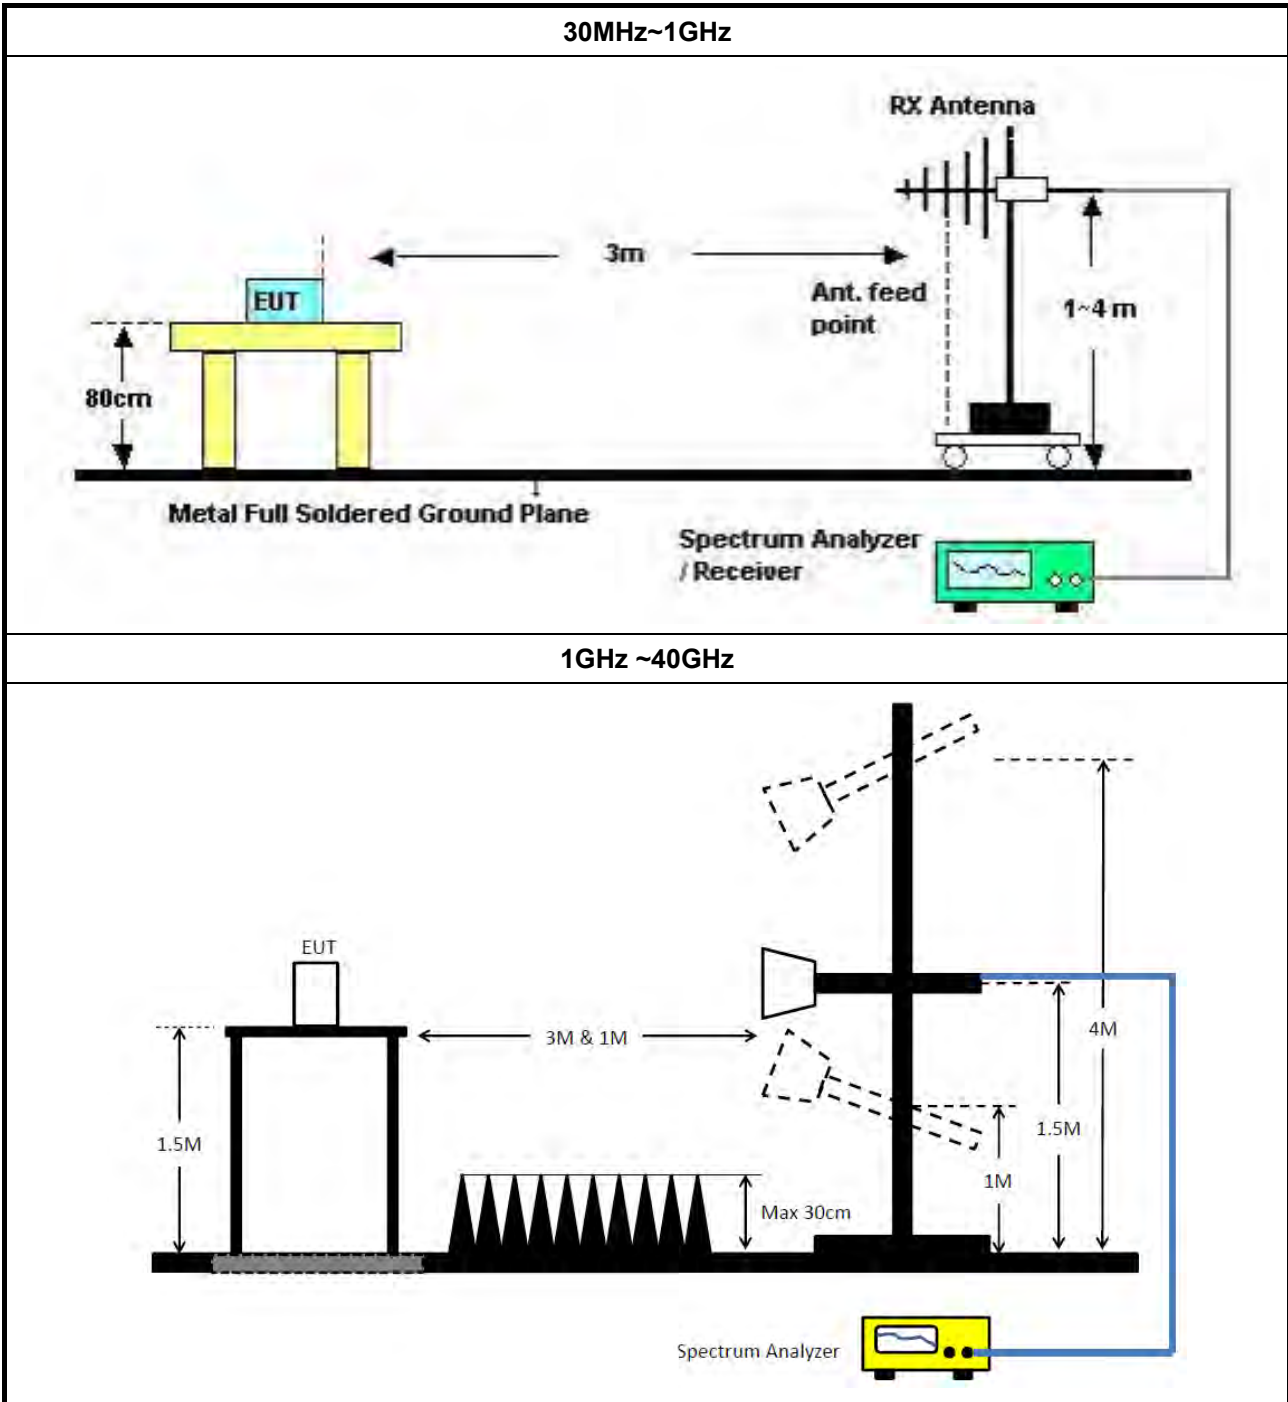

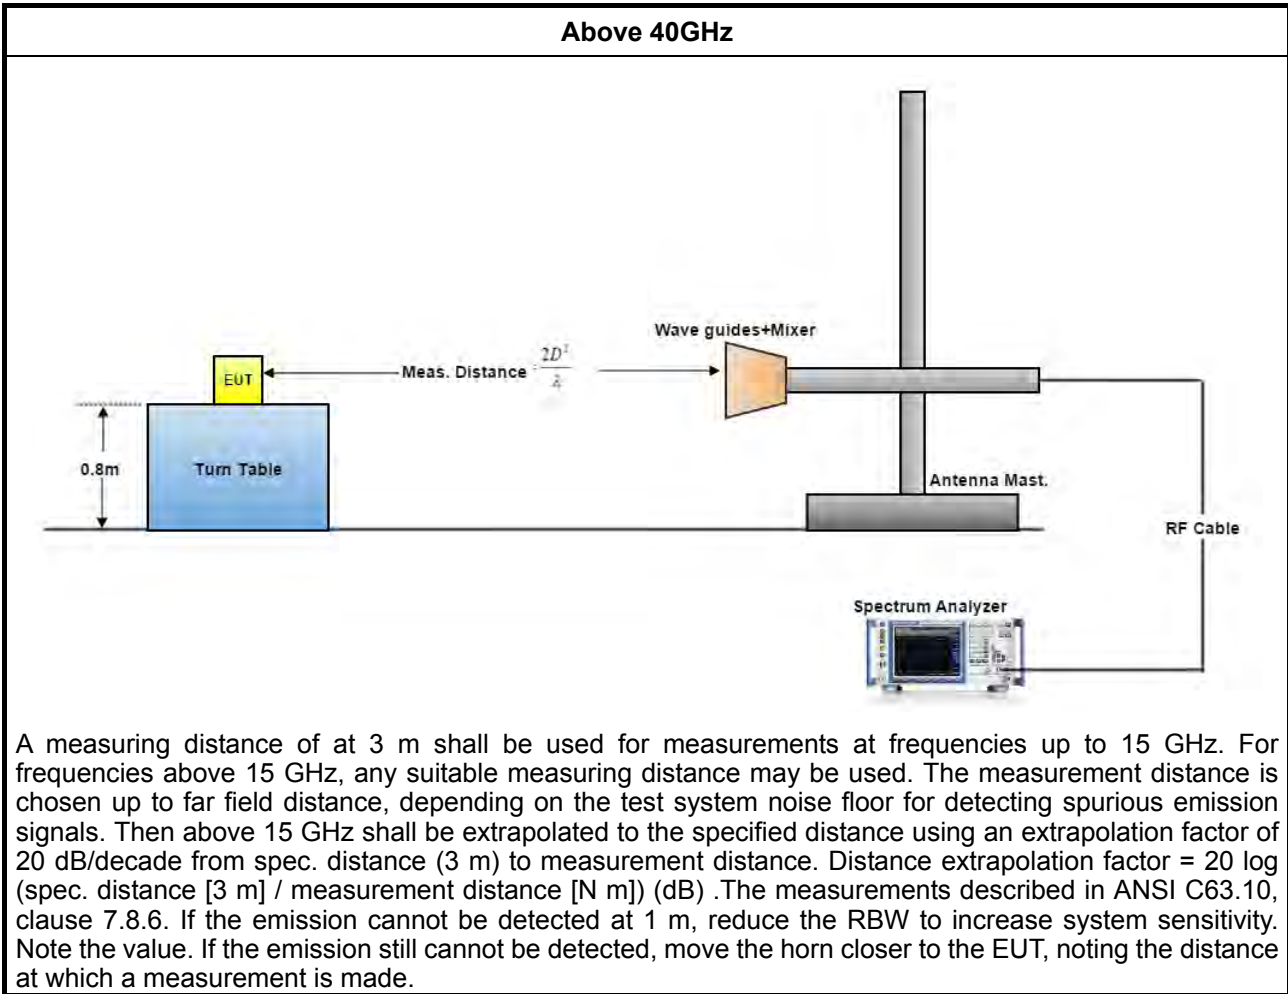

3.5.4 Measurement Results Calculation

The measured Level is calculated using:

For below 40GHz

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

For above 40GHz

$EIRP = \text{Meas. Level} - \text{RX Antenna Gain} + 20 \cdot \log(4 \cdot \text{Pi} \cdot (3.14159) \cdot D / (300 / (\text{Frequency} \cdot 1000)))$



3.5.5 Test Result of Transmitter Spurious Emissions

Test Conditions see ANSI C63.10, clause 5.11 & clause 9

Test Setup see ANSI C63.10, clause 9.12 ~ 9.13

NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.

3.5.5.1 Test Result of Transmitter Spurious Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.



3.5.5.2 Test Result of Transmitter Spurious Emissions

Test Range	30 MHz – 1000 MHz	Test Distance	3 m
Test Configuration	CTX		


Vertical

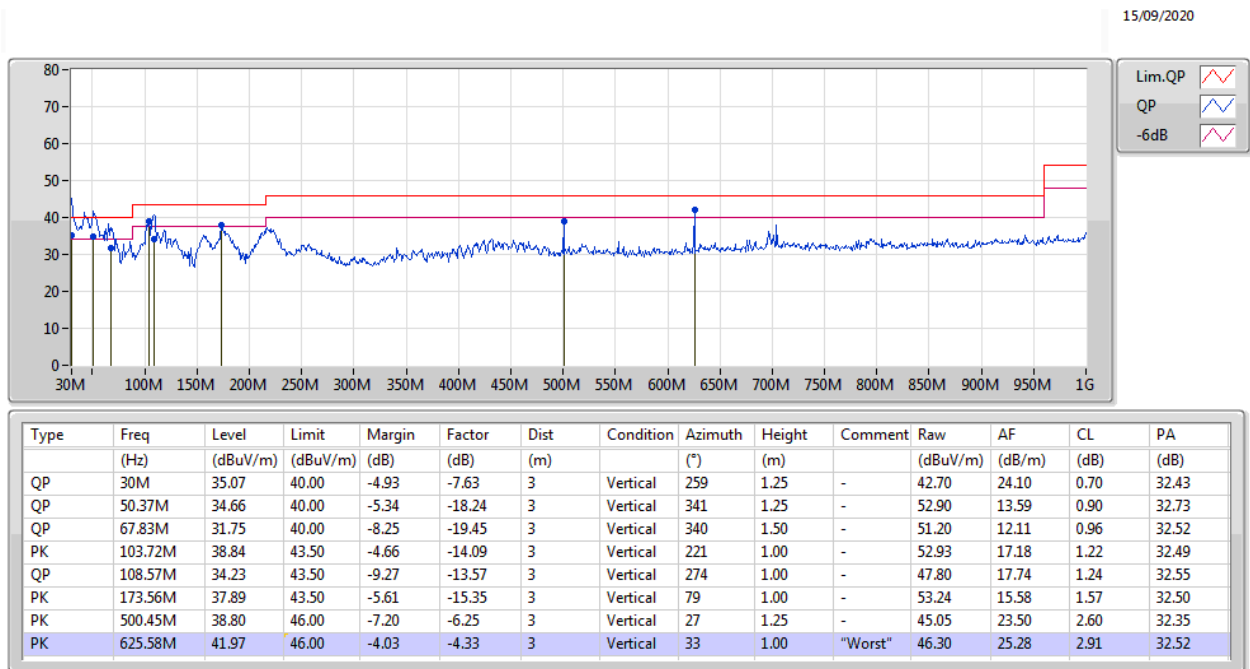



Horizontal

15/09/2020

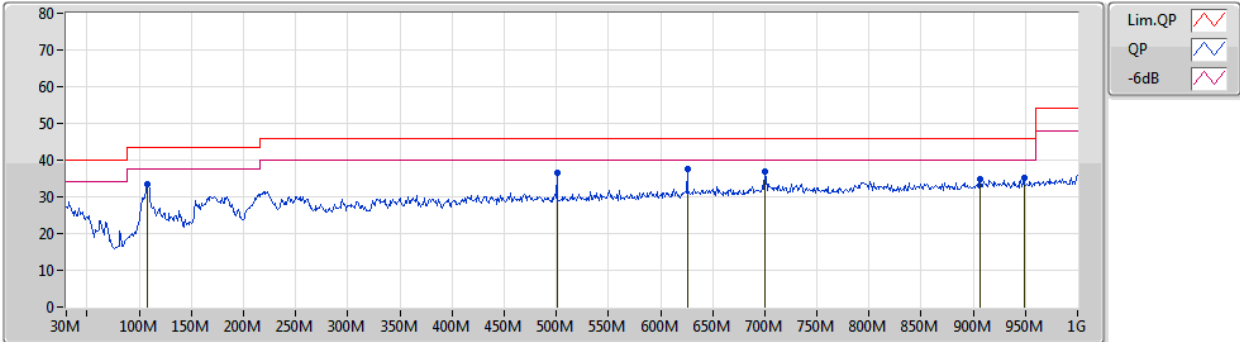


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	107.6M	33.56	43.50	-9.94	-13.67	3	Horizontal	157	3.00	-	47.23	17.63	1.24	32.54
PK	500.45M	36.60	46.00	-9.40	-6.25	3	Horizontal	182	2.00	-	42.85	23.50	2.60	32.35
PK	625.58M	37.45	46.00	-8.55	-4.33	3	Horizontal	0	1.25	"Worst"	41.78	25.28	2.91	32.52
PK	700.27M	37.01	46.00	-8.99	-3.85	3	Horizontal	17	1.25	-	40.86	25.52	3.20	32.57
PK	906.88M	34.68	46.00	-11.32	-1.42	3	Horizontal	359	3.00	-	36.10	26.77	3.63	31.82
PK	948.59M	35.21	46.00	-10.79	-0.78	3	Horizontal	166	2.00	-	35.99	26.89	3.79	31.46



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Freq. (GHz)	Channel 1: 58.32 GHz		

Vertical

22/09/2020

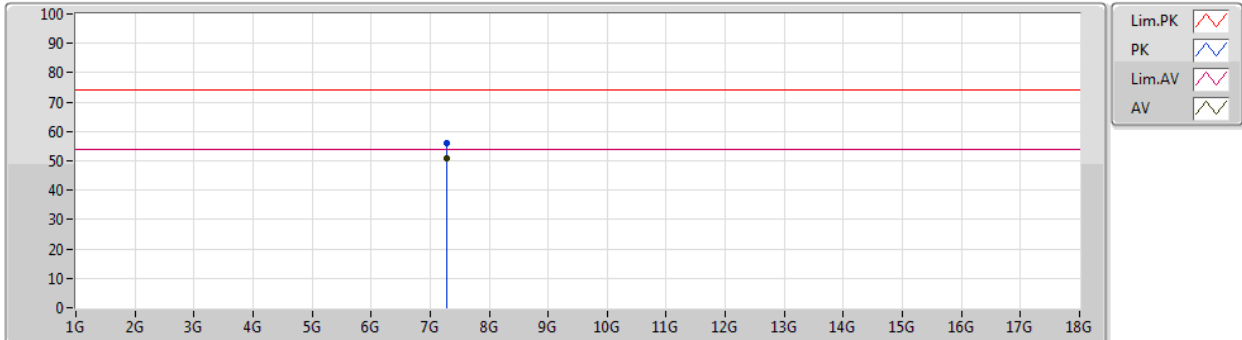


--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	7.28974G	55.88	74.00	-18.12	8.85	3	Vertical	71	1.06	-	47.03	36.58	7.36	35.09
AV	7.28961G	50.82	54.00	-3.18	8.85	3	Vertical	71	1.06	"Worst"	41.97	36.58	7.36	35.09



Horizontal

22/09/2020

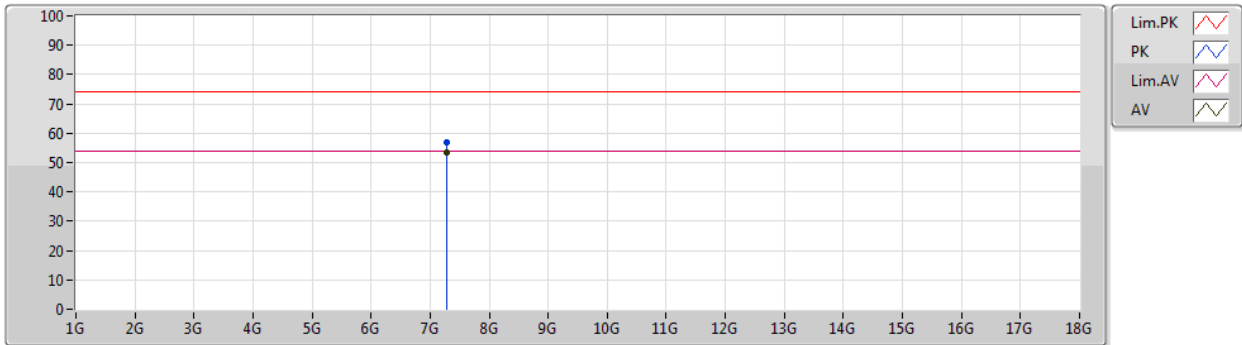


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	7.28986G	56.95	74.00	-17.05	8.85	3	Horizontal	17	1.65	-	48.10	36.58	7.36	35.09
AV	7.28954G	53.26	54.00	-0.74	8.85	3	Horizontal	17	1.65	"Worst"	44.41	36.58	7.36	35.09



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Freq. (GHz)	Channel 1: 58.32 GHz		

Vertical

22/09/2020

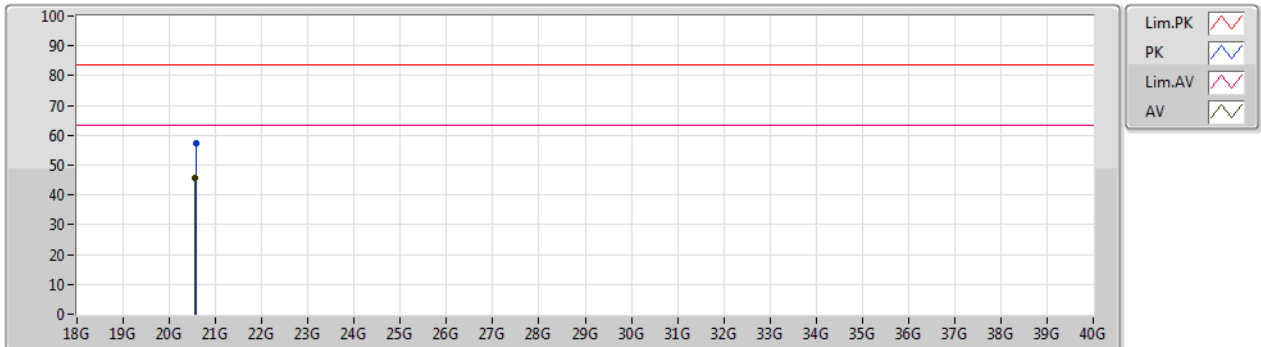


--	--	--	--	--	--	--	--	--	--	--	--	--	--

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	20.56699G	57.32	83.54	-26.22	2.53	1	Vertical	351	1.65	-	54.79	37.77	14.66	49.90
AV	20.56597G	45.80	63.54	-17.74	2.52	1	Vertical	351	1.65	"Worst"	43.28	37.77	14.65	49.90



Horizontal

22/09/2020

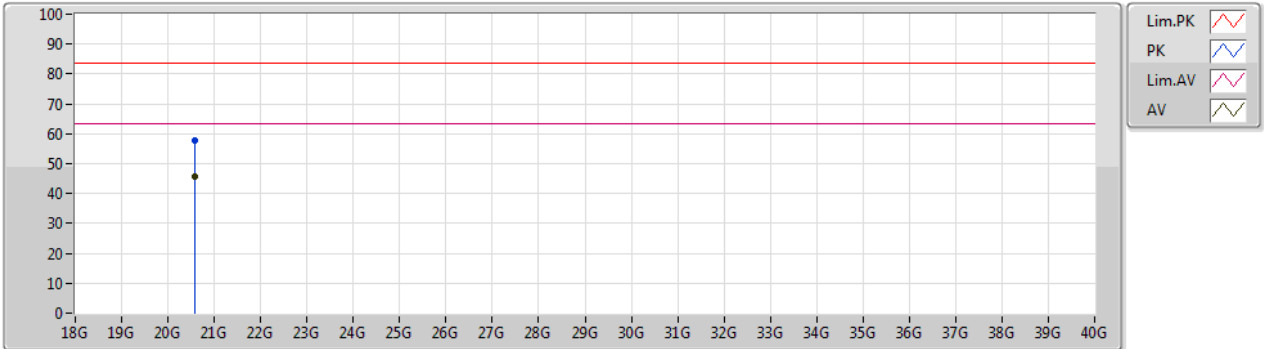


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	20.56668G	57.80	83.54	-25.74	2.53	1	Horizontal	0	1.67	-	55.27	37.77	14.66	49.90
AV	20.56782G	45.66	63.54	-17.88	2.53	1	Horizontal	0	1.67	"Worst"	43.13	37.77	14.66	49.90



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Freq. (GHz)	Channel 3: 62.64 GHz		

Vertical

22/09/2020

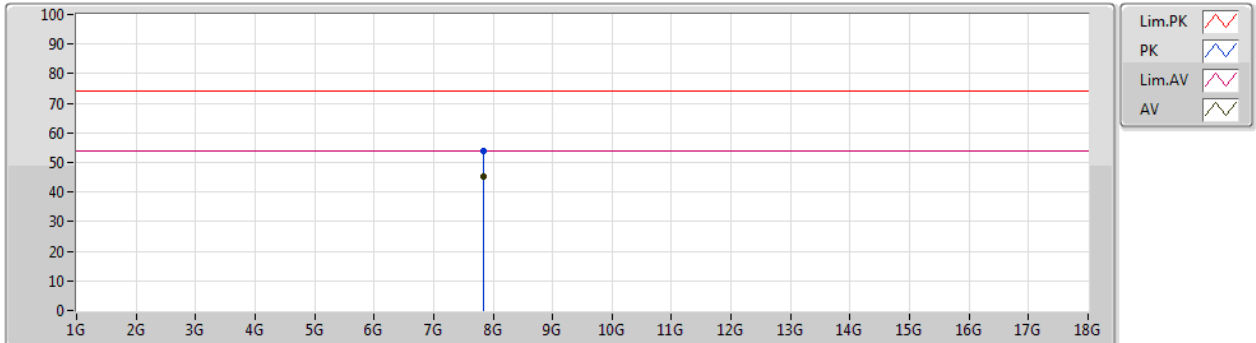


--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	7.8297G	53.70	74.00	-20.30	9.02	3	Vertical	75	1.43	-	44.68	36.56	7.30	34.84
AV	7.82962G	45.37	54.00	-8.63	9.02	3	Vertical	75	1.43	"Worst"	36.35	36.56	7.30	34.84



Horizontal

22/09/2020

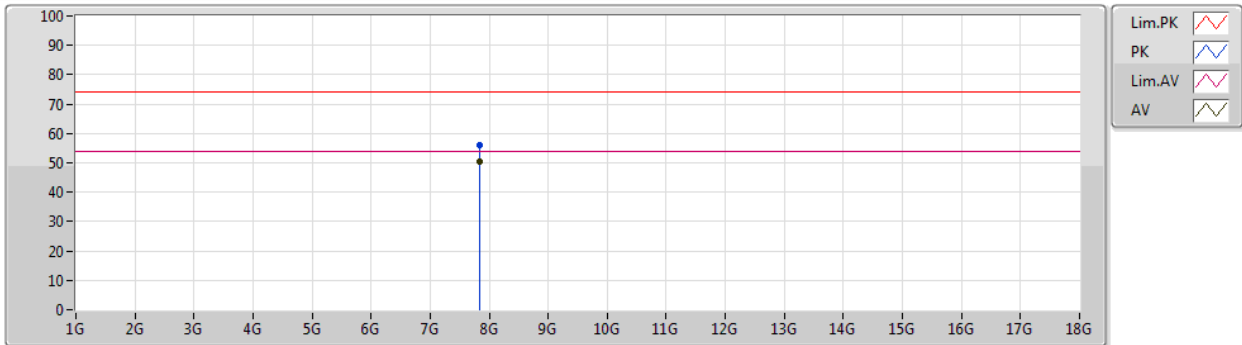


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	7.82955G	55.86	74.00	-18.14	9.02	3	Horizontal	21	1.46	-	46.84	36.56	7.30	34.84
AV	7.82956G	50.60	54.00	-3.40	9.02	3	Horizontal	21	1.46	"Worst"	41.58	36.56	7.30	34.84



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Freq. (GHz)	Channel 3: 62.64 GHz		

Vertical

22/09/2020

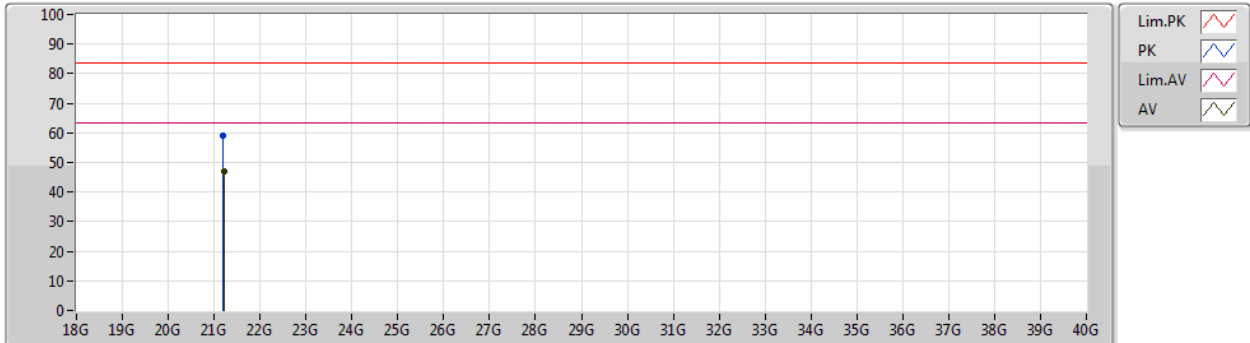


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	21.19402G	59.18	83.54	-24.36	3.24	1	Vertical	349	1.72	-	55.94	38.12	14.94	49.82
AV	21.20868G	47.02	63.54	-16.52	3.24	1	Vertical	349	1.72	"Worst"	43.78	38.12	14.94	49.82



Horizontal

22/09/2020

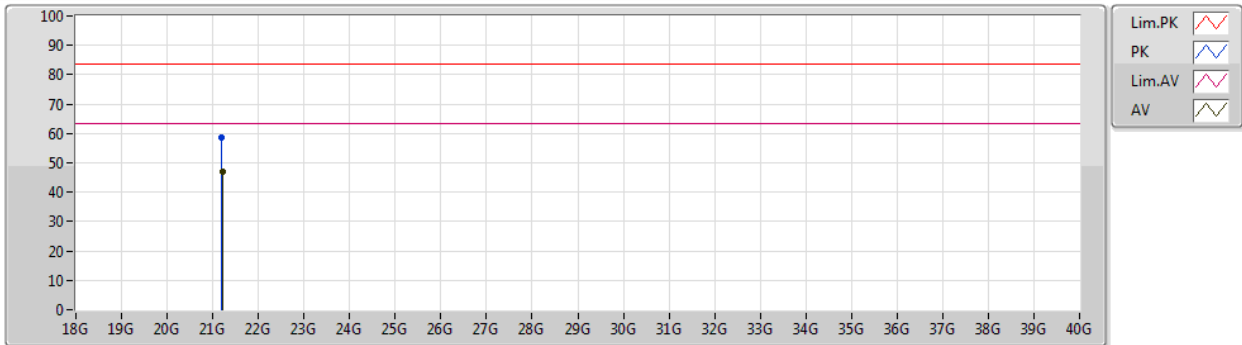


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	21.1983G	58.64	83.54	-24.90	3.24	1	Horizontal	20	1.64	-	55.40	38.12	14.94	49.82
AV	21.20964G	47.01	63.54	-16.53	3.24	1	Horizontal	20	1.64	"Worst"	43.77	38.12	14.94	49.82



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Freq. (GHz)	Channel 4: 64.80 GHz		

Vertical

22/09/2020

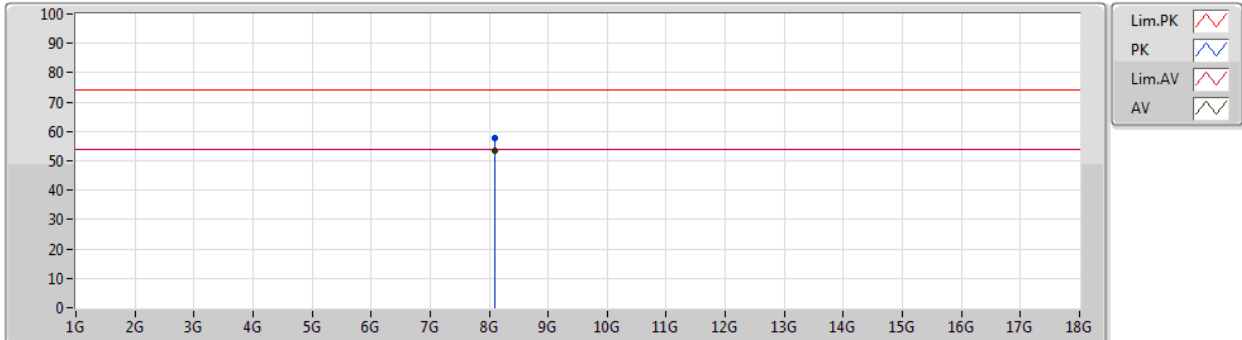

- Lim.PK
- PK
- Lim.AV
- AV




Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	8.09973G	57.66	74.00	-16.34	9.94	3	Vertical	74	1.39	-	47.72	37.20	7.50	34.76
AV	8.09953G	53.27	54.00	-0.73	9.94	3	Vertical	74	1.39	"Worst"	43.33	37.20	7.50	34.76



Horizontal

22/09/2020

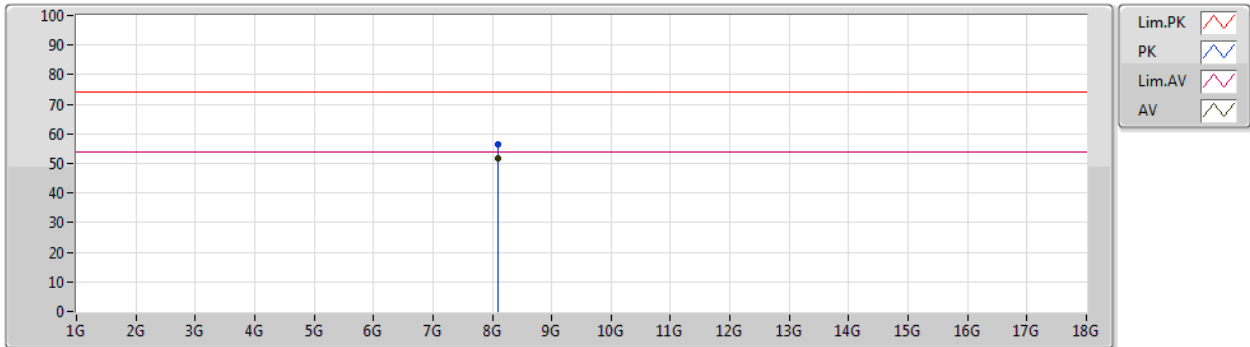


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	8.09965G	56.66	74.00	-17.34	9.94	3	Horizontal	21	1.35	-	46.72	37.20	7.50	34.76
AV	8.09957G	51.73	54.00	-2.27	9.94	3	Horizontal	21	1.35	"Worst"	41.79	37.20	7.50	34.76



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Freq. (GHz)	Channel 4: 64.80 GHz		

Vertical

22/09/2020

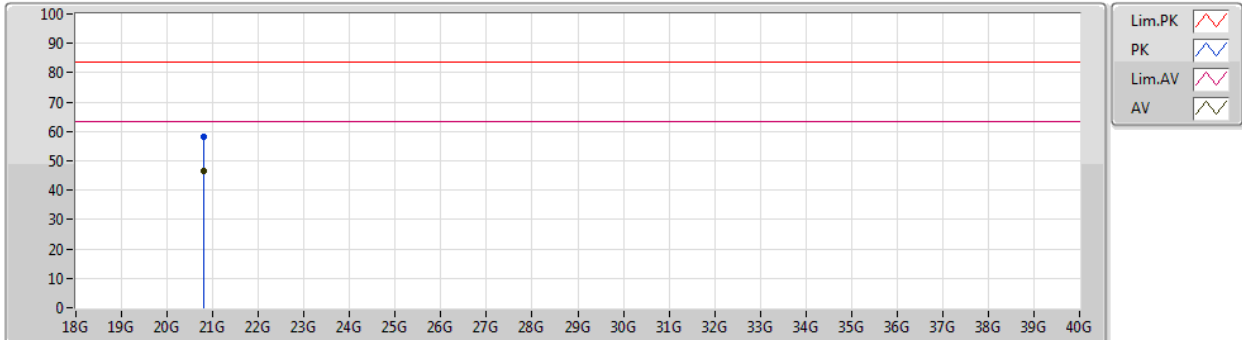


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	20.79169G	57.98	83.54	-25.56	2.85	1	Vertical	11	1.63	-	55.13	37.99	14.76	49.90
AV	20.7942G	46.57	63.54	-16.97	2.85	1	Vertical	11	1.63	"Worst"	43.72	37.99	14.76	49.90



Horizontal

22/09/2020

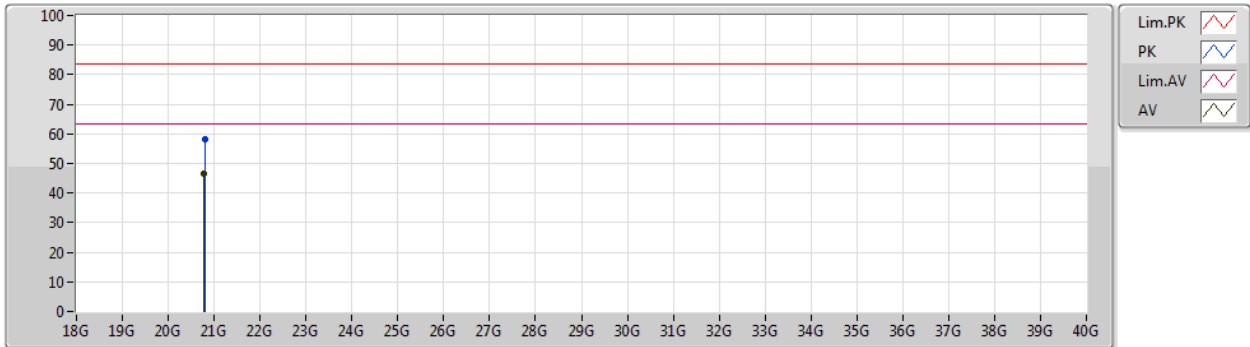

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	20.79083G	58.20	83.54	-25.34	2.85	1	Horizontal	352	1.67	-	55.35	37.99	14.76	49.90
AV	20.78741G	46.51	63.54	-17.03	2.84	1	Horizontal	352	1.67	"Worst"	43.67	37.99	14.75	49.90



Test Range	40GHz – 200GHz
-------------------	----------------

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
58.32	23.6	0.50	56.72	-52.12
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-14.22	3	33.4348	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23.6	0.50	55.42	-65.84
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-28.15	3	1.3552	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
64.80	23.6	0.50	40.78	-60.82
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-25.79	3	2.3311	90.00	PASS

Note:

$EIRP = Prx - Grx + \text{Free Space Path Loss} = Prx - Grx + 20\text{Log}(4\pi d / \lambda)^2$

Which

$Prx = \text{Read Level.}$

$Grx = \text{Rx Antenna Gain.}$

A distance factor is offset and the formula is $20\text{LOG}(D1/D2)$

Which

$D1 = \text{Specification Distance}$

$D2 = \text{Measurement Distance}$

3.6 Frequency Stability

3.6.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as 15.255(f) and ANSI C63.10-2013, clause 9.14	within the frequency bands
Note: These measurements shall also be performed at normal and extreme test conditions.	


3.6.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.6.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 9.14.

3.6.4 Test Setup

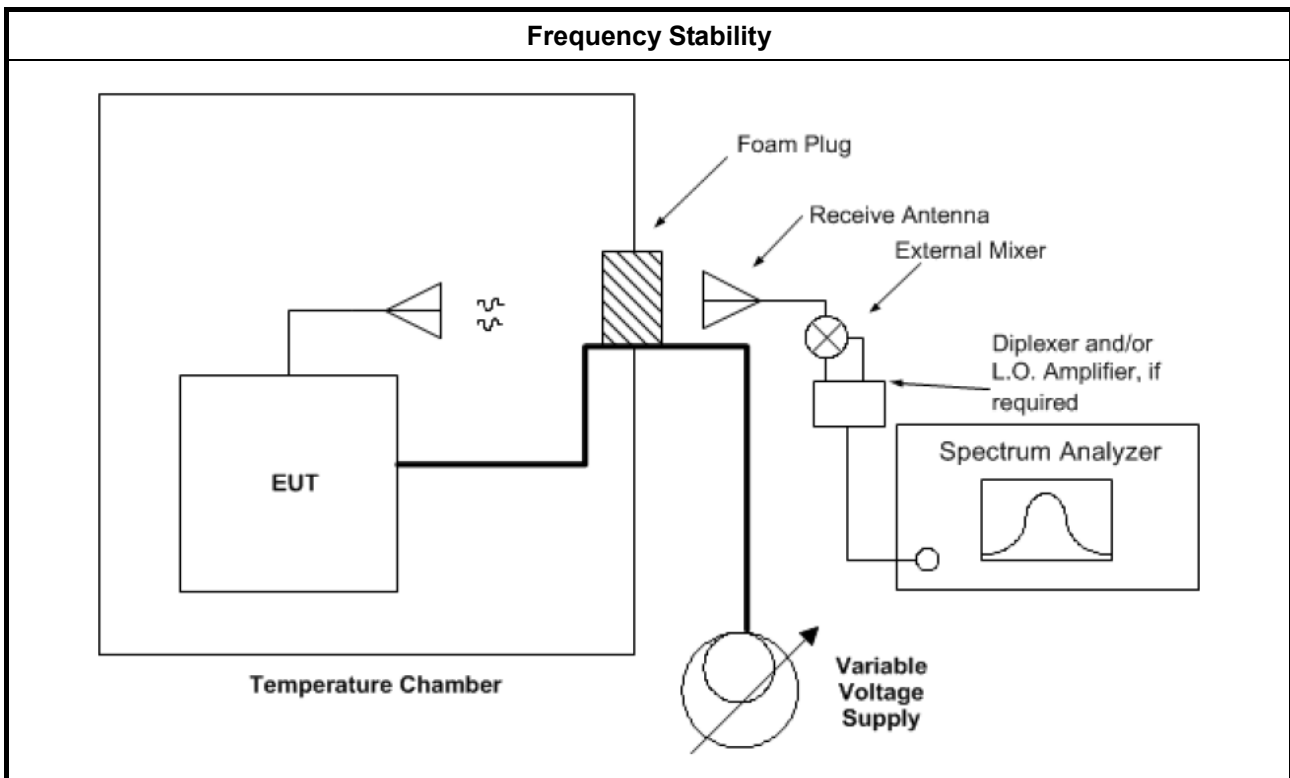



3.6.5 Test Result of Frequency Stability

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.14
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.6.5.1 Frequency Stability with Respect to Ambient Temperature

Frequency Stability with Respect to Ambient Temperature			
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-30	58291.780	-42690	within band
-20	58299.431	-35039	within band
-10	58305.182	-29288	within band
0	58315.735	-18735	within band
10	58330.771	-3699	within band
20	58334.470	Reference	within band
30	58330.120	-4350	within band
40	58292.734	-41736	within band
50	58284.360	-50110	within band
60	58313.469	-21001	within band
70	58321.183	-13287	within band
80	58330.855	-3615	within band

NOTE: The manufacturer's specified temperature range of -30 to 80°C.



3.6.5.2 Frequency Stability When Varying Supply Voltage

Frequency Stability When Varying Supply Voltage			
Test Results			
Test Voltage: (Vdc)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
40.8	58328.730	-5740	within band
48	58334.470	Reference	within band
55.2	58333.394	-1076	within band



3.7 Operation Restriction and Group Installation

3.7.1 Limit of Operation Restriction and Group Installation

Item	Limit
Operation Restriction	Operation is not permitted for the following products: <ul style="list-style-type: none">♦ Equipment used on aircraft or satellites. (Refer as 15.255 (a))♦ Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. (Refer as 15.255 (a))
Group Installation	Operation is not permitted for the following products: <ul style="list-style-type: none">♦ External phase-locking (Refer as 15.255 (h))

3.7.2 Result of Operation Restriction

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for use on aircraft or satellites.

3.7.3 Result of Group Installation

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2019	Nov. 20, 2020	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Oct. 30, 2019	Oct. 29, 2020	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Mar. 10, 2020	Mar. 09, 2021	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Oct. 21, 2019	Oct. 20, 2020	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Mar. 19, 2020	Mar. 18, 2021	Conduction (CO02-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
BILOG ANTENNA with 6 dB attenuator	Schaffner & EMCI	CBL6112B & N-6-06	22021&AT-N0607	30MHz ~ 1GHz	Oct. 12, 2019	Oct. 11, 2020	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	310N	187291	0.1MHz ~ 1GHz	Mar. 19, 2020	Mar. 18, 2021	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Dec. 18, 2019	Dec. 17, 2020	Radiation (03CH04-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 13, 2020	May 12, 2021	Radiation (03CH04-CB)
RF Cable-low	Woken	RG402	Low Cable-03+22	30MHz – 1GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH04-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 13, 2020	Apr. 12, 2021	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Sep. 05, 2020	Sep. 04, 2021	Radiation (03CH05-CB)
Horn Antenna	COM-POWER	AH-118	071028	1GHz~18GHz	Jun. 09, 2020	Jun. 08, 2021	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jul. 03, 2020	Jul. 02, 2021	Radiation (03CH05-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH05-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	May 12, 2020	May 11, 2021	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Feb. 01, 2020	Jan. 31, 2021	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Mixer	OML	M19HWA	U91113-1	40 ~ 60 GHz	Oct. 01 2019*	Sep. 30, 2021	Radiation (03CH05-CB)
Mixer	OML	M15HWA	V91113-1	50 ~ 75 GHz	Oct. 25 2019*	Oct. 24, 2021	Radiation (03CH05-CB)
Mixer	OML	M12HWA	E91113-1	60 ~ 90 GHz	Oct. 25 2019*	Oct. 24, 2021	Radiation (03CH05-CB)
Mixer	OML	M08HWA	F91113-1	90 ~ 140 GHz	Oct. 25 2019*	Oct. 24, 2021	Radiation (03CH05-CB)
Mixer	OML	M05HWA	G91113-1	140 ~ 220 GHz	Oct. 25 2019*	Oct. 24, 2021	Radiation (03CH05-CB)
Detector	Millitech	DET-15-RPF W0	#A18185(074)	50 ~ 75 GHz	Apr. 02, 2020	Apr. 01, 2021	Radiation (03CH05-CB)
PC Oscilloscope	PICO TECH	6402C	CX372/002	N/A	Jul. 10, 2020	Jul. 09, 2021	Radiation (03CH05-CB)
Standard Horn Antenna	Custom Microwave	M19RH	U91113-A	40 ~ 60 GHz	N.C.R	N.C.R	Radiation (03CH05-CB)
Standard Horn Antenna	Custom Microwave	M15RH	V91113-A	50 ~ 75 GHz	N.C.R	N.C.R	Radiation (03CH05-CB)
Standard Horn Antenna	Custom Microwave	M12RH	E91113-A	60 ~ 90 GHz	N.C.R	N.C.R	Radiation (03CH05-CB)
Standard Horn Antenna	Custom Microwave	M08RH	F91113-A	90 ~ 140 GHz	N.C.R	N.C.R	Radiation (03CH05-CB)
Standard Horn Antenna	Custom Microwave	M05RH	G91113-A	140 ~ 220 GHz	N.C.R	N.C.R	Radiation (03CH05-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Nov. 01, 2019	Oct. 31, 2020	Conducted (TH03-CB)
Temp. and Humidity Chamber	Gaint Force	GTH-408-40-CP-AR	MAA1410-011	-40~100 degree	Sep. 09, 2020	Sep. 08, 2021	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

“**” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.6 dB	Confidence levels of 95%
Radiated Emission (40GHz ~ 60GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (60GHz ~ 90GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (90GHz ~ 200GHz)	5.3 dB	Confidence levels of 95%
Temperature	0.9°C	Confidence levels of 95%