




RADIO EXPOSURE TEST REPORT

FCC ID : HEDOAP100E
Equipment : 802.11ac Wave 2 Dual-Band Enterprise Access Point
Brand Name : Edgecore
Model Name : OAP100e
Applicant : Accton Technology Corp
No. 1, Creation Rd. III, Science-based Industrial Park
Hsin Chu 30077, Taiwan R.O.C.
Manufacturer (1) : Accton Technology Corp
No. 1, Creation Rd. III, Science-based Industrial Park
Hsin Chu 30077, Taiwan R.O.C.
Manufacturer (2) : Accton Technology Corporation Zhunan Factory
1F & 4F & 5F , No. 1, Keyi St., Zhunan Township,
Miaoli County 350, Taiwan
Standard : 47 CFR Part 2.1091

The product was received on Jul. 27, 2019, and testing was started from Aug. 15, 2019 and completed on Apr. 07, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

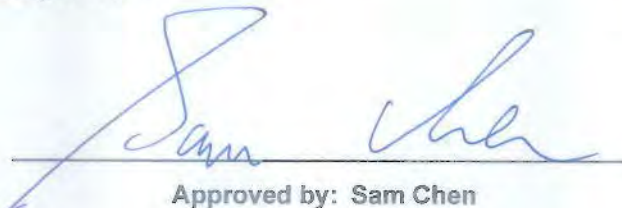

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	5
1.3 Accessories	7
1.4 Applicable Standards	7
1.5 Testing Location	7
2 Maximum Permissible Exposure	8
2.1 Limit of Maximum Permissible Exposure	8
2.2 MPE Calculation Method.....	8
2.3 MPE Exemption.....	9
2.4 Calculated Result and Limit.....	10

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Note: Reference to Sporton Project No.: 972347.

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Sam Chen**

Report Producer: **Jessie Wei**



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Bluetooth	2400-2483.5	2402-2480	LE: GFSK

1.2 Antenna Information

Ant.	Port				Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	Blue tooth	GPS					
1	1	-	-	-	ACCTON	OAP 100-1018-EC	PCB Dipole Antenna	I-PEX	Note 1
2	2	-	-	-	ACCTON	OAP 100-1018-EC	PCB Dipole Antenna	I-PEX	
3	-	1	-	-	ACCTON	OAP 100-1018-EC	Dipole Antenna	I-PEX	
4	-	2	-	-	ACCTON	OAP 100-1018-EC	Dipole Antenna	I-PEX	
5	-	-	1	-	ACCTON	OAP 100-1018-EC	PCB Dipole Antenna	I-PEX	
6	-	-	-	1	Master Wave	OAP 100-1018-EC	Chip Antenna	I-PEX	

Note 1

Ant.	Gain (dBi)			
	WLAN 2.4GHz	WLAN 5GHz	Bluetooth	GPS
1	5.4	-	-	-
2	5.66	-	-	-
3	-	8.213	-	-
4	-	8.213	-	-
5	-	-	4.5	-
6	-	-	-	3.76

Note 2: The above information was declared by manufacturer.

<For 2.4GHz Band>

For IEEE 802.11b/g/n mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.



<For 5GHz Band>

For IEEE 802.11a/n/ac mode (2TX/2RX)

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<Bluetooth>

Only Port 1 can be used as transmitting/receiving antenna.

Note 3: Directional gain information

Maximum Output Power	Power Spectral Density
Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log \left[\frac{(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2}{N_{ANT}} \right] => 10$$

$$\log \left[\frac{(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2}{N_{ANT}} \right]$$

Where ;

$$2.4G \ G1 = 5.4 ; G2 = 5.66$$

$$5G \ G1 = 8.213 ; G2 = 8.213$$

$$2.4G \ DG = 8.54 \text{ dBi}$$

$$5 \text{ GHz U-NII-1} \ DG = 11.223 \text{ dBi}$$

$$5 \text{ GHz U-NII-3} \ DG = 11.223 \text{ dBi}$$



1.3 Accessories

Accessories	
No.	Equipment Name
1	Wall-mounted rack*1
2	DC Terminal plug*1
3	Cable glands*2
4	Console cable (RJ-45 to DB-9)*1

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2.1091
- ♦ KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310

1.5 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
Test site Designation No. TW3787 with FCC.	
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	

Note: The tested sample of the test item (Output power of WLAN 2.4GHz/5GHz) was received on Feb. 15, 2022.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 46 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= Pth.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance

R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$.

Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	1,920 R ² .
1.34-30	3,450 R ² /f ² .
30-300	3.83 R ² .
300-1,500	0.0128 R ² f.
1,500-100,000	19.2R ² .

Note: R is in meters, f is in MHz.



2.4 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;D1D	5.66	27.71	33.37	0.50	33.87	2.43781	46	0.09168	1.00000
5.2G;D1D	8.213	19.24	27.45	0.50	27.95	0.62373	46	0.02346	1.00000
5.8G;D1D	8.213	27.69	35.90	0.09	35.99	3.97192	46	0.14937	1.00000
2.4G;BT-LE	4.50	1.12	5.62	0.50	6.12	0.00409	46	0.00015	1.00000

MPE Exemption Option C							
Frequency (MHz)	$\lambda/2\pi$ (m)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	MPE Exemption
2437	0.0196	0.46	33.87	31.72	1.486	4.063	Complies
5785	0.0082		35.99	33.84	2.421	4.063	Complies
2440	0.0196		6.12	3.97	0.002	4.063	Complies

Simultaneous Transmission Analysis Mode: WLAN 2.4GHz+WLAN 5GHz+Bluetooth

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.46	33.87	31.72	1.486	4.063	0.96	<= 1
5785		35.99	33.84	2.421	4.063		
2440		6.12	3.97	0.002	4.063		

—THE END—