

FCC Test Report

Report No.: RF150415E06

FCC ID: HEDSPAC750

Test Model: SP-AC750

Series Model: SP-N300

Received Date: Apr. 15, 2015

Test Date: Apr. 16 to 22, 2015

Issued Date: Apr. 29, 2015

Applicant: Accton Technology Corporation

Address: No.1, Creation Rd. III, Science-based Industrial Park, Hsinchu, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

| | |
|--|-----------|
| Release Control Record | 4 |
| 1 Certificate of Conformity | 5 |
| 2 Summary of Test Results | 6 |
| 2.1 Measurement Uncertainty | 6 |
| 2.2 Modification Record | 6 |
| 3 General Information | 7 |
| 3.1 General Description of EUT | 7 |
| 3.2 Description of Test Modes | 9 |
| 3.2.1 Test Mode Applicability and Tested Channel Detail | 10 |
| 3.3 Duty Cycle of Test Signal | 12 |
| 3.4 Description of Support Units | 13 |
| 3.4.1 Configuration of System under Test | 14 |
| 3.5 General Description of Applied Standards | 16 |
| 4 Test Types and Results | 17 |
| 4.1 Radiated Emission and Bandedge Measurement | 17 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement | 17 |
| 4.1.2 Test Instruments | 18 |
| 4.1.3 Test Procedures | 20 |
| 4.1.4 Deviation from Test Standard | 20 |
| 4.1.5 Test Set Up | 21 |
| 4.1.6 EUT Operating Conditions | 21 |
| 4.1.7 Test Results | 22 |
| 4.2 Conducted Emission Measurement | 35 |
| 4.2.1 Limits of Conducted Emission Measurement | 35 |
| 4.2.2 Test Instruments | 35 |
| 4.2.3 Test Procedures | 36 |
| 4.2.4 Deviation from Test Standard | 36 |
| 4.2.5 Test Setup | 36 |
| 4.2.6 EUT Operating Conditions | 36 |
| 4.2.7 Test Results (Mode 1) | 37 |
| 4.2.8 Test Results (Mode 2) | 39 |
| 4.3 6dB Bandwidth Measurement | 41 |
| 4.3.1 Limits of 6dB Bandwidth Measurement | 41 |
| 4.3.2 Test Setup | 41 |
| 4.3.3 Test Instruments | 41 |
| 4.3.4 Test Procedure | 41 |
| 4.3.5 Deviation from Test Standard | 41 |
| 4.3.6 EUT Operating Conditions | 41 |
| 4.3.7 Test Result | 42 |
| 4.4 Conducted Output Power Measurement | 44 |
| 4.4.1 Limits of Conducted Output Power Measurement | 44 |
| 4.4.2 Test Setup | 44 |
| 4.4.3 Test Instruments | 44 |
| 4.4.4 Test Procedures | 44 |
| 4.4.5 Deviation from Test Standard | 44 |
| 4.4.6 EUT Operating Conditions | 44 |
| 4.4.7 Test Results | 45 |
| 4.5 Power Spectral Density Measurement | 47 |
| 4.5.1 Limits of Power Spectral Density Measurement | 47 |
| 4.5.2 Test Setup | 47 |
| 4.5.3 Test Instruments | 47 |
| 4.5.4 Test Procedure | 47 |
| 4.5.5 Deviation from Test Standard | 47 |



| | |
|---|-----------|
| 4.5.6 EUT Operating Condition | 47 |
| 4.5.7 Test Results | 48 |
| 4.6 Conducted Out of Band Emission Measurement | 50 |
| 4.6.1 Limits of Conducted Out of Band Emission Measurement..... | 50 |
| 4.6.2 Test Setup..... | 50 |
| 4.6.3 Test Instruments | 50 |
| 4.6.4 Test Procedure | 50 |
| 4.6.5 Deviation from Test Standard | 50 |
| 4.6.6 EUT Operating Condition | 50 |
| 4.6.7 Test Results | 50 |
| 5 Pictures of Test Arrangements..... | 57 |
| Appendix – Information on the Testing Laboratories | 58 |



A D T

Release Control Record

| Issue No. | Description | Date Issued |
|-------------|-------------------|---------------|
| RF150415E06 | Original release. | Apr. 29, 2015 |



1 Certificate of Conformity

Product: Cloud-Enabled Enterprise Access Point

Brand: IgniteNet

Test Model: SP-AC750

Series Model: SP-N300

Sample Status: ENGINEERING SAMPLE

Applicant: Accton Technology Corporation

Test Date: Apr. 16 to 22, 2015

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Apr. 29, 2015
Lori Chung / Specialist

Approved by :  , **Date:** Apr. 29, 2015
May Chen / Manager

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (SECTION 15.247) | | | |
|--|--|--------|---|
| FCC Clause | Test Item | Result | Remarks |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -9.79dB at 0.25938MHz. |
| 15.205 / 15.209 / 15.247(d) | Radiated Emissions and Band Edge Measurement | PASS | Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz. |
| 15.247(d) | Antenna Port Emission | PASS | Meet the requirement of limit. |
| 15.247(a)(2) | 6dB bandwidth | PASS | Meet the requirement of limit. |
| 15.247(b) | Conducted power | PASS | Meet the requirement of limit. |
| 15.247(e) | Power Spectral Density | PASS | Meet the requirement of limit. |
| 15.203 | Antenna Requirement | PASS | Antenna connector is i-pex(MHF) not a standard connector. |

NOTE: The EUT was operating in 2400 ~ 2483.5MHz, 5150~5250MHz and 5725~5.850MHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz. For the 5150~5250MHz and 5725~5850MHz RF parameters was recorded in another test report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (\pm) |
|------------------------------------|----------------|--------------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 2.86 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 5.37 dB |
| Radiated Emissions above 1 GHz | 1GHz ~6GHz | 3.72 dB |
| | 6GHz ~ 18GHz | 4.00 dB |
| | 18GHz ~ 40GHz | 4.11 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|-----------------------|--|
| Product | Cloud-Enabled Enterprise Access Point |
| Brand | IgniteNet |
| Test Model | SP-AC750 |
| Series Model | SP-N300 |
| Status of EUT | ENGINEERING SAMPLE |
| Power Supply Rating | 12Vdc from power adapter or 24Vdc from POE |
| Modulation Type | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode |
| Modulation Technology | DSSS, OFDM |
| Transfer Rate | 802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 433.3Mbps |
| Operating Frequency | For 15.407 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz |
| | For 15.247 2.412 ~ 2.462GHz |
| Number of Channel | For 15.407 9 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 4 for 802.11n (HT40), 802.11ac (VHT40) 2 for 802.11ac (VHT80) |
| | For 15.247 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) |
| Output Power | For 15.407 802.11a: 269.153mW 802.11ac (VHT20): 272.898mW 802.11ac (VHT40): 411.15mW 802.11ac (VHT80): 96.828mW |
| | For 15.247 802.11b: 130.918mW 802.11g: 677.642mW 802.11n (HT20): 929.584mW 802.11n (HT40): 744.91mW |
| Antenna Type | Refer to Note |
| Antenna Connector | Refer to Note |
| Accessory Device | Adapter x 1, POE x 1 |
| Data Cable Supplied | NA |

Note:

- The EUT has below Model names, which are identical to each other in all aspects except for the following information:

| Model Name | Difference |
|------------|---------------|
| SP-AC750 | 2.4GHz + 5GHz |
| SP-N300 | 2.4GHz |

From the above models, model: **SP-AC750** was selected as representative model for the test and its data was recorded in this report.

- The emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.

3. The antennas provided to the EUT, please refer to the following table:

| 2.4GHz Band | | | | | | |
|-------------|---------------|----------------|------------------------------|-----------|----------------|-------------------|
| Antenna No. | PCB Chain No. | Ant. Gain(dBi) | Frequency Range (GHz to GHz) | Ant. Type | Connector Type | Cable Length (mm) |
| 1 (White) | Chain (0) | 4.3 | 2.4~2.4835 | PCB | i-pex(MHF) | 130 |
| 2 (Gray) | Chain (1) | 4.01 | 2.4~2.4835 | PCB | i-pex(MHF) | 90 |

**For 802.11bg mode will fix transmission on Chain (0).

| 5GHz Band | | | | | |
|-------------|----------------|------------------------------|-----------|----------------|-------------------|
| Antenna No. | Ant. Gain(dBi) | Frequency Range (GHz to GHz) | Ant. Type | Connector Type | Cable Length (mm) |
| 3 (Black) | 5 | 5.15~5.85 | PCB | MMCX-plug | 115 |

4. The EUT must be supplied with a power adapter or a POE as following table:

| Power Adapter | | |
|---------------|------------|--|
| Brand | Model No. | Spec. |
| APD | WB-18D12FU | AC Input: 100-240V, 0.5A, 50-60Hz DC Output: 12V, 1.5A DC Output cable: Unshielded, 1.8m |

| POE | | |
|-------|-----------------|---|
| Brand | Model No. | Spec. |
| LEI | NU24-F240100-I2 | AC Input: 100-240V, 0.7A, 50/60Hz AC Input cable: Unshielded, 0.8m DC Output: 24V, 1A |

For Radiated Emission test, the EUT was pre-tested with adapter and POE, the worst case was found in POE. Therefore only the test data of the POE was recorded in this report.

5. The EUT incorporates a MIMO function.

| 2.4GHz Band | | | |
|-----------------|-----------------|-----------------------|-----|
| MODULATION MODE | DATA RATE (MCS) | TX & RX CONFIGURATION | |
| 802.11b | 1 ~ 11Mbps | 1TX (fix on chain 0) | 2RX |
| 802.11g | 6 ~ 54Mbps | 1TX (fix on chain 0) | 2RX |
| 802.11n (HT20) | MCS 0~7 | 1TX (fix on chain 0) | 2RX |
| | MCS 8~15* | 2TX | 2RX |
| 802.11n (HT40) | MCS 0~7 | 1TX (fix on chain 0) | 2RX |
| | MCS 8~15* | 2TX | 2RX |

| 5GHz Band | | | |
|------------------|-----------------|-----------------------|-----|
| MODULATION MODE | DATA RATE (MCS) | TX & RX CONFIGURATION | |
| 802.11a | 6 ~ 54Mbps | 1TX | 1RX |
| 802.11n (HT20) | MCS 0~7 | 1TX | 1RX |
| 802.11n (HT40) | MCS 0~7 | 1TX | 1RX |
| 802.11ac (VHT20) | MCS 0~8, Nss=1 | 1TX | 1RX |
| 802.11ac (VHT40) | MCS 0~9, Nss=1 | 1TX | 1RX |
| 802.11ac (VHT80) | MCS 0~9, Nss=1 | 1TX | 1RX |

Remark: "*" means the device operate with two spatial stream (Nss = 2) with different data, and two signals are not correlated.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1 | 2412MHz | 7 | 2442MHz |
| 2 | 2417MHz | 8 | 2447MHz |
| 3 | 2422MHz | 9 | 2452MHz |
| 4 | 2427MHz | 10 | 2457MHz |
| 5 | 2432MHz | 11 | 2462MHz |
| 6 | 2437MHz | | |

7 channels are provided for 802.11n (HT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 3 | 2422MHz | 7 | 2442MHz |
| 4 | 2427MHz | 8 | 2447MHz |
| 5 | 2432MHz | 9 | 2452MHz |
| 6 | 2437MHz | | |

3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-------|-----|------|--------------|
| | RE \geq 1G | RE<1G | PLC | APCM | |
| 1 | √ | √ | √ | √ | POE Mode |
| 2 | - | - | √ | - | Adapter Mode |

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement **RE<1G**: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:
 1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on Laying-flat type (for below 1GHz) and Wall-mount type (for above 1GHz).
 2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 |
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 13 |
| 802.11n (HT40) | 3 to 9 | 3, 6, 9 | OFDM | BPSK | 27 |

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11n (HT20) | 1 to 11 | 11 | OFDM | BPSK | 13 |

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11n (HT20) | 1 to 11 | 6 | OFDM | BPSK | 13 |

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.





| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 |
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 13 |
| 802.11n (HT40) | 3 to 9 | 3, 6, 9 | OFDM | BPSK | 27 |

Test Condition:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|------------------------------|--------------------------|--------------|---------------|
| RE\geq1G | 24deg. C, 67%RH | 120Vac, 60Hz | Andy Ho |
| RE$<$1G | 24deg. C, 68%RH | 120Vac, 60Hz | Robert Cheng |
| PLC | 25deg. C, 60%RH | 120Vac, 60Hz | Anderson Chen |
| APCM | 20deg. C, 70%RH | 120Vac, 60Hz | Mike Hsieh |

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.

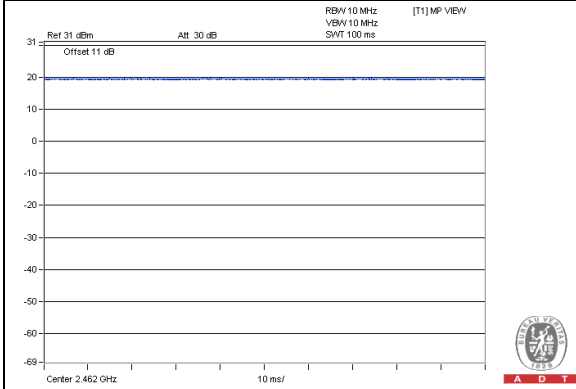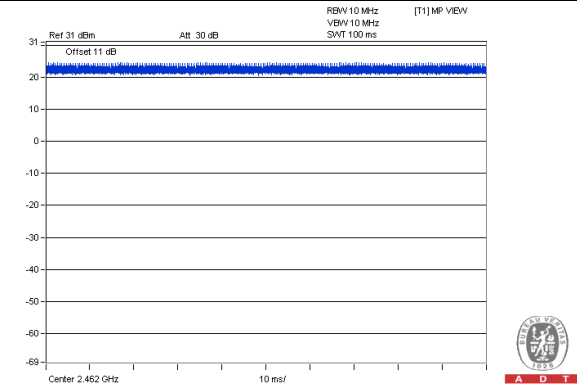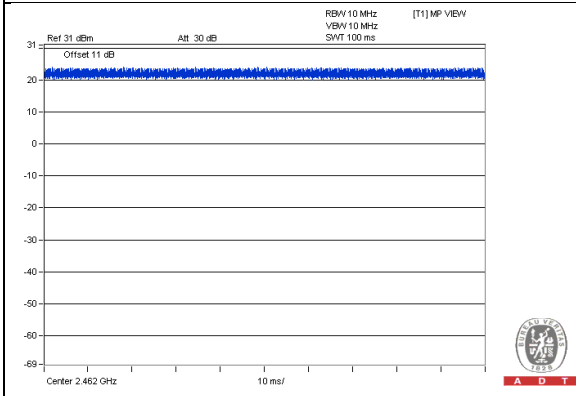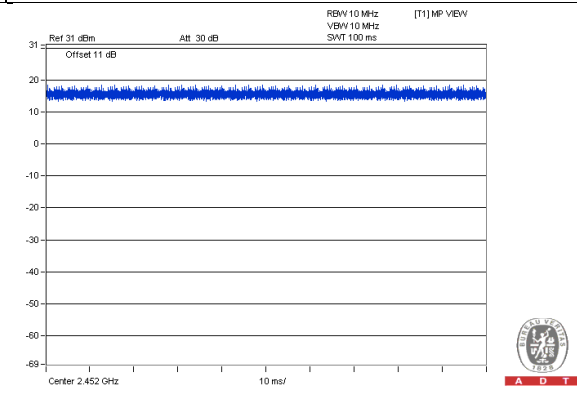802.11b**802.11g****802.11n (HT20)****802.11n (HT40)**

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Product | Brand | Model No. | Serial No. | FCC ID | Remark |
|-----|-------------------|---------|-----------|--------------|---------|-----------------|
| A | iPod shuffle | Apple | MC749TA/A | CC4DMFKUDFDM | NA | Provided by Lab |
| B | NOTEBOOK COMPUTER | DELL | E6420 | H62T3R1 | FCC DoC | Provided by Lab |
| C | NOTEBOOK COMPUTER | DELL | E5430 | 4YV4VY1 | FCC DoC | Provided by Lab |
| D | HUB | Linksys | SD208 | NA | NA | Provided by Lab |


NOTE:

1. All power cords of the above support units are non-shielded (1.8 m).


| No. | Cable | Qty. | Length (m) | Shielded (Yes/ No) | Cores (Number) | Remark |
|-----|-------|------|------------|--------------------|----------------|--------------------|
| 1 | USB | 1 | 0.1 | Yes | 0 | Provided by Lab |
| 2 | RJ45 | 1 | 10 | No | 0 | Provided by Lab |
| 3 | RJ45 | 1 | 10 | No | 0 | Provided by Lab |
| 4 | RJ45 | 1 | 10 | No | 0 | Provided by Lab |
| 5 | RJ45 | 1 | 3 | No | 0 | Provided by Lab |
| 6 | DC | 1 | 1.8 | No | 0 | Supplied by Client |
| 7 | AC | 1 | 0.8 | No | 0 | Supplied by Client |

3.4.1 Configuration of System under Test

POE Mode:

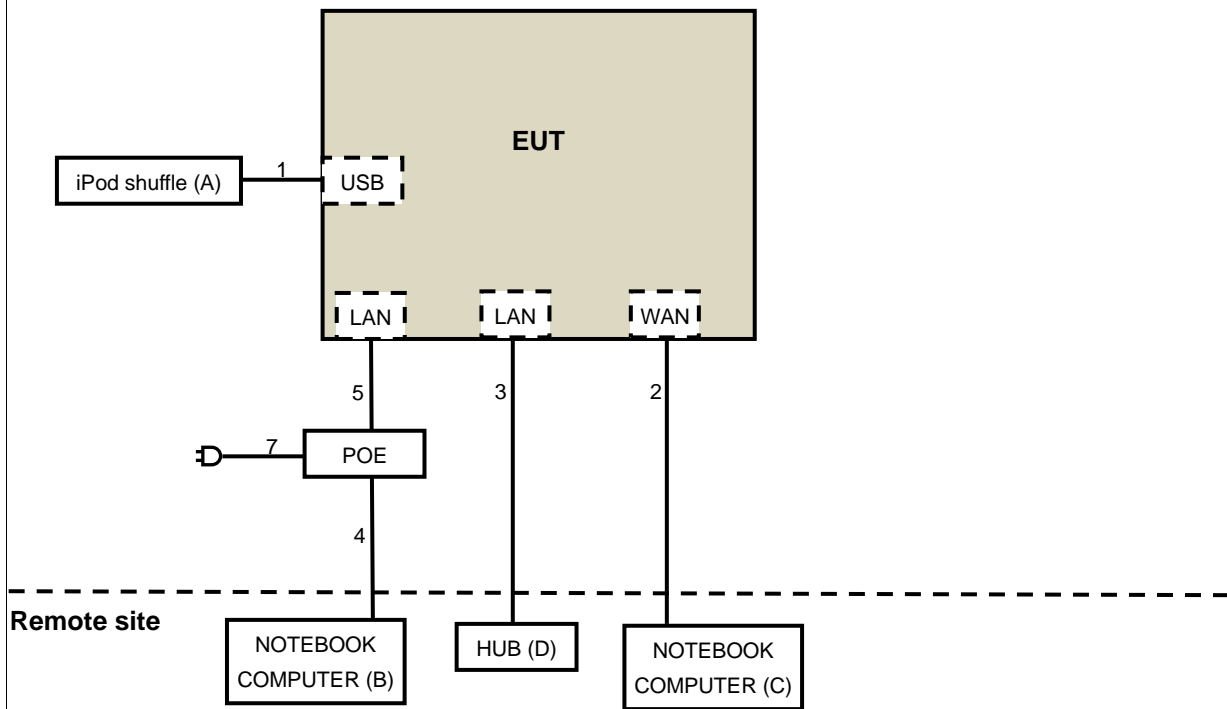

Adapter Mode:

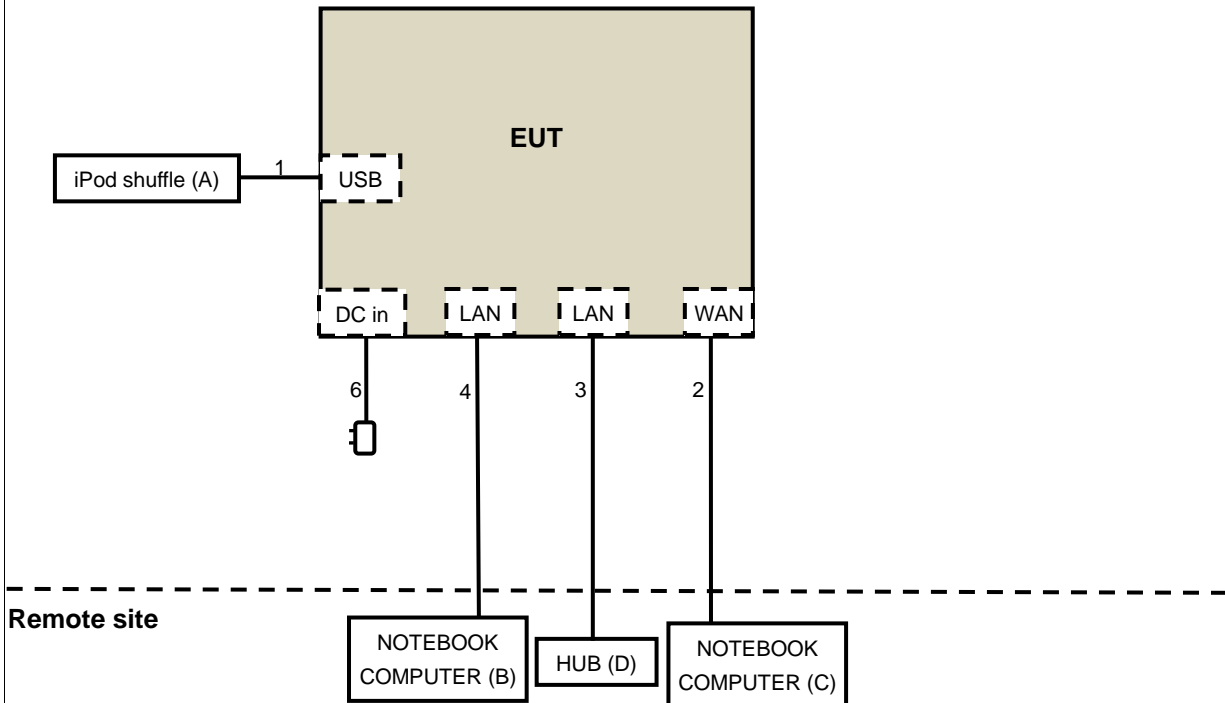

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r02

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Below 1GHz test:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|------------------|---|-----------------|------------------|
| MXE EMI Receiver Agilent | N9038A | MY51210105 | July 21, 2014 | July 20, 2015 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2 B | AMP-ZFL-03 | Nov. 12, 2014 | Nov. 11, 2015 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-360 | Feb. 09, 2015 | Feb. 08, 2016 |
| RF Cable | NA | CHGCAB_001 | Oct. 04, 2014 | Oct. 03, 2015 |
| Horn_Antenna AISI | AIH.8018 | 0000320091110 | Aug. 27, 2014 | Aug. 26, 2015 |
| Pre-Amplifier Agilent | 8449B | 3008A02578 | June 24, 2014 | June 23, 2015 |
| RF Cable | NA | 131205 131216 131217 SNMY23684/4 | Jan. 16, 2015 | Jan. 15, 2016 |
| Spectrum Analyzer R&S | FSV40 | 100964 | July 05, 2014 | July 04, 2015 |
| Pre-Amplifier SPACEK LABS | SLKKa-48-6 | 9K16 | Dec. 12, 2014 | Dec. 11, 2015 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | 9170-424 | Aug. 26, 2014 | Aug. 25, 2015 |
| RF Cable | NA | 329751/4 RF104-204 | Dec. 11, 2014 | Dec. 10, 2015 |
| Antenna Tower & Turn Table CT | NA | NA | NA | NA |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Apr. 16, 2015

For Above 1GHz test:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|--------------------------|---|-----------------|------------------|
| MXE EMI Receiver Agilent | N9038A | MY50010156 | Aug. 11, 2014 | Aug. 10, 2015 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2 B | AMP-ZFL-04 | Nov. 12, 2014 | Nov. 11, 2015 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-361 | Feb. 06, 2015 | Feb. 05, 2016 |
| RF Cable | NA | CHHCAB_001 | Oct. 05, 2014 | Oct. 04, 2015 |
| Horn_Antenna AISI | AIH.8018 | 0000220091110 | Aug. 26, 2014 | Aug. 25, 2015 |
| Pre-Amplifier Agilent | 8449B | 300801923 | Oct. 28, 2014 | Oct. 27, 2015 |
| RF Cable | NA | 131206 131213 131215 SNMY23685/4 | Jan. 16, 2015 | Jan. 15, 2016 |
| Spectrum Analyzer R&S | FSV40 | 100964 | July 05, 2014 | July 04, 2015 |
| Pre-Amplifier SPACEK LABS | SLKKa-48-6 | 9K16 | Dec. 12, 2014 | Dec. 11, 2015 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | 9170-424 | Aug. 26, 2014 | Aug. 25, 2015 |
| RF Cable | NA | 329751/4 RF104-204 | Dec. 11, 2014 | Dec. 10, 2015 |
| Software | ADT_Radiated _V8.7.07 | NA | NA | NA |
| Antenna Tower & Turn Table CT | NA | NA | NA | NA |
| SPECTRUM ANALYZER R&S | FSP 40 | 100060 | May 08, 2014 | May 07, 2015 |
| Power Meter Anritsu | ML2495A | 1014008 | Apr. 30, 2014 | Apr. 29, 2015 |
| Power Sensor Anritsu | MA2411B | 0917122 | Apr. 30, 2014 | Apr. 29, 2015 |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Apr. 21, 2015

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the ground at 3 meter chamber room for test
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
6. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

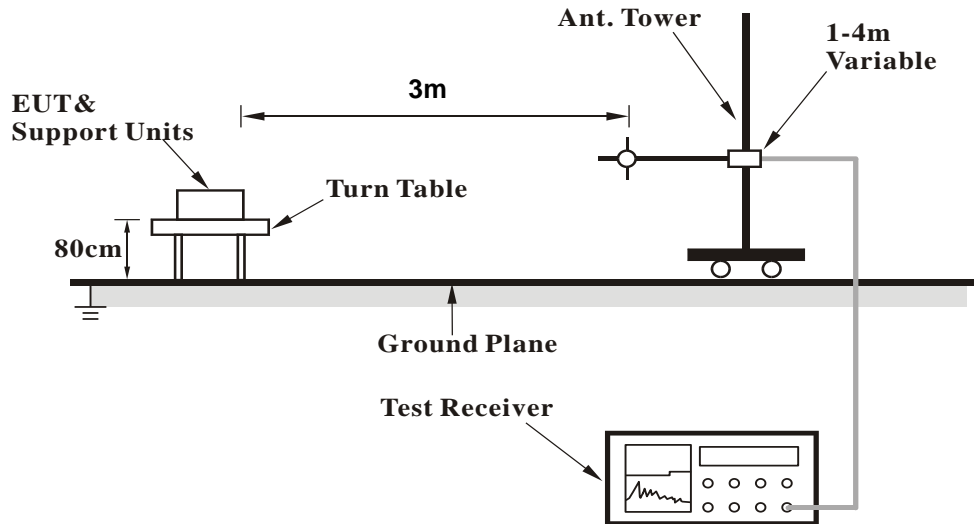

<Frequency Range above 1GHz>

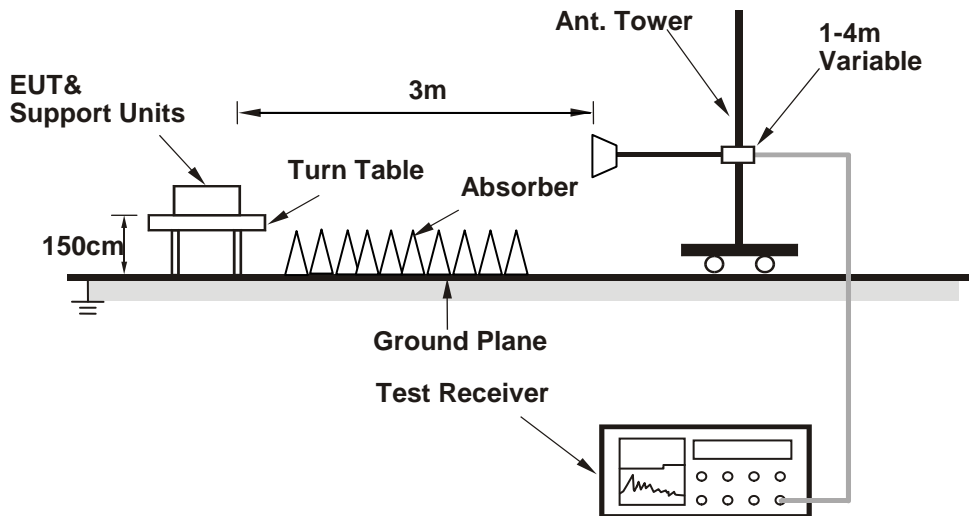

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

1. Connect the EUT with the support units B & C (NOTEBOOK COMPUTER) which is placed on remote site.
2. Controlling software (MP_TEST.exe (RTL819x 3.0)) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11b

| | | | |
|------------------------|--------------|------------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 2390.00 | 50.2 PK | 74.0 | -23.8 | 1.52 H | 12 | 53.09 | -2.89 |
| 2 | 2390.00 | 37.7 AV | 54.0 | -16.3 | 1.52 H | 12 | 40.59 | -2.89 |
| 3 | *2412.00 | 100.5 PK | | | 1.52 H | 12 | 103.35 | -2.85 |
| 4 | *2412.00 | 96.3 AV | | | 1.52 H | 12 | 99.15 | -2.85 |
| 5 | 2499.00 | 51.6 PK | 74.0 | -22.4 | 1.48 H | 7 | 54.23 | -2.63 |
| 6 | 2499.00 | 41.0 AV | 54.0 | -13.0 | 1.48 H | 7 | 43.63 | -2.63 |
| 7 | 4824.00 | 57.9 PK | 74.0 | -16.1 | 1.91 H | 154 | 51.68 | 6.22 |
| 8 | 4824.00 | 53.8 AV | 54.0 | -0.2 | 1.91 H | 154 | 47.58 | 6.22 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 2390.00 | 58.6 PK | 74.0 | -15.4 | 1.36 V | 120 | 61.49 | -2.89 |
| 2 | 2390.00 | 46.2 AV | 54.0 | -7.8 | 1.36 V | 120 | 49.09 | -2.89 |
| 3 | *2412.00 | 109.1 PK | | | 1.36 V | 120 | 111.95 | -2.85 |
| 4 | *2412.00 | 106.2 AV | | | 1.36 V | 120 | 109.05 | -2.85 |
| 5 | 2499.00 | 57.7 PK | 74.0 | -16.3 | 1.21 V | 120 | 60.33 | -2.63 |
| 6 | 2499.00 | 51.1 AV | 54.0 | -2.9 | 1.21 V | 120 | 53.73 | -2.63 |
| 7 | 4824.00 | 53.8 PK | 74.0 | -20.2 | 1.68 V | 231 | 47.58 | 6.22 |
| 8 | 4824.00 | 45.3 AV | 54.0 | -8.7 | 1.68 V | 231 | 39.08 | 6.22 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2437.00 | 99.6 PK | | | 1.54 H | 23 | 102.39 | -2.79 |
| 2 | *2437.00 | 95.1 AV | | | 1.54 H | 23 | 97.89 | -2.79 |
| 3 | 4874.00 | 57.8 PK | 74.0 | -16.2 | 1.20 H | 153 | 51.54 | 6.26 |
| 4 | 4874.00 | 53.8 AV | 54.0 | -0.2 | 1.20 H | 153 | 47.54 | 6.26 |
| 5 | 7311.00 | 60.4 PK | 74.0 | -13.6 | 1.36 H | 300 | 49.20 | 11.20 |
| 6 | 7311.00 | 46.9 AV | 54.0 | -7.1 | 1.36 H | 300 | 35.70 | 11.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2437.00 | 108.3 PK | | | 1.61 V | 69 | 111.09 | -2.79 |
| 2 | *2437.00 | 105.3 AV | | | 1.61 V | 69 | 108.09 | -2.79 |
| 3 | 4874.00 | 53.5 PK | 74.0 | -20.5 | 1.76 V | 225 | 47.24 | 6.26 |
| 4 | 4874.00 | 45.0 AV | 54.0 | -9.0 | 1.76 V | 225 | 38.74 | 6.26 |
| 5 | 7311.00 | 59.7 PK | 74.0 | -14.3 | 1.57 V | 204 | 48.50 | 11.20 |
| 6 | 7311.00 | 46.4 AV | 54.0 | -7.6 | 1.57 V | 204 | 35.20 | 11.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|---------------|------------------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *2462.00 | 100.6 PK | | | 1.26 H | 11 | 103.32 | -2.72 |
| 2 | *2462.00 | 96.2 AV | | | 1.26 H | 11 | 98.92 | -2.72 |
| 3 | 2483.50 | 51.3 PK | 74.0 | -22.7 | 1.26 H | 11 | 53.97 | -2.67 |
| 4 | 2483.50 | 38.8 AV | 54.0 | -15.2 | 1.26 H | 11 | 41.47 | -2.67 |
| 5 | 2499.00 | 50.9 PK | 74.0 | -23.1 | 1.49 H | 330 | 53.53 | -2.63 |
| 6 | 2499.00 | 40.4 AV | 54.0 | -13.6 | 1.49 H | 330 | 43.03 | -2.63 |
| 7 | 4924.00 | 57.6 PK | 74.0 | -16.4 | 1.16 H | 134 | 51.35 | 6.25 |
| 8 | 4924.00 | 53.5 AV | 54.0 | -0.5 | 1.16 H | 134 | 47.25 | 6.25 |
| 9 | 7386.00 | 60.1 PK | 74.0 | -13.9 | 1.32 H | 306 | 48.49 | 11.61 |
| 10 | 7386.00 | 46.8 AV | 54.0 | -7.2 | 1.32 H | 306 | 35.19 | 11.61 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *2462.00 | 108.7 PK | | | 1.18 V | 116 | 111.42 | -2.72 |
| 2 | *2462.00 | 105.9 AV | | | 1.18 V | 116 | 108.62 | -2.72 |
| 3 | 2483.50 | 60.2 PK | 74.0 | -13.8 | 1.18 V | 116 | 62.87 | -2.67 |
| 4 | 2483.50 | 47.6 AV | 54.0 | -6.4 | 1.18 V | 116 | 50.27 | -2.67 |
| 5 | 4924.00 | 53.7 PK | 74.0 | -20.3 | 1.73 V | 232 | 47.45 | 6.25 |
| 6 | 4924.00 | 45.3 AV | 54.0 | -8.7 | 1.73 V | 232 | 39.05 | 6.25 |
| 7 | 7386.00 | 59.6 PK | 74.0 | -14.4 | 1.52 V | 218 | 47.99 | 11.61 |
| 8 | 7386.00 | 46.6 AV | 54.0 | -7.4 | 1.52 V | 218 | 34.99 | 11.61 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

| | | | |
|------------------------|--------------|------------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|--|------------------------|--|---------------------------|------------------------|-----------------------------------|-------------------------------------|---------------------------------|---|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 55.2 PK | 74.0 | -18.8 | 1.51 H | 25 | 58.09 | -2.89 |
| 2 | 2390.00 | 44.9 AV | 54.0 | -9.1 | 1.51 H | 25 | 47.79 | -2.89 |
| 3 | *2412.00 | 100.2 PK | | | 1.50 H | 29 | 103.05 | -2.85 |
| 4 | *2412.00 | 91.4 AV | | | 1.50 H | 29 | 94.25 | -2.85 |
| 5 | 4824.00 | 51.3 PK | 74.0 | -22.7 | 1.10 H | 112 | 45.08 | 6.22 |
| 6 | 4824.00 | 46.4 AV | 54.0 | -7.6 | 1.10 H | 112 | 40.18 | 6.22 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 70.2 PK | 74.0 | -3.8 | 1.37 V | 120 | 73.09 | -2.89 |
| 2 | 2390.00 | 53.2 AV | 54.0 | -0.8 | 1.37 V | 120 | 56.09 | -2.89 |
| 3 | *2412.00 | 110.6 PK | | | 1.37 V | 120 | 113.45 | -2.85 |
| 4 | *2412.00 | 101.2 AV | | | 1.37 V | 120 | 104.05 | -2.85 |
| 5 | 4824.00 | 47.6 PK | 74.0 | -26.4 | 1.52 V | 199 | 41.38 | 6.22 |
| 6 | 4824.00 | 41.2 AV | 54.0 | -12.8 | 1.52 V | 199 | 34.98 | 6.22 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 50.9 PK | 74.0 | -23.1 | 1.57 H | 36 | 53.79 | -2.89 |
| 2 | 2390.00 | 40.3 AV | 54.0 | -13.7 | 1.57 H | 36 | 43.19 | -2.89 |
| 3 | *2437.00 | 106.7 PK | | | 1.59 H | 8 | 109.49 | -2.79 |
| 4 | *2437.00 | 96.4 AV | | | 1.59 H | 8 | 99.19 | -2.79 |
| 5 | 2483.50 | 49.7 PK | 74.0 | -24.3 | 1.58 H | 0 | 52.37 | -2.67 |
| 6 | 2483.50 | 37.1 AV | 54.0 | -16.9 | 1.58 H | 0 | 39.77 | -2.67 |
| 7 | 4874.00 | 64.4 PK | 74.0 | -9.6 | 1.10 H | 115 | 58.14 | 6.26 |
| 8 | 4874.00 | 53.5 AV | 54.0 | -0.5 | 1.10 H | 115 | 47.24 | 6.26 |
| 9 | 7311.00 | 59.9 PK | 74.0 | -14.1 | 1.35 H | 290 | 48.70 | 11.20 |
| 10 | 7311.00 | 46.4 AV | 54.0 | -7.6 | 1.35 H | 290 | 35.20 | 11.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 66.3 PK | 74.0 | -7.7 | 1.46 V | 68 | 69.19 | -2.89 |
| 2 | 2390.00 | 50.0 AV | 54.0 | -4.0 | 1.46 V | 68 | 52.89 | -2.89 |
| 3 | *2437.00 | 116.2 PK | | | 1.46 V | 68 | 118.99 | -2.79 |
| 4 | *2437.00 | 106.8 AV | | | 1.46 V | 68 | 109.59 | -2.79 |
| 5 | 2483.50 | 67.1 PK | 74.0 | -6.9 | 1.46 V | 68 | 69.77 | -2.67 |
| 6 | 2483.50 | 49.8 AV | 54.0 | -4.2 | 1.46 V | 68 | 52.47 | -2.67 |
| 7 | 4874.00 | 53.4 PK | 74.0 | -20.6 | 1.70 V | 237 | 47.14 | 6.26 |
| 8 | 4874.00 | 44.9 AV | 54.0 | -9.1 | 1.70 V | 237 | 38.64 | 6.26 |
| 9 | 7311.00 | 59.5 PK | 74.0 | -14.5 | 1.49 V | 203 | 48.30 | 11.20 |
| 10 | 7311.00 | 46.5 AV | 54.0 | -7.5 | 1.49 V | 203 | 35.30 | 11.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 100.6 PK | | | 1.55 H | 10 | 103.32 | -2.72 |
| 2 | *2462.00 | 91.8 AV | | | 1.55 H | 10 | 94.52 | -2.72 |
| 3 | 2483.50 | 54.5 PK | 74.0 | -19.5 | 1.56 H | 8 | 57.17 | -2.67 |
| 4 | 2483.50 | 43.9 AV | 54.0 | -10.1 | 1.56 H | 8 | 46.57 | -2.67 |
| 5 | 4924.00 | 50.5 PK | 74.0 | -23.5 | 1.11 H | 126 | 44.25 | 6.25 |
| 6 | 4924.00 | 45.6 AV | 54.0 | -8.4 | 1.11 H | 126 | 39.35 | 6.25 |
| 7 | 7386.00 | 59.6 PK | 74.0 | -14.4 | 1.31 H | 288 | 47.99 | 11.61 |
| 8 | 7386.00 | 46.6 AV | 54.0 | -7.4 | 1.31 H | 288 | 34.99 | 11.61 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 111.2 PK | | | 1.51 V | 114 | 113.92 | -2.72 |
| 2 | *2462.00 | 101.7 AV | | | 1.51 V | 114 | 104.42 | -2.72 |
| 3 | 2483.50 | 72.0 PK | 74.0 | -2.0 | 1.55 V | 114 | 74.67 | -2.67 |
| 4 | 2483.50 | 53.5 AV | 54.0 | -0.5 | 1.55 V | 114 | 56.17 | -2.67 |
| 5 | 4924.00 | 47.6 PK | 74.0 | -26.4 | 1.68 V | 218 | 41.35 | 6.25 |
| 6 | 4924.00 | 41.2 AV | 54.0 | -12.8 | 1.68 V | 218 | 34.95 | 6.25 |
| 7 | 7386.00 | 59.8 PK | 74.0 | -14.2 | 1.52 V | 208 | 48.19 | 11.61 |
| 8 | 7386.00 | 46.9 AV | 54.0 | -7.1 | 1.52 V | 208 | 35.29 | 11.61 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

| | | | |
|------------------------|--------------|------------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 2390.00 | 54.4 PK | 74.0 | -19.6 | 1.46 H | 17 | 57.29 | -2.89 |
| 2 | 2390.00 | 44.2 AV | 54.0 | -9.8 | 1.46 H | 17 | 47.09 | -2.89 |
| 3 | *2412.00 | 99.7 PK | | | 1.56 H | 30 | 102.55 | -2.85 |
| 4 | *2412.00 | 91.1 AV | | | 1.56 H | 30 | 93.95 | -2.85 |
| 5 | 4824.00 | 63.4 PK | 74.0 | -10.6 | 1.72 H | 151 | 57.18 | 6.22 |
| 6 | 4824.00 | 53.5 AV | 54.0 | -0.5 | 1.72 H | 151 | 47.28 | 6.22 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 2390.00 | 67.0 PK | 74.0 | -7.0 | 1.67 V | 337 | 69.89 | -2.89 |
| 2 | 2390.00 | 53.1 AV | 54.0 | -0.9 | 1.67 V | 337 | 55.99 | -2.89 |
| 3 | *2412.00 | 113.1 PK | | | 1.67 V | 337 | 115.95 | -2.85 |
| 4 | *2412.00 | 102.3 AV | | | 1.67 V | 337 | 105.15 | -2.85 |
| 5 | 4824.00 | 47.6 PK | 74.0 | -26.4 | 1.61 V | 217 | 41.38 | 6.22 |
| 6 | 4824.00 | 41.4 AV | 54.0 | -12.6 | 1.61 V | 217 | 35.18 | 6.22 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2437.00 | 106.8 PK | | | 1.50 H | 15 | 109.59 | -2.79 |
| 2 | *2437.00 | 96.9 AV | | | 1.50 H | 15 | 99.69 | -2.79 |
| 3 | 4874.00 | 64.9 PK | 74.0 | -9.1 | 1.20 H | 122 | 58.64 | 6.26 |
| 4 | 4874.00 | 53.8 AV | 54.0 | -0.2 | 1.20 H | 122 | 47.54 | 6.26 |
| 5 | 7311.00 | 60.5 PK | 74.0 | -13.5 | 1.27 H | 287 | 49.30 | 11.20 |
| 6 | 7311.00 | 46.2 AV | 54.0 | -7.8 | 1.27 H | 287 | 35.00 | 11.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2437.00 | 116.0 PK | | | 1.62 V | 322 | 118.79 | -2.79 |
| 2 | *2437.00 | 107.0 AV | | | 1.62 V | 322 | 109.79 | -2.79 |
| 3 | 4874.00 | 53.3 PK | 74.0 | -20.7 | 1.79 V | 221 | 47.04 | 6.26 |
| 4 | 4874.00 | 45.2 AV | 54.0 | -8.8 | 1.79 V | 221 | 38.94 | 6.26 |
| 5 | 7311.00 | 58.9 PK | 74.0 | -15.1 | 1.43 V | 209 | 47.70 | 11.20 |
| 6 | 7311.00 | 46.3 AV | 54.0 | -7.7 | 1.43 V | 209 | 35.10 | 11.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 100.0 PK | | | 1.58 H | 3 | 102.72 | -2.72 |
| 2 | *2462.00 | 91.5 AV | | | 1.58 H | 3 | 94.22 | -2.72 |
| 3 | 2483.50 | 53.8 PK | 74.0 | -20.2 | 1.59 H | 12 | 56.47 | -2.67 |
| 4 | 2483.50 | 47.0 AV | 54.0 | -7.0 | 1.59 H | 12 | 49.67 | -2.67 |
| 5 | 4924.00 | 64.1 PK | 74.0 | -9.9 | 1.18 H | 112 | 57.85 | 6.25 |
| 6 | 4924.00 | 53.5 AV | 54.0 | -0.5 | 1.18 H | 112 | 47.25 | 6.25 |
| 7 | 7386.00 | 59.9 PK | 74.0 | -14.1 | 1.28 H | 293 | 48.29 | 11.61 |
| 8 | 7386.00 | 46.6 AV | 54.0 | -7.4 | 1.28 H | 293 | 34.99 | 11.61 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 114.1 PK | | | 1.66 V | 336 | 116.82 | -2.72 |
| 2 | *2462.00 | 102.8 AV | | | 1.66 V | 336 | 105.52 | -2.72 |
| 3 | 2483.50 | 68.1 PK | 74.0 | -5.9 | 1.66 V | 336 | 70.77 | -2.67 |
| 4 | 2483.50 | 53.2 AV | 54.0 | -0.8 | 1.66 V | 336 | 55.87 | -2.67 |
| 5 | 4924.00 | 47.9 PK | 74.0 | -26.1 | 1.68 V | 236 | 41.65 | 6.25 |
| 6 | 4924.00 | 41.5 AV | 54.0 | -12.5 | 1.68 V | 236 | 35.25 | 6.25 |
| 7 | 7386.00 | 59.9 PK | 74.0 | -14.1 | 1.47 V | 231 | 48.29 | 11.61 |
| 8 | 7386.00 | 47.0 AV | 54.0 | -7.0 | 1.47 V | 231 | 35.39 | 11.61 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

| | | | |
|------------------------|--------------|------------------------------|--------------|
| CHANNEL | TX Channel 3 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 2390.00 | 53.8 PK | 74.0 | -20.2 | 1.59 H | 16 | 56.69 | -2.89 |
| 2 | 2390.00 | 47.0 AV | 54.0 | -7.0 | 1.59 H | 16 | 49.89 | -2.89 |
| 3 | *2422.00 | 99.6 PK | | | 1.51 H | 14 | 102.43 | -2.83 |
| 4 | *2422.00 | 88.1 AV | | | 1.51 H | 14 | 90.93 | -2.83 |
| 5 | 4844.00 | 48.2 PK | 74.0 | -25.8 | 1.17 H | 139 | 41.97 | 6.23 |
| 6 | 4844.00 | 43.8 AV | 54.0 | -10.2 | 1.17 H | 139 | 37.57 | 6.23 |
| 7 | 7266.00 | 59.8 PK | 74.0 | -14.2 | 1.22 H | 320 | 48.62 | 11.18 |
| 8 | 7266.00 | 46.8 AV | 54.0 | -7.2 | 1.22 H | 320 | 35.62 | 11.18 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|----------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 2390.00 | 66.9 PK | 74.0 | -7.1 | 1.67 V | 273 | 69.79 | -2.89 |
| 2 | 2390.00 | 53.9 AV | 54.0 | -0.1 | 1.67 V | 273 | 56.79 | -2.89 |
| 3 | *2422.00 | 109.5 PK | | | 1.67 V | 273 | 112.33 | -2.83 |
| 4 | *2422.00 | 98.3 AV | | | 1.67 V | 273 | 101.13 | -2.83 |
| 5 | 4844.00 | 48.6 PK | 74.0 | -25.4 | 1.74 V | 237 | 42.37 | 6.23 |
| 6 | 4844.00 | 41.9 AV | 54.0 | -12.1 | 1.74 V | 237 | 35.67 | 6.23 |
| 7 | 7266.00 | 59.6 PK | 74.0 | -14.4 | 1.55 V | 213 | 48.42 | 11.18 |
| 8 | 7266.00 | 46.6 AV | 54.0 | -7.4 | 1.55 V | 213 | 35.42 | 11.18 |

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 53.8 PK | 74.0 | -20.2 | 1.46 H | 33 | 56.69 | -2.89 |
| 2 | 2390.00 | 46.8 AV | 54.0 | -7.2 | 1.46 H | 33 | 49.69 | -2.89 |
| 3 | *2437.00 | 101.2 PK | | | 1.56 H | 0 | 103.99 | -2.79 |
| 4 | *2437.00 | 90.1 AV | | | 1.56 H | 0 | 92.89 | -2.79 |
| 5 | 2483.50 | 52.6 PK | 74.0 | -21.4 | 1.49 H | 0 | 55.27 | -2.67 |
| 6 | 2483.50 | 45.9 AV | 54.0 | -8.1 | 1.49 H | 0 | 48.57 | -2.67 |
| 7 | 4874.00 | 48.2 PK | 74.0 | -25.8 | 1.21 H | 135 | 41.94 | 6.26 |
| 8 | 4874.00 | 43.7 AV | 54.0 | -10.3 | 1.21 H | 135 | 37.44 | 6.26 |
| 9 | 7311.00 | 60.7 PK | 74.0 | -13.3 | 1.30 H | 308 | 49.50 | 11.20 |
| 10 | 7311.00 | 46.3 AV | 54.0 | -7.7 | 1.30 H | 308 | 35.10 | 11.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 70.3 PK | 74.0 | -3.7 | 1.63 V | 274 | 73.19 | -2.89 |
| 2 | 2390.00 | 53.9 AV | 54.0 | -0.1 | 1.63 V | 274 | 56.79 | -2.89 |
| 3 | *2437.00 | 111.7 PK | | | 1.63 V | 274 | 114.49 | -2.79 |
| 4 | *2437.00 | 100.8 AV | | | 1.63 V | 274 | 103.59 | -2.79 |
| 5 | 2483.50 | 66.3 PK | 74.0 | -7.7 | 1.63 V | 274 | 68.97 | -2.67 |
| 6 | 2483.50 | 51.1 AV | 54.0 | -2.9 | 1.63 V | 274 | 53.77 | -2.67 |
| 7 | 4874.00 | 47.7 PK | 74.0 | -26.3 | 1.73 V | 222 | 41.44 | 6.26 |
| 8 | 4874.00 | 41.6 AV | 54.0 | -12.4 | 1.73 V | 222 | 35.34 | 6.26 |
| 9 | 7311.00 | 59.8 PK | 74.0 | -14.2 | 1.53 V | 227 | 48.60 | 11.20 |
| 10 | 7311.00 | 46.8 AV | 54.0 | -7.2 | 1.53 V | 227 | 35.60 | 11.20 |

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.



| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 9 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2452.00 | 98.5 PK | | | 1.55 H | 334 | 101.25 | -2.75 |
| 2 | *2452.00 | 87.6 AV | | | 1.55 H | 334 | 90.35 | -2.75 |
| 3 | 2483.50 | 53.7 PK | 74.0 | -20.3 | 1.55 H | 334 | 56.37 | -2.67 |
| 4 | 2483.50 | 47.0 AV | 54.0 | -7.0 | 1.55 H | 334 | 49.67 | -2.67 |
| 5 | 4904.00 | 47.7 PK | 74.0 | -26.3 | 1.13 H | 99 | 41.42 | 6.28 |
| 6 | 4904.00 | 43.5 AV | 54.0 | -10.5 | 1.13 H | 99 | 37.22 | 6.28 |
| 7 | 7356.00 | 60.4 PK | 74.0 | -13.6 | 1.33 H | 292 | 48.95 | 11.45 |
| 8 | 7356.00 | 46.6 AV | 54.0 | -7.4 | 1.33 H | 292 | 35.15 | 11.45 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2452.00 | 109.8 PK | | | 1.56 V | 272 | 112.55 | -2.75 |
| 2 | *2452.00 | 98.8 AV | | | 1.56 V | 272 | 101.55 | -2.75 |
| 3 | 2483.50 | 70.3 PK | 74.0 | -3.7 | 1.56 V | 272 | 72.97 | -2.67 |
| 4 | 2483.50 | 53.8 AV | 54.0 | -0.2 | 1.56 V | 272 | 56.47 | -2.67 |
| 5 | 4904.00 | 47.2 PK | 74.0 | -26.8 | 1.69 V | 202 | 40.92 | 6.28 |
| 6 | 4904.00 | 41.1 AV | 54.0 | -12.9 | 1.69 V | 202 | 34.82 | 6.28 |
| 7 | 7356.00 | 60.3 PK | 74.0 | -13.7 | 1.51 V | 227 | 48.85 | 11.45 |
| 8 | 7356.00 | 47.4 AV | 54.0 | -6.6 | 1.51 V | 227 | 35.95 | 11.45 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:
802.11n (HT20)

| | | | |
|------------------------|---------------|--------------------------|-----------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | Below 1GHz | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 58.71 | 33.3 QP | 40.0 | -6.8 | 1.50 H | 247 | 46.80 | -13.55 |
| 2 | 101.93 | 33.2 QP | 43.5 | -10.3 | 2.00 H | 82 | 50.50 | -17.34 |
| 3 | 143.30 | 36.0 QP | 43.5 | -7.5 | 2.00 H | 271 | 49.21 | -13.17 |
| 4 | 310.48 | 31.5 QP | 46.0 | -14.5 | 1.50 H | 285 | 43.18 | -11.72 |
| 5 | 437.50 | 34.0 QP | 46.0 | -12.0 | 2.00 H | 35 | 41.95 | -7.99 |
| 6 | 500.01 | 37.9 QP | 46.0 | -8.1 | 2.00 H | 50 | 44.77 | -6.83 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 47.80 | 34.9 QP | 40.0 | -5.1 | 1.00 V | 18 | 47.94 | -13.04 |
| 2 | 80.00 | 30.4 QP | 40.0 | -9.6 | 2.00 V | 210 | 48.09 | -17.73 |
| 3 | 87.62 | 36.1 QP | 40.0 | -3.9 | 1.50 V | 204 | 54.86 | -18.76 |
| 4 | 101.88 | 32.9 QP | 43.5 | -10.6 | 1.50 V | 360 | 50.22 | -17.34 |
| 5 | 143.30 | 34.2 QP | 43.5 | -9.3 | 1.00 V | 242 | 47.41 | -13.17 |
| 6 | 833.45 | 40.9 QP | 46.0 | -5.1 | 2.00 V | 302 | 41.05 | -0.16 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|-----------------------------|------------|-----------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS 30 | 100375 | Apr. 29, 2014 | Apr. 28, 2015 |
| Line-Impedance Stabilization Network (for EUT) SCHWARZBECK | NSLK-8127 | 8127-522 | Sep. 15, 2014 | Sep. 14, 2015 |
| Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ | ENV216 | 100071 | Nov. 10, 2014 | Nov. 09, 2015 |
| RF Cable (JYEBAO) | 5D-FB | COCCAB-001 | Mar. 09, 2015 | Mar. 08, 2016 |
| 50 ohms Terminator | N/A | EMC-03 | Sep. 22, 2014 | Sep. 21, 2015 |
| 50 ohms Terminator | N/A | EMC-02 | Sep. 30, 2014 | Sep. 29, 2015 |
| Software ADT | BV ADT_Cond_V7.3.7. 3 | NA | NA | NA |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Apr. 22, 2015

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

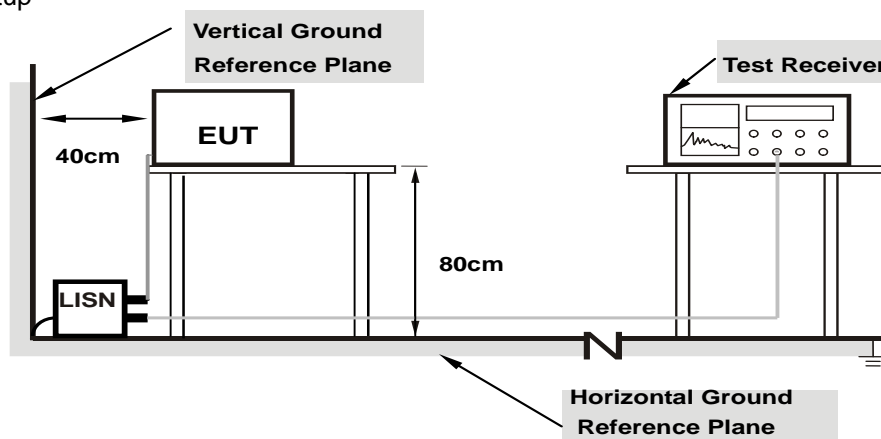

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| No | Freq. [MHz] | Corr. | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | Factor | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | |
| 1 | 0.15000 | 0.08 | 51.67 | 37.42 | 51.75 | 37.50 | 66.00 | 56.00 | -14.25 | -18.50 |
| 2 | 0.17734 | 0.09 | 46.44 | 33.42 | 46.53 | 33.51 | 64.61 | 54.61 | -18.08 | -21.10 |
| 3 | 0.28281 | 0.09 | 35.39 | 24.05 | 35.48 | 24.14 | 60.73 | 50.73 | -25.25 | -26.59 |
| 4 | 0.75156 | 0.12 | 18.10 | 13.15 | 18.22 | 13.27 | 56.00 | 46.00 | -37.78 | -32.73 |
| 5 | 13.58984 | 0.54 | 23.47 | 19.03 | 24.01 | 19.57 | 60.00 | 50.00 | -35.99 | -30.43 |
| 6 | 23.62500 | 0.78 | 30.42 | 26.25 | 31.20 | 27.03 | 60.00 | 50.00 | -28.80 | -22.97 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

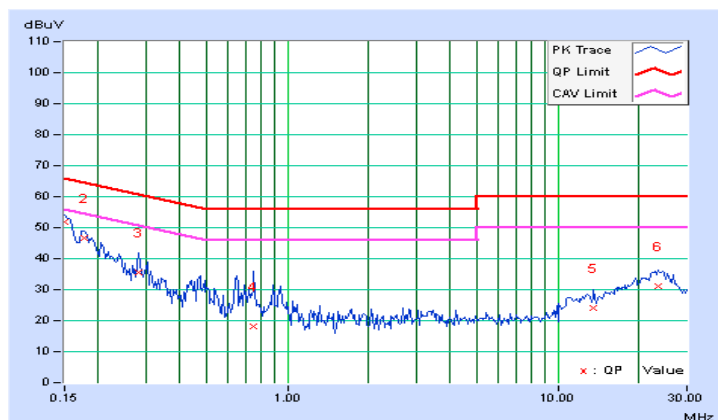


| | | | |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| No | Freq. [MHz] | Corr. | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | Factor | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15000 | 0.08 | 53.92 | 40.45 | 54.00 | 40.53 | 66.00 | 56.00 | -12.00 | -15.47 |
| 2 | 0.20469 | 0.08 | 43.70 | 29.31 | 43.78 | 29.39 | 63.42 | 53.42 | -19.64 | -24.03 |
| 3 | 0.29063 | 0.09 | 37.04 | 26.58 | 37.13 | 26.67 | 60.51 | 50.51 | -23.38 | -23.84 |
| 4 | 0.91172 | 0.13 | 21.21 | 16.78 | 21.34 | 16.91 | 56.00 | 46.00 | -34.66 | -29.09 |
| 5 | 14.36328 | 0.58 | 25.01 | 20.52 | 25.59 | 21.10 | 60.00 | 50.00 | -34.41 | -28.90 |
| 6 | 25.23047 | 0.87 | 33.71 | 29.44 | 34.58 | 30.31 | 60.00 | 50.00 | -25.42 | -19.69 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

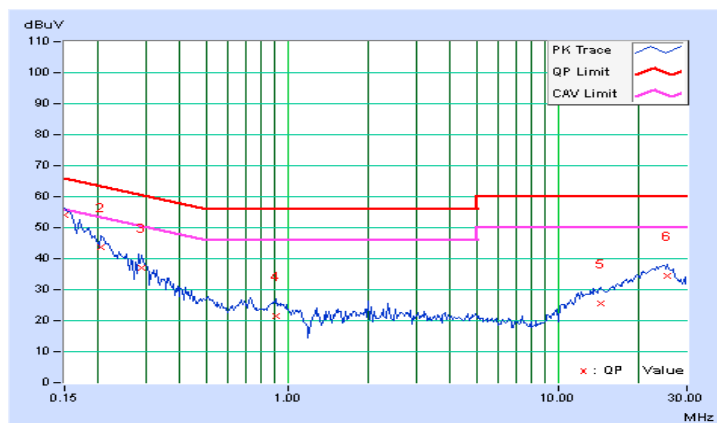


4.2.8 Test Results (Mode 2)

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| No | Freq. [MHz] | Corr. Factor | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-----------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | 1 | 0.16562 | 0.08 | 37.49 | 30.10 | 37.57 | 30.18 | 65.18 | 55.18 | -27.60 |
| 2 | 0.26328 | 0.09 | 40.47 | 37.54 | 40.56 | 37.63 | 61.33 | 51.33 | -20.76 | -13.69 |
| 3 | 0.77500 | 0.12 | 26.60 | 20.49 | 26.72 | 20.61 | 56.00 | 46.00 | -29.28 | -25.39 |
| 4 | 3.61719 | 0.21 | 28.00 | 20.55 | 28.21 | 20.76 | 56.00 | 46.00 | -27.79 | -25.24 |
| 5 | 7.57031 | 0.36 | 26.54 | 22.05 | 26.90 | 22.41 | 60.00 | 50.00 | -33.10 | -27.59 |
| 6 | 22.70313 | 0.76 | 27.96 | 21.07 | 28.72 | 21.83 | 60.00 | 50.00 | -31.28 | -28.17 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

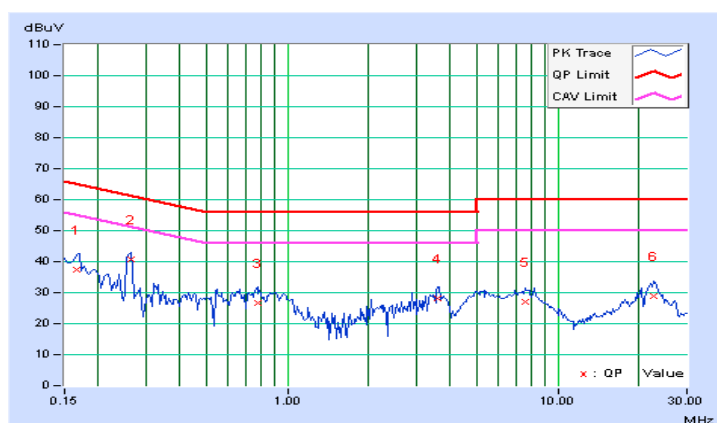


| | | | |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| No | Freq. [MHz] | Corr. | Reading Value | | Emission Level | | Limit | | Margin | |
|----------|----------------|-------------|---------------|--------------|----------------|--------------|--------------|--------------|---------------|--------------|
| | | Factor | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | |
| 1 | 0.15000 | 0.08 | 40.55 | 31.86 | 40.63 | 31.94 | 66.00 | 56.00 | -25.37 | -24.06 |
| 2 | 0.25938 | 0.09 | 42.13 | 41.58 | 42.22 | 41.67 | 61.45 | 51.45 | -19.24 | -9.79 |
| 3 | 0.90781 | 0.13 | 26.23 | 22.12 | 26.36 | 22.25 | 56.00 | 46.00 | -29.64 | -23.75 |
| 4 | 3.46484 | 0.21 | 28.02 | 20.99 | 28.23 | 21.20 | 56.00 | 46.00 | -27.77 | -24.80 |
| 5 | 8.16797 | 0.39 | 25.73 | 21.52 | 26.12 | 21.91 | 60.00 | 50.00 | -33.88 | -28.09 |
| 6 | 22.78906 | 0.81 | 27.81 | 21.00 | 28.62 | 21.81 | 60.00 | 50.00 | -31.38 | -28.19 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

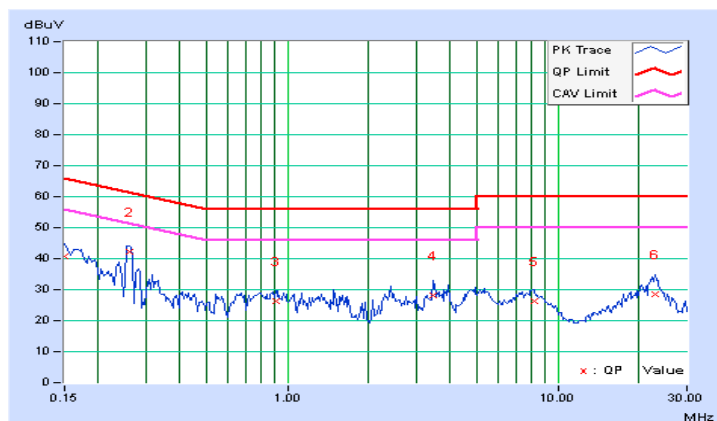


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------------------|-------------|
| 1 | 2412 | 10.12 | 0.5 | Pass |
| 6 | 2437 | 10.11 | 0.5 | Pass |
| 11 | 2462 | 10.12 | 0.5 | Pass |

802.11g





| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------------------|-------------|
| 1 | 2412 | 16.64 | 0.5 | Pass |
| 6 | 2437 | 16.62 | 0.5 | Pass |
| 11 | 2462 | 16.64 | 0.5 | Pass |

802.11n (HT20)

| Channel | Frequency (MHz) | 6db Bandwidth (MHz) | | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------------------|-------------|
| | | Chain 0 | Chain 1 | | |
| 1 | 2412 | 17.89 | 17.88 | 0.5 | Pass |
| 6 | 2437 | 17.87 | 17.86 | 0.5 | Pass |
| 11 | 2462 | 17.88 | 17.88 | 0.5 | Pass |

802.11n (HT40)

| Channel | Frequency (MHz) | 6db Bandwidth (MHz) | | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------------------|-------------|
| | | Chain 0 | Chain 1 | | |
| 3 | 2422 | 36.57 | 36.57 | 0.5 | Pass |
| 6 | 2437 | 36.56 | 36.57 | 0.5 | Pass |
| 9 | 2452 | 36.56 | 36.56 | 0.5 | Pass |

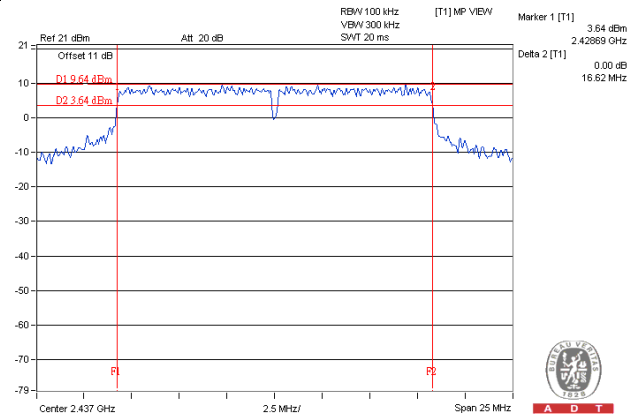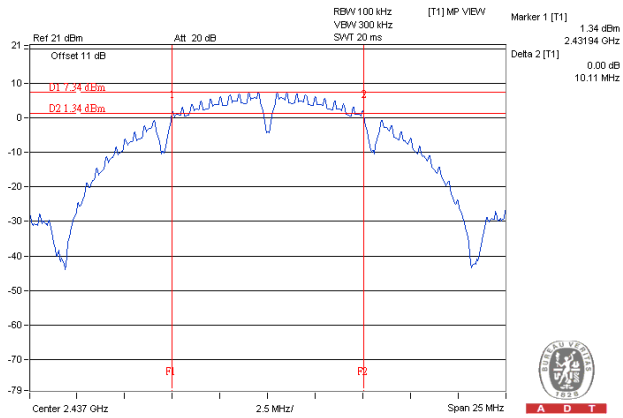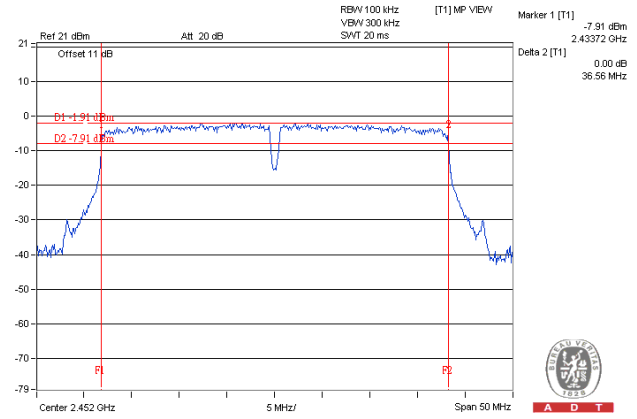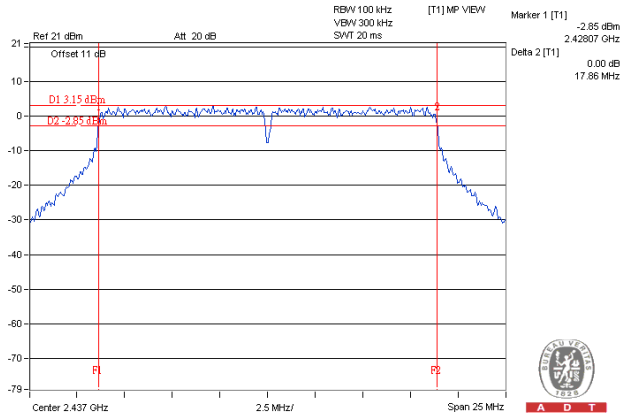Spectrum Plot of Worst Value**802.11b – CH6****802.11g – CH6****802.11n (HT20) – Chain 1: CH6****802.11n (HT40) – Chain 0: CH9**

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass/Fail |
|---------|-----------------|-----------------|------------------|-------------|-----------|
| 1 | 2412 | 130.918 | 21.17 | 30 | Pass |
| 6 | 2437 | 94.842 | 19.77 | 30 | Pass |
| 11 | 2462 | 113.763 | 20.56 | 30 | Pass |

802.11g

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass/Fail |
|---------|-----------------|-----------------|------------------|-------------|-----------|
| 1 | 2412 | 515.229 | 27.12 | 30 | Pass |
| 6 | 2437 | 677.642 | 28.31 | 30 | Pass |
| 11 | 2462 | 543.25 | 27.35 | 30 | Pass |

802.11n (HT20)

| Chan. | Freq. (MHz) | Peak Power (dBm) | | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------|------------------|---------|------------------|-------------------|-------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 1 | 2412 | 26.50 | 26.21 | 864.514 | 29.37 | 30 | Pass |
| 6 | 2437 | 25.10 | 26.08 | 729.103 | 28.63 | 30 | Pass |
| 11 | 2462 | 26.52 | 26.82 | 929.584 | 29.68 | 30 | Pass |

802.11n (HT40)

| Chan. | Freq. (MHz) | Peak Power (dBm) | | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------|------------------|---------|------------------|-------------------|-------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 3 | 2422 | 24.27 | 24.48 | 547.844 | 27.39 | 30 | Pass |
| 6 | 2437 | 25.63 | 25.79 | 744.91 | 28.72 | 30 | Pass |
| 9 | 2452 | 24.83 | 25.05 | 623.979 | 27.95 | 30 | Pass |

FOR AVERAGE POWER
802.11b

| Channel | Frequency (MHz) | Average Power (mW) | Average Power (dBm) |
|---------|-----------------|--------------------|---------------------|
| 1 | 2412 | 79.799 | 19.02 |
| 6 | 2437 | 58.076 | 17.64 |
| 11 | 2462 | 69.343 | 18.41 |

802.11g

| Channel | Frequency (MHz) | Average Power (mW) | Average Power (dBm) |
|---------|-----------------|--------------------|---------------------|
| 1 | 2412 | 89.950 | 19.54 |
| 6 | 2437 | 278.612 | 24.45 |
| 11 | 2462 | 101.625 | 20.07 |

802.11n (HT20)

| Chan. | Frequency (MHz) | Avg. Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|-------|-----------------|------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 1 | 2412 | 18.71 | 18.41 | 143.645 | 21.57 |
| 6 | 2437 | 18.00 | 18.14 | 128.259 | 21.08 |
| 11 | 2462 | 19.48 | 19.69 | 181.827 | 22.60 |

802.11n (HT40)


| Chan. | Frequency (MHz) | Avg. Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|-------|-----------------|------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 3 | 2422 | 15.27 | 15.65 | 70.379 | 18.47 |
| 6 | 2437 | 17.93 | 17.62 | 119.897 | 20.79 |
| 9 | 2452 | 16.34 | 16.40 | 86.705 | 19.38 |

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

| Channel | Freq. (MHz) | PSD (dBm) | Limit (dBm) | Pass /Fail |
|---------|-------------|-----------|-------------|------------|
| 1 | 2412 | -12.08 | 8 | Pass |
| 6 | 2437 | -12.79 | 8 | Pass |
| 11 | 2462 | -13.06 | 8 | Pass |

802.11g





| Channel | Freq. (MHz) | PSD (dBm) | Limit (dBm) | Pass /Fail |
|---------|-------------|-----------|-------------|------------|
| 1 | 2412 | -10.29 | 8 | Pass |
| 6 | 2437 | -5.15 | 8 | Pass |
| 11 | 2462 | -10.00 | 8 | Pass |

802.11n (HT20)

| TX chain | Channel | Freq. (MHz) | PSD (dBm) | 10 log (N=2) dB | Total PSD (dBm) | Limit (dBm) | Pass /Fail |
|----------|---------|-------------|-----------|-----------------|-----------------|-------------|------------|
| 0 | 1 | 2412 | -10.46 | 3.01 | -7.45 | 8 | Pass |
| | 6 | 2437 | -10.94 | 3.01 | -7.93 | 8 | Pass |
| | 11 | 2462 | -10.01 | 3.01 | -7.00 | 8 | Pass |
| 1 | 1 | 2412 | -10.92 | 3.01 | -7.91 | 8 | Pass |
| | 6 | 2437 | -10.89 | 3.01 | -7.88 | 8 | Pass |
| | 11 | 2462 | -10.04 | 3.01 | -7.03 | 8 | Pass |

802.11n (HT40)

| TX chain | Channel | Freq. (MHz) | PSD (dBm) | 10 log (N=2) dB | Total PSD (dBm) | Limit (dBm) | Pass /Fail |
|----------|---------|-------------|-----------|-----------------|-----------------|-------------|------------|
| 0 | 3 | 2422 | -17.11 | 3.01 | -14.10 | 8 | Pass |
| | 6 | 2437 | -11.79 | 3.01 | -8.78 | 8 | Pass |
| | 9 | 2452 | -14.43 | 3.01 | -11.42 | 8 | Pass |
| 1 | 3 | 2422 | -16.74 | 3.01 | -13.73 | 8 | Pass |
| | 6 | 2437 | -14.43 | 3.01 | -11.42 | 8 | Pass |
| | 9 | 2452 | -15.04 | 3.01 | -12.03 | 8 | Pass |

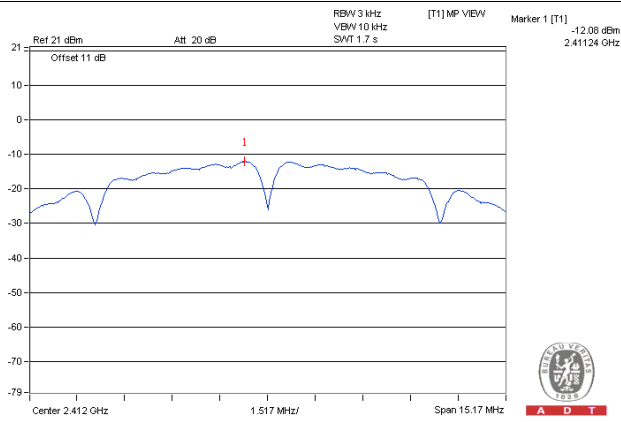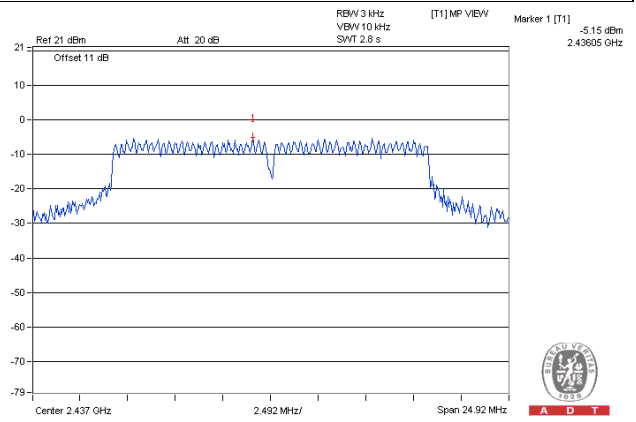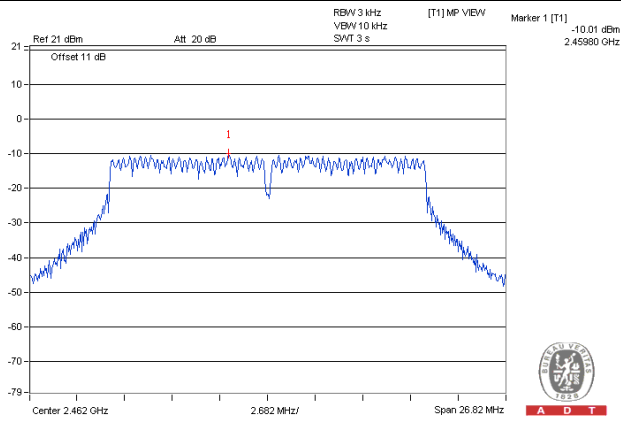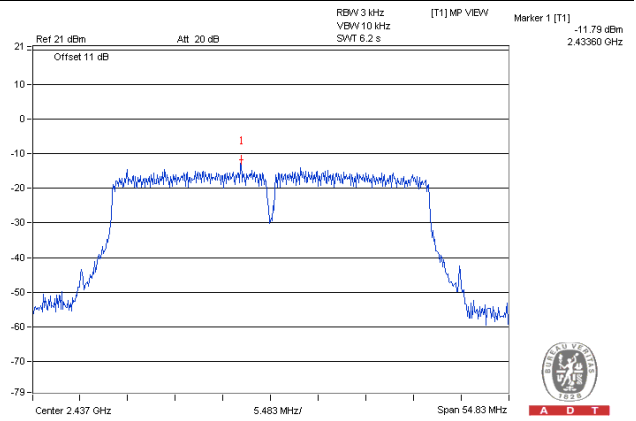
Spectrum Plot of Worst Value**802.11b – CH1****802.11g – CH6****802.11n (HT20) – Chain 0: CH11****802.11n (HT40) – Chain 0: CH6**

4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b


CH 1

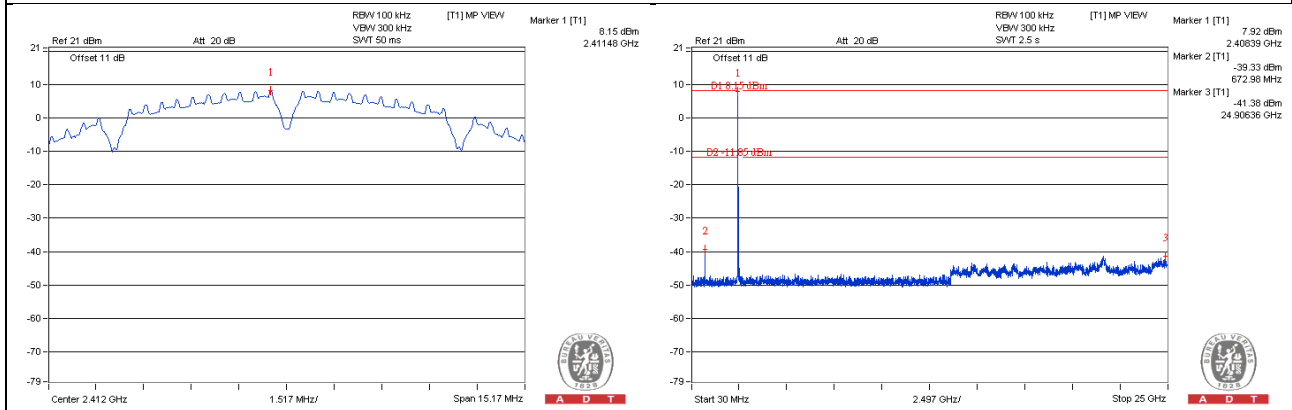


CH 6

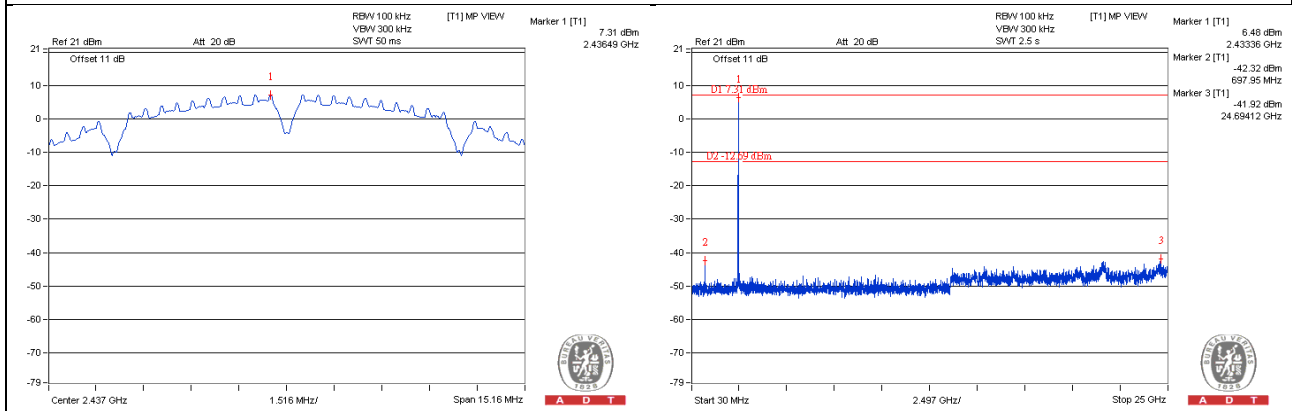


CH 11

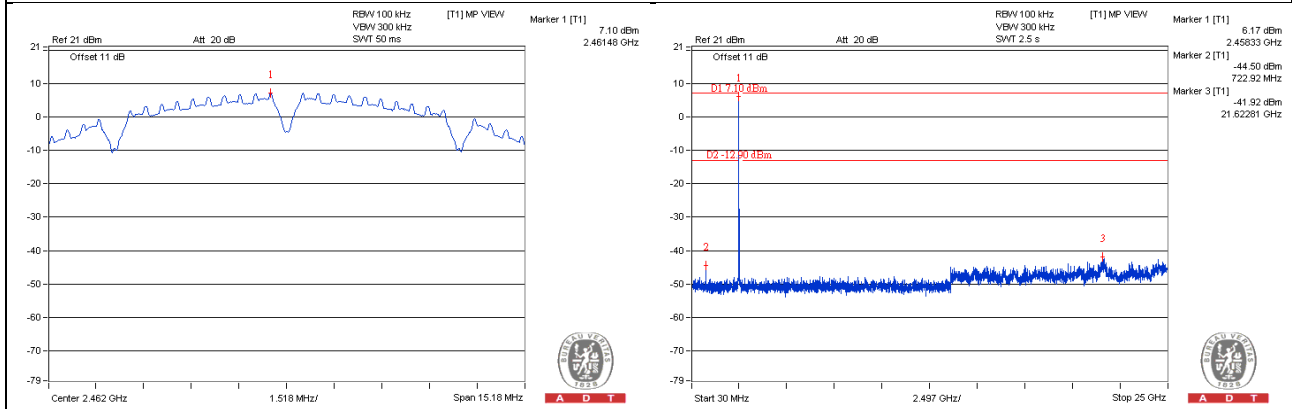

CH 1 Band edge

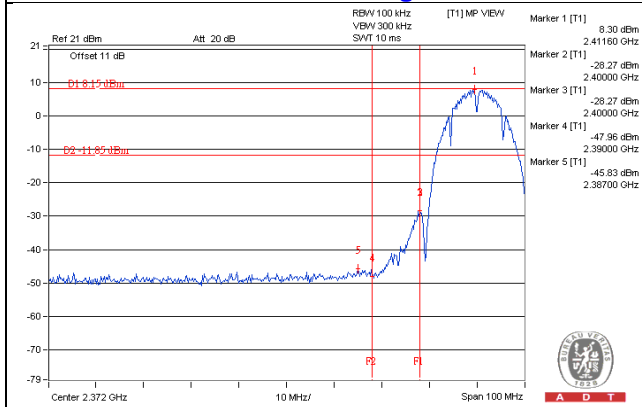


CH 11 Band edge

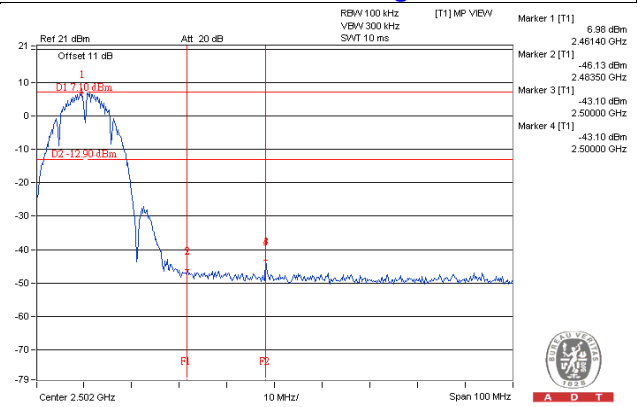


802.11g


CH 1

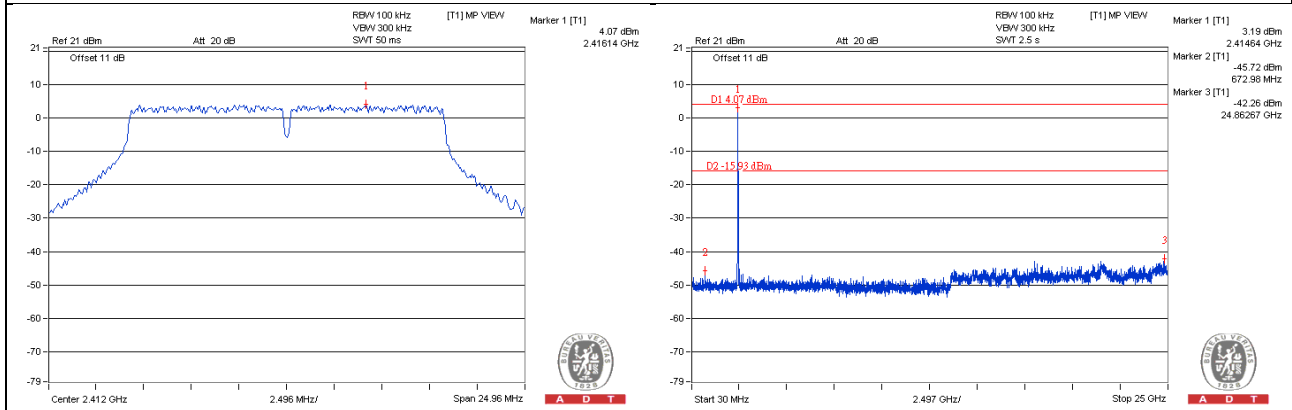


CH 6

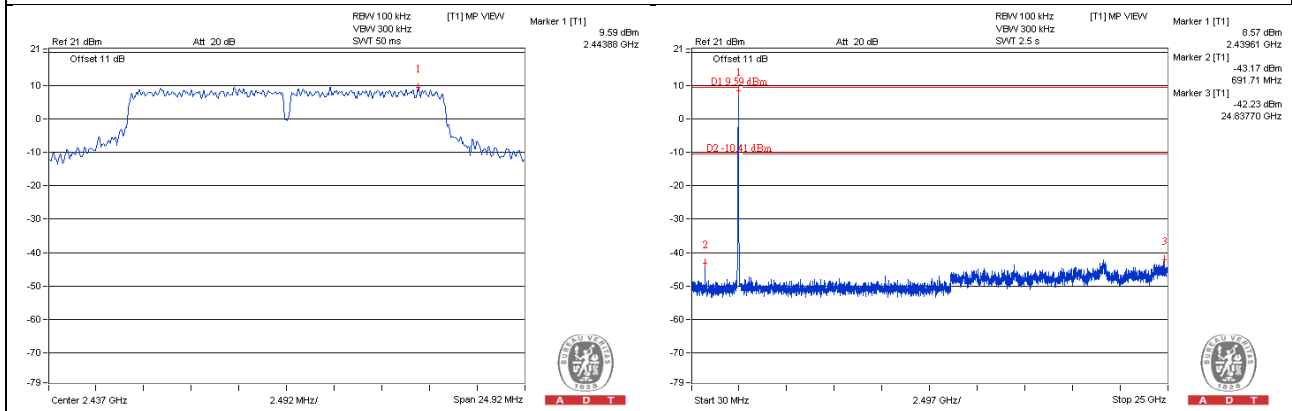


CH 11

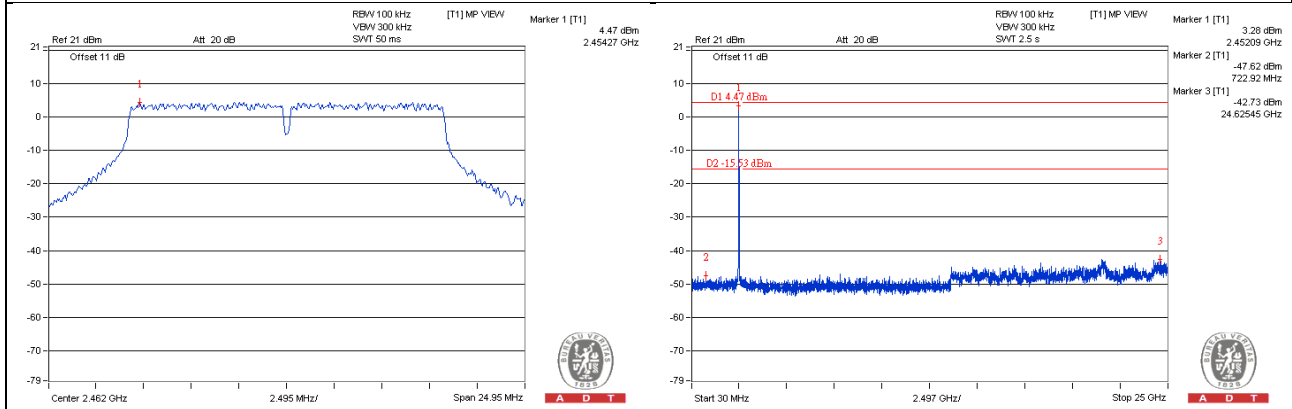

CH 1 Band edge


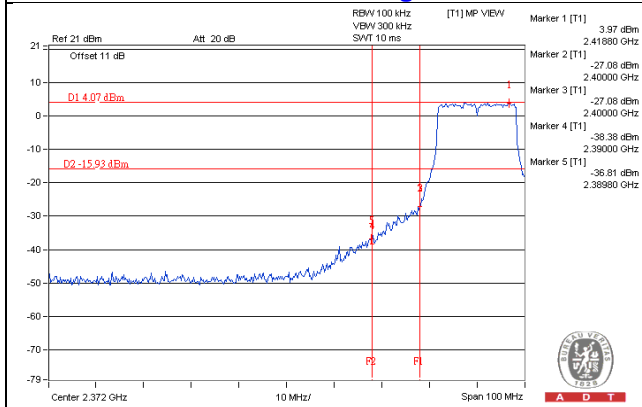


CH 11 Band edge


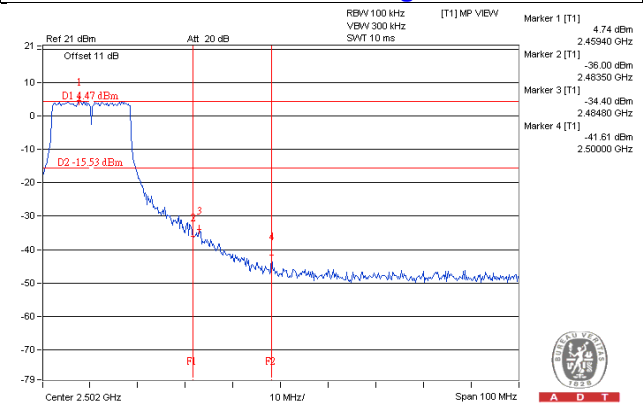


802.11n (HT20)
Chain 0



CH 1

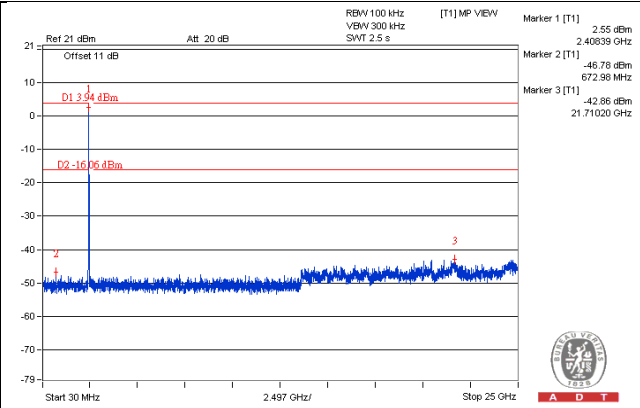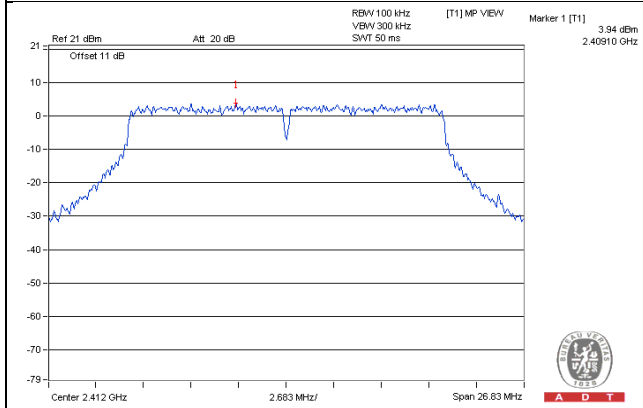


CH 6

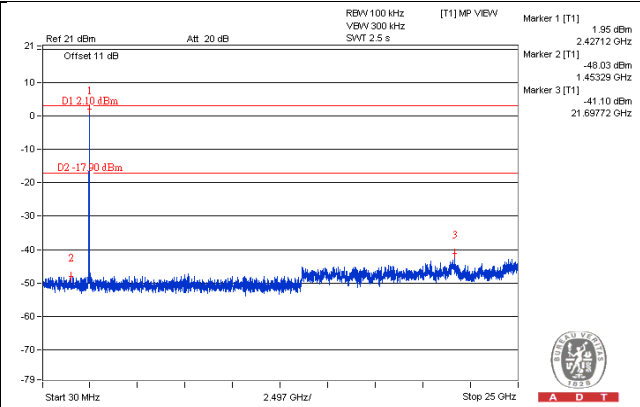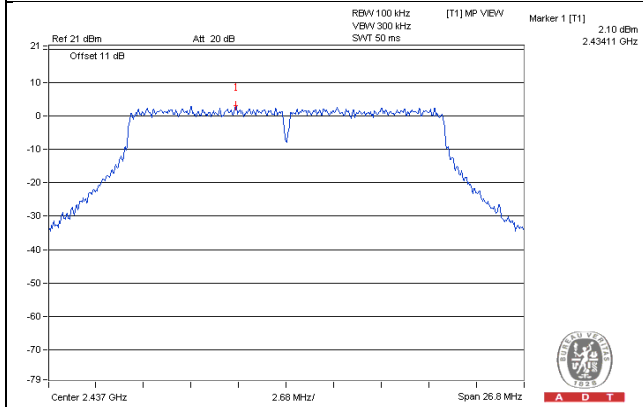


CH 11

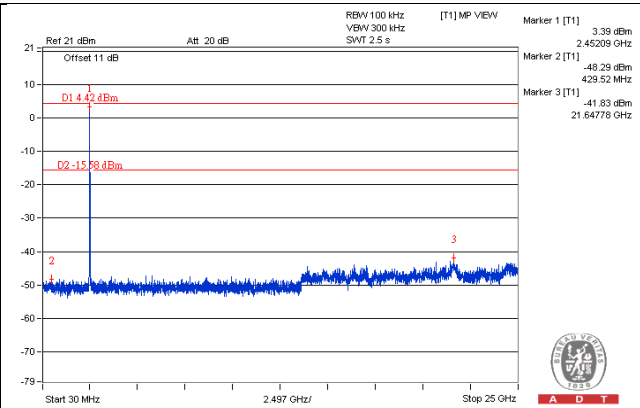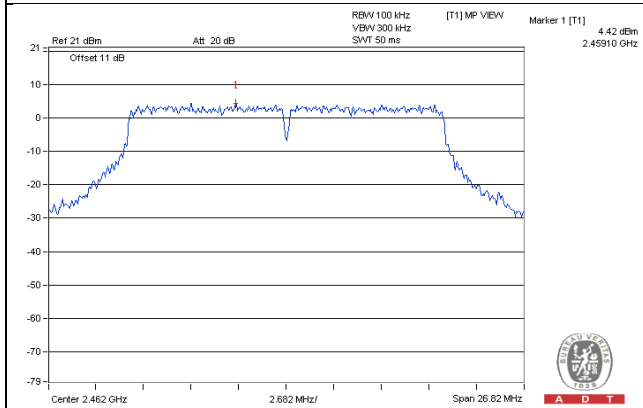

CH 1 Band edge


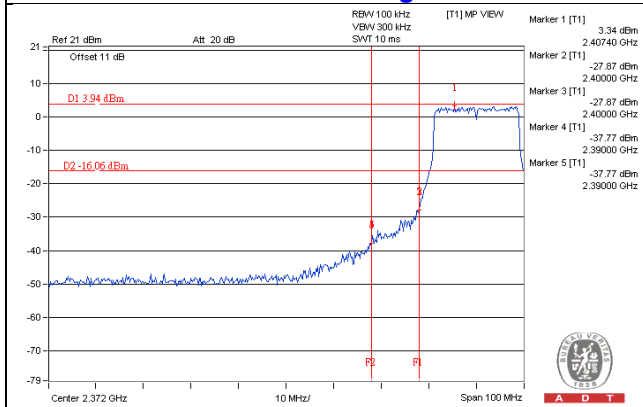


CH 11 Band edge


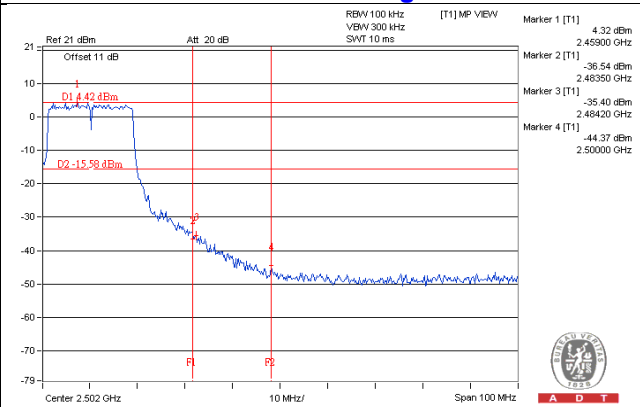


Chain 1



CH 1

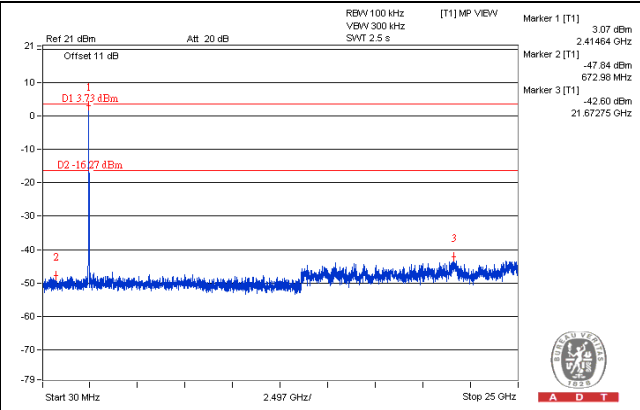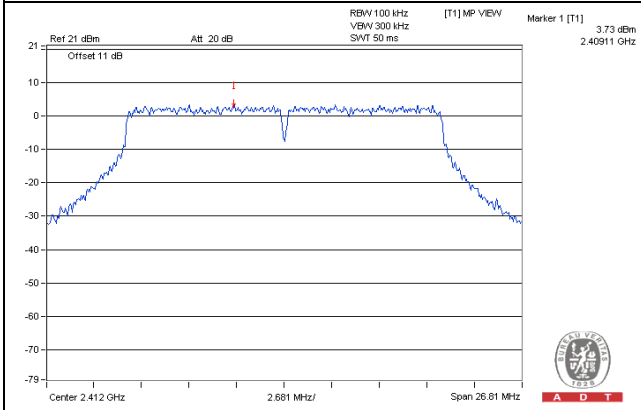


CH 6

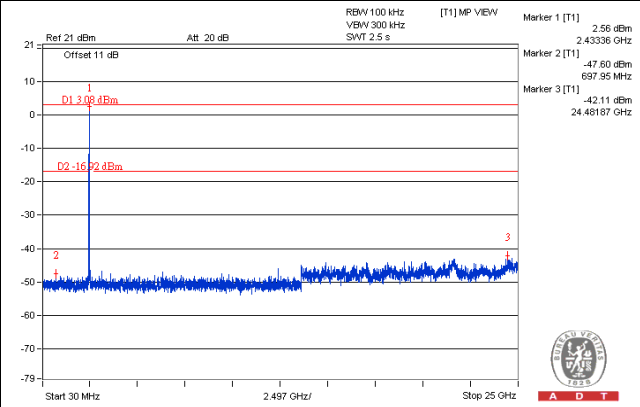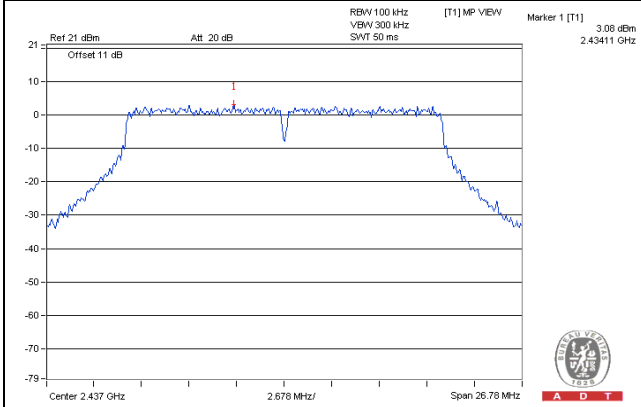


CH 11

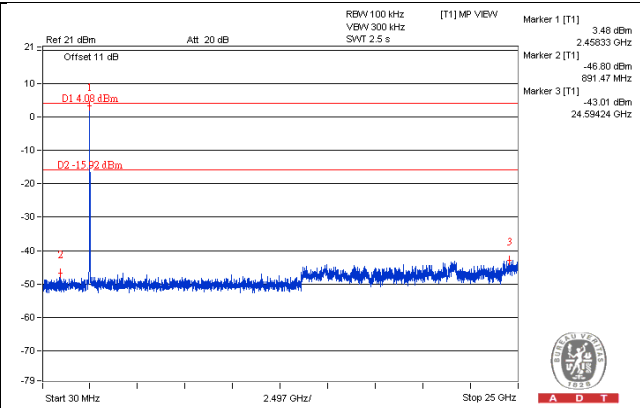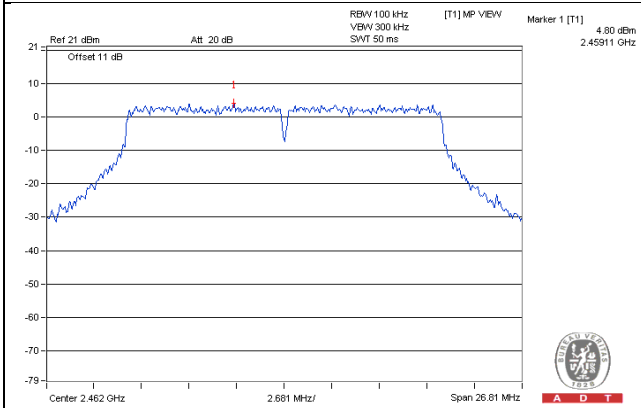

CH 1 Band edge


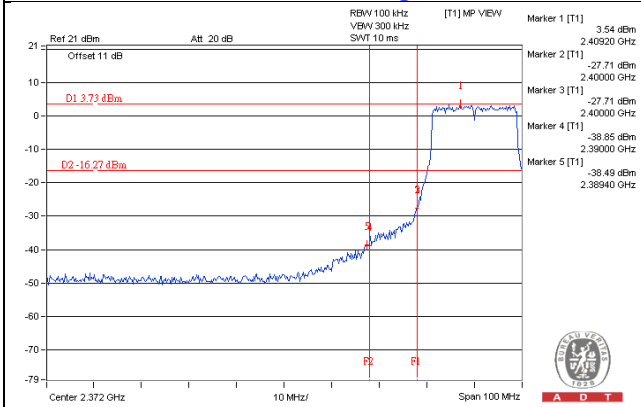


CH 11 Band edge


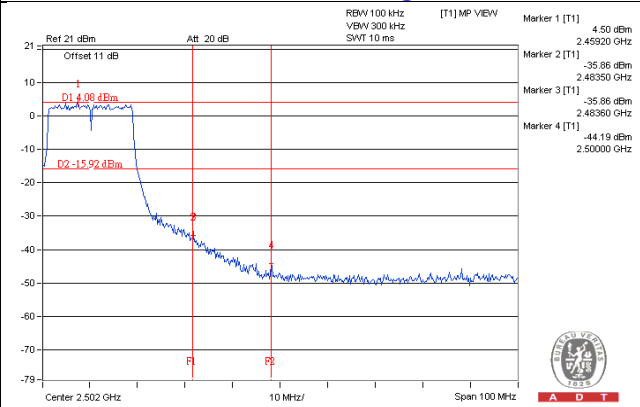


802.11n (HT40)
Chain 0



CH 3

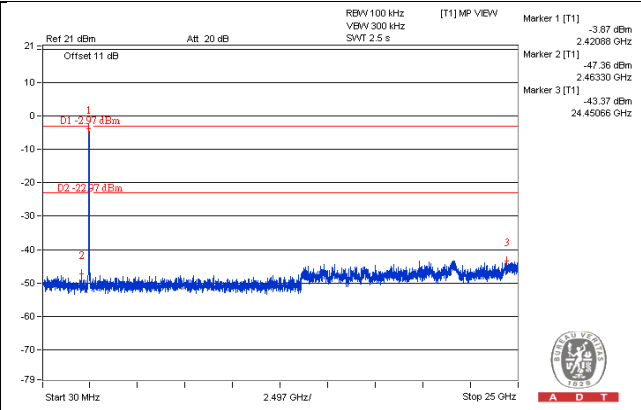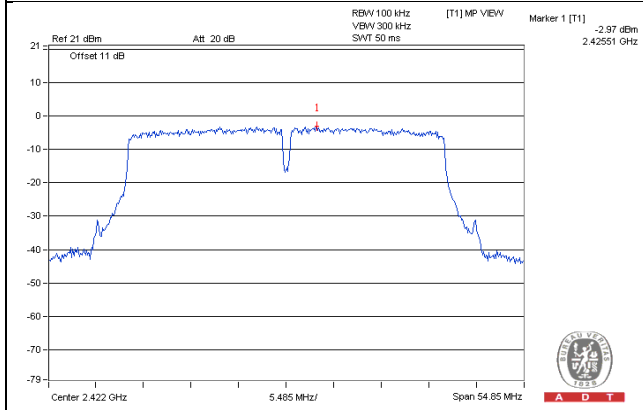


CH 6

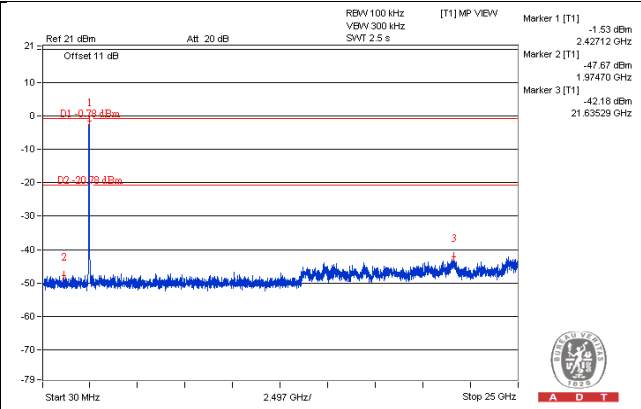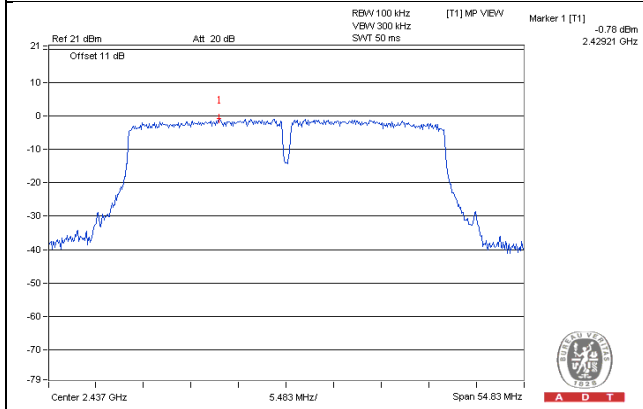


CH 9

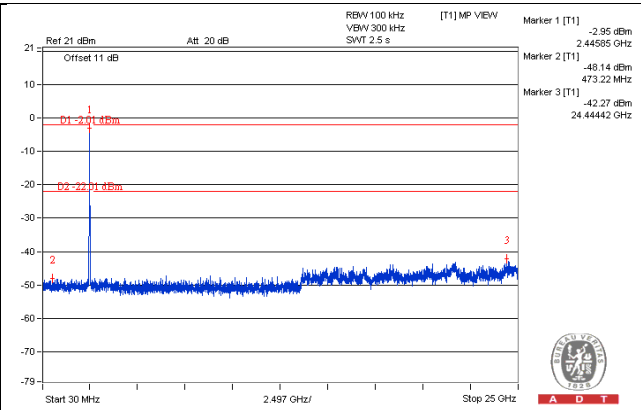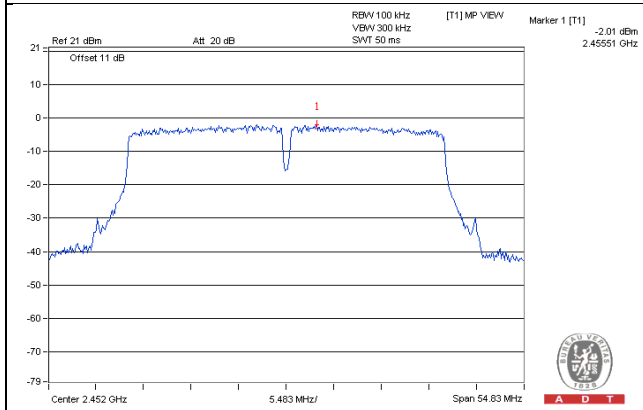

CH 3 Band edge


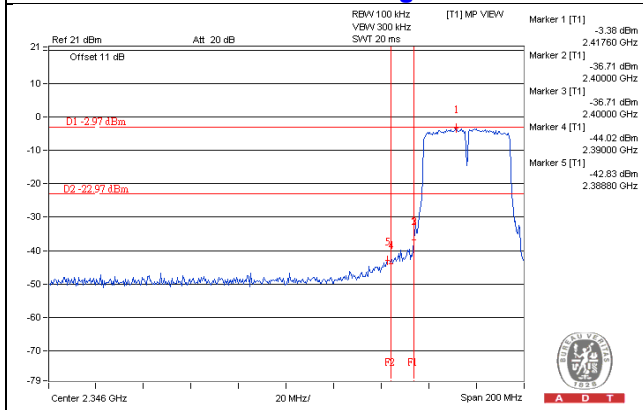


CH 9 Band edge


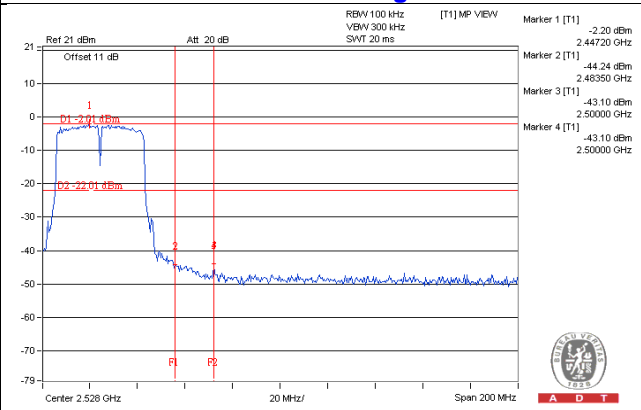


Chain 1



CH 3

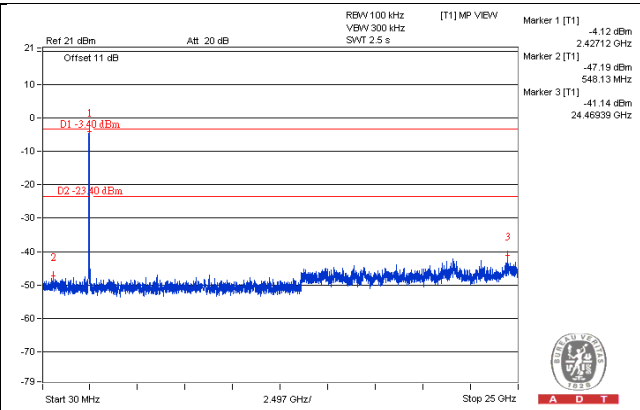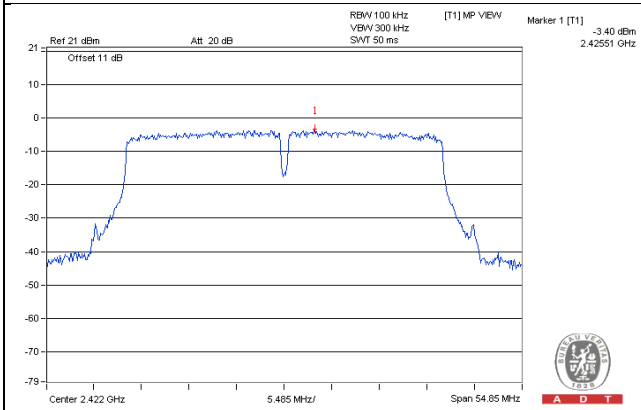


CH 6

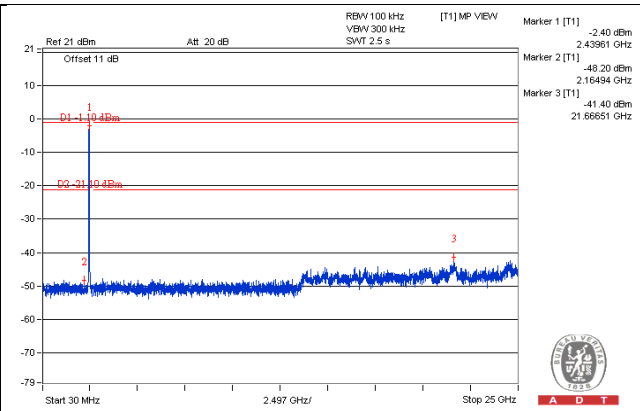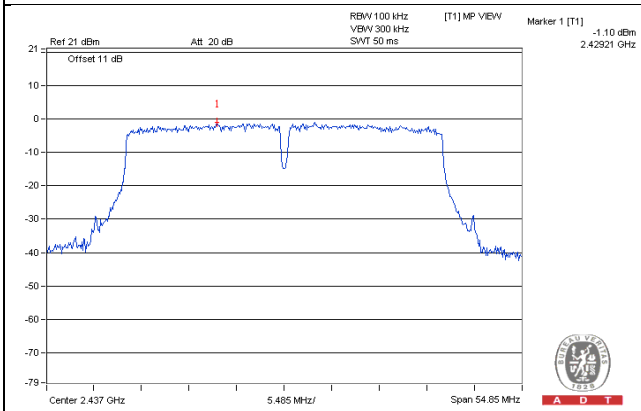


CH 9

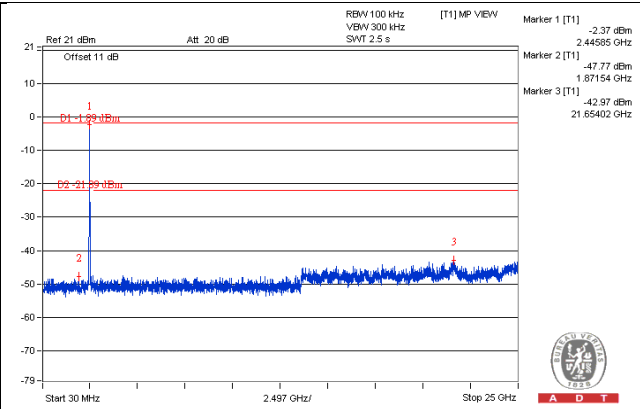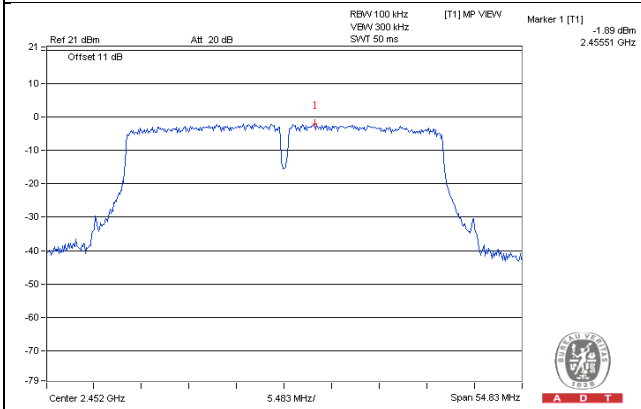

CH 3 Band edge

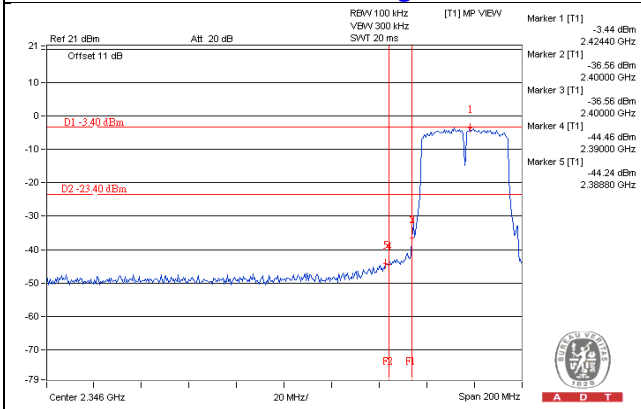

CH 9 Band edge

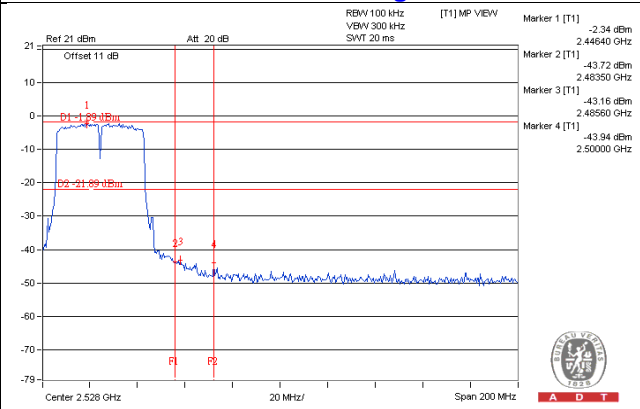

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---