

APPENDIX A: TEST DATA

Liquid Level Photo

Tissue HSL2450MHz D=155mm



Tissue MSL2450MHz D=150mm



Test Laboratory: Advance Data Technology

Right Head-Cheek-11b-Ch1-Mode 1

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11b ; Frequency: 2412 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: CCK

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20

- SENDER-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579; Calibrated: 2005/3/23

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.290 mW/g


Touch position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.297 mW/g

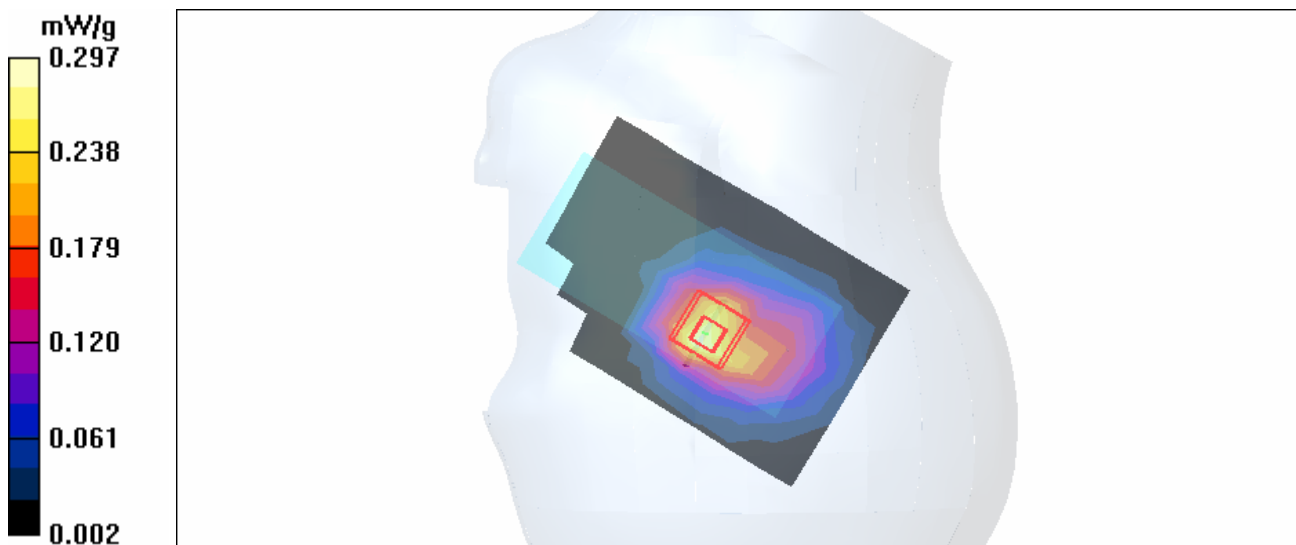

Test Laboratory: Advance Data Technology

Right Head-Cheek-11b-Ch6-Mode 1

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11b ; Frequency: 2437 MHz ; Duty Cycle: 1:1
Phantom: SAM 12 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm
Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: CCK
Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.346 mW/g


Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m

Peak SAR (extrapolated) = 0.581 W/kg


SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.362 mW/g

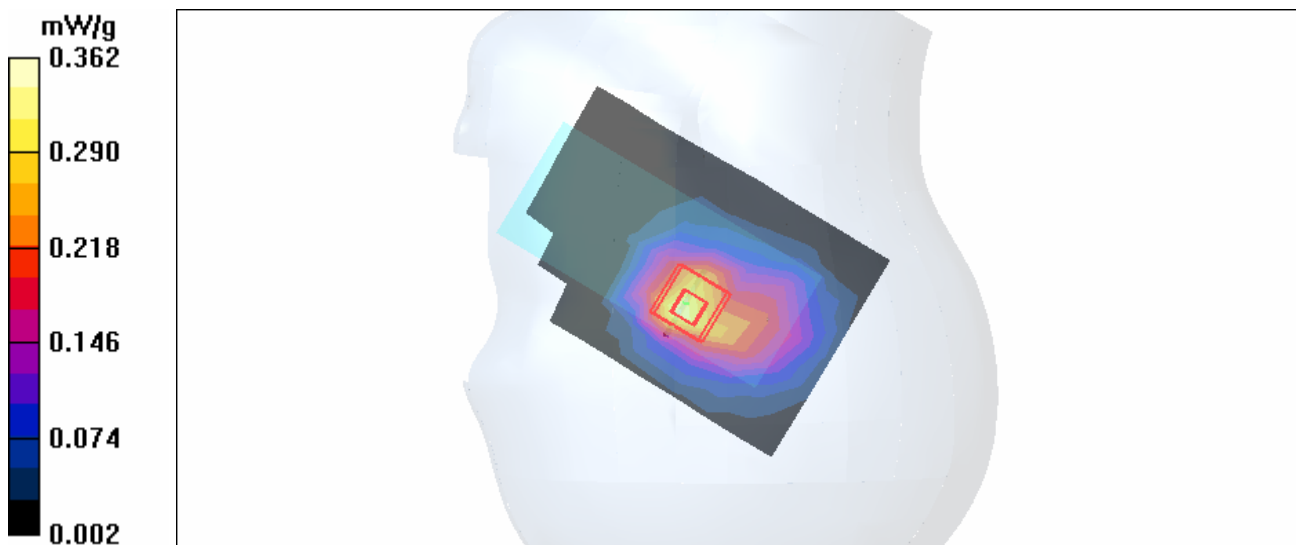

1g/10g Averaged SAR

SAR; Zoom Scan (7x7x7): Value Along Z, X=3, Y=3

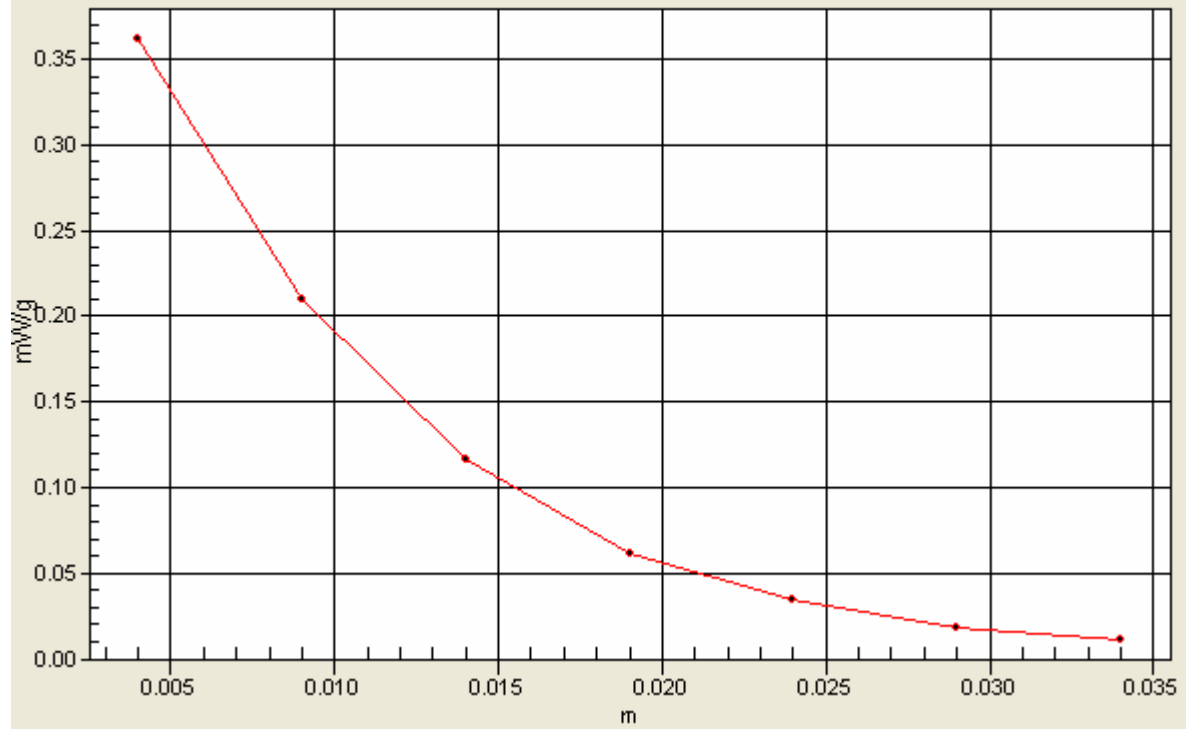

Test Laboratory: Advance Data Technology

Right Head-Cheek-11b-Ch11-Mode 1

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11b ; Frequency: 2462 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: CCK

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.330 mW/g

Touch position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.343 mW/g



Touch position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.271 mW/g

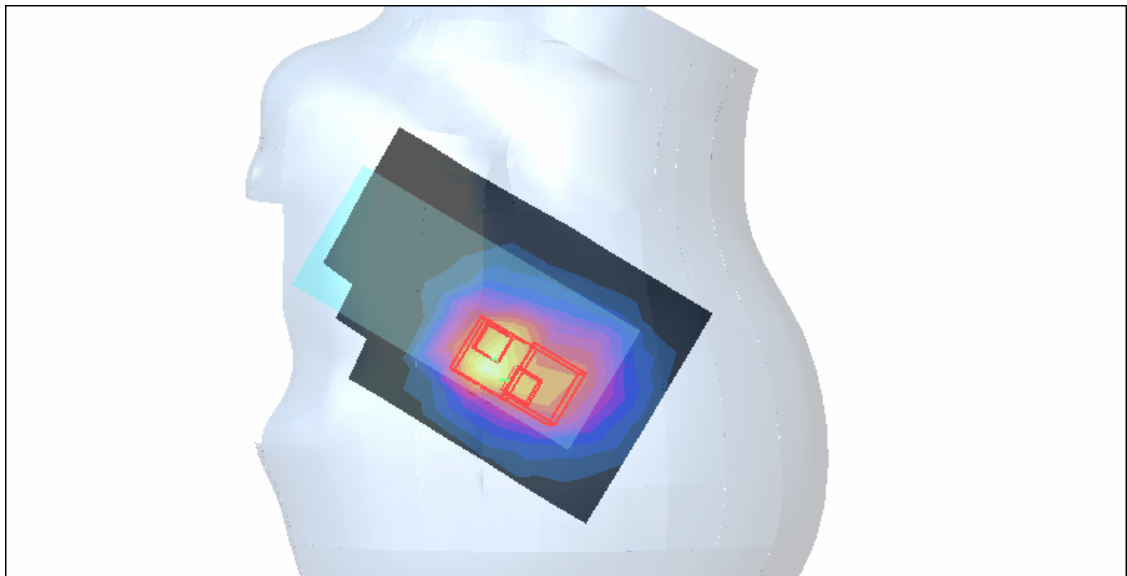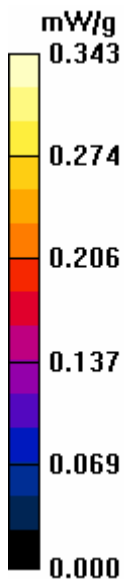

Test Laboratory: Advance Data Technology

Right Head-Tilt-11b-Ch1-Mode 2

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11b ; Frequency: 2412 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: CCK

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20

- SENDER-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579; Calibrated: 2005/3/23

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.136 mW/g

Tilt position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.30 V/m

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.143 mW/g

Tilt position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.30 V/m

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.098 mW/g

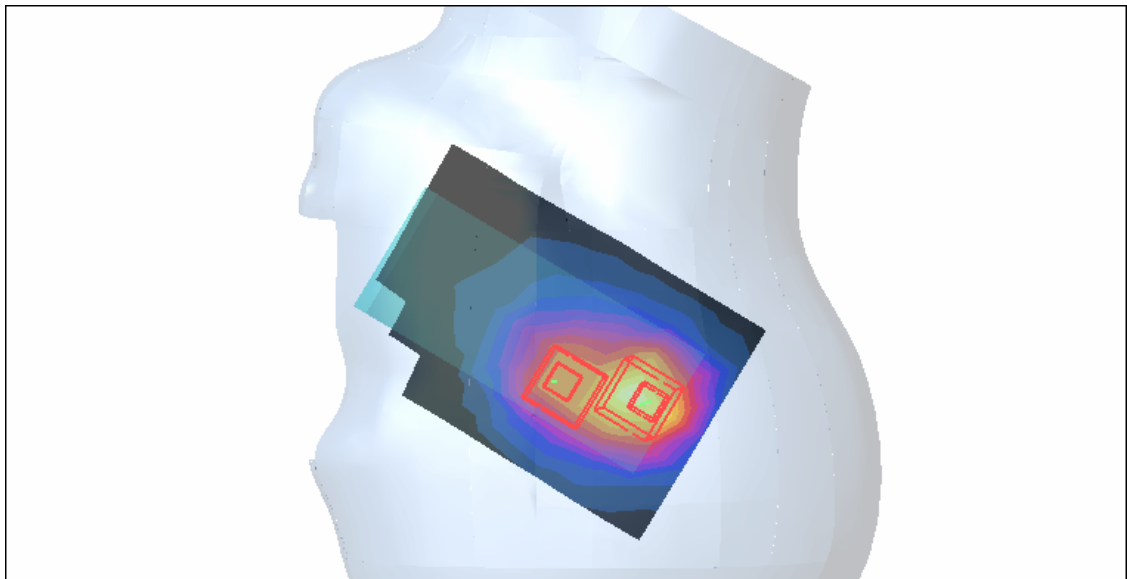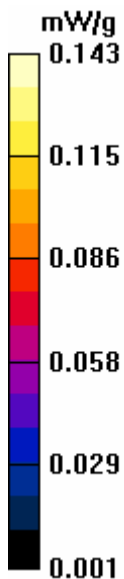

Test Laboratory: Advance Data Technology

Right Head-Tilt-11b-Ch6-Mode 2

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11b ; Frequency: 2437 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: CCK

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.162 mW/g

Tilt position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.96 V/m

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.170 mW/g

Tilt position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.96 V/m

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

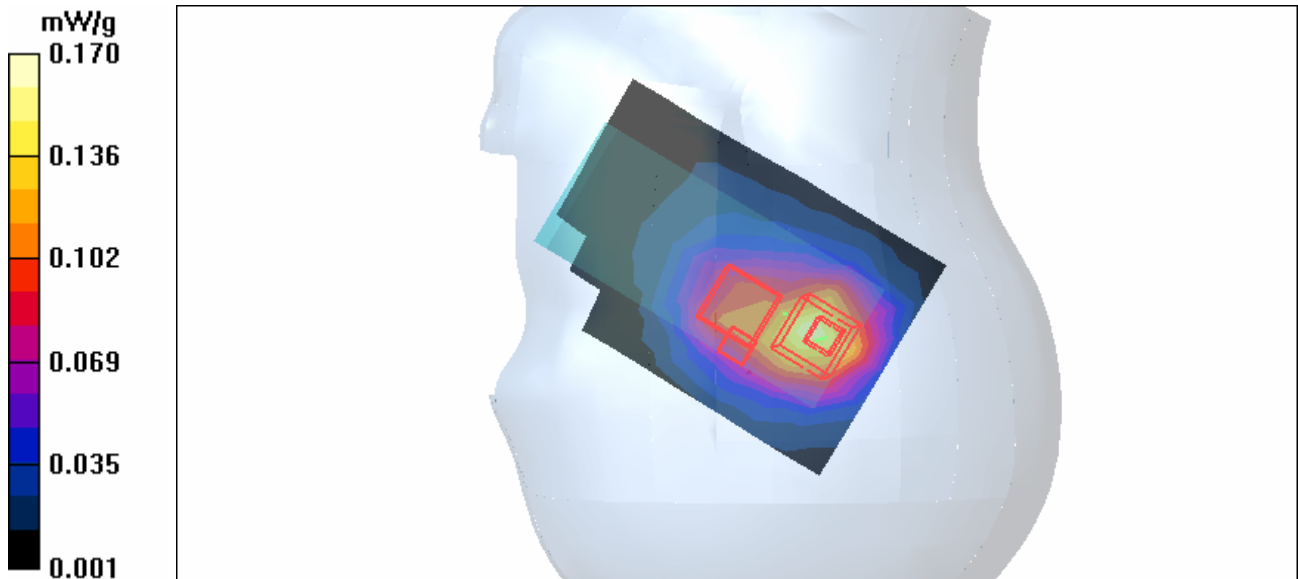

Test Laboratory: Advance Data Technology

Right Head-Tilt-11b-Ch11-Mode 2

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: CCK

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20

- SENDER-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579; Calibrated: 2005/3/23

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.141 mW/g

Tilt position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.25 V/m

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.145 mW/g

Tilt position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.25 V/m

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.092 mW/g

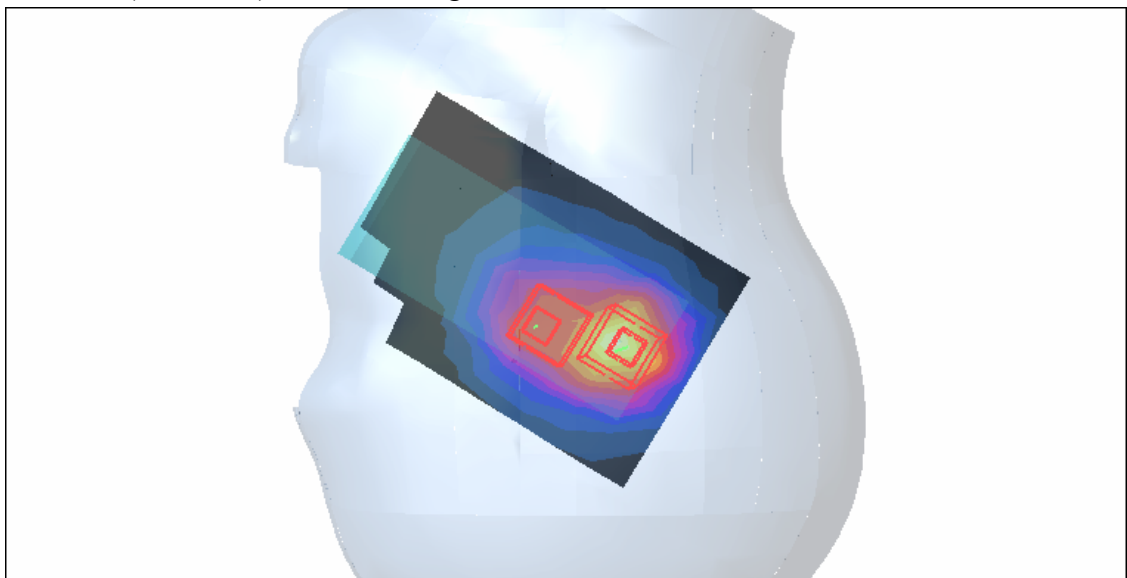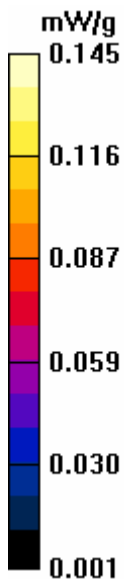

Test Laboratory: Advance Data Technology

Left Head-Cheek-11b-Ch1-Mode 3

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11b ; Frequency: 2412 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: CCK

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.194 mW/g

Touch position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.192 mW/g


Touch position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.181 mW/g

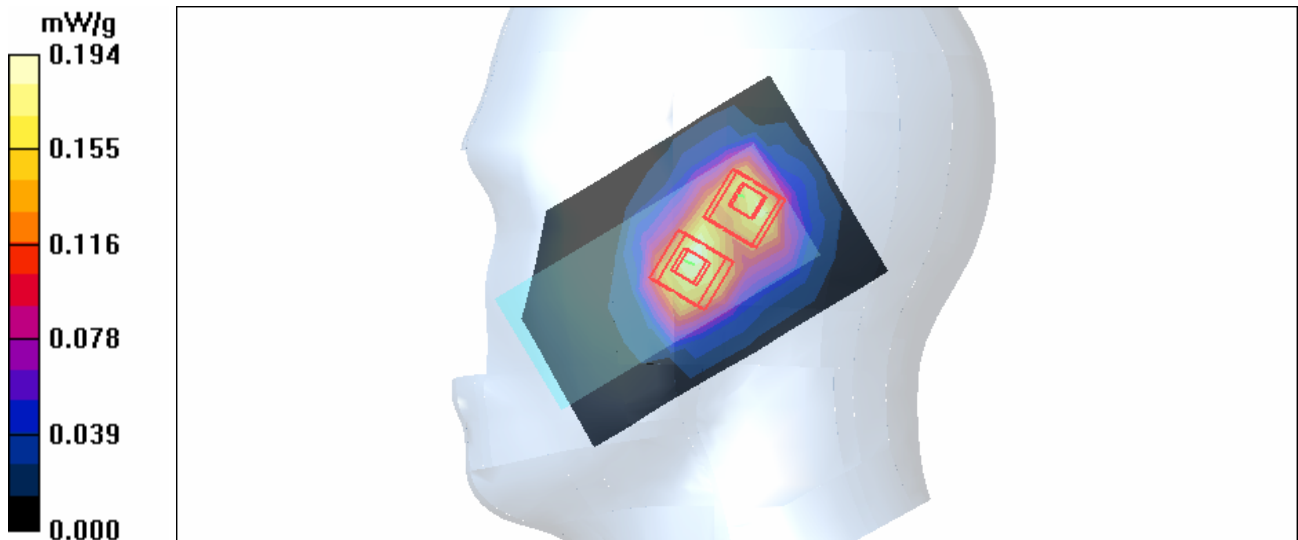

Test Laboratory: Advance Data Technology

Left Head-Cheek-11b-Ch6-Mode 3

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11b ; Frequency: 2437 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: CCK

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.317 mW/g

Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 0.311 mW/g

Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.313 mW/g

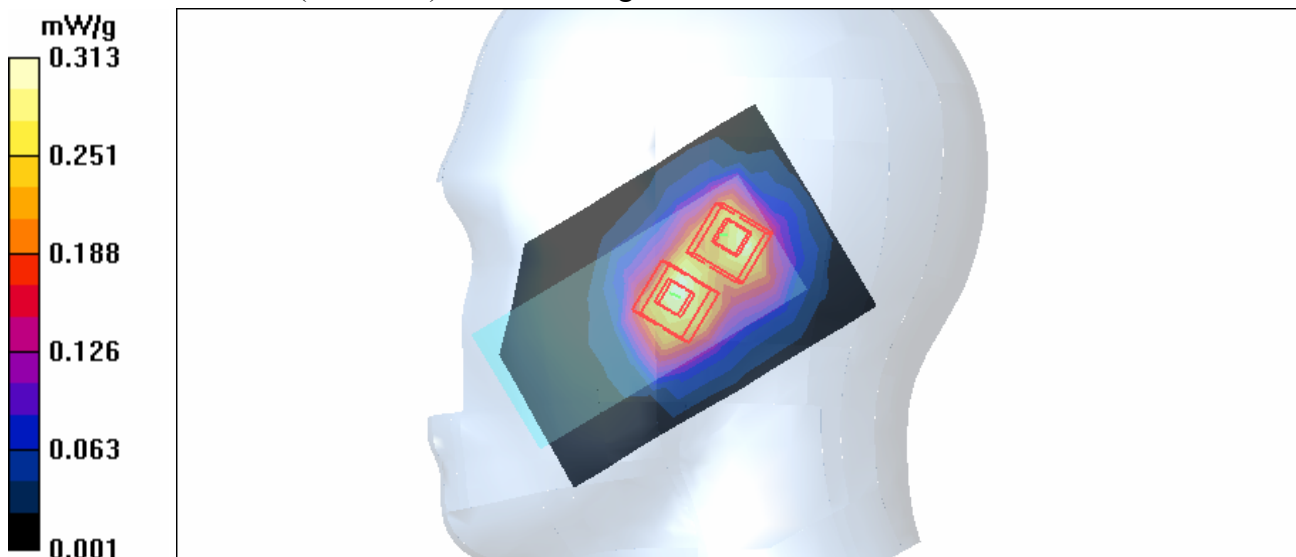

Test Laboratory: Advance Data Technology

Left Head-Cheek-11b-Ch11-Mode 3

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11b ; Frequency: 2462 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: CCK

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.237 mW/g

Touch position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.242 mW/g



Touch position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.243 mW/g

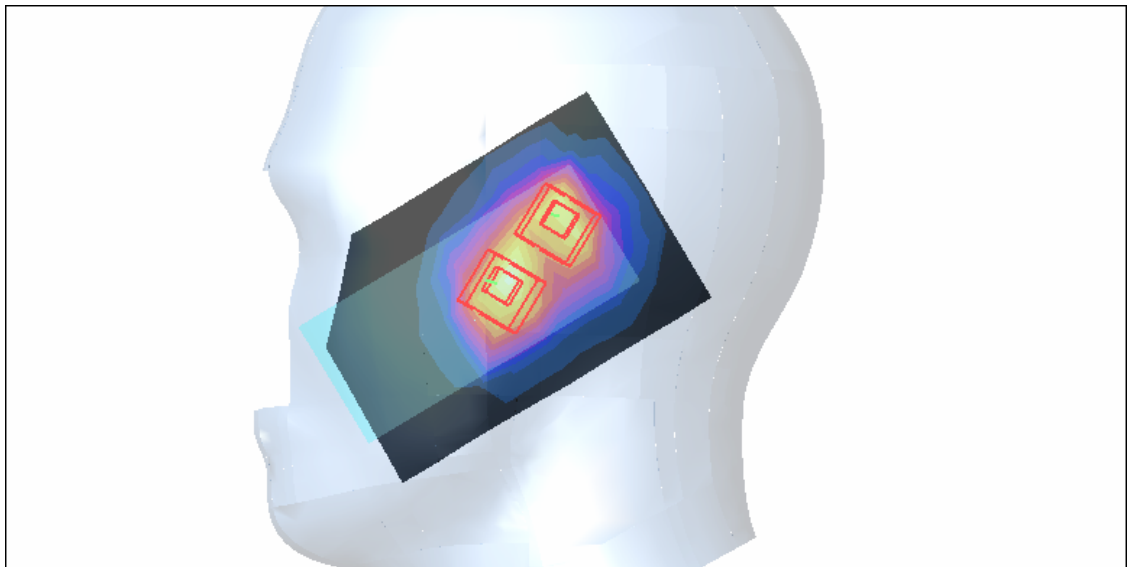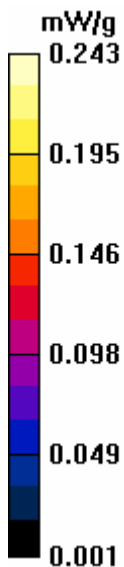

Test Laboratory: Advance Data Technology

Left Head-Tilt-11b-Ch1-Mode 4

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz


Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: HSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm
Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: CCK
Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.111 mW/g

Tilt position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.39 V/m
Peak SAR (extrapolated) = 0.393 W/kg
SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.167 mW/g

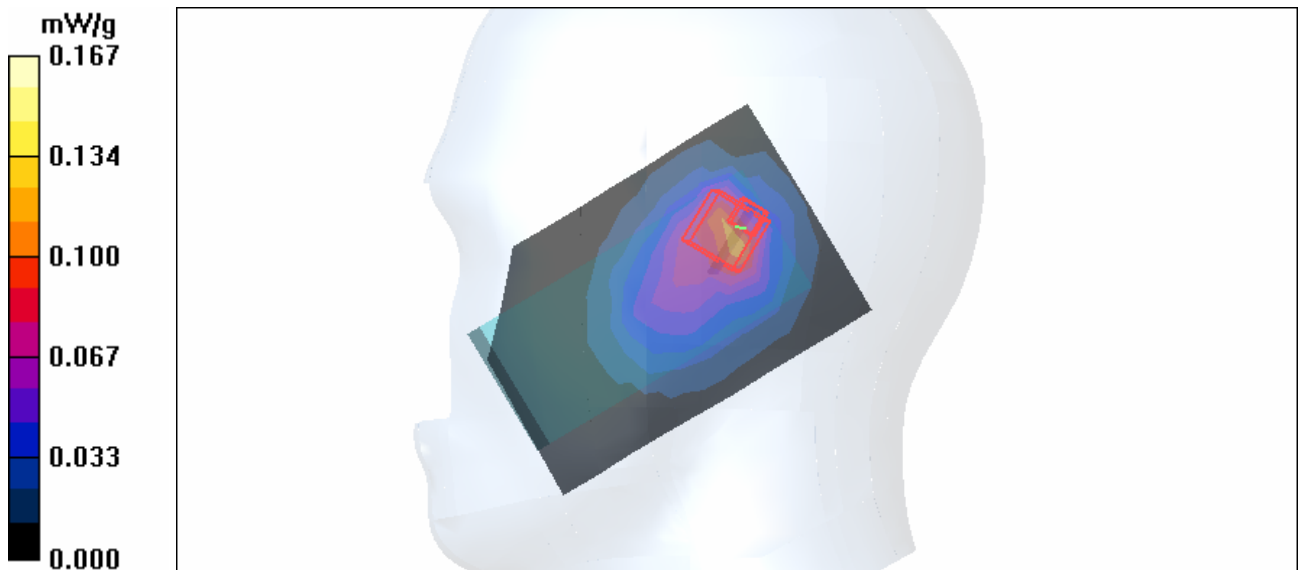

Test Laboratory: Advance Data Technology

Left Head-Tilt-11b-Ch6-Mode 4

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz


Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm
Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: CCK
Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.192 mW/g

Tilt position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.5 V/m
Peak SAR (extrapolated) = 0.315 W/kg
SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.084 mW/g
Maximum value of SAR (measured) = 0.178 mW/g

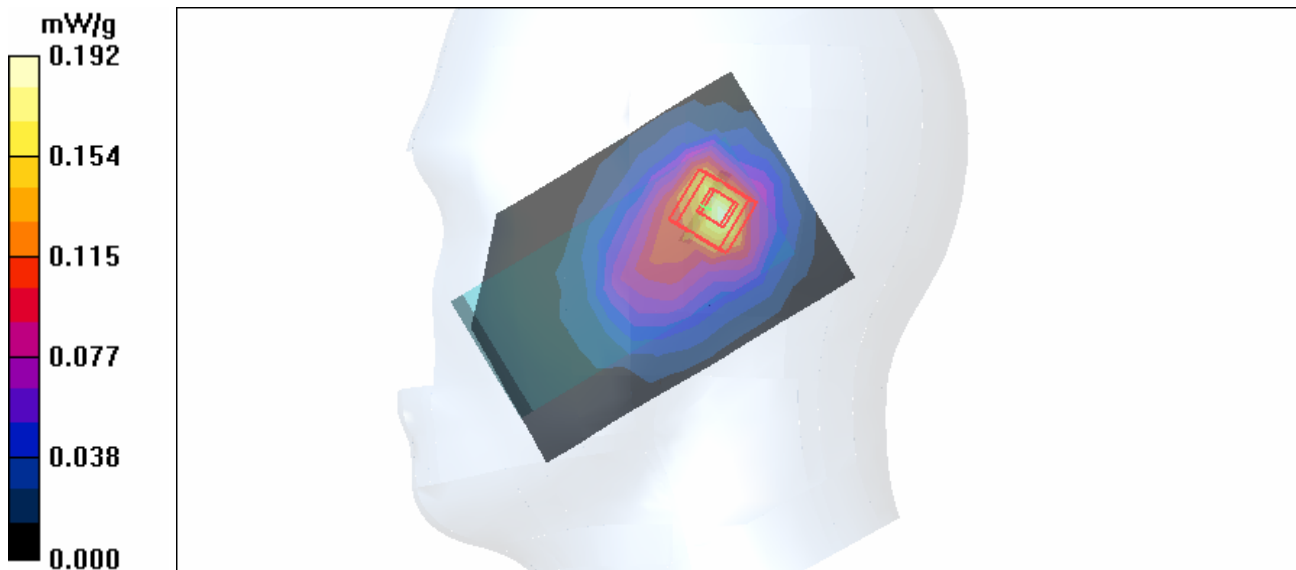

Test Laboratory: Advance Data Technology

Left Head-Tilt-11b-Ch11-Mode 4

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz


Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm
Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: CCK
Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.154 mW/g

Tilt position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.55 V/m
Peak SAR (extrapolated) = 0.313 W/kg
SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.077 mW/g
Maximum value of SAR (measured) = 0.167 mW/g

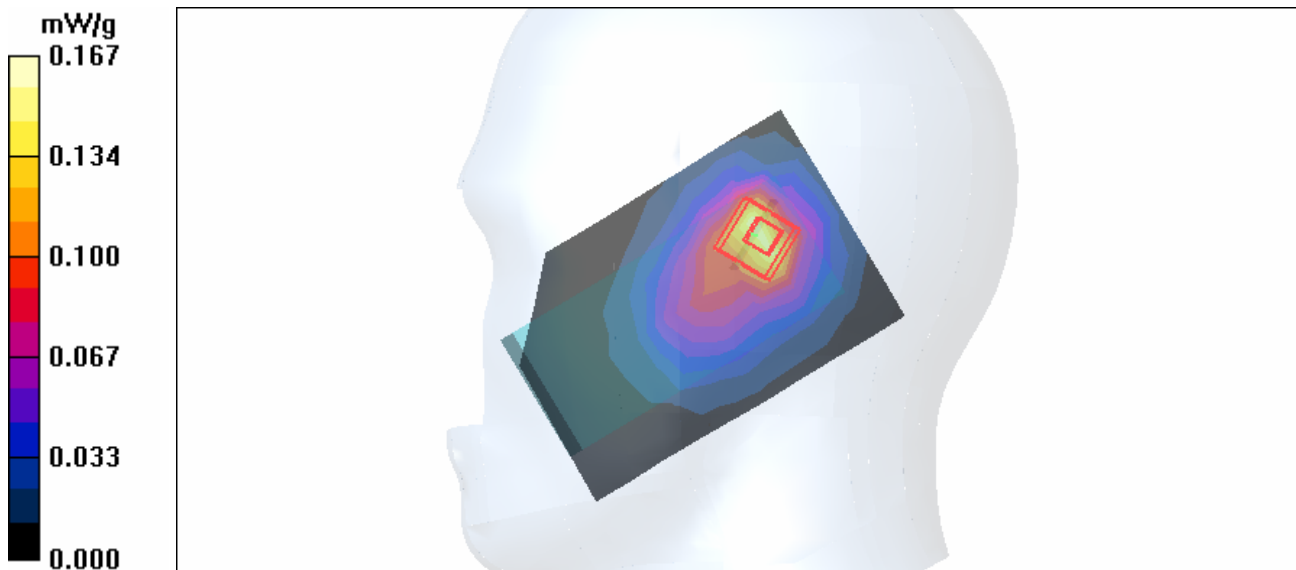

Test Laboratory: Advance Data Technology

Right Head-Cheek-11g-Ch1-Mode 5

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11g ; Frequency: 2412 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: OFDM

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 mW/g


Touch position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.63 V/m

Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.120 mW/g

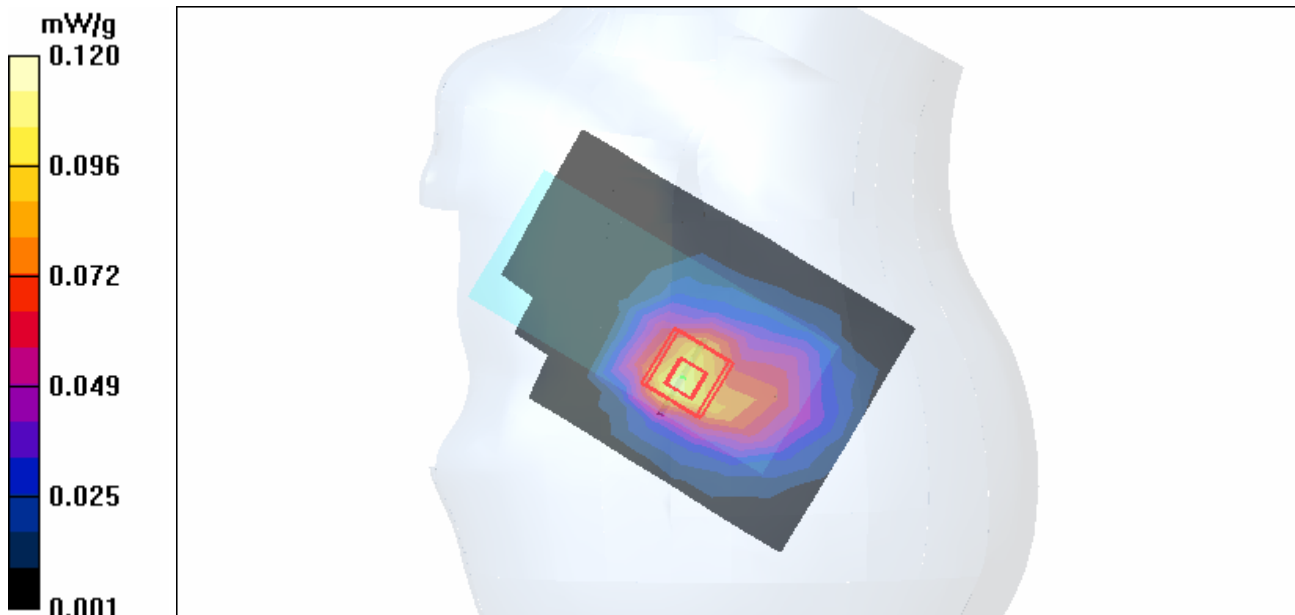

Test Laboratory: Advance Data Technology

Right Head-Cheek-11g-Ch6-Mode 5

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11g ; Frequency: 2437 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: OFDM

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.130 mW/g


Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.07 V/m

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

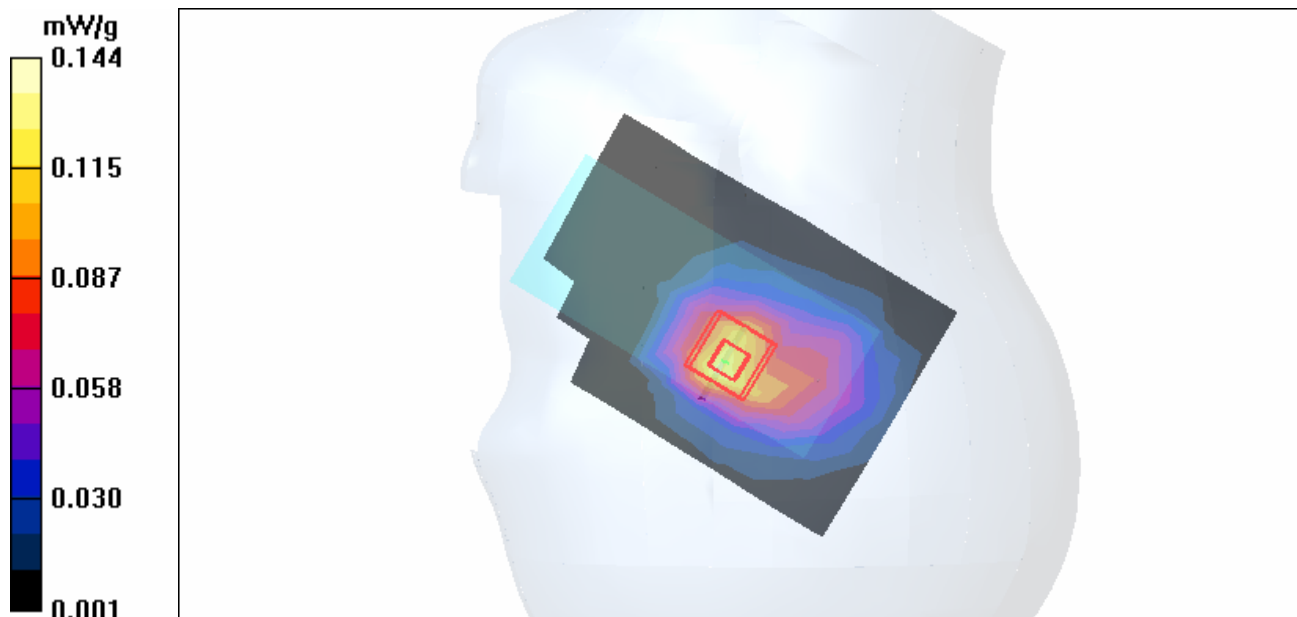

Test Laboratory: Advance Data Technology

Right Head-Cheek-11g-Ch11-Mode 5

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11g ; Frequency: 2462 MHz ; Duty Cycle: 1:1
Phantom: SAM 12 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm
Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: OFDM
Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.097 mW/g


Touch position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.28 V/m

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.098 mW/g

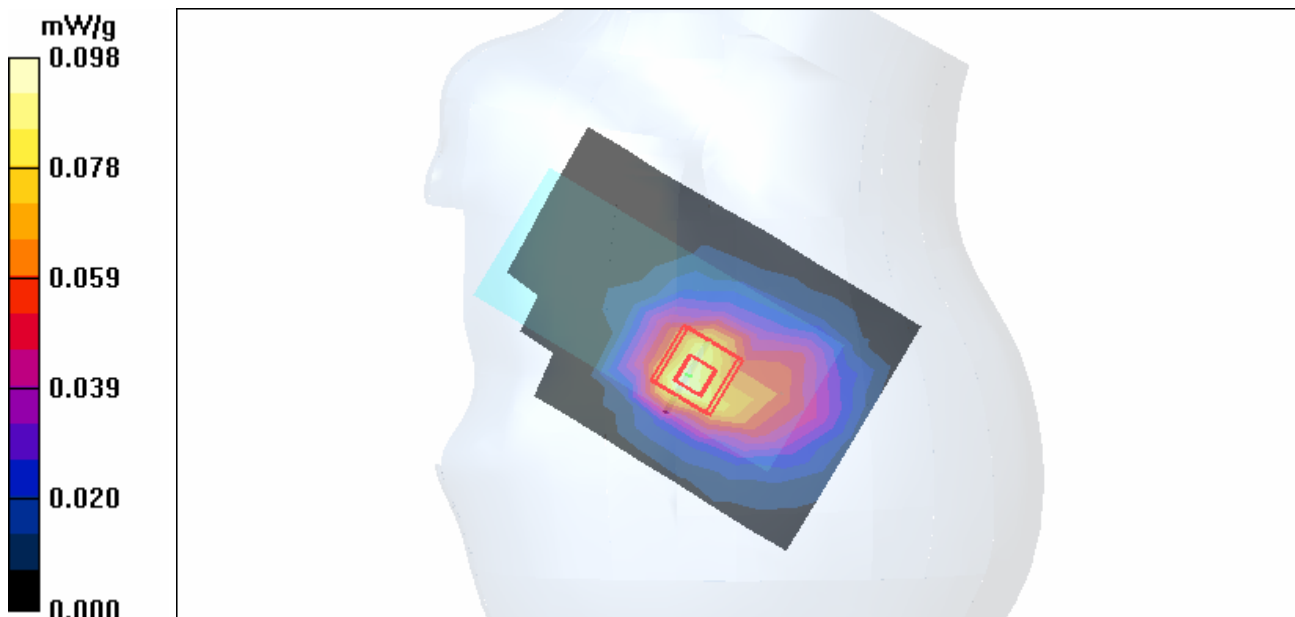

Test Laboratory: Advance Data Technology

Right Head-Tilt-11g-Ch1-Mode 6

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11g ; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: OFDM

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20

- SENDER-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579; Calibrated: 2005/3/23

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.054 mW/g

Tilt position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.79 V/m

Peak SAR (extrapolated) = 0.071 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.022 mW/g


Maximum value of SAR (measured) = 0.053 mW/g

Tilt position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.79 V/m

Peak SAR (extrapolated) = 0.059 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.040 mW/g

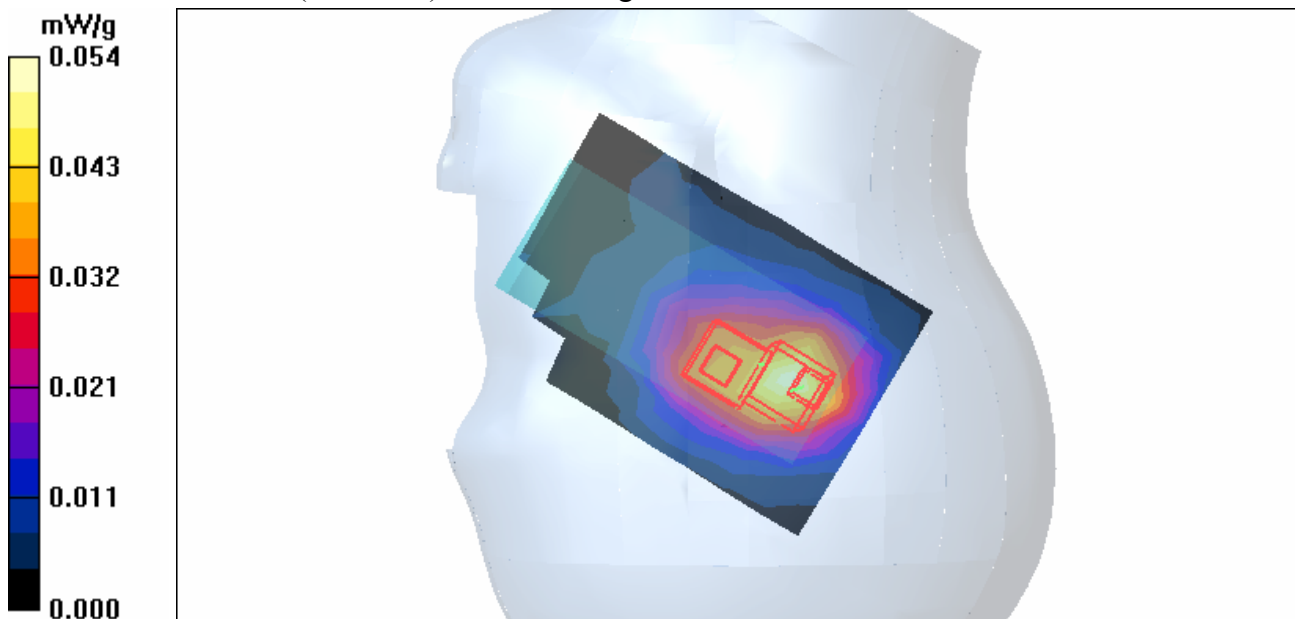

Test Laboratory: Advance Data Technology

Right Head-Tilt-11g-Ch6-Mode 6

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11g ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: OFDM

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20

- SENDER-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579; Calibrated: 2005/3/23

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.061 mW/g

Tilt position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.03 V/m

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.062 mW/g

Tilt position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.03 V/m

Peak SAR (extrapolated) = 0.085 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

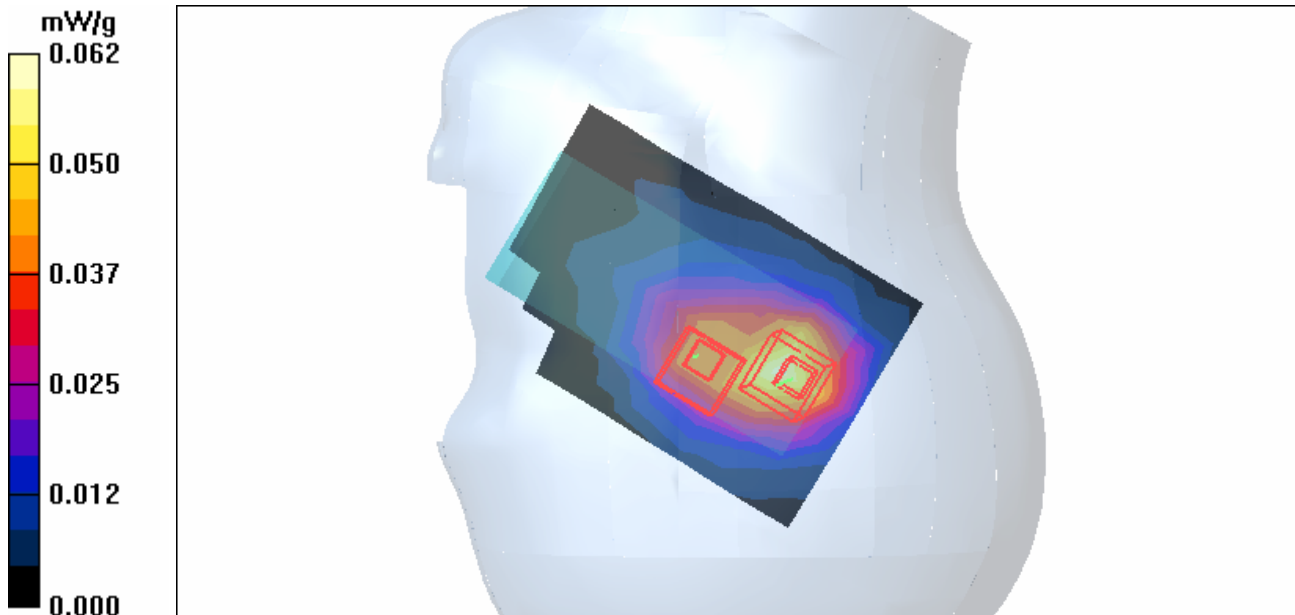

Test Laboratory: Advance Data Technology

Right Head-Tilt-11g-Ch11-Mode 6

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11g ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: OFDM

Antenna type : Inverted-F Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20

- SENDER-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579; Calibrated: 2005/3/23

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.042 mW/g

Tilt position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.06 V/m

Peak SAR (extrapolated) = 0.052 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

Tilt position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.06 V/m

Peak SAR (extrapolated) = 0.050 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.030 mW/g

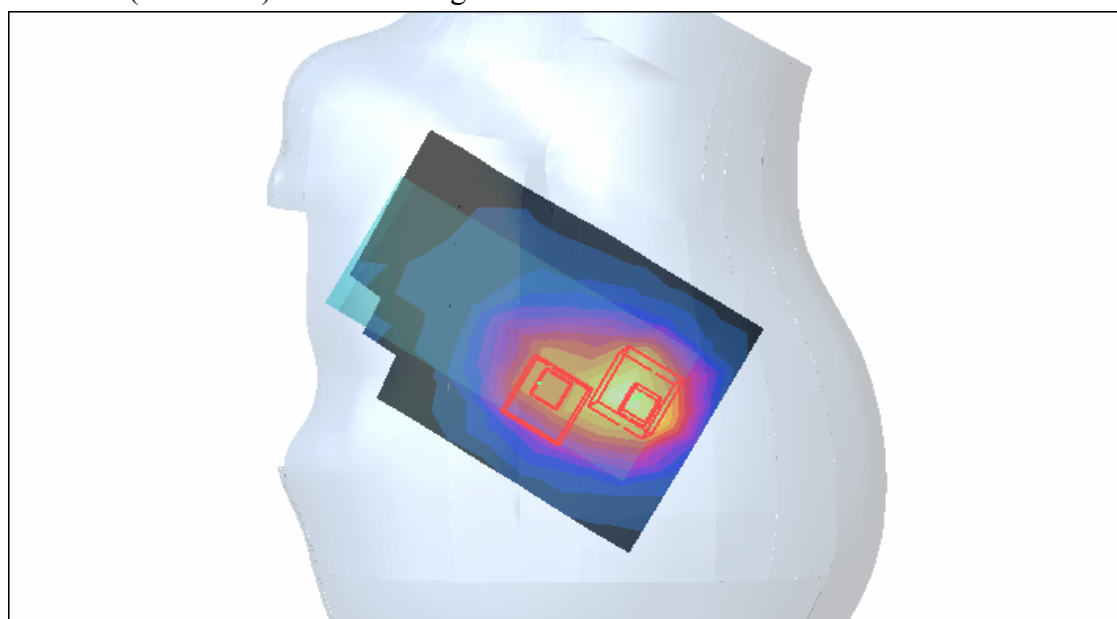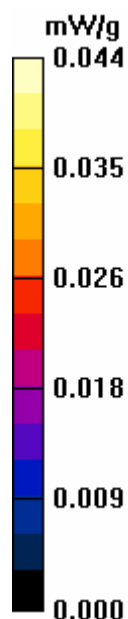

Test Laboratory: Advance Data Technology

Left Head-Cheek-11g-Ch1-Mode 7

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11g ; Frequency: 2412 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: OFDM

Antenna type : Internal Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.092 mW/g

Touch position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.25 V/m

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.097 mW/g



Touch position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.25 V/m

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.096 mW/g

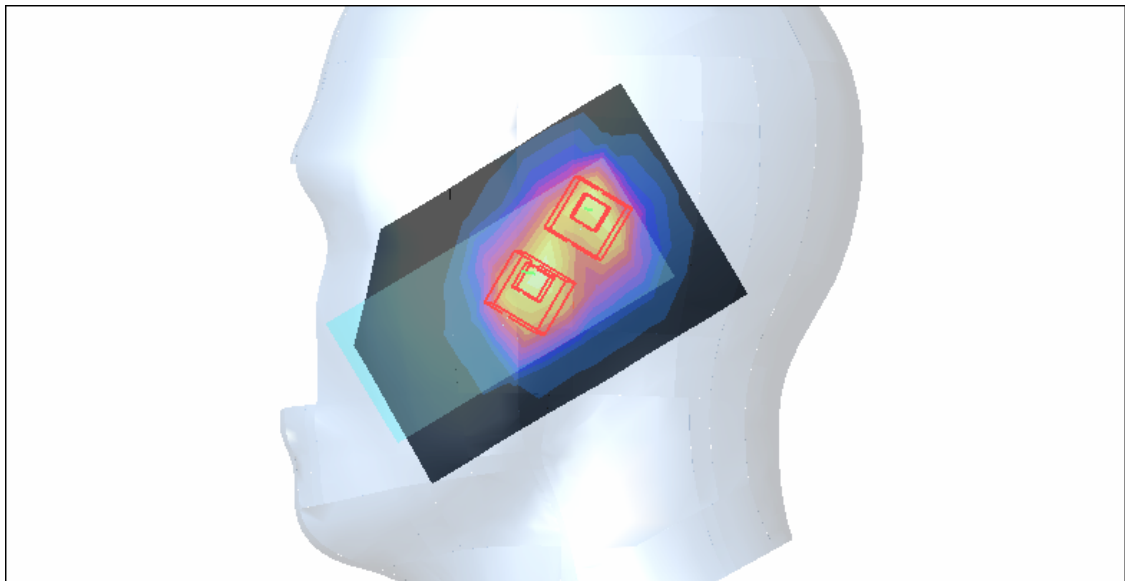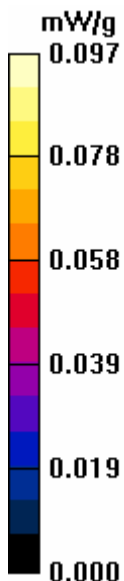

Test Laboratory: Advance Data Technology

Left Head-Cheek-11g-Ch6-Mode 7

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11g ; Frequency: 2437 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: OFDM

Antenna type : Internal Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.120 mW/g

Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.21 V/m

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.122 mW/g



Touch position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.21 V/m

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.115 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.130 mW/g

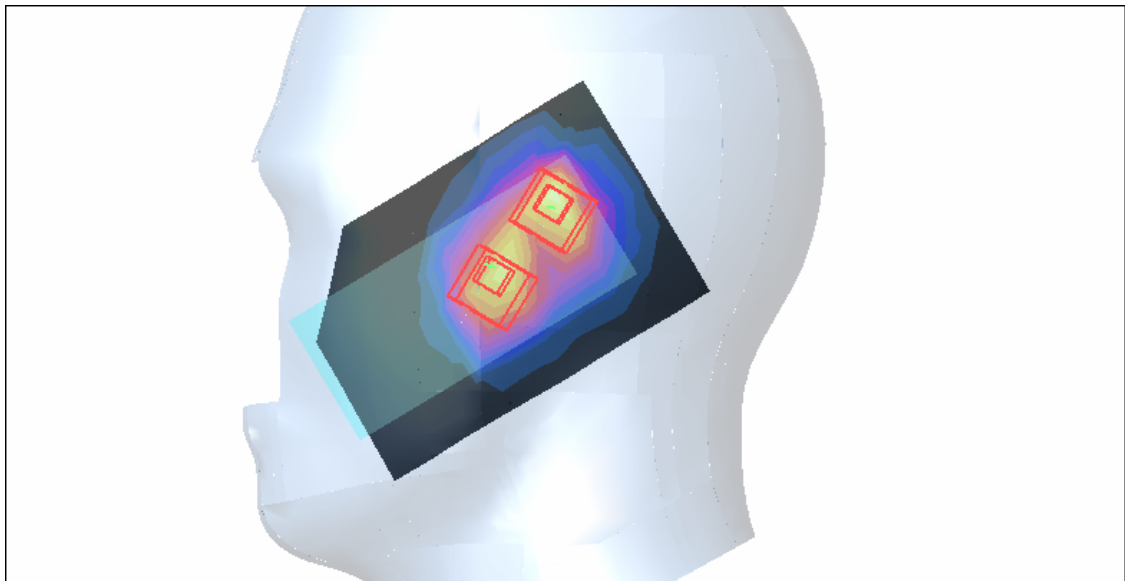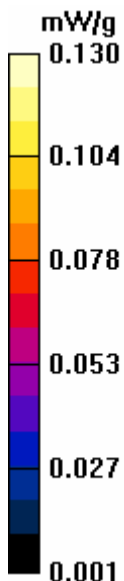

Test Laboratory: Advance Data Technology

Left Head-Cheek-11g-Ch11-Mode 7

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11g ; Frequency: 2462 MHz ; Duty Cycle: 1:1

Phantom: SAM 12 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: OFDM

Antenna type : Internal Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Touch position - High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.106 mW/g

Touch position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.76 V/m

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.112 mW/g


Touch position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.76 V/m

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.118 mW/g

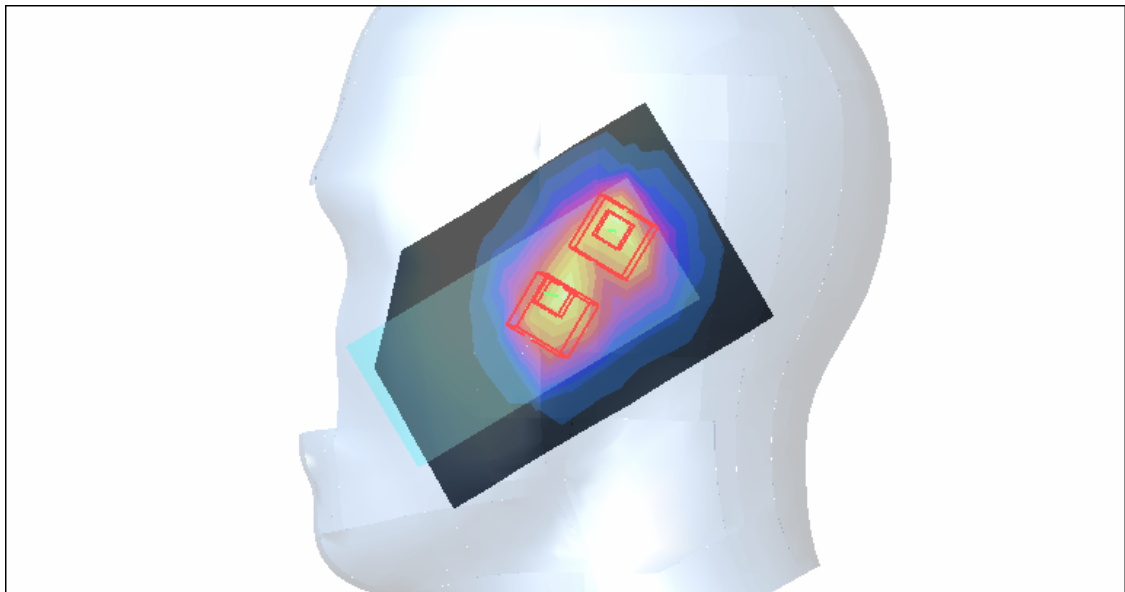

Test Laboratory: Advance Data Technology

Left Head-Tilt-11g-Ch1-Mode 8

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11g ; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OFDM

Antenna type : Internal Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579; Calibrated: 2005/3/23

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.061 mW/g

Tilt position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.81 V/m

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.065 mW/g


Tilt position - Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.81 V/m

Peak SAR (extrapolated) = 0.080 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.033 mW/g

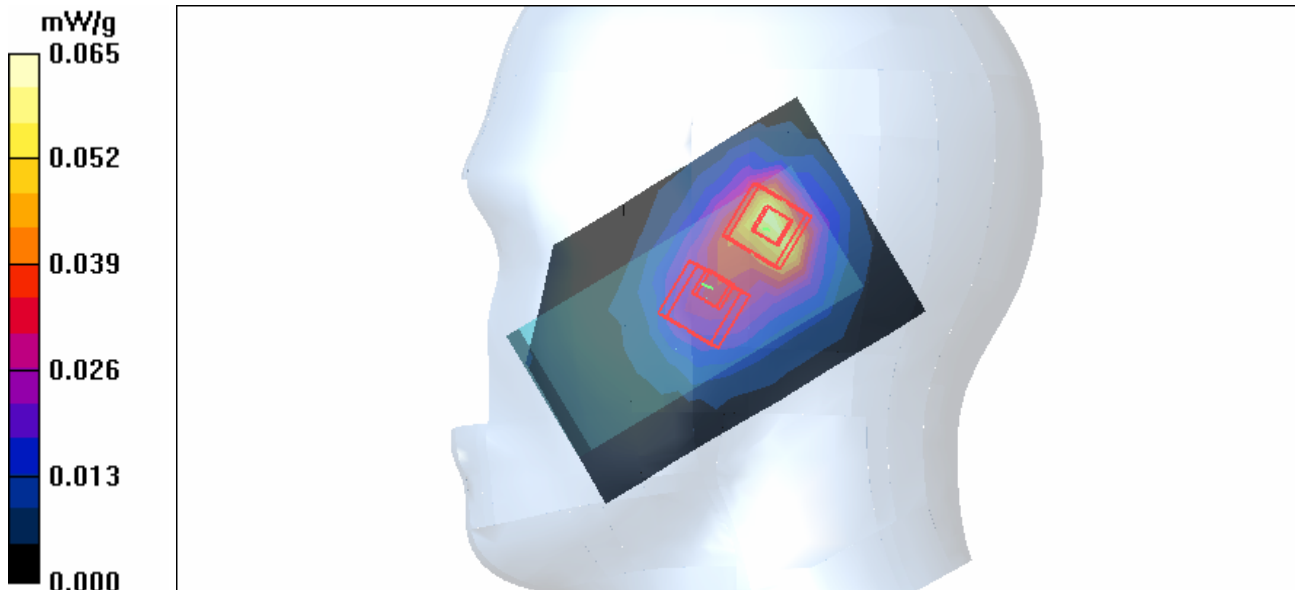

Test Laboratory: Advance Data Technology

Left Head-Tilt-11g-Ch6-Mode 8

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11g ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OFDM

Antenna type : Internal Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579; Calibrated: 2005/3/23

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.087 mW/g

Tilt position - Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.69 V/m

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.089 mW/g

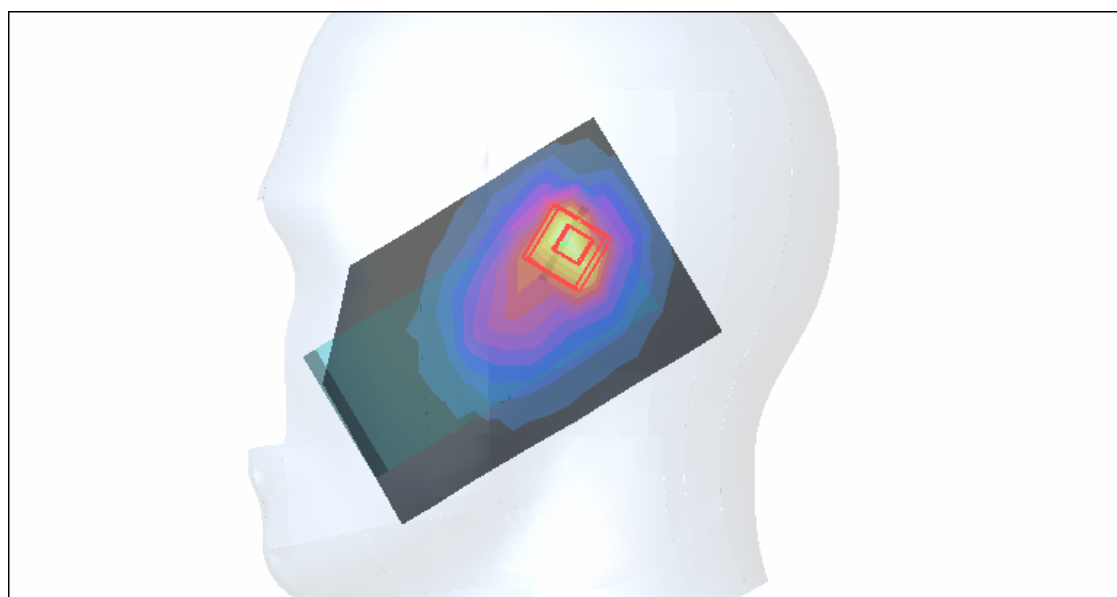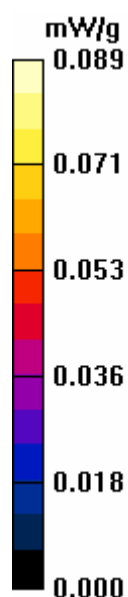

Test Laboratory: Advance Data Technology

Left Head-Tilt-11g-Ch11-Mode 8

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11g ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³ ; Liquid level: 155 mm

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OFDM

Antenna type : Internal Antenna ; Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Tilt position - High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.070 mW/g

Tilt position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.14 V/m

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.073 mW/g


Tilt position - High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.14 V/m

Peak SAR (extrapolated) = 0.059 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

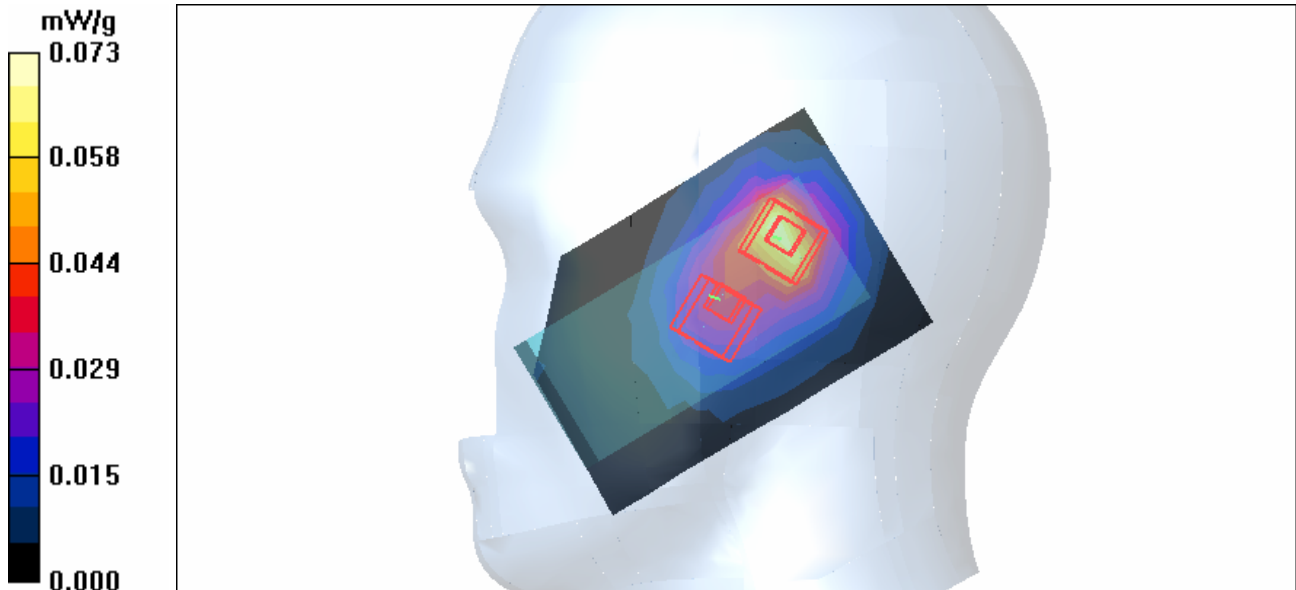

Test Laboratory: Advance Data Technology

BodyWorn-11b-Ch1-Keypad Down-Mode 9

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11b ; Frequency: 2412 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK
Medium: MSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$
 kg/m^3 ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)

Antenna type : Inverted-F Antenna ; Air temp. : 21.7 degrees ; Liquid temp. : 20.5 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579 ; Calibrated: 2005/3/23
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 160

Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.437 mW/g


Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.25 V/m

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.548 mW/g

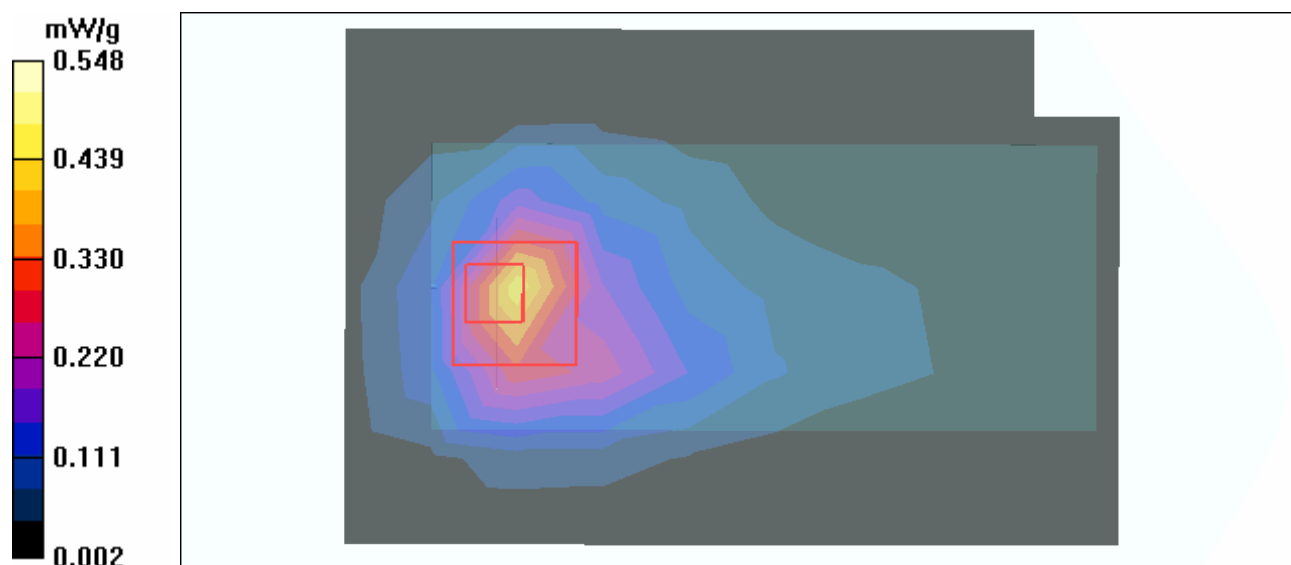

Test Laboratory: Advance Data Technology

BodyWorn-11b-Ch6-Keypad Down-Mode 9

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11b ; Frequency: 2437 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK

Medium: MSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$

kg/m³ ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)

Antenna type : Inverted-F Antenna ; Air temp. : 21.7 degrees ; Liquid temp. : 20.5 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20

- SENDER-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn579 ; Calibrated: 2005/3/23

- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 160

Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.489 mW/g


Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.52 V/m

Peak SAR (extrapolated) = 1.60 W/kg


SAR(1 g) = 0.595 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.705 mW/g

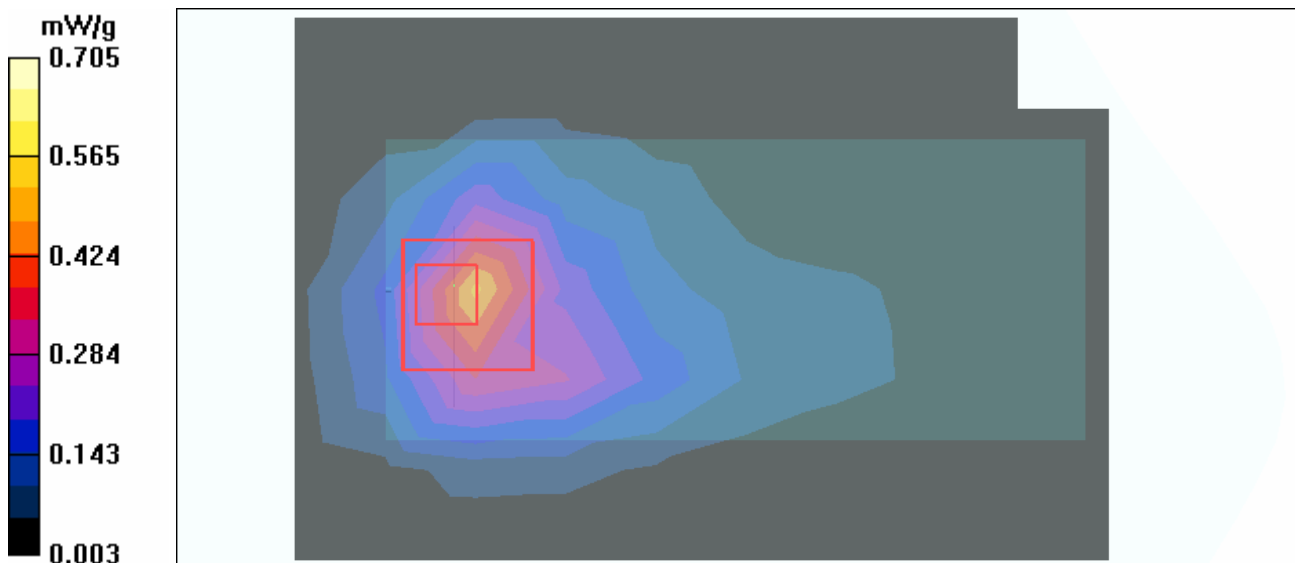

1g/10g Averaged SAR

SAR; Zoom Scan (7x7x7): Value Along Z, X=2, Y=2

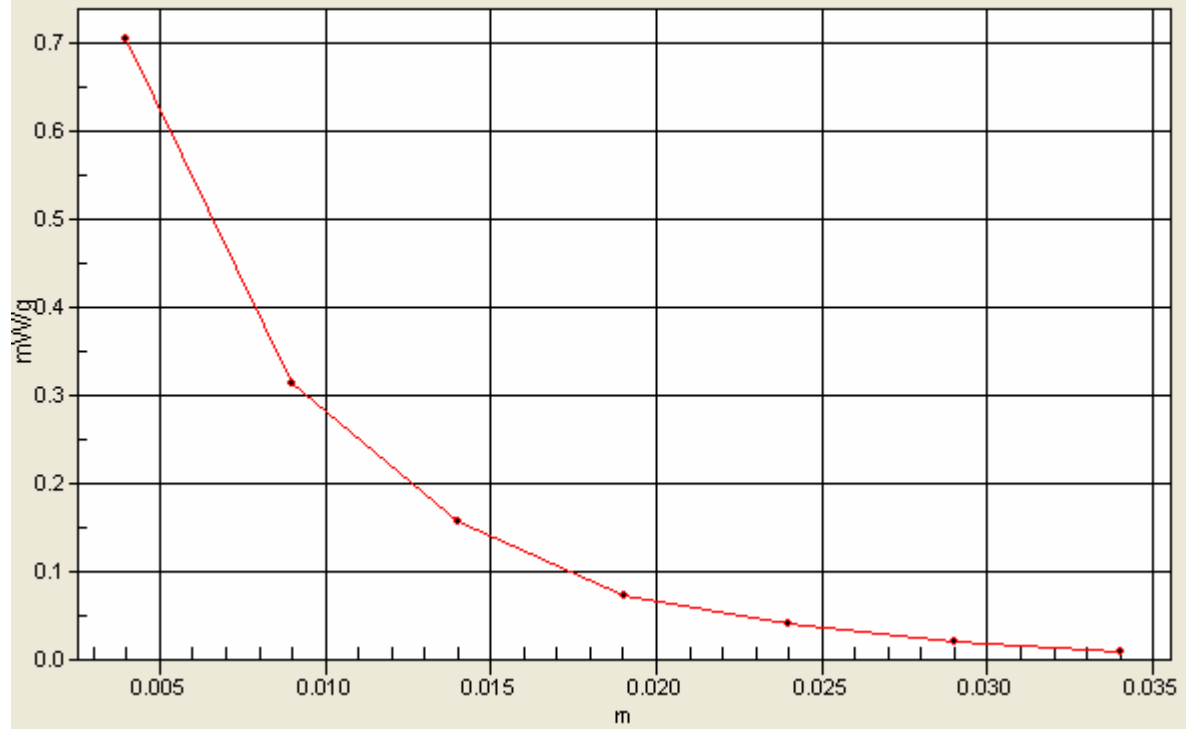

Test Laboratory: Advance Data Technology

BodyWorn-11b-Ch11-Keypad Down-Mode 9

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11b ; Frequency: 2462 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK
Medium: MSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)
Antenna type : Inverted-F Antenna ; Air temp. : 21.7 degrees ; Liquid temp. : 20.5 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579 ; Calibrated: 2005/3/23
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 160

High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.510 mW/g


High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.05 V/m

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.652 mW/g

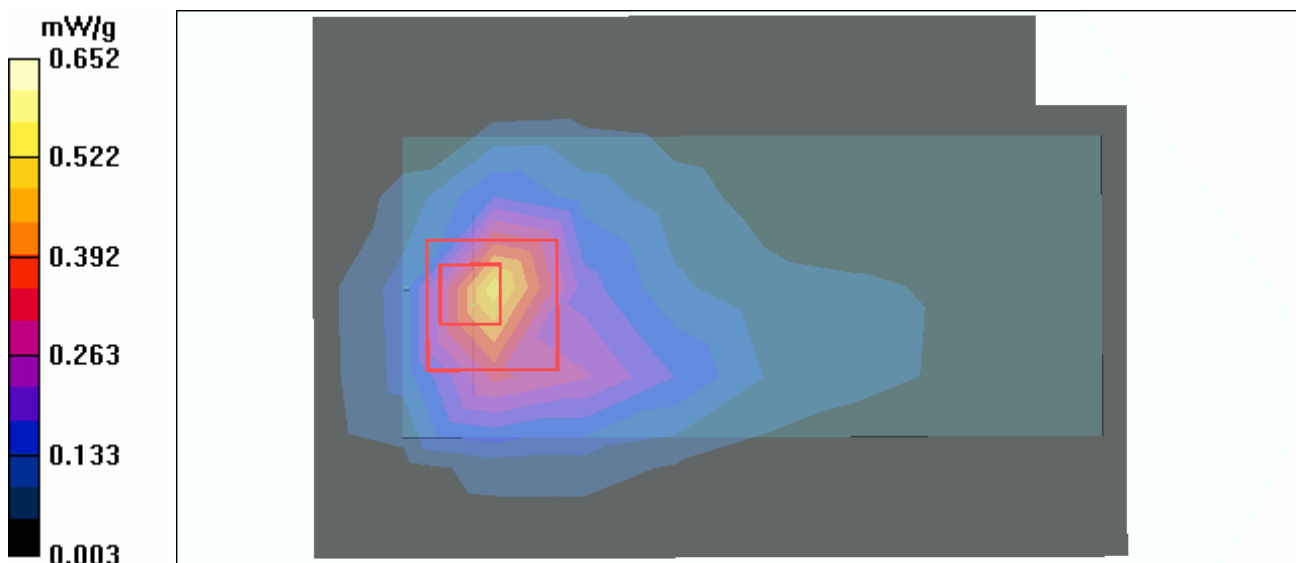

Test Laboratory: Advance Data Technology

BodyWorn-11b-Ch6-Keypad Up-Mode 10

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11b ; Frequency: 2437 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK
Medium: MSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The front side of the EUT to the Phantom)

Antenna type : Inverted-F Antenna ; Air temp. : 21.7 degrees ; Liquid temp. : 20.5 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579 ; Calibrated: 2005/3/23
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 160

Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.337 mW/g


Mid Channel 6 /Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.59 V/m

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.167 mW/g

Maximum value of SAR (measured) = 0.361 mW/g

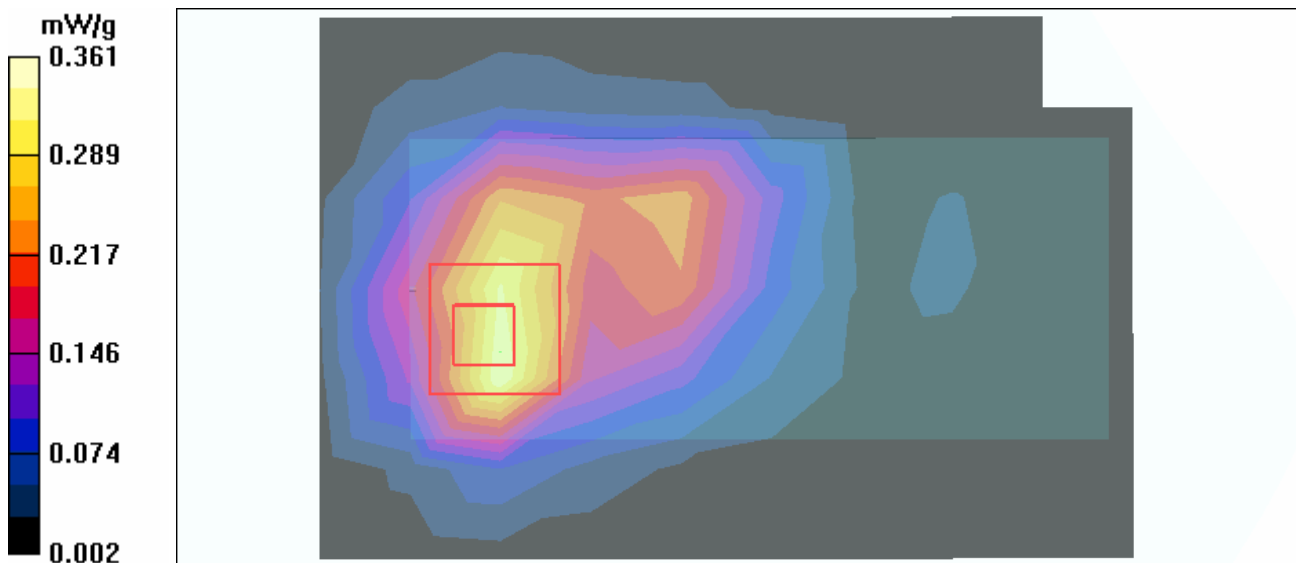

Test Laboratory: Advance Data Technology

BodyWorn-11g-Ch1-Keypad Down-Mode 11

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2412 MHz

Communication System: 802.11g ; Frequency: 2412 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
Medium: MSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)
Antenna type : Inverted-F Antenna ; Air temp. : 21.7 degrees ; Liquid temp. : 20.5 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579 ; Calibrated: 2005/3/23
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 160

Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.209 mW/g


Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.36 V/m

Peak SAR (extrapolated) = 0.687 W/kg

SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.295 mW/g

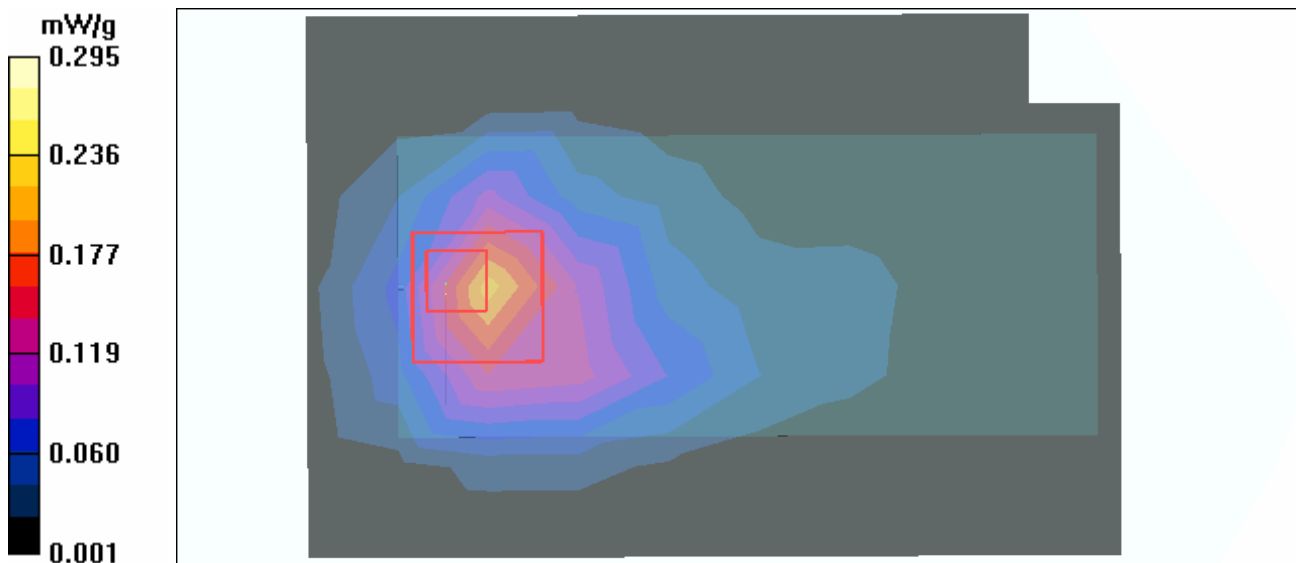

Test Laboratory: Advance Data Technology

BodyWorn-11g-Ch6-Keypad Down-Mode 11

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz

Communication System: 802.11g ; Frequency: 2437 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
Medium: MSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)
Antenna type : Inverted-F Antenna ; Air temp. : 21.7 degrees ; Liquid temp. : 20.5 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579 ; Calibrated: 2005/3/23
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 160

Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.210 mW/g


Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.89 V/m

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

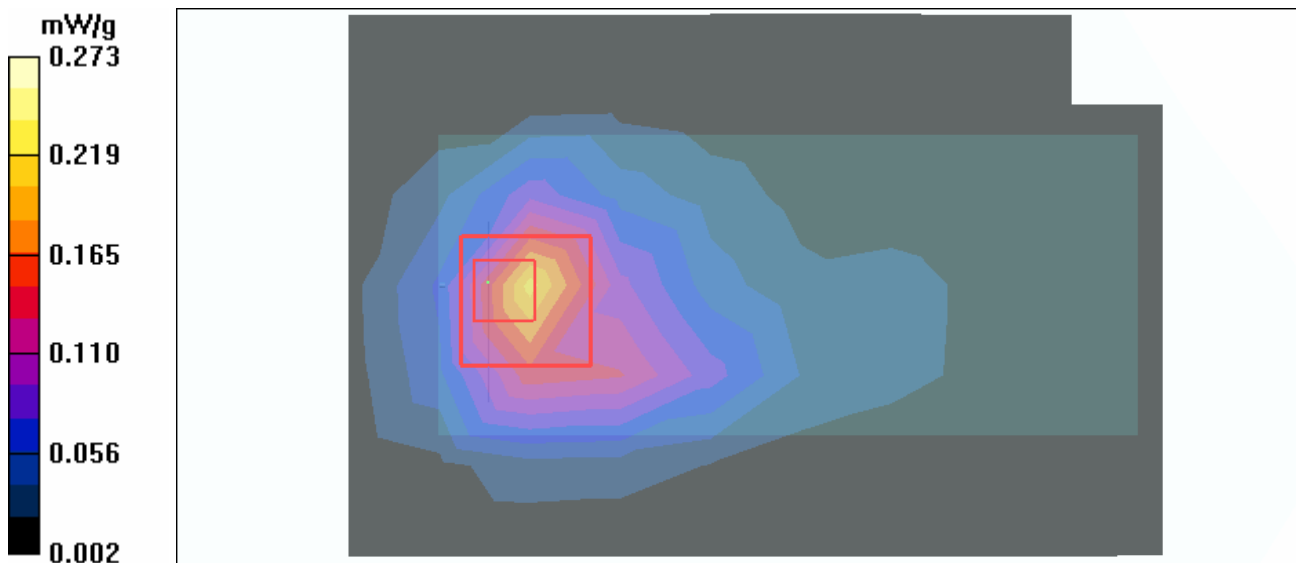

Test Laboratory: Advance Data Technology

BodyWorn-11g-Ch11-Keypad Down-Mode 11

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2462 MHz

Communication System: 802.11g ; Frequency: 2462 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
Medium: MSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)
Antenna type : Inverted-F Antenna ; Air temp. : 21.7 degrees ; Liquid temp. : 20.5 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579 ; Calibrated: 2005/3/23
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 160

High Channel 11/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.219 mW/g


High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.19 V/m

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.269 mW/g

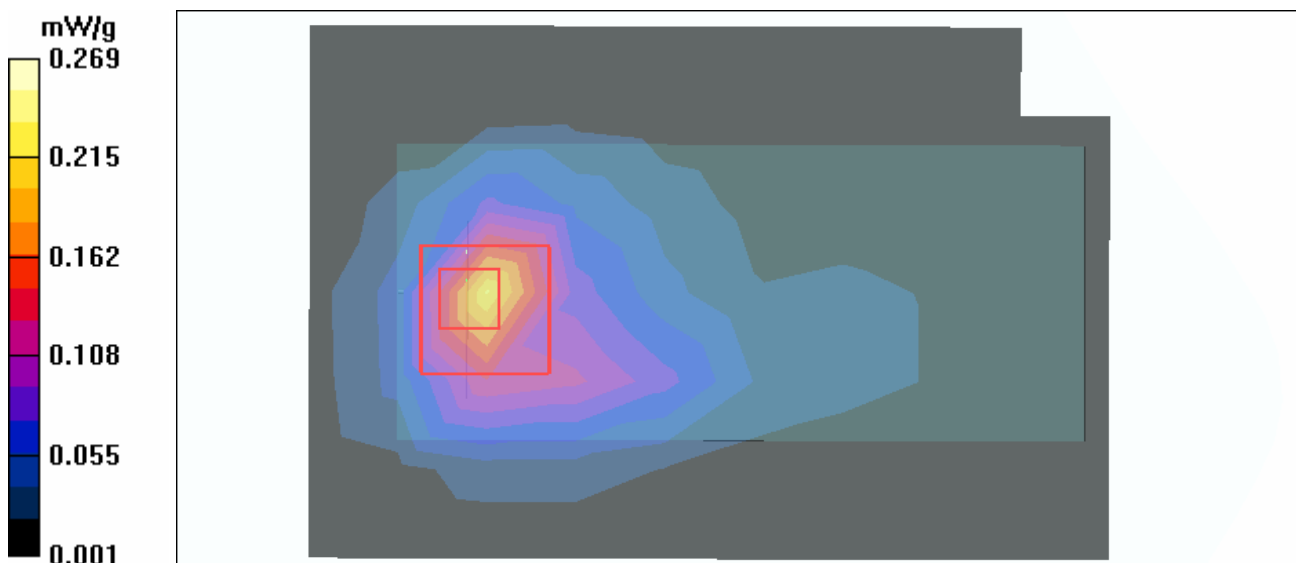

Test Laboratory: Advance Data Technology

System Validation Check-HSL 2450MHz

DUT: Dipole 2450 MHz ; Type: D2450V2 ; Serial: 737 ; Test Frequency: 2450 MHz

Communication System: CW ; Frequency: 2450 MHz; Duty Cycle: 1:1; Modulation type: CW
Medium: HSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³ ; Liquid level : 155 mm
Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 22.0 degrees ; Liquid temp. : 20.9 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.74, 4.74, 4.74) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

d=10mm, Pin=250mW/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 15.8 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.4 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 29.7 W/kg

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.24 mW/g

Maximum value of SAR (measured) = 15.7 mW/g

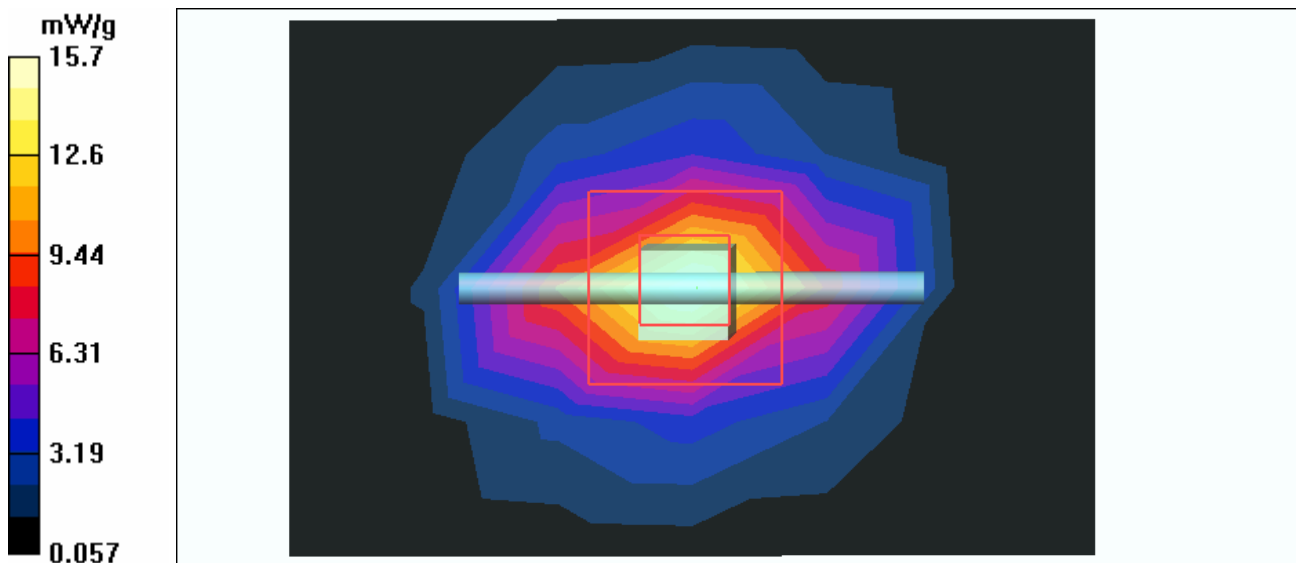

Test Laboratory: Advance Data Technology

System Validation Check-MSL 2450MHz

DUT: Dipole 2450 MHz ; Type: D2450V2 ; Serial: 737 ; Test Frequency: 2450 MHz

Communication System: CW ; Frequency: 2450 MHz; Duty Cycle: 1:1; Modulation type: CW
Medium: MSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 21.7 degrees ; Liquid temp. : 20.5 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- SENDER-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2005/3/23
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

d=10mm, Pin=250mW/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 15.1 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.1 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.01 mW/g

Maximum value of SAR (measured) = 14.9 mW/g

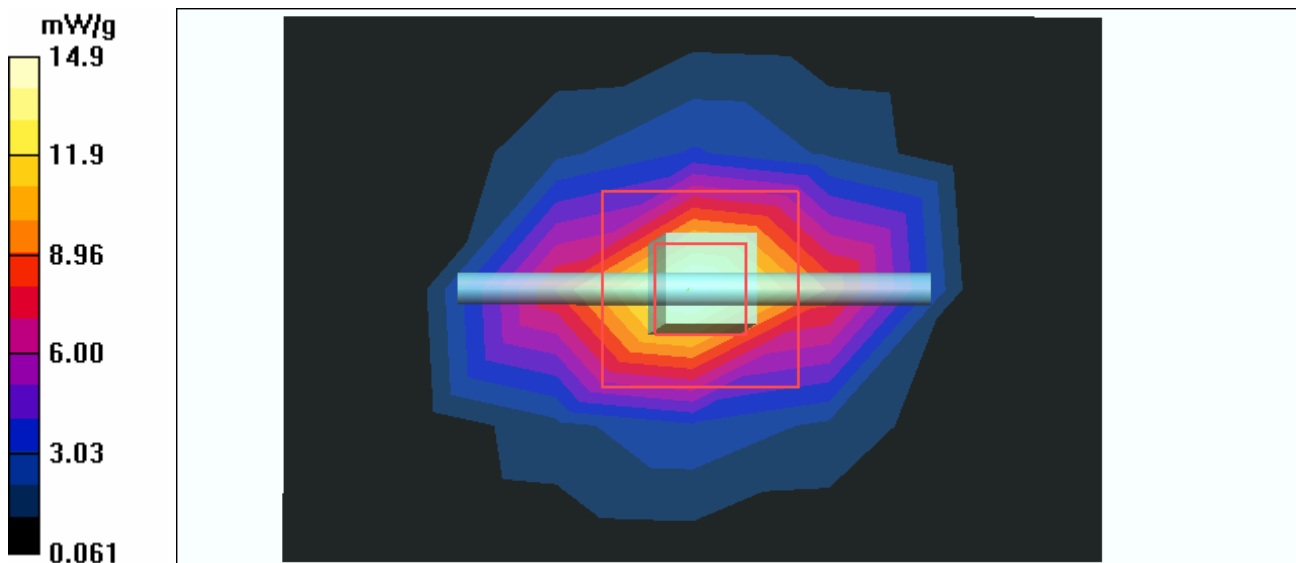

APPENDIX A: TEST DATA

Liquid Level Photo

Tissue MSL2450MHz D=151mm



Test Laboratory: Advance Data Technology

BodyWorn-11b-Ch6-Keypad Down-Mode 1

DUT: WiFi Phone ; Type: VM1185T ; Test Frequency: 2437 MHz


Communication System: 802.11b ; Frequency: 2437 MHz ; Duty Cycle: 1:1
Medium: MSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³ ; Liquid Level : 151 mm
Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: CCK
Separation Distance : 0 mm (The bottom side of the EUT to the Phantom)
Antenna Type : Inverted-F Antenna ; Air Temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2005/8/17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 6/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.479 mW/g

Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.52 V/m
Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.583 mW/g; SAR(10 g) = 0.237 mW/g
Maximum value of SAR (measured) = 0.691 mW/g

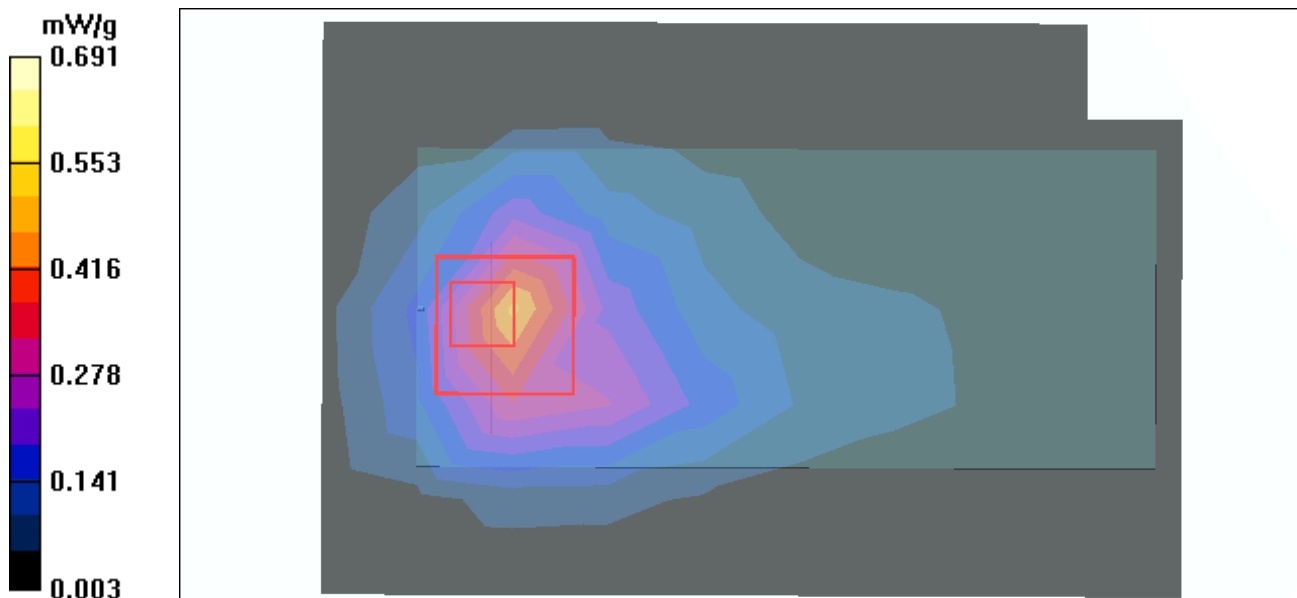

Test Laboratory: Advance Data Technology

BodyWorn-11g-Ch1-Keypad Down-Mode 2

DUT: 2.4GHz Wireless AUDIO SENSOR ; Type: TR-7000 ; Test Frequency: 2412 MHz

Communication System: 802.11g ; Frequency: 2412 MHz ; Duty Cycle: 1:1

Medium: MSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³ ; Liquid Level : 151 mm

Phantom section: Flat Section ; DUT test position : Body ; Modulation Type: OFDM

Separation Distance : 0 mm (The bottom side of the EUT to the Phantom)

Antenna Type : Inverted-F Antenna ; Air Temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2005/8/17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Low Channel 1/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.205 mW/g


Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.36 V/m

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.100 mW/g

Maximum value of SAR (measured) = 0.289 mW/g

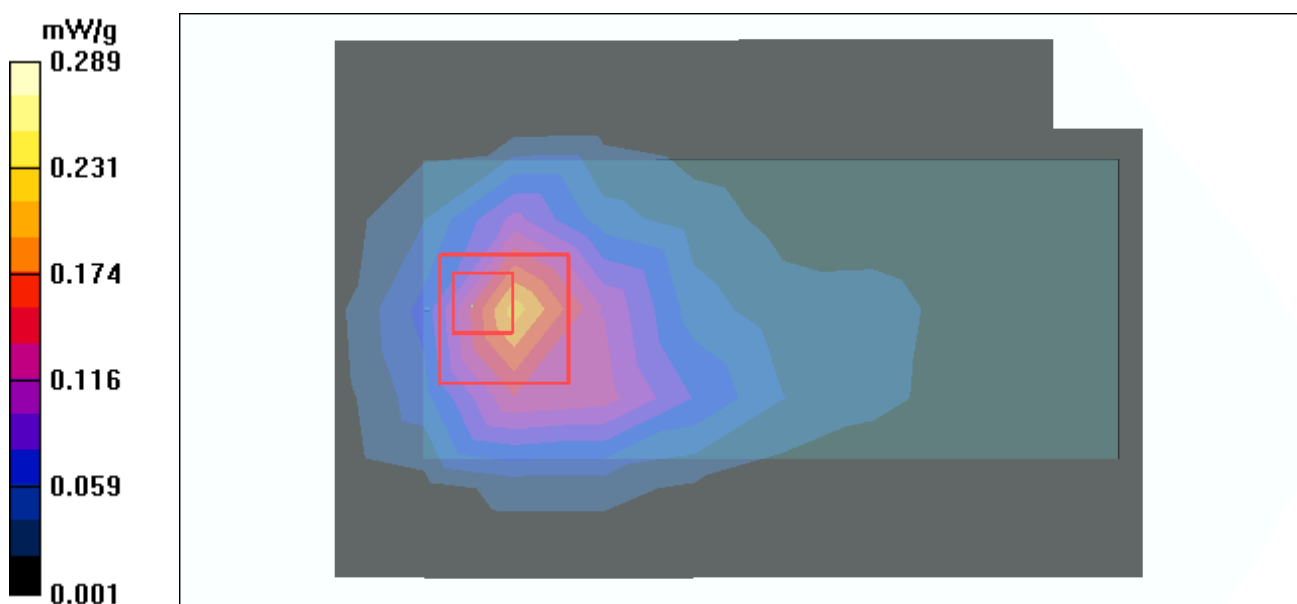

Test Laboratory: Advance Data Technology

System Validation Check-MSL 2450MHz

DUT: Dipole 2450 MHz ; Type: D2450V2 ; Serial: 716 ; Test Frequency: 2450 MHz

Communication System: CW ; Frequency: 2450 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³ ;
 Liquid level : 151 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)
 Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2005/8/17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=10mm, Pin=250mW/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 13.9 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.1 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.81 mW/g

Maximum value of SAR (measured) = 14.2 mW/g

