



# FCC TEST REPORT

**REPORT NO.:** RF910425R01  
**MODEL NO.:** 3CRWE51196  
**RECEIVED:** April 25, 2002  
**TESTED:** April 25 ~ May 3, 2002

**APPLICANT:** ACCTON TECHNOLOGY CORPORATION

**ADDRESS:** No. 1, Creation Rd., III, Science-Based Industrial Park,  
Hsinchu, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14<sup>th</sup> Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 57 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0



## Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS .....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
4	TEST TYPES AND RESULTS .....	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	9
4.1.2	TEST INSTRUMENTS .....	9
4.1.3	TEST PROCEDURES .....	10
4.1.4	TEST SETUP .....	10
4.1.5	EUT OPERATING CONDITIONS.....	11
4.1.6	TEST RESULTS (A) .....	12
4.1.7	TEST RESULTS (B) .....	18
4.2	RADIATED EMISSION MEASUREMENT .....	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	24
4.2.2	TEST INSTRUMENTS .....	25
4.2.3	TEST PROCEDURES .....	26
4.2.4	TEST SETUP .....	27
4.2.5	EUT OPERATING CONDITIONS.....	27
4.2.6	TEST RESULTS (A) .....	28
4.2.7	TEST RESULTS (B) .....	30
4.2.8	TEST RESULT .....	32
4.3	6dB BANDWIDTH MEASUREMENT .....	35
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	35
4.3.2	TEST INSTRUMENTS .....	35
4.3.3	TEST PROCEDURE .....	36
4.3.4	TEST SETUP .....	36
4.3.5	EUT OPERATING CONDITIONS.....	36
4.3.6	TEST RESULTS .....	37
4.4	MAXIMUM PEAK OUTPUT POWER.....	41
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	41
4.4.2	INSTRUMENTS.....	41
4.4.3	TEST PROCEDURES .....	42
4.4.4	TEST SETUP .....	42
4.4.5	EUT OPERATING CONDITIONS.....	42
4.4.6	TEST RESULTS .....	43
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	44
4.5.2	TEST INSTRUMENTS .....	44
4.5.3	TEST PROCEDURE .....	45
4.5.4	TEST SETUP .....	45



4.5.5	EUT OPERATING CONDITION .....	45
4.5.6	TEST RESULTS .....	46
4.6	<b>BAND EDGES MEASUREMENT .....</b>	<b>50</b>
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	50
4.6.2	TEST INSTRUMENTS .....	50
4.6.3	TEST PROCEDURE .....	50
4.6.4	EUT OPERATING CONDITION .....	51
4.6.5	TEST RESULTS .....	51
4.7	<b>ANTENNA REQUIREMENT .....</b>	<b>54</b>
4.7.1	STANDARD APPLICABLE .....	54
4.7.2	ANTENNA CONNECTED CONSTRUCTION .....	54
5	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>55</b>
6	<b>INFORMATION ON THE TESTING LABORATORIES.....</b>	<b>57</b>



## 1 CERTIFICATION

**PRODUCT :** Office Connect Wireless Cable/DSL Gateway  
**BRAND NAME :** 3Com  
**MODEL NO. :** 3CRWE51196  
**APPLICANT :** ACCTON TECHNOLOGY CORPORATION  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from April 27, 2002 to May 3, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY : Gary Chang , DATE: May 9, 2002  
Gary Chang

CHECKED BY : Emily Lu , DATE: May 9, 2002  
Emily Lu

APPROVED BY : Ellis Wu for , DATE: May 9, 2002  
Dr. Alan Lane, Manager

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b>			
<b>Standard Section</b>	<b>Test Type and Limit</b>	<b>Result</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -2.69dBuV at 0.450MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -5.0dBuV at 88.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Office Connect Wireless Cable/DSL Gateway
<b>MODEL NO.</b>	3CRWE51196
<b>POWER SUPPLY</b>	5VDC from AC adapter
<b>MODULATION TYPE</b>	BPSK, QPSK, CCK
<b>RADIO TECHNOLOGY</b>	DSSS
<b>TRANSFER RATE</b>	1/2/5.5/11Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	16.61dBm
<b>ANTENNA TYPE</b>	Dipole antenna
<b>I/O PORTS</b>	RJ45 port
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. Two power adapters were provided to this EUT. Adapter model P48121000A040G is provided only for EUT which frequency is below 1GHz in conducted and radiated emission measurement.

<b>BRAND</b>	3Com
<b>MODEL NO. :</b>	D48121000A040G
<b>INPUT POWER :</b>	120VAC 60Hz 21W
<b>OUTPUT POWER :</b>	12VDC 1000mA

<b>BRAND</b>	SILICORE
<b>MODEL NO. :</b>	SLD81308
<b>INPUT POWER :</b>	120VAC 60Hz 0.2A
<b>OUTPUT POWER :</b>	13VDC 0.8A

2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Test result (A) is for EUT tested with adapter model SLD81308 and test result (B) is for EUT tested with adapter model P48121000A040G.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an Office Connect Wireless Cable/DSL Gateway. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR 47 Part 15, Subpart C. (15.247)**

**ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	HP	Brio BA410	SG12902766	FCC DoC APPROVED
2	COLOR MONITOR	ADI	CM100	026058T10200611 A	FCC DoC APPROVED
3	PS/2 KEYBOARD	BTC	5121W	A00801156	E5XKB5121WTH 0110
4	PS2/MOUSE	LOGITECH	M-S61	HCA12001828	JNZ211403
5	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC APPROVED
6	MODEM	ACEEX	1414	980020510	IFAXDM1414
7	NOTEBOOK	Dell	PP01L	TW-09C748-12800-19O-B220	FCC DoC APPROVED
8	USB 10/100 Fast Ethernet	D-Link	DU-E100	UR15001767	FCC DoC APPROVED

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
4	1.8 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.
5	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
6	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
7	NA
8	NA

**NOTE:** All power cords of the above support units are non shielded (1.8m).





## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.45 – 30	48	-

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2002
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2002
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2003
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA

- NOTE: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. “\*”: These equipment are used for conducted telecom port test only (if tested).

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 TEST SETUP

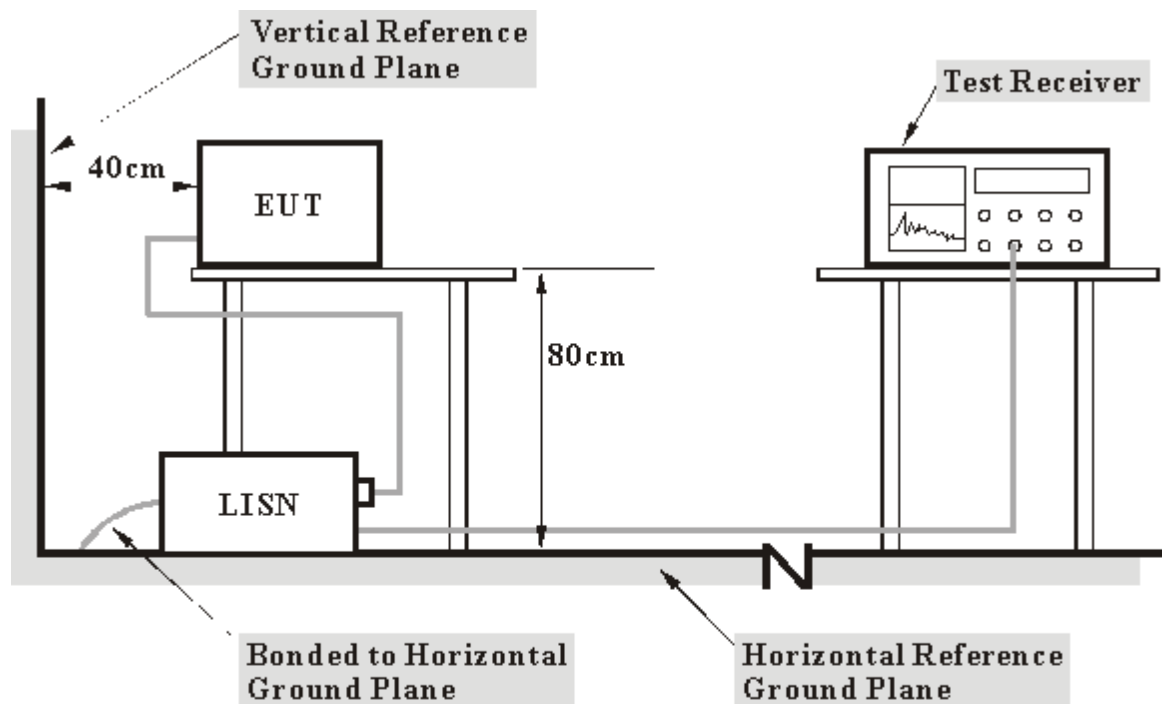

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



#### 4.1.5 EUT OPERATING CONDITIONS

- a. Placed the EUT (with a computer system) on the testing table.
- b. The computer system sent data to EUT by command "PIN" via an RJ 45 cable.
- c. The computer system sent "H" messages to Color Monitor and Monitor displayed "H" patterns on its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- g. The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ 45 cable.
- h. The communication partner sent data to EUT by command "PIN".




4.1.6 TEST RESULTS (A)

<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.450	0.10	45.21	-	45.31	-	48.00	-	-2.69	-
2	0.504	0.10	45.07	-	45.17	-	48.00	-	-2.83	-
3	0.540	0.10	43.73	-	43.83	-	48.00	-	-4.17	-
4	0.639	0.10	38.46	-	38.56	-	48.00	-	-9.44	-
5	4.923	0.33	38.26	-	38.59	-	48.00	-	-9.41	-
6	13.475	0.71	29.42	-	30.13	-	48.00	-	-17.87	-

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

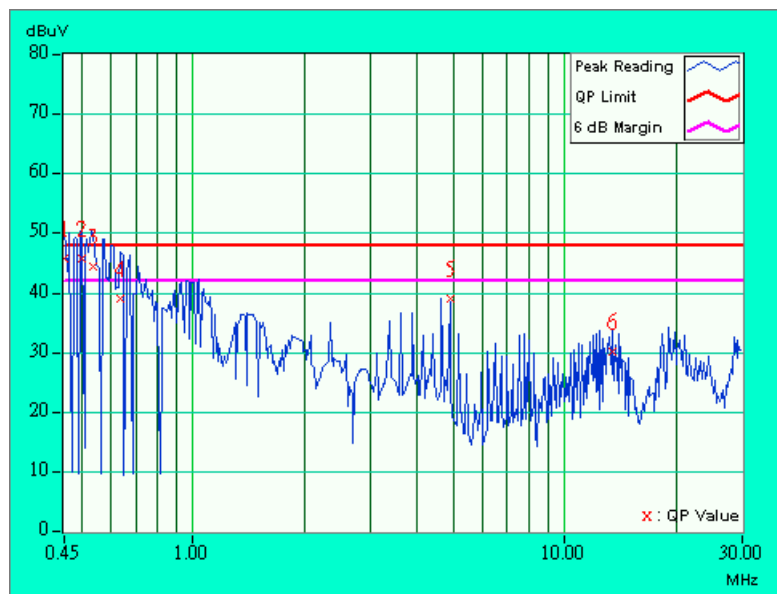




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.450	0.10	36.20	-	36.30	-	48.00	-	-11.70	-
2	0.918	0.10	31.16	-	31.26	-	48.00	-	-16.74	-
3	1.347	0.10	28.29	-	28.39	-	48.00	-	-19.61	-
4	1.734	0.10	26.46	-	26.56	-	48.00	-	-21.44	-
5	7.772	0.36	37.06	-	37.42	-	48.00	-	-10.58	-
6	12.437	0.50	35.14	-	35.64	-	48.00	-	-12.36	-

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

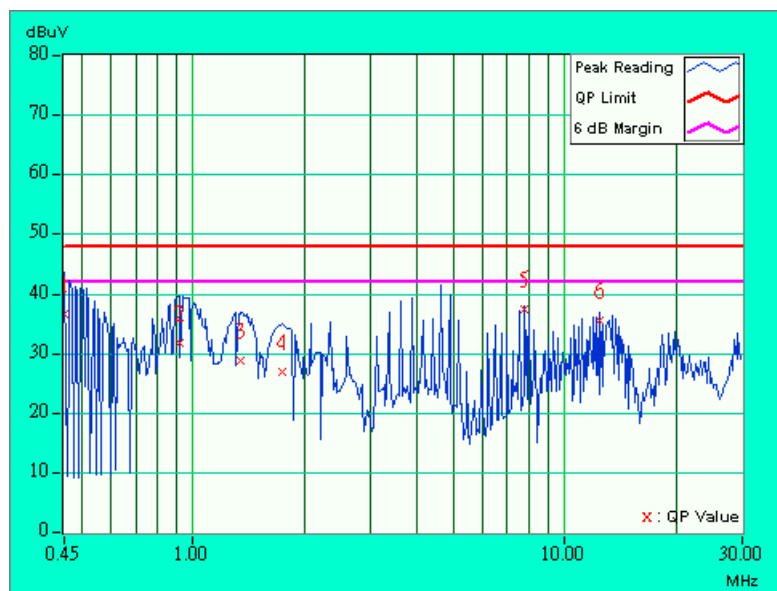




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.468	0.10	44.26	-	44.36	-	48.00	-	-3.64	-
2	0.534	0.10	43.59	-	43.69	-	48.00	-	-4.31	-
3	0.564	0.10	42.51	-	42.61	-	48.00	-	-5.39	-
4	0.954	0.10	35.40	-	35.50	-	48.00	-	-12.50	-
5	4.662	0.32	38.96	-	39.28	-	48.00	-	-8.72	-
6	13.475	0.71	29.96	-	30.67	-	48.00	-	-17.33	-

- Remarks:
1. "": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

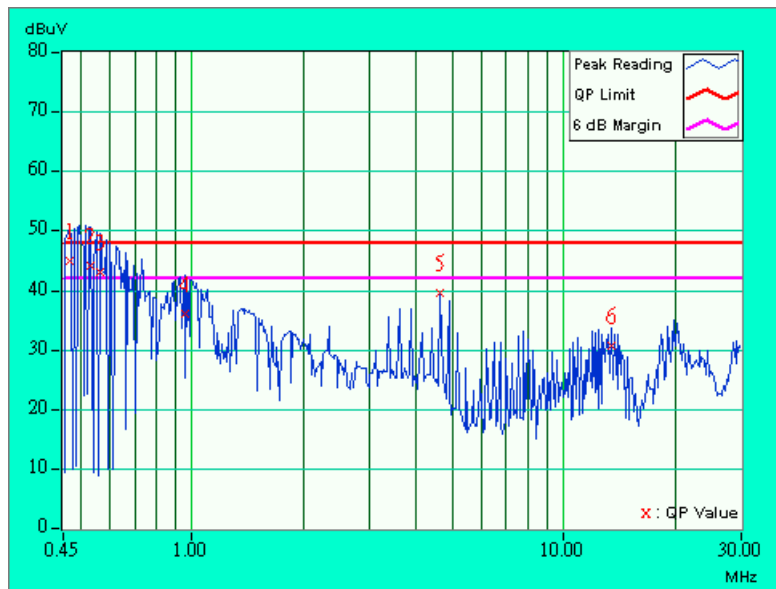




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.462	0.10	35.68	-	35.78	-	48.00	-	-12.22	-
2	0.516	0.10	34.70	-	34.80	-	48.00	-	-13.20	-
3	0.972	0.10	31.67	-	31.77	-	48.00	-	-16.23	-
4	1.347	0.10	27.98	-	28.08	-	48.00	-	-19.92	-
5	12.182	0.49	30.61	-	31.10	-	48.00	-	-16.90	-
6	19.709	0.79	31.91	-	32.70	-	48.00	-	-15.30	-

- Remarks:
1. "": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

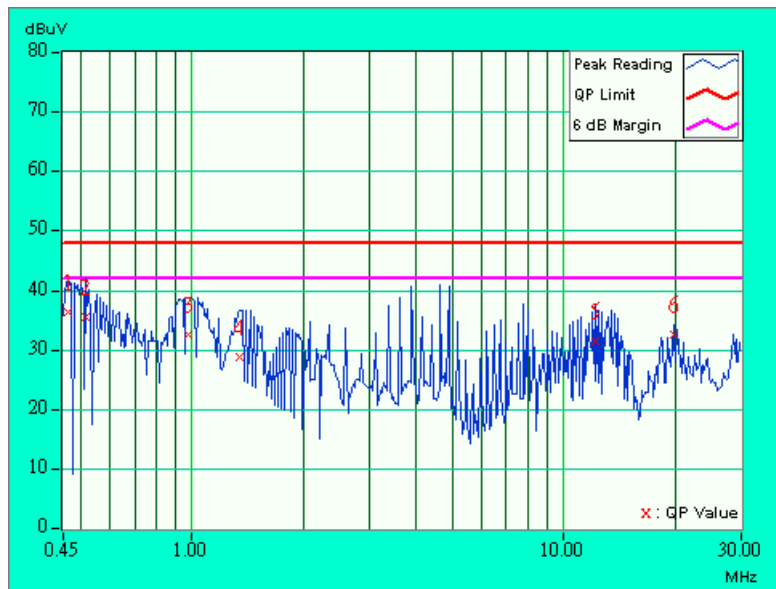




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.471	0.10	43.46	-	43.56	-	48.00	-	-4.44	-
2	0.516	0.10	43.16	-	43.26	-	48.00	-	-4.74	-
3	0.552	0.10	41.98	-	42.08	-	48.00	-	-5.92	-
4	1.032	0.10	33.07	-	33.17	-	48.00	-	-14.83	-
5	13.727	0.72	32.10	-	32.82	-	48.00	-	-15.18	-
6	19.709	0.99	33.27	-	34.26	-	48.00	-	-13.74	-

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

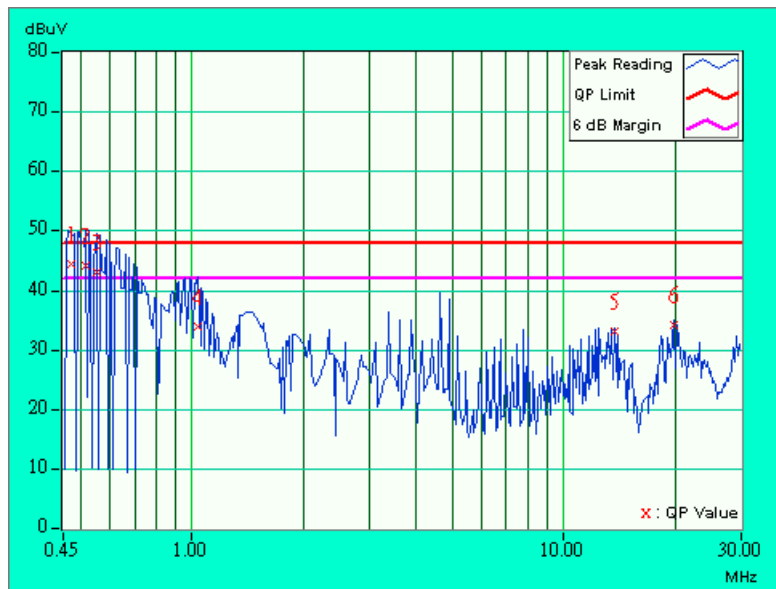






<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.456	0.10	35.38	-	35.48	-	48.00	-	-12.52	-
2	1.041	0.10	29.43	-	29.53	-	48.00	-	-18.47	-
3	1.347	0.10	27.68	-	27.78	-	48.00	-	-20.22	-
4	4.920	0.32	39.27	-	39.59	-	48.00	-	-8.41	-
5	13.469	0.54	34.89	-	35.43	-	48.00	-	-12.57	-
6	19.709	0.79	32.62	-	33.41	-	48.00	-	-14.59	-

- Remarks:
1. "\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

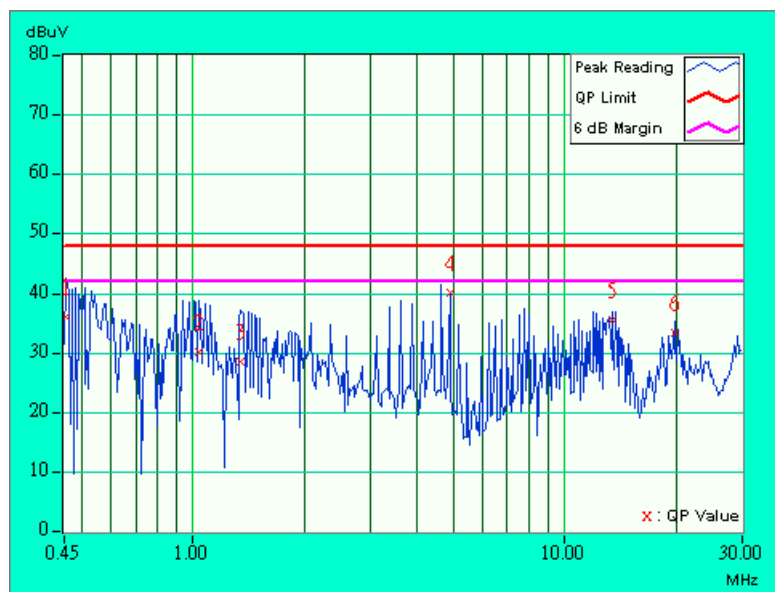




4.1.7 TEST RESULTS (B)

<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.458	0.11	43.47	-	43.58	-	48.00	-	-4.42	-
2	0.473	0.11	42.31	-	42.42	-	48.00	-	-5.58	-
3	0.489	0.11	40.81	-	40.92	-	48.00	-	-7.08	-
4	0.688	0.15	32.38	-	32.53	-	48.00	-	-15.47	-
5	0.930	0.19	32.26	-	32.45	-	48.00	-	-15.55	-
6	1.418	0.20	28.18	-	28.38	-	48.00	-	-19.62	-
7	25.965	1.22	28.91	-	30.13	-	48.00	-	-17.87	-

- Remarks:
1. "": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

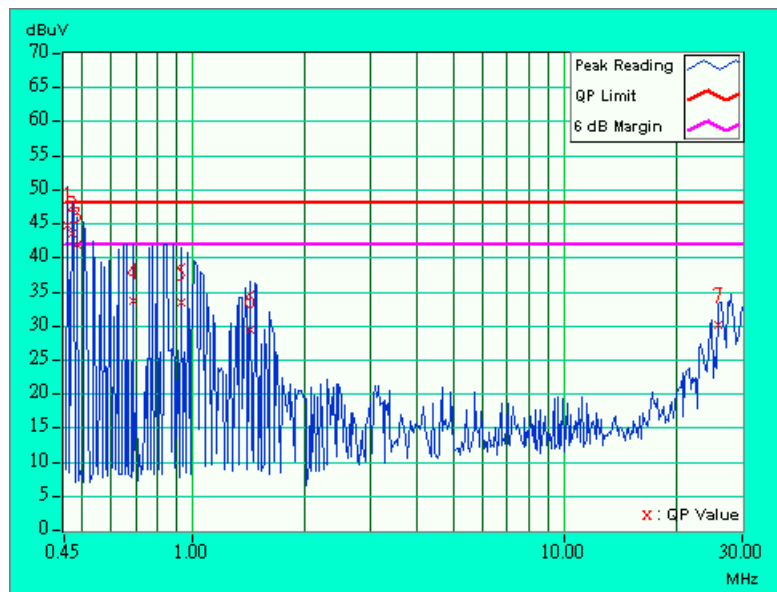




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.462	0.11	44.48	-	44.59	-	48.00	-	-3.41	-
2	0.489	0.11	43.31	-	43.42	-	48.00	-	-4.58	-
3	0.497	0.12	42.80	-	42.92	-	48.00	-	-5.08	-
4	1.816	0.20	19.25	-	19.45	-	48.00	-	-28.55	-
5	1.816	0.20	19.17	-	19.37	-	48.00	-	-28.63	-
6	25.961	0.72	26.31	-	27.03	-	48.00	-	-20.97	-

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

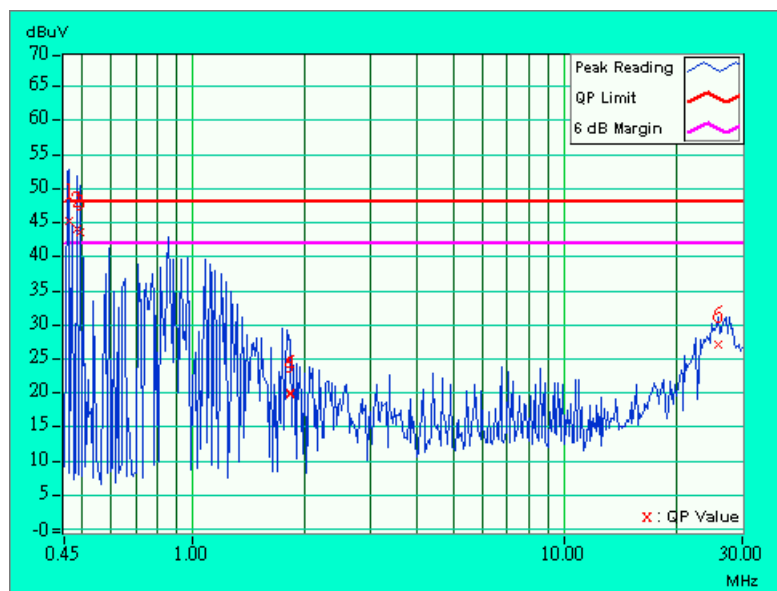




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.454	0.11	42.05	-	42.16	-	48.00	-	-5.84	-
2	0.477	0.11	41.12	-	41.23	-	48.00	-	-6.77	-
3	0.563	0.13	31.40	-	31.53	-	48.00	-	-16.47	-
4	1.457	0.20	28.08	-	28.28	-	48.00	-	-19.72	-
5	4.742	0.42	5.21	-	5.63	-	48.00	-	-42.37	-
6	25.965	1.22	26.43	-	27.65	-	48.00	-	-20.35	-

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

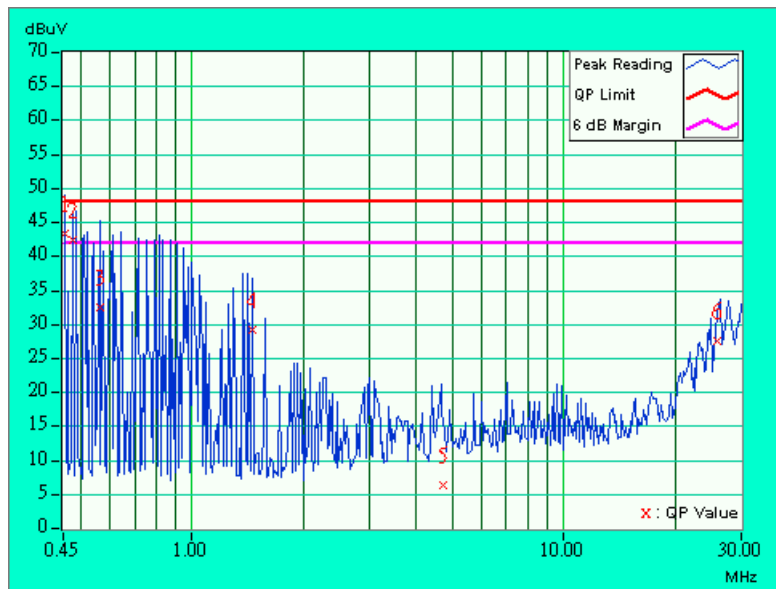




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.470	0.11	44.67	-	44.78	-	48.00	-	-3.22	-
2	0.606	0.13	33.11	-	33.24	-	48.00	-	-14.76	-
3	1.621	0.20	13.20	-	13.40	-	48.00	-	-34.60	-
4	4.672	0.31	20.86	-	21.17	-	48.00	-	-26.83	-
5	15.152	0.51	7.26	-	7.77	-	48.00	-	-40.23	-
6	27.508	0.75	15.28	-	16.03	-	48.00	-	-31.97	-

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

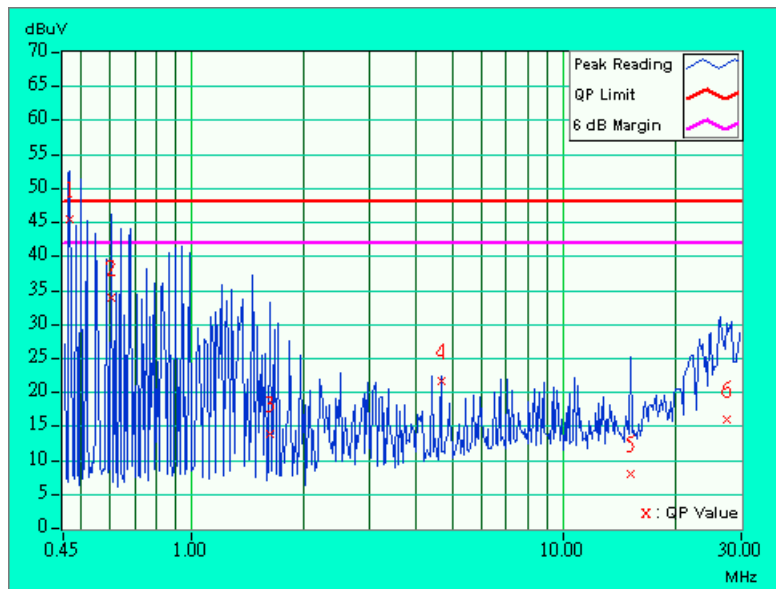




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.450	0.11	42.38	-	42.49	-	48.00	-	-5.51	-
2	0.485	0.11	39.06	-	39.17	-	48.00	-	-8.83	-
3	0.630	0.14	31.24	-	31.38	-	48.00	-	-16.62	-
4	0.852	0.18	31.21	-	31.39	-	48.00	-	-16.61	-
5	1.266	0.20	22.94	-	23.14	-	48.00	-	-24.86	-
6	26.488	1.23	29.04	-	30.27	-	48.00	-	-17.73	-

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

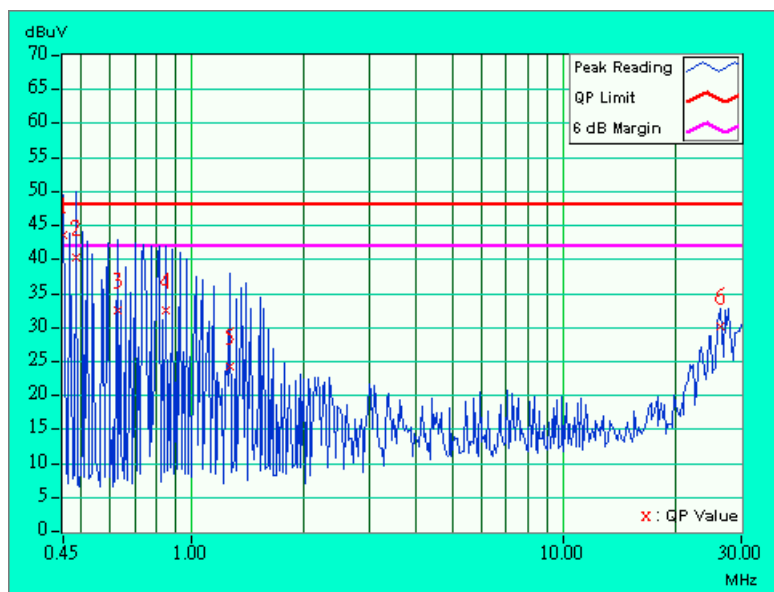




<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.462	0.11	45.73	-	45.84	-	48.00	-	-2.16	-
2	0.477	0.11	45.21	-	45.32	-	48.00	-	-2.68	-
3	0.477	0.11	45.11	-	45.22	-	48.00	-	-2.78	-
4	0.477	0.11	45.03	-	45.14	-	48.00	-	-2.86	-
5	0.497	0.12	44.05	-	44.17	-	48.00	-	-3.83	-
6	0.516	0.12	42.87	-	42.99	-	48.00	-	-5.01	-
7	0.532	0.12	41.60	-	41.72	-	48.00	-	-6.28	-
8	0.532	0.12	41.44	-	41.56	-	48.00	-	-6.44	-
9	0.559	0.13	39.03	-	39.16	-	48.00	-	-8.84	-
10	0.743	0.16	20.50	-	20.66	-	48.00	-	-27.34	-
11	1.297	0.20	27.01	-	27.21	-	48.00	-	-20.79	-
12	25.094	0.70	12.56	-	13.26	-	48.00	-	-34.74	-

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

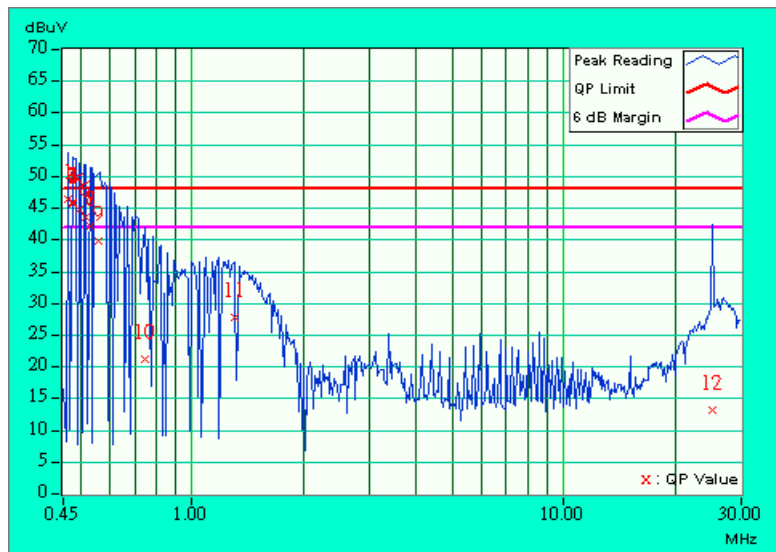



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.





## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
* HP Preamplifier	8447D	2944A08485	May 7, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 8, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
* Antenna (Horn)	BBHA9120-D	D130	July 10, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
VCCI Site Registration No.	Site 5	R-1039	NA
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI : R-1039		

**NOTE:** 1.The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.

2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3.“\*” = These equipments are used for the final measurement.




#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 TEST SETUP

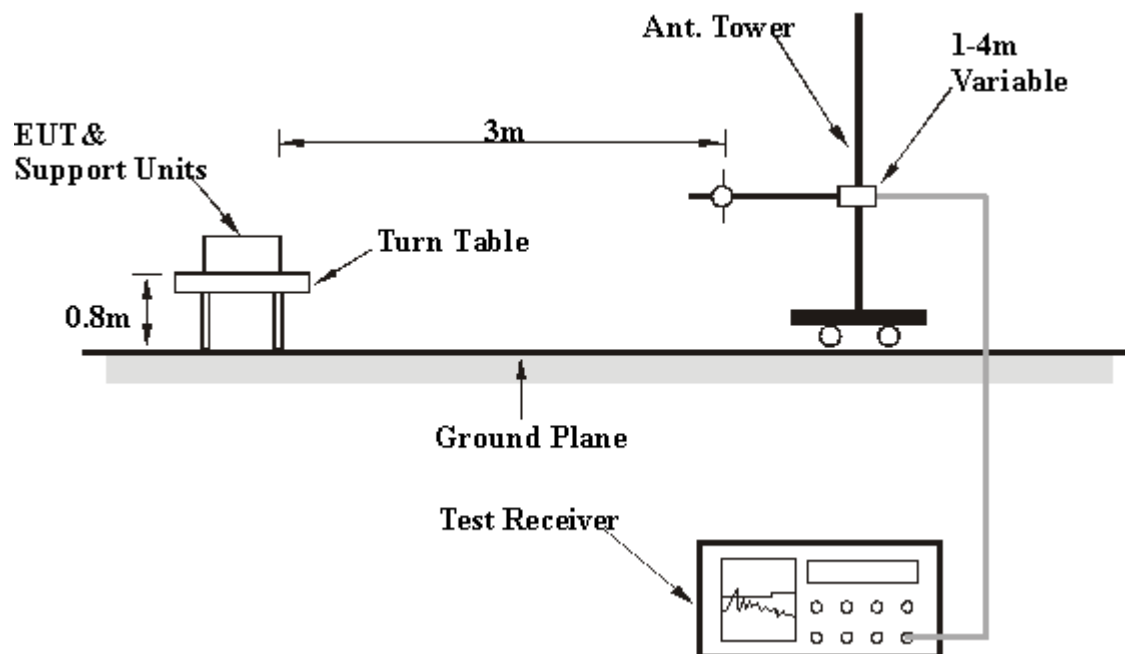

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.



4.2.6 TEST RESULTS (A)

<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	125.00	35.0 QP	43.50	-8.50	1.44H	246	22.43	11.47	1.10	0.00	-12.57
2	250.00	36.0 QP	46.00	-10.00	1.34H	266	22.31	12.02	1.66	0.00	-13.69
3	264.00	36.0 QP	46.00	-10.00	1.08H	43	21.42	12.89	1.70	0.00	-14.59
4	375.00	34.0 QP	46.00	-12.00	1.08H	132	16.73	15.13	2.14	0.00	-17.27
5	400.00	34.2 QP	46.00	-11.80	1.17H	95	15.85	16.11	2.24	0.00	-18.36
6	425.00	33.0 QP	46.00	-13.00	1.06H	206	14.44	16.24	2.33	0.00	-18.56
7	500.00	37.0 QP	46.00	-9.00	1.02H	3	17.24	17.26	2.50	0.00	-19.77
8	525.00	33.0 QP	46.00	-13.00	1.02H	174	12.82	17.59	2.59	0.00	-20.18
9	550.00	32.0 QP	46.00	-14.00	1.02H	5	11.40	17.93	2.68	0.00	-20.60
10	600.00	35.0 QP	46.00	-11.00	1.46H	359	13.56	18.61	2.83	0.00	-21.44
11	600.00	34.0 QP	46.00	-12.00	1.23H	35	12.56	18.61	2.83	0.00	-21.44
12	675.00	33.0 QP	46.00	-13.00	1.27H	358	10.64	19.27	3.09	0.00	-22.36
13	748.00	28.0 QP	46.00	-18.00	1.30H	5	4.60	20.14	3.26	0.00	-23.40
14	750.00	35.0 QP	46.00	-11.00	1.26H	2	11.56	20.18	3.26	0.00	-23.44
15	875.00	34.0 QP	46.00	-12.00	1.16H	44	9.83	20.63	3.54	0.00	-24.17

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
  - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  - 3 The other emission levels were very low against the limit.
  - 4 Margin value = Emission level - Limit value



<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	75.00	33.0 QP	40.00	-7.00	1.67V	16	25.29	6.87	0.84	0.00	-7.71
2	88.00	35.0 QP	40.00	-5.00	1.11V	336	25.87	8.24	0.89	0.00	-9.13
3	132.00	31.0 QP	43.50	-12.50	1.17V	103	18.71	11.16	1.13	0.00	-12.29
4	240.00	35.0 QP	46.00	-11.00	1.22V	117	21.97	11.41	1.62	0.00	-13.03
5	250.00	34.2 QP	46.00	-11.80	1.16V	153	20.51	12.02	1.66	0.00	-13.69
6	375.00	33.0 QP	46.00	-13.00	1.16V	139	15.73	15.13	2.14	0.00	-17.27
7	500.00	36.0 QP	46.00	-10.00	1.81V	356	16.24	17.26	2.50	0.00	-19.76
8	525.00	34.2 QP	46.00	-11.80	1.00V	185	14.02	17.59	2.59	0.00	-20.18
9	550.00	33.0 QP	46.00	-13.00	1.04V	49	12.40	17.93	2.68	0.00	-20.61
10	570.00	32.0 QP	46.00	-14.00	1.73V	3	11.04	18.22	2.74	0.00	-20.96
11	596.00	31.0 QP	46.00	-15.00	2.04V	357	9.64	18.54	2.82	0.00	-21.37
12	600.00	37.0 QP	46.00	-9.00	1.83V	3	15.56	18.61	2.83	0.00	-21.44
13	625.00	32.0 QP	46.00	-14.00	1.02V	360	10.17	18.91	2.92	0.00	-21.83
14	643.00	33.0 QP	46.00	-13.00	1.94V	286	10.85	19.15	3.00	0.00	-22.15
15	646.00	34.0 QP	46.00	-12.00	1.78V	180	11.82	19.18	3.00	0.00	-22.18
16	650.00	31.0 QP	46.00	-15.00	1.76V	3	8.75	19.23	3.02	0.00	-22.25
17	675.00	33.0 QP	46.00	-13.00	1.43V	229	10.64	19.27	3.09	0.00	-22.36
18	750.00	33.4 QP	46.00	-12.60	1.20V	307	9.96	20.18	3.26	0.00	-23.45
19	800.00	31.4 QP	46.00	-14.60	1.06V	314	7.39	20.69	3.32	0.00	-24.02
20	875.00	30.8 QP	46.00	-15.20	1.80V	140	6.63	20.63	3.54	0.00	-24.18

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
  - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  - 3 The other emission levels were very low against the limit.
  - 4 Margin value = Emission level - Limit value



4.2.7 TEST RESULTS (B)

<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	125.00	32.1 QP	43.50	-11.40	1.00H	284	46.40	11.47	1.23	27.00	14.30
2	250.00	34.9 QP	46.00	-11.10	1.35H	105	48.15	12.02	1.73	27.00	13.25
3	264.00	33.8 QP	46.00	-12.20	1.10H	123	46.18	12.89	1.73	27.00	12.38
4	375.00	35.4 QP	46.00	-10.60	1.15H	217	45.13	15.13	2.14	27.00	9.74
5	400.00	32.7 QP	46.00	-13.30	1.24H	335	41.42	16.11	2.17	27.00	8.73
6	425.00	31.1 QP	46.00	-14.90	1.00H	216	39.61	16.24	2.26	27.00	8.52
7	500.00	38.3 QP	46.00	-7.70	1.05H	61	45.55	17.26	2.49	27.00	7.25
8	525.00	32.5 QP	46.00	-13.50	1.17H	161	39.30	17.59	2.61	27.00	6.81
9	550.00	31.2 QP	46.00	-14.80	1.09H	256	37.55	17.93	2.72	27.00	6.36
10	600.00	32.6 QP	46.00	-13.40	1.09H	91	38.14	18.61	2.85	27.00	5.54
11	650.00	28.4 QP	46.00	-17.60	1.70H	157	33.14	19.23	3.03	27.00	4.75
12	675.00	29.7 QP	46.00	-16.30	1.26H	329	34.29	19.27	3.14	27.00	4.60
13	748.00	26.8 QP	46.00	-19.20	1.44H	313	30.32	20.14	3.34	27.00	3.53
14	750.00	34.3 QP	46.00	-11.70	1.25H	191	37.78	20.18	3.34	27.00	3.49
15	875.00	35.2 QP	46.00	-10.80	1.10H	51	37.93	20.63	3.63	27.00	2.74

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
  - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  - 3 The other emission levels were very low against the limit.
  - 4 Margin value = Emission level - Limit value



<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	75.00	34.6 QP	40.00	-5.40	1.36V	119	53.65	6.87	1.08	27.00	19.05
2	88.00	33.9 QP	40.00	-6.10	1.52V	24	51.59	8.24	1.06	27.00	17.70
3	132.00	28.9 QP	43.50	-14.60	1.25V	161	43.50	11.16	1.24	27.00	14.60
4	240.00	36.1 QP	46.00	-9.90	1.00V	282	50.02	11.41	1.67	27.00	13.92
5	250.00	36.8 QP	46.00	-9.20	1.12V	206	50.05	12.02	1.73	27.00	13.25
6	375.00	31.1 QP	46.00	-14.90	1.04V	73	40.83	15.13	2.14	27.00	9.73
7	500.00	37.2 QP	46.00	-8.80	2.02V	142	44.45	17.26	2.49	27.00	7.25
8	525.00	35.9 QP	46.00	-10.10	1.04V	210	42.70	17.59	2.61	27.00	6.80
9	550.00	36.7 QP	46.00	-9.30	1.14V	74	43.05	17.93	2.72	27.00	6.36
10	570.00	27.6 QP	46.00	-18.40	1.79V	312	33.60	18.22	2.78	27.00	6.00
11	596.00	28.4 QP	46.00	-17.60	1.79V	310	34.02	18.54	2.84	27.00	5.62
12	600.00	36.5 QP	46.00	-9.50	1.44V	29	42.04	18.61	2.85	27.00	5.55
13	625.00	29.3 QP	46.00	-16.70	1.05V	126	34.45	18.91	2.94	27.00	5.15
14	643.00	33.3 QP	46.00	-12.70	2.32V	301	38.14	19.15	3.01	27.00	4.84
15	650.00	32.4 QP	46.00	-13.60	1.66V	255	37.14	19.23	3.03	27.00	4.74
16	675.00	31.4 QP	46.00	-14.60	1.45V	109	35.99	19.27	3.14	27.00	4.59
17	750.00	34.8 QP	46.00	-11.20	1.35V	219	38.28	20.18	3.34	27.00	3.48
18	800.00	32.8 QP	46.00	-13.20	1.10V	20	35.74	20.69	3.38	27.00	2.95
19	875.00	28.6 QP	46.00	-17.40	1.73V	260	31.33	20.63	3.63	27.00	2.73

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
  - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  - 3 The other emission levels were very low against the limit.
  - 4 Margin value = Emission level - Limit value

## 4.2.8 TEST RESULT

<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2038.0	43.2 PK	74.00	-30.80	1.08H	161	48.00	25.20	4.86	34.90	4.84
2	*2413.0	97.2 PK	-	-	1.13H	140	65.00	27.11	5.10	0.00	-32.22
3	*2413.0	91.2 AV	-	-	1.13H	140	59.00	27.11	5.10	0.00	-32.22
4	4076.0	45.4 PK	74.00	-28.60	1.13H	313	43.00	30.13	6.78	34.52	-2.39
5	4824.0	47.1 PK	74.00	-26.90	1.08H	277	43.10	31.43	7.23	34.63	-4.02

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2038.0	48.2 PK	74.00	-25.80	1.06V	190	53.00	25.20	4.86	34.90	4.84
2	*2413.0	106.2 PK	-	-	1.10V	117	74.00	27.11	5.10	0.00	-32.21
3	*2413.0	99.2 AV	-	-	1.10V	117	67.00	27.11	5.10	0.00	-32.21
4	4076.0	45.6 PK	74.00	-28.40	1.11V	226	43.20	30.13	6.78	34.52	-2.39
5	4824.0	46.5 PK	74.00	-27.50	1.17V	272	42.50	31.43	7.23	34.63	-4.02

- NOTE:**
1. Emission level = Raw Value - Correction Factor
  2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency





<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2063.0	43.5 PK	74.00	-30.50	1.27H	352	48.00	25.41	4.96	34.90	4.53
2	*2437.0	96.4 PK	-	-	1.26H	17	64.00	27.33	5.08	0.00	-32.40.
3	*2437.0	90.4 AV	-	-	1.26H	17	58.00	27.33	5.08	0.00	-32.40.
4	4126.0	46.5 PK	74.00	-27.50	1.38H	8	44.00	30.32	6.70	34.56	-2.46
5	4874.0	47.5 PK	74.00	-26.50	1.42H	156	43.40	31.47	7.21	34.63	-4.05

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2063.0	46.5 PK	74.00	-27.50	1.00V	7	51.00	25.41	4.96	34.90	4.53
2	*2437.0	107.4 PK			1.25V	360	75.00	27.33	5.08	0.00	-32.40
3	*2437.0	100.6 AV			1.25V	360	68.20	27.33	5.08	0.00	-32.40
4	4126.0	47.5 PK	74.00	-26.50	1.40V	24	45.00	30.32	6.70	34.56	-2.46
5	4874.0	47.9 PK	74.00	-26.10	1.02V	305	43.80	31.47	7.21	34.63	-4.05
6	6188.0	47.5 PK	74.00	-26.50	1.40V	319	41.00	33.14	8.01	34.60	-6.55

- NOTE:**
1. Emission level = Raw Value - Correction Factor
  2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 70%RH, 1005 hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2088.0	42.7 PK	74.00	-31.30	1.21H	98	47.00	25.62	5.02	34.90	4.26
2	*2463.0	100.4 PK	-	-	1.24H	58	68.00	27.33	5.08	0.00	-32.40
3	*2463.0	93.4 AV	-	-	1.24H	58	61.00	27.33	5.08	0.00	-32.40
4	2490.0	44.9 PK	74.00	-29.10	1.24H	161	47.20	27.54	5.06	34.90	2.31
5	4176.0	45.0 PK	74.00	-29.00	1.27H	207	42.50	30.41	6.68	34.58	-2.51
6	4924.0	47.1 PK	74.00	-26.90	1.22H	3	43.00	31.51	7.21	34.62	-4.10

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2088.0	46.7 PK	74.00	-27.30	1.18V	298	51.00	25.62	5.02	34.90	4.26
2	*2463.0	108.4 PK	-	-	1.24V	357	76.00	27.33	5.08	0.00	-32.41
3	*2463.0	102.4 AV	-	-	1.24V	357	70.00	27.33	5.08	0.00	-32.41
4	2491.0	48.7 PK	74.00	-25.30	1.16V	257	51.00	27.54	5.06	34.90	2.31
5	4176.0	45.5 PK	74.00	-28.50	1.13V	237	43.00	30.41	6.68	34.58	-2.51
6	4924.0	46.8 PK	74.00	-27.20	1.07V	211	42.70	31.51	7.21	34.62	-4.10

- NOTE:**
1. Emission level= Raw Value - Correction Factor
  2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

#### 4.3.4 TEST SETUP



#### 4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




## 4.3.6 TEST RESULTS

<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	29 deg. C, 53 %RH, 1005 hPa
<b>TESTED BY:</b> Steven Lu			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	10.86	0.5	PASS
6	2437	10.30	0.5	PASS
11	2462	11.34	0.5	PASS




CH1

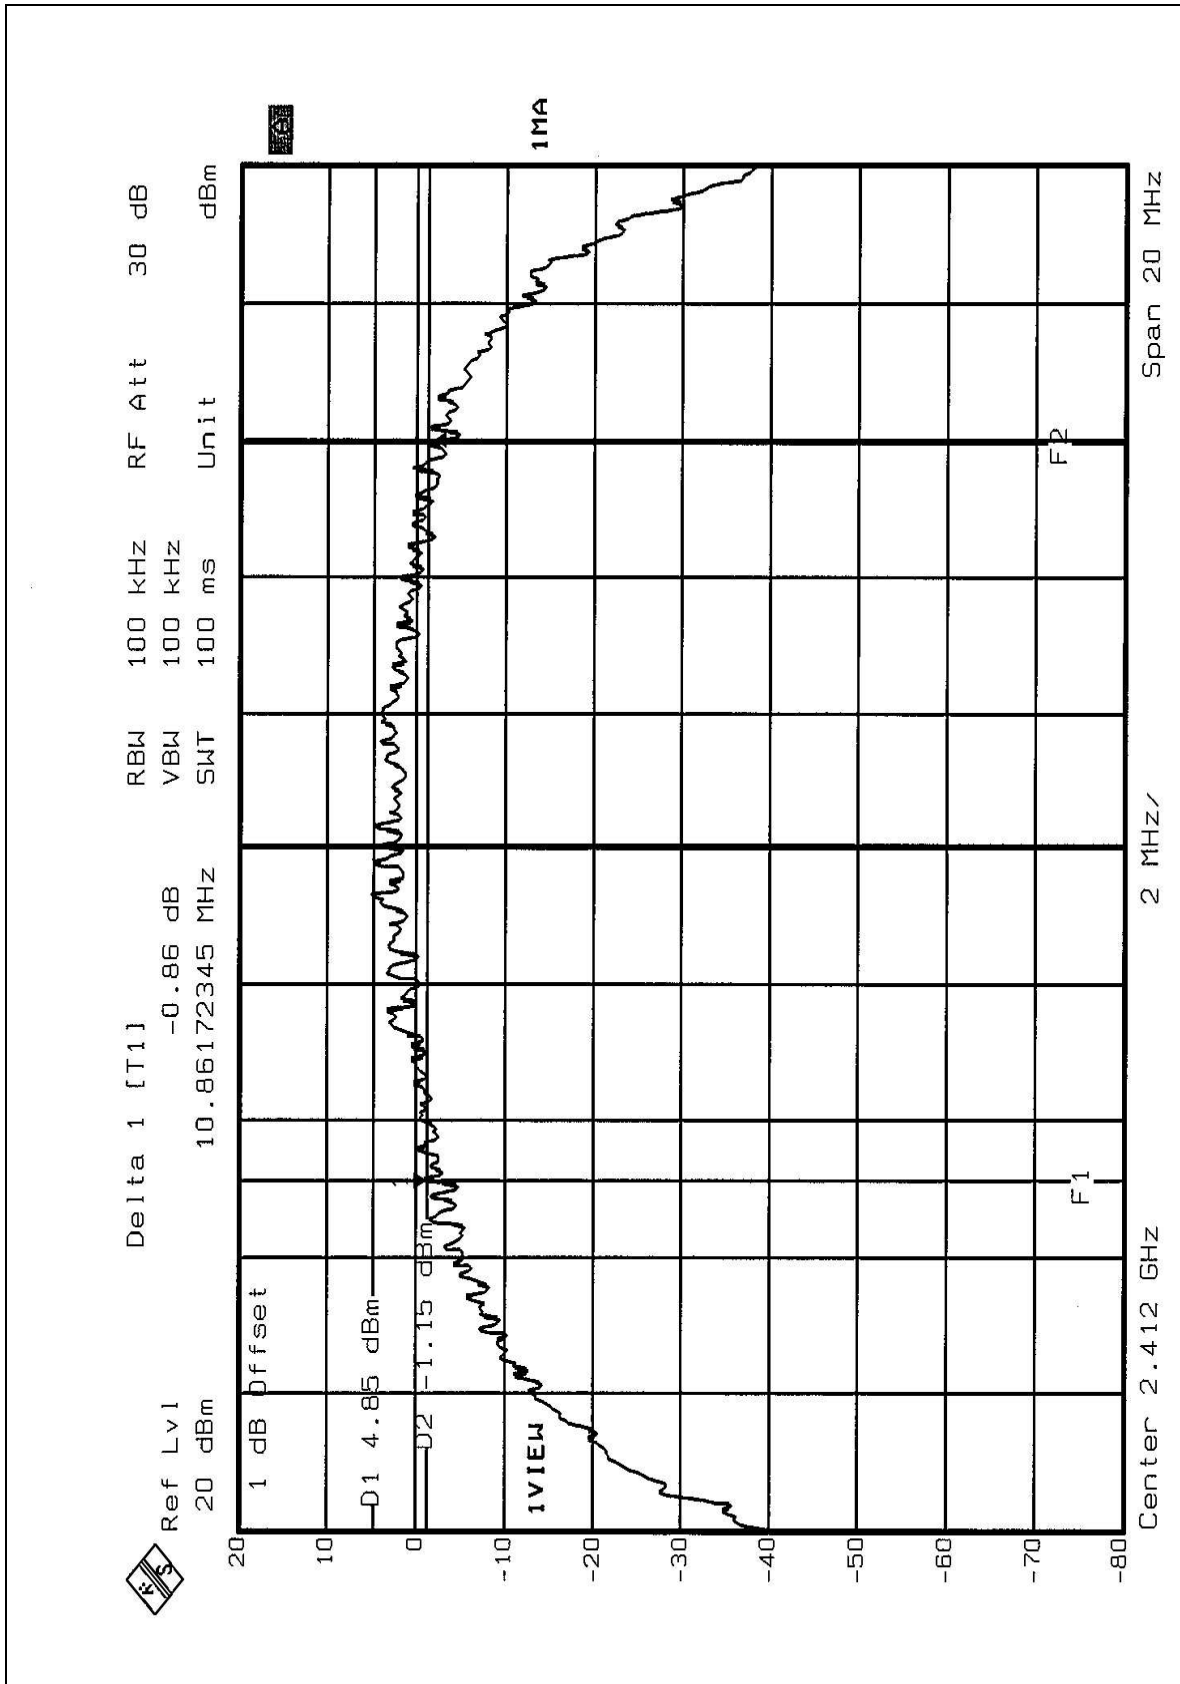




CH6

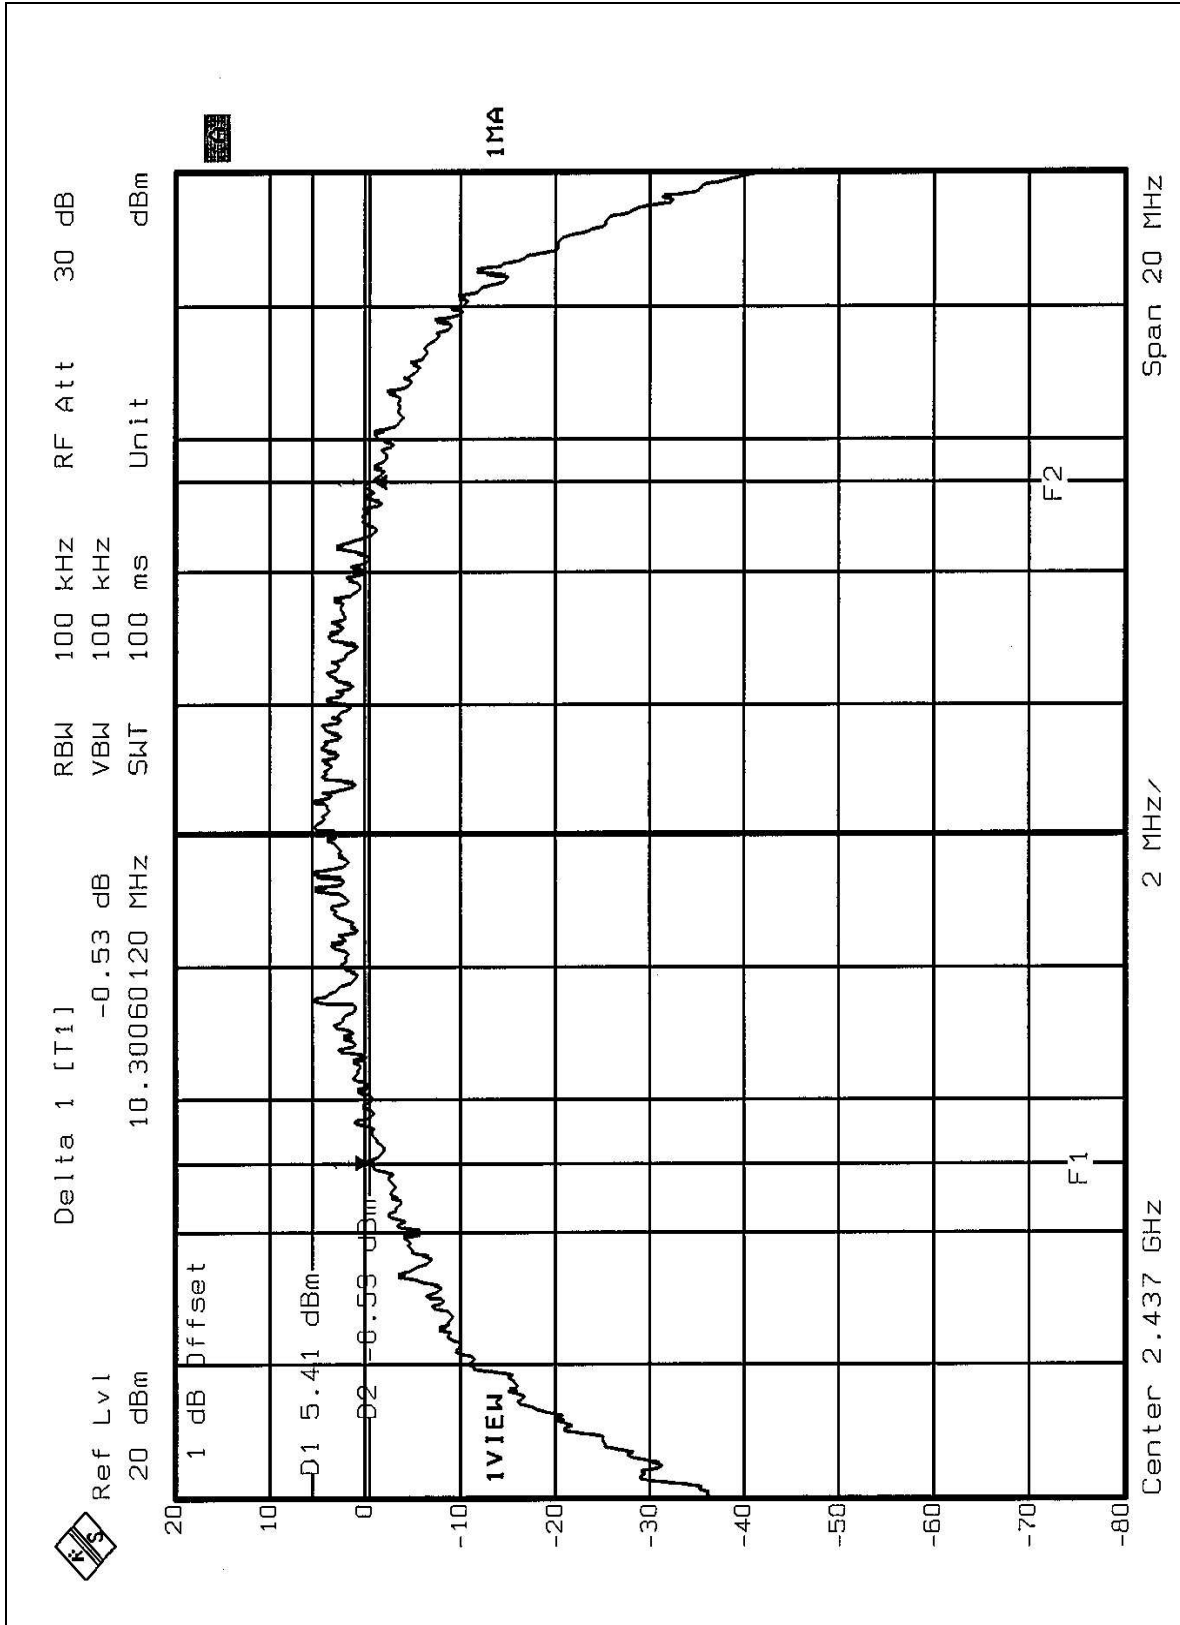



CH11

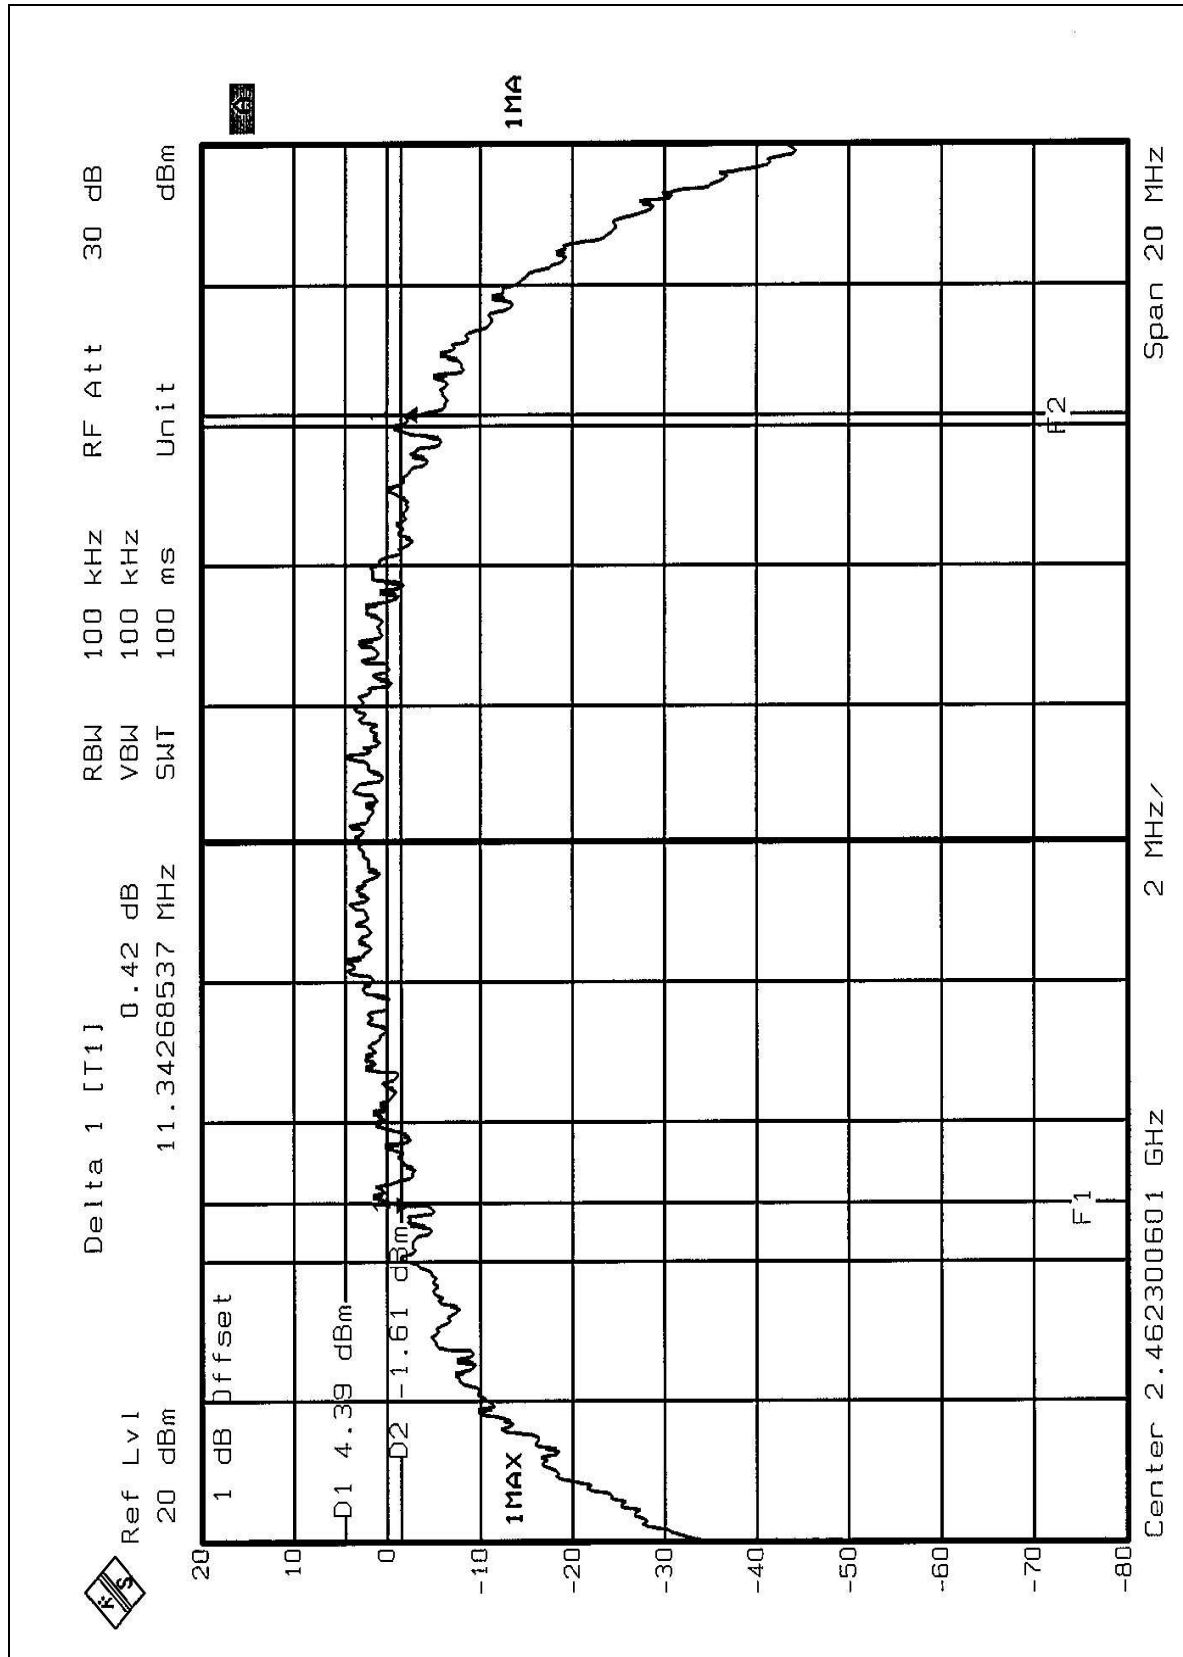





**4.4 MAXIMUM PEAK OUTPUT POWER**

**4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT**

The Maximum Peak Output Power Measurement is 30dBm.

**4.4.2 INSTRUMENTS**

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SINGLE CHANNEL POWER METER	NRVS	100026	Feb. 21, 2003
PEAK POWER SENSOR	NRV-Z32	100013	May 23, 2002

**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the peak power meter.

#### 4.4.4 TEST SETUP



#### 4.4.5 EUT OPERATING CONDITIONS

Same as Item 3.4.5



## 4.4.6 TEST RESULTS

<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	29 deg. C, 53 %RH, 1005 hPa
<b>TESTED BY:</b> Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.37	30	PASS
6	2437	16.61	30	PASS
11	2462	15.37	30	PASS



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

**NOTE:**


1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 TEST SETUP



#### 4.5.5 EUT OPERATING CONDITION

Same as Item 3.4.5




## 4.5.6 TEST RESULTS

<b>EUT</b>	Office Connect Wireless Cable/DSL Gateway	<b>MODEL</b>	3CRWE51196
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	29 deg. C, 53 %RH, 1005 hPa
<b>TESTED BY:</b> Steven Lu			

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 kHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-8.44	8	PASS
6	2437	-6.55	8	PASS
11	2462	-8.58	8	PASS




CH1

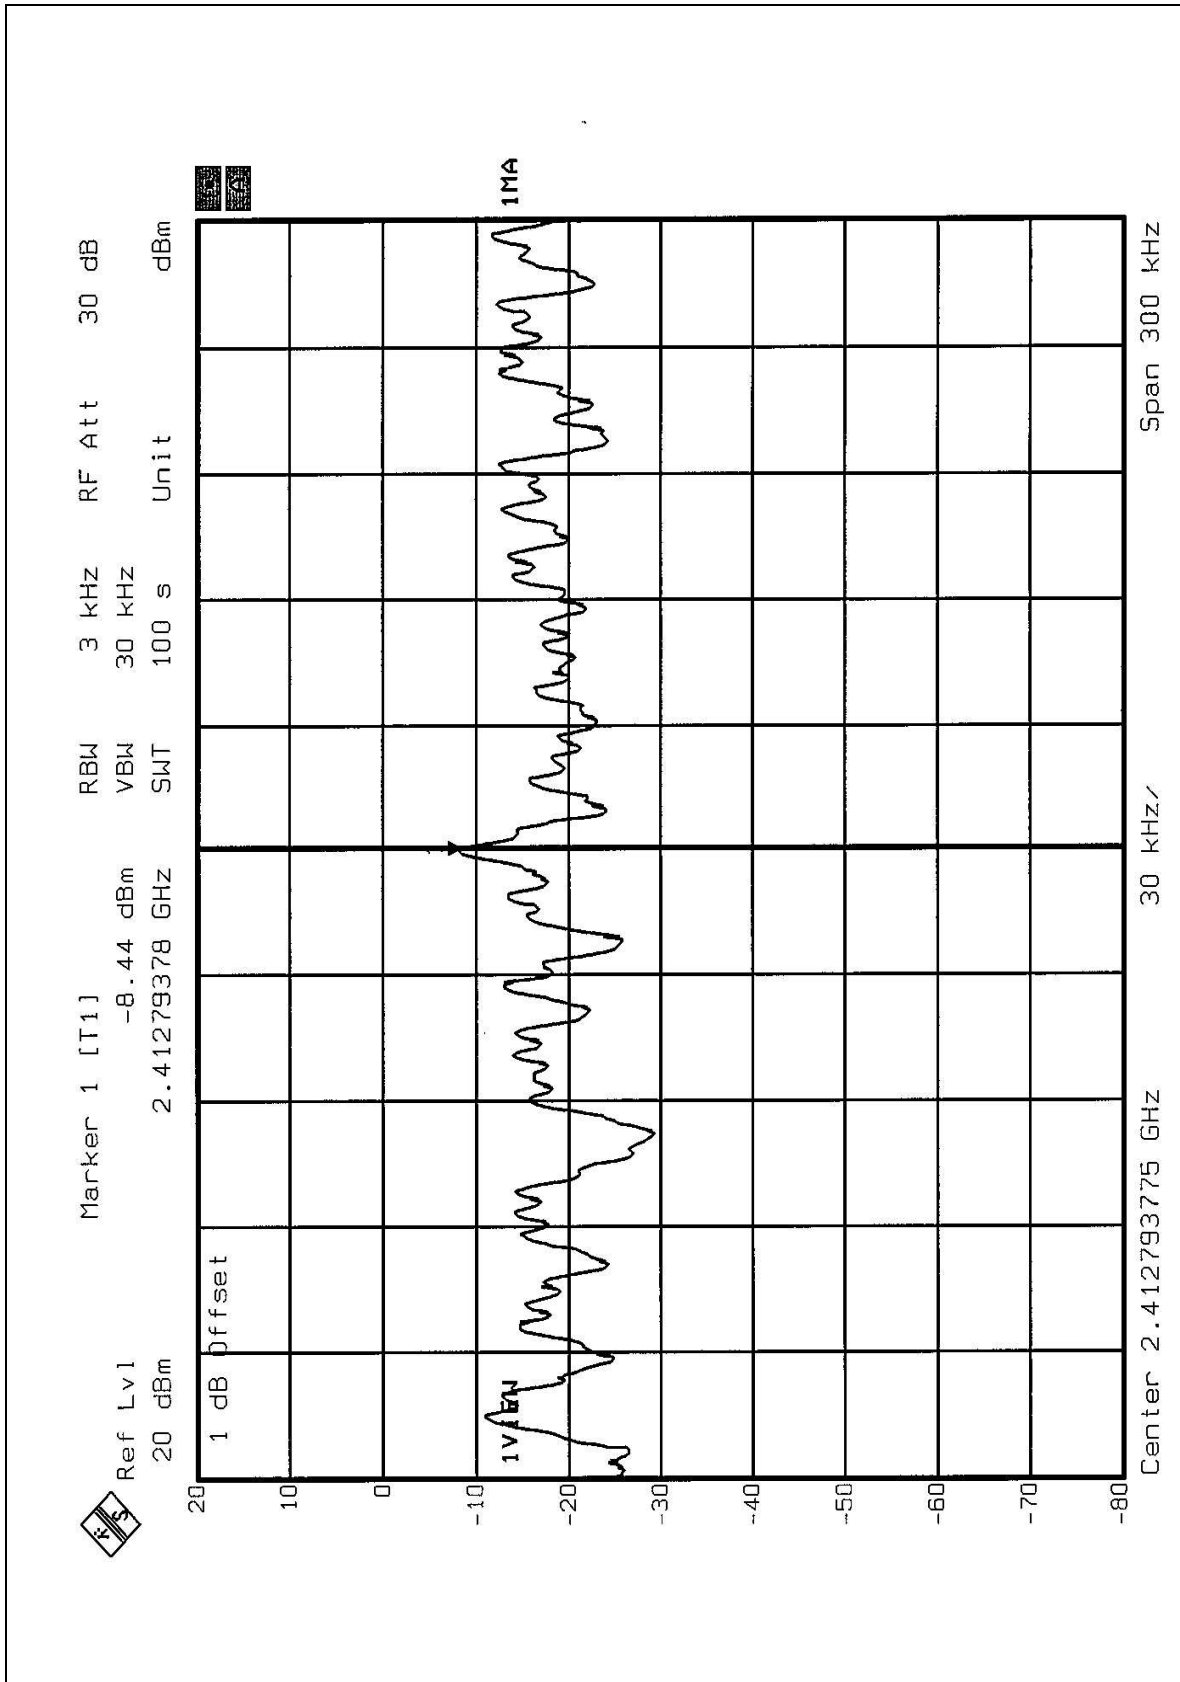




CH6

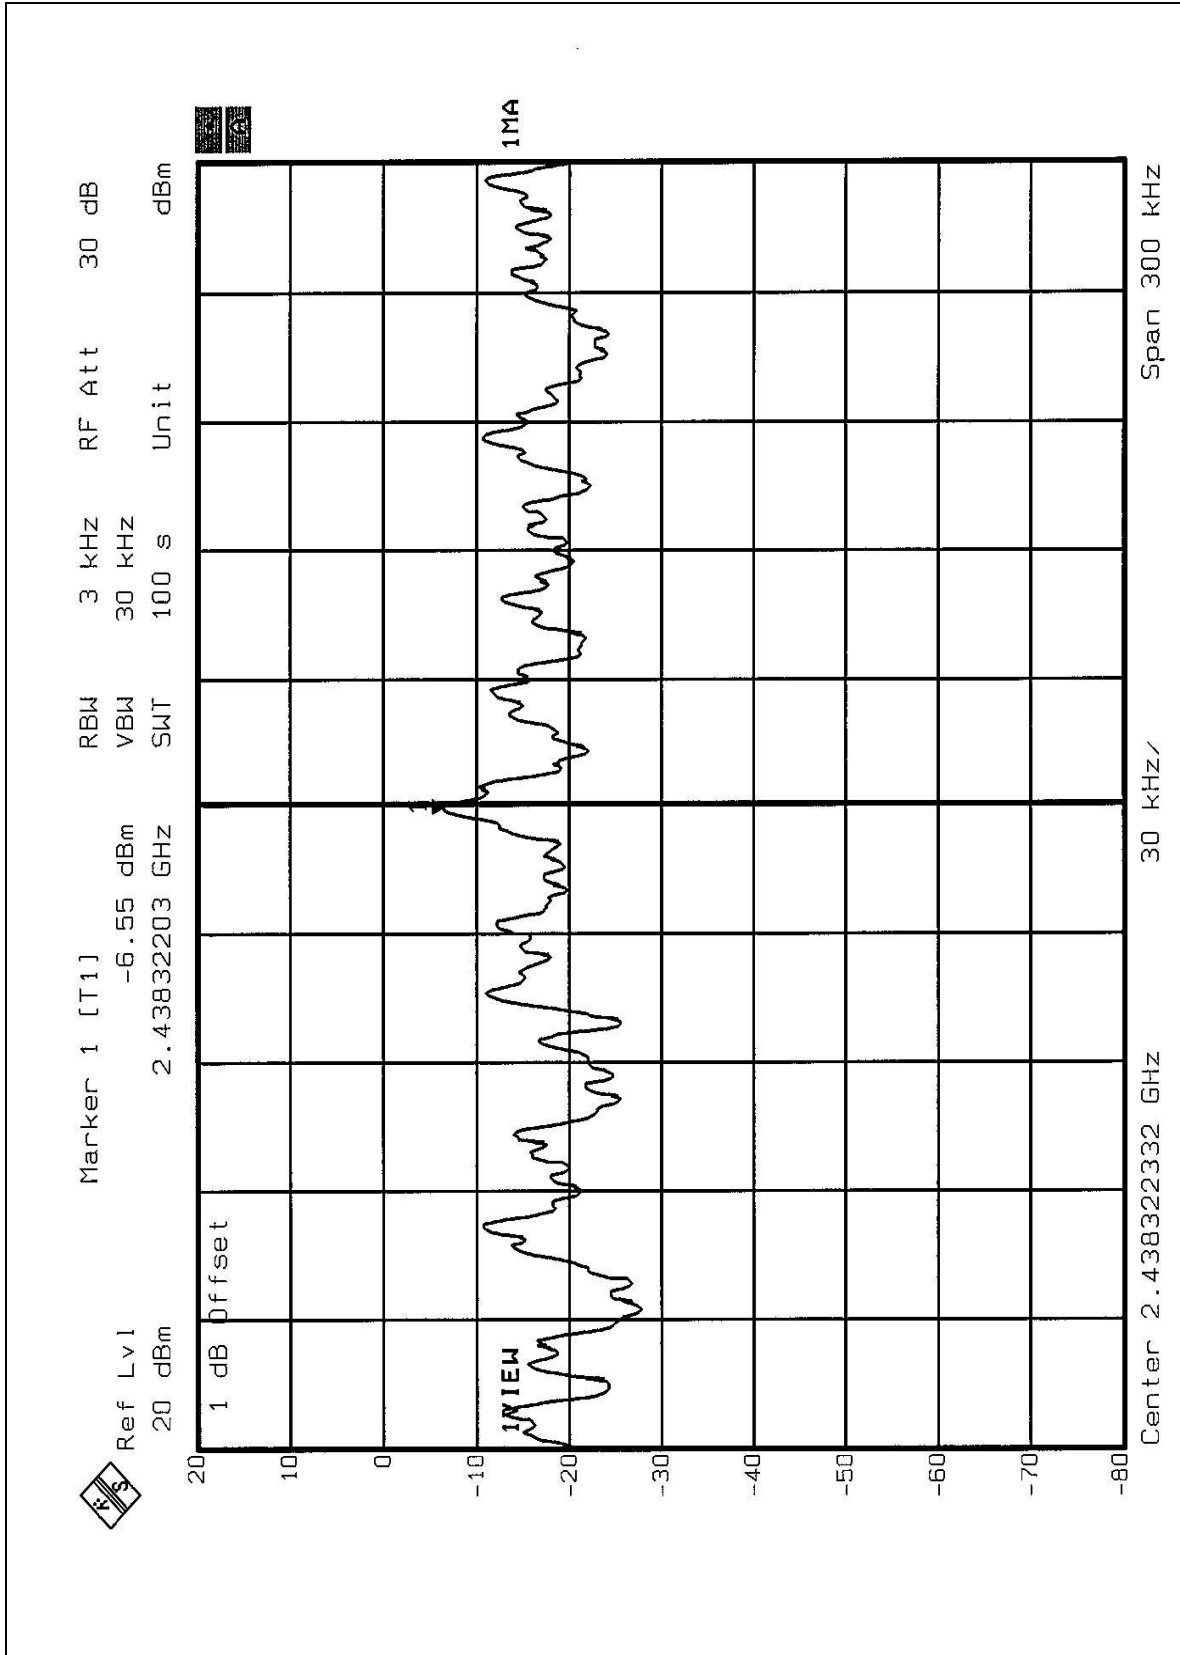





CH11

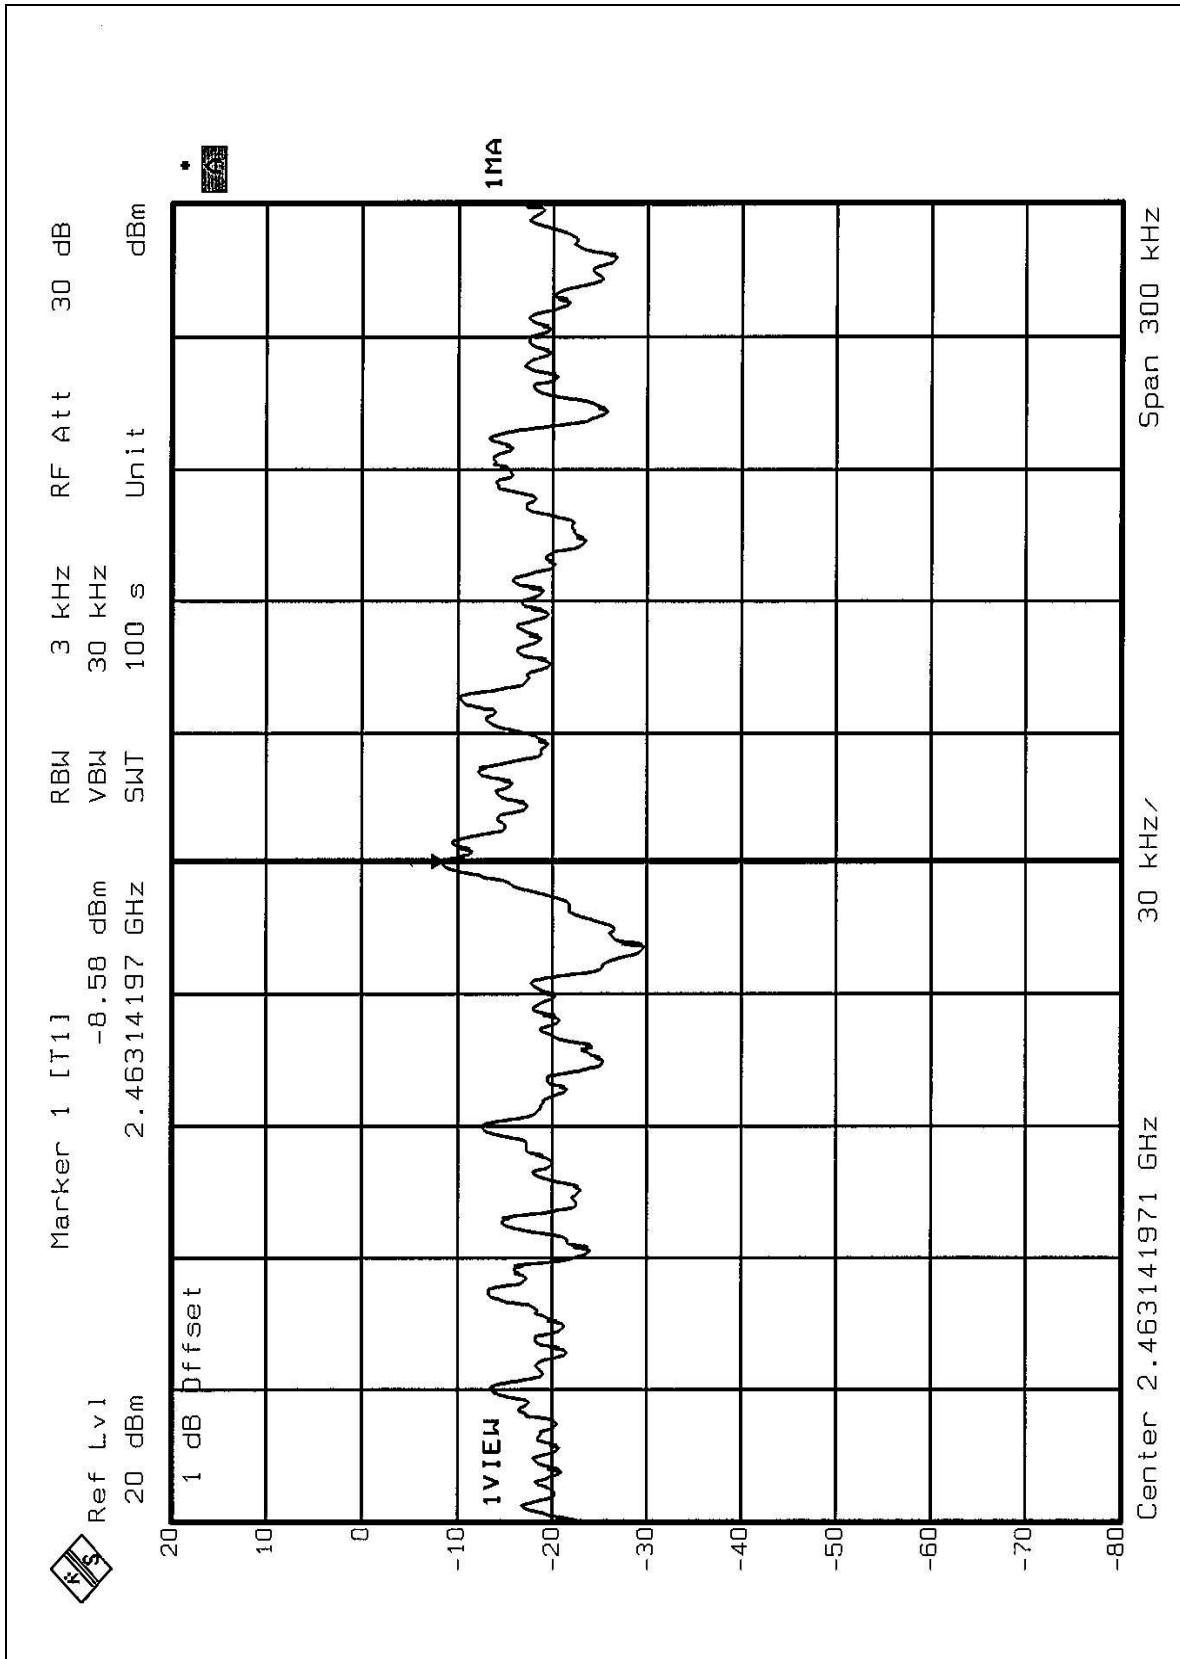



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

**NOTE:**

1. The measurement uncertainty is less than  $\pm 2.6\text{dB}$ , which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.




#### 4.6.4 EUT OPERATING CONDITION


Same as Item 3.4.5

#### 4.6.5 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

**NOTE:** The band edge emission plot on the following 2 pages shows 58.22dB delta between carrier maximum power and local maximum emission in restrict band (2.4838GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 (Page 34) is 102.4dBuV/m, so the maximum field strength in restrict band is  $102.4 - 58.22 = 44.18$  dBuV/m which is under 54 dBuV/m limit.

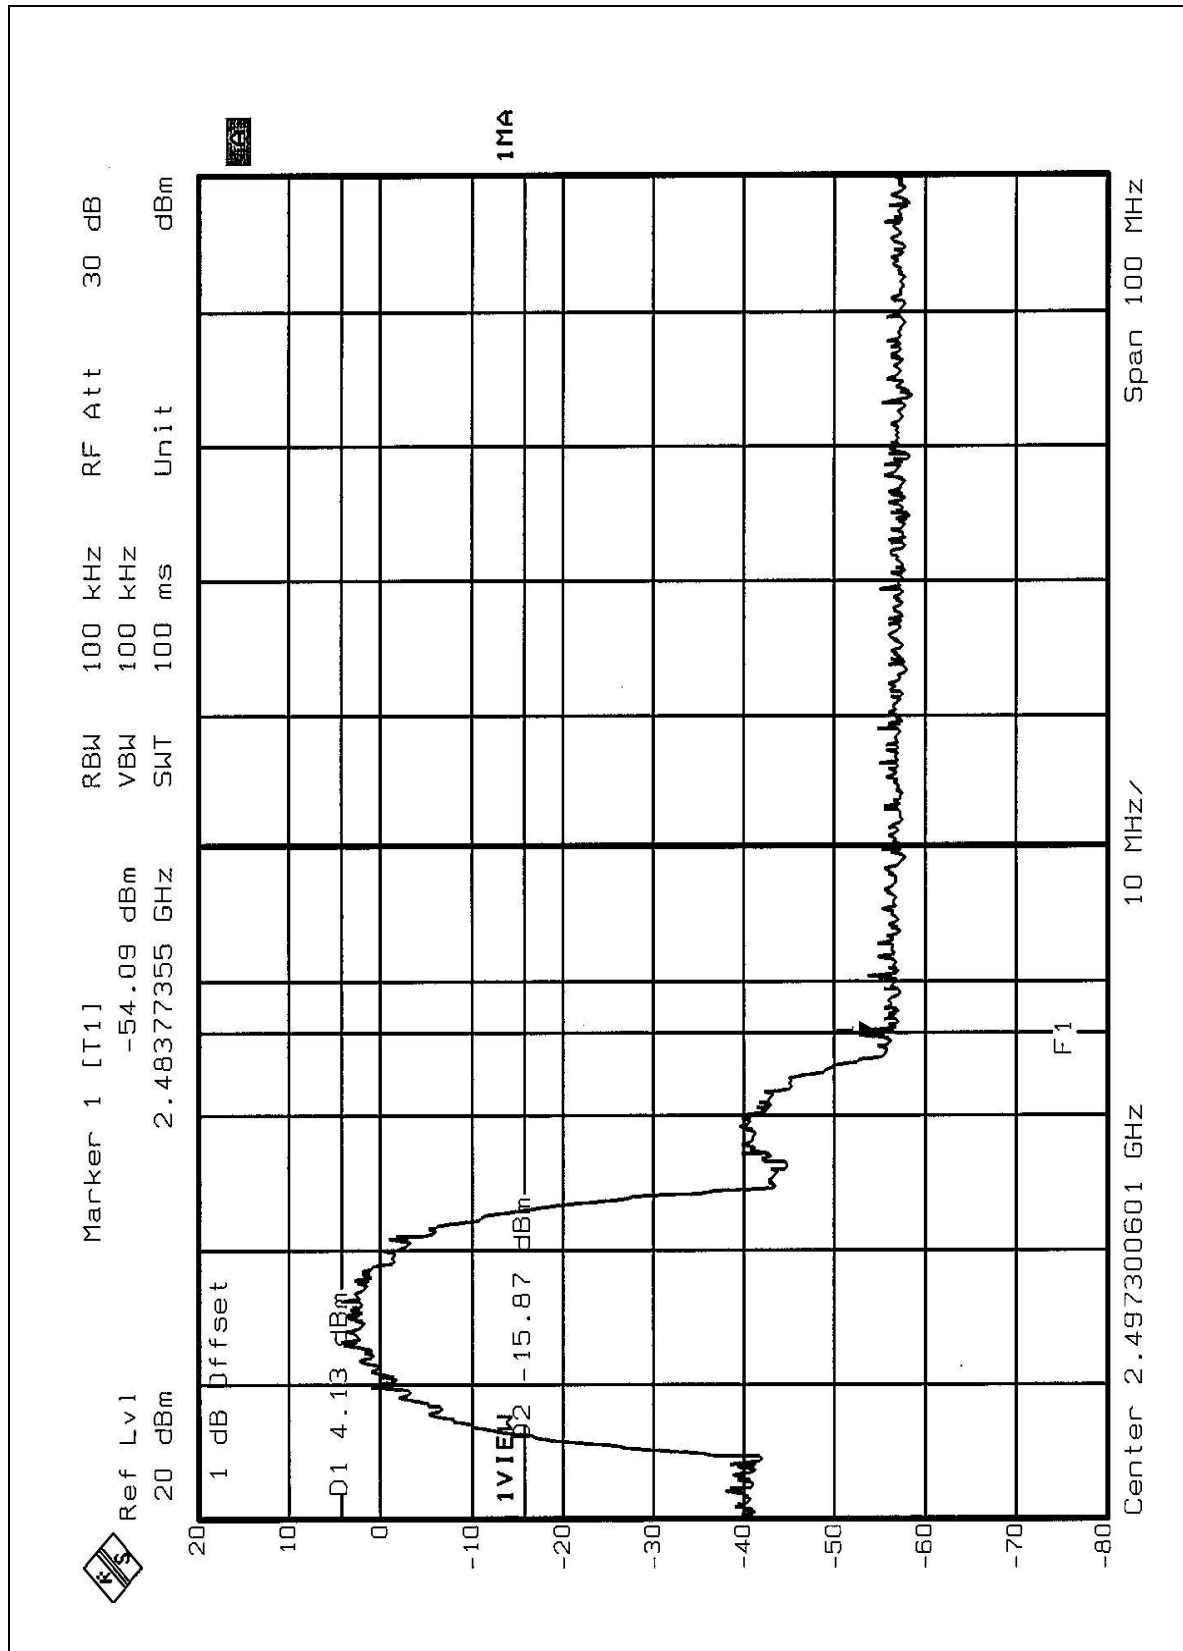

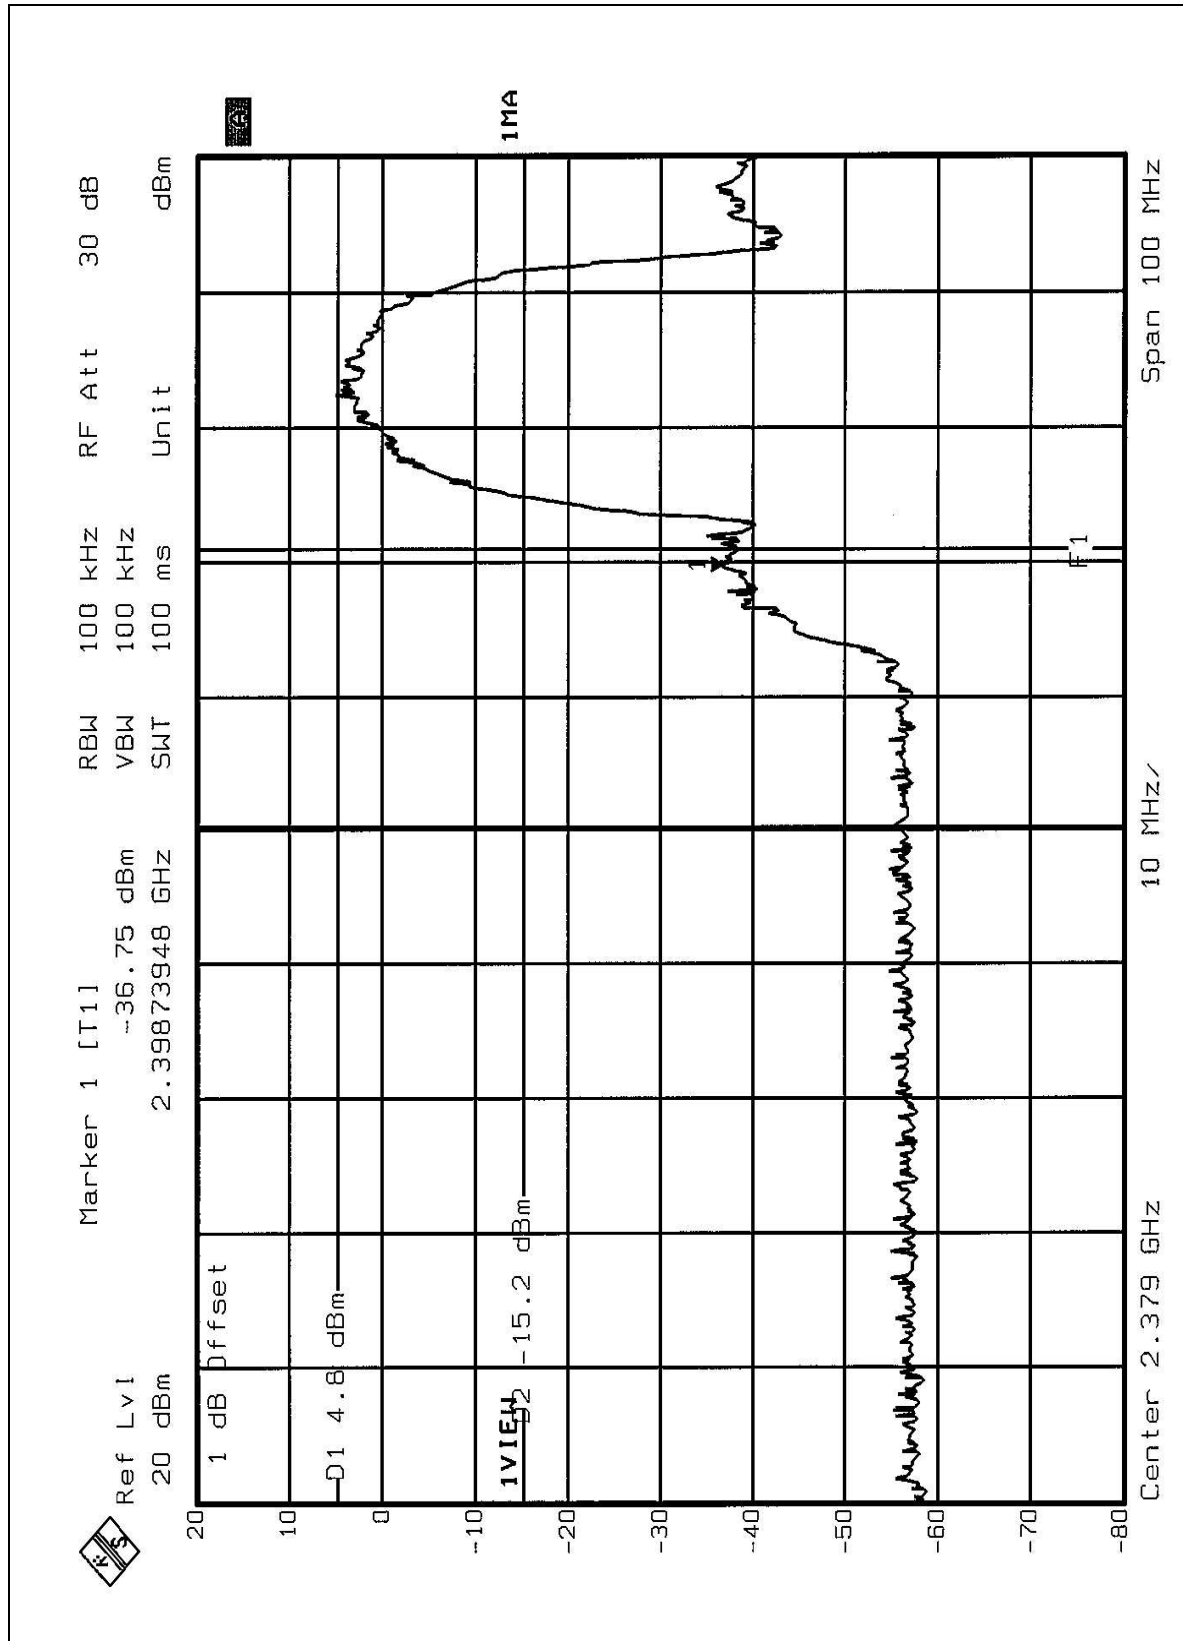



## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**


The antenna used in this product is Dipole Antenna. The antenna connector is MMCX connector. The maximum Gain of the antenna is 1dBi only.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST





### RADIATED EMISSION TEST

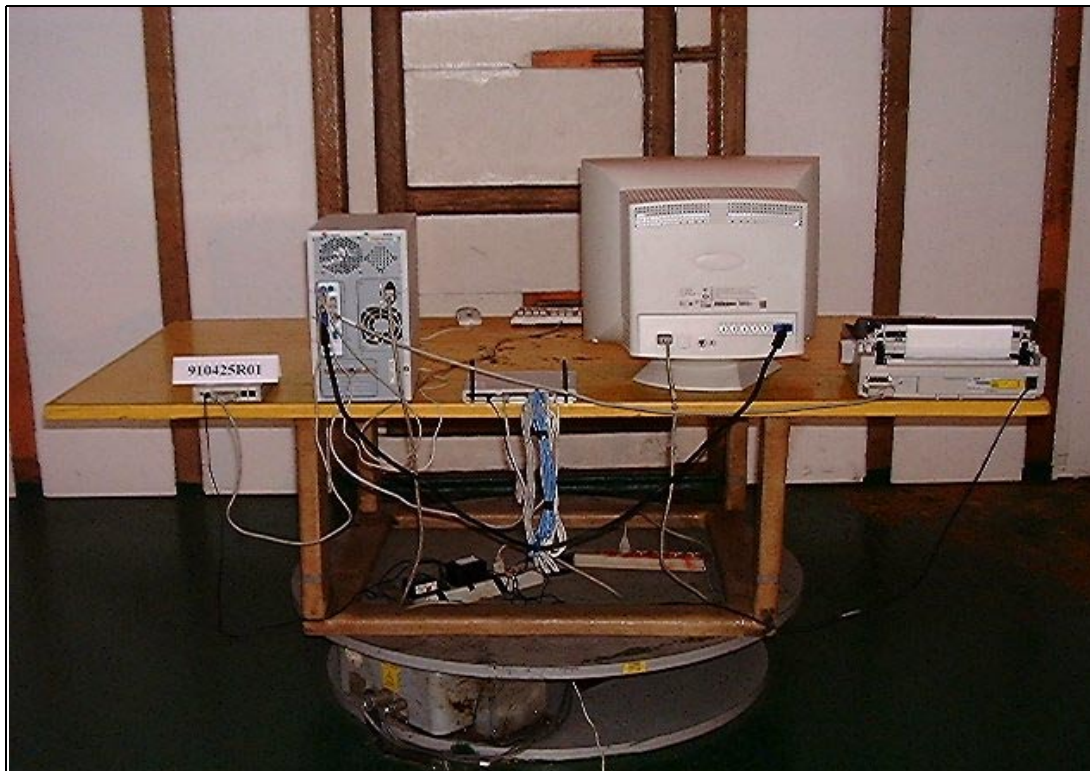





## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP, UL
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.