




3.9.8 TEST RESULTS -OFDM(Mode 1,2,4)

EUT	Upgrade Kit - 802.11g		
MODEL	WL-463	ENVIRONMENTAL CONDITIONS	24 deg. C, 60%RH, 977 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.38	0.5	PASS
6	2437	16.42	0.5	PASS
11	2462	16.56	0.5	PASS
Turbo 6	2437	33.12	0.5	PASS




CH1

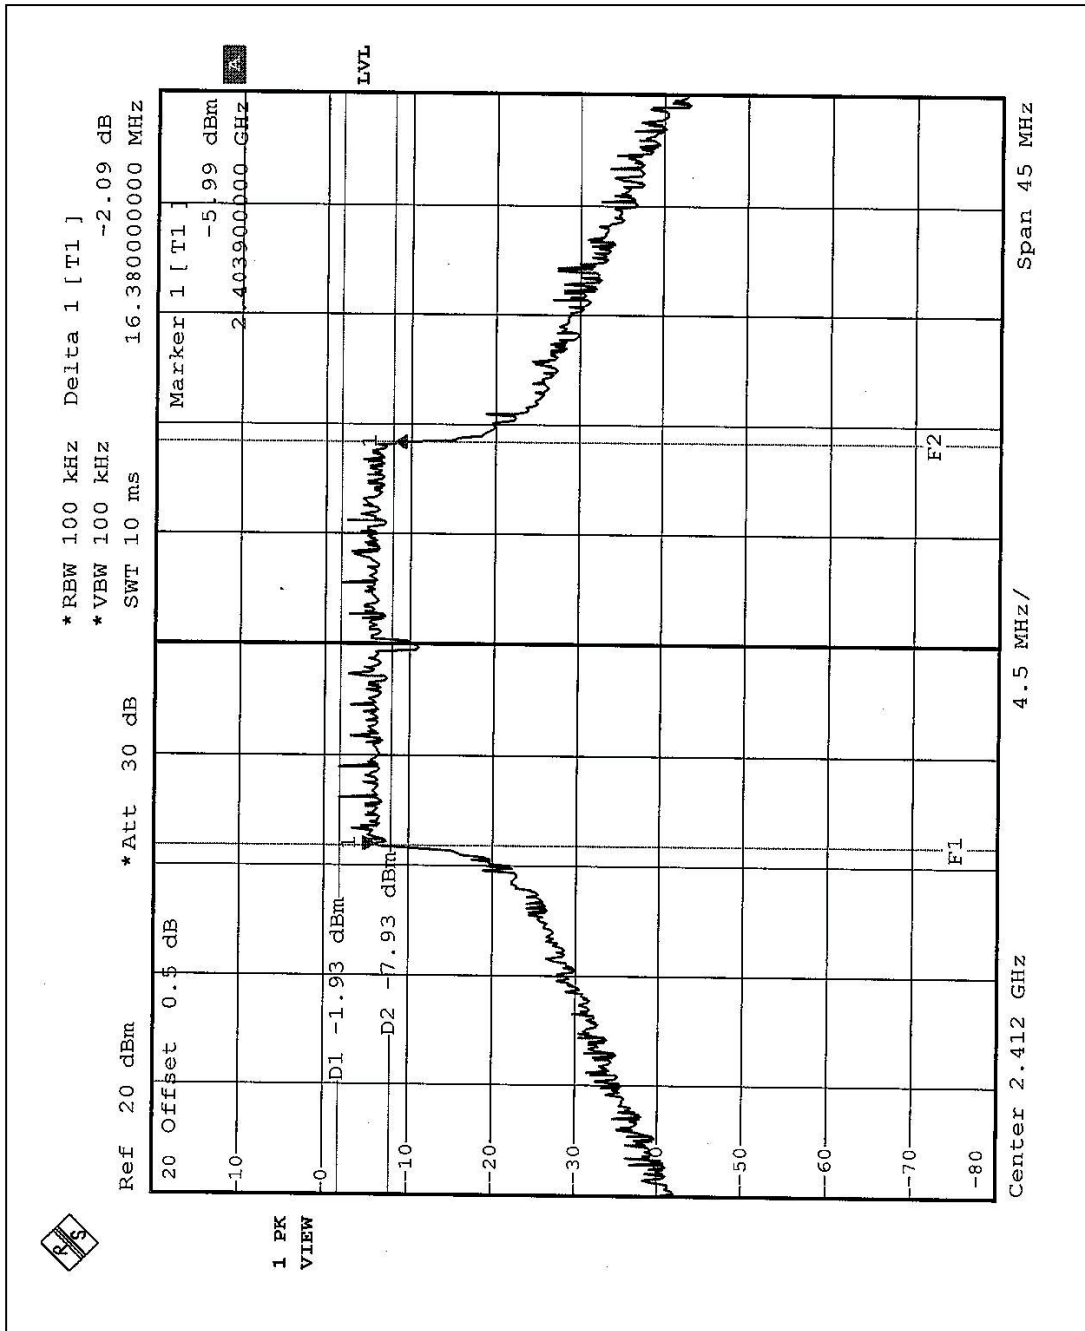




CH6

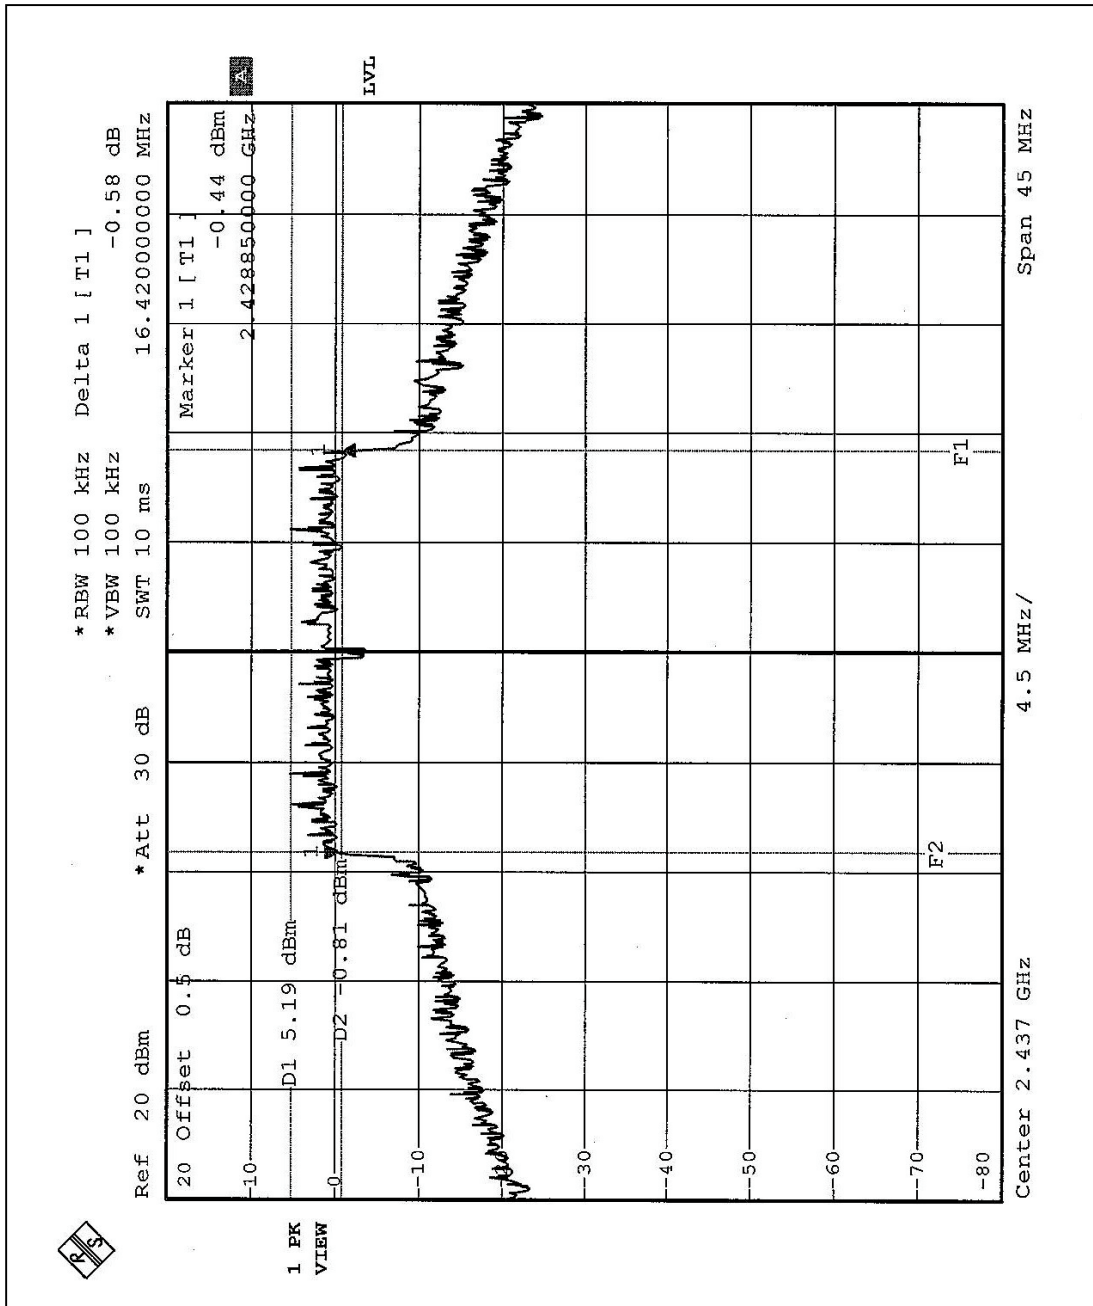




CH11

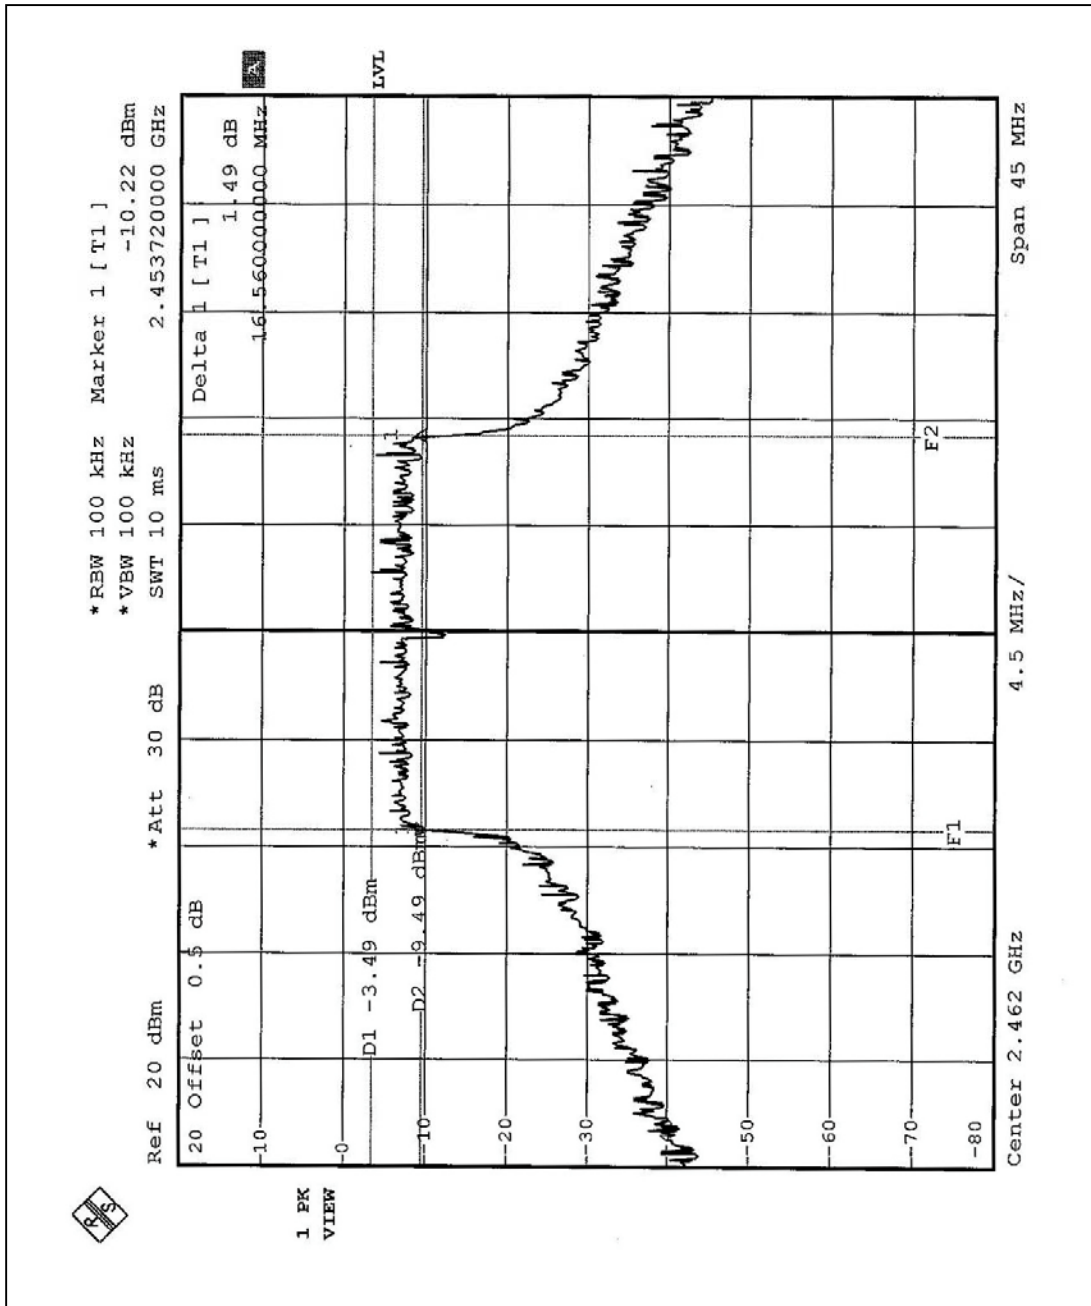



Turbo CH6

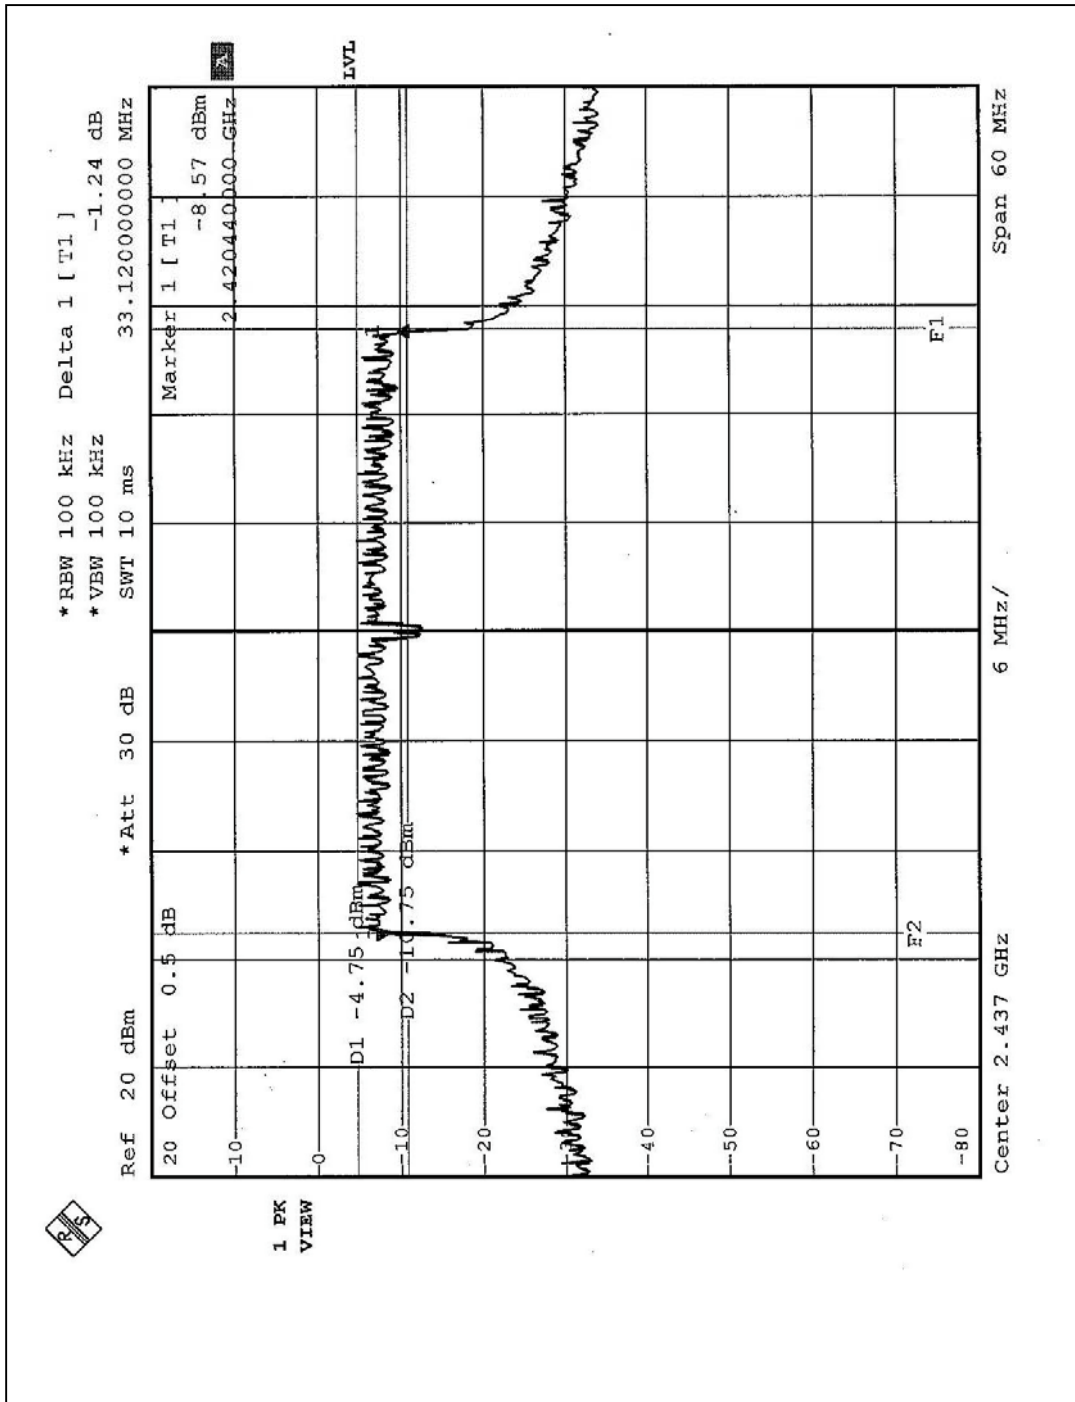




3.9.9 TEST RESULTS -OFDM(Mode 3)

EUT	Upgrade Kit - 802.11g		
MODEL	WL-463	ENVIRONMENTAL CONDITIONS	24 deg. C, 62%RH, 977 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang


CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.38	0.5	PASS
11	2462	16.45	0.5	PASS
Turbo 6	2437	32.62	0.5	PASS



CH1

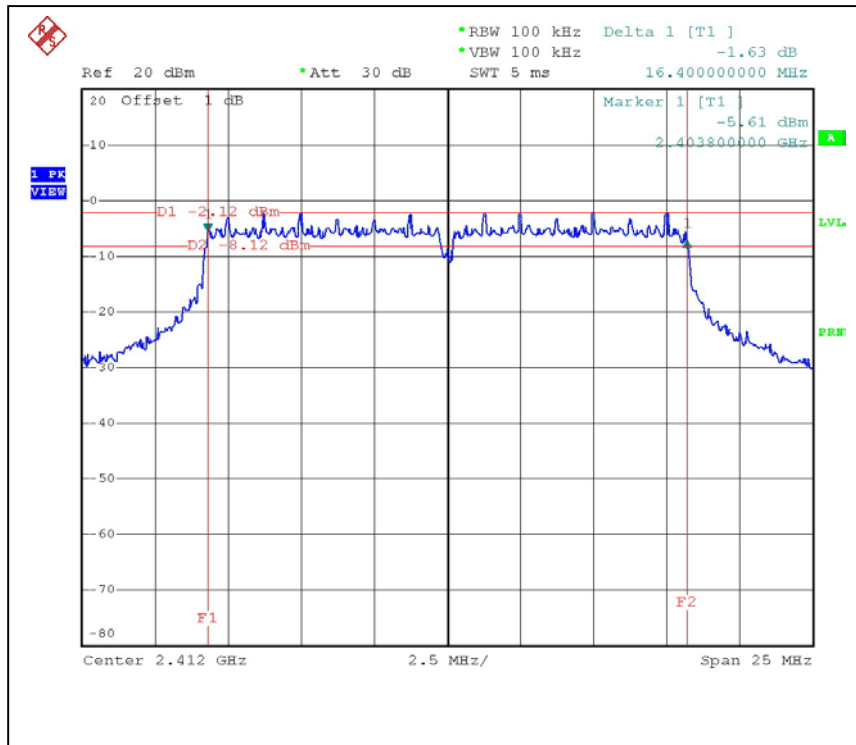


CH6

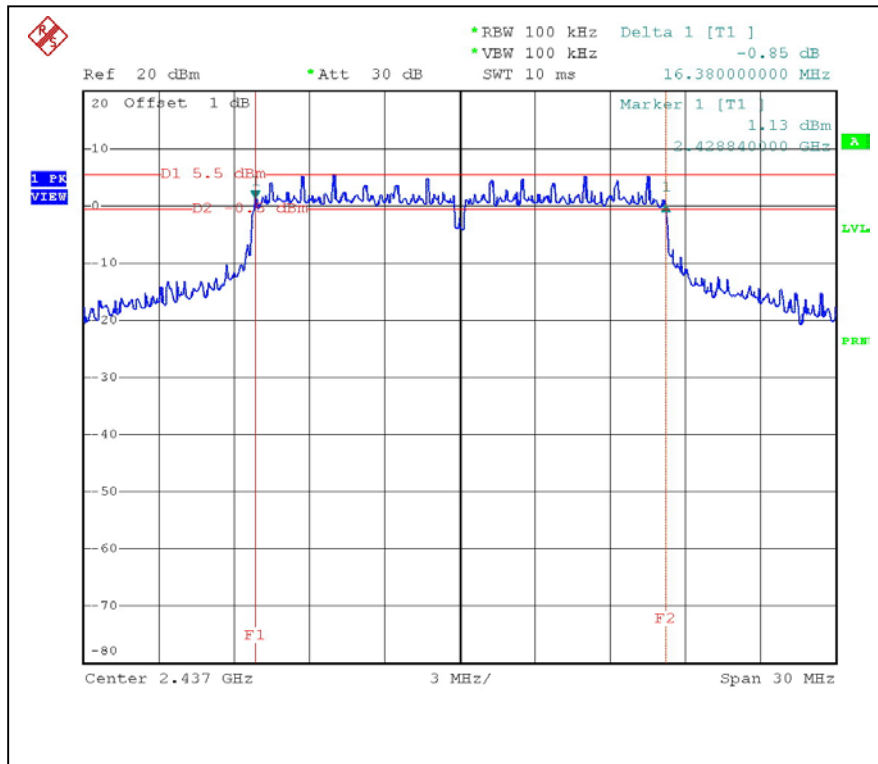



CH1

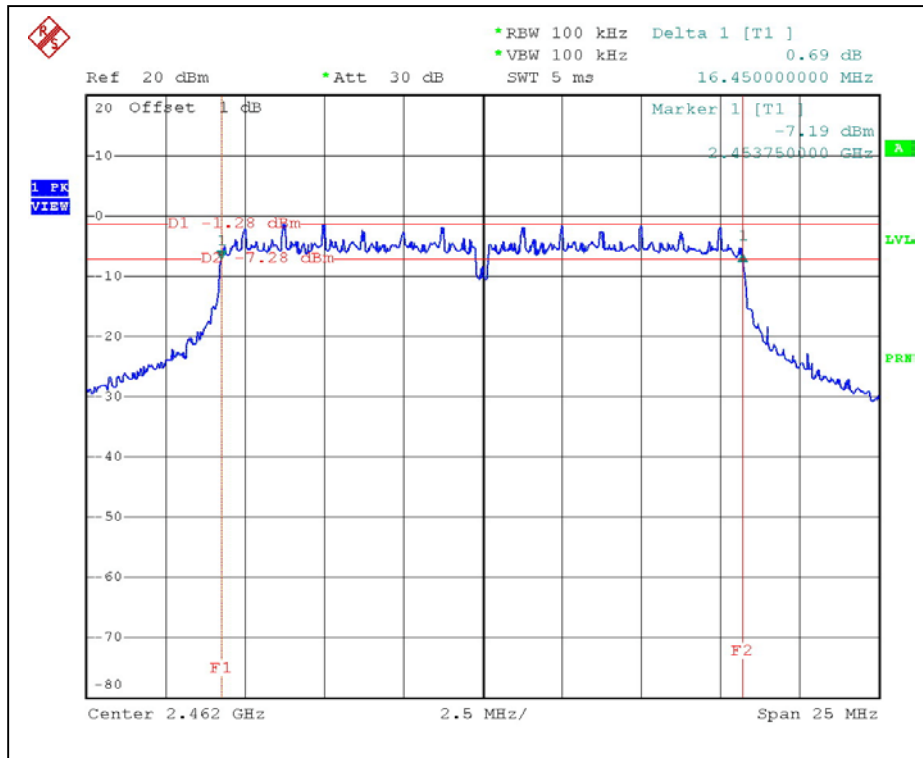

CH6

