




A Test Lab Techno Corp.

Changan Lab : No. 140-1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.
Tel : +886-2-271-0188 / Fax : +886-3-271-0190



SAR EVALUATION REPORT

Test Report No.	: 0709FS12
Applicant	: Accton Technology Corporation
FCC ID	: HEDWM6618R
Model Name	: 802.11n USB Client Adaptor
Trade Mark	: Accton
Model Number	: WM6618R-FLF-ZZ
Dates of Test	: Sep. 16 ~ Sep. 21, 2007
Test Environment	: Ambient Temperature : 22 ± 3 ° C Relative Humidity : 40 - 70 %
Test Specification	: Standard C95.1-1999 IEEE Std. 1528-2003
Max. SAR	: 0.143 W/kg WLAN Body SAR(802.11b) 0.048 W/kg WLAN Body SAR(802.11g) 0.055 W/kg WLAN Body SAR(802.11n _ 20MHz) 0.053 W/kg WLAN Body SAR(802.11n _ 40MHz)
Test Lab	: Changan Lab

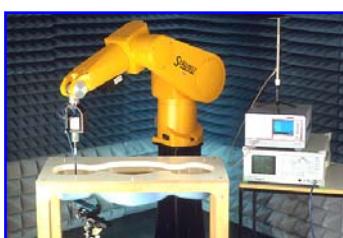

1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full.

Country Huang 20070921

Measurement Center Manager

Sam Chuang 20070921

Testing Engineer



Contents

1. Description of Equipment Under Test (EUT).....	3
2. Introduction	5
3. SAR Definition.....	6
4. SAR Measurement Setup	7
5. System Components	9
5.1 DASY4 E-Field Probe System	9
5.2 Data Acquisition Electronic (DAE) System	11
5.3 Robot	12
5.4 Measurement Server	12
5.5 Device Holder for Transmitters	12
5.6 Phantom - SAM v4.0.....	13
5.7 Data Storage and Evaluation	13
6. Test Equipment List.....	16
7. Tissue Simulating Liquids	17
7.1 Liquid Confirmation.....	18
8. Measurement Process.....	20
8.1 Device and Test Conditions	20
8.2 System Performance Check.....	21
8.3 Dosimetric Assessment Setup.....	23
8.4 Spatial Peak SAR Evaluation.....	25
9. Measurement Uncertainty.....	26
10. SAR Test Results Summary.....	28
10.1 WLAN Body SAR _ EUT Setup Bottom to phantom.....	28
10.2 WLAN Body SAR _ EUT Setup Tip to phantom	33
10.3 Std. C95.1-1999 RF Exposure Limit	38
11. Conclusion	39
12. References.....	40
Appendix A - System Performance Check	41
Appendix B - SAR Measurement Data	45
Appendix C - Calibration.....	96



1. Description of Equipment Under Test (EUT)


Applicant :

Accton Technology Corporation

No.1 Creation 3rd Rd., Science-based Industrial Park, Hsinchu 30077, Taiwan, R.O.C.

Manufacturer	:	Accton Technology Corporation
Manufacturer Address	:	No.1 Creation 3rd Rd., Science-based Industrial Park, Hsinchu 30077, Taiwan, R.O.C.
FCC ID	:	HEDWM6618R
Model Name	:	802.11n USB Client Adaptor
Trade Mark	:	Accton
Model Number	:	WM6618R-FLF-ZZ
Test Device	:	Production Unit
Tx Frequency	:	2412 -2462 MHz (WLAN802.11b / 802.11g / 802.11n)
Max. RF Conducted Power	:	0.071 W (18.49 dBm) WLAN(802.11b) 0.036 W (15.55 dBm) WLAN(802.11g) 0.035 W (15.45 dBm) WLAN(802.11n_20MHz) 0.028 W (14.50 dBm) WLAN(802.11n_40MHz)
Max. SAR Measurement	:	0.143 W/kg WLAN Body SAR(802.11b) 0.048 W/kg WLAN Body SAR(802.11g) 0.055 W/kg WLAN Body SAR(802.11n_20MHz) 0.053 W/kg WLAN Body SAR(802.11n_40MHz)
HW Version	:	R01
SW Version	:	1.0.4.0
Antenna Type	:	Internal Type
Antenna Gain	:	2 dBi
Device Category	:	Portable
RF Exposure Environment	:	General Population / Uncontrolled
Battery Option	:	Standard
Application Type	:	Certification

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment / general population exposure limits specified in Standard C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2003.

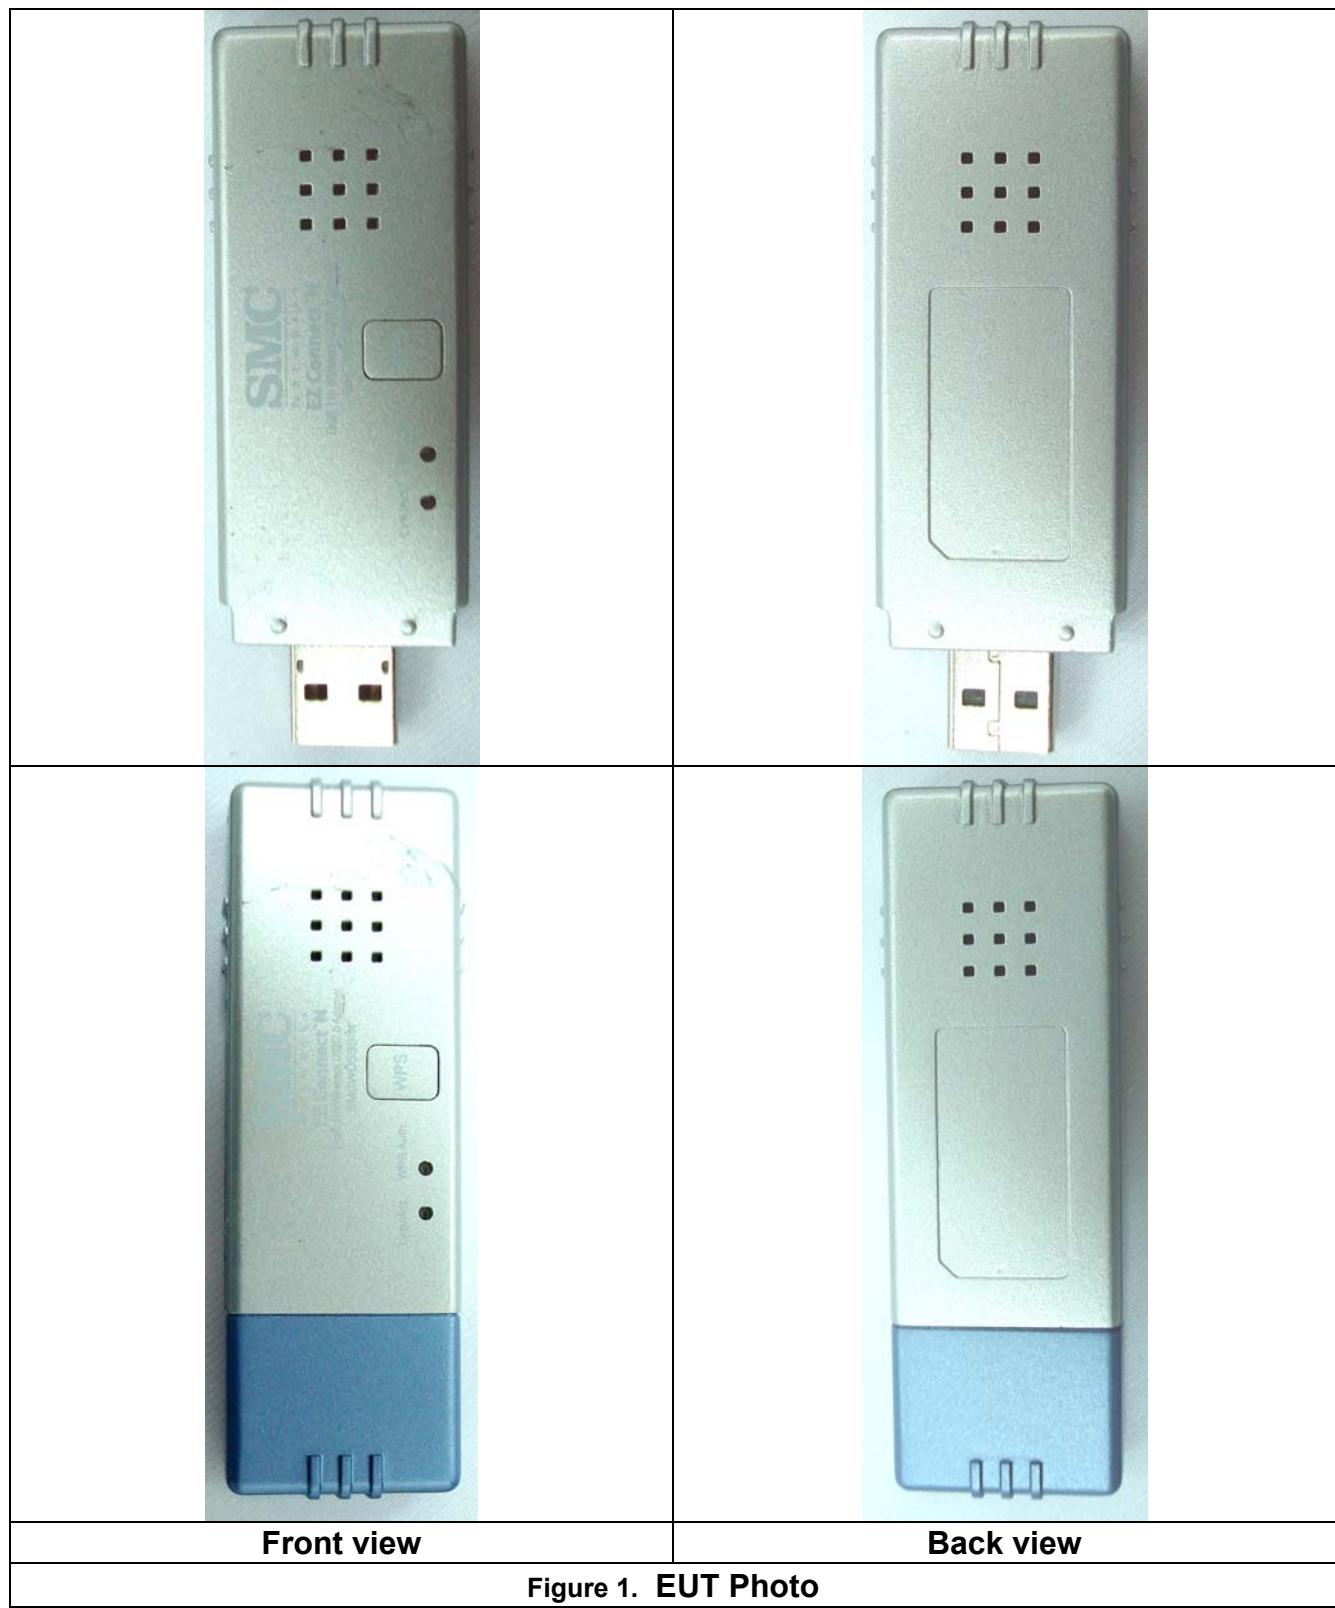



2. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of **Accton Technology Corporation Trade Mark : Accton Model(s) : WM6618R-FLF-ZZ**. The test procedures, as described in American National Standards, Institute C95.1 - 1999 [1], FCC/OET Bulletin 65 Supplement C [July 2001] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.



3. SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

*Note :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]

4. SAR Measurement Setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.025\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Measurement Server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The PC consists of the Intel Pentium 4 2.4GHz computer with Windows2000 system and SAR Measurement Software DASY4, Post Processor SEMCAD, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection...etc. is connected to the Electro-optical converter (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the Measurement Server.

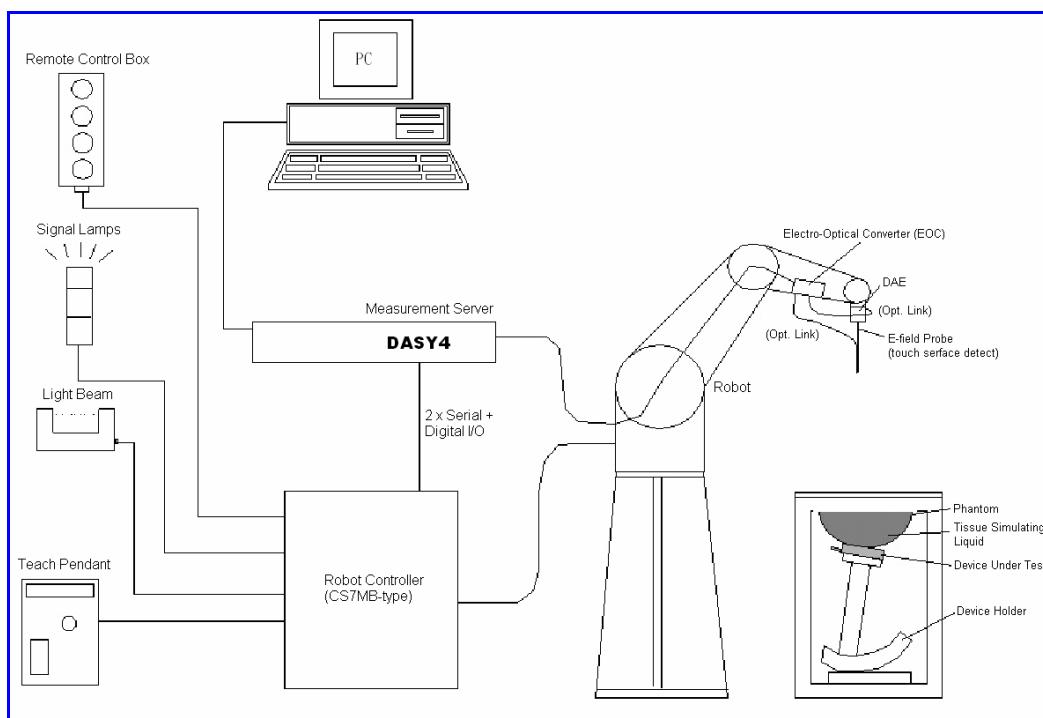


Figure 3. SAR Lab Test Measurement Setup



The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [3] .



5. **System Components**

5.1 DASY4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

5.1.1 ET3DV6 E-Field Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System (EX3DV3 only) Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycol)
Calibration	In air from 10 MHz to 6 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz, 1800MHz, 2000MHz and 2450MHz (accuracy ±8%) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz; Linearity: ±0.2 dB (30 MHz to 3 GHz)
Directivity	±0.3 dB in brain tissue (rotation around probe axis) ±0.5 dB in brain tissue (rotation normal probe axis)
Dynamic Range	10 μW/g to > 100mW/g; Linearity: ±0.2dB
Surface Detection	±0.2 mm repeatability in air and clear liquids over diffuse reflecting surface(EX3DV3 only)
Dimensions	Overall length: 330mm Tip length: 20mm Body diameter: 12mm Tip diameter: 2.5mm Distance from probe tip to dipole centers: 1.0mm
Application	General dosimetry up to 6GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



Figure 4.
ET3DV6 E-field Probe



Figure 5.
Probe setup on robot



5.1.2 ET3DV6 E-Field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure described in [4] with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [5] and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1GHz, and in a wave guide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where :

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

ΔT = Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where :

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).

5.2 Data Acquisition Electronic (DAE) System

Cell Controller

Processor : Intel Pentium 4

Clock Speed : 2.4GHz

Operating System : Windows 2000 Professional

Data Converter

Features : Signal Amplifier, multiplexer, A/D converter, and control logic

Software : DASY4 v4.7 (Build 53) & SEMCAD v1.8 (Build 172)

Connecting Lines : Optical downlink for data and status info

Optical uplink for commands and clock

5.3 Robot

Positioner : Stäubli Unimation Corp. Robot Model: RX90L
 Repeatability : ± 0.025 mm
 No. of Axis : 6

5.4 Measurement Server

Processor : PC/104 with a 166MHz low-power Pentium
 I/O-board :
 Link to DAE3
 16-bit A/D converter for surface detection system
 Digital I/O interface
 Serial link to robot
 Direct emergency stop output for robot

5.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the IEEE SCC34-SC2 and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

***Note :** A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [6]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Larger DUT cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.

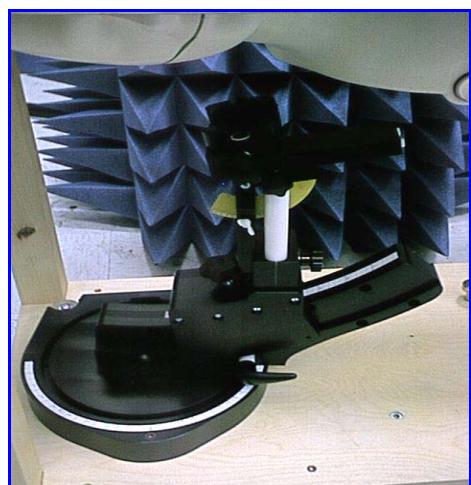


Figure 6. Device Holder

5.6 Phantom - SAM v4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

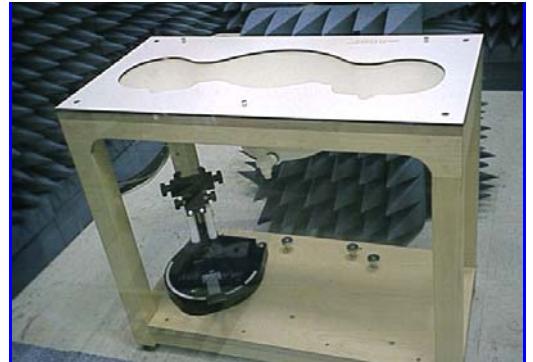


Figure 7. SAM Twin Phantom

Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	810x1000x500 mm (HxLxW)

Table 1. Specification of SAM v4.0

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.



5.7.2 Data Evaluation

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters : - Sensitivity Normi, ai0, ai1, ai2

- Conversion factor ConvFi

- Diode compression point dcpi

Device parameters : - Frequency f

- Crest factor cf

Media parameters : - Conductivity σ

- Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcpi}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

$dcpi$ = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

E-field probes :
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$



H-field probes :

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

$\mu\text{V}/(\text{V}/\text{m})^2$ for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [$\text{Siemens}/\text{m}$]

ρ = equivalent tissue density in g/cm^3

*Note: that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm^2

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



6. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1531	Jan. 22, 2007	Jan. 22, 2008
SPEAG	2450MHz System Validation Kit	D2450V2	712	Feb. 20, 2007	Feb. 20, 2008
SPEAG	Data Acquisition Electronics	DAE4	541	Oct. 16, 2006	Oct. 16, 2007
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	Phantom	SAM V4.0	1009	NCR	NCR
SPEAG	Robot	Staubli RX90L	F00/589B1/A/01	NCR	NCR
SPEAG	Software	DASY4 V4.7 Build 53	N/A	NCR	NCR
SPEAG	Software	SEMCAD V1.8 Build 172	N/A	NCR	NCR
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	NCR
R&S	Wireless Communication Test Set	CMU200	112387	Apr. 02, 2007	Apr. 02, 2008
Agilent	ENA Series Network Analyzer	E5071B	MY42404650	Jan. 19, 2007	Jan. 19, 2008
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	NCR
Agilent	Power Meter	E4418B	GB40206143	Apr. 24, 2007	Apr. 24, 2008
Agilent	Power Sensor	8481H	3318A20779	Apr. 25, 2007	Apr. 25, 2008
Agilent	Signal Generator	8648C	3847A05201	Jul. 03, 2007	Jul. 03, 2008
Agilent	Dual Directional Coupler	778D	50334	NCR	NCR
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	NCR
Mini-Circuits	Power Amplifier	ZVE-8G-SMA	D042005 671800514	NCR	NCR

Table 2. Test Equipment List



7. **Tissue Simulating Liquids**

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an 8720ES Network Analyzer.

INGREDIENT	FREQUENCY	
	HSL5G (Head)	MSL5G (Body)
Water	64%	78%
Mineral Oil	18%	11%
Emulsifiers	15%	9%
Additives and Salt	3%	2%

Table 3. Recipes for Head & Body Tissue Simulating Liquids

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.



Target Frequency		Head		Body	
(MHz)		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150		52.3	0.76	61.9	0.80
300		45.3	0.87	58.2	0.92
450		43.5	0.87	56.7	0.94
835		41.5	0.90	55.2	0.97
900		41.5	0.97	55.0	1.05
915		41.5	0.98	55.0	1.06
1450		40.5	1.20	54.0	1.30
1610		40.3	1.29	53.8	1.40
1800 - 2000		40.0	1.40	53.3	1.52
2450		39.2	1.80	52.7	1.95
3000		38.5	2.40	52.0	2.73
5800		35.3	5.27	48.2	6.00
(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)					

Table 4. Tissue dielectric parameters for head and body phantoms

7.1 Liquid Confirmation

7.1.1 Parameters

Liquid Verify								
Ambient Temperature : 22 ± 3 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
2450MHz Body	2450MHz	22.0	ϵ_r	52.7	52.4	-0.57	± 5	Sep. 12, 2007
			σ	1.95	1.92	1.54	± 5	

Table 5. Measured Tissue dielectric parameters for head and body phantoms

7.1.2 Liquid Depth

The liquid level was during measurement 15cm $\pm 0.5\text{cm}$.

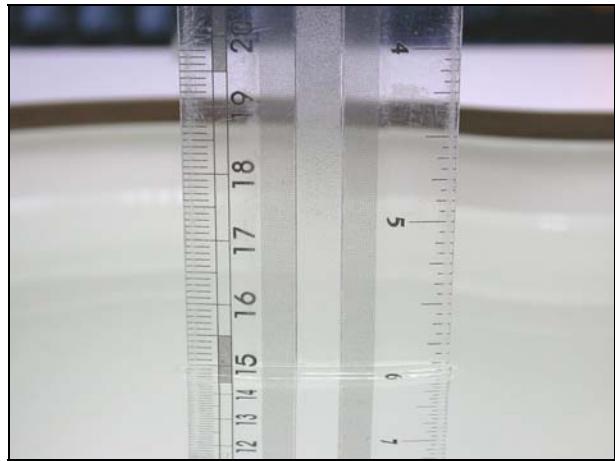


Figure 8. Head-Tissue-Simulating-Liquid

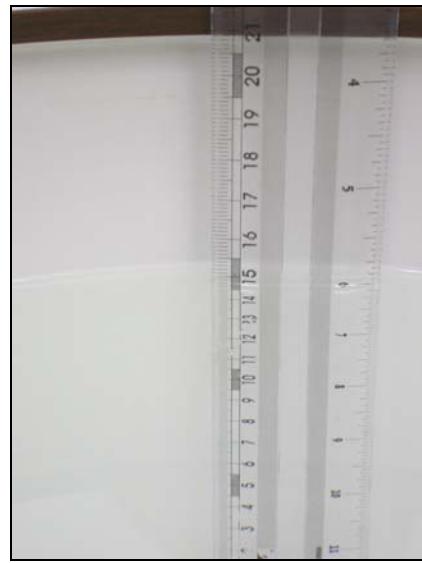


Figure 9. Body-Tissue-Simulating-Liquid



8. Measurement Process

8.1 Device and Test Conditions

The Test Device was provided by **Accton Technology Corporation** for this evaluation. The spatial peak SAR values were assessed for the lowest, middle and highest channels defined by WLAN 802.11b & 802.11g & 802.11n_20MHz (Ch1 = 2412MHz , Ch6 = 2437MHz , Ch11 = 2462MHz) systems and 802.11n_40MHz (Ch3 = 2422 MHz , Ch6 = 2437MHz , Ch9 = 2452MHz) systems. The antenna(s), battery and accessories shall be those specified by the manufacturer. The battery shall be fully charged before each measurement and there shall be no external connections.

Usage	Operates with a built-in test mode by client	Distance between antenna axis at the joint and the liquid surface:	For Body, EUT Tip to phantom, 0mm separation. For Body, EUT Bottom to phantom, 11.6mm separation.		
Simulating human Head/Body	Body	EUT Battery	NA		
Conducted power	Channel		Frequency (MHz)	Before SAR Test (dBm)	After SAR Test (dBm)
	802.11b (1MHz)	Highest Channel -11	2462	18.17	18.09
		Middle Channel -06	2437	18.49	18.32
		Lowest Channel -01	2412	18.22	18.12
	802.11b (11MHz)	Highest Channel -11	2462	18.29	18.20
		Middle Channel -06	2437	18.25	18.17
		Lowest Channel -01	2412	18.12	18.01
	802.11g (6MHz)	Highest Channel -11	2462	15.23	15.22
		Middle Channel -06	2437	15.29	15.18
		Lowest Channel -01	2412	15.21	15.13
	802.11g (54MHz)	Highest Channel -11	2462	15.22	15.15
		Middle Channel -06	2437	15.55	15.47
		Lowest Channel -01	2412	15.35	15.30
	802.11n_20MHz (6.5MHz)	Highest Channel -11	2462	15.45	15.38
		Middle Channel -06	2437	15.33	15.21
		Lowest Channel -01	2412	15.24	15.13
	802.11n_20MHz (65MHz)	Highest Channel -11	2462	15.25	15.15
		Middle Channel -06	2437	15.43	15.36
		Lowest Channel -01	2412	15.38	15.29
	802.11n_40MHz (6.5MHz)	Highest Channel -09	2452	14.36	14.25
		Middle Channel -06	2437	14.23	14.13
		Lowest Channel -03	2422	14.29	14.22
	802.11n_40MHz (65MHz)	Highest Channel -09	2452	14.50	14.41
		Middle Channel -06	2437	14.05	13.98
		Lowest Channel -03	2422	14.27	14.16

Note: The EUT has built-in test mode that used to evaluate SAR.

8.2 System Performance Check

8.2.1 Symmetric Dipoles for System Validation

Construction	Symmetrical dipole with I/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions. Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	450, 900, 1800, 2000, 2450MHz
Return Loss	> 20 dB at specified validation position
Power Capability	> 100 W (f < 1GHz); > 40 W (f > 1GHz)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D450V2 : dipole length 270 mm; overall height 330 mm D900V2 : dipole length 149 mm; overall height 330 mm D1800V2 : dipole length 72 mm; overall height 300 mm D2000V2 : dipole length 65 mm; overall height 300 mm D2450V2 : dipole length 51.5 mm; overall height 300 mm



Figure 10. Validation Kit



8.2.2 Validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 7\%$. The validation was performed at 2450MHz.

Validation kit		Mixture Type	SAR_{1g} [mW/g]		SAR_{10g} [mW/g]		Date of Calibration
D2450V2-SN712		Body	53.6		24.76		Feb, 20, 2007
Frequency (MHz)	Power (dBm)	SAR_{1g} (mW/g)	SAR_{10g} (mW/g)	Drift (dB)	Difference percentage		Date
		1g			1g	10g	
2450 (Body)	250mW	13.6	6.35	0.009	1.5 %	2.6 %	Sep. 16, 2007
	Normalize to 1 Watt	54.4	25.4				
2450 (Body)	250mW	13.5	6.28	0.024	0.7 %	1.5 %	Sep. 21, 2007
	Normalize to 1 Watt	54	25.12				



8.3 Dosimetric Assessment Setup

8.3.1 Headset Test Position - Body-Worn

Body-Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a handset output should be tested with a handset connected to the device.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances.

For this test :

- The EUT is placed into the holster/belt clip and the holster is positioned against the surface of the phantom in a normal operating position.
- Since this EUT doesn't supply any body-worn accessory to the end user, a distance of 11.6 mm was tested to confirm the necessary "minimum SAR separation distance".

(*Note : this distance includes the 2 mm phantom shell thickness.)



8.3.2 Measurement Procedures

The evaluation was performed with the following procedures :

Surface Check : A surface check job gathers data used with optical surface detection. It determines the distance from the phantom surface where the reflection from the optical detector has its peak. Any following measurement jobs using optical surface detection will then rely on this value. The surface check performs its search a specified number of times, so that the repeatability can be verified. The probe tip distance is 1.3mm to phantom inner surface during scans.

Reference : The reference job measures the field at a specified reference position, at 4 mm from the selected section's grid reference point.

Area Scan : The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines can find the maximum locations even in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. Any following zoom scan within the same procedure will then perform fine scans around these maxima. The area covered the entire dimension of the EUT and the horizontal grid spacing was 15 mm x 15 mm.

Zoom Scan : Zoom scans are used to assess the highest averaged SAR for cubic averaging volumes with 1 g and 10 g of simulated tissue. The zoom scan measures 5 x 5 x 7 points in a 32 x 32 x 30 mm cube whose base faces are centered around the maxima returned from a preceding area scan within the same procedure.

Drift : The drift job measures the field at the same location as the most recent reference job within the same procedure, with the same settings. The drift measurement gives the field difference in dB from the last reference measurement. Several drift measurements are possible for each reference measurement. This allows monitoring of the power drift of the device in the batch process. If the value changed by more than 5%, the evaluation was repeated.



8.4 Spatial Peak SAR Evaluation

The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. Based on the Draft: SCC-34, SC-2, WG-2 - Computational Dosimetry, IEEE P1529/D0.0 (Draft Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) Associated with the Use of Wireless Handsets - Computational Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a “cube” measurement in a volume of $(32 \times 32 \times 30)\text{mm}^3$ ($5 \times 5 \times 7$ points). The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Postprocessing engine (SEMCAD). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location.

The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into three stages:

Interpolation and Extrapolation

The probe is calibrated at the center of the dipole sensors which is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated.

In DASY4, the choice of the coordinate system defining the location of the measurement points has no influence on the uncertainty of the interpolation, Maxima Search and SAR extrapolation routines. The interpolation, Maxima Search and extrapolation routines are all based on the modified Quadratic Shepard's method [7].



9. **Measurement Uncertainty**

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than $\pm 27\%$ [8].

According to Std. C95.3 [9], the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC [10], typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

Source of Uncertainty	Uncertainty Value	Probability Distribution	Divisor	C_i	Standard Uncertainty $\pm 1\%(1-g)$	V_i or V_{eff}
Type-A	0.9 %	Normal	1	1	0.9	9
Measurement System						
Probe Calibration	7 %	Normal	2	1	3.5	∞
Axial Isotropy	0.2dB	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
Hemispherical Isotropy	9.6 %	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
Spatial Resolution	0 %	Rectangular	$\sqrt{3}$	1	0	∞
Boundary Effect	11.0 %	Rectangular	$\sqrt{3}$	1	6.4	∞
Linearity	0.2dB	Rectangular	$\sqrt{3}$	1	2.7	∞
Detection Limit	1.0 %	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	1.0 %	Normal	1	1	1.0	∞
RF Ambient Conditions	3.0 %	Rectangular	$\sqrt{3}$	1	1.73	∞
Probe Positioner Mech. Const.	0.4 %	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning	0.35 %	Rectangular	$\sqrt{3}$	1	0.2	∞
Extrapolation and Integration	3.9 %	Rectangular	$\sqrt{3}$	1	2.3	∞
Test sample Related						
Test sample Positioning	4.7 %	Normal	1	1	4.7	5
Device Holder Uncertainty	6.1 %	Normal	1	1	6.1	5
Drift of Output Power	5.0 %	Rectangular	$\sqrt{3}$	1	2.9	∞
Phantom and Setup						
Phantom Uncertainty (Including temperature effects)	4.0%	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity (target)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Conductivity (meas.)	10.0%	Rectangular	$\sqrt{3}$	0.6	3.4	∞
Liquid Permittivity (target)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity (meas.)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Combined standard uncertainty		RSS			13.5	88.7
Expanded uncertainty (Coverage factor = 2)		Normal (k=2)			27	

Table 6. Uncertainty Budget of DASY



10. SAR Test Results Summary

10.1 WLAN Body SAR _ EUT Setup Bottom to phantom

10.1.1 802.11b (1MHz Data Rate)

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40 - 70

Liquid :

Mixture Type :

MSL2450

Liquid Temperature (°C) :

22.0

Depth of liquid (cm) :

15

Measurement :

Crest Factor :

1

Probe S/N :

1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.084	-0.031	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.107	-0.070	22.3	22.0	-
2462	11	N/A	Flat	N/A	0.100	-0.153	22.1	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

10.1.2 802.11b (11MHz Data Rate)

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40 - 70

Liquid :

Mixture Type :

MSL2450

Liquid Temperature (°C) :

22.0

Depth of liquid (cm) :

15

Measurement :

Crest Factor :

1

Probe S/N :

1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.124	-0.055	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.089	-0.073	22.3	22.0	-
2462	11	N/A	Flat	N/A	0.068	-0.071	22.1	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					



10.1.3 802.11g (6MHz Data Rate)

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40 - 70**Liquid :**

Mixture Type :

MSL2450

Liquid Temperature (°C) :

22.0

Depth of liquid (cm) :

15**Measurement :**

Crest Factor :

1

Probe S/N :

1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.037	-0.133	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.036	-0.137	22.0	22.0	-
2462	11	N/A	Flat	N/A	0.032	-0.059	22.0	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

10.1.4 802.11g (54MHz Data Rate)

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40 - 70**Liquid :**

Mixture Type :

MSL2450

Liquid Temperature (°C) :

22.0

Depth of liquid (cm) :

15**Measurement :**

Crest Factor :

1

Probe S/N :

1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.047	-0.075	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.041	-0.040	22.0	22.0	-
2462	11	N/A	Flat	N/A	0.026	-0.031	22.0	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					



10.1.5 802.11n_20MHz (6.5MHz Data Rate)

Ambient :
Temperature (°C) : 22 ± 3Relative HUMIDITY (%) : 40 - 70
Liquid :
Mixture Type : MSL2450Liquid Temperature (°C) : 22.0
Measurement :
Crest Factor : 1Probe S/N : 1530

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.022	-0.136	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.022	-0.188	22.3	22.0	-
2462	11	N/A	Flat	N/A	0.015	0.010	22.1	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

Remark : 20MHz = Bandwidth

10.1.6 802.11n_20MHz (65MHz Data Rate)

Ambient :
Temperature (°C) : 22 ± 3Relative HUMIDITY (%) : 40 - 70
Liquid :
Mixture Type : MSL2450Liquid Temperature (°C) : 22.0
Measurement :
Crest Factor : 1Probe S/N : 1530

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.021	-0.095	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.042	-0.041	22.3	22.0	-
2462	11	N/A	Flat	N/A	0.018	-0.013	22.1	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

Remark : 20MHz = Bandwidth



10.1.7 802.11n_40MHz (6.5MHz Data Rate)

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40 - 70**Liquid :**

Mixture Type :

MSL2450

Liquid Temperature (°C) :

22.0

Depth of liquid (cm) :

15**Measurement :**

Crest Factor :

1

Probe S/N :

1530

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2422	3	N/A	Flat	N/A	0.025	-0.114	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.014	0.189	22.2	22.0	-
2452	9	N/A	Flat	N/A	0.018	-0.172	22.2	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

Remark : 40MHz = Bandwidth

10.1.8 802.11n_40MHz (65MHz Data Rate)

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40 - 70**Liquid :**

Mixture Type :

MSL2450

Liquid Temperature (°C) :

22.0

Depth of liquid (cm) :

15**Measurement :**

Crest Factor :

1

Probe S/N :

1530

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2422	3	N/A	Flat	N/A	0.024	-0.172	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.013	-0.164	22.2	22.0	-
2452	9	N/A	Flat	N/A	0.023	-0.122	22.2	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

Remark : 40MHz = Bandwidth



Figure 11. Body SAR Test Setup (Flat Section)_Tip

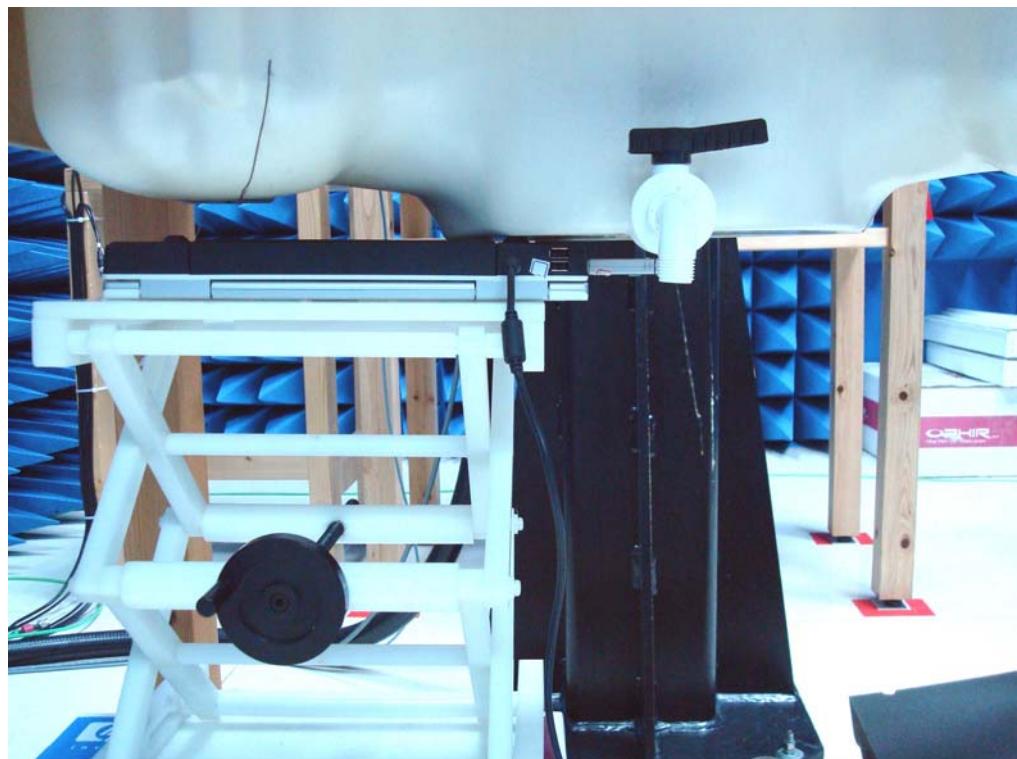


Figure 12. Body SAR Test Setup (Flat Section)_Tip



10.2 WLAN Body SAR _ EUT Setup Tip to phantom

10.2.1 802.11b (1MHz Data Rate)

Ambient :

Temperature (°C) : 22 ± 3 Relative HUMIDITY (%) : 40 - 70

Liquid :

Mixture Type : MSL2450 Liquid Temperature (°C) : 22.0

Depth of liquid (cm) : 15

Measurement :

Crest Factor : 1 Probe S/N : 1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.133	-0.006	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.097	-0.034	22.3	22.0	-
2462	11	N/A	Flat	N/A	0.078	-0.120	22.1	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

10.2.2 802.11b (11MHz Data Rate)

Ambient :

Temperature (°C) : 22 ± 3 Relative HUMIDITY (%) : 40 - 70

Liquid :

Mixture Type : MSL2450 Liquid Temperature (°C) : 22.0

Depth of liquid (cm) : 15

Measurement :

Crest Factor : 1 Probe S/N : 1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.143	-0.095	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.121	-0.048	22.3	22.0	-
2462	11	N/A	Flat	N/A	0.087	-0.076	22.1	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					



10.2.3 802.11g (6MHz Data Rate)

Ambient :Temperature (°C) : 22 ± 3 Relative HUMIDITY (%) : 40 - 70**Liquid :**Mixture Type : MSL2450 Liquid Temperature (°C) : 22.0Depth of liquid (cm) : 15**Measurement :**Crest Factor : 1 Probe S/N : 1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.048	-0.001	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.034	-0.023	22.0	22.0	-
2462	11	N/A	Flat	N/A	0.028	-0.168	22.0	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

10.2.4 802.11g (54MHz Data Rate)

Ambient :Temperature (°C) : 22 ± 3 Relative HUMIDITY (%) : 40 - 70**Liquid :**Mixture Type : MSL2450 Liquid Temperature (°C) : 22.0Depth of liquid (cm) : 15**Measurement :**Crest Factor : 1 Probe S/N : 1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.046	-0.161	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.037	-0.066	22.0	22.0	-
2462	11	N/A	Flat	N/A	0.029	-0.038	22.0	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					



10.2.5 802.11n_20MHz (6.5MHz Data Rate)

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40 - 70**Liquid :**

Mixture Type :

MSL2450

Liquid Temperature (°C) :

22.0

Depth of liquid (cm) :

15**Measurement :**

Crest Factor :

1

Probe S/N :

1530

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.045	-0.034	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.046	-0.081	22.3	22.0	-
2462	11	N/A	Flat	N/A	0.035	0.006	22.1	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

Remark : 20MHz = Bandwidth

10.2.6 802.11n_20MHz (65MHz Data Rate)

Ambient :

Temperature (°C) :

22 ± 3

Relative HUMIDITY (%) :

40 - 70**Liquid :**

Mixture Type :

MSL2450

Liquid Temperature (°C) :

22.0

Depth of liquid (cm) :

15**Measurement :**

Crest Factor :

1

Probe S/N :

1530

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2412	1	N/A	Flat	N/A	0.055	-0.084	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.041	-0.068	22.3	22.0	-
2462	11	N/A	Flat	N/A	0.045	-0.158	22.1	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

Remark : 20MHz = Bandwidth



10.2.7 802.11n_40MHz (6.5MHz Data Rate)

Ambient :Temperature (°C) : 22 ± 3 Relative HUMIDITY (%) : 40 - 70**Liquid :**Mixture Type : MSL2450 Liquid Temperature (°C) : 22.0Depth of liquid (cm) : 15**Measurement :**Crest Factor : 1 Probe S/N : 1530

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2422	3	N/A	Flat	N/A	0.043	-0.066	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.028	-0.113	22.2	22.0	-
2452	9	N/A	Flat	N/A	0.027	-0.093	22.2	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

Remark : 40MHz = Bandwidth

10.2.8 802.11n_40MHz (65MHz Data Rate)

Ambient :Temperature (°C) : 22 ± 3 Relative HUMIDITY (%) : 40 - 70**Liquid :**Mixture Type : MSL2450 Liquid Temperature (°C) : 22.0Depth of liquid (cm) : 15**Measurement :**Crest Factor : 1 Probe S/N : 1530

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
2422	3	N/A	Flat	N/A	0.053	-0.125	22.1	22.0	-
2437	6	N/A	Flat	N/A	0.028	-0.015	22.2	22.0	-
2452	9	N/A	Flat	N/A	0.028	-0.038	22.2	22.0	-
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1 gram					

Remark : 40MHz = Bandwidth



Figure 13. Body SAR Test Setup (Flat Section)_Bottom



Figure 14. Body SAR Test Setup (Flat Section)_Bottom



10.3 Std. C95.1-1999 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 7. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole - body.
- *** The Spatial Average value of the SAR averaged over the partial - body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



11. Conclusion

The SAR test values found for the portable mobile phone **Accton Technology Corporation Trade Mark : Accton Model (s) : WM6618R-FLF-ZZ** are below the maximum recommended level of 1.6 W/kg (mW/g).



12. References

- [1] Std. C95.1-1999, “*American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz*”, New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, “*Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields*”, NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, “*Automatic E-field scanning system for dosimetric assessments*”, IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, “*Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency*”, in ICECOM’97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, “*E-field probe with improved isotropy in brain simulating liquids*”, in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, “*Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz*”, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, “*Multivariate Interpolation Of Large Sets Of Scattered Data*”, University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, *Dosimetric evaluation of mobile communications equipment with known precision*, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, “*IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave*”, New York: IEEE”, Aug. 1992.
- [10]CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), *Human Exposure to Electromagnetic Fields High-frequency: 10KHz-300GHz*, Jan. 1995.



Appendix A - System Performance Check

See following Attached Pages for System Performance Check.

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 9:57:32 AM

System Performance Check at 2450MHz_20070916_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

System Performance Check at 2450MHz/Area Scan (71x71x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 16.0 mW/g

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 91.5 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.35 mW/g

Maximum value of SAR (measured) = 15.3 mW/g

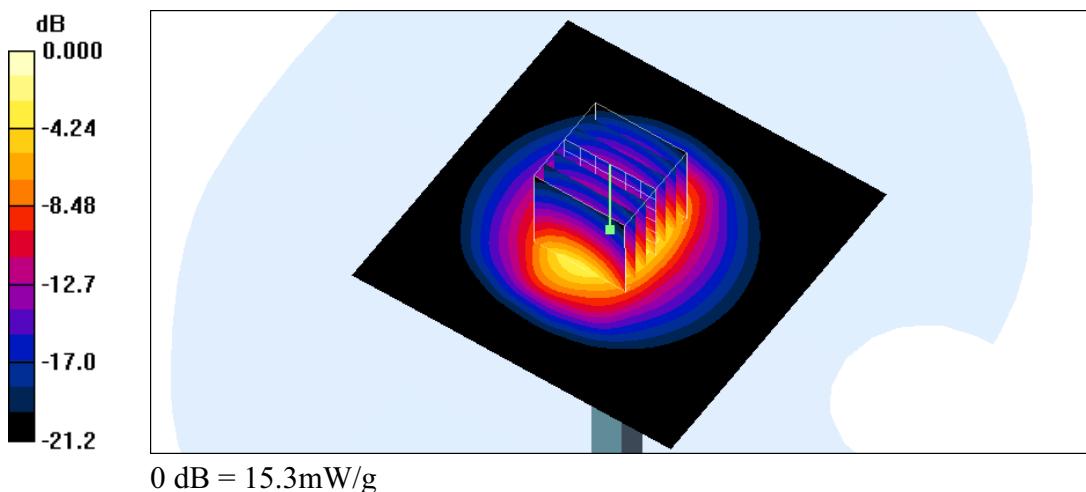

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 12:43:24 AM

System Performance Check at 2450MHz_20070921_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

System Performance Check at 2450MHz/Area Scan (71x71x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 16.3 mW/g

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.3 V/m; Power Drift = 0.024 dB


Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.28 mW/g


Maximum value of SAR (measured) = 15.1 mW/g

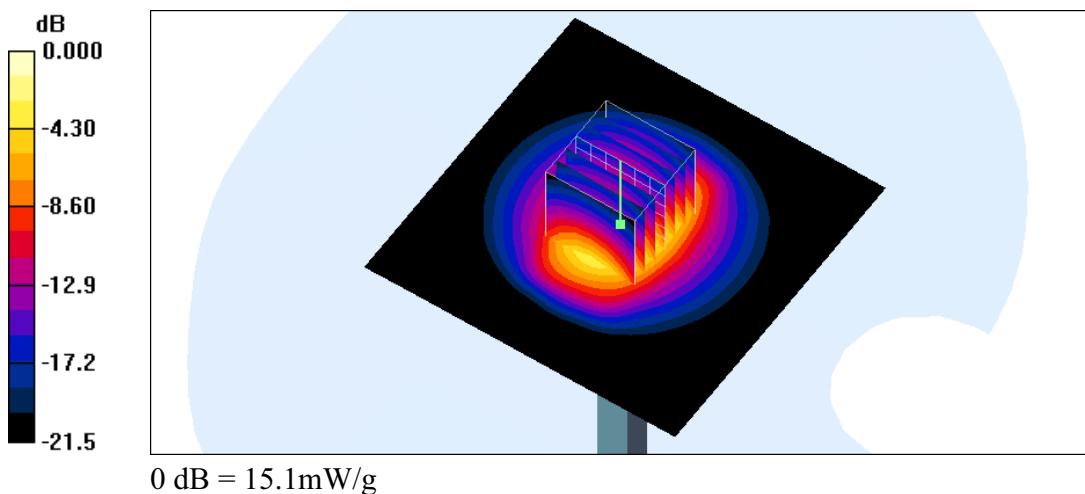

Z-axis Plot of System Performance Check

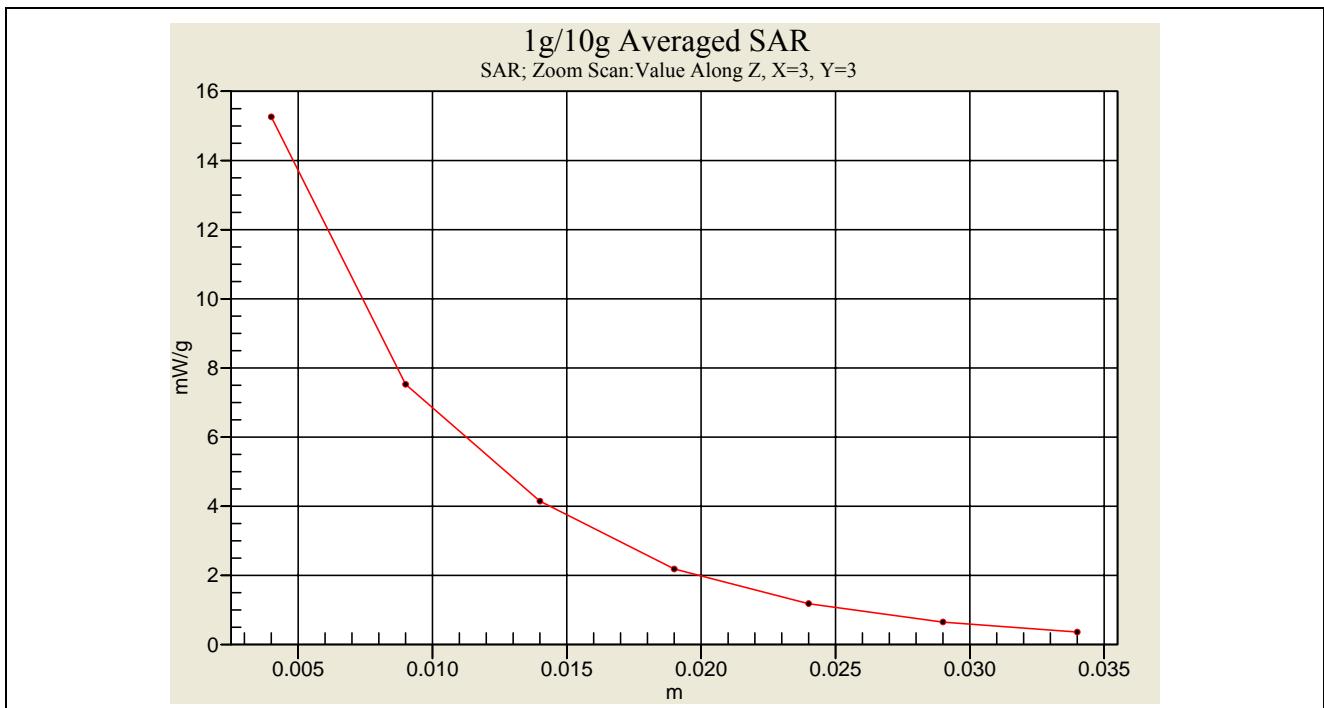

Body-Tissue-Simulating-Liquid 2GHz (2007. 09. 16)

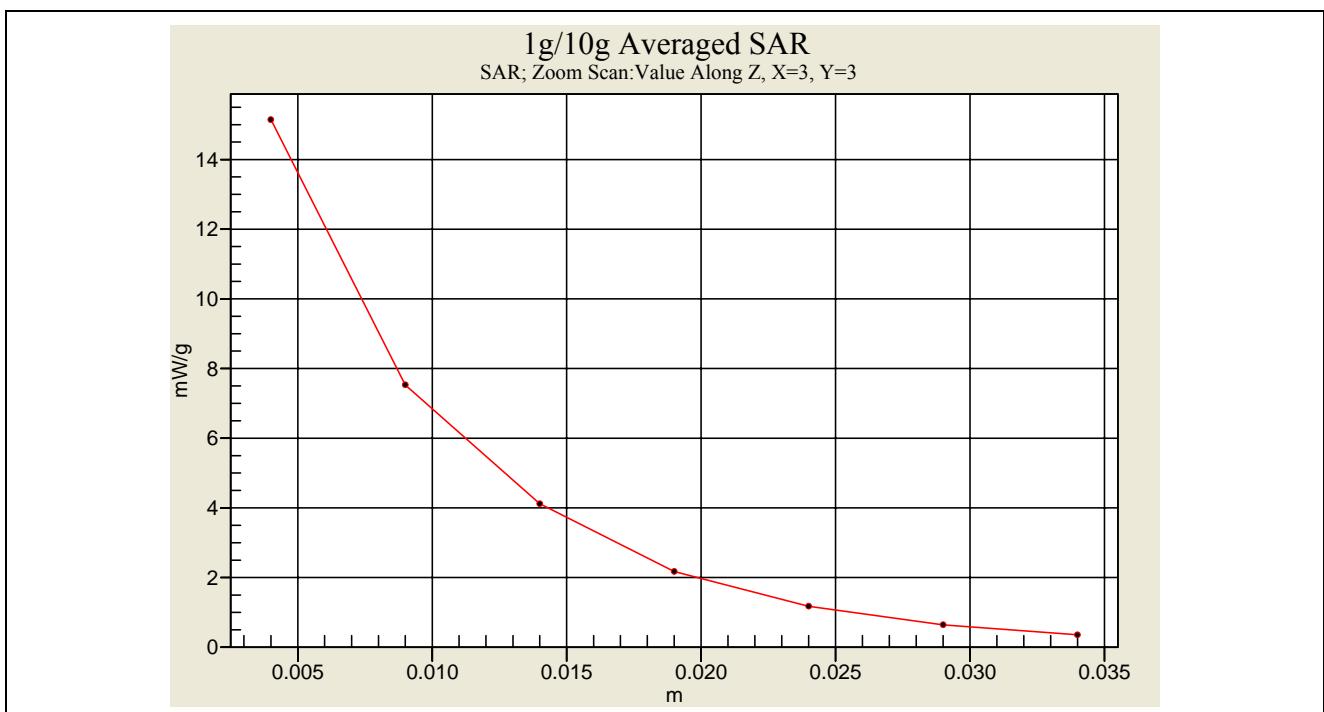

Body-Tissue-Simulating-Liquid 2GHz (2007. 09. 21)



Appendix B - SAR Measurement Data

See following Attached Pages for SAR Measurement Data.

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 2:35:04 PM

Flat_IEEE 802.11b CH1_1M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.108 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.02 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.090 mW/g

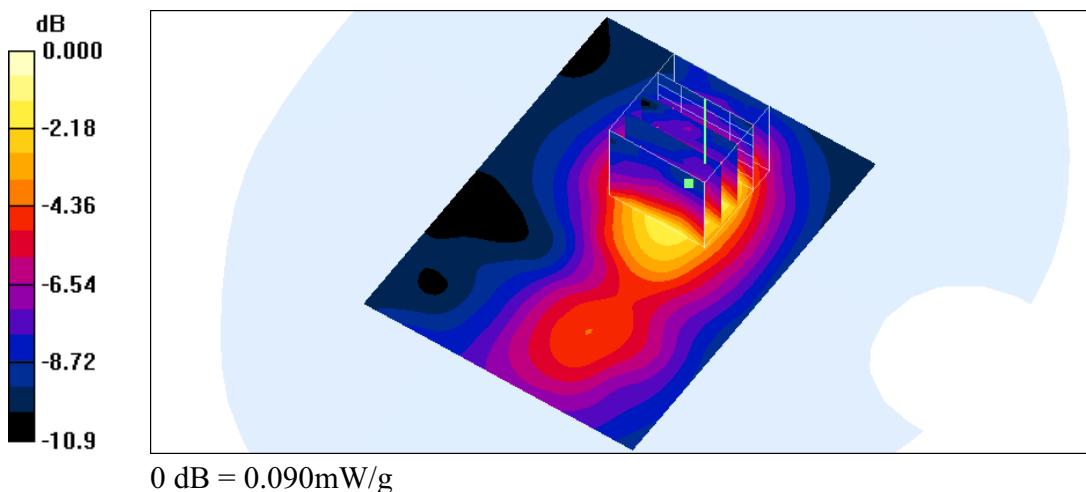

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 2:50:48 PM

Flat_IEEE 802.11b CH6_1M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.135 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.07 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.116 mW/g

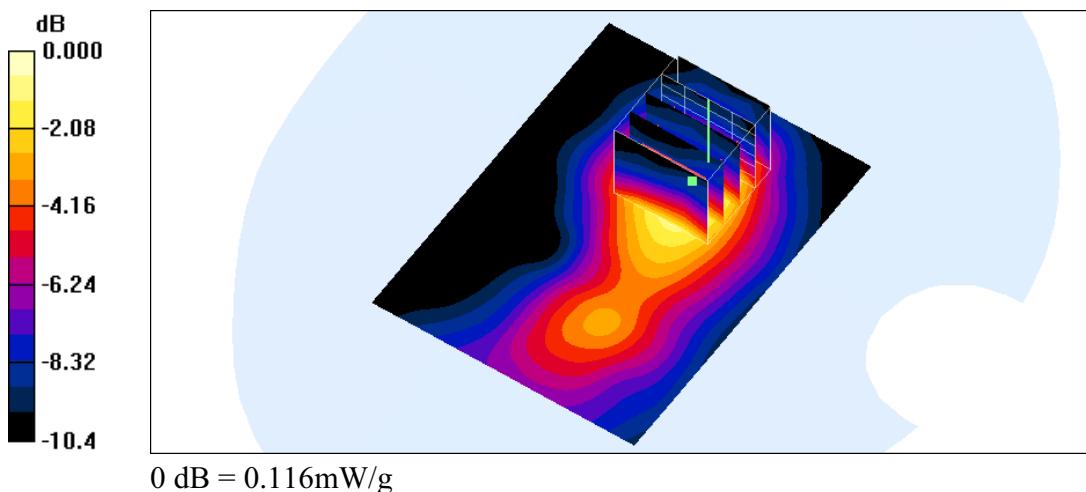

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 3:08:19 PM

Flat_IEEE 802.11b CH11_1M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.159 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.53 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.107 mW/g

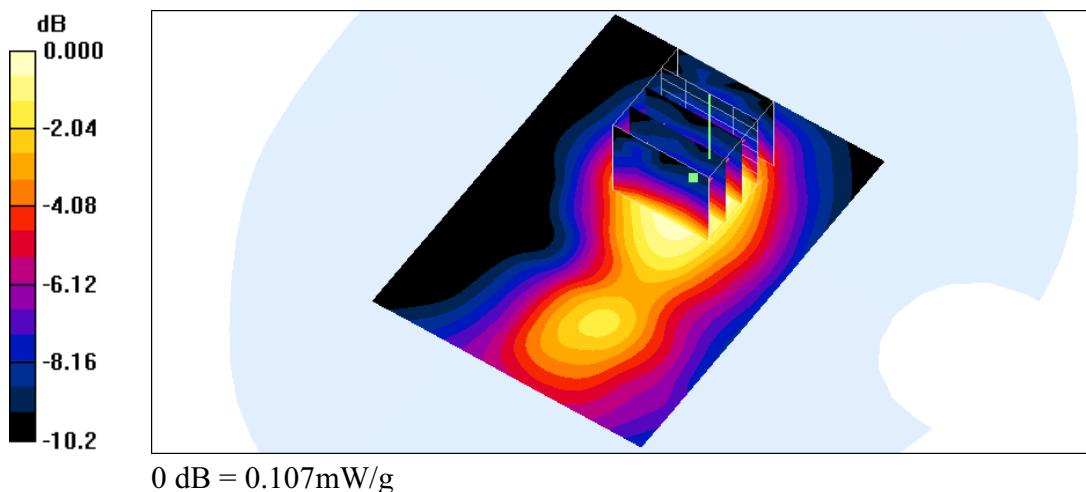

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 4:24:11 PM

Flat_IEEE 802.11b CH1_11M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.180 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.91 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.141 mW/g

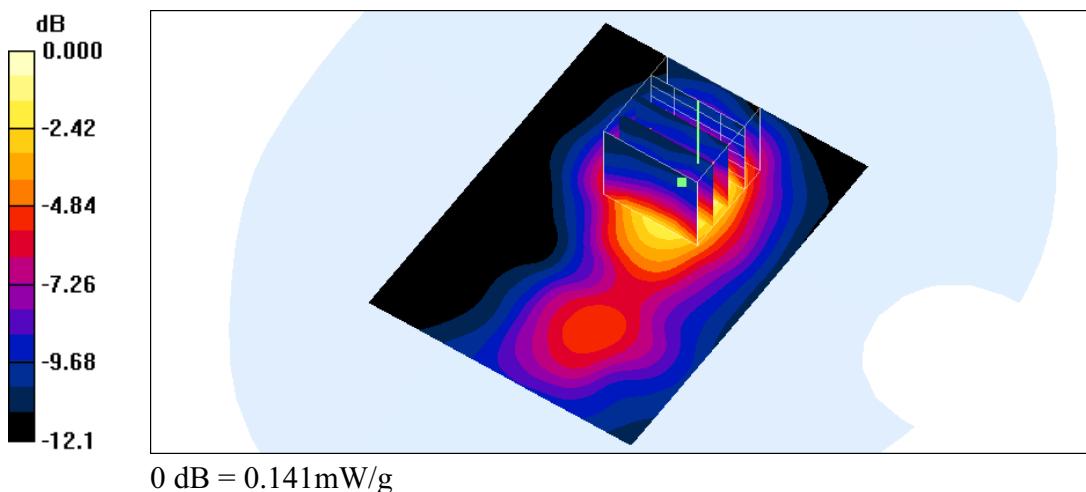

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 4:37:11 PM

Flat_IEEE 802.11b CH6_11M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.125 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.40 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.097 mW/g

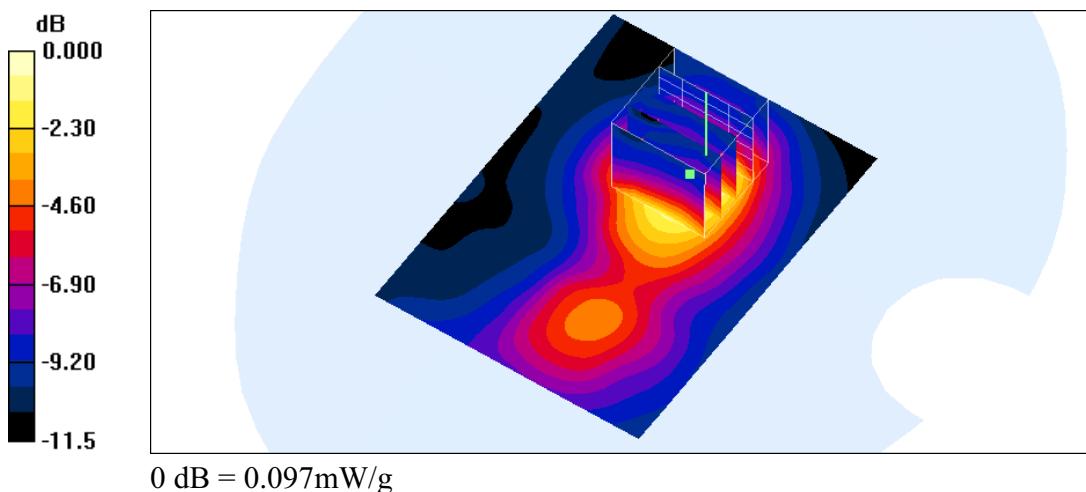

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 4:52:08 PM

Flat_IEEE 802.11b CH11_11M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.099 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.76 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

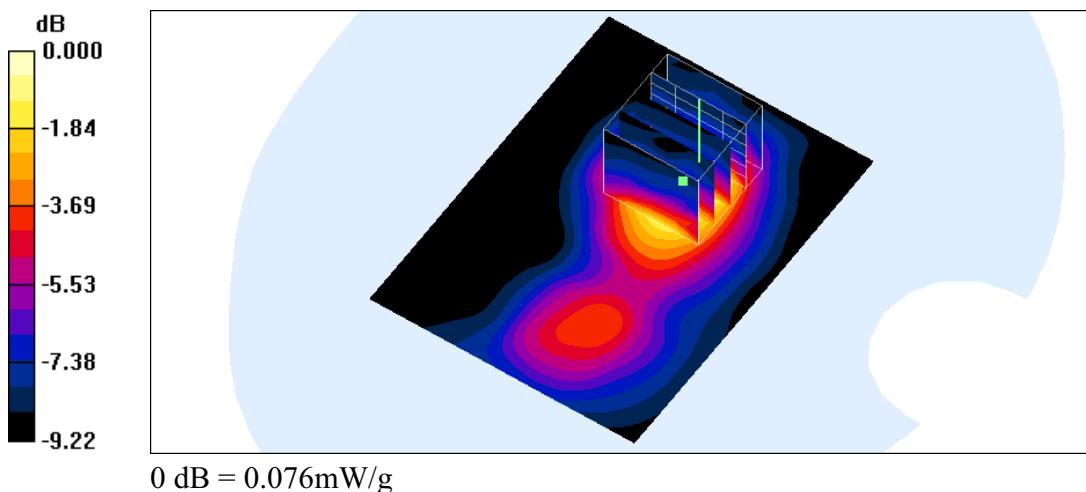

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 5:07:55 PM

Flat_IEEE 802.11g CH1_6M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.045 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.00 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.069 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.041 mW/g

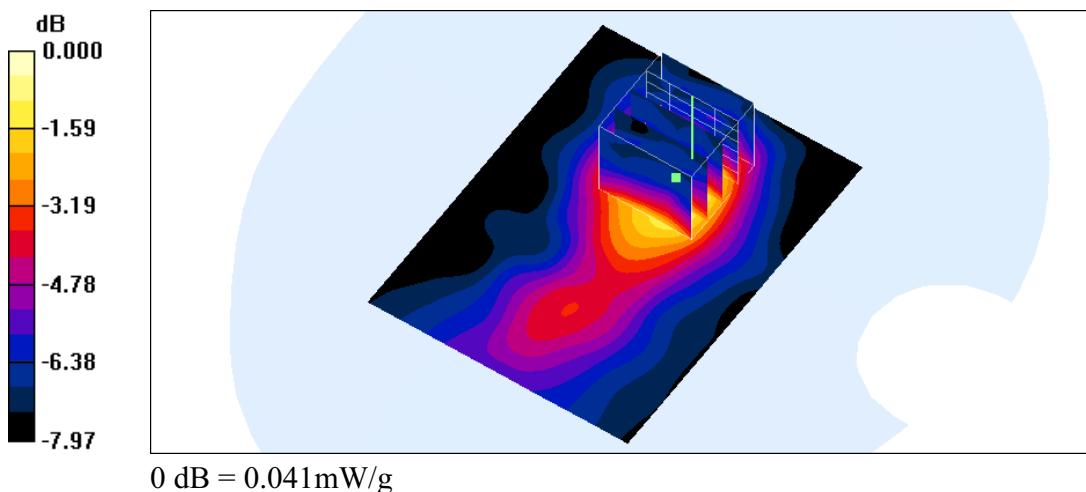

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 5:22:49 PM

Flat_IEEE 802.11g CH6_6M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.043 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.83 V/m; Power Drift = -0.137 dB

Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

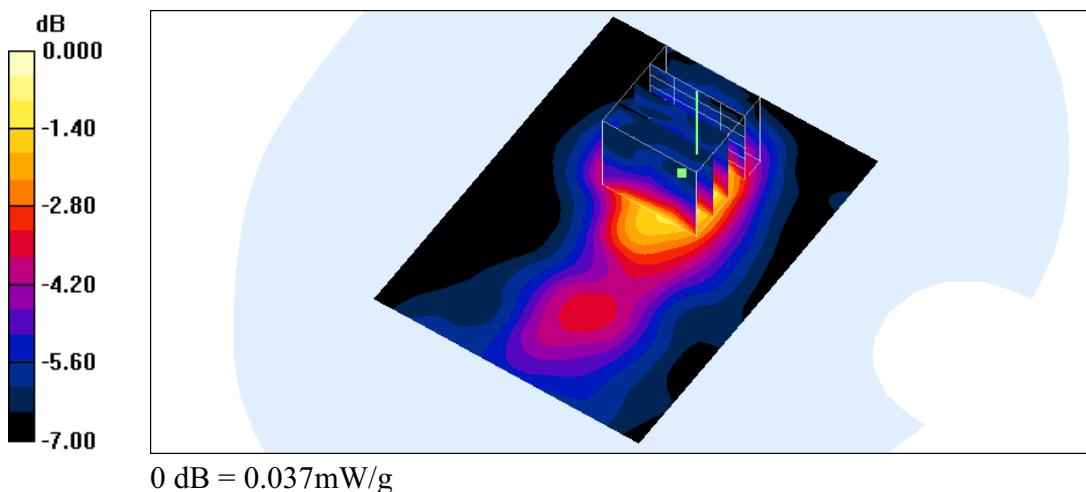

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 7:58:52 PM

Flat_IEEE 802.11g CH11_6M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.038 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.24 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.064 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.035 mW/g

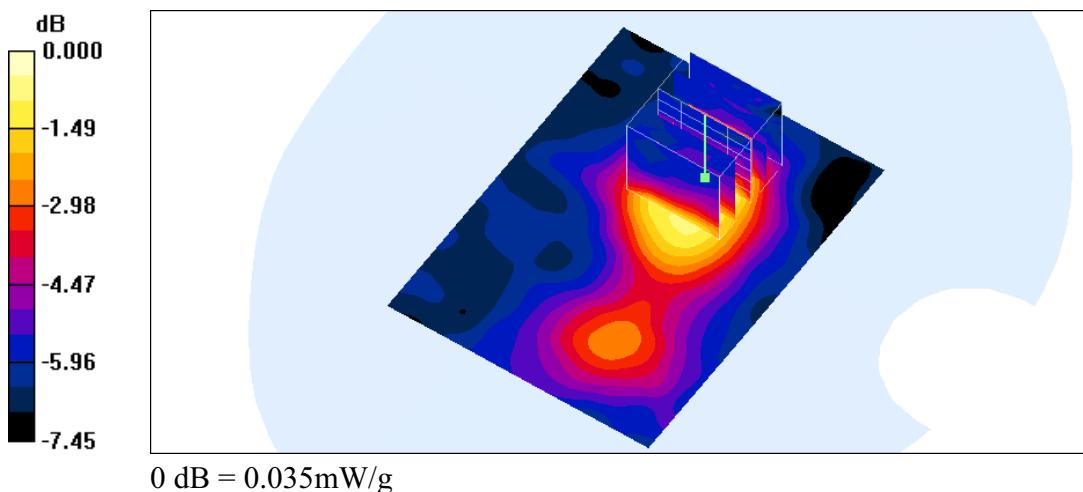

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 6:22:20 PM

Flat_IEEE 802.11g CH1_54M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.062 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.66 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

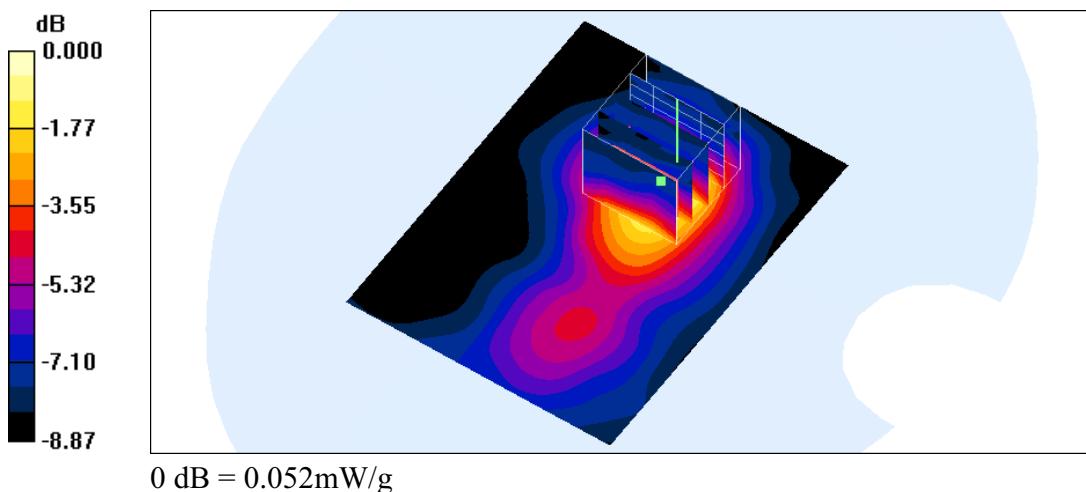

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 6:07:04 PM

Flat_IEEE 802.11g CH6_54M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.048 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.00 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.094 W/kg

SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.043 mW/g

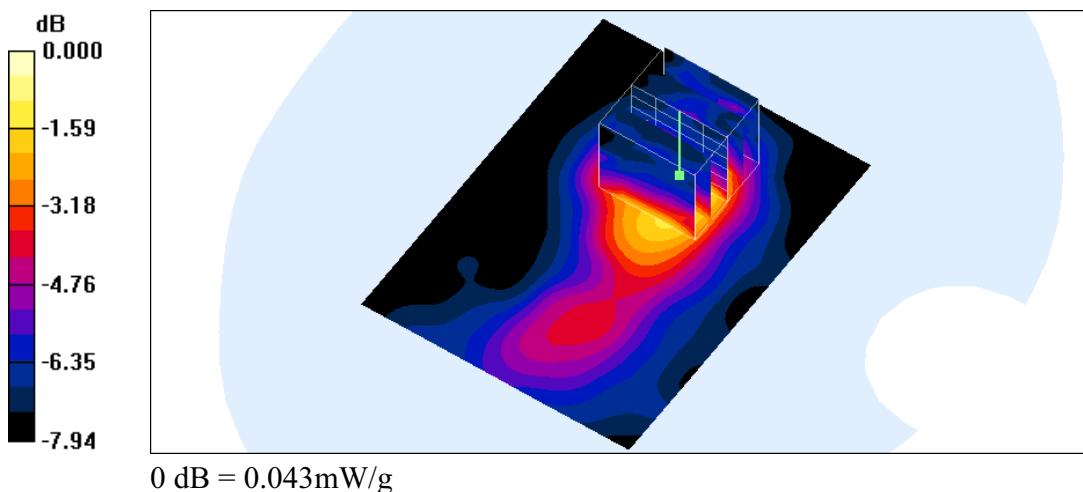

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 8:07:14 PM

Flat_IEEE 802.11g CH11_54M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.028 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.82 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.046 W/kg

SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.027 mW/g

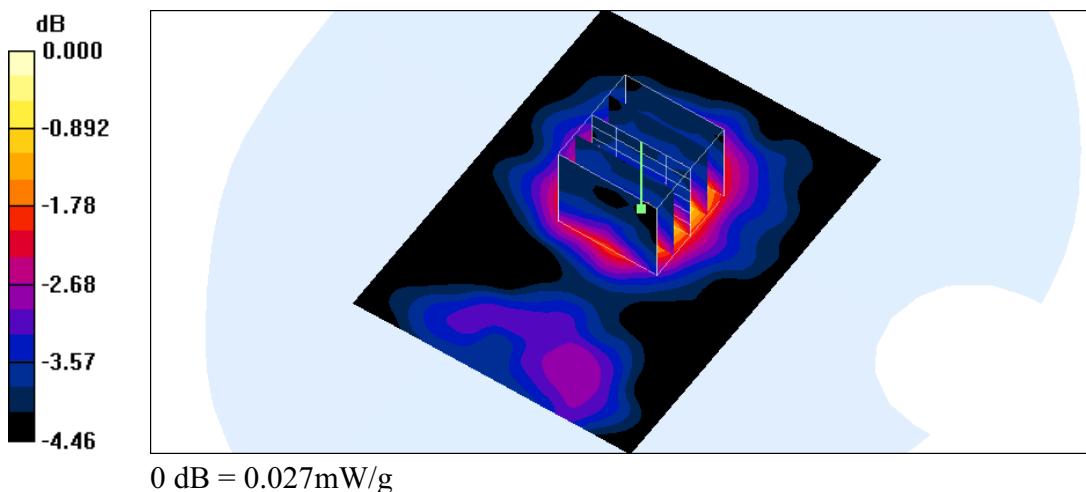

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 8:40:20 PM

Flat_IEEE 802.11n CH1_20M mode_6.5M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.024 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.51 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 0.036 W/kg

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

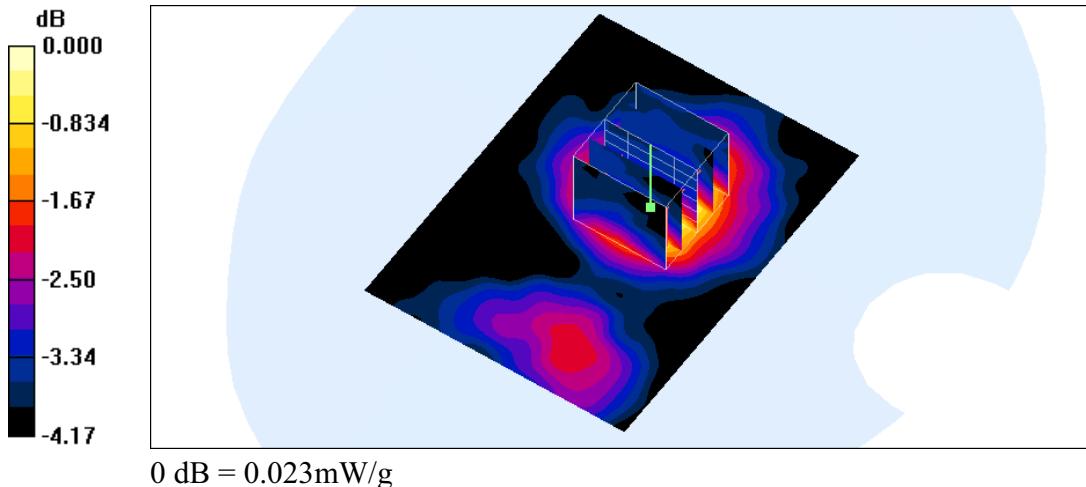

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 8:59:33 PM

Flat_IEEE 802.11n CH6_20M mode_6.5M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.024 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.27 V/m; Power Drift = -0.188 dB

Peak SAR (extrapolated) = 0.042 W/kg

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

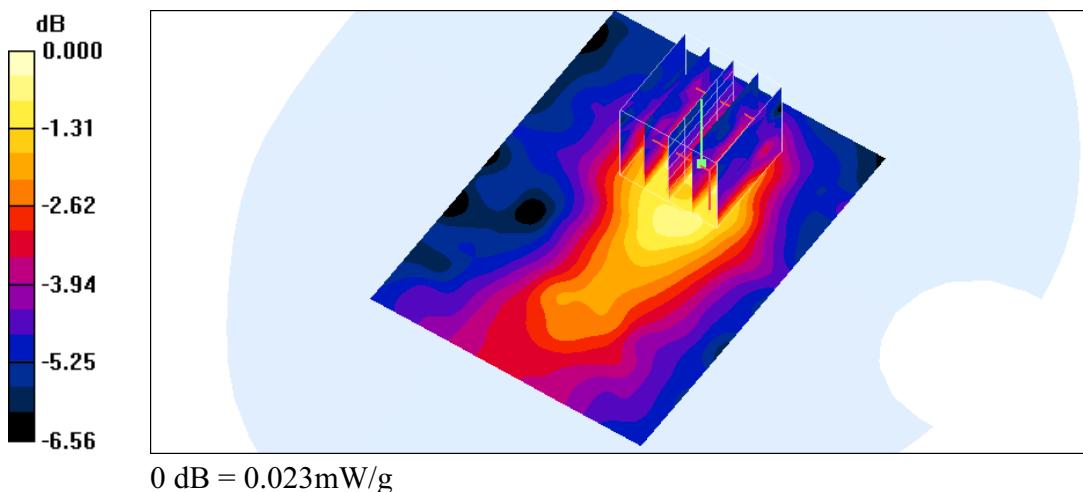

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 9:56:32 PM

Flat_IEEE 802.11n CH11_20M mode_6.5M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.018 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.79 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

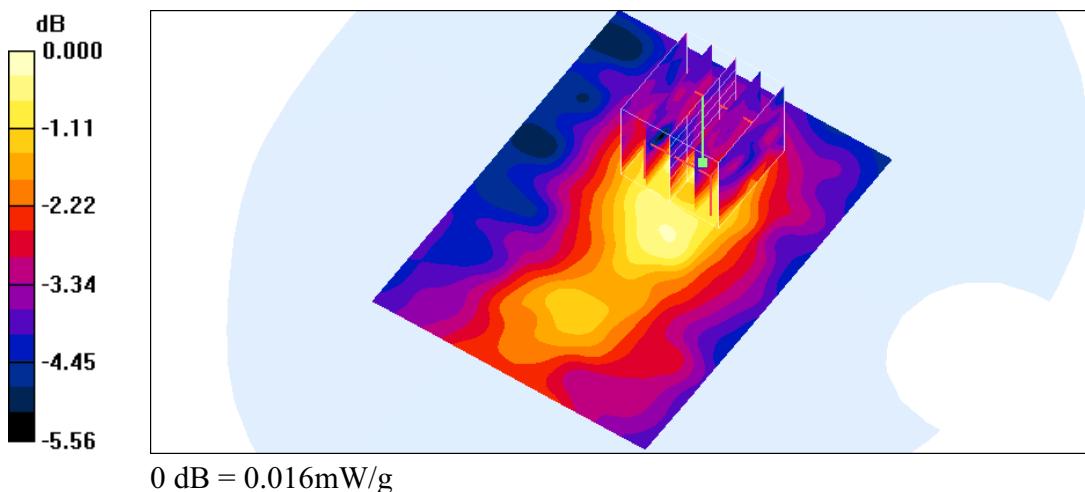

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 10:23:53 PM

Flat_IEEE 802.11n CH1_20M mode_65M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.023 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.30 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.036 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

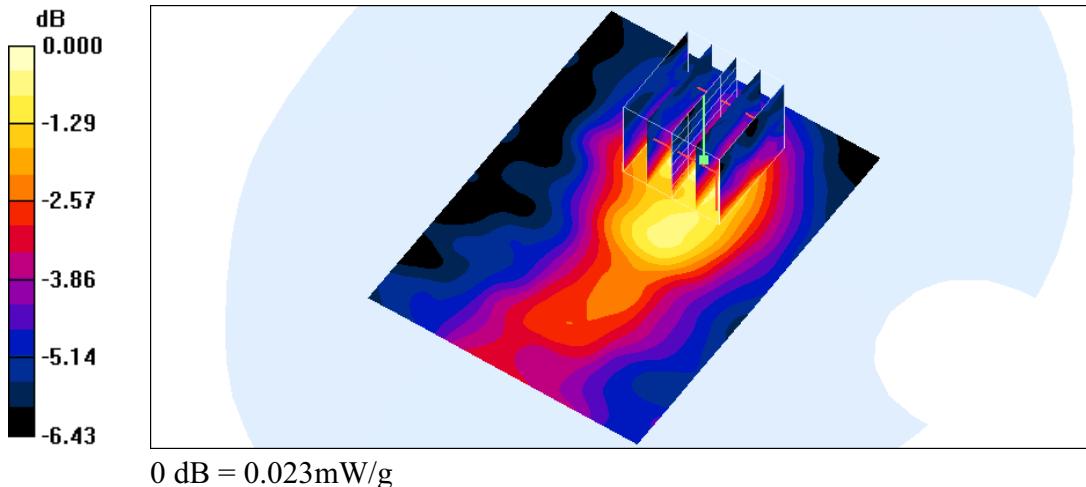

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 9:05:03 PM

Flat_IEEE 802.11n CH6_20M mode_65M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.046 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.44 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.079 W/kg

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

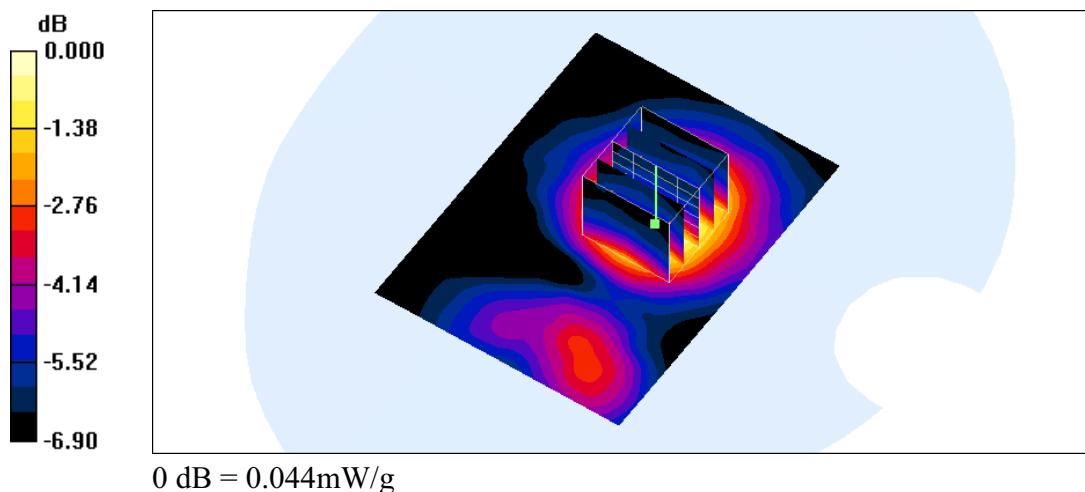

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/16/2007 11:35:39 PM

Flat_IEEE 802.11n CH11_20M mode_65M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.020 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.90 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.036 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

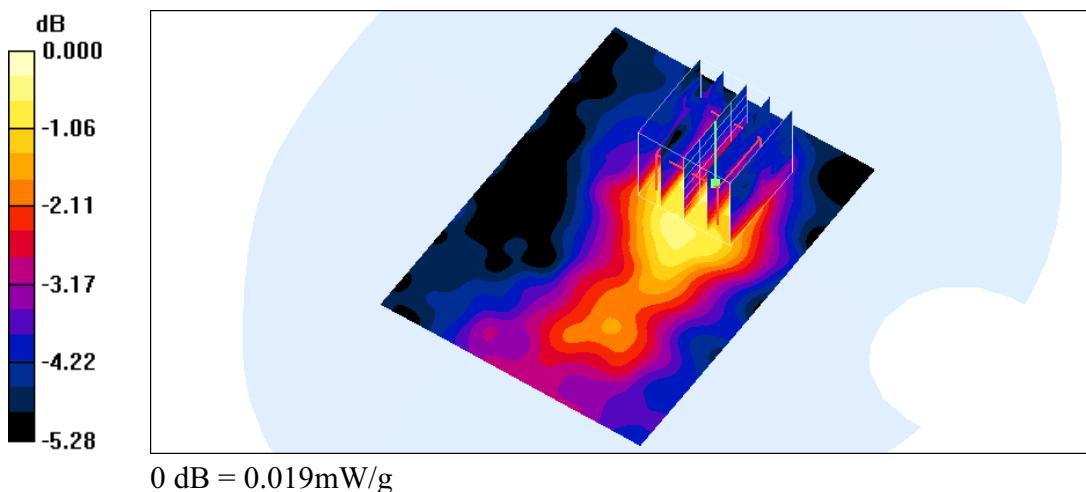

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 12:17:59 AM

Flat_IEEE 802.11n CH3_40M mode_6.5M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.026 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.21 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.047 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.026 mW/g

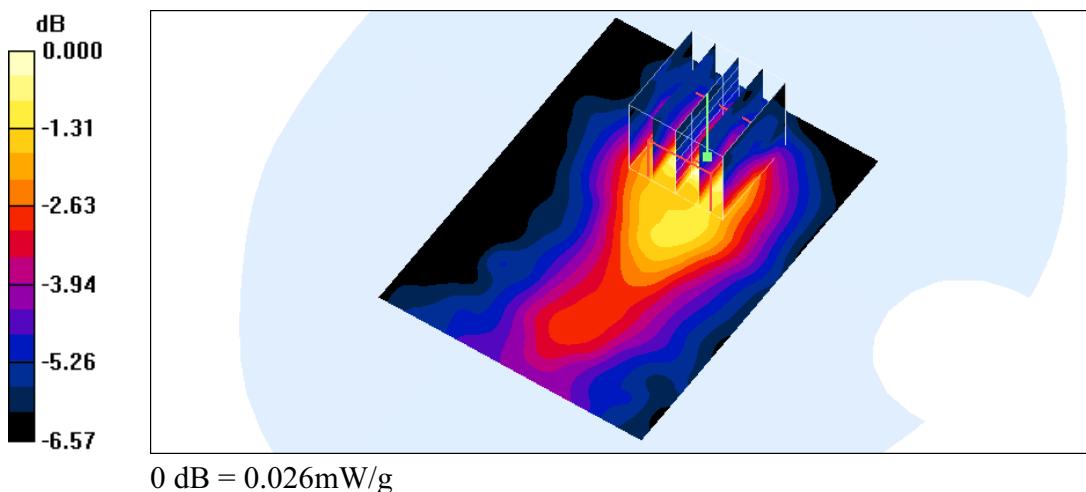

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 7:34:58 AM

Flat_IEEE 802.11n CH6_40M mode_6.5M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.015 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.46 V/m; Power Drift = 0.189 dB

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00854 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

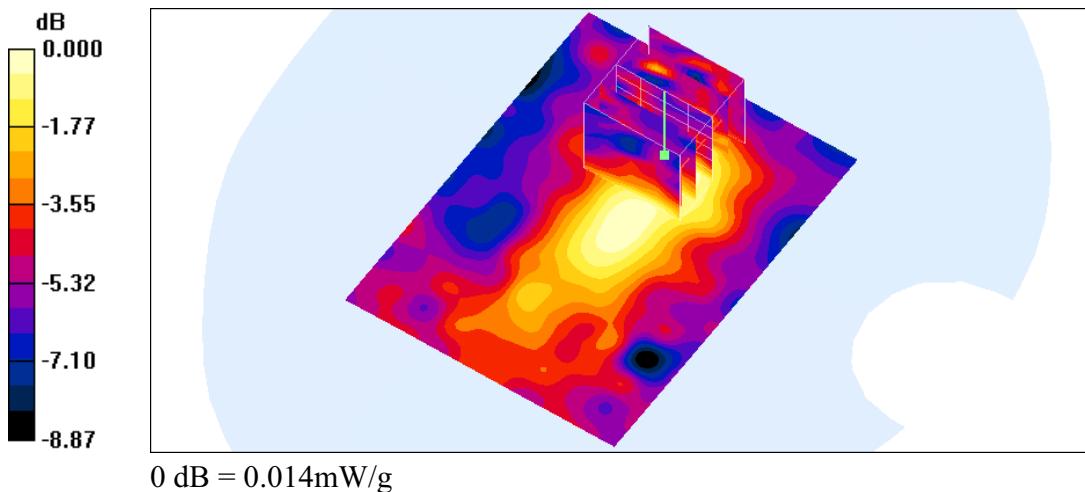

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 4:21:16 AM

Flat_IEEE 802.11n CH9_40M mode_6.5M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2452 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2452 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.022 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.16 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.035 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00938 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

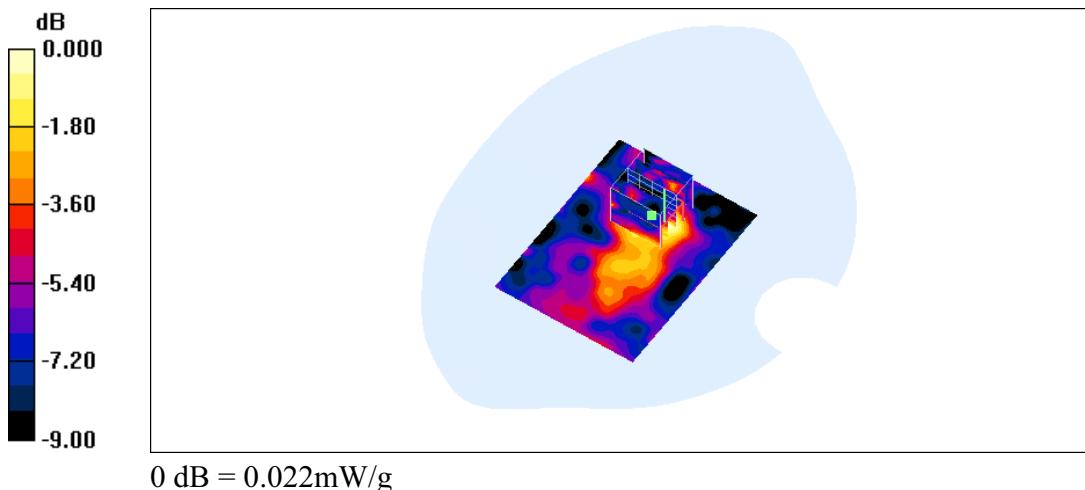

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 12:39:45 AM

Flat_IEEE 802.11n CH3_40M mode_65M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.026 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.32 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

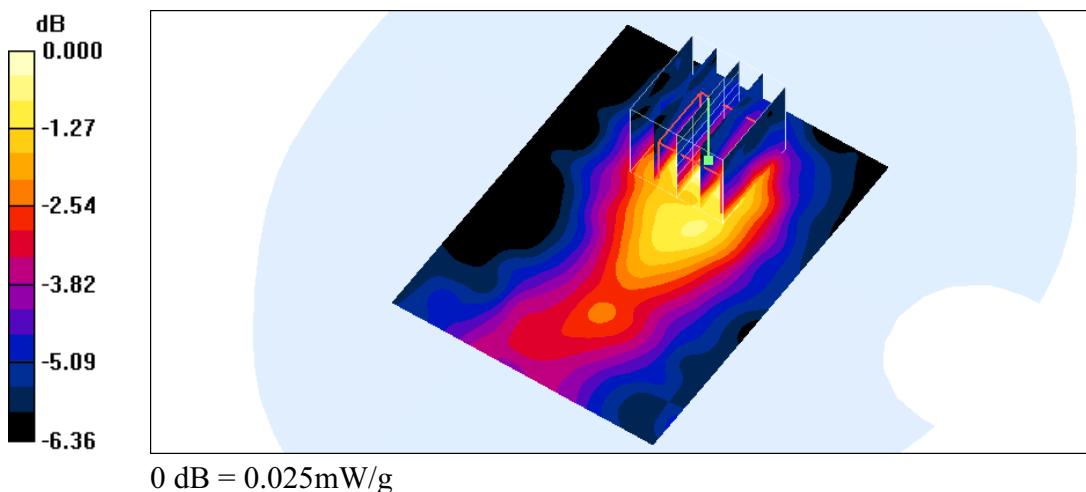

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 6:01:53 AM

Flat_IEEE 802.11n CH6_40M mode_65M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.017 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.72 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00772 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

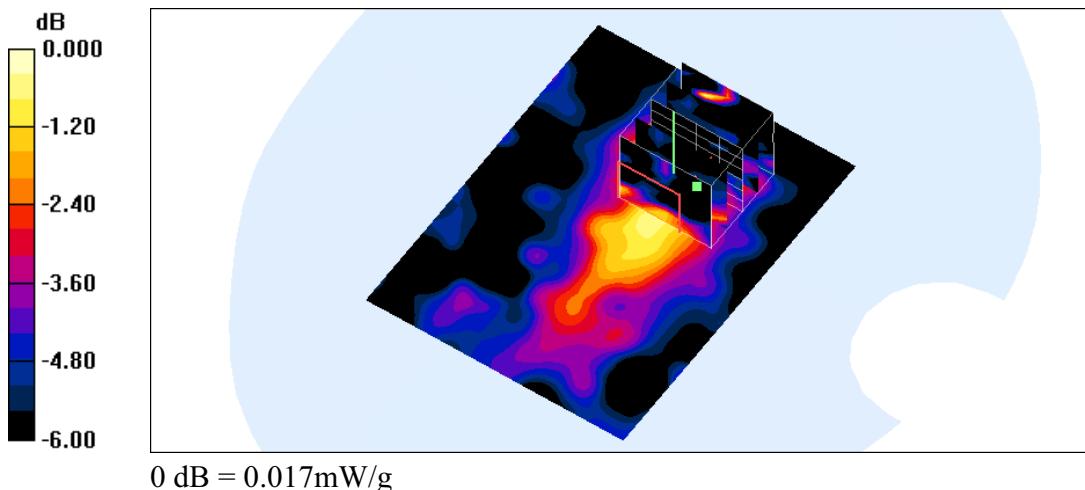

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 5:04:49 AM

Flat_IEEE 802.11n CH9_40M mode_65M_Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2452 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2452 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x121x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.028 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.04 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

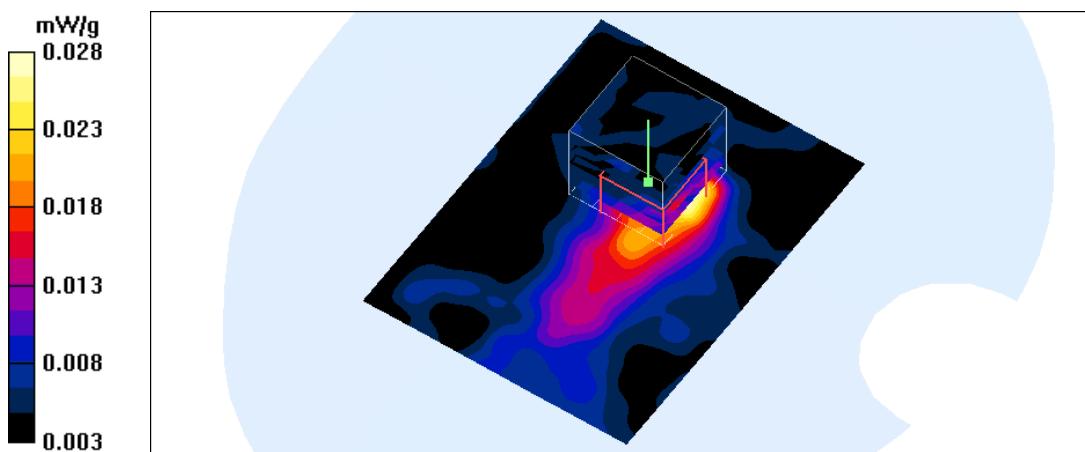

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 2:27:11 AM

Flat_IEEE 802.11b CH1_1M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.138 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.63 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.175 mW/g

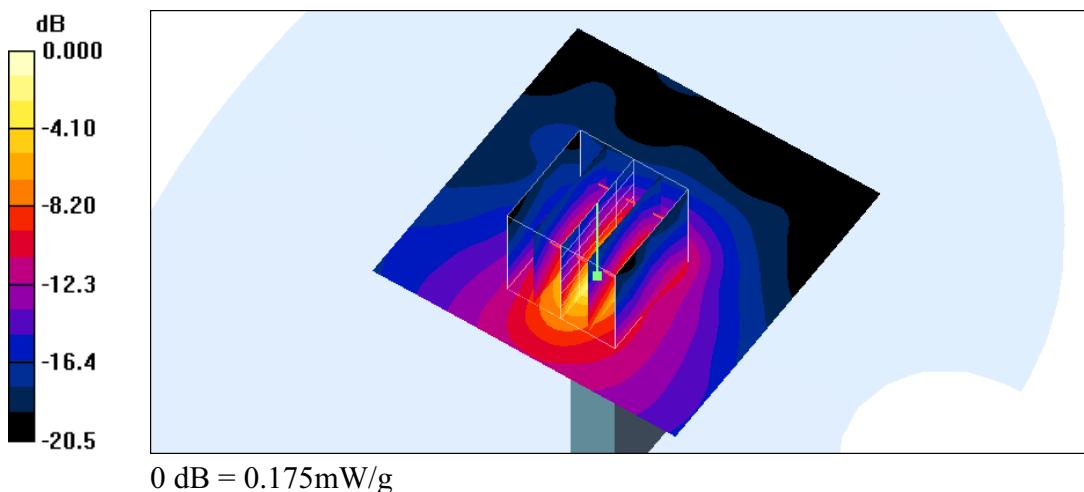

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 1:56:29 AM

Flat_IEEE 802.11b CH6_1M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.121 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.93 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.118 mW/g

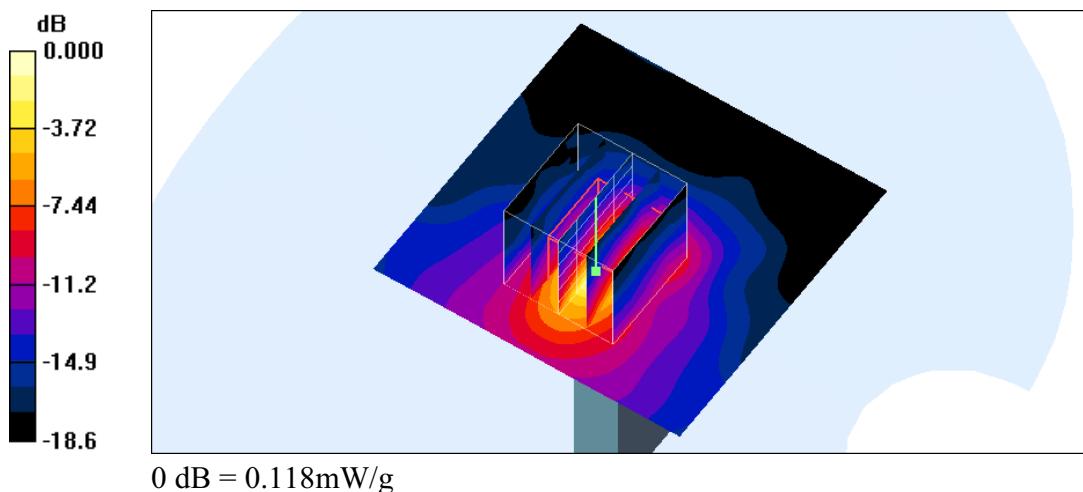

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 2:12:07 AM

Flat_IEEE 802.11b CH11_1M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.100 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.03 V/m; Power Drift = -0.120 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.098 mW/g

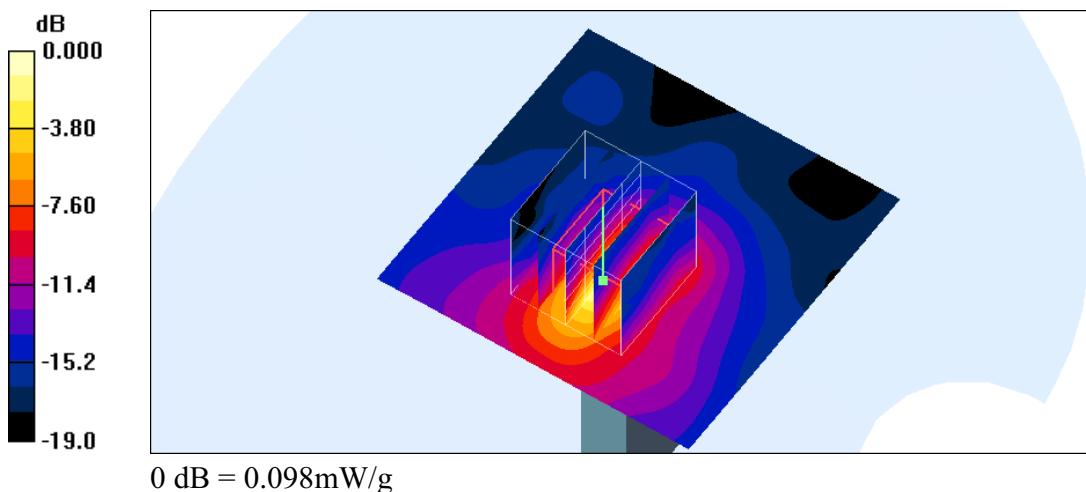

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 2:44:18 AM

Flat_IEEE 802.11b CH1_11M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.166 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.26 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

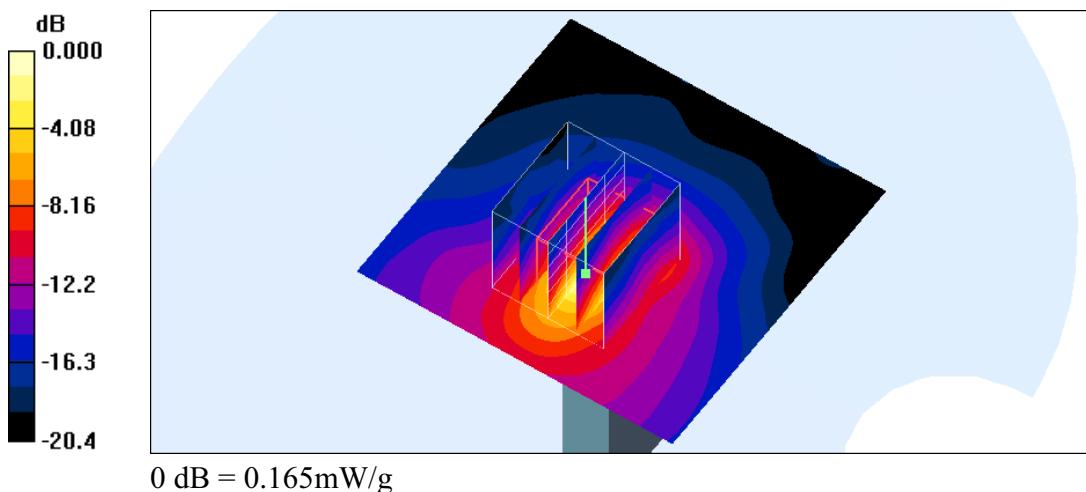

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 2:59:37 AM

Flat_IEEE 802.11b CH6_11M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.148 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.03 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.146 mW/g

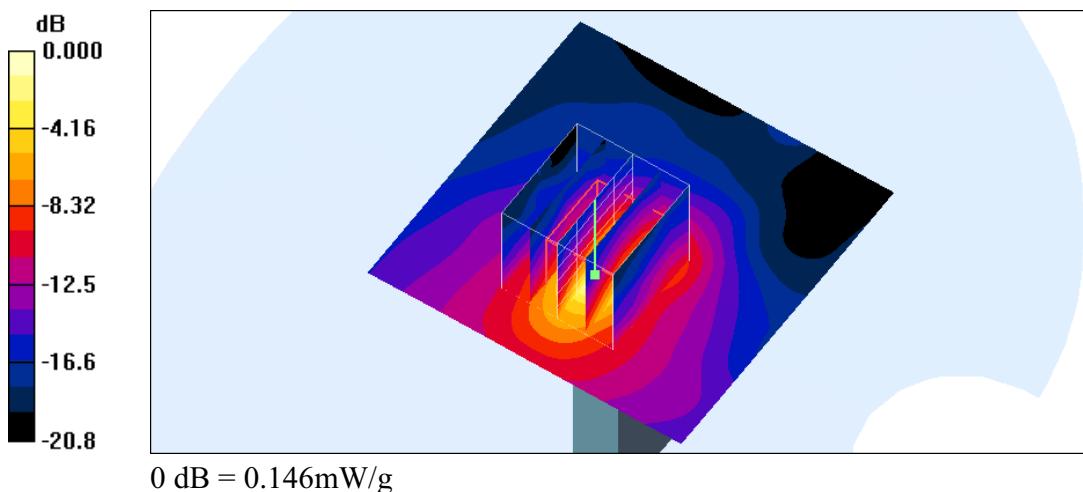

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 3:14:52 AM

Flat_IEEE 802.11b CH11_11M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.109 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.66 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.111 mW/g

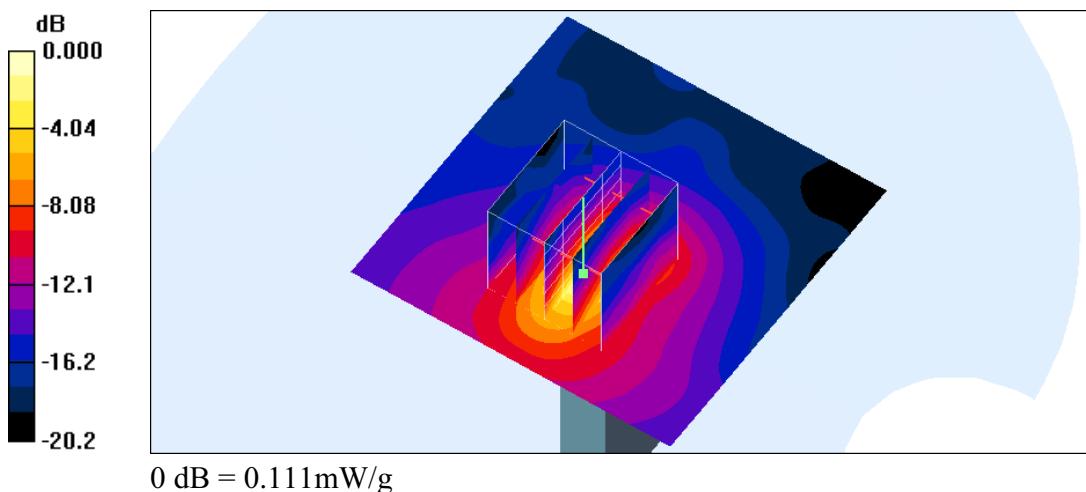

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 4:06:14 AM

Flat_IEEE 802.11g CH1_6M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.041 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.82 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

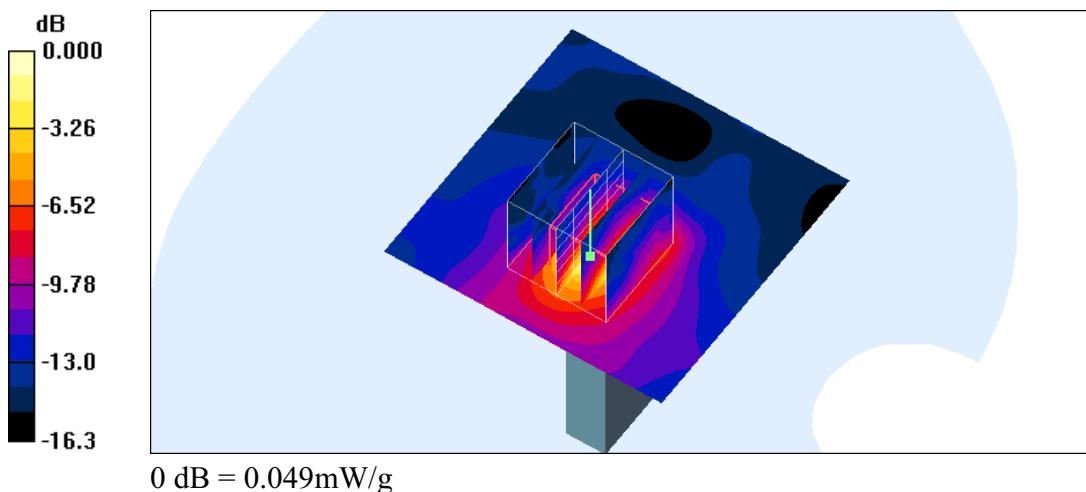

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 4:44:48 AM

Flat_IEEE 802.11g CH6_6M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.040 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.58 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.039 mW/g

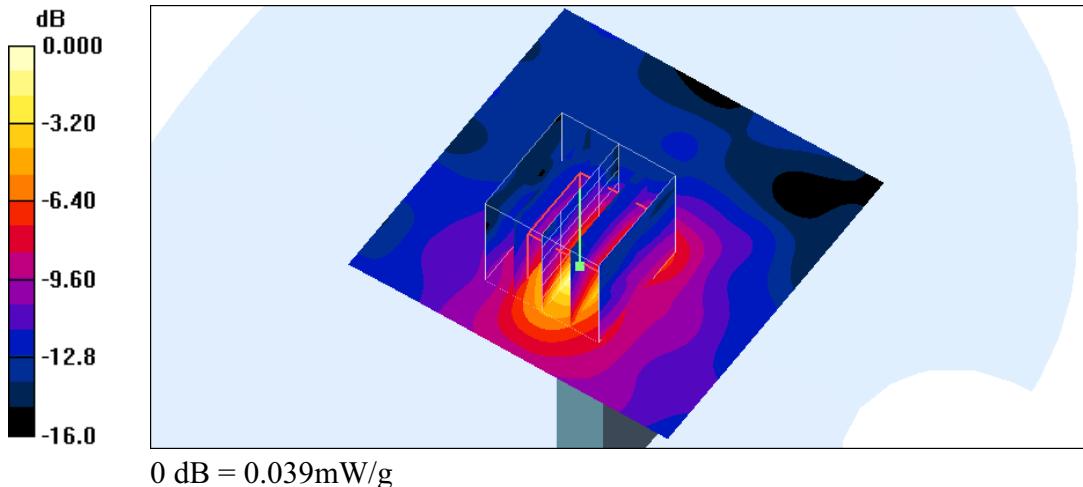

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 5:03:17 AM

Flat_IEEE 802.11g CH11_6M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.028 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.65 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.088 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.033 mW/g

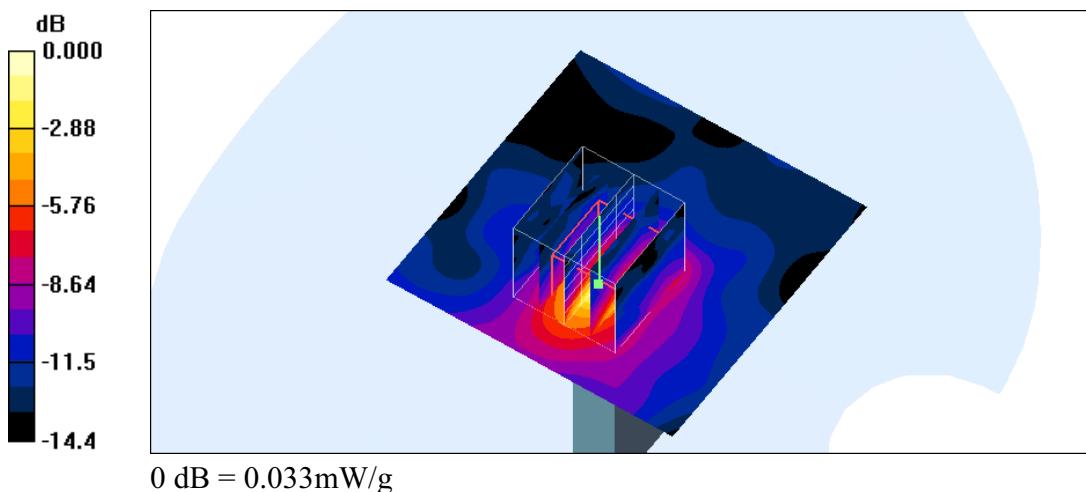

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 5:31:14 AM

Flat_IEEE 802.11g CH1_54M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x91x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.061 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.22 V/m; Power Drift = -0.161 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

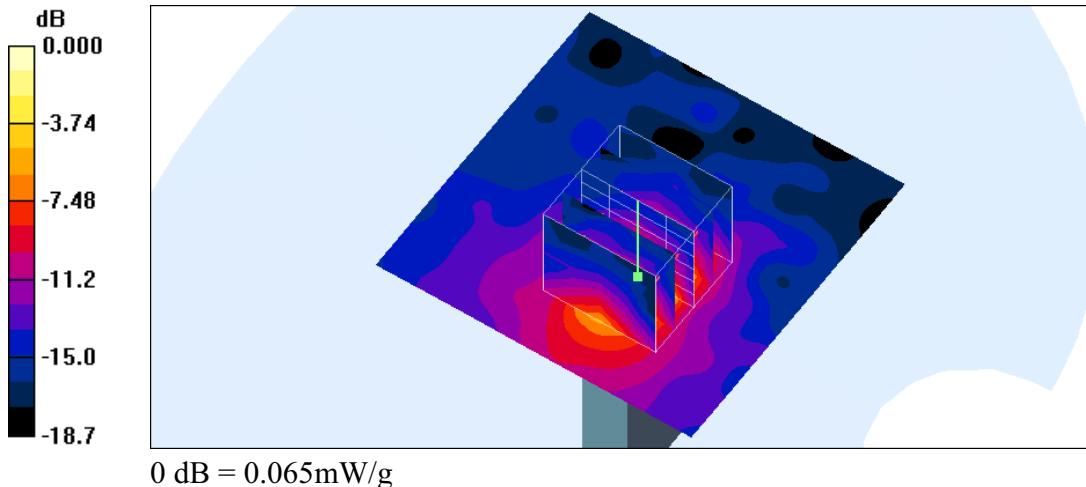

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 5:52:39 AM

Flat_IEEE 802.11g CH6_54M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x91x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.049 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.10 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

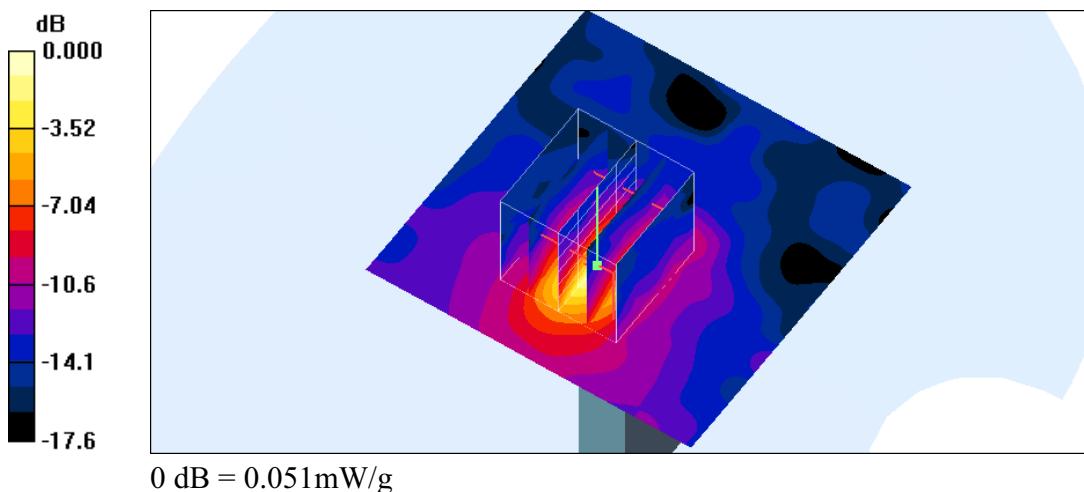

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 6:11:45 AM

Flat_IEEE 802.11g CH11_54M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11g; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x91x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.039 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.16 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.041 mW/g

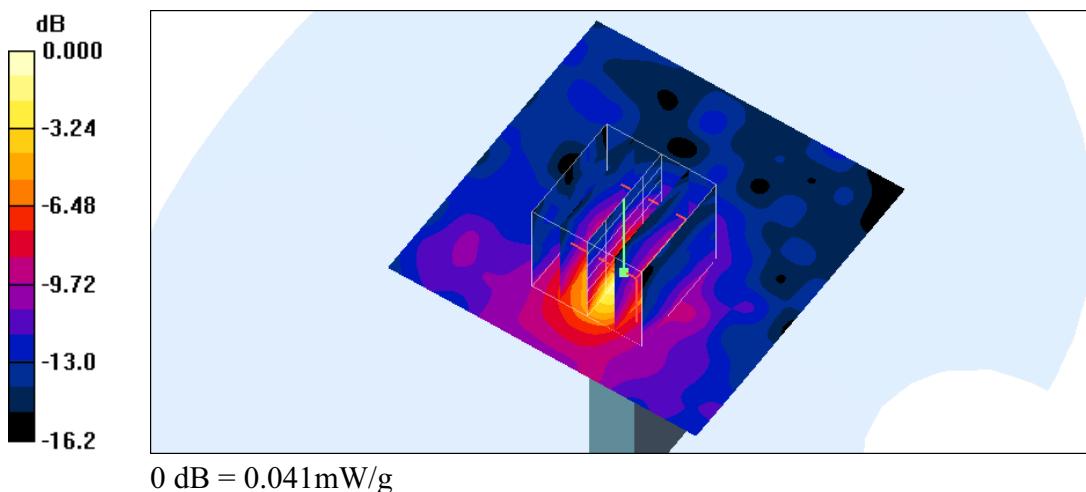

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 7:23:41 AM

Flat_IEEE 802.11n CH1_20M mode_6.5M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x91x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.060 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.54 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.063 mW/g

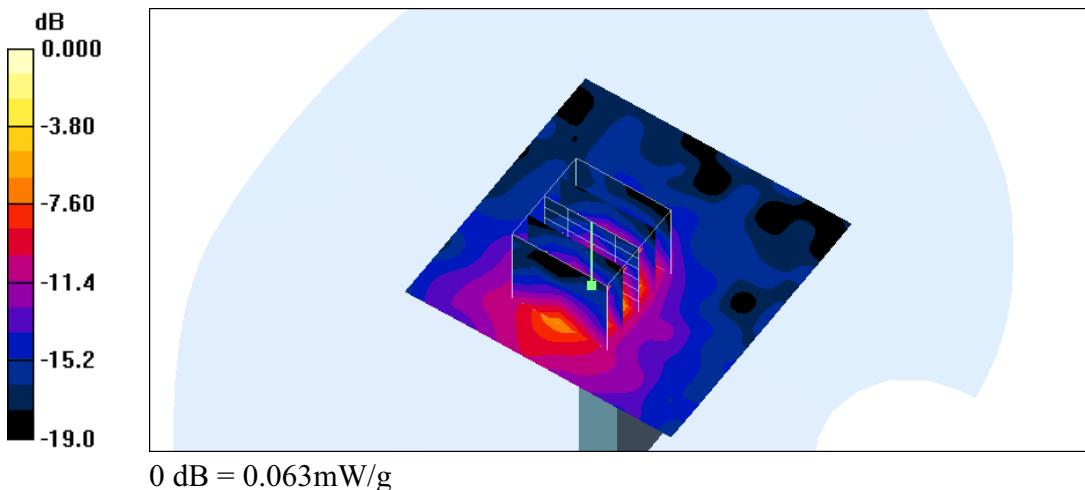

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 7:46:57 AM

Flat_IEEE 802.11n CH6_20M mode_6.5M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x91x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.063 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.46 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.058 mW/g

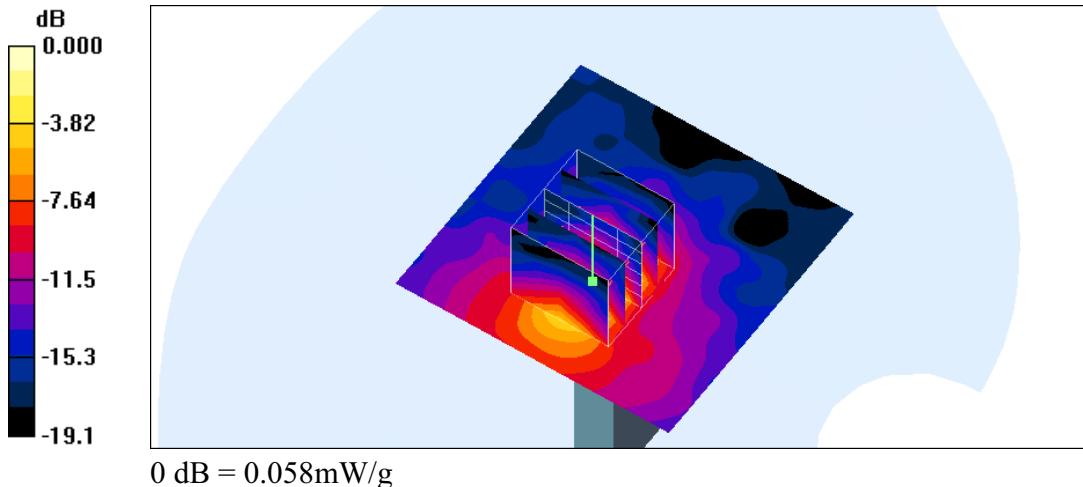

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 7:04:25 AM

Flat_IEEE 802.11n CH11_20M mode_6.5M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (91x91x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.045 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.89 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.090 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

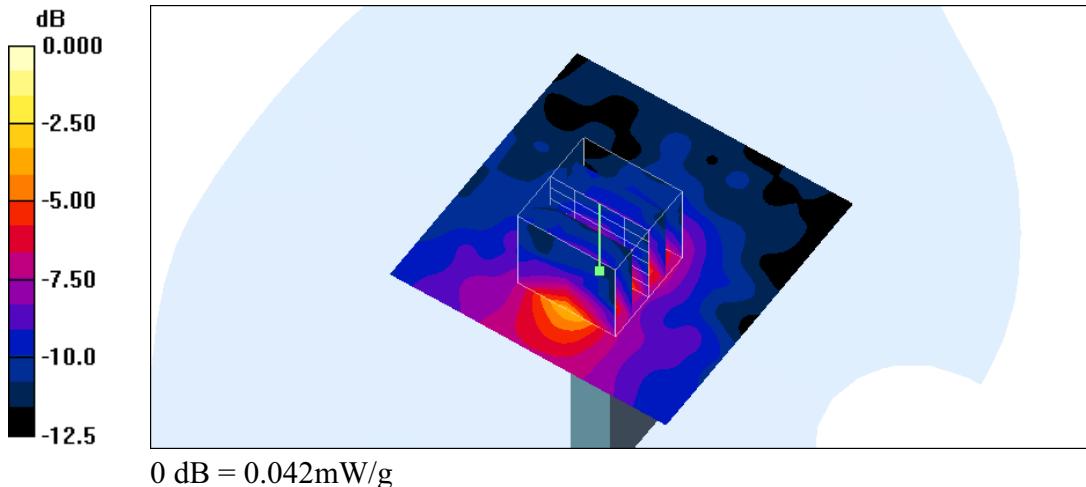

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 7:18:51 PM

Flat_IEEE 802.11n CH1_20M mode_65M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.078 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.88 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.071 mW/g

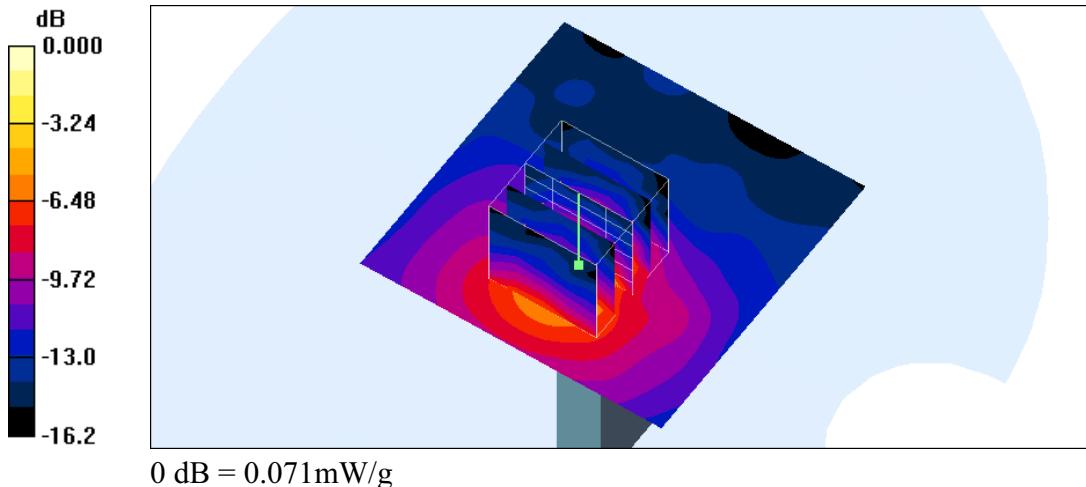

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 8:18:15 AM

Flat_IEEE 802.11n CH6_20M mode_65M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.034 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.67 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.050 mW/g

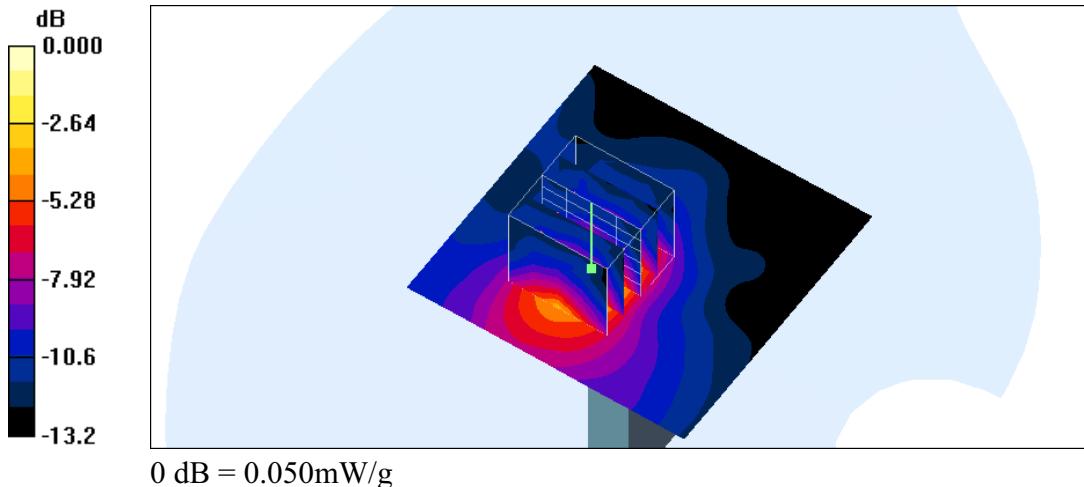

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 7:37:58 AM

Flat_IEEE 802.11n CH11_20M mode_65M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.058 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.98 V/m; Power Drift = -0.158 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.056 mW/g

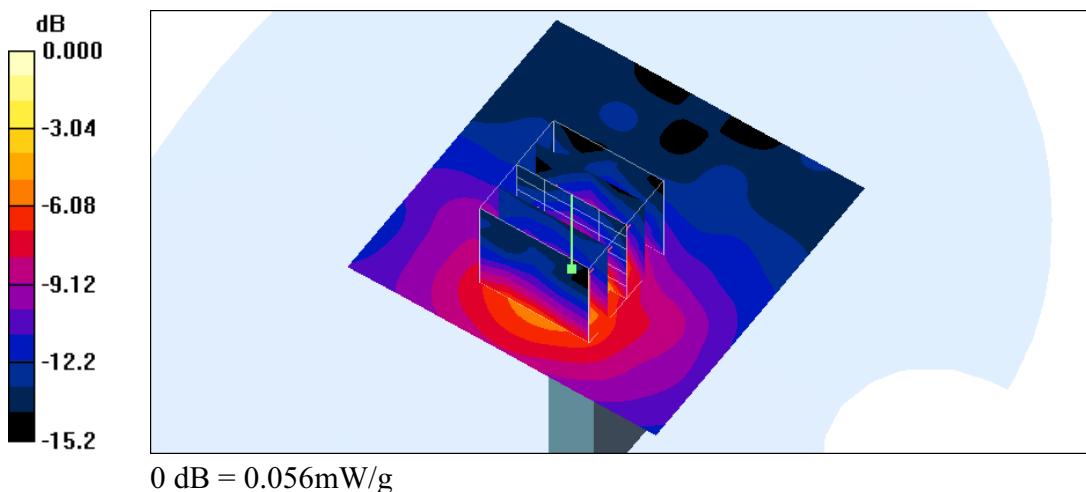

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 8:38:04 AM

Flat_IEEE 802.11n CH3_40M mode_6.5M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.036 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.12 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

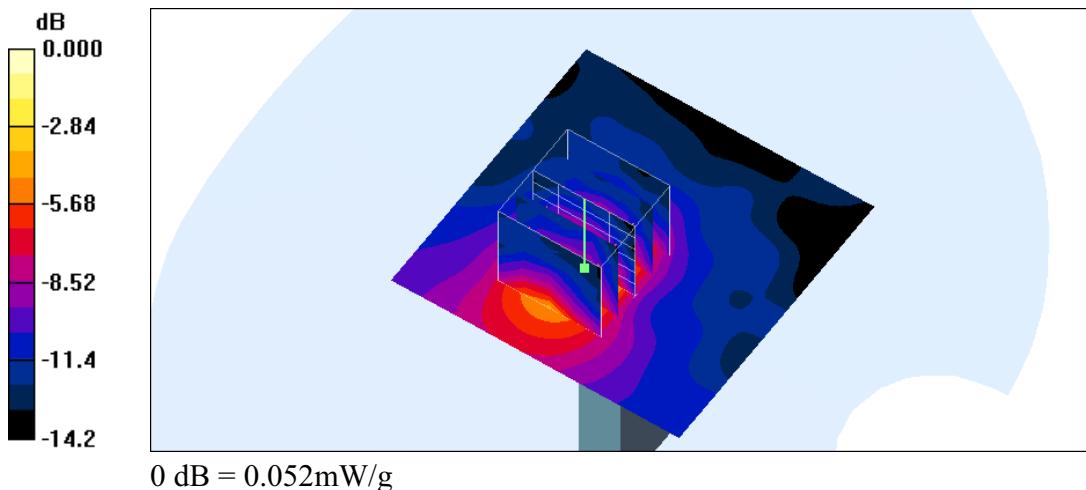

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 1:40:19 AM

Flat_IEEE 802.11n CH6_40M mode_6.5M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.031 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.37 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 0.093 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.035 mW/g

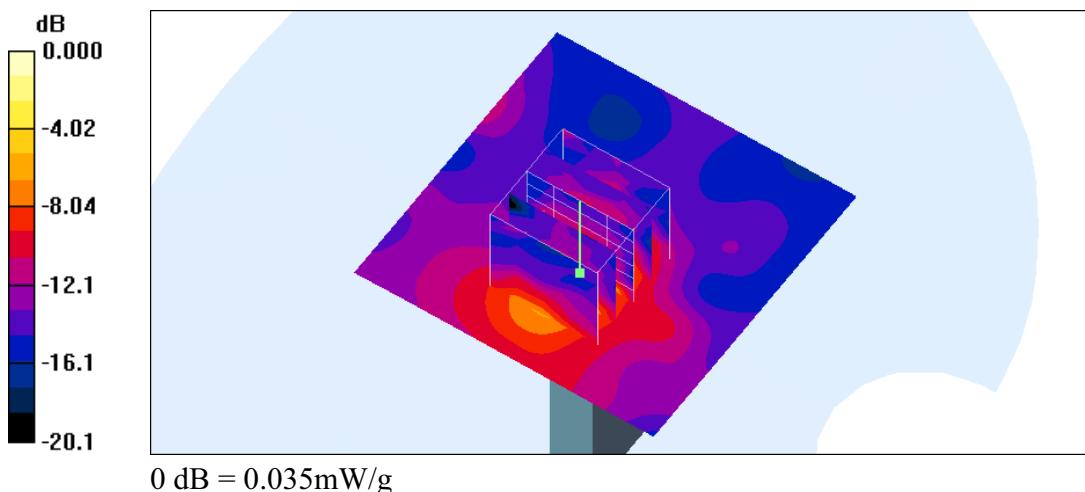

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 2:36:41 AM

Flat_IEEE 802.11n CH9_40M mode_6.5M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2452 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2452 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.022 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.86 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.053 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.00954 mW/g

Maximum value of SAR (measured) = 0.029 mW/g

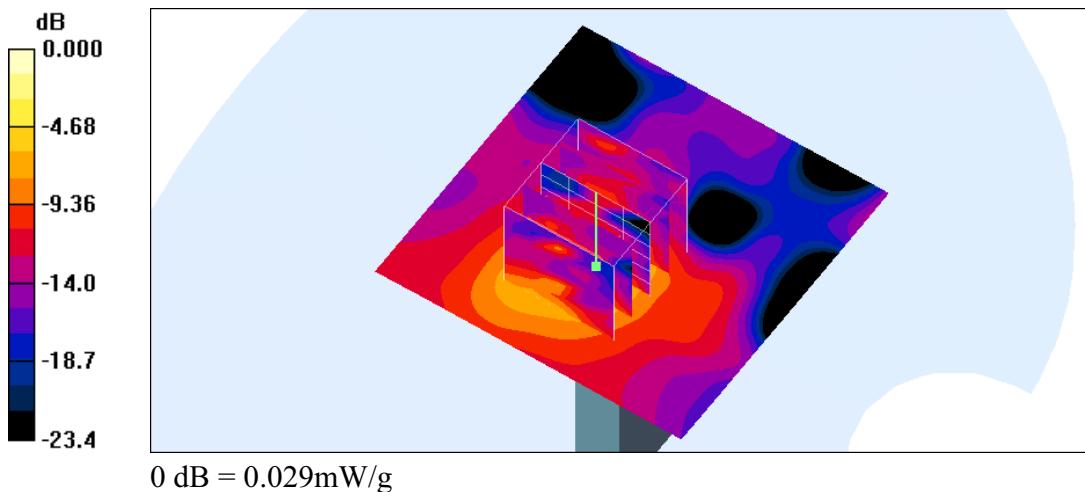

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/17/2007 8:52:00 AM

Flat_IEEE 802.11n CH3_40M mode_65M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2422 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2422 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.072 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.55 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.069 mW/g

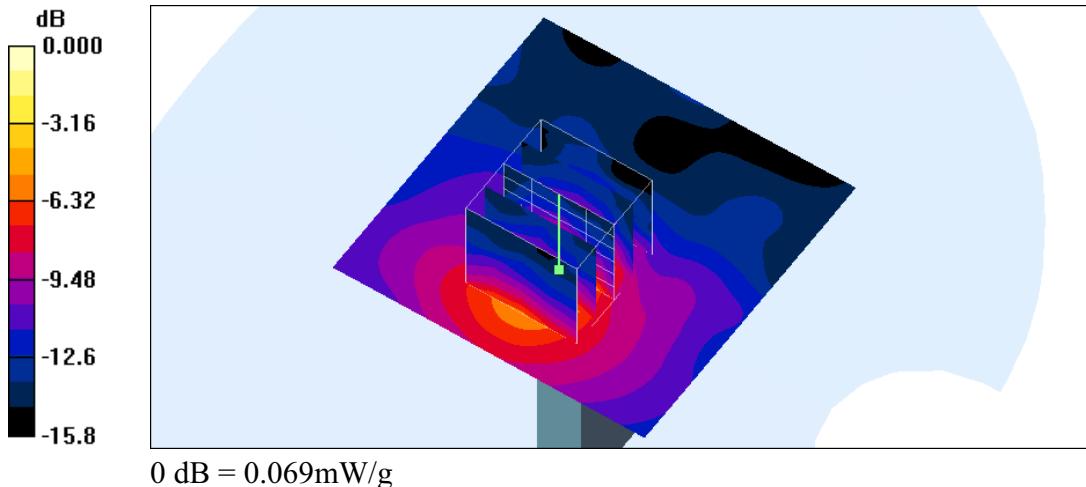

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 1:54:47 AM

Flat_IEEE 802.11n CH6_40M mode_65M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.9 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.037 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.76 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.069 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.00997 mW/g

Maximum value of SAR (measured) = 0.035 mW/g

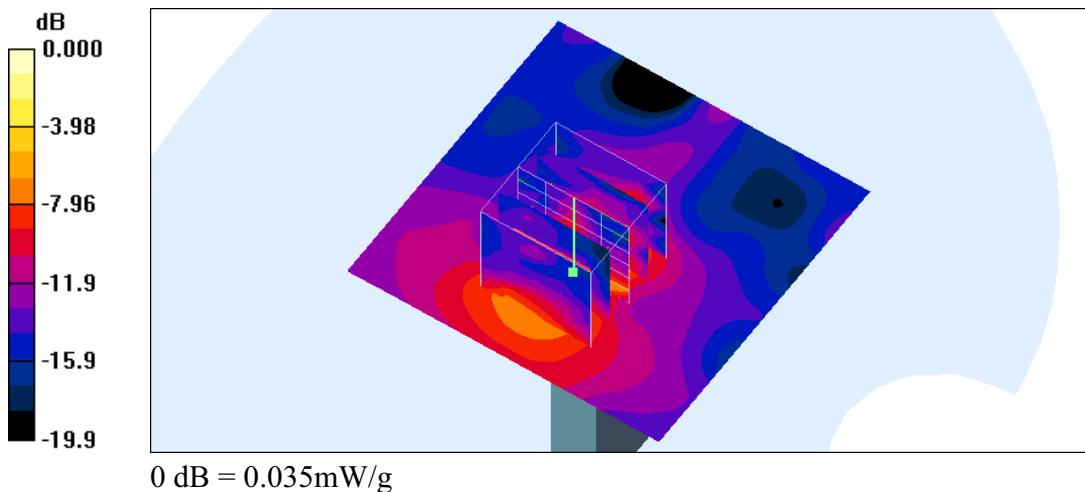

Test Laboratory: A Test Lab Techno Corp. Date/Time: 9/21/2007 2:07:27 AM

Flat_IEEE 802.11n CH9_40M mode_65M_Tip Close Body

DUT: WM6618R-FLF-ZZ; Type: 802.11n USB Client Adaptor; FCC ID: HEDWM6618R

Communication System: IEEE 802.11n; Frequency: 2452 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2452 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.09, 4.09, 4.09); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.024 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.61 V/m; Power Drift = -0.038 dB


Peak SAR (extrapolated) = 0.080 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.00979 mW/g


Maximum value of SAR (measured) = 0.029 mW/g

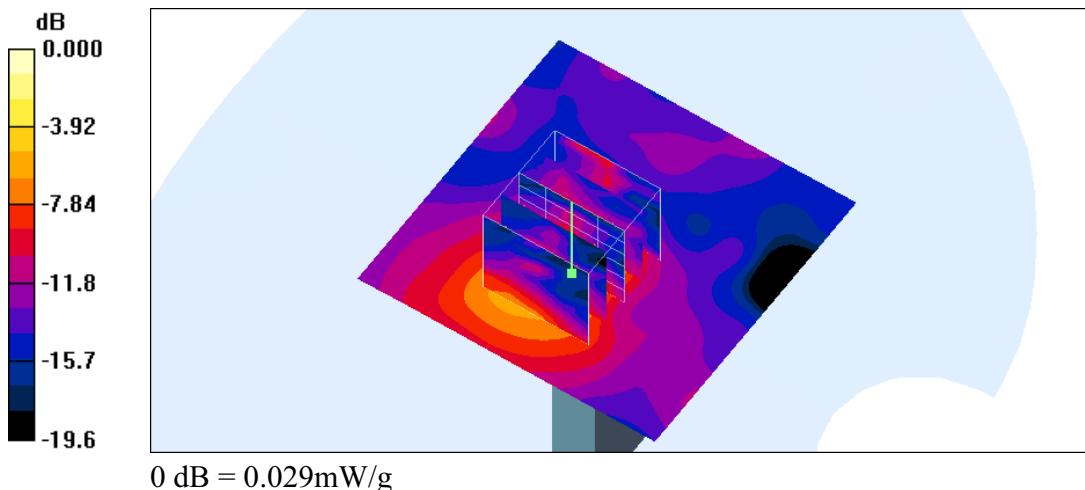


Z-axis Plot of SAR Measurement

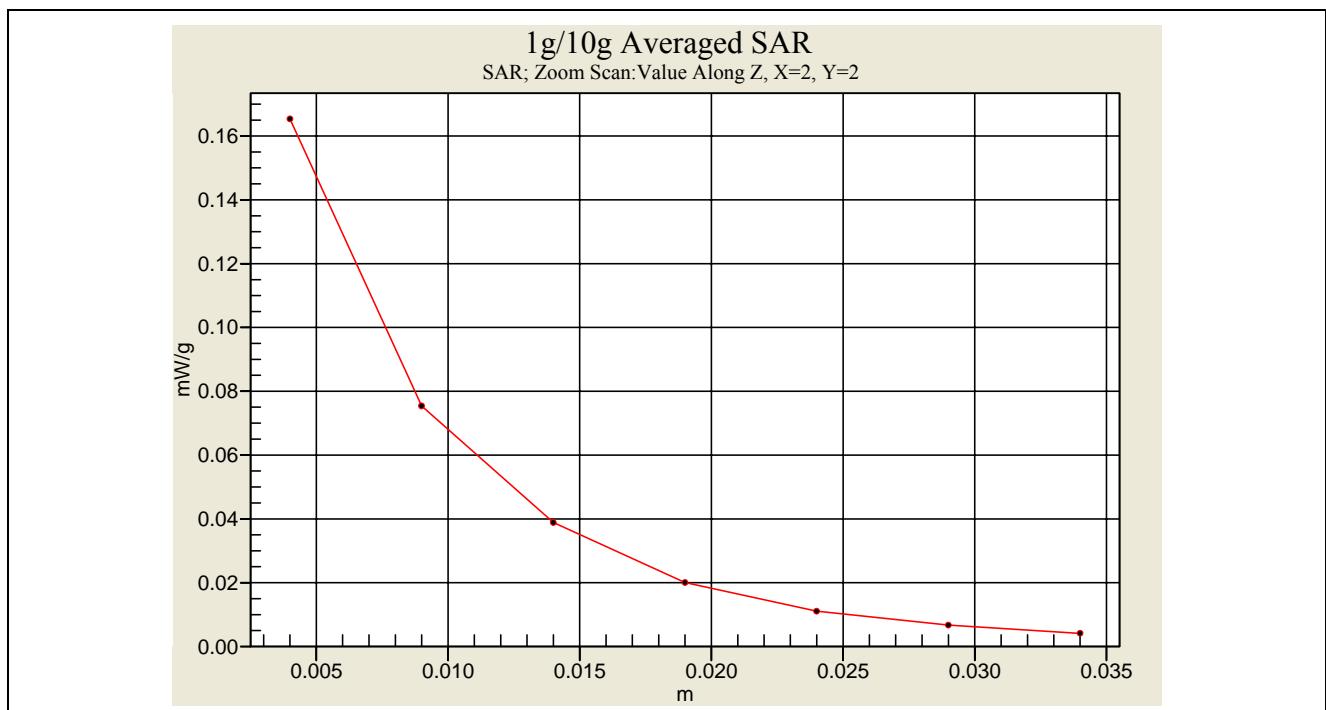


SAR Measurement _ Flat 802.11b CH1 (Tip_11MHz Data Rate)

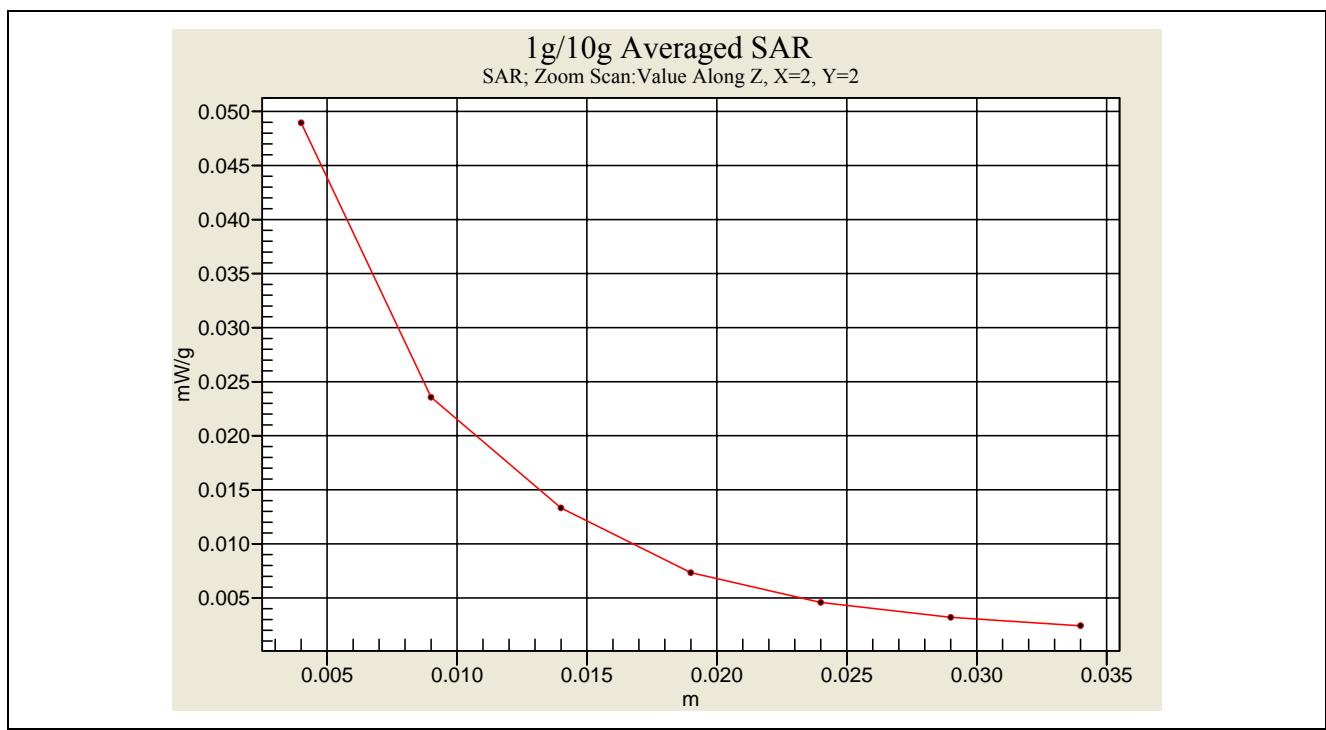

SAR Measurement _ Flat 802.11b CH1 (Tip_6MHz Data Rate)

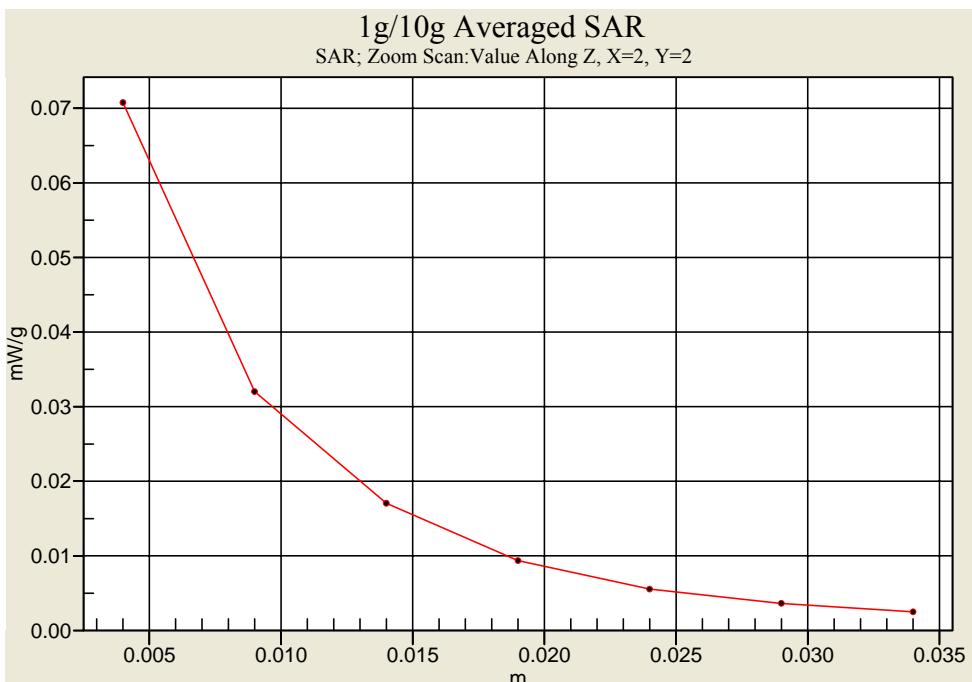

SAR Measurement _ Flat Cheek 802.11n CH1 (Tip_20MHz Bandwidth / 65MHz Data Rate)

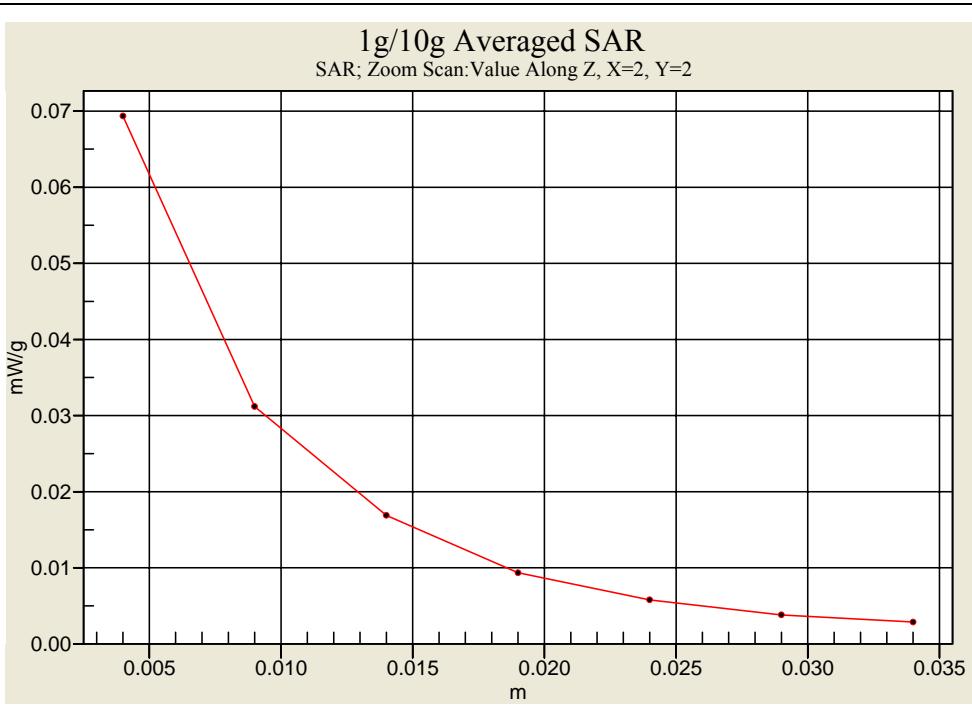

SAR Measurement _ Flat Cheek 802.11n CH3 (Tip_40MHz Bandwidth / 65MHz Data Rate)



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D2450V2 SN:712 Calibration No.D2450V2-712_Feb07
- Probe _ ET3DV6 SN:1531 Calibration No.ET3-1531_Jan07
- DAE _ DAE4 SN:541 Calibration No.DAE4-541_Oct06