

# **FCC TEST REPORT**

**for**

## **47 CFR Part 24E**

Equipment : **GSM phone**

Model No. : **EB-A100**

FCC ID : **HFS-A100**

Filing Type : **Certification**

Applicant : **Quanta Computer Inc.**  
No. 188, Wen Hwa 2<sup>nd</sup> Road, Kuei Shan Hsiang,  
Tao Yuan Shien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

### ***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

The applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

## **Table of Contents**

<b>Rule</b>	<b>Description</b>	<b>Page</b>
	Test Report	4
2.1033(c)	General Information Required	5
2.1033(c)(14)	Rule Summary	8
	General Information	9
	Standard Test Conditions and Engineering Practices	10
2.1046(a)	EIRP Carrier Power (Radiated)	11
2.1051, 2.1049(c), 24, 24.238(b)	Transmitter Conducted Measurements	17
2.1053(a)	Field Strength of Spurious Radiation	23
2.1055(a)(1)	Frequency Stability (Temperature Variation)	43
2.1055(b)(1)	Frequency Stability (Voltage Variation)	46
	Antenna Factor & Cable Loss	47
	List of Measuring Equipments	48
	Uncertainty of Test Site	49
<b>Appendix A</b>	<b>External Product Photograph</b>	
<b>Appendix B</b>	<b>Internal Photograph</b>	
<b>Appendix C</b>	<b>Set up Photograph</b>	

## **FCC TEST REPORT**

**Report No. : F411615**

---

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

**a) Test Report**

b) Laboratory: Sporton International Inc.  
No.52, Hwa-Ya 1<sup>st</sup> RD., Hwa Ya Technology Park, Kwei-Shan Hsiang,  
TaoYuan Hsien, Taiwan, R.O.C.

c) Report Number: F411615

d) Client: Quanta Computer Inc.  
No. 188, Wen Hwa 2<sup>nd</sup> Road, Kuei Shan Hsiang Tao Yuan Shien, Taiwan, R.O.C.

e) Identification: Model Name: EB-A100  
FCC ID : HFS-A100  
Description: GSM 1900 Radio

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: Mar. 25, 2004  
EUT Received: Jan. 28, 2004

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with Sporton internal quality manual.

m) Supervised by:

  
Daniel Lee

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

**Accessories Used During Testing:**

Type	Model
EUT	EB-A100
Earpiece	N/A
Laptop	N/A

---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID HFS-A100

Page No. 4 of 50

Issued Date Mar. 25, 2004

**List of General Information Required for Certification**

In Accordance with FCC Rules and Regulations,  
Volume II, Part 2 and  
24E, Confidentiality

**Sub-Part 2.1033****(c)(1): Name and Address of Applicant:**

Quanta Computer Inc.  
No. 188, Hen Hwa 2<sup>nd</sup> Road, Kuei Shan Hsiang, Tao  
Yuan Shien, Taiwan, R.O.C.

**Manufacturer**

As above

**(c)(2): FCC ID:** HFS-A100

**Model Number:** EB-A100

**(c)(3): Instruction Manual(s):**

Please See Attached Exhibits

**(c)(4): Type of Emission:** GSM 1900

**(c)(5): FREQUENCY RANGE, MHz:** 1850.2 to 1909.8 GSM 1900

**(c)(6): Power Rating, Watts:** 1.0447 (GSM 1900)

Switchable            x    Variable            N/A

**(c)(7): Maximum Power Rating, Watts:** 1 (GSM 1900)

**Subpart 2.1033** (continued)

(c)(8): Voltages & Currents in All Elements in Final RF Stage, Including Final Transistor or Solid State Device:

Collector Current, A = 0.5  
Collector Voltage, Vdc = 3.6  
Supply Voltage, Vdc = 3.6

(c)(9): **Tune-Up Procedure:**

Please See Attached Exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Please See Attached Exhibits

(c)(11): **Label Information:**

Please See Attached Exhibits

(c)(12): **Photographs:**

Please See Attached Exhibits

(c)(13): **Digital Modulation Description:**

☐ Attached Exhibits  
☒ N/A

(c)(14): **Test and Measurement Data:**

Follows

Certificate of NVLAP Accreditation

United States Department of Commerce  
National Institute of Standards and Technology

**NVLAP**<sup>®</sup>

ISO/IEC 17025:1999  
ISO 9002:1994

**Certificate of Accreditation**


**SPORTON INTERNATIONAL, INC.**  
TAIPEI HSIEN 221  
TAIWAN

*is recognized by the National Voluntary Laboratory Accreditation Program  
for satisfactory compliance with criteria set forth in NIST Handbook 150:2001,  
all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994.  
Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:*

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

December 31, 2004  
*Effective through*

  
For the National Institute of Standards and Technology  
NVLAP Lab Code: 200079-0



NVLAP-01C (06-01)

Sub-part

**2.1033(c)(14): Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 – Domestic Public Fixed Radio Services
- 22 – Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 – International Fixed Public Radiocommunication services
- x 24 – Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 – Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 – Aviation Services
- 90 – Private Land Mobile Radio Services
- 94 – Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 – Fixed Microwave Services



**General Information**

Product Feature & Specification	
1. Host/Radio Interface	GSM Phone
2. Type of Modulation	GMSK
3. Number of Channels	GSM 1900 : 512 to 810
4. Frequency Band , MHz	Tx: 1850~1910/GSM 1900 Rx: 1930~1990/GSM 1900
5. Bandwidth of each channel	200 KHz
6. Maximum Output Power to Antenna	GSM/GPRS 1900: 30 dBm
7. IMEI Code	352418009749282
8. Antenna Size	35mm x 4.8Φ
9. Power Rating (DC/AC , Voltage)	DC 3.6V

**Standard Test Conditions****and****Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with TIA603, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.


**Name of Test:** EIRP Carrier Power (Radiated)

**Specification:** TIA/EIA 603A (Substitution Method)

**Definition:** The average radiated power of device is the equivalent power required, when delivered to a substitution antenna, to produce at a distant point the same average received power as produced by the licensed device.

**Method Of Measurement:**

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

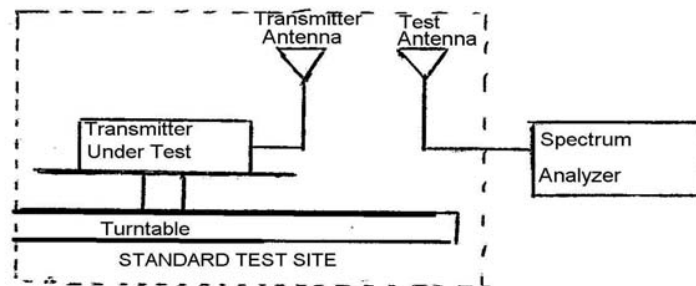

b) Raise and lower the test antenna from 1m to 4m and rotate turntable from 0° to 360°. Record the highest received signal showed in spectrum analyzer as  $R_t$ . Calculate electric field strength in receive antenna as  $E_t$ .

$$E_t = R_t + AF$$

AF (dB/m): Receive Antenna Factor

c) Replace the transmitter under test with a substitution antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power level  $P_s$ . Raise and lower the test antenna like in step b) and record the highest received signal showed in spectrum analyzer as  $R_s$ . Calculate electric field strength in receive antenna as  $E_s$ .

$$E_s = R_s + AF$$

AF (dB/m): Receive Antenna Factor

d) Calculate radiated power as following:

$$EIRP = P_s + E_t - E_s + G_s$$

$P_s$  (dBm): Input Power to Substitution Antenna

$G_s$  (dBi): Substitution Antenna Gain

Results Attached

**FCC TEST REPORT**Report No. : F411615

---

**Test Results For:** EIRP Carrier Power (Radiated)**Conducted Power**

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM 1900	512	1850.2 (Low)	30.19	1.0447
	661	1880.0 (Mid)	29.66	0.9247
	810	1909.8 (High)	29.53	0.8974


**EIRP**

Freq MHz	Pol	Substitution Antenna Input Power dBm	Substitution Antenna Gain dBd	Et	Es	Et - Es dB	Radiated P Out dBm	Radiated P Out Watts
1850.30	H	-3.76	6.64	123.71	101.70	22.01	24.90	0.309
1880.03	H	-3.78	6.65	125.78	101.64	24.14	27.01	0.502
1909.71	H	-3.81	6.66	125.22	101.58	23.64	26.49	0.446
1850.22	V	-3.76	6.64	124.34	101.70	22.64	25.53	0.357
1880.06	V	-3.78	6.65	125.22	101.64	23.58	26.45	0.442
1909.79	V	-3.81	6.66	123.30	101.58	21.72	24.57	0.287

# FCC TEST REPORT

Report No. : F411615


## GSM 1900 CH512 Vertical Polarization

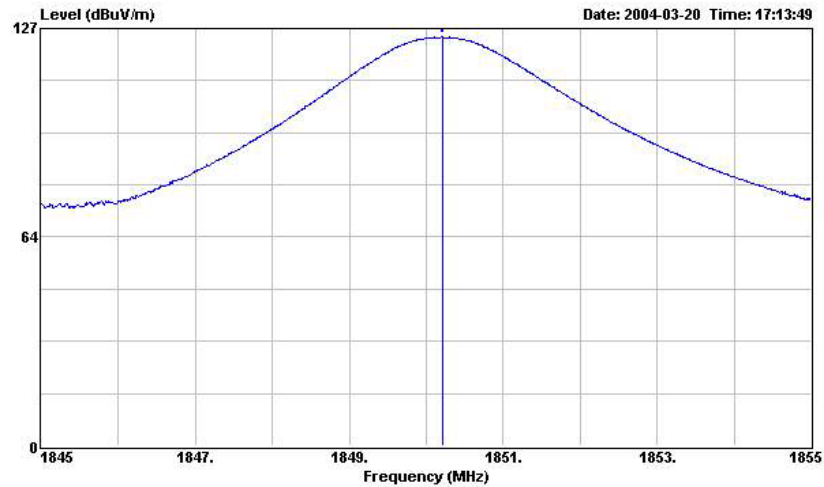

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 VERTICAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH512

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
		dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1850.220	124.34	-----	95.92	26.77	1.65	0.00	Peak	---	---

## GSM 1900 CH512 Horizontal Polarization

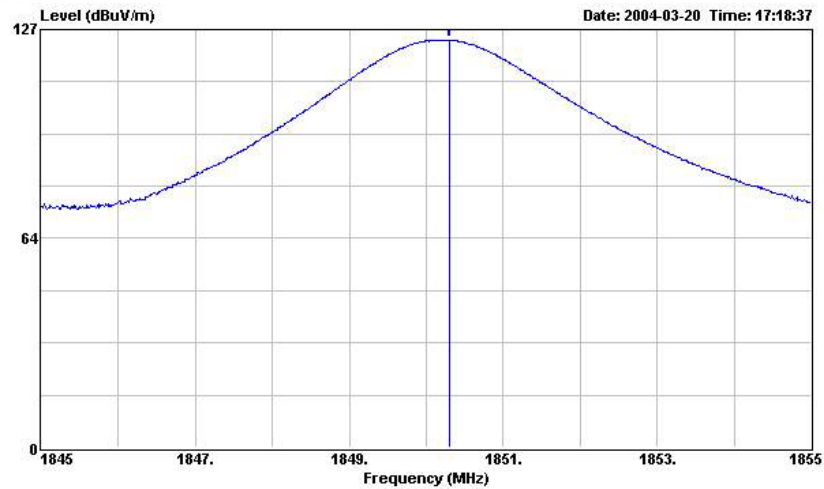

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 HORIZONTAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH512

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
		dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1850.300	123.71	-----	95.29	26.77	1.65	0.00	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID HFS-A100


Page No. 14 of 50

Issued Date Mar. 25, 2004

# FCC TEST REPORT

Report No. : F411615


## GSM 1900 CH661 Vertical Polarization

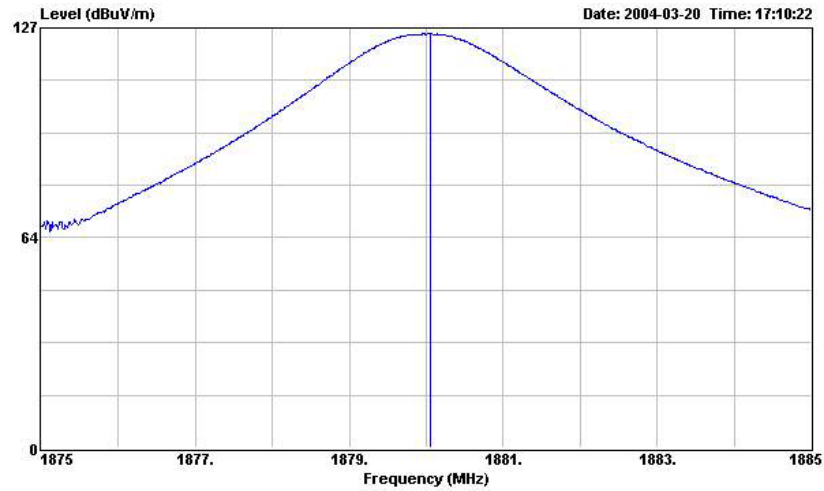

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 VERTICAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1880.060	125.22	-----	-----	96.72	26.91	1.59	0.00	Peak	---	---

## GSM 1900 CH661 Horizontal Polarization

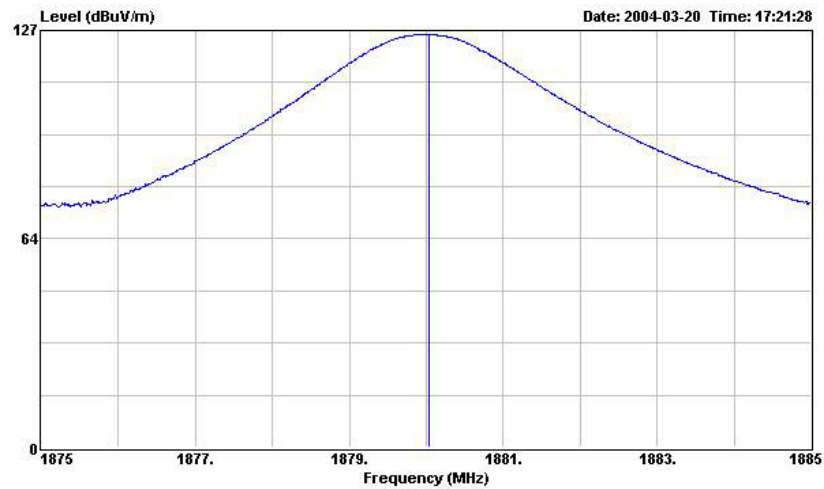

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 HORIZONTAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1880.030	125.68	-----	-----	97.18	26.91	1.59	0.00	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID HFS-A100


Page No. 15 of 50

Issued Date Mar. 25, 2004

# FCC TEST REPORT

Report No. : F411615


## GSM 1900 CH810 Vertical Polarization

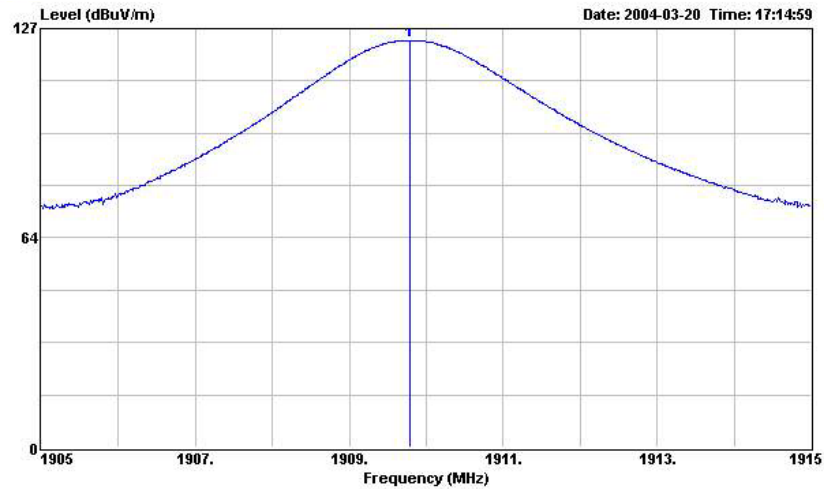

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 VERTICAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH810

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1909.790	123.30	-----	-----	94.66	27.05	1.59	0.00	Peak	---	---

## GSM 1900 CH810 Horizontal Polarization

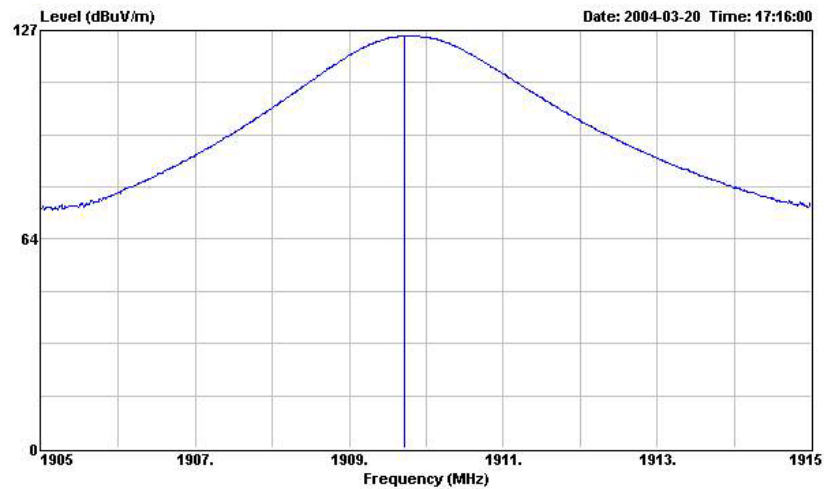

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 HORIZONTAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH810

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1909.710	125.22	-----	-----	96.58	27.05	1.59	0.00	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID HFS-A100

Page No. 16 of 50

Issued Date Mar. 25, 2004




**Name of Test:** Transmitter Conducted Measurements

**Specification:** 47 CFR 2.1051: Unwanted (spurious) Emissions  
2.1049(c), 24.238(b): Occupied Bandwidth  
24: Emissions at Band Edges

**Test Equipment:** As per attached page

#### **Measurement Procedure**

1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.
2. The low and high channels for all RF powers within the transmitting frequency band were measured.
3. Measurement Results: Attached

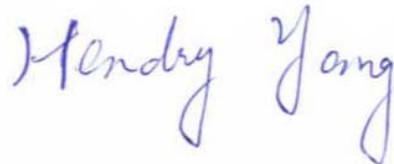


Performed By:

Hendry Yang

**Transmitter Spurious Emission**

Test A. Occupied Bandwidth (In-Band Spurious)

Test B. Out-of-Band Spurious

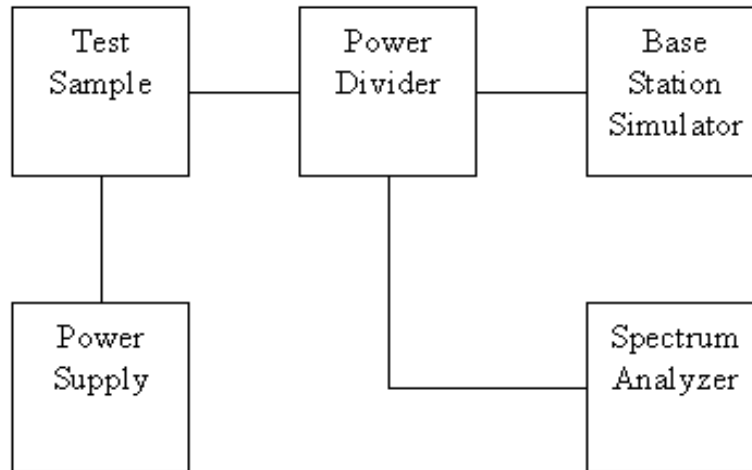


Asset	Model Name	S/N
Base Station Simulator	CMU200	102278
Spectrum Analyzer	FSP30	838858/014
AC/DC Power Source	HPA-500W	HPA0100024

## FCC TEST REPORT

Report No. : F411615

**Name of Test:** Emission Masks (Occupied Bandwidth)  
State 2:High Power

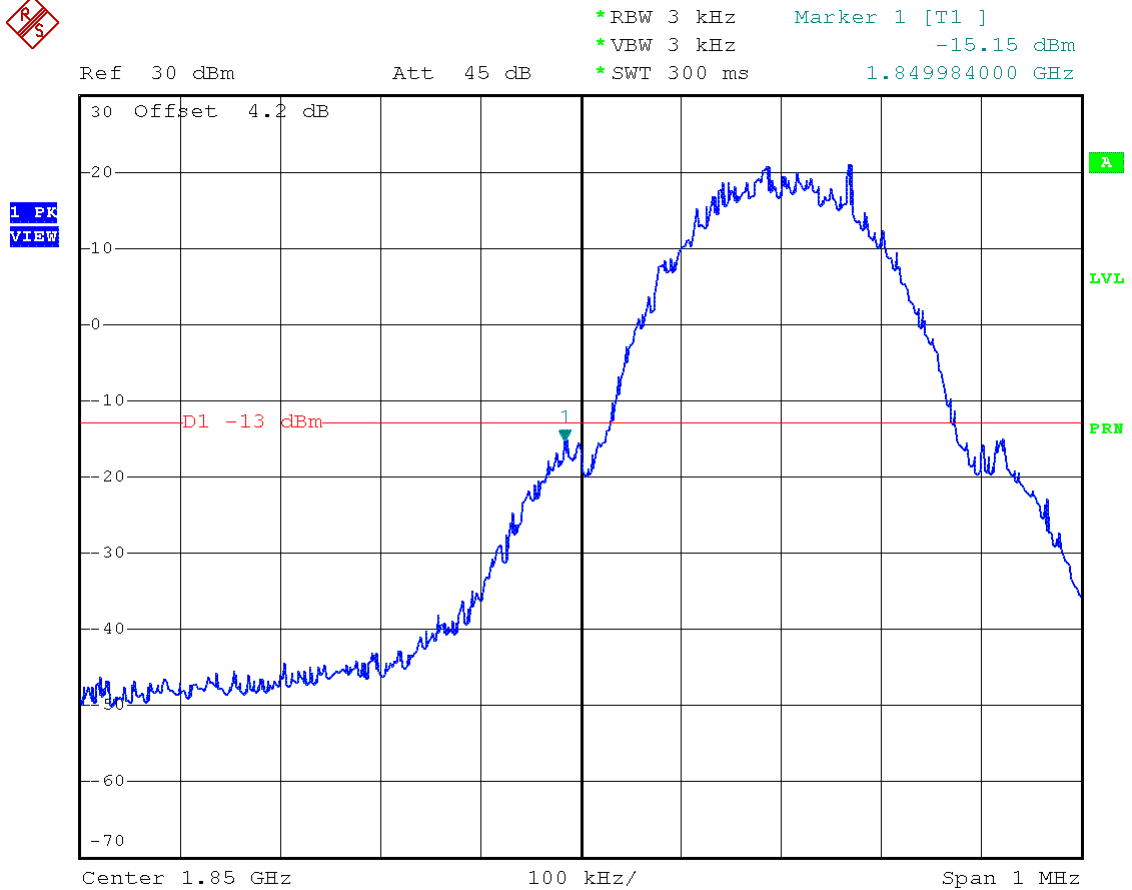

Power: HIGH  
Modulation: GSM 1900  
LOWER BAND EDGE

Hendry Yang

Performed By:

Hendry Yang

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID

HFS-A100

Page No.

19 of 50

Issued Date

Mar. 25, 2004


# FCC TEST REPORT

Report No. : F411615

**Name of Test:** Emission Masks (Occupied Bandwidth)  
State 1:Low Power



\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 3 kHz      -47.07 dBm  
\*SWT 300 ms      1.879500000 GHz

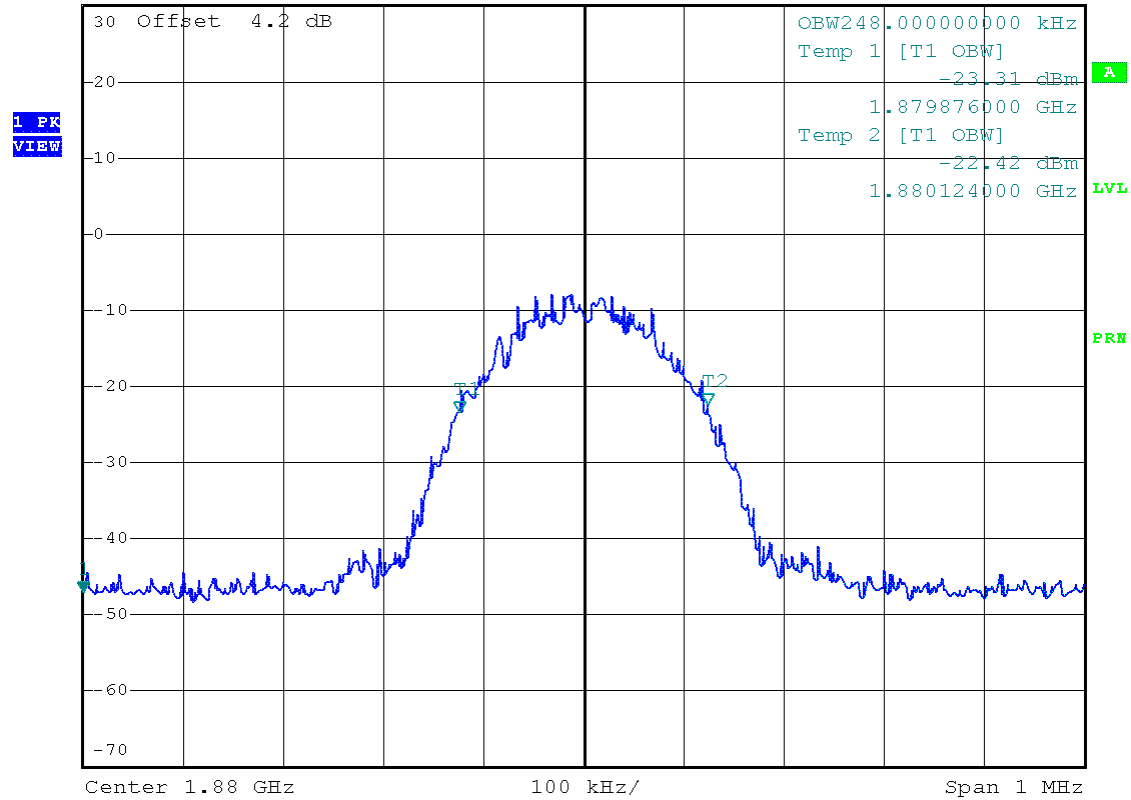

Power: LOW  
Modulation: GSM 1900  
99% BANDWIDTH

Hendry Yang

Performed By: Hendry Yang

**SPORTON International Inc.**  
TEL : 886-2-2696-2468  
FAX : 886-2-2696-2255

FCC ID      HFS-A100  
Page No.      20 of 50  
Issued Date      Mar. 25, 2004


# FCC TEST REPORT

Report No. : F411615

**Name of Test:** Emission Masks (Occupied Bandwidth)  
State 2:High Power



\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 3 kHz      -45.09 dBm  
\*SWT 300 ms      1.879500000 GHz

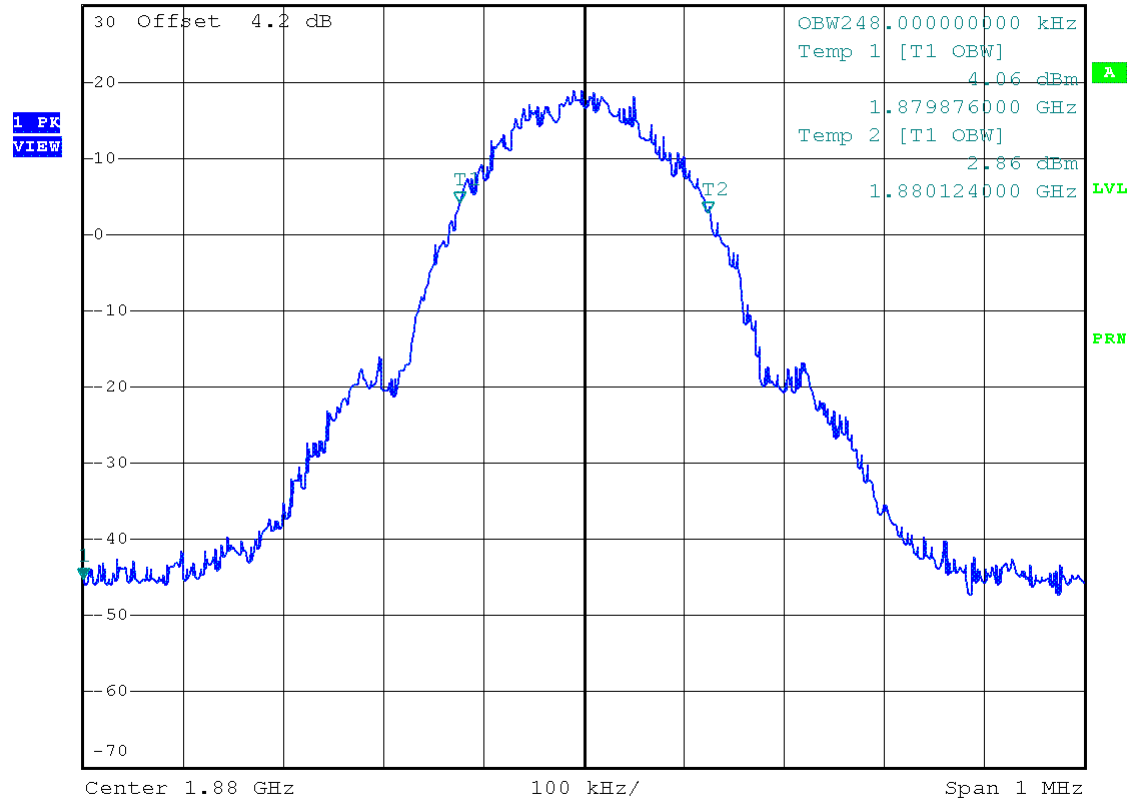

Power: HIGH  
Modulation: GSM 1900  
99% BANDWIDTH

*Hendry Yang*

Performed By: Hendry Yang

**SPORTON International Inc.**  
TEL : 886-2-2696-2468  
FAX : 886-2-2696-2255

FCC ID      HFS-A100  
Page No.      21 of 50  
Issued Date      Mar. 25, 2004


## FCC TEST REPORT

Report No. : F411615

**Name of Test:** Emission Masks (Occupied Bandwidth)  
State 2:High Power



\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 3 kHz      -17.18 dBm  
\*SWT 300 ms      1.910004000 GHz

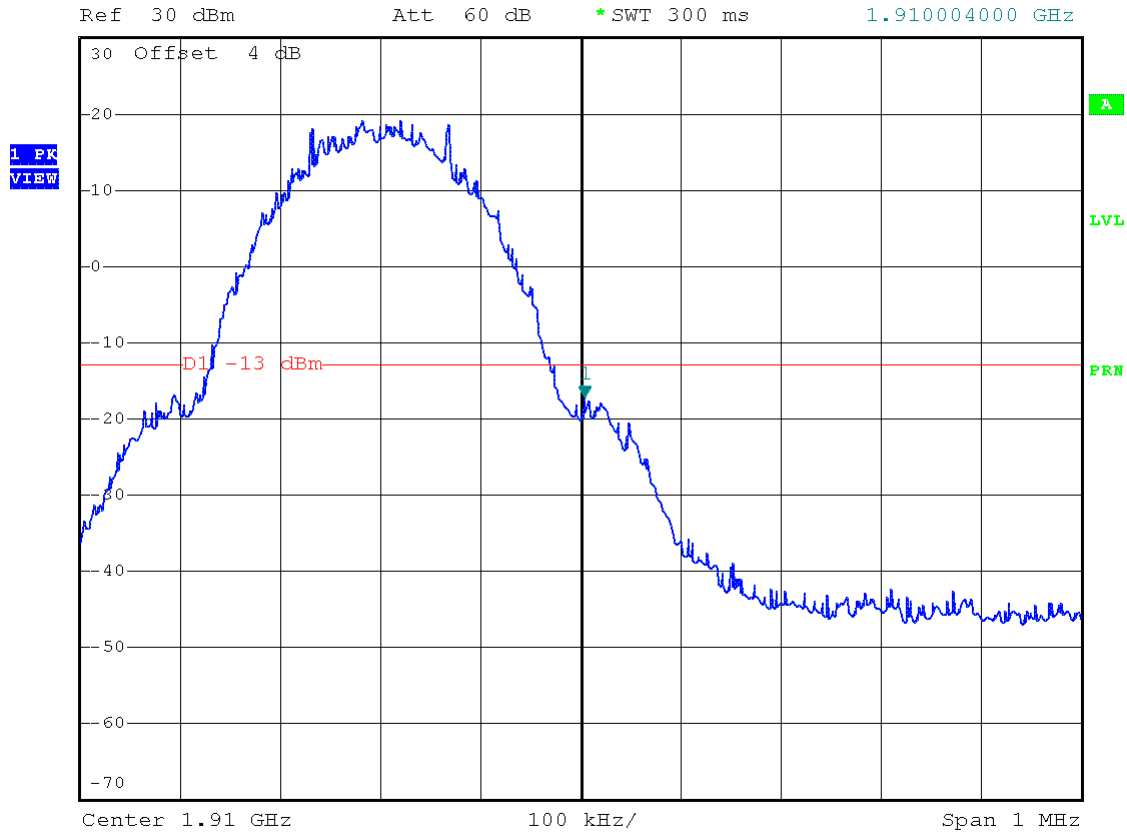

Power: HIGH  
Modulation: GSM 1900  
UPPER BAND EDGE

Hendry Yang

Performed By:

Hendry Yang

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID      HFS-A100  
Page No.      22 of 50  
Issued Date      Mar. 25, 2004

**Name of Test:** Field Strength of Spurious Radiation

**Specification:** 47 CFR 2.1053(a)

**Guide:** ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16

### Measurement Procedure

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.


#### 1.2.12.2 Method of Measurement

A) Connect the equipment as illustrated

B) Adjust the spectrum analyzer for the following settings:


- 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
- 2) Video Bandwidth  $\geq 3$  times Resolution Bandwidth
- 3) Sweep Speed  $\leq 2000$  Hz/second
- 4) Detector Mode = Mean or Average Power

C) Place the transmitter to be tested on the turntable in the standard test site. If the antenna is detachable, The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

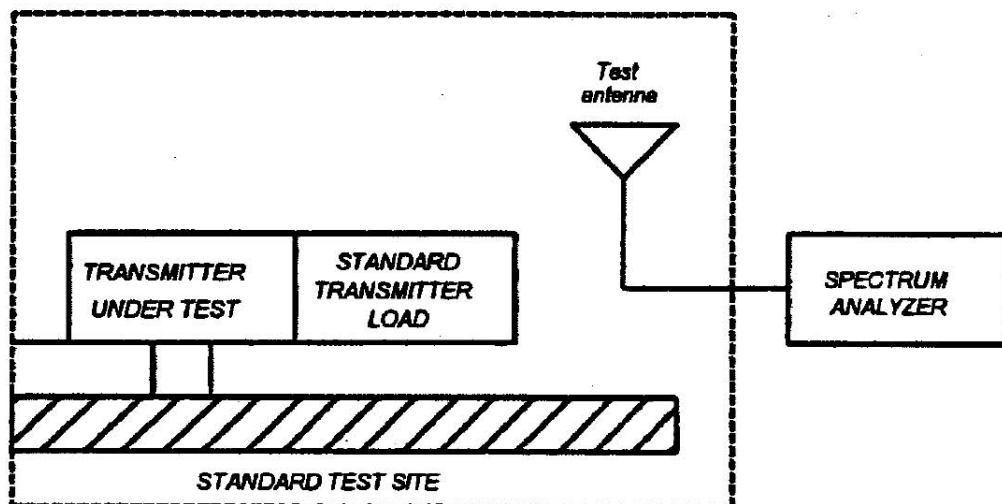

**Name of Test:** Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should cover the measured frequency. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

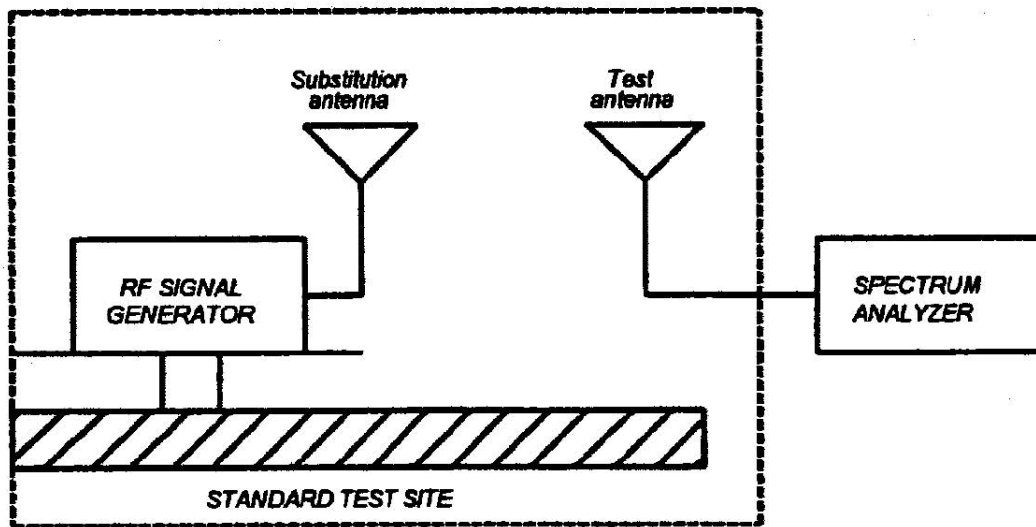

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna. The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.



**Name of Test:** Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

**FCC TEST REPORT****Report No. : F411615****Name of Test:** Field Strength of Spurious Radiation**GSM 1900**

Freq MHz	Pol	Substitution Antenna Input Power dBm	Substitution Antenna Gain dBi	Et	Es	Et - Es dB	EIRP, dBm	Limit (dBm)	Margin (dB)
34.42	H	-0.63	0.59	42.22	68.93	-26.71	-26.75	-13.0	-13.75
64.34	H	-0.92	0.65	41.67	85.78	-44.11	-44.38	-13.0	-31.38
92.90	H	-0.95	2.54	42.49	92.02	-49.53	-47.95	-13.0	-34.95
166.34	H	-1.02	1.67	38.36	91.04	-52.68	-52.03	-13.0	-39.03
279.20	H	-1.39	1.74	31.53	92.48	-60.95	-60.61	-13.0	-47.61
300.80	H	-1.48	1.65	39.15	93.17	-54.02	-53.85	-13.0	-40.85
1484.00	H	-3.41	6.43	66.99	102.25	-35.26	-32.24	-13.0	-19.24
1724.00	H	-3.64	6.59	64.33	101.95	-37.62	-34.67	-13.0	-21.67
1822.00	H	-3.73	6.63	66.82	101.76	-34.94	-32.04	-13.0	-19.04
1942.00	H	-3.84	6.68	66.96	101.52	-34.56	-31.72	-13.0	-18.72
2276.00	H	-4.32	7.14	60.25	99.43	-39.18	-36.35	-13.0	-23.35
3758.00	H	-5.25	7.45	76.35	99.07	-22.72	-20.52	-13.0	-7.52
5638.00	H	-6.67	8.44	68.25	98.79	-30.54	-28.77	-13.0	-15.77
7518.00	H	-8.44	8.52	62.81	94.67	-31.86	-31.78	-13.0	-18.78
9398.00	H	-9.78	8.94	63.02	95.76	-32.74	-33.59	-13.0	-20.59
34.42	V	-0.63	0.59	41.46	68.93	-27.47	-28.74	-13.0	-15.74
64.34	V	-0.92	0.65	41.04	85.78	-44.74	-45.19	-13.0	-32.19
92.90	V	-0.95	2.54	42.21	92.02	-49.81	-47.66	-13.0	-34.66
171.10	V	-1.01	1.72	39.26	90.88	-51.62	-50.84	-13.0	-37.84
212.00	V	-1.30	1.32	30.04	90.64	-60.60	-60.69	-13.0	-47.69
394.40	V	-1.63	1.50	31.29	94.25	-62.96	-63.35	-13.0	-50.35
1484.00	V	-3.41	6.43	71.19	102.25	-31.06	-28.06	-13.0	-15.06
1724.00	V	-3.64	6.59	69.49	101.95	-32.46	-29.51	-13.0	-16.51
1822.00	V	-3.73	6.63	72.08	101.76	-29.68	-26.78	-13.0	-13.78
1942.00	V	-3.84	6.68	69.14	101.52	-32.38	-29.54	-13.0	-16.54
2276.00	V	-4.32	7.14	62.62	99.43	-36.81	-33.61	-13.0	-20.61
3758.00	V	-5.25	7.45	79.54	99.07	-19.53	-18.00	-13.0	-5.00
5638.00	V	-6.67	8.44	66.98	98.79	-31.81	-30.56	-13.0	-17.56
7518.00	V	-8.44	8.52	60.34	94.67	-34.33	-36.12	-13.0	-23.12
9398.00	V	-9.78	8.94	62.89	95.76	-32.87	-36.51	-13.0	-23.51

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID

Page No.

Issued Date

HFS-A100

26 of 50


Mar. 25, 2004

## FCC TEST REPORT

Report No. : F411615

Radiated Scanned Data

GSM1900, Vertical Polarization

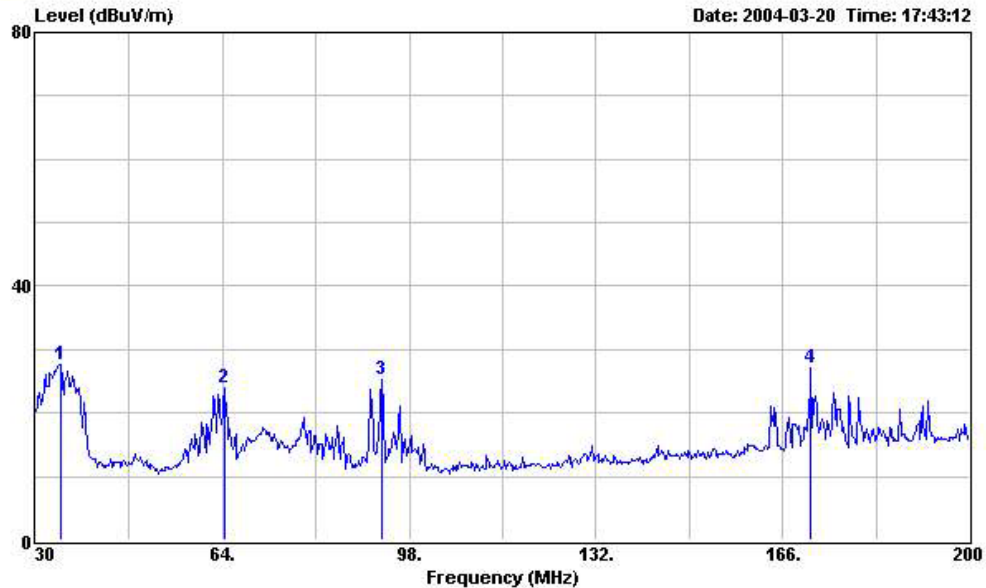

Site : 03CH03-HY  
Condition : 3m BIC-9124--301 VERTICAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	34.420	27.61	-----	-----	41.46	13.18	1.01	28.04	Peak	---	---
2	64.340	23.85	-----	-----	41.04	9.43	1.35	27.97	Peak	---	---
3	92.900	25.23	-----	-----	42.20	9.30	1.64	27.91	Peak	---	---
4	171.100	27.17	-----	-----	39.27	13.29	2.37	27.76	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID HFS-A100

Page No. 27 of 50

Issued Date Mar. 25, 2004

# FCC TEST REPORT

Report No. : F411615

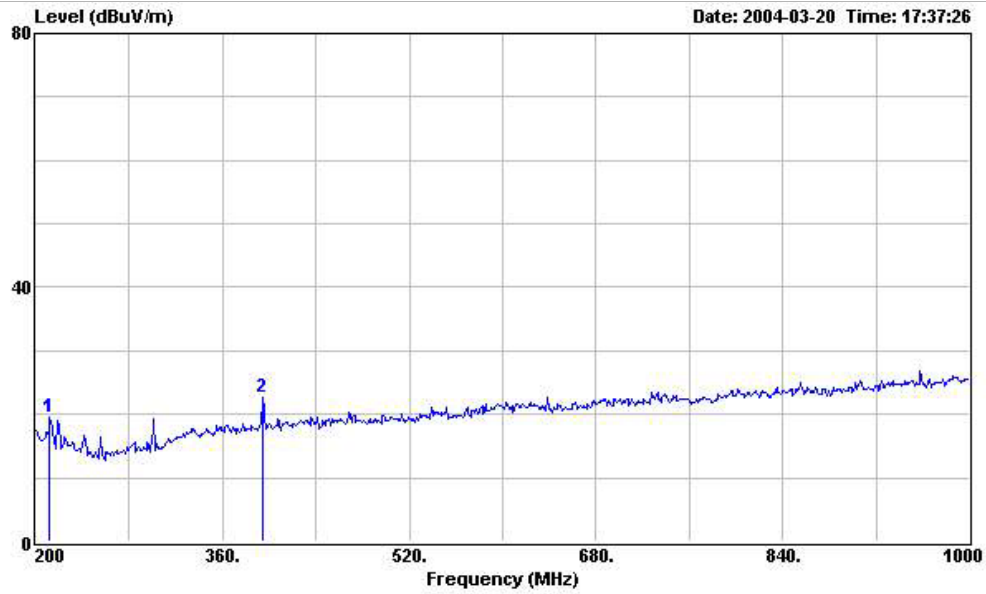


Site : 03CH03-HY  
 Condition : 3m LOG-9111-221 VERTICAL  
 EUT : GSM handset 900/1800/1900MHz  
 Power : AC 110V / 60Hz  
 Model : BN1  
 Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	212.000	19.64	-----	-----	30.04	14.64	2.61	27.65	Peak	---	---
2	394.400	22.65	-----	-----	31.29	15.68	3.45	27.77	Peak	---	---

# FCC TEST REPORT

Report No. : F411615

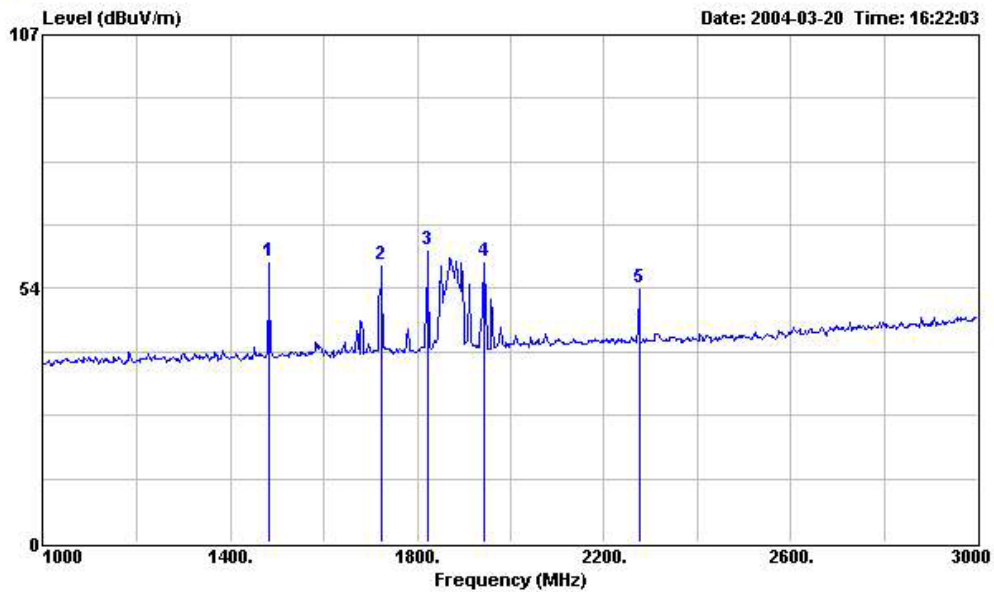

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 VERTICAL  
 EUT : GSM handset 900/1800/1900MHz  
 Power : AC 110V / 60Hz  
 Model : BN1  
 Memo : PCS CH661

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1484.000	59.42	-----	-----	71.18	25.30	1.46	38.52	Peak	---	---
2	1724.000	58.64	-----	-----	69.49	26.28	1.45	38.58	Peak	---	---
3	1822.000	61.78	-----	-----	72.08	26.68	1.62	38.60	Peak	---	---
4	1942.000	59.24	-----	-----	69.14	27.18	1.55	38.63	Peak	---	---
5	2276.000	53.78	-----	-----	62.61	27.97	1.74	38.54	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID HFS-A100

Page No. 29 of 50

Issued Date Mar. 25, 2004

**FCC TEST REPORT**

Report No. : F411615

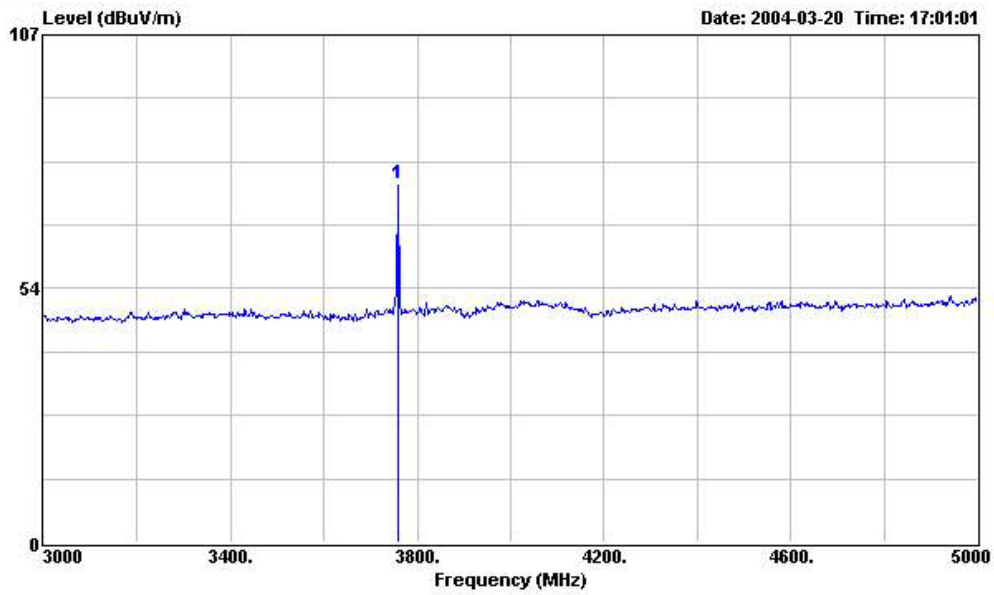

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 VERTICAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	75.49	-----	-----	79.53	31.96	1.82	37.82	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID HFS-A100

Page No. 30 of 50

Issued Date Mar. 25, 2004

# FCC TEST REPORT

Report No. : F411615

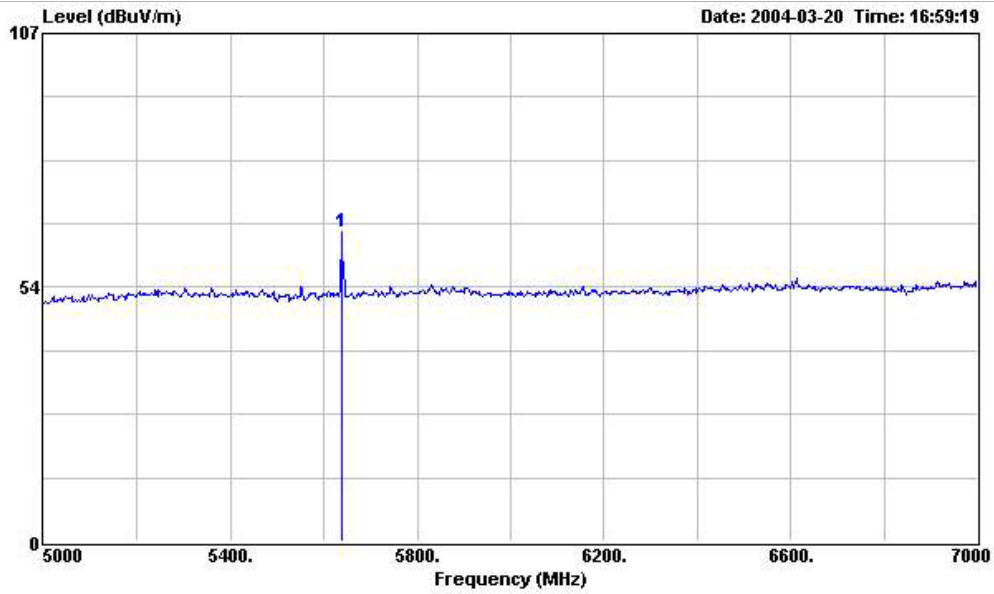


Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 VERTICAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5638.000	65.22	-----	-----	66.97	34.06	2.53	38.34	Peak	---	---

# FCC TEST REPORT

Report No. : F411615

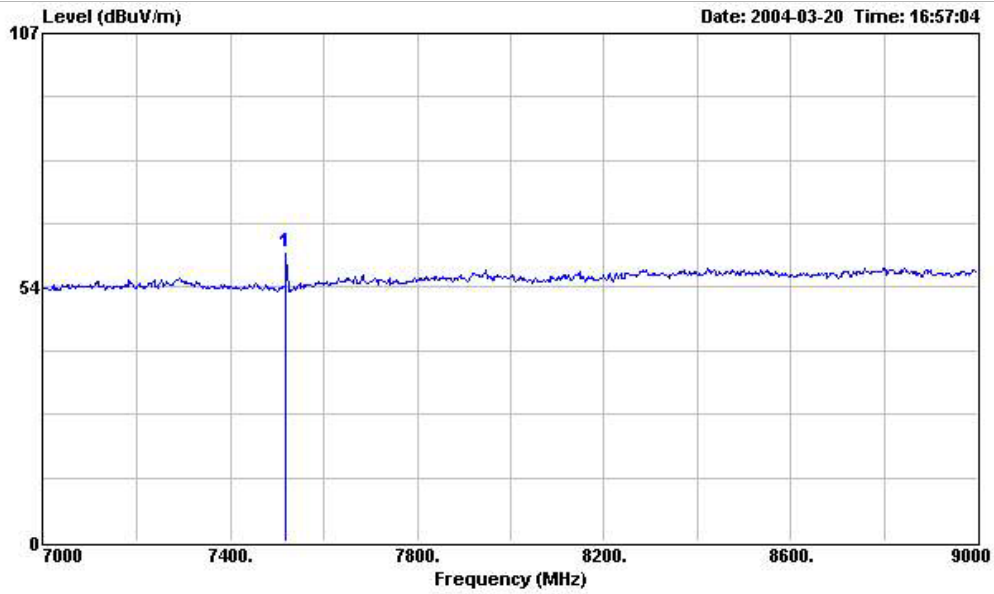


Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 VERTICAL  
 EUT : GSM handset 900/1800/1900MHz  
 Power : AC 110V / 60Hz  
 Model : BN1  
 Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7518.000	61.10	-----	-----	60.33	36.53	2.72	38.48	Peak	---	---



# FCC TEST REPORT

Report No. : F411615

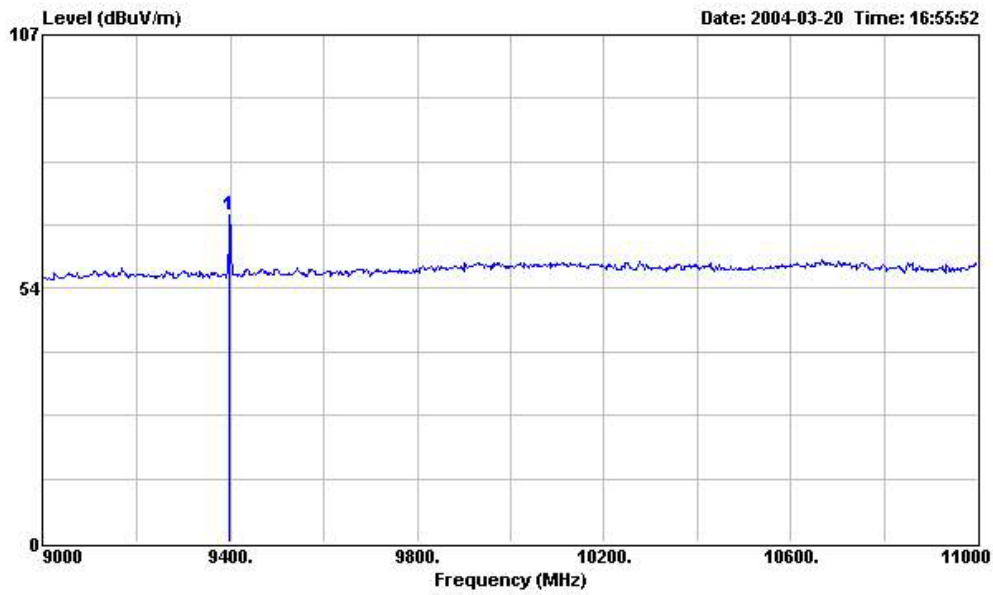


Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 VERTICAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	9398.000	69.03	-----	-----	62.89	37.94	3.75	35.55	Peak	---	---

## FCC TEST REPORT

Report No. : F411615

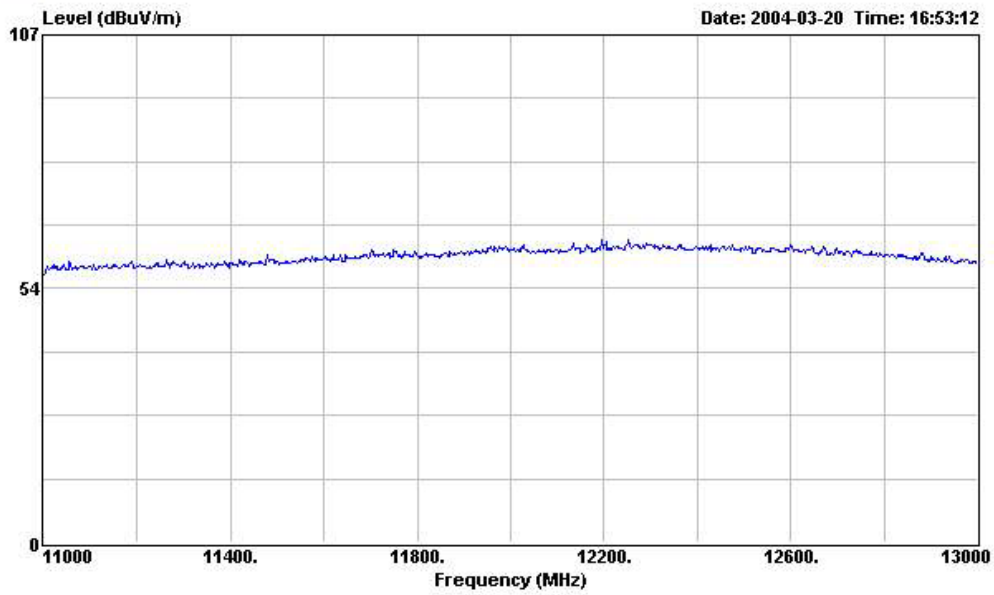


Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 VERTICAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

# FCC TEST REPORT

Report No. : F411615

GSM1900, Horizontal Polarization

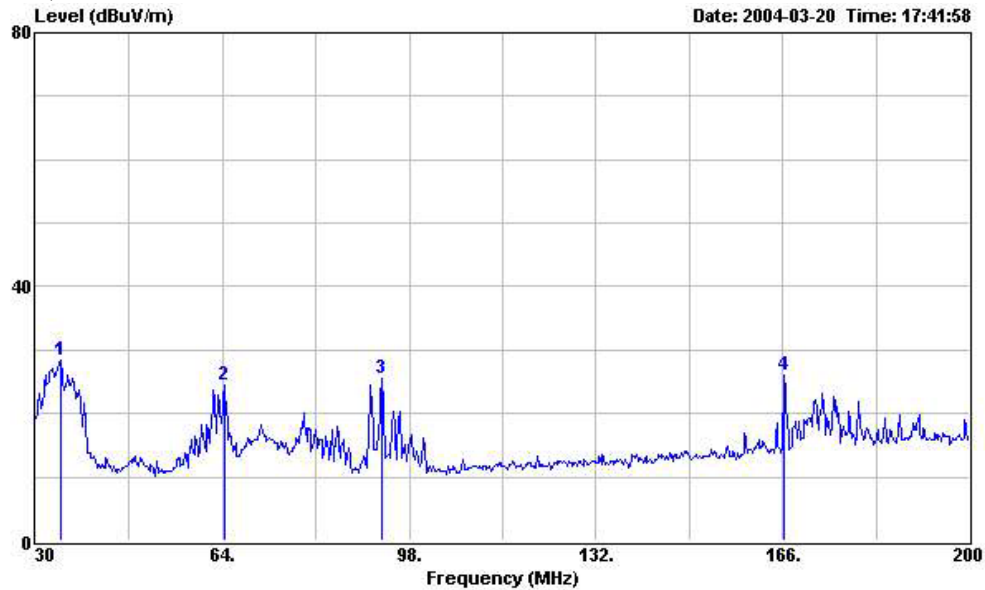

Site : 03CH03-HY  
Condition : 3m BIC-9124--301 HORIZONTAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	34.420	28.37	-----	-----	42.22	13.18	1.01	28.04	Peak	---	---
2	64.340	24.48	-----	-----	41.67	9.43	1.35	27.97	Peak	---	---
3	92.900	25.51	-----	-----	42.48	9.30	1.64	27.91	Peak	---	---
4	166.340	25.98	-----	-----	38.37	13.05	2.33	27.77	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID HFS-A100

Page No. 35 of 50

Issued Date Mar. 25, 2004

# FCC TEST REPORT

Report No. : F411615

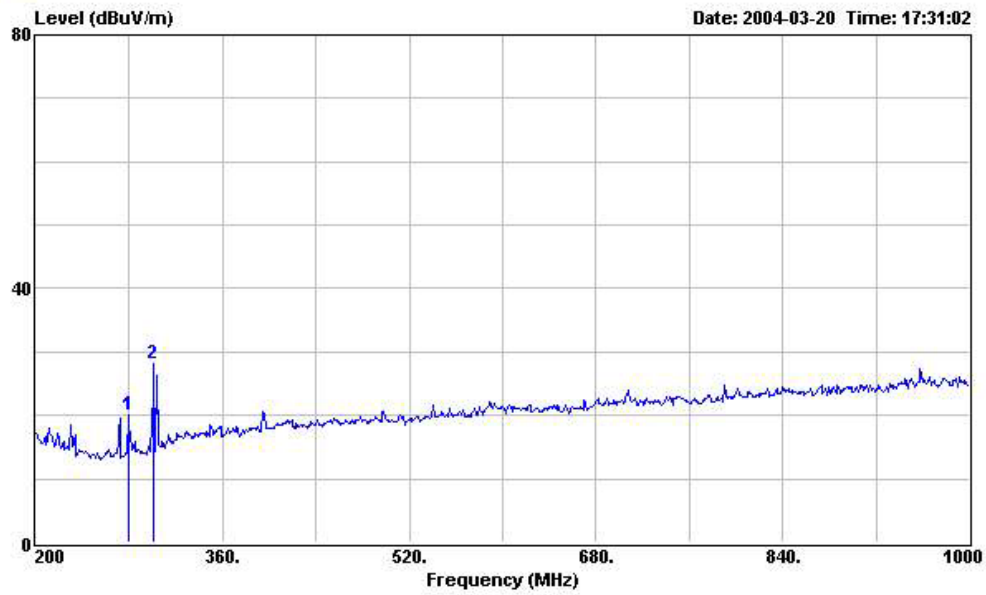


Site : 03CH03-HY  
 Condition : 3m LOG-9111-221 HORIZONTAL  
 EUT : GSM handset 900/1800/1900MHz  
 Power : AC 110V / 60Hz  
 Model : BN1  
 Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	279.200	20.04	-----	-----	31.53	12.88	3.01	27.38	Peak	---	---
2	300.800	28.19	-----	-----	39.15	13.26	3.08	27.30	Peak	---	---

# FCC TEST REPORT

Report No. : F411615

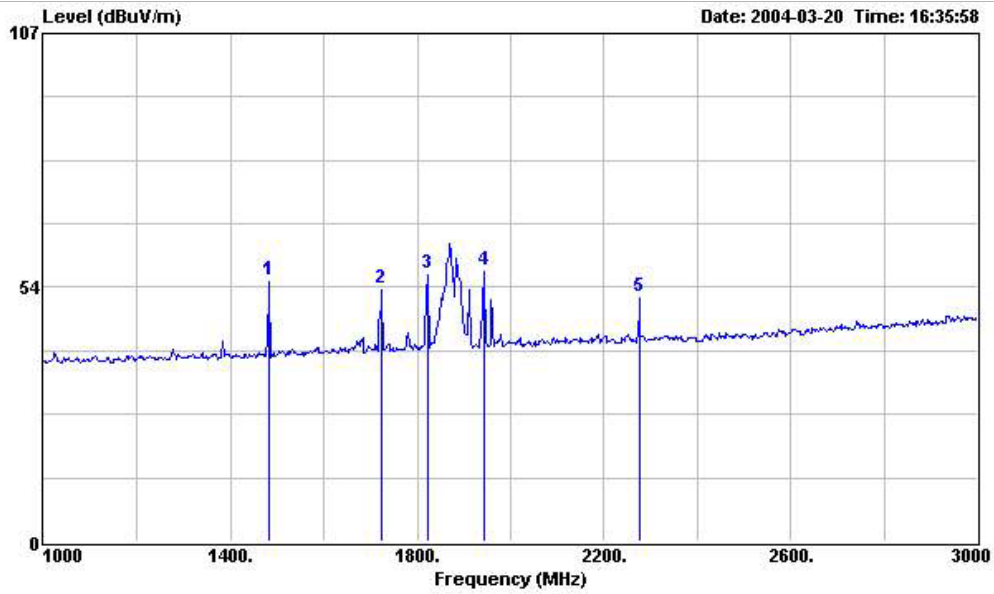

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 HORIZONTAL  
 EUT : GSM handset 900/1800/1900MHz  
 Power : AC 110V / 60Hz  
 Model : BN1  
 Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1484.000	55.22	-----	-----	66.98	25.30	1.46	38.52	Peak	---	---
2	1724.000	53.48	-----	-----	64.33	26.28	1.45	38.58	Peak	---	---
3	1822.000	56.52	-----	-----	66.82	26.68	1.62	38.60	Peak	---	---
4	1942.000	57.06	-----	-----	66.96	27.18	1.55	38.63	Peak	---	---
5	2276.000	51.41	-----	-----	60.24	27.97	1.74	38.54	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID HFS-A100

Page No. 37 of 50

Issued Date Mar. 25, 2004

# FCC TEST REPORT

Report No. : F411615

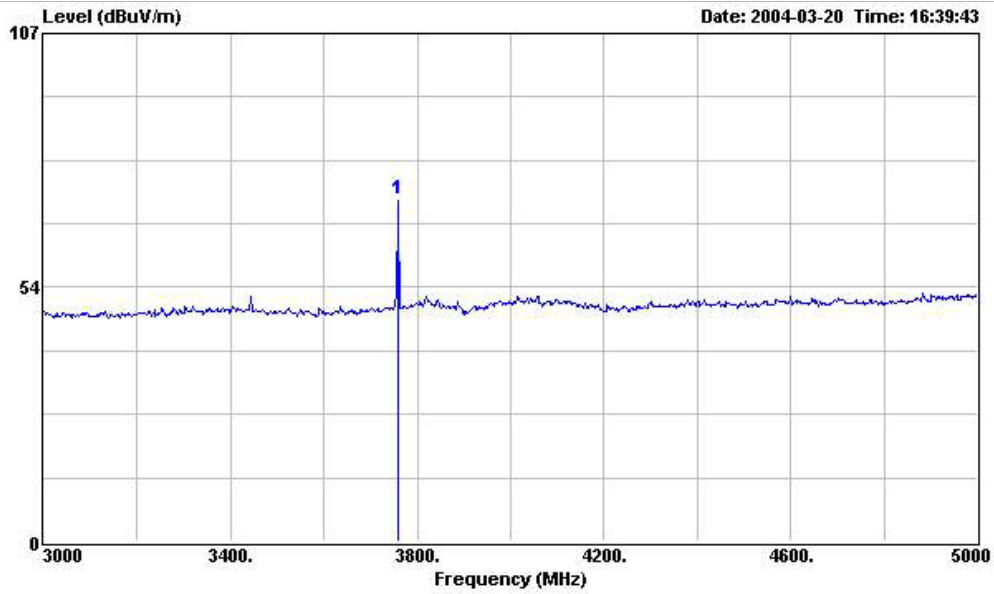


Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 HORIZONTAL  
 EUT : GSM handset 900/1800/1900MHz  
 Power : AC 110V / 60Hz  
 Model : BN1  
 Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3758.000	72.30	-----	-----	76.34	31.96	1.82	37.82	Peak	---	---

# FCC TEST REPORT

Report No. : F411615

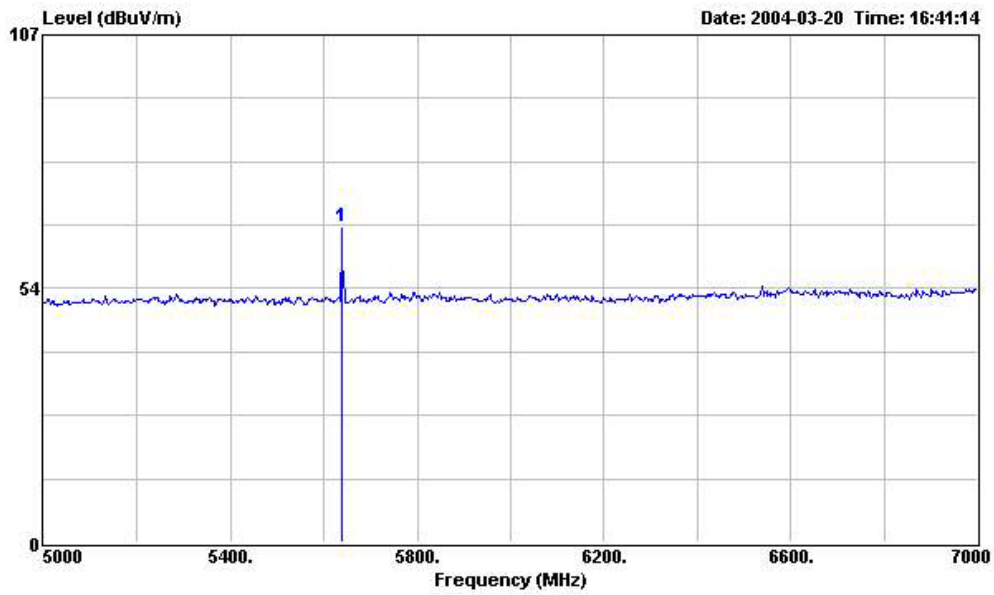

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 HORIZONTAL  
 EUT : GSM handset 900/1800/1900MHz  
 Power : AC 110V / 60Hz  
 Model : BN1  
 Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	5638.000	66.49	-----	-----	68.24	34.06	2.53	38.34	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID HFS-A100

Page No. 39 of 50

Issued Date Mar. 25, 2004

# FCC TEST REPORT

Report No. : F411615

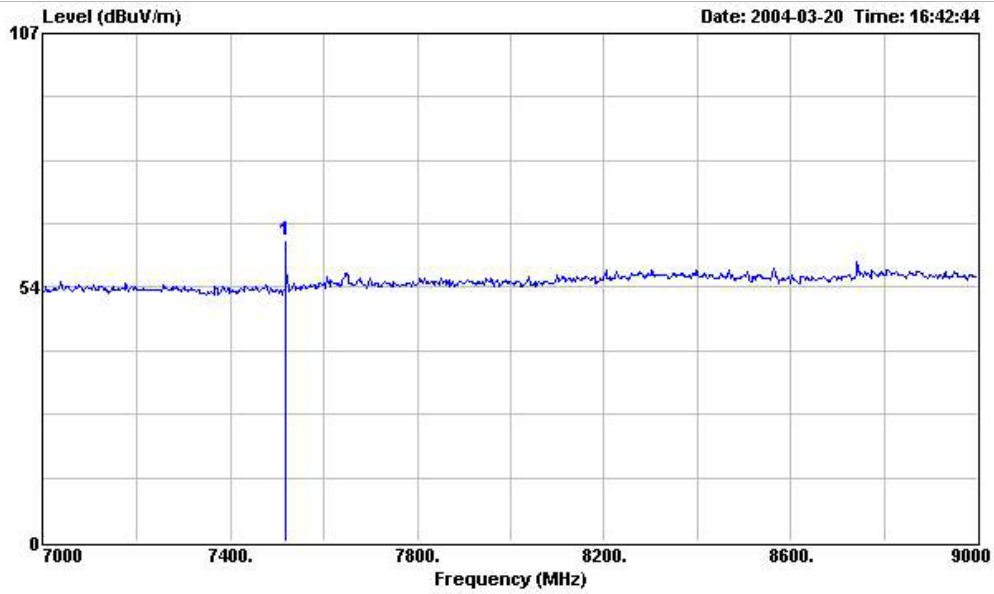


Site : 03CH03-HY  
 Condition : 3m HORN-ANT-6741 HORIZONTAL  
 EUT : GSM handset 900/1800/1900MHz  
 Power : AC 110V / 60Hz  
 Model : BN1  
 Memo : PCS CH661

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	7518.000	63.57	-----	-----	62.80	36.53	2.72	38.48	Peak	---	---



# FCC TEST REPORT

Report No. : F411615

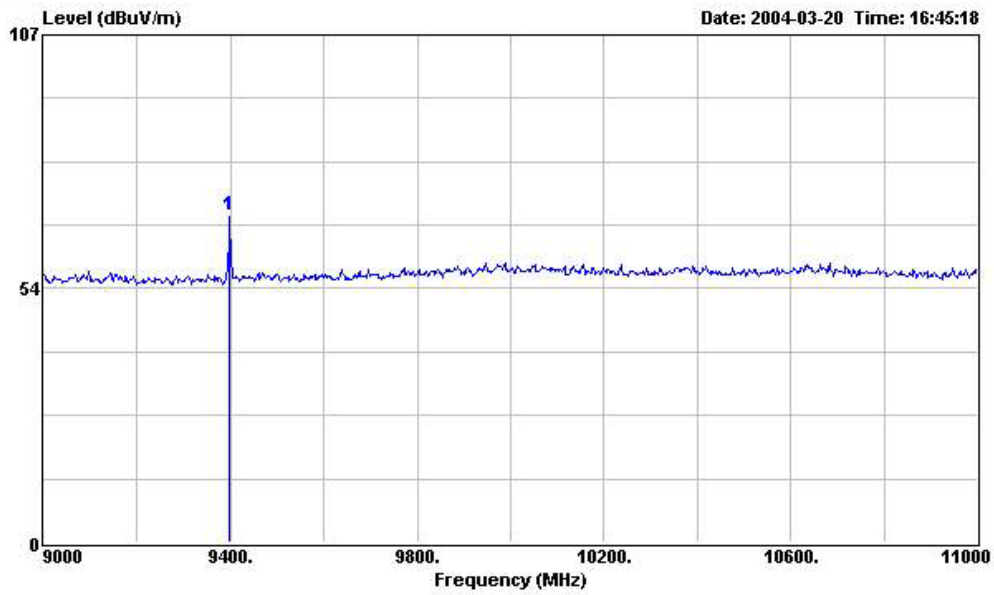

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 HORIZONTAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	9398.000	69.16	-----	-----	63.02	37.94	3.75	35.55	Peak	---	---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255


FCC ID HFS-A100

Page No. 41 of 50

Issued Date Mar. 25, 2004

## FCC TEST REPORT

Report No. : F411615

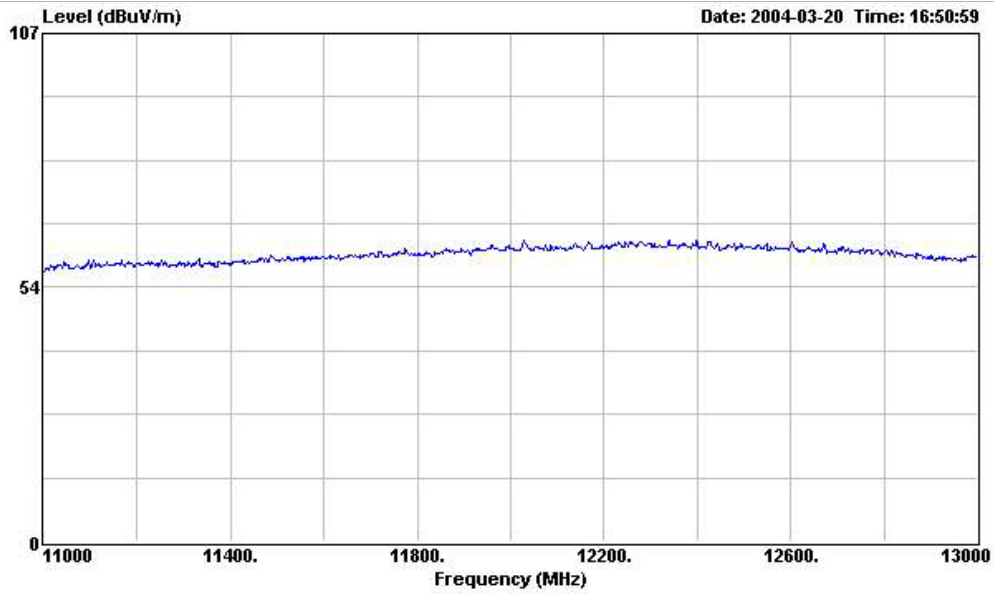

Site : 03CH03-HY  
Condition : 3m HORN-ANT-6741 HORIZONTAL  
EUT : GSM handset 900/1800/1900MHz  
Power : AC 110V / 60Hz  
Model : BN1  
Memo : PCS CH661

**SPORTON International Inc.**  
TEL : 886-2-2696-2468  
FAX : 886-2-2696-2255

FCC ID : HFS-A100  
Page No. : 42 of 50  
Issued Date : Mar. 25, 2004

**Name of Test:** Frequency Stability (Temperature Variation)

**Specification:** 47 CFR 2.1055(a)(1)

**Test Conditions:** As Indicated


**Test Equipment:** As per previous page

**Measurement Procedure**

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to  $-30^{\circ}\text{C}$  and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Measurement Results: Attached

**Transmitter Test Set-Up**

Frequency Stability: Temperature Variation  
Frequency Stability: Voltage Variation

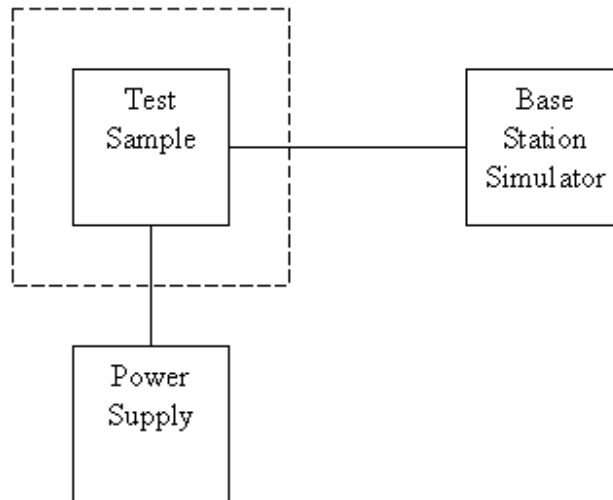

Asset	Model Name	S/N
Temperature & Humidity Controller	P-9000	612
AC/DC Power Source	HPA-500W	HPA0100024
Base Station Simulator	CMU200	102278

**FCC TEST REPORT**Report No. : F411615

---

**Name of Test:** Frequency Stability (Temperature Variation)

GSM 1900

Temperature(°C)	Change, Hz	Change, ppm
-30	77	0.04
-20	75	0.04
-10	73	0.04
0	71	0.04
10	68	0.04
20	66	0.03
30	56	0.03
40	46	0.02
50	33	0.02

## FCC TEST REPORT

Report No. : F411615

**Name of Test:** Frequency Stability (Voltage Variation)

**Specification:** 47 CFR 2.1055 (b)(1)

**Test Equipment:** As per previous page

### Measurement Procedure


1. The EUT was placed in a temperature chamber at  $25\pm5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

**Results:** Frequency Stability (Voltage Variation)

Nominal Value (Voltage) = 3.6 for channel 661

Voltage(Volt)	Change, Hz	Change, ppm
3.06	47	0.02
3.6	66	0.03
1.14	68	0.04

Limit: Must remain within authorized frequency block.

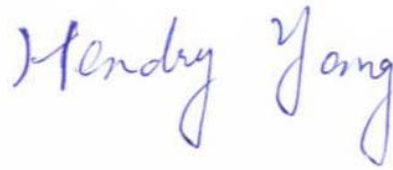

Performed By:

Hendry Yang

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID

HFS-A100

Page No.

46 of 50

Issued Date

Mar. 25, 2004

**Antenna Factor & Cable Loss**

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	4.50	1000	24.10	3.92
35	13.63	1.13	2000	27.40	5.66
40	11.11	1.18	3000	30.00	7.20
45	10.59	1.26	4000	32.60	9.36
50	6.47	1.31	5000	33.40	9.16
55	5.83	1.34	6000	34.20	10.70
60	5.18	1.43	7000	35.30	12.16
65	4.81	1.52	8000	36.90	13.12
70	4.43	1.56	9000	38.10	13.81
75	5.10	1.57	10000	39.00	14.83
80	5.91	1.60	11000	38.60	15.83
85	7.33	1.66	12000	39.50	17.11
90	8.74	1.75	13000	39.30	17.62
95	9.05	1.76	14000	41.60	18.37
100	9.36	1.83	15000	40.60	19.10
110	9.65	1.86	16000	37.20	19.72
120	9.97	1.92	17000	40.20	21.98
130	10.51	2.00	18000	48.90	21.22
140	10.32	2.11	19000	37.60	23.90
150	9.42	2.18	20000	37.30	24.07
160	8.09	2.22	21000	37.00	25.49
170	7.43	2.26	22000	38.00	24.92
180	7.60	2.31	23000	38.70	25.60
190	7.43	2.37	24000	38.60	25.70
200	7.26	2.43	25000	24.10	3.92
220	9.11	2.56	14000	27.40	5.66
240	10.88	2.70	15000	30.00	7.20
260	11.75	2.83	16000	32.60	9.36
280	11.55	2.93	17000	33.40	9.16
300	11.36	3.03	18000	34.20	10.70
320	12.03	3.13	19000	35.30	12.16
340	12.69	3.23	20000	36.90	13.12
360	13.33	3.32	21000	38.10	13.81
380	14.00	3.41	22000	39.00	14.83
400	14.63	3.48	23000	38.60	15.83
450	15.33	3.71	24000	39.50	17.11
500	16.03	3.85	25000	39.30	17.62
550	16.65	4.03			
600	17.29	4.32			
650	17.64	4.51			
700	18.00	4.54			
750	18.39	4.90			
800	18.79	5.04			
850	19.10	5.04			
900	19.42	5.20			
950	19.58	5.28			
1000	19.75	5.58			

**List of Measuring Equipments**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 23, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 24, 2003	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 24, 2003	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	3115	6741	1GHz – 18GHz	Apr. 08, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

- ※ Calibration Interval of instruments listed above is one year, except for Horn Antenna, BBHA9170.  
※ Calibration Interval of Horn Antenna, BBHA9170, is three years.



## Uncertainty of Test Site

## Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch Receiver VSWR $\Gamma_1 = 0.20$ Antenna VSWR $\Gamma_2 = 0.23$ Uncertainty = $20\log(1 - \Gamma_1 \Gamma_2)$	+0.39/-0.41	U-shaped	0.28
<b>combined standard uncertainty Uc(y)</b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.54</b>		

## Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$	$C_i$	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	$\pm 0.10$	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	$\pm 1.70$	Normal(k=2)	0.85	1	0.85
Cable loss calibration	$\pm 0.50$	Normal(k=2)	0.25	1	0.25
Receiver Correction	$\pm 2.00$	Rectangular	1.15	1	1.15
Antenna Factor Directional	$\pm 1.50$	Rectangular	0.87	1	0.87
Site imperfection	$\pm 2.80$	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\log(1 - \Gamma_1 \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
<b>Combined standard uncertainty Uc(y)</b>	<b>2.36</b>				
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>4.72</b>				

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2 \text{ for 10m test distance}$$

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7 \text{ for 3m test distance}$$

END OF TEST REPORT

**Testimonial  
and  
Statement of Certification**

**This is to certify that:**

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certified by:

  
Daniel Lee