

RF Exposure report



The following samples were submitted and identified on behalf of the client as:

Product Name	Clover Flex Pocket
Brand Name	Clover
Model No.	C407
Applicant	Quanta Computer Inc. No. 188, Wenhua 2nd Road, Guishan District, Taoyuan City 33377, Taiwan
Standards	IEEE/ANSI C95.1-1992, IEEE 1528-2013
FCC ID	HFS-C407
Date of EUT Receipt	May 10, 2024
Date of Test(s)	May 23, 2024 ~ Jun. 26, 2024
Date of Issue	Jul. 19, 2024

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Kimmy Chiou	PM / Ruby Ou	Approved By / John Yeh

Date: Jul. 19, 2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TESA2405000290E5	00	Initial creation of document	Jul. 12, 2024	Kimmy Chiou	
TESA2405000290E5	01	Add NFC exclusion analysis	Jul. 16, 2024	Kimmy Chiou	*
TESA2405000290E5	02	Modify co-SAR	Jul. 19, 2024	Kimmy Chiou	*

Note:

- The mark " * " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Contents

1	GENERAL INFORMATION	4
1.1	Test Methodology	4
1.2	Description of EUT	5
1.3	Maximum value	6
1.4	Antenna Information	6
2	MEASUREMENT SYSTEM	7
2.1	Test Facility	7
2.2	SAR System.....	8
3	SAR SYSTEM VERIFICATION	11
3.1	Tissue Simulating Liquid.....	11
3.2	Tissue Simulant Liquid measurement.....	11
3.3	Measurement results of Tissue Simulant Liquid.....	12
3.4	The composition of the tissue simulating liquid:.....	14
3.5	System check.....	14
3.6	System check results	15
4	TEST CONFIGURATIONS	16
4.1	Test Environment.....	16
4.2	Test Note.....	16
4.3	Test position.....	21
4.4	Test limit	22
5	MAXIMUM OUTPUT POWER	25
5.1	FDD LTE	25
5.2	WLAN	39
5.3	Bluetooth	41
5.4	BLE.....	41
6	DUTY CYCLE	42
7	SUMMARY OF RESULTS	45
7.1	Decision rules	45
7.2	Summary of SAR Results.....	45
7.3	Reporting statements of conformity	51
7.4	Conclusion	51
8	SIMULTANEOUS TRANSMISSION ANALYSIS	52
8.1	Simultaneous Transmission Scenarios:	52
8.2	Estimated SAR calculation.....	52
8.3	SPLSR evaluation and analysis.....	52
8.4	Conclusion	54
9	INSTRUMENTS LIST	55
10	UNCERTAINTY BUDGET	56
11	SAR MEASUREMENT RESULTS	58
12	SAR SYSTEM CHECK RESULTS	84
13	APPENDIXES	100
13.1	SAR_Appendix A Photographs	100
13.2	SAR_Appendix B DAE & Probe Cal. Certificate	100
13.3	SAR_Appendix C Phantom Description & Dipole Cal. Certificate	100

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1 GENERAL INFORMATION

1.1 Test Methodology

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB447498D01v06

KDB865664D01v01r04

KDB865664D02v01r02

KDB941225D05v02r05

KDB248227D01v02r01

KDB941225D07v01r02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.2 Description of EUT

Product Name	Clover Flex Pocket	
Brand Name	Clover	
Model No.	C407	
FCC ID	HFS-C407	
Integrated Module	Brand Name: Fibocom Model Name: SC126-NA	
Duty Cycle	LTE FDD	1
	WLAN802.11	Please refer to section 7
	Bluetooth	Please refer to section 7
Supported radios (TX Frequency Range, MHz)	LTE FDD Band 2	1850-1910
	LTE FDD Band 4	1710-1755
	LTE FDD Band 5	824-849
	LTE FDD Band 12	699-716
	LTE FDD Band 13	777-787
	LTE FDD Band 66	1710-1780
	802.11 b/g/n	2.4GHz (2400.0 – 2483.5 MHz)
	802.11a/n/ac	5.2GHz (5150.0 –5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz)
	Bluetooth	2.4GHz (2400.0 – 2483.5 MHz)
	NFC	13.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.3 Maximum value

Limb

Summary of Maximum SAR Value	
Mode	Highest SAR 10g (W/kg)
LTE Band 2	1.18
Bluetooth(GFSK)	0.05
2.4G WLAN	0.17
5G WLAN	2.58

Body

Summary of Maximum SAR Value	
Mode	Highest SAR 1g (W/kg)
LTE Band 2	1.19
Bluetooth(GFSK)	0.06
2.4G WLAN	0.12
5G WLAN	1.09

1.4 Antenna Information

WWAN

Vendor	AWAN					
Antenna	Main					
Part Number	DQ60ALF0007					
Frequency(MHz)	12	13	5	4	66	2
	699~716	777~787	824~849	1710~1755	1710~1780	1850~1910
Gain (dBi)	0.68	1.17	-1.09	1.49	1.25	2.00

WLAN

Vendor	AWAN				
Antenna	ANT1				
Part Number	DQ60ALF0011				
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850
Gain (dBi)	-1.11	1.96	1.96	3.07	1.23

Note: Antenna information is provided by the applicant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

2 MEASUREMENT SYSTEM

2.1 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
SGS Taiwan Ltd. Central RF Lab. (TAF code 3702)	1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, NeiHu District, Taipei City, 11493, Taiwan.	SAR 2	TW0029	TW3702
		SAR 6		
		SAR 8		
	No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan	SAR 1	TW0028	
		SAR 4		
	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan	SAR 3	TW0027	
SAR 7				

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

2.2 SAR System

Block Diagram (DASY5)

A block diagram of the SAR measurement System is given in below. This SAR measurement system uses a computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_{i}|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

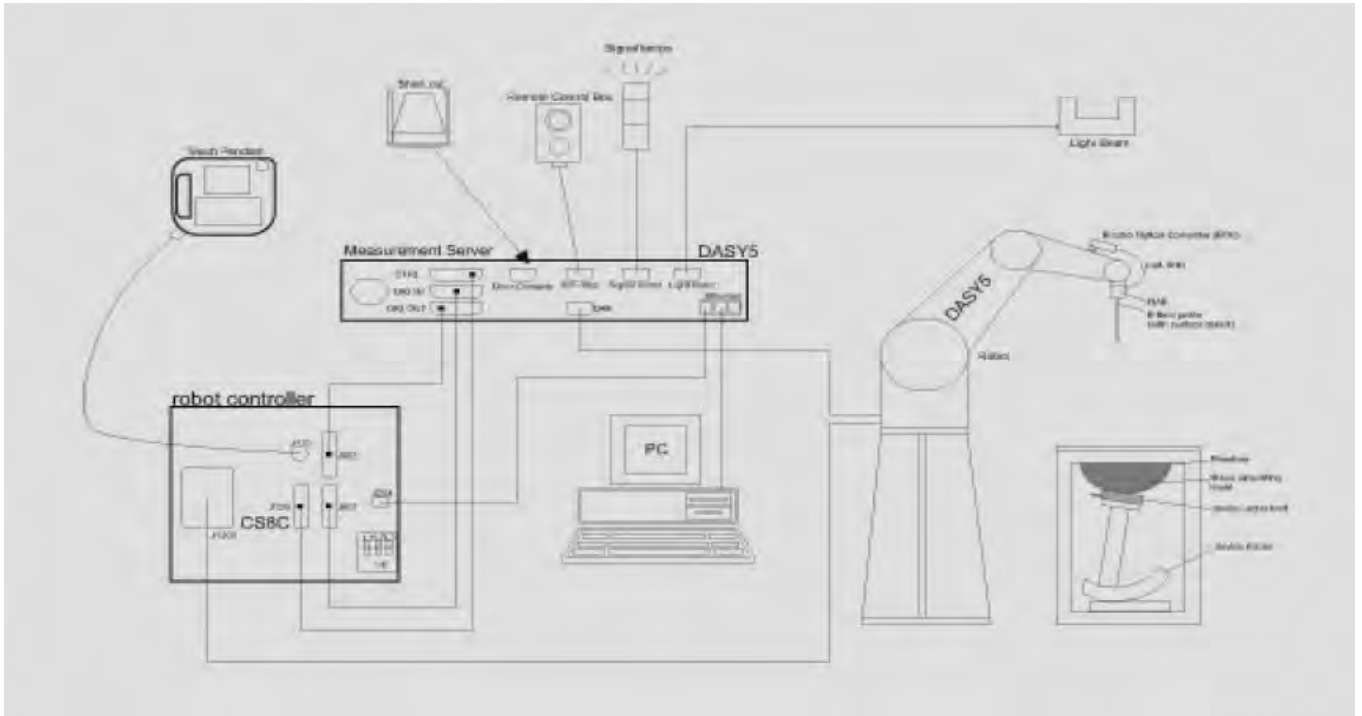


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 750/835/1750/19002450/5250/5600/5750 MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

PHANTOM (SAM)

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Height: 850 mm; Length: 1000 mm; Width: 500 mm	

DEVICE HOLDER

Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3 SAR SYSTEM VERIFICATION

3.1 Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with homogeneous tissue simulating liquid. For head SAR testing, the liquid height from the ear rint (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm.

3.2 Tissue Simulant Liquid measurement

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within $\pm 5\%$ of the target values.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

3.3 Measurement results of Tissue Simulant Liquid

Measured Frequency (MHz)	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	% dev ϵ_r	% dev σ	Limit	Measurement Date
704	42.145	0.887	42.383	0.895	0.56%	0.91%	± 5%	May. 23, 2024
707.5	42.127	0.887	42.368	0.896	0.57%	1.00%	± 5%	May. 23, 2024
711	42.108	0.887	42.346	0.897	0.57%	1.08%	± 5%	May. 23, 2024
750	41.900	0.890	42.132	0.901	0.55%	1.24%	± 5%	May. 23, 2024
782	41.749	0.894	41.984	0.904	0.56%	1.15%	± 5%	May. 23, 2024
829	41.528	0.899	41.921	0.909	0.95%	1.08%	± 5%	May. 23, 2024
835	41.500	0.900	41.901	0.911	0.97%	1.22%	± 5%	May. 23, 2024
836.5	41.500	0.902	41.898	0.912	0.96%	1.15%	± 5%	May. 23, 2024
844	41.500	0.910	41.897	0.921	0.96%	1.24%	± 5%	May. 23, 2024
1720	40.114	1.354	40.105	1.401	-0.02%	3.45%	± 5%	May. 23, 2024
1732.5	40.096	1.361	40.179	1.409	0.21%	3.49%	± 5%	May. 23, 2024
1745	40.079	1.369	40.105	1.419	0.07%	3.68%	± 5%	May. 23, 2024
1750	40.071	1.370	40.100	1.422	0.07%	3.80%	± 5%	May. 23, 2024
1770	40.043	1.383	40.898	1.436	2.14%	3.84%	± 5%	May. 23, 2024
1860	40.000	1.400	40.859	1.457	2.15%	4.07%	± 5%	May. 23, 2024
1880	40.000	1.400	40.831	1.461	2.08%	4.36%	± 5%	May. 23, 2024
1900	40.000	1.400	40.807	1.465	2.02%	4.64%	± 5%	May. 23, 2024
2402	39.282	1.757	38.262	1.704	-2.60%	-3.04%	± 5%	May. 24, 2024
2412	39.265	1.766	38.244	1.715	-2.60%	-2.91%	± 5%	May. 24, 2024
2422	39.248	1.775	38.225	1.722	-2.61%	-3.00%	± 5%	May. 24, 2024
2437	39.222	1.788	38.196	1.733	-2.62%	-3.10%	± 5%	May. 24, 2024
2441	39.215	1.792	38.187	1.737	-2.62%	-3.07%	± 5%	May. 24, 2024
2450	39.200	1.800	38.174	1.744	-2.62%	-3.11%	± 5%	May. 24, 2024
2452	39.197	1.802	38.169	1.748	-2.62%	-3.00%	± 5%	May. 24, 2024
2462	39.184	1.813	38.155	1.758	-2.63%	-3.02%	± 5%	May. 24, 2024
2480	39.160	1.832	38.129	1.775	-2.63%	-3.11%	± 5%	May. 24, 2024
5180	36.020	4.639	37.138	4.786	3.10%	3.17%	± 5%	May. 25, 2024
5220	35.980	4.680	37.099	4.828	3.11%	3.16%	± 5%	May. 25, 2024
5240	35.960	4.700	37.081	4.849	3.12%	3.17%	± 5%	May. 25, 2024
5250	35.950	4.710	37.069	4.862	3.11%	3.23%	± 5%	May. 25, 2024
5260	35.940	4.720	37.058	4.871	3.11%	3.20%	± 5%	May. 25, 2024
5300	35.900	4.760	37.011	4.909	3.09%	3.13%	± 5%	May. 25, 2024
5320	35.880	4.780	36.989	4.931	3.09%	3.16%	± 5%	May. 25, 2024
5500	35.650	4.965	36.755	5.119	3.10%	3.10%	± 5%	May. 25, 2024
5600	35.500	5.070	36.608	5.228	3.12%	3.12%	± 5%	May. 25, 2024
5700	35.400	5.170	36.503	5.331	3.12%	3.11%	± 5%	May. 25, 2024
5720	35.380	5.190	36.481	5.353	3.11%	3.14%	± 5%	May. 25, 2024
5745	35.355	5.215	36.456	5.379	3.11%	3.14%	± 5%	May. 25, 2024
5750	35.350	5.220	36.446	5.386	3.10%	3.18%	± 5%	May. 25, 2024
5785	35.315	5.255	36.404	5.418	3.08%	3.10%	± 5%	May. 25, 2024
5825	35.275	5.296	36.361	5.464	3.08%	3.17%	± 5%	May. 25, 2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Measured Frequency (MHz)	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	% dev ϵ_r	% dev σ	Limit	Measurement Date
5190	36.010	4.650	37.111	4.803	3.06%	3.30%	± 5%	Jun. 22, 2024
5230	35.970	4.690	37.078	4.840	3.08%	3.20%	± 5%	Jun. 22, 2024
5250	35.950	4.710	37.055	4.862	3.07%	3.23%	± 5%	Jun. 22, 2024
5260	35.940	4.720	37.042	4.871	3.07%	3.20%	± 5%	Jun. 22, 2024
5300	35.900	4.760	36.993	4.911	3.04%	3.17%	± 5%	Jun. 22, 2024
5320	35.880	4.780	36.975	4.933	3.05%	3.20%	± 5%	Jun. 22, 2024
5500	35.650	4.965	36.772	5.122	3.15%	3.16%	± 5%	Jun. 22, 2024
5600	35.500	5.070	36.668	5.231	3.29%	3.18%	± 5%	Jun. 22, 2024
5700	35.400	5.170	36.570	5.330	3.31%	3.09%	± 5%	Jun. 22, 2024
5720	35.380	5.190	36.548	5.353	3.30%	3.14%	± 5%	Jun. 22, 2024
5745	35.355	5.215	36.526	5.379	3.31%	3.14%	± 5%	Jun. 22, 2024
5750	35.350	5.220	36.520	5.384	3.31%	3.14%	± 5%	Jun. 22, 2024
5785	35.315	5.255	36.488	5.423	3.32%	3.20%	± 5%	Jun. 22, 2024
5825	35.275	5.296	36.446	5.467	3.32%	3.22%	± 5%	Jun. 22, 2024
704	42.145	0.887	42.260	0.883	0.27%	-0.44%	± 5%	Jun. 23, 2024
707.5	42.127	0.887	42.246	0.884	0.28%	-0.36%	± 5%	Jun. 23, 2024
711	42.108	0.887	42.223	0.885	0.27%	-0.27%	± 5%	Jun. 23, 2024
750	41.900	0.890	42.009	0.888	0.26%	-0.22%	± 5%	Jun. 23, 2024
782	41.749	0.894	41.861	0.892	0.27%	-0.20%	± 5%	Jun. 23, 2024
829	41.528	0.899	41.798	0.897	0.65%	-0.26%	± 5%	Jun. 23, 2024
835	41.500	0.900	41.778	0.899	0.67%	-0.11%	± 5%	Jun. 23, 2024
836.5	41.500	0.902	41.774	0.900	0.66%	-0.18%	± 5%	Jun. 23, 2024
844	41.500	0.910	41.771	0.909	0.65%	-0.08%	± 5%	Jun. 23, 2024
1720	40.114	1.354	40.056	1.389	-0.15%	2.56%	± 5%	Jun. 24, 2024
1732.5	40.096	1.361	40.014	1.397	-0.21%	2.61%	± 5%	Jun. 24, 2024
1745	40.079	1.369	39.982	1.407	-0.24%	2.81%	± 5%	Jun. 24, 2024
1750	40.071	1.371	39.977	1.411	-0.24%	2.89%	± 5%	Jun. 24, 2024
1770	40.043	1.383	39.875	1.424	-0.42%	2.98%	± 5%	Jun. 24, 2024
1860	40.000	1.400	39.736	1.445	-0.66%	3.21%	± 5%	Jun. 24, 2024
1880	40.000	1.400	39.718	1.449	-0.70%	3.50%	± 5%	Jun. 24, 2024
1900	40.000	1.400	39.684	1.453	-0.79%	3.79%	± 5%	Jun. 24, 2024
2402	39.282	1.757	38.139	1.692	-2.91%	-3.73%	± 5%	Jun. 25, 2024
2412	39.265	1.766	38.125	1.701	-2.90%	-3.70%	± 5%	Jun. 25, 2024
2422	39.248	1.775	38.112	1.707	-2.89%	-3.84%	± 5%	Jun. 25, 2024
2437	39.222	1.788	38.073	1.720	-2.93%	-3.83%	± 5%	Jun. 25, 2024
2441	39.215	1.792	38.064	1.723	-2.94%	-3.85%	± 5%	Jun. 25, 2024
2450	39.200	1.800	38.055	1.734	-2.92%	-3.67%	± 5%	Jun. 25, 2024
2452	39.197	1.802	38.046	1.738	-2.94%	-3.56%	± 5%	Jun. 25, 2024
2462	39.184	1.813	38.032	1.746	-2.94%	-3.68%	± 5%	Jun. 25, 2024
2480	39.160	1.832	38.008	1.763	-2.94%	-3.77%	± 5%	Jun. 25, 2024
5180	36.020	4.639	36.981	4.791	2.67%	3.28%	± 5%	Jun. 26, 2024
5220	35.980	4.680	36.951	4.823	2.70%	3.06%	± 5%	Jun. 26, 2024
5240	35.960	4.700	36.924	4.851	2.68%	3.21%	± 5%	Jun. 26, 2024
5260	35.940	4.720	36.920	4.859	2.73%	2.94%	± 5%	Jun. 26, 2024
5300	35.900	4.760	36.885	4.903	2.74%	3.00%	± 5%	Jun. 26, 2024
5320	35.880	4.780	36.843	4.922	2.68%	2.97%	± 5%	Jun. 26, 2024
5500	35.650	4.965	36.653	5.113	2.81%	2.98%	± 5%	Jun. 26, 2024
5600	35.500	5.070	36.534	5.219	2.91%	2.94%	± 5%	Jun. 26, 2024
5700	35.400	5.170	36.458	5.318	2.99%	2.86%	± 5%	Jun. 26, 2024
5720	35.380	5.190	36.432	5.345	2.97%	2.99%	± 5%	Jun. 26, 2024
5745	35.355	5.215	36.411	5.363	2.99%	2.84%	± 5%	Jun. 26, 2024
5750	35.350	5.220	36.397	5.372	2.96%	2.91%	± 5%	Jun. 26, 2024
5785	35.315	5.255	36.365	5.413	2.97%	3.01%	± 5%	Jun. 26, 2024
5825	35.275	5.296	36.325	5.455	2.98%	3.00%	± 5%	Jun. 26, 2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3.4 The composition of the tissue simulating liquid:

Simulating Liquids for 600 MHz -10 GHz, Manufactured by SPEAG:


Broad-band head tissue simulating liquids	SPEAG Product	Frequency range (MHz)	Main Ingredients
	HBBL600-10000V6	600 - 10000	Water, Oil

3.5 System check

The microwave circuit arrangement for system check is sketched in below. The daily system accuracy verification occurs within the flat section of the SAM phantom and ELI phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values.

The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed with SAR values normalized to 1W forward power delivered to the dipole.

During the tests, the liquid depth from the center of the flat phantom to the liquid top surface was 15 cm above in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

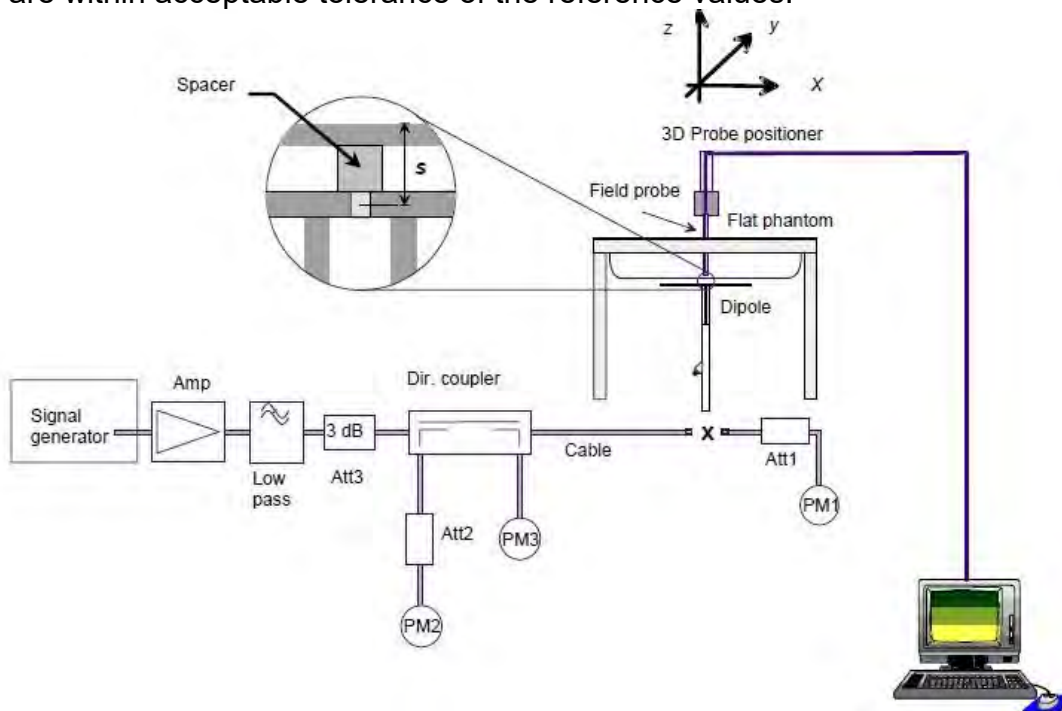

The block diagram of system check

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3.6 System check results

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D750V3	1015	750	8.63	2.07	8.28	-4.06	± 10%	May.23,2024
D835V2	4d063	835	9.53	2.39	9.56	0.31	± 10%	May.23,2024
D1750V2	1158	1750	36.8	8.79	35.16	-4.46	± 10%	May.23,2024
D1900V2	5d173	1900	39.9	9.64	38.56	-3.36	± 10%	May.23,2024
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D2450V2	727	2450	52.7	13.5	54	2.47	± 10%	May.24,2024
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	78.8	8.36	83.6	6.09	± 10%	May.25,2024
D5GHzV2	1023	5600	81.3	8.77	87.7	7.87	± 10%	May.25,2024
D5GHzV2	1023	5750	78	8.17	81.7	4.74	± 10%	May.25,2024

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D750V3	1015	750	8.63	2.09	8.36	-3.13	± 10%	Jun.23,2024
D835V2	4d063	835	9.53	2.32	9.28	-2.62	± 10%	Jun.23,2024
D1750V2	1158	1750	36.8	9.39	37.56	2.07	± 10%	Jun.24,2024
D1900V2	5d173	1900	39.9	9.8	39.2	-1.75	± 10%	Jun.24,2024
D2450V2	727	2450	52.7	12.6	50.4	-4.36	± 10%	Jun.25,2024

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	78.8	7.59	75.9	-3.68	± 10%	Jun.25,2024
D5GHzV2	1023	5600	81.3	7.87	78.7	-3.20	± 10%	Jun.26,2024
D5GHzV2	1023	5750	78	7.49	74.9	-3.97	± 10%	Jun.26,2024

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4 TEST CONFIGURATIONS

4.1 Test Environment

Ambient Temperature: $22\pm 2^{\circ}$ C

Tissue Simulating Liquid: $22\pm 2^{\circ}$ C

4.2 Test Note

- **General:** Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s).
 - **General:** The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
 - **General:** During the SAR testing, the DASY system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
 - **General:** According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
 - **General:** According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
 - **LTE:** LTE modes test according to **KDB 941225D05v02r05**.
- a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
- Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
 - When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
- b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
- The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
- For QPSK with 100% RB allocation, SAR is not required when the highest

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.

- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

d. Per Section 5.2.4, Higher order modulations

- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

e. Per Section 5.3, other channel bandwidth standalone SAR test requirements

- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

- TDD LTE was tested at highest duty factor using UL-DL configuration 0 with 6 UL subframes and 2 special subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4.2, the duty factor for UL-DL configuration 0/special subframe configuration 6 using extended cyclic prefix is 0.633.

According to KDB 941225 D05, SAR testing for TDD LTE must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be tabulated as below.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

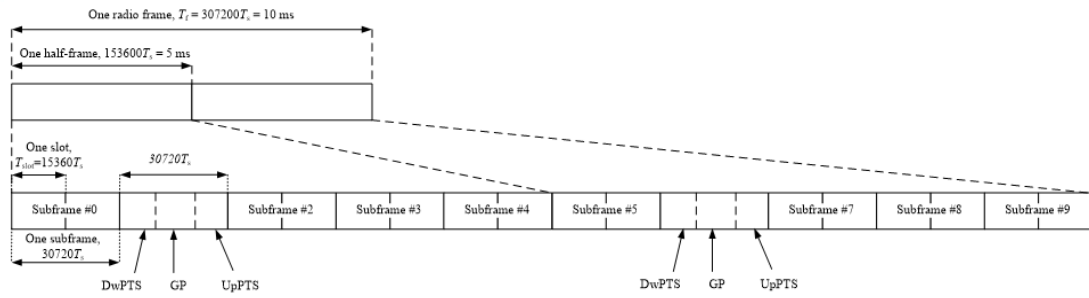


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration n	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink			
	DwPTS	UpPTS	DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number										
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D	D
2	5 ms	D	S	U	D	D	D	S	U	D	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D	D

Considering the highest transmission duty cycle, TDD LTE was tested using Uplink-Downlink configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 6 using extended cyclic prefix uplink. Therefore, SAR testing for TDD LTE was measured at the maximum output power with highest transmission duty cycle of 63.33%.

- **WLAN 2.4GHz:** 802.11b DSSS SAR Test Requirements: SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **WLAN 2.4GHz:** 802.11g/n OFDM SAR Test Exclusion Requirements: SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **WLAN 5GHz:** Initial Test Configuration: An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.

- **NFC Test exclusion:** Based on KDB447498D01v06 4.3.1 c), SAR test exclusion threshold for NFC (13.56MHz) shall be evaluated as below,

- For test separation distances ≤ 50 mm, the power threshold determined by the equation in 4.3.1 c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- The power threshold at 50mm/100 MHz in 4.3.1 b) is multiplied by $[1 + \log(100/f(\text{MHz}))]$ where f is 13.56MHz
- The power threshold in 4.3.1 b) is $[\text{Power allowed at numeric threshold for 50 mm in 4.3.1 a)} + [(\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)] \text{ mW}$, for 100 MHz to 1500 MHz where test separation distance is 50mm, frequency is 100MHz.
- Power allowed at numeric threshold for 50 mm in 4.3.1 a) is $[3/\sqrt{f(\text{GHz})}] \cdot (\text{test separation distance})$

Hence, SAR test exclusion threshold is calculated in reverse sequence:

- $[3/\sqrt{0.1}] \cdot 50 = 474.3416\text{mW}$
- $474.3416 + (50-50) \cdot (100/150) = 474.3416\text{mW}$
- $474.3416 \cdot [1 + \log(100/13.56)] = 885.9470\text{mW}$
- $885.9470 \cdot 0.5 = 442.974\text{mW}$

So the SAR test exclusion power threshold for NFC(13.56MHz) is 442.974mW (equal to 26.464dBm).

Also, the maximum power of NFC is -30.83dBm (converted from 44.33 dBuV/m at 30m) and it is far below the exclusion threshold (26.464dBm), so SAR test for NFC can be excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

• **NFC estimated SAR:** Based on KDB447498D01v06 4.3.2 b), when an antenna qualifies for the standalone SAR test exclusion of 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value must be estimated according to the following to determine the simultaneous transmission SAR test exclusion criteria:

1) $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$, for test separation distances $\leq 50 \text{ mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

Using the most conservative test separation distance 5mm, so the estimated 1g-SAR for NFC would be 0.0000025665 W/Kg.

$[0.0008265/5] \cdot [\sqrt{0.01356/7.5}] = 0.0000025665 \text{ W/Kg}$.

Using the most conservative test separation distance 5mm, so the estimated 10g-SAR for NFC would be 0.0000010266 W/Kg.

$[0.0008265/5] \cdot [\sqrt{0.01356/18.75}] = 0.0000010266 \text{ W/Kg}$.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4.3 Test position

Limb SAR test position (0 mm)

A separation distance of 0mm shall be used for limb SAR test.

Body SAR test position (5 mm)

A separation distance of 5mm is used for body SAR test.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

4.4 Test limit

[§ 2.1093\(d\)\(1\)](#)

Applications for equipment authorization of portable RF sources subject to routine environmental evaluation must contain a statement confirming compliance with the limits specified in [§ 1.1310](#) as part of their application. Technical information showing the basis for this statement must be submitted to the Commission upon request. The SAR limits specified in [§ 1.1310\(a\)](#) through [\(c\) of this chapter](#) shall be used for evaluation of portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to [§ 1.1310\(e\)\(1\)](#). A minimum separation distance applicable to the operating configurations and exposure conditions of the device shall be used for the evaluation. In general, maximum time-averaged power levels must be used for evaluation. All unlicensed personal communications service (PCS) devices and unlicensed NII devices shall be subject to the limits for general population/uncontrolled exposure.

Radiofrequency radiation exposure limits.

[§ 1.1310\(a\)](#)

Specific absorption rate (SAR) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in § 1.1307(b) within the frequency range of 100 kHz to 6 GHz (inclusive).

[§ 1.1310\(b\)](#)

The SAR limits for occupational/controlled exposure are 0.4 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 8 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit for occupational/controlled exposure is 20 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 6 minutes to determine compliance with occupational/controlled SAR limits.

[§ 1.1310\(c\)](#)

The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

Note to paragraphs (a) through (c):

SAR is a measure of the rate of energy absorption due to exposure to RF electromagnetic energy. These SAR limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized SAR in [Section 4.2](#) of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, [Section 17.4.5](#), copyright 1986 by NCRP, Bethesda, Maryland 20814. Limits for whole body SAR and peak spatial-average SAR are based

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

on recommendations made in both of these documents. The MPE limits in Table 1 are based generally on criteria published by the NCRP in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Sections 17.4.1, 17.4.1.1, 17.4.2 and 17.4.3, copyright 1986 by NCRP, Bethesda, Maryland 20814. In the frequency range from 100 MHz to 1500 MHz, these MPE exposure limits for field strength and power density are also generally based on criteria recommended by the ANSI in [Section 4.1](#) of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to [§ 1.1310\(e\)\(1\)](#).

According to ANSI/IEEE C95.1-1992, the criteria listed in the following Table shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density.

Table 1 to [§ 1.1310\(e\)\(1\)](#) - Limits for Maximum Permissible Exposure (MPE)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

5 MAXIMUM OUTPUT POWER

5.1 FDD LTE

LTE Band 2								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1860	1880	1900		
Channel				18700	18900	19100		
20	QPSK	1	0	20.83	20.70	20.76	22.50	0
		1	50	20.63	20.53	20.61	22.50	0
		1	99	20.76	20.66	20.65	22.50	0
		50	0	19.70	19.57	19.57	21.50	1
		50	25	19.60	19.62	19.61	21.50	1
		50	50	19.63	19.66	19.52	21.50	1
		100	0	19.61	19.52	19.60	21.50	1
20	16-QAM	1	0	19.61	19.66	19.56	21.50	1
		1	50	19.59	19.64	19.59	21.50	1
		1	99	19.64	19.62	19.64	21.50	1
		50	0	18.76	18.56	18.59	20.50	2
		50	25	18.71	18.55	18.68	20.50	2
		50	50	18.65	18.54	18.60	20.50	2
		100	0	18.68	18.54	18.53	20.50	2
LTE Band 2								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1857.5	1880	1902.5		
Channel				18675	18900	19125		
15	QPSK	1	0	20.71	20.53	20.60	22.50	0
		1	36	20.53	20.61	20.55	22.50	0
		1	74	20.58	20.59	20.55	22.50	0
		36	0	19.70	19.52	19.65	21.50	1
		36	18	19.67	19.56	19.52	21.50	1
		36	37	19.58	19.58	19.60	21.50	1
		75	0	19.69	19.63	19.54	21.50	1
15	16-QAM	1	0	19.58	19.50	19.55	21.50	1
		1	36	19.63	19.58	19.56	21.50	1
		1	74	19.58	19.63	19.66	21.50	1
		36	0	18.67	18.51	18.66	20.50	2
		36	18	18.69	18.51	18.66	20.50	2
		36	37	18.75	18.57	18.62	20.50	2
		75	0	18.74	18.61	18.62	20.50	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 2								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1855	1880	1905		
Channel				18650	18900	19150		
10	QPSK	1	0	20.74	20.53	20.59	22.50	0
		1	25	20.76	20.51	20.66	22.50	0
		1	49	20.60	20.50	20.55	22.50	0
		25	0	19.70	19.55	19.61	21.50	1
		25	12	19.64	19.57	19.50	21.50	1
		25	25	19.62	19.58	19.58	21.50	1
		50	0	19.60	19.51	19.56	21.50	1
10	16-QAM	1	0	19.74	19.54	19.70	21.50	1
		1	25	19.70	19.50	19.60	21.50	1
		1	49	19.74	19.55	19.63	21.50	1
		25	0	18.65	18.56	18.59	20.50	2
		25	12	18.68	18.50	18.67	20.50	2
		25	25	18.61	18.66	18.66	20.50	2
		50	0	18.70	18.62	18.51	20.50	2
LTE Band 2								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1852.5	1880	1907.5		
Channel				18625	18900	19175		
5	QPSK	1	0	20.76	20.55	20.69	22.50	0
		1	12	20.73	20.56	20.67	22.50	0
		1	24	20.55	20.65	20.67	22.50	0
		12	0	19.67	19.61	19.52	21.50	1
		12	6	19.69	19.50	19.66	21.50	1
		12	13	19.72	19.61	19.59	21.50	1
		25	0	19.76	19.57	19.60	21.50	1
5	16-QAM	1	0	19.65	19.55	19.60	21.50	1
		1	12	19.58	19.54	19.51	21.50	1
		1	24	19.68	19.54	19.73	21.50	1
		12	0	18.64	18.51	18.54	20.50	2
		12	6	18.67	18.52	18.59	20.50	2
		12	13	18.79	18.53	18.63	20.50	2
		25	0	18.59	18.54	18.62	20.50	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 2								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1851.5	1880	1908.5		
Channel				18615	18900	19185		
3	QPSK	1	0	20.75	20.64	20.57	22.50	0
		1	7	20.62	20.59	20.57	22.50	0
		1	14	20.66	20.50	20.56	22.50	0
		8	0	19.62	19.54	19.57	21.50	1
		8	4	19.65	19.66	19.55	21.50	1
		8	7	19.69	19.58	19.53	21.50	1
		15	0	19.66	19.50	19.50	21.50	1
3	16-QAM	1	0	19.61	19.62	19.62	21.50	1
		1	7	19.68	19.61	19.65	21.50	1
		1	14	19.61	19.61	19.57	21.50	1
		8	0	18.67	18.58	18.58	20.50	2
		8	4	18.73	18.56	18.65	20.50	2
		8	7	18.61	18.54	18.57	20.50	2
		15	0	18.67	18.62	18.66	20.50	2
LTE Band 2								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1850.7	1880	1909.3		
Channel				18607	18900	19193		
1.4	QPSK	1	0	20.72	20.58	20.68	22.50	0
		1	2	20.66	20.51	20.61	22.50	0
		1	5	20.57	20.65	20.61	22.50	0
		3	0	20.72	20.65	20.50	22.50	0
		3	2	20.64	20.66	20.60	22.50	0
		3	3	20.71	20.51	20.60	22.50	0
		6	0	19.65	19.58	19.65	21.50	1
1.4	16-QAM	1	0	19.65	19.51	19.67	21.50	1
		1	2	19.67	19.53	19.53	21.50	1
		1	5	19.57	19.64	19.58	21.50	1
		3	0	19.80	19.56	19.61	21.50	1
		3	2	19.61	19.55	19.71	21.50	1
		3	3	19.70	19.52	19.61	21.50	1
		6	0	18.74	18.58	18.71	20.50	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 4								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1720	1732.5	1745		
Channel				20050	20175	20300		
20	QPSK	1	0	20.68	21.02	21.08	22.50	0
		1	50	20.63	20.85	20.87	22.50	0
		1	99	20.54	20.83	20.88	22.50	0
		50	0	19.50	19.88	19.94	21.50	1
		50	25	19.54	19.79	19.90	21.50	1
		50	50	19.56	19.85	19.99	21.50	1
		100	0	19.60	19.88	19.83	21.50	1
20	16-QAM	1	0	19.54	19.73	19.99	21.50	1
		1	50	19.52	20.00	19.88	21.50	1
		1	99	19.50	19.91	19.98	21.50	1
		50	0	18.57	18.86	18.82	20.50	2
		50	25	18.60	18.86	18.99	20.50	2
		50	50	18.58	18.91	18.88	20.50	2
		100	0	18.51	18.97	19.00	20.50	2
LTE Band 4								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
Channel				20025	20175	20325		
15	QPSK	1	0	20.55	20.88	20.92	22.50	0
		1	36	20.57	20.83	21.01	22.50	0
		1	74	20.61	20.83	20.79	22.50	0
		36	0	19.52	19.93	19.90	21.50	1
		36	18	19.50	19.97	19.89	21.50	1
		36	37	19.58	19.78	19.94	21.50	1
		75	0	19.52	19.90	20.00	21.50	1
15	16-QAM	1	0	19.55	19.91	19.85	21.50	1
		1	36	19.53	19.79	19.91	21.50	1
		1	74	19.55	19.84	20.02	21.50	1
		36	0	18.64	18.89	18.90	20.50	2
		36	18	18.55	18.78	18.92	20.50	2
		36	37	18.56	18.84	18.89	20.50	2
		75	0	18.50	18.98	18.94	20.50	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 4								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1715	1732.5	1750		
Channel				20000	20175	20350		
10	QPSK	1	0	20.59	20.81	20.83	22.50	0
		1	25	20.64	20.89	20.97	22.50	0
		1	49	20.59	20.97	20.98	22.50	0
		25	0	19.50	19.93	19.96	21.50	1
		25	12	19.51	19.85	19.88	21.50	1
		25	25	19.50	19.83	19.99	21.50	1
		50	0	19.57	19.85	19.86	21.50	1
10	16-QAM	1	0	19.51	19.89	19.84	21.50	1
		1	25	19.55	19.90	19.89	21.50	1
		1	49	19.53	19.84	19.85	21.50	1
		25	0	18.52	18.88	18.90	20.50	2
		25	12	18.50	18.96	18.92	20.50	2
		25	25	18.51	18.81	18.92	20.50	2
		50	0	18.54	18.83	18.83	20.50	2
LTE Band 4								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
Channel				19975	20175	20375		
5	QPSK	1	0	20.53	20.97	20.92	22.50	0
		1	12	20.51	20.93	20.86	22.50	0
		1	24	20.56	20.78	20.89	22.50	0
		12	0	19.53	19.84	19.95	21.50	1
		12	6	19.56	19.72	19.87	21.50	1
		12	13	19.50	19.93	19.88	21.50	1
		25	0	19.61	19.85	19.92	21.50	1
5	16-QAM	1	0	19.60	19.90	19.90	21.50	1
		1	12	19.51	19.92	19.89	21.50	1
		1	24	19.61	19.80	19.91	21.50	1
		12	0	18.54	18.92	18.83	20.50	2
		12	6	18.60	18.79	18.93	20.50	2
		12	13	18.50	18.94	18.93	20.50	2
		25	0	18.65	18.85	18.96	20.50	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 4								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
Channel				19965	20175	20385		
3	QPSK	1	0	20.55	20.92	20.98	22.50	0
		1	7	20.54	20.87	21.03	22.50	0
		1	14	20.54	20.93	20.87	22.50	0
		8	0	19.51	19.78	19.96	21.50	1
		8	4	19.52	19.76	19.88	21.50	1
		8	7	19.56	19.89	19.95	21.50	1
		15	0	19.52	19.75	19.95	21.50	1
3	16-QAM	1	0	19.72	19.76	19.86	21.50	1
		1	7	19.53	19.84	19.89	21.50	1
		1	14	19.51	19.92	19.91	21.50	1
		8	0	18.58	18.89	19.01	20.50	2
		8	4	18.61	18.97	18.96	20.50	2
		8	7	18.57	18.93	18.91	20.50	2
		15	0	18.55	18.75	18.81	20.50	2
LTE Band 4								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
Channel				19957	20175	20393		
1.4	QPSK	1	0	20.52	20.76	20.94	22.50	0
		1	2	20.59	20.87	20.85	22.50	0
		1	5	20.51	20.87	20.99	22.50	0
		3	0	20.50	20.88	20.96	22.50	0
		3	2	20.63	20.88	20.90	22.50	0
		3	3	20.62	20.92	20.96	22.50	0
		6	0	19.54	19.82	19.83	21.50	1
1.4	16-QAM	1	0	19.51	19.81	19.99	21.50	1
		1	2	19.50	20.00	19.88	21.50	1
		1	5	19.60	19.91	19.98	21.50	1
		3	0	19.57	19.89	19.89	21.50	1
		3	2	19.50	19.91	19.92	21.50	1
		3	3	19.55	19.76	19.93	21.50	1
		6	0	18.57	18.93	18.90	20.50	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 5								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				829	836.5	844		
Channel				20450	20525	20600		
10	QPSK	1	0	22.80	22.58	22.66	23.00	0
		1	25	22.71	22.44	22.60	23.00	0
		1	49	22.70	22.43	22.48	23.00	0
		25	0	21.64	21.37	21.57	22.00	1
		25	12	21.59	21.35	21.50	22.00	1
		25	25	21.61	21.55	21.62	22.00	1
		50	0	21.66	21.42	21.43	22.00	1
10	16-QAM	1	0	21.71	21.50	21.48	22.00	1
		1	25	21.54	21.48	21.48	22.00	1
		1	49	21.69	21.51	21.51	22.00	1
		25	0	20.55	20.32	20.43	21.00	2
		25	12	20.53	20.45	20.49	21.00	2
		25	25	20.64	20.45	20.53	21.00	2
		50	0	20.63	20.49	20.39	21.00	2
LTE Band 5								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				826.5	836.5	846.5		
Channel				20425	20525	20625		
5	QPSK	1	0	22.76	22.34	22.52	23.00	0
		1	12	22.63	22.39	22.54	23.00	0
		1	24	22.59	22.39	22.52	23.00	0
		12	0	21.57	21.49	21.52	22.00	1
		12	6	21.67	21.49	21.55	22.00	1
		12	13	21.74	21.50	21.45	22.00	1
		25	0	21.62	21.41	21.57	22.00	1
5	16-QAM	1	0	21.74	21.40	21.41	22.00	1
		1	12	21.64	21.36	21.53	22.00	1
		1	24	21.64	21.42	21.58	22.00	1
		12	0	20.64	20.51	20.43	21.00	2
		12	6	20.63	20.53	20.46	21.00	2
		12	13	20.61	20.33	20.43	21.00	2
		25	0	20.65	20.48	20.55	21.00	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 5								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				825.5	836.5	847.5		
Channel				20415	20525	20635		
3	QPSK	1	0	22.61	22.37	22.44	23.00	0
		1	7	22.55	22.44	22.37	23.00	0
		1	14	22.58	22.34	22.53	23.00	0
		8	0	21.74	21.49	21.43	22.00	1
		8	4	21.65	21.42	21.57	22.00	1
		8	7	21.51	21.33	21.58	22.00	1
		15	0	21.63	21.51	21.59	22.00	1
3	16-QAM	1	0	21.76	21.44	21.44	22.00	1
		1	7	21.69	21.37	21.44	22.00	1
		1	14	21.61	21.50	21.62	22.00	1
		8	0	20.50	20.52	20.45	21.00	2
		8	4	20.72	20.45	20.57	21.00	2
		8	7	20.69	20.39	20.48	21.00	2
		15	0	20.54	20.32	20.53	21.00	2
LTE Band 5								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				824.7	836.5	848.3		
Channel				20407	20525	20643		
1.4	QPSK	1	0	22.61	22.32	22.47	23.00	0
		1	2	22.62	22.40	22.47	23.00	0
		1	5	22.53	22.38	22.51	23.00	0
		3	0	22.52	22.42	22.50	23.00	0
		3	2	22.67	22.38	22.42	23.00	0
		3	3	22.58	22.47	22.49	23.00	0
		6	0	21.62	21.44	21.42	22.00	1
1.4	16-QAM	1	0	21.58	21.45	21.53	22.00	1
		1	2	21.65	21.30	21.61	22.00	1
		1	5	21.78	21.41	21.51	22.00	1
		3	0	21.62	21.45	21.61	22.00	1
		3	2	21.67	21.37	21.61	22.00	1
		3	3	21.59	21.33	21.46	22.00	1
		6	0	20.75	20.33	20.43	21.00	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 12								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				704	707.5	711		
Channel				23060	23095	23130		
10	QPSK	1	0	22.92	22.17	22.78	23.00	0
		1	25	22.81	21.91	22.48	23.00	0
		1	49	22.73	21.97	22.52	23.00	0
		25	0	21.73	20.99	21.56	22.00	1
		25	12	21.86	21.06	21.63	22.00	1
		25	25	21.76	21.02	21.64	22.00	1
		50	0	21.83	20.98	21.51	22.00	1
10	16-QAM	1	0	21.76	20.97	21.72	22.00	1
		1	25	21.68	20.99	21.61	22.00	1
		1	49	21.65	21.06	21.54	22.00	1
		25	0	20.87	19.97	20.68	21.00	2
		25	12	20.71	19.93	20.62	21.00	2
		25	25	20.65	20.02	20.57	21.00	2
		50	0	20.67	20.06	20.66	21.00	2
LTE Band 12								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				701.5	707.5	713.5		
Channel				23035	23095	23155		
5	QPSK	1	0	22.72	21.99	22.63	23.00	0
		1	12	22.73	21.94	22.62	23.00	0
		1	24	22.73	21.95	22.53	23.00	0
		12	0	21.74	21.02	21.61	22.00	1
		12	6	21.84	20.89	21.58	22.00	1
		12	13	21.71	20.98	21.62	22.00	1
		25	0	21.82	20.89	21.60	22.00	1
5	16-QAM	1	0	21.79	20.98	21.60	22.00	1
		1	12	21.69	20.94	21.71	22.00	1
		1	24	21.75	20.97	21.66	22.00	1
		12	0	20.80	20.01	20.59	21.00	2
		12	6	20.64	20.02	20.56	21.00	2
		12	13	20.78	20.04	20.69	21.00	2
		25	0	20.73	20.05	20.75	21.00	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 12								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				700.5	707.5	714.5		
Channel				23025	23095	23165		
3	QPSK	1	0	22.78	22.06	22.64	23.00	0
		1	7	22.64	22.14	22.65	23.00	0
		1	14	22.70	22.04	22.65	23.00	0
		8	0	21.78	20.99	21.61	22.00	1
		8	4	21.63	21.03	21.71	22.00	1
		8	7	21.70	21.12	21.58	22.00	1
		15	0	21.83	20.90	21.56	22.00	1
3	16-QAM	1	0	21.69	20.99	21.54	22.00	1
		1	7	21.79	21.12	21.57	22.00	1
		1	14	21.69	21.04	21.64	22.00	1
		8	0	20.75	19.96	20.50	21.00	2
		8	4	20.73	20.02	20.53	21.00	2
		8	7	20.83	19.98	20.70	21.00	2
		15	0	20.82	20.02	20.63	21.00	2
LTE Band 12								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				699.7	707.5	715.3		
Channel				23017	23095	23173		
1.4	QPSK	1	0	22.77	21.95	22.62	23.00	0
		1	2	22.78	22.09	22.66	23.00	0
		1	5	22.86	22.04	22.67	23.00	0
		3	0	22.69	22.05	22.60	23.00	0
		3	2	22.70	21.88	22.64	23.00	0
		3	3	22.88	22.00	22.67	23.00	0
		6	0	21.84	21.04	21.63	22.00	1
1.4	16-QAM	1	0	21.78	21.00	21.64	22.00	1
		1	2	21.66	20.89	21.65	22.00	1
		1	5	21.88	21.11	21.58	22.00	1
		3	0	21.63	21.01	21.49	22.00	1
		3	2	21.82	21.04	21.75	22.00	1
		3	3	21.76	21.06	21.66	22.00	1
		6	0	20.74	20.02	20.52	21.00	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 13								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				782				
Channel				23230				
10	QPSK	1	0	22.36			23.00	0
		1	25	22.17			23.00	0
		1	49	22.20			23.00	0
		25	0	21.24			22.00	1
		25	12	21.09			22.00	1
		25	25	21.17			22.00	1
		50	0	21.18			22.00	1
10	16-QAM	1	0	21.19			22.00	1
		1	25	21.18			22.00	1
		1	49	21.22			22.00	1
		25	0	20.15			21.00	2
		25	12	20.14			21.00	2
		25	25	20.15			21.00	2
		50	0	20.25			21.00	2
LTE Band 13								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				779.5	782	784.5		
Channel				23205	23230	23255		
5	QPSK	1	0	22.26	22.17	22.11	23.00	0
		1	12	22.30	22.04	21.95	23.00	0
		1	24	22.18	21.97	22.03	23.00	0
		12	0	21.17	21.11	21.15	22.00	1
		12	6	21.18	21.92	21.99	22.00	1
		12	13	21.28	22.00	21.83	22.00	1
		25	0	21.14	20.92	20.94	22.00	1
5	16-QAM	1	0	21.23	20.94	20.95	22.00	1
		1	12	21.24	20.98	21.04	22.00	1
		1	24	21.33	21.08	20.89	22.00	1
		12	0	20.11	20.02	20.94	21.00	2
		12	6	20.20	20.99	20.94	21.00	2
		12	13	20.21	20.02	20.87	21.00	2
		25	0	20.14	19.92	19.87	21.00	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 66								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1720	1745	1770		
Channel				132072	132322	132572		
20	QPSK	1	0	20.35	20.41	20.22	22.00	0
		1	50	20.12	20.24	20.00	22.00	0
		1	99	20.20	20.30	20.16	22.00	0
		50	0	19.09	19.34	19.10	21.00	1
		50	25	19.23	19.25	19.07	21.00	1
		50	50	19.06	19.34	19.09	21.00	1
		100	0	19.12	19.28	19.11	21.00	1
20	16-QAM	1	0	19.23	19.17	19.04	21.00	1
		1	50	19.28	19.34	19.01	21.00	1
		1	99	19.20	19.25	19.08	21.00	1
		50	0	18.19	18.39	18.07	20.00	2
		50	25	18.15	18.35	18.11	20.00	2
		50	50	18.28	18.29	18.08	20.00	2
		100	0	18.22	18.22	18.10	20.00	2
LTE Band 66								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1717.5	1745	1772.5		
Channel				132047	132322	132597		
15	QPSK	1	0	20.28	20.30	20.03	22.00	0
		1	36	20.22	20.24	20.08	22.00	0
		1	74	20.12	20.17	20.11	22.00	0
		36	0	19.16	19.31	19.00	21.00	1
		36	18	19.18	19.30	19.07	21.00	1
		36	37	19.24	19.27	19.10	21.00	1
		75	0	19.13	19.19	19.01	21.00	1
15	16-QAM	1	0	19.17	19.29	19.11	21.00	1
		1	36	19.24	19.13	19.03	21.00	1
		1	74	19.19	19.31	19.06	21.00	1
		36	0	18.23	18.17	18.01	20.00	2
		36	18	18.18	18.25	18.02	20.00	2
		36	37	18.05	18.29	18.00	20.00	2
		75	0	18.16	18.22	18.09	20.00	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 66								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1715	1745	1775		
Channel				132022	132322	132622		
10	QPSK	1	0	20.26	20.31	20.04	22.00	0
		1	25	20.21	20.13	20.00	22.00	0
		1	49	20.14	20.33	20.10	22.00	0
		25	0	19.22	19.34	19.00	21.00	1
		25	12	19.24	19.14	19.00	21.00	1
		25	25	19.27	19.26	19.12	21.00	1
		50	0	19.11	19.16	19.15	21.00	1
10	16-QAM	1	0	19.20	19.24	19.07	21.00	1
		1	25	19.20	19.28	19.10	21.00	1
		1	49	19.20	19.24	19.09	21.00	1
		25	0	18.13	18.25	18.10	20.00	2
		25	12	18.09	18.29	18.00	20.00	2
		25	25	18.19	18.25	18.01	20.00	2
		50	0	18.13	18.24	18.17	20.00	2
LTE Band 66								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1712.5	1745	1777.5		
Channel				131997	132322	132647		
5	QPSK	1	0	20.27	20.19	20.01	22.00	0
		1	12	20.15	20.17	20.12	22.00	0
		1	24	20.15	20.26	20.03	22.00	0
		12	0	19.08	19.30	19.17	21.00	1
		12	6	19.10	19.32	19.00	21.00	1
		12	13	19.20	19.19	19.12	21.00	1
		25	0	19.29	19.15	19.00	21.00	1
5	16-QAM	1	0	19.25	19.33	19.05	21.00	1
		1	12	19.24	19.20	19.04	21.00	1
		1	24	19.27	19.26	19.00	21.00	1
		12	0	18.30	18.33	18.05	20.00	2
		12	6	18.11	18.20	18.04	20.00	2
		12	13	18.21	18.27	18.10	20.00	2
		25	0	18.23	18.27	18.00	20.00	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 66								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1711.5	1745	1778.5		
Channel				131987	132322	132657		
3	QPSK	1	0	20.19	20.16	20.14	22.00	0
		1	7	20.20	20.21	20.03	22.00	0
		1	14	20.26	20.34	20.02	22.00	0
		8	0	19.13	19.23	19.06	21.00	1
		8	4	19.17	19.16	19.04	21.00	1
		8	7	19.06	19.25	19.06	21.00	1
		15	0	19.19	19.24	19.05	21.00	1
3	16-QAM	1	0	19.26	19.36	19.07	21.00	1
		1	7	19.23	19.11	19.00	21.00	1
		1	14	19.14	19.23	19.09	21.00	1
		8	0	18.14	18.16	18.01	20.00	2
		8	4	18.23	18.21	18.00	20.00	2
		8	7	18.21	18.24	18.11	20.00	2
		15	0	18.18	18.23	18.06	20.00	2
LTE Band 66								
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1710.7	1745	1779.3		
Channel				131979	132322	132665		
1.4	QPSK	1	0	20.30	20.22	20.04	22.00	0
		1	2	20.12	20.35	20.10	22.00	0
		1	5	20.19	20.24	20.03	22.00	0
		3	0	20.23	20.26	20.05	22.00	0
		3	2	20.23	20.28	20.00	22.00	0
		3	3	20.20	20.32	20.07	22.00	0
		6	0	19.18	19.15	19.09	21.00	1
1.4	16-QAM	1	0	19.24	19.23	19.07	21.00	1
		1	2	19.19	19.30	19.08	21.00	1
		1	5	19.24	19.31	19.17	21.00	1
		3	0	19.09	19.35	19.09	21.00	1
		3	2	19.24	19.17	19.13	21.00	1
		3	3	19.18	19.14	19.03	21.00	1
		6	0	18.16	18.34	18.10	20.00	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

5.2 WLAN

Ant 1						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45GHz	802.11b	1	2412	1Mbps	8.00	7.72
		6	2437		6.50	6.15
		11	2462		9.50	9.16
	802.11g	1	2412	6Mbps	10.50	10.26
		6	2437		10.50	10.43
		11	2462		11.50	11.48
	802.11n20-HT0	1	2412	MCS0	11.00	10.54
		6	2437		10.50	10.40
		11	2462		11.50	11.32
	802.11n40-HT0	3	2422	MCS0	11.00	10.94
		6	2437		14.00	13.57
		9	2452		13.00	12.87

Ant 1						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	15.50	15.15
		44	5220		15.50	15.21
		48	5240		15.50	15.18
	802.11n20-HT0	36	5180	MCS0	14.50	14.14
		44	5220		14.50	14.11
		48	5240		14.50	14.14
	802.11ac20-VHT0	36	5180	MCS0	14.50	14.16
		44	5220		14.50	14.15
		48	5240		14.50	14.11
	802.11n40-HT0	38	5190	MCS0	14.50	14.18
		46	5230		14.50	14.13
	802.11ac40-VHT0	38	5190	MCS0	14.50	14.07
		46	5230		14.50	14.05
	802.11ac80-VHT0	42	5210	MCS0	12.50	12.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Ant 1						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	14.00	13.88
		60	5300		14.00	13.91
		64	5320		14.00	13.97
	802.11n20-HT0	52	5260	MCS0	14.00	13.91
		60	5300		14.00	13.84
		64	5320		14.00	13.89
	802.11ac20-VHT0	52	5260	MCS0	14.00	13.92
		60	5300		14.00	13.82
		64	5320		14.00	13.88
	802.11n40-HT0	54	5270	MCS0	14.00	13.87
		62	5310		14.00	13.90
	802.11ac40-VHT0	54	5270	MCS0	14.00	13.86
		62	5310		14.00	13.93
	802.11ac80-VHT0	58	5290	MCS0	12.50	12.44

Ant 1						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6GHz	802.11a	100	5500	6Mbps	13.50	13.04
		140	5700		13.50	13.15
		144	5720		13.50	13.09
	802.11n20-HT0	100	5500	MCS0	13.50	13.12
		140	5700		13.50	13.08
		144	5720		13.50	13.05
	802.11ac20-VHT0	100	5500	MCS0	13.50	13.05
		140	5700		13.50	13.08
		144	5720		13.50	13.07
	802.11n40-HT0	102	5510	MCS0	13.50	13.02
		134	5670		13.50	13.08
		142	5710		13.50	13.11
	802.11ac40-VHT0	102	5510	MCS0	13.50	13.03
		134	5670		13.50	13.06
		142	5710		13.50	13.05
	802.11ac80-VHT0	106	5530	MCS0	12.50	12.11
		122	5610		12.50	12.12
		138	5690		12.50	12.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Ant 1						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8GHz	802.11a	149	5745	6Mbps	14.50	14.42
		157	5785		14.50	14.35
		165	5825		14.50	14.30
	802.11n20-HT0	149	5745	MCS0	14.50	14.35
		157	5785		14.50	14.36
		165	5825		14.50	14.39
	802.11ac20-VHT0	149	5745	MCS0	14.50	14.38
		157	5785		14.50	14.32
		165	5825		14.50	14.34
	802.11n40-HT0	151	5755	MCS0	14.50	14.35
		159	5795		14.50	14.41
	802.11ac40-VHT0	151	5755	MCS0	14.50	14.36
		159	5795		14.50	14.29
	802.11ac80-VHT0	155	5775	MCS0	12.50	12.41

5.3 Bluetooth

Mode	Channel	Frequency (MHz)	1Mbps		2Mbps		3Mbps	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
BR/EDR	CH 00	2402	5.99	5.58	4.00	3.66	4.00	3.91
	CH 39	2441	6.53	5.49	4.00	3.64	4.00	3.81
	CH 78	2480	6.62	5.23	4.00	3.32	4.00	3.33

5.4 BLE


Mode	Channel	Frequency (MHz)	GFSK	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average Output Power (dBm)
BLE_1M	CH 00	2402	0	-0.87
	CH20	2442		-1.32
	CH 39	2480		-1.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6 DUTY CYCLE

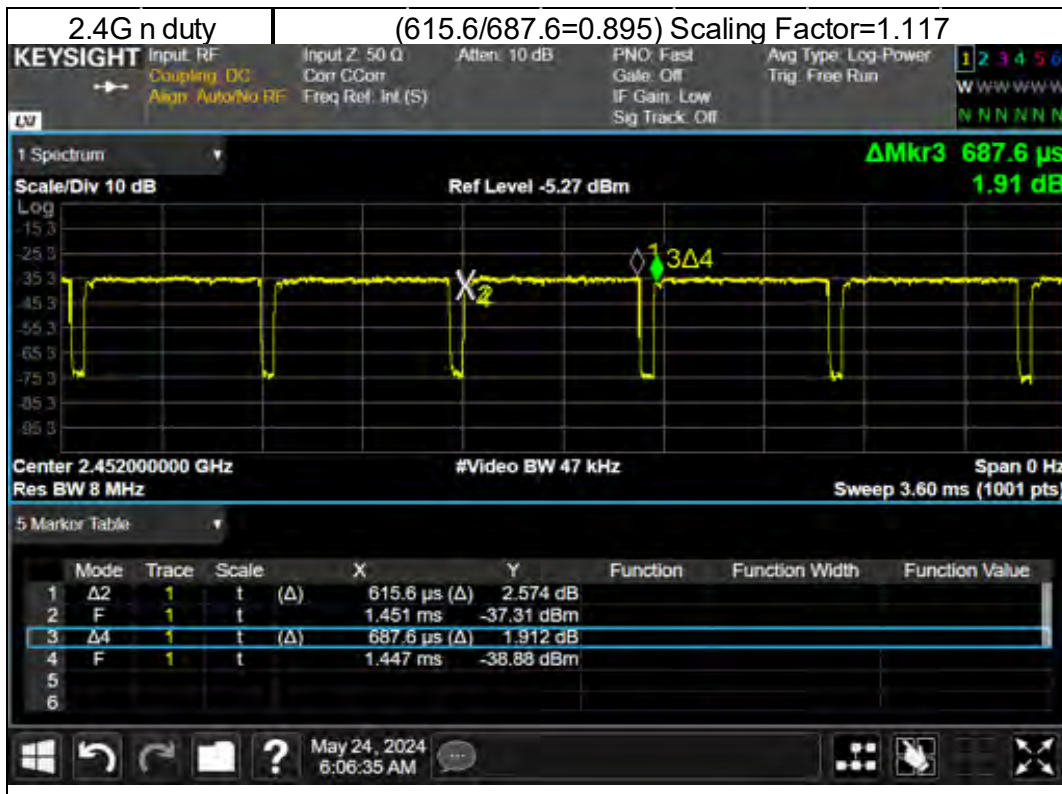

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

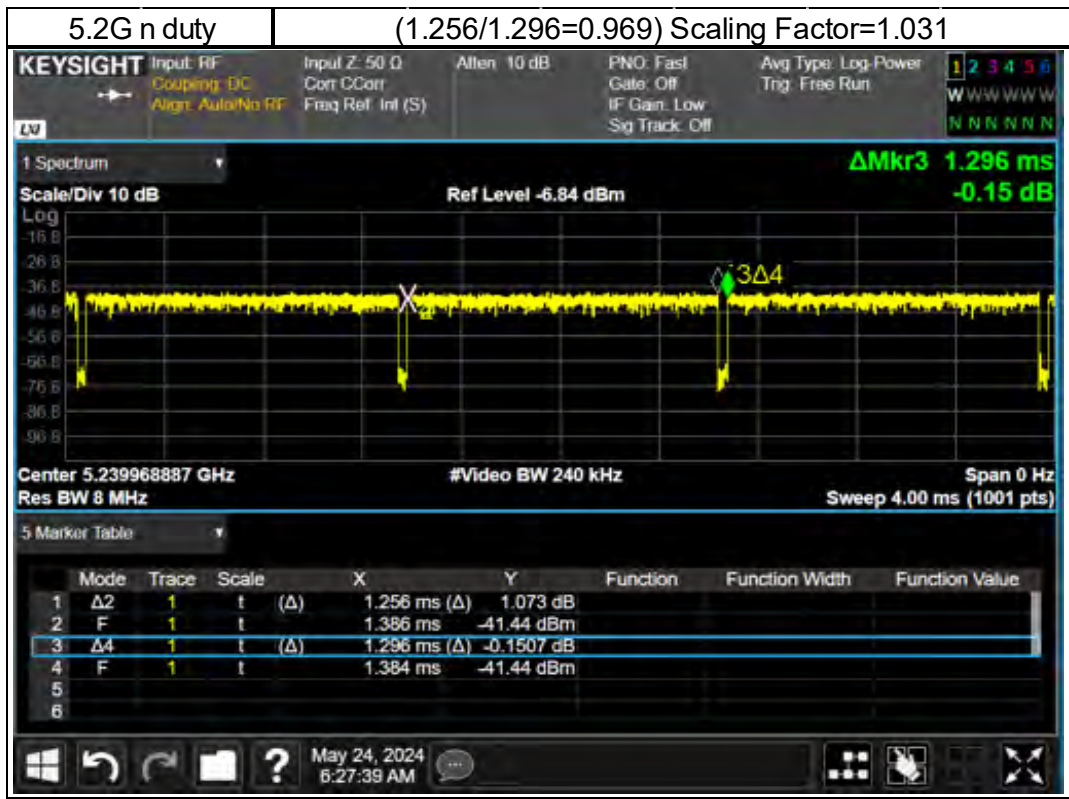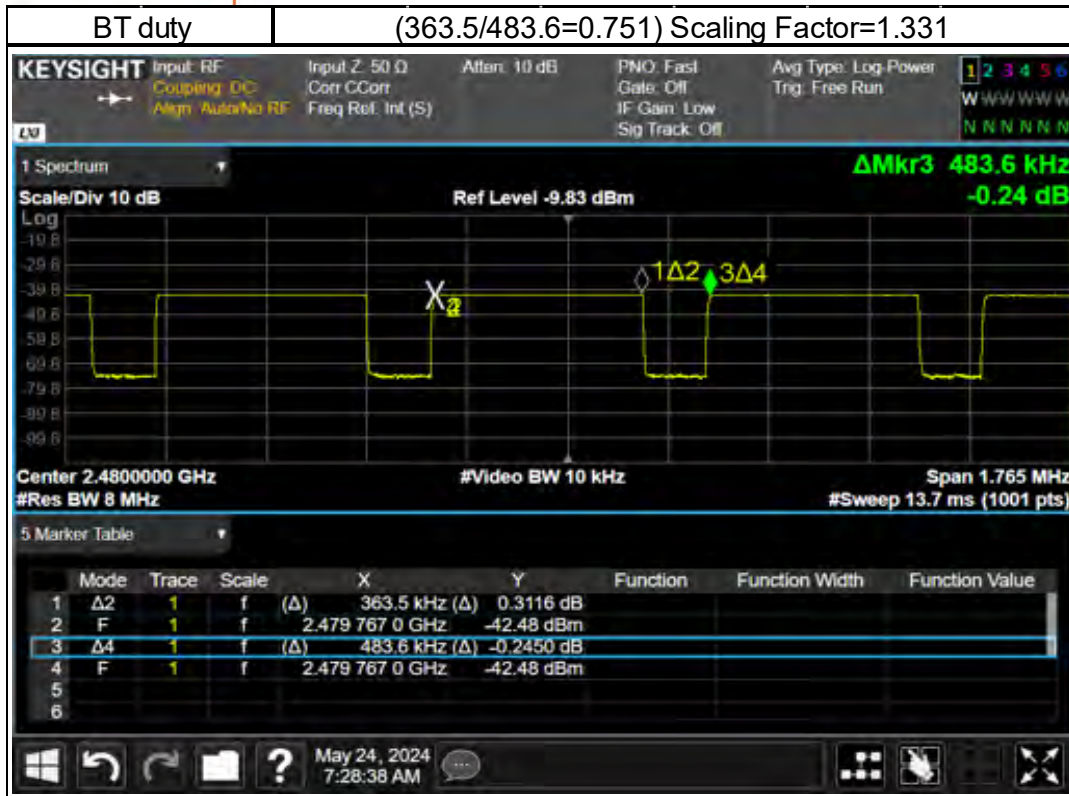

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

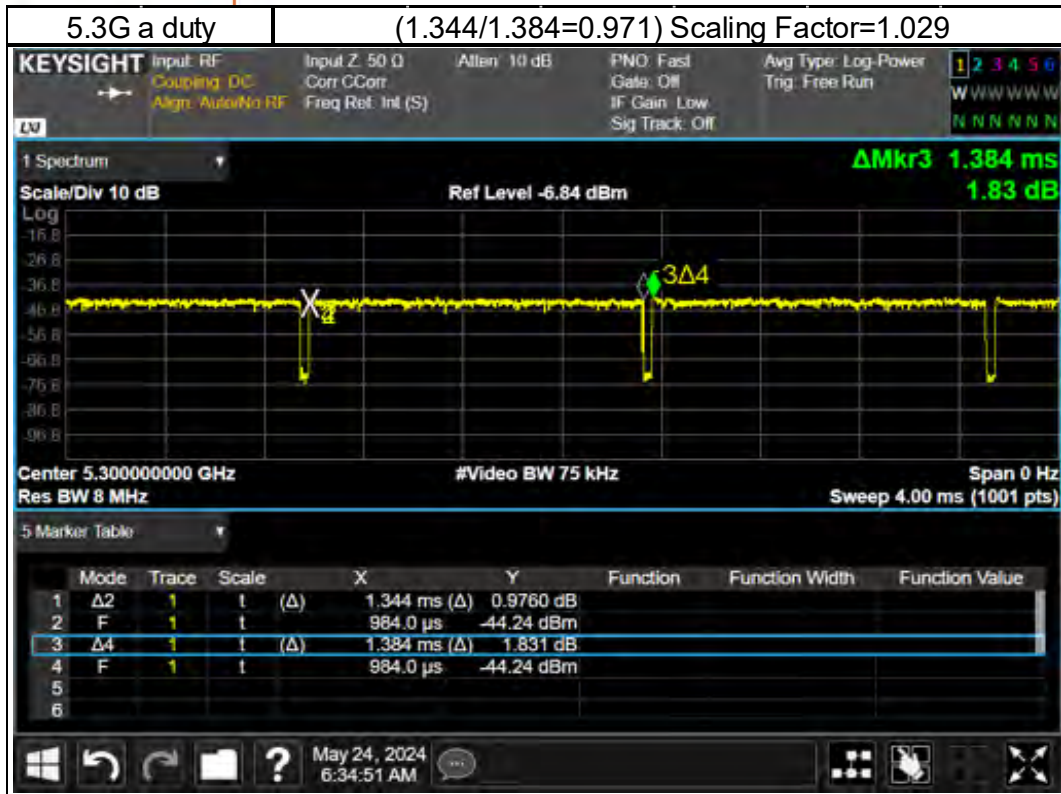

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

7 SUMMARY OF RESULTS

7.1 Decision rules

Reported measurement data comply with Test Methodology in section 1.1.

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

7.2 Summary of SAR Results

Limb WWAN

Band	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 10g (W/kg)		ID		
												Measured	Reported			
LTE Band 2	20MHz	QPSK	1	0	Front Surface	0	18700	1860	22.50	20.83	146.89%	0.223	0.328	-		
LTE Band 2			50	0	Front Surface	0	18700	1860	21.50	19.70	151.36%	0.104	0.157	-		
LTE Band 2			100RB	Front Surface	0	18700	1860	21.50	19.61	154.53%	0.099	0.153	-			
LTE Band 2			1	0	Back Surface	0	18700	1860	22.50	20.83	146.89%	0.679	0.997	-		
LTE Band 2			50	0	Back Surface	0	18700	1860	21.50	19.70	151.36%	0.282	0.427	-		
LTE Band 2			100RB	Back Surface	0	18700	1860	21.50	19.61	154.53%	0.270	0.417	-			
LTE Band 2			1	0	Top Edge	0	18700	1860	22.50	20.83	146.89%	0.721	1.059	-		
LTE Band 2			50	0	Top Edge	0	18700	1860	21.50	19.70	151.36%	0.429	0.649	-		
LTE Band 2			100RB	Top Edge	0	18700	1860	21.50	19.61	154.53%	0.411	0.635	-			
LTE Band 2			1	0	Bottom Edge	0	18700	1860	22.50	20.83	146.89%	0.107	0.157	-		
LTE Band 2			50	0	Bottom Edge	0	18700	1860	21.50	19.70	151.36%	0.072	0.109	-		
LTE Band 2			100RB	Bottom Edge	0	18700	1860	21.50	19.61	154.53%	0.063	0.097	-			
LTE Band 2			1	0	Left Edge	0	18700	1860	22.50	20.83	146.89%	0.802	1.178	008		
LTE Band 2			1	0	Left Edge	0	18900	1880	22.50	20.70	151.36%	0.693	1.049	-		
LTE Band 2			1	0	Left Edge	0	19100	1900	22.50	20.76	149.28%	0.585	0.873	-		
LTE Band 2			50	0	Left Edge	0	18700	1860	21.50	19.70	151.36%	0.512	0.775	-		
LTE Band 2			100RB	Left Edge	0	18700	1860	21.50	19.61	154.53%	0.482	0.745	-			
LTE Band 2			1	0	Right Edge	0	18700	1860	22.50	20.83	146.89%	0.208	0.306	-		
LTE Band 2			50	0	Right Edge	0	18700	1860	21.50	19.70	151.36%	0.111	0.168	-		
LTE Band 2			100RB	Right Edge	0	18700	1860	21.50	19.61	154.53%	0.104	0.161	-			
LTE Band 4			20MHz	QPSK	1	0	Front Surface	0	20300	1745	22.50	21.08	138.68%	0.124	0.172	-
LTE Band 4					50	50	Front Surface	0	20300	1745	21.50	19.99	141.58%	0.062	0.088	-
LTE Band 4					100RB	Front Surface	0	20175	1732.5	21.50	19.88	145.21%	0.059	0.086	-	
LTE Band 4					1	0	Back Surface	0	20300	1745	22.50	21.08	138.68%	0.366	0.508	-
LTE Band 4	50	50			Back Surface	0	20300	1745	21.50	19.99	141.58%	0.194	0.275	-		
LTE Band 4	100RB	Back Surface			0	20175	1732.5	21.50	19.88	145.21%	0.201	0.292	-			
LTE Band 4	1	0			Top Edge	0	20300	1745	22.50	21.08	138.68%	0.384	0.533	-		
LTE Band 4	50	50			Top Edge	0	20300	1745	21.50	19.99	141.58%	0.191	0.270	-		
LTE Band 4	100RB	Top Edge			0	20175	1732.5	21.50	19.88	145.21%	0.196	0.285	-			
LTE Band 4	1	0			Bottom Edge	0	20300	1745	22.50	21.08	138.68%	0.068	0.094	-		
LTE Band 4	50	50			Bottom Edge	0	20300	1745	21.50	19.99	141.58%	0.039	0.055	-		
LTE Band 4	100RB	Bottom Edge			0	20175	1732.5	21.50	19.88	145.21%	0.032	0.046	-			
LTE Band 4	1	0			Left Edge	0	20050	1720	22.50	20.68	152.05%	0.429	0.652	-		
LTE Band 4	1	0			Left Edge	0	20175	1732.5	22.50	21.02	140.60%	0.475	0.668	-		
LTE Band 4	1	0			Left Edge	0	20300	1745	22.50	21.08	138.68%	0.496	0.688	009		
LTE Band 4	50	50			Left Edge	0	20300	1745	21.50	19.99	141.58%	0.339	0.480	-		
LTE Band 4	100RB	Left Edge			0	20175	1732.5	21.50	19.88	145.21%	0.288	0.418	-			
LTE Band 4	1	0			Right Edge	0	20300	1745	22.50	21.08	138.68%	0.111	0.154	-		
LTE Band 4	50	50			Right Edge	0	20300	1745	21.50	19.99	141.58%	0.058	0.082	-		
LTE Band 4	100RB	Right Edge			0	20175	1732.5	21.50	19.88	145.21%	0.062	0.090	-			
LTE Band 5	10MHz	QPSK			1	0	Front Surface	0	20450	829	23.00	22.80	104.71%	0.126	0.132	-
LTE Band 5					25	0	Front Surface	0	20450	829	22.00	21.64	108.64%	0.073	0.079	-
LTE Band 5					50RB	Front Surface	0	20450	829	22.00	21.66	108.14%	0.075	0.081	-	
LTE Band 5					1	0	Back Surface	0	20450	829	23.00	22.80	104.71%	0.507	0.531	-
LTE Band 5			1	0	Back Surface	0	20525	836.5	23.00	22.58	110.15%	0.489	0.539	-		
LTE Band 5			1	0	Back Surface	0	20600	844	23.00	22.66	108.14%	0.522	0.565	010		
LTE Band 5			25	0	Back Surface	0	20450	829	22.00	21.64	108.64%	0.342	0.372	-		
LTE Band 5			50RB	Back Surface	0	20450	829	22.00	21.66	108.14%	0.336	0.363	-			
LTE Band 5			1	0	Top Edge	0	20450	829	23.00	22.80	104.71%	0.473	0.495	-		
LTE Band 5			25	0	Top Edge	0	20450	829	22.00	21.64	108.64%	0.294	0.319	-		
LTE Band 5			50RB	Top Edge	0	20450	829	22.00	21.66	108.14%	0.300	0.324	-			
LTE Band 5			1	0	Bottom Edge	0	20450	829	23.00	22.80	104.71%	0.024	0.025	-		
LTE Band 5			25	0	Bottom Edge	0	20450	829	22.00	21.64	108.64%	0.014	0.015	-		
LTE Band 5			50RB	Bottom Edge	0	20450	829	22.00	21.66	108.14%	0.016	0.017	-			
LTE Band 5			1	0	Left Edge	0	20450	829	23.00	22.80	104.71%	0.459	0.481	-		
LTE Band 5			25	0	Left Edge	0	20450	829	22.00	21.64	108.64%	0.310	0.337	-		
LTE Band 5			50RB	Left Edge	0	20450	829	22.00	21.66	108.14%	0.317	0.343	-			
LTE Band 5			1	0	Right Edge	0	20450	829	23.00	22.80	104.71%	0.117	0.123	-		
LTE Band 5			25	0	Right Edge	0	20450	829	22.00	21.64	108.64%	0.082	0.089	-		
LTE Band 5			50RB	Right Edge	0	20450	829	22.00	21.66	108.14%	0.088	0.095	-			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Band	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 10g (W/kg)		ID		
												Measured	Reported			
LTE Band 12	10MHz	QPSK	1	0	Front Surface	0	23060	704	23.00	22.92	101.86%	0.155	0.158	-		
LTE Band 12			25	12	Front Surface	0	23060	704	22.00	21.86	103.28%	0.110	0.114	-		
LTE Band 12			50RB	Front Surface	0	23060	704	22.00	21.83	103.99%	0.104	0.108	-			
LTE Band 12			1	0	Back Surface	0	23060	704	23.00	22.92	101.86%	0.691	0.704	011		
LTE Band 12			1	0	Back Surface	0	23095	707.5	23.00	22.17	121.06%	0.563	0.682	-		
LTE Band 12			1	0	Back Surface	0	23130	711	23.00	22.78	105.20%	0.621	0.653	-		
LTE Band 12			25	25	Back Surface	0	23060	704	22.00	21.86	103.28%	0.544	0.562	-		
LTE Band 12			50RB	Back Surface	0	23060	704	22.00	21.83	103.99%	0.549	0.571	-			
LTE Band 12			1	0	Top Edge	0	23060	704	23.00	22.92	101.86%	0.482	0.491	-		
LTE Band 12			25	25	Top Edge	0	23060	704	22.00	21.86	103.28%	0.350	0.361	-		
LTE Band 12			50RB	Top Edge	0	23060	704	22.00	21.83	103.99%	0.338	0.351	-			
LTE Band 12			1	0	Bottom Edge	0	23060	704	23.00	22.92	101.86%	0.028	0.029	-		
LTE Band 12			25	25	Bottom Edge	0	23060	704	22.00	21.86	103.28%	0.021	0.022	-		
LTE Band 12			50RB	Bottom Edge	0	23060	704	22.00	21.83	103.99%	0.018	0.019	-			
LTE Band 12			1	0	Left Edge	0	23060	704	23.00	22.92	101.86%	0.459	0.468	-		
LTE Band 12			25	25	Left Edge	0	23060	704	22.00	21.86	103.28%	0.339	0.350	-		
LTE Band 12			50RB	Left Edge	0	23060	704	22.00	21.83	103.99%	0.326	0.339	-			
LTE Band 12			1	0	Right Edge	0	23060	704	23.00	22.92	101.86%	0.120	0.122	-		
LTE Band 12			25	25	Right Edge	0	23060	704	22.00	21.86	103.28%	0.092	0.095	-		
LTE Band 12			50RB	Right Edge	0	23060	704	22.00	21.83	103.99%	0.088	0.092	-			
LTE Band 13	10MHz	QPSK	1	0	Front Surface	0	23230	782	23.00	22.36	115.88%	0.103	0.119	-		
LTE Band 13			25	0	Front Surface	0	23230	782	22.00	21.24	119.12%	0.073	0.087	-		
LTE Band 13			50RB	Front Surface	0	23230	782	22.00	21.18	120.78%	0.069	0.083	-			
LTE Band 13			1	0	Back Surface	0	23230	782	23.00	22.36	115.88%	0.362	0.419	012		
LTE Band 13			25	0	Back Surface	0	23230	782	22.00	21.24	119.12%	0.262	0.312	-		
LTE Band 13			50RB	Back Surface	0	23230	782	22.00	21.18	120.78%	0.235	0.284	-			
LTE Band 13			1	0	Top Edge	0	23230	782	23.00	22.36	115.88%	0.353	0.409	-		
LTE Band 13			25	0	Top Edge	0	23230	782	22.00	21.24	119.12%	0.242	0.288	-		
LTE Band 13			50RB	Top Edge	0	23230	782	22.00	21.18	120.78%	0.231	0.279	-			
LTE Band 13			1	0	Bottom Edge	0	23230	782	23.00	22.36	115.88%	0.011	0.013	-		
LTE Band 13			25	0	Bottom Edge	0	23230	782	22.00	21.24	119.12%	0.005	0.006	-		
LTE Band 13			50RB	Bottom Edge	0	23230	782	22.00	21.18	120.78%	0.004	0.005	-			
LTE Band 13			1	0	Left Edge	0	23230	782	23.00	22.36	115.88%	0.329	0.381	-		
LTE Band 13			25	0	Left Edge	0	23230	782	22.00	21.24	119.12%	0.210	0.250	-		
LTE Band 13			50RB	Left Edge	0	23230	782	22.00	21.18	120.78%	0.203	0.245	-			
LTE Band 13			1	0	Right Edge	0	23230	782	23.00	22.36	115.88%	0.087	0.101	-		
LTE Band 13			25	0	Right Edge	0	23230	782	22.00	21.24	119.12%	0.054	0.064	-		
LTE Band 13			50RB	Right Edge	0	23230	782	22.00	21.18	120.78%	0.049	0.059	-			
LTE Band 66			20MHz	QPSK	1	0	Front Surface	0	132322	1745	22.00	20.41	144.21%	0.192	0.277	-
LTE Band 66					50	0	Front Surface	0	132322	1745	21.00	19.34	146.55%	0.104	0.152	-
LTE Band 66	100RB	Front Surface			0	132322	1745	21.00	19.28	148.59%	0.094	0.140	-			
LTE Band 66	1	0			Back Surface	0	132322	1745	22.00	20.41	144.21%	0.597	0.861	-		
LTE Band 66	50	0			Back Surface	0	132322	1745	21.00	19.34	146.55%	0.328	0.481	-		
LTE Band 66	100RB	Back Surface			0	132322	1745	21.00	19.28	148.59%	0.317	0.471	-			
LTE Band 66	1	0			Top Edge	0	132322	1745	22.00	20.41	144.21%	0.619	0.893	-		
LTE Band 66	50	0			Top Edge	0	132322	1745	21.00	19.34	146.55%	0.314	0.460	-		
LTE Band 66	100RB	Top Edge			0	132322	1745	21.00	19.28	148.59%	0.301	0.447	-			
LTE Band 66	1	0			Bottom Edge	0	132322	1745	22.00	20.41	144.21%	0.071	0.102	-		
LTE Band 66	50	0			Bottom Edge	0	132322	1745	21.00	19.34	146.55%	0.038	0.056	-		
LTE Band 66	100RB	Bottom Edge			0	132322	1745	21.00	19.28	148.59%	0.032	0.048	-			
LTE Band 66	1	0			Left Edge	0	132072	1720	22.00	20.35	146.22%	0.535	0.782	-		
LTE Band 66	1	0			Left Edge	0	132322	1745	22.00	20.41	144.21%	0.686	0.989	-		
LTE Band 66	1	0			Left Edge	0	132572	1770	22.00	20.22	150.66%	0.746	1.124	013		
LTE Band 66	50	0			Left Edge	0	132322	1745	21.00	19.34	146.55%	0.533	0.781	-		
LTE Band 66	100RB	Left Edge			0	132322	1745	21.00	19.28	148.59%	0.516	0.767	-			
LTE Band 66	1	0			Right Edge	0	132322	1745	22.00	20.41	144.21%	0.169	0.244	-		
LTE Band 66	50	0			Right Edge	0	132322	1745	21.00	19.34	146.55%	0.098	0.144	-		
LTE Band 66	100RB	Right Edge			0	132322	1745	21.00	19.28	148.59%	0.091	0.135	-			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 10g (W/kg)		ID
										Measured	Reported	
WLAN 802.11b	Ant 1	Front Surface	0	11	2462	9.50	9.16	1.03	108.14%	0.011	0.012	-
WLAN 802.11b	Ant 1	Back Surface	0	11	2462	9.50	9.16	1.03	108.14%	0.035	0.039	-
WLAN 802.11b	Ant 1	Top Edge	0	1	2412	8.00	7.72	1.03	106.66%	0.063	0.069	-
WLAN 802.11b	Ant 1	Top Edge	0	6	2437	6.50	6.15	1.03	108.39%	0.049	0.055	-
WLAN 802.11b	Ant 1	Top Edge	0	11	2462	9.50	9.16	1.03	108.14%	0.076	0.084	001
WLAN 802.11b	Ant 1	Bottom Edge	0	11	2462	9.50	9.16	1.03	108.14%	0.005	0.006	-
WLAN 802.11b	Ant 1	Left Edge	0	11	2462	9.50	9.16	1.03	108.14%	0.008	0.009	-
WLAN 802.11b	Ant 1	Right Edge	0	11	2462	9.50	9.16	1.03	108.14%	0.018	0.020	-
WLAN 802.11n(40M) 2.4G	Ant 1	Front Surface	0	6	2437	14.00	13.57	1.03	110.41%	0.025	0.028	-
WLAN 802.11n(40M) 2.4G	Ant 1	Back Surface	0	6	2437	14.00	13.57	1.03	110.41%	0.083	0.094	-
WLAN 802.11n(40M) 2.4G	Ant 1	Top Edge	0	3	2422	11.00	10.94	1.03	101.39%	0.115	0.120	-
WLAN 802.11n(40M) 2.4G	Ant 1	Top Edge	0	6	2437	14.00	13.57	1.03	110.41%	0.139	0.158	-
WLAN 802.11n(40M) 2.4G	Ant 1	Top Edge	0	9	2452	13.00	12.87	1.03	103.04%	0.161	0.171	002
WLAN 802.11n(40M) 2.4G	Ant 1	Bottom Edge	0	6	2437	14.00	13.57	1.03	110.41%	0.004	0.005	-
WLAN 802.11n(40M) 2.4G	Ant 1	Left Edge	0	6	2437	14.00	13.57	1.03	110.41%	0.013	0.015	-
WLAN 802.11n(40M) 2.4G	Ant 1	Right Edge	0	6	2437	14.00	13.57	1.03	110.41%	0.044	0.050	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 10g (W/kg)		ID
										Measured	Reported	
Bluetooth(GFSK)	Ant 1	Front Surface	0	00	2402	5.99	5.58	1.33	109.80%	0.005	0.007	-
Bluetooth(GFSK)	Ant 1	Back Surface	0	00	2402	5.99	5.58	1.33	109.80%	0.011	0.016	-
Bluetooth(GFSK)	Ant 1	Top Edge	0	00	2402	5.99	5.58	1.33	109.80%	0.023	0.033	-
Bluetooth(GFSK)	Ant 1	Top Edge	0	39	2441	6.53	5.49	1.33	126.95%	0.025	0.042	-
Bluetooth(GFSK)	Ant 1	Top Edge	0	78	2480	6.62	5.23	1.33	137.60%	0.028	0.051	003
Bluetooth(GFSK)	Ant 1	Bottom Edge	0	00	2402	5.99	5.58	1.33	109.80%	0.001	0.001	-
Bluetooth(GFSK)	Ant 1	Left Edge	0	00	2402	5.99	5.58	1.33	109.80%	0.003	0.004	-
Bluetooth(GFSK)	Ant 1	Right Edge	0	00	2402	5.99	5.58	1.33	109.80%	0.006	0.009	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 10g (W/kg)		ID
										Measured	Reported	
WLAN 802.11a 5.2G	Ant 1	Front Surface	0	36	5180	15.50	15.15	1.03	108.39%	0.172	0.192	-
WLAN 802.11a 5.2G	Ant 1	Back Surface	0	36	5180	15.50	15.15	1.03	108.39%	0.894	0.997	-
WLAN 802.11a 5.2G	Ant 1	Back Surface	0	44	5220	15.50	15.21	1.03	106.91%	1.020	1.122	-
WLAN 802.11a 5.2G	Ant 1	Back Surface	0	48	5240	15.50	15.18	1.03	107.65%	1.120	1.241	004
WLAN 802.11a 5.2G	Ant 1	Top Edge	0	36	5180	15.50	15.15	1.03	108.39%	0.581	0.648	-
WLAN 802.11a 5.2G	Ant 1	Bottom Edge	0	36	5180	15.50	15.15	1.03	108.39%	0.012	0.013	-
WLAN 802.11a 5.2G	Ant 1	Left Edge	0	36	5180	15.50	15.15	1.03	108.39%	0.140	0.156	-
WLAN 802.11a 5.2G	Ant 1	Right Edge	0	36	5180	15.50	15.15	1.03	108.39%	0.281	0.313	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 10g (W/kg)		ID
										Measured	Reported	
WLAN 802.11a 5.3G	Ant 1	Front Surface	0	60	5300	14.00	13.91	1.03	102.09%	0.226	0.237	-
WLAN 802.11a 5.3G	Ant 1	Back Surface	0	52	5260	14.00	13.88	1.03	102.80%	1.380	1.460	-
WLAN 802.11a 5.3G	Ant 1	Back Surface	0	60	5300	14.00	13.91	1.03	102.09%	1.410	1.481	005
WLAN 802.11a 5.3G	Ant 1	Back Surface	0	64	5320	14.00	13.97	1.03	100.69%	1.340	1.388	-
WLAN 802.11a 5.3G	Ant 1	Top Edge	0	60	5300	14.00	13.91	1.03	102.09%	0.984	1.034	-
WLAN 802.11a 5.3G	Ant 1	Bottom Edge	0	60	5300	14.00	13.91	1.03	102.09%	0.016	0.017	-
WLAN 802.11a 5.3G	Ant 1	Left Edge	0	60	5300	14.00	13.91	1.03	102.09%	0.023	0.024	-
WLAN 802.11a 5.3G	Ant 1	Right Edge	0	60	5300	14.00	13.91	1.03	102.09%	0.507	0.533	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 10g (W/kg)		ID
										Measured	Reported	
WLAN 802.11a 5.6G	Ant 1	Front Surface	0	144	5720	13.50	13.09	1.03	109.90%	0.339	0.383	-
WLAN 802.11a 5.6G	Ant 1	Back Surface	0	100	5600	13.50	13.04	1.03	111.17%	2.230	2.551	-
WLAN 802.11a 5.6G	Ant 1	Back Surface	0	140	5700	13.50	13.15	1.03	108.39%	2.310	2.576	006
WLAN 802.11a 5.6G	Ant 1	Back Surface	0	144	5720	13.50	13.09	1.03	109.90%	2.180	2.465	-
WLAN 802.11a 5.6G	Ant 1	Top Edge	0	144	5720	13.50	13.09	1.03	109.90%	1.470	1.662	-
WLAN 802.11a 5.6G	Ant 1	Bottom Edge	0	144	5720	13.50	13.09	1.03	109.90%	0.106	0.120	-
WLAN 802.11a 5.6G	Ant 1	Left Edge	0	144	5720	13.50	13.09	1.03	109.90%	0.133	0.150	-
WLAN 802.11a 5.6G	Ant 1	Right Edge	0	144	5720	13.50	13.09	1.03	109.90%	0.742	0.839	-
WLAN 802.11a 5.6G	Ant 1	Back Surface	0	140	5700	13.50	13.15	1.03	108.39%	2.270	2.532	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 10g (W/kg)		ID
										Measured	Reported	
WLAN 802.11a 5.8G	Ant 1	Front Surface	0	149	5745	14.50	14.42	1.03	101.86%	0.291	0.305	-
WLAN 802.11a 5.8G	Ant 1	Back Surface	0	149	5745	14.50	14.42	1.03	101.86%	2.060	2.159	-
WLAN 802.11a 5.8G	Ant 1	Back Surface	0	157	5785	14.50	14.35	1.03	103.51%	1.950	2.077	-
WLAN 802.11a 5.8G	Ant 1	Back Surface	0	165	5825	14.50	14.30	1.03	104.71%	2.170	2.338	007
WLAN 802.11a 5.8G	Ant 1	Top Edge	0	149	5745	14.50	14.42	1.03	101.86%	1.220	1.279	-
WLAN 802.11a 5.8G	Ant 1	Bottom Edge	0	149	5745	14.50	14.42	1.03	101.86%	0.077	0.081	-
WLAN 802.11a 5.8G	Ant 1	Left Edge	0	149	5745	14.50	14.42	1.03	101.86%	0.094	0.099	-
WLAN 802.11a 5.8G	Ant 1	Right Edge	0	149	5745	14.50	14.42	1.03	101.86%	0.623	0.653	-
WLAN 802.11a 5.8G	Ant 1	Back Surface	0	165	5825	14.50	14.30	1.03	104.71%	2.150	2.317	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Body
WWAN

Band	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		ID
												Measured	Reported	
LTE Band 2	20MHz	QPSK	1	0	Front Surface	5	18700	1860	22.50	20.83	146.89%	0.127	0.187	-
LTE Band 2			50	0	Front Surface	5	18700	1860	21.50	19.70	151.36%	0.095	0.144	-
LTE Band 2			100RB	Front Surface	5	18700	1860	21.50	19.61	154.53%	0.089	0.138	-	
LTE Band 2			1	0	Back Surface	5	18700	1860	22.50	20.83	146.89%	0.524	0.770	-
LTE Band 2			50	0	Back Surface	5	18700	1860	21.50	19.70	151.36%	0.408	0.618	-
LTE Band 2			100RB	Back Surface	5	18700	1860	21.50	19.61	154.53%	0.393	0.607	-	
LTE Band 2			1	0	Top Edge	5	18700	1860	22.50	20.83	146.89%	0.531	0.780	-
LTE Band 2			50	0	Top Edge	5	18700	1860	21.50	19.70	151.36%	0.411	0.622	-
LTE Band 2			100RB	Top Edge	5	18700	1860	21.50	19.61	154.53%	0.399	0.617	-	
LTE Band 2			1	0	Bottom Edge	5	18700	1860	22.50	20.83	146.89%	0.083	0.122	-
LTE Band 2			50	0	Bottom Edge	5	18700	1860	21.50	19.70	151.36%	0.068	0.103	-
LTE Band 2			100RB	Bottom Edge	5	18700	1860	21.50	19.61	154.53%	0.056	0.087	-	
LTE Band 2			1	0	Left Edge	5	18700	1860	22.50	20.83	146.89%	0.810	1.190	014
LTE Band 2			1	0	Left Edge	5	18900	1880	22.50	20.70	151.36%	0.764	1.156	-
LTE Band 2			1	0	Left Edge	5	19100	1900	22.50	20.76	149.28%	0.717	1.070	-
LTE Band 2			50	0	Left Edge	5	18700	1860	21.50	19.70	151.36%	0.526	0.796	-
LTE Band 2			100RB	Left Edge	5	18700	1860	21.50	19.61	154.53%	0.516	0.797	-	
LTE Band 2			1	0	Right Edge	5	18700	1860	22.50	20.83	146.89%	0.118	0.173	-
LTE Band 2			50	0	Right Edge	5	18700	1860	21.50	19.70	151.36%	0.093	0.141	-
LTE Band 2			100RB	Right Edge	5	18700	1860	21.50	19.61	154.53%	0.085	0.131	-	
LTE Band 2	1	0	Left Edge	5	18700	1860	22.50	20.83	146.89%	0.794	1.166	-		

Band	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		ID
												Measured	Reported	
LTE Band 4	20MHz	QPSK	1	0	Front Surface	5	20300	1745	22.50	21.08	138.68%	0.126	0.175	-
LTE Band 4			50	50	Front Surface	5	20300	1745	21.50	19.99	141.58%	0.096	0.136	-
LTE Band 4			100RB	Front Surface	5	20175	1732.5	21.50	19.88	145.21%	0.091	0.132	-	
LTE Band 4			1	0	Back Surface	5	20300	1745	22.50	21.08	138.68%	0.415	0.576	-
LTE Band 4			50	50	Back Surface	5	20300	1745	21.50	19.99	141.58%	0.325	0.460	-
LTE Band 4			100RB	Back Surface	5	20175	1732.5	21.50	19.88	145.21%	0.336	0.488	-	
LTE Band 4			1	0	Top Edge	5	20300	1745	22.50	21.08	138.68%	0.428	0.594	-
LTE Band 4			50	50	Top Edge	5	20300	1745	21.50	19.99	141.58%	0.329	0.466	-
LTE Band 4			100RB	Top Edge	5	20175	1732.5	21.50	19.88	145.21%	0.337	0.489	-	
LTE Band 4			1	0	Bottom Edge	5	20300	1745	22.50	21.08	138.68%	0.083	0.115	-
LTE Band 4			50	50	Bottom Edge	5	20300	1745	21.50	19.99	141.58%	0.068	0.096	-
LTE Band 4			100RB	Bottom Edge	5	20175	1732.5	21.50	19.88	145.21%	0.052	0.076	-	
LTE Band 4			1	0	Left Edge	5	20050	1720	22.50	20.68	152.05%	0.441	0.671	-
LTE Band 4			1	0	Left Edge	5	20175	1732.5	22.50	21.02	140.60%	0.488	0.686	-
LTE Band 4			1	0	Left Edge	5	20300	1745	22.50	21.08	138.68%	0.513	0.711	015
LTE Band 4			50	50	Left Edge	5	20300	1745	21.50	19.99	141.58%	0.401	0.568	-
LTE Band 4			100RB	Left Edge	5	20175	1732.5	21.50	19.88	145.21%	0.364	0.529	-	
LTE Band 4			1	0	Right Edge	5	20300	1745	22.50	21.08	138.68%	0.116	0.161	-
LTE Band 4			50	50	Right Edge	5	20300	1745	21.50	19.99	141.58%	0.088	0.125	-
LTE Band 4			100RB	Right Edge	5	20175	1732.5	21.50	19.88	145.21%	0.093	0.135	-	

Band	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		ID
												Measured	Reported	
LTE Band 5	10MHz	QPSK	1	0	Front Surface	5	20450	829	23.00	22.80	104.71%	0.083	0.087	-
LTE Band 5			25	0	Front Surface	5	20450	829	22.00	21.64	108.64%	0.062	0.067	-
LTE Band 5			50RB	Front Surface	5	20450	829	22.00	21.66	108.14%	0.066	0.071	-	
LTE Band 5			1	0	Back Surface	5	20450	829	23.00	22.80	104.71%	0.419	0.439	-
LTE Band 5			1	0	Back Surface	5	20525	836.5	23.00	22.58	110.15%	0.402	0.443	-
LTE Band 5			1	0	Back Surface	5	20600	844	23.00	22.66	108.14%	0.444	0.480	016
LTE Band 5			25	0	Back Surface	5	20450	829	22.00	21.64	108.64%	0.343	0.373	-
LTE Band 5			50RB	Back Surface	5	20450	829	22.00	21.66	108.14%	0.331	0.358	-	
LTE Band 5			1	0	Top Edge	5	20450	829	23.00	22.80	104.71%	0.377	0.395	-
LTE Band 5			25	0	Top Edge	5	20450	829	22.00	21.64	108.64%	0.295	0.320	-
LTE Band 5			50RB	Top Edge	5	20450	829	22.00	21.66	108.14%	0.306	0.331	-	
LTE Band 5			1	0	Bottom Edge	5	20450	829	23.00	22.80	104.71%	0.021	0.022	-
LTE Band 5			25	0	Bottom Edge	5	20450	829	22.00	21.64	108.64%	0.014	0.015	-
LTE Band 5			50RB	Bottom Edge	5	20450	829	22.00	21.66	108.14%	0.016	0.017	-	
LTE Band 5			1	0	Left Edge	5	20450	829	23.00	22.80	104.71%	0.358	0.375	-
LTE Band 5			25	0	Left Edge	5	20450	829	22.00	21.64	108.64%	0.268	0.291	-
LTE Band 5			50RB	Left Edge	5	20450	829	22.00	21.66	108.14%	0.276	0.298	-	
LTE Band 5			1	0	Right Edge	5	20450	829	23.00	22.80	104.71%	0.075	0.079	-
LTE Band 5			25	0	Right Edge	5	20450	829	22.00	21.64	108.64%	0.053	0.058	-
LTE Band 5			50RB	Right Edge	5	20450	829	22.00	21.66	108.14%	0.057	0.062	-	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Band	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		ID
												Measured	Reported	
LTE Band 12	10MHz	QPSK	1	0	Front Surface	5	23060	704	23.00	22.92	101.86%	0.137	0.140	-
LTE Band 12			25	12	Front Surface	5	23060	704	22.00	21.86	103.28%	0.111	0.115	-
LTE Band 12			50RB		Front Surface	5	23060	704	22.00	21.83	103.99%	0.104	0.108	-
LTE Band 12			1	0	Back Surface	5	23060	704	23.00	22.92	101.86%	0.503	0.512	017
LTE Band 12			1	0	Back Surface	5	23095	707.5	23.00	22.17	121.06%	0.396	0.479	-
LTE Band 12			1	0	Back Surface	5	23130	711	23.00	22.78	105.20%	0.437	0.460	-
LTE Band 12			25	25	Back Surface	5	23060	704	22.00	21.86	103.28%	0.399	0.412	-
LTE Band 12			50RB		Back Surface	5	23060	704	22.00	21.83	103.99%	0.408	0.424	-
LTE Band 12			1	0	Top Edge	5	23060	704	23.00	22.92	101.86%	0.353	0.360	-
LTE Band 12			25	25	Top Edge	5	23060	704	22.00	21.86	103.28%	0.282	0.291	-
LTE Band 12			50RB		Top Edge	5	23060	704	22.00	21.83	103.99%	0.264	0.275	-
LTE Band 12			1	0	Bottom Edge	5	23060	704	23.00	22.92	101.86%	0.023	0.023	-
LTE Band 12			25	25	Bottom Edge	5	23060	704	22.00	21.86	103.28%	0.015	0.015	-
LTE Band 12			50RB		Bottom Edge	5	23060	704	22.00	21.83	103.99%	0.011	0.011	-
LTE Band 12			1	0	Left Edge	5	23060	704	23.00	22.92	101.86%	0.338	0.344	-
LTE Band 12			25	25	Left Edge	5	23060	704	22.00	21.86	103.28%	0.272	0.281	-
LTE Band 12			50RB		Left Edge	5	23060	704	22.00	21.83	103.99%	0.263	0.273	-
LTE Band 12			1	0	Right Edge	5	23060	704	23.00	22.92	101.86%	0.119	0.121	-
LTE Band 12			25	25	Right Edge	5	23060	704	22.00	21.86	103.28%	0.096	0.099	-
LTE Band 12			50RB		Right Edge	5	23060	704	22.00	21.83	103.99%	0.087	0.090	-

Band	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		ID
												Measured	Reported	
LTE Band 13	10MHz	QPSK	1	0	Front Surface	5	23230	782	23.00	22.36	115.88%	0.123	0.143	-
LTE Band 13			25	0	Front Surface	5	23230	782	22.00	21.24	119.12%	0.089	0.106	-
LTE Band 13			50RB		Front Surface	5	23230	782	22.00	21.18	120.78%	0.081	0.098	-
LTE Band 13			1	0	Back Surface	5	23230	782	23.00	22.36	115.88%	0.442	0.512	018
LTE Band 13			25	0	Back Surface	5	23230	782	22.00	21.24	119.12%	0.349	0.416	-
LTE Band 13			50RB		Back Surface	5	23230	782	22.00	21.18	120.78%	0.334	0.403	-
LTE Band 13			1	0	Top Edge	5	23230	782	23.00	22.36	115.88%	0.428	0.496	-
LTE Band 13			25	0	Top Edge	5	23230	782	22.00	21.24	119.12%	0.337	0.401	-
LTE Band 13			50RB		Top Edge	5	23230	782	22.00	21.18	120.78%	0.316	0.382	-
LTE Band 13			1	0	Bottom Edge	5	23230	782	23.00	22.36	115.88%	0.022	0.025	-
LTE Band 13			25	0	Bottom Edge	5	23230	782	22.00	21.24	119.12%	0.016	0.019	-
LTE Band 13			50RB		Bottom Edge	5	23230	782	22.00	21.18	120.78%	0.009	0.011	-
LTE Band 13			1	0	Left Edge	5	23230	782	23.00	22.36	115.88%	0.416	0.482	-
LTE Band 13			25	0	Left Edge	5	23230	782	22.00	21.24	119.12%	0.328	0.391	-
LTE Band 13			50RB		Left Edge	5	23230	782	22.00	21.18	120.78%	0.314	0.379	-
LTE Band 13			1	0	Right Edge	5	23230	782	23.00	22.36	115.88%	0.105	0.122	-
LTE Band 13			25	0	Right Edge	5	23230	782	22.00	21.24	119.12%	0.084	0.100	-
LTE Band 13			50RB		Right Edge	5	23230	782	22.00	21.18	120.78%	0.069	0.083	-

Band	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		ID
												Measured	Reported	
LTE Band 66	20MHz	QPSK	1	0	Front Surface	5	132322	1745	22.00	20.41	144.21%	0.117	0.169	-
LTE Band 66			50	0	Front Surface	5	132322	1745	21.00	19.34	146.55%	0.096	0.141	-
LTE Band 66			100RB		Front Surface	5	132322	1745	21.00	19.28	148.59%	0.082	0.122	-
LTE Band 66			1	0	Back Surface	5	132322	1745	22.00	20.41	144.21%	0.537	0.774	-
LTE Band 66			50	0	Back Surface	5	132322	1745	21.00	19.34	146.55%	0.425	0.623	-
LTE Band 66			100RB		Back Surface	5	132322	1745	21.00	19.28	148.59%	0.413	0.614	-
LTE Band 66			1	0	Top Edge	5	132322	1745	22.00	20.41	144.21%	0.551	0.795	-
LTE Band 66			50	0	Top Edge	5	132322	1745	21.00	19.34	146.55%	0.434	0.636	-
LTE Band 66			100RB		Top Edge	5	132322	1745	21.00	19.28	148.59%	0.419	0.623	-
LTE Band 66			1	0	Bottom Edge	5	132322	1745	22.00	20.41	144.21%	0.021	0.030	-
LTE Band 66			50	0	Bottom Edge	5	132322	1745	21.00	19.34	146.55%	0.017	0.025	-
LTE Band 66			100RB		Bottom Edge	5	132322	1745	21.00	19.28	148.59%	0.012	0.018	-
LTE Band 66			1	0	Left Edge	5	132072	1720	22.00	20.35	146.22%	0.519	0.759	-
LTE Band 66			1	0	Left Edge	5	132322	1745	22.00	20.41	144.21%	0.586	0.845	-
LTE Band 66			1	0	Left Edge	5	132572	1770	22.00	20.22	150.86%	0.630	0.949	019
LTE Band 66			50	0	Left Edge	5	132322	1745	21.00	19.34	146.55%	0.509	0.746	-
LTE Band 66			100RB		Left Edge	5	132322	1745	21.00	19.28	148.59%	0.474	0.704	-
LTE Band 66			1	0	Right Edge	5	132322	1745	22.00	20.41	144.21%	0.102	0.147	-
LTE Band 66			50	0	Right Edge	5	132322	1745	21.00	19.34	146.55%	0.083	0.122	-
LTE Band 66			100RB		Right Edge	5	132322	1745	21.00	19.28	148.59%	0.075	0.111	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WLAN

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11b	Ant 1	Front Surface	5	11	2462	9.50	9.16	1.03	108.14%	0.012	0.013	-
WLAN 802.11b	Ant 1	Back Surface	5	11	2462	9.50	9.16	1.03	108.14%	0.029	0.032	-
WLAN 802.11b	Ant 1	Top Edge	5	1	2412	8.00	7.72	1.03	106.66%	0.066	0.072	-
WLAN 802.11b	Ant 1	Top Edge	5	6	2437	6.50	6.15	1.03	108.39%	0.048	0.053	-
WLAN 802.11b	Ant 1	Top Edge	5	11	2462	9.50	9.16	1.03	108.14%	0.086	0.096	020
WLAN 802.11b	Ant 1	Bottom Edge	5	11	2462	9.50	9.16	1.03	108.14%	0.005	0.006	-
WLAN 802.11b	Ant 1	Left Edge	5	11	2462	9.50	9.16	1.03	108.14%	0.008	0.009	-
WLAN 802.11b	Ant 1	Right Edge	5	11	2462	9.50	9.16	1.03	108.14%	0.016	0.018	-
WLAN 802.11n(40M) 2.4G	Ant 1	Front Surface	5	6	2437	14.00	13.57	1.03	110.41%	0.015	0.017	-
WLAN 802.11n(40M) 2.4G	Ant 1	Back Surface	5	6	2437	14.00	13.57	1.03	110.41%	0.053	0.060	-
WLAN 802.11n(40M) 2.4G	Ant 1	Top Edge	5	3	2422	11.00	10.94	1.03	101.39%	0.078	0.081	-
WLAN 802.11n(40M) 2.4G	Ant 1	Top Edge	5	6	2437	14.00	13.57	1.03	110.41%	0.096	0.109	-
WLAN 802.11n(40M) 2.4G	Ant 1	Top Edge	5	9	2452	13.00	12.87	1.03	103.04%	0.113	0.120	021
WLAN 802.11n(40M) 2.4G	Ant 1	Bottom Edge	5	6	2437	14.00	13.57	1.03	110.41%	0.004	0.005	-
WLAN 802.11n(40M) 2.4G	Ant 1	Left Edge	5	6	2437	14.00	13.57	1.03	110.41%	0.009	0.010	-
WLAN 802.11n(40M) 2.4G	Ant 1	Right Edge	5	6	2437	14.00	13.57	1.03	110.41%	0.029	0.033	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
Bluetooth(GFSK)	Ant 1	Front Surface	5	00	2402	5.99	5.58	1.33	109.80%	0.004	0.006	-
Bluetooth(GFSK)	Ant 1	Back Surface	5	00	2402	5.99	5.58	1.33	109.80%	0.011	0.016	-
Bluetooth(GFSK)	Ant 1	Top Edge	5	00	2402	5.99	5.58	1.33	109.80%	0.021	0.031	-
Bluetooth(GFSK)	Ant 1	Top Edge	5	39	2441	6.53	5.49	1.33	126.95%	0.026	0.044	-
Bluetooth(GFSK)	Ant 1	Top Edge	5	78	2480	6.62	5.23	1.33	137.60%	0.032	0.059	022
Bluetooth(GFSK)	Ant 1	Bottom Edge	5	00	2402	5.99	5.58	1.33	109.80%	0.002	0.003	-
Bluetooth(GFSK)	Ant 1	Left Edge	5	00	2402	5.99	5.58	1.33	109.80%	0.003	0.004	-
Bluetooth(GFSK)	Ant 1	Right Edge	5	00	2402	5.99	5.58	1.33	109.80%	0.006	0.009	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11a 5.2G	Ant 1	Front Surface	5	44	5220	15.50	15.21	1.03	106.91%	0.118	0.130	-
WLAN 802.11a 5.2G	Ant 1	Back Surface	5	36	5180	15.50	15.15	1.03	108.39%	0.796	0.888	-
WLAN 802.11a 5.2G	Ant 1	Back Surface	5	44	5220	15.50	15.21	1.03	106.91%	0.951	1.046	023
WLAN 802.11a 5.2G	Ant 1	Back Surface	5	48	5240	15.50	15.18	1.03	107.65%	0.864	0.957	-
WLAN 802.11a 5.2G	Ant 1	Top Edge	5	44	5220	15.50	15.21	1.03	106.91%	0.199	0.219	-
WLAN 802.11a 5.2G	Ant 1	Bottom Edge	5	44	5220	15.50	15.21	1.03	106.91%	0.055	0.061	-
WLAN 802.11a 5.2G	Ant 1	Left Edge	5	44	5220	15.50	15.21	1.03	106.91%	0.067	0.074	-
WLAN 802.11a 5.2G	Ant 1	Right Edge	5	44	5220	15.50	15.21	1.03	106.91%	0.144	0.158	-
WLAN 802.11a 5.2G	Ant 1	Back Surface	5	44	5220	15.50	15.21	1.03	106.91%	0.947	1.042	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11a 5.3G	Ant 1	Front Surface	5	64	5320	14.00	13.97	1.03	100.69%	0.082	0.085	-
WLAN 802.11a 5.3G	Ant 1	Back Surface	5	52	5260	14.00	13.88	1.03	102.80%	0.745	0.788	-
WLAN 802.11a 5.3G	Ant 1	Back Surface	5	60	5300	14.00	13.91	1.03	102.09%	0.879	0.923	-
WLAN 802.11a 5.3G	Ant 1	Back Surface	5	64	5320	14.00	13.97	1.03	100.69%	1.030	1.067	024
WLAN 802.11a 5.3G	Ant 1	Top Edge	5	64	5320	14.00	13.97	1.03	100.69%	0.218	0.226	-
WLAN 802.11a 5.3G	Ant 1	Bottom Edge	5	64	5320	14.00	13.97	1.03	100.69%	0.014	0.015	-
WLAN 802.11a 5.3G	Ant 1	Left Edge	5	64	5320	14.00	13.97	1.03	100.69%	0.077	0.080	-
WLAN 802.11a 5.3G	Ant 1	Right Edge	5	64	5320	14.00	13.97	1.03	100.69%	0.146	0.151	-
WLAN 802.11a 5.3G	Ant 1	Back Surface	5	64	5320	14.00	13.97	1.03	100.69%	0.773	0.801	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11a 5.6G	Ant 1	Front Surface	5	140	5700	13.50	13.15	1.03	108.39%	0.078	0.087	-
WLAN 802.11a 5.6G	Ant 1	Back Surface	5	100	5500	13.50	13.04	1.03	111.17%	0.877	1.003	-
WLAN 802.11a 5.6G	Ant 1	Back Surface	5	140	5700	13.50	13.15	1.03	108.39%	0.942	1.051	025
WLAN 802.11a 5.6G	Ant 1	Back Surface	5	144	5720	13.50	13.09	1.03	109.90%	0.915	1.035	-
WLAN 802.11a 5.6G	Ant 1	Top Edge	5	140	5700	13.50	13.15	1.03	108.39%	0.166	0.185	-
WLAN 802.11a 5.6G	Ant 1	Bottom Edge	5	140	5700	13.50	13.15	1.03	108.39%	0.008	0.009	-
WLAN 802.11a 5.6G	Ant 1	Left Edge	5	140	5700	13.50	13.15	1.03	108.39%	0.011	0.012	-
WLAN 802.11a 5.6G	Ant 1	Right Edge	5	140	5700	13.50	13.15	1.03	108.39%	0.084	0.094	-
WLAN 802.11a 5.6G	Ant 1	Back Surface	5	140	5700	13.50	13.15	1.03	108.39%	0.962	1.073	-

Band	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		ID
										Measured	Reported	
WLAN 802.11a 5.8G	Ant 1	Front Surface	5	149	5745	14.50	14.42	1.03	101.86%	0.087	0.091	-
WLAN 802.11a 5.8G	Ant 1	Back Surface	5	149	5745	14.50	14.42	1.03	101.86%	1.040	1.090	026
WLAN 802.11a 5.8G	Ant 1	Back Surface	5	157	5785	14.50	14.35	1.03	103.51%	1.010	1.076	-
WLAN 802.11a 5.8G	Ant 1	Back Surface	5	165	5825	14.50	14.30	1.03	104.71%	0.962	1.037	-
WLAN 802.11a 5.8G	Ant 1	Top Edge	5	149	5745	14.50	14.42	1.03	101.86%	0.214	0.224	-
WLAN 802.11a 5.8G	Ant 1	Bottom Edge	5	149	5745	14.50	14.42	1.03	101.86%	0.012	0.013	-
WLAN 802.11a 5.8G	Ant 1	Left Edge	5	149	5745	14.50	14.42	1.03	101.86%	0.007	0.007	-
WLAN 802.11a 5.8G	Ant 1	Right Edge	5	149	5745	14.50	14.42	1.03	101.86%	0.089	0.093	-
WLAN 802.11a 5.8G	Ant 1	Back Surface	5	149	5745	14.50	14.42	1.03	101.86%	0.976	1.023	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Note:

Reported SAR = measured SAR * Power scaling * Duty cycle scaling

7.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

7.4 Conclusion

The device is compliant because all the standalone results are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

8 SIMULTANEOUS TRANSMISSION ANALYSIS

8.1 Simultaneous Transmission Scenarios:

Simultaneous Transmission configurations
WWAN+BT+NFC
WLAN 2.4GHz+BT+NFC
WLAN 5GHz+BT+NFC

8.2 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\text{Estimated SAR} = \frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

8.3 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by $(\text{SAR1} + \text{SAR2})^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Simultaneous Transmission Combination Limb

	Exposure Position		FCC Reported SAR					Scenario 1	Scenario 2	Scenario 3
			1	2	4	6	7	1+6+7	2+6+7	4+6+7
			WWAN	2.4GHz WLAN Ant 1	5GHz WLAN Ant 1	Bluetooth Ant 1	NFC	Summed	Summed	Summed
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	
LTE Band 2	Front Surface	0	0.328	0.028	0.383	0.007	0.0000010266	0.335	0.035	0.390
	Back Surface	0	0.997	0.094	2.576	0.016	0.0000010266	1.013	0.110	2.592
	Top Edge	0	1.059	0.171	1.662	0.051	0.0000010266	1.110	0.222	1.713
	Bottom Edge	0	0.157	0.006	0.120	0.001	0.0000010266	0.158	0.007	0.121
	Left Edge	0	1.178	0.015	0.156	0.004	0.0000010266	1.182	0.019	0.160
	Right Edge	0	0.306	0.050	0.839	0.009	0.0000010266	0.315	0.059	0.848
LTE Band 4	Front Surface	0	0.172	0.028	0.383	0.007	0.0000010266	0.179	0.035	0.390
	Back Surface	0	0.508	0.094	2.576	0.016	0.0000010266	0.524	0.110	2.592
	Top Edge	0	0.533	0.171	1.662	0.051	0.0000010266	0.584	0.222	1.713
	Bottom Edge	0	0.094	0.006	0.120	0.001	0.0000010266	0.095	0.007	0.121
	Left Edge	0	0.688	0.015	0.156	0.004	0.0000010266	0.692	0.019	0.160
	Right Edge	0	0.154	0.050	0.839	0.009	0.0000010266	0.163	0.059	0.848
LTE Band 5	Front Surface	0	0.132	0.028	0.383	0.007	0.0000010266	0.139	0.035	0.390
	Back Surface	0	0.565	0.094	2.576	0.016	0.0000010266	0.581	0.110	2.592
	Top Edge	0	0.495	0.171	1.662	0.051	0.0000010266	0.546	0.222	1.713
	Bottom Edge	0	0.025	0.006	0.120	0.001	0.0000010266	0.026	0.007	0.121
	Left Edge	0	0.481	0.015	0.156	0.004	0.0000010266	0.485	0.019	0.160
	Right Edge	0	0.123	0.050	0.839	0.009	0.0000010266	0.132	0.059	0.848
LTE Band 12	Front Surface	0	0.158	0.028	0.383	0.007	0.0000010266	0.165	0.035	0.390
	Back Surface	0	0.704	0.094	2.576	0.016	0.0000010266	0.720	0.110	2.592
	Top Edge	0	0.491	0.171	1.662	0.051	0.0000010266	0.542	0.222	1.713
	Bottom Edge	0	0.029	0.006	0.120	0.001	0.0000010266	0.030	0.007	0.121
	Left Edge	0	0.468	0.015	0.156	0.004	0.0000010266	0.472	0.019	0.160
	Right Edge	0	0.122	0.050	0.839	0.009	0.0000010266	0.131	0.059	0.848
LTE Band 13	Front Surface	0	0.119	0.028	0.383	0.007	0.0000010266	0.126	0.035	0.390
	Back Surface	0	0.419	0.094	2.576	0.016	0.0000010266	0.435	0.110	2.592
	Top Edge	0	0.409	0.171	1.662	0.051	0.0000010266	0.460	0.222	1.713
	Bottom Edge	0	0.013	0.006	0.120	0.001	0.0000010266	0.014	0.007	0.121
	Left Edge	0	0.381	0.015	0.156	0.004	0.0000010266	0.385	0.019	0.160
	Right Edge	0	0.101	0.050	0.839	0.009	0.0000010266	0.110	0.059	0.848
LTE Band 66	Front Surface	0	0.277	0.028	0.383	0.007	0.0000010266	0.284	0.035	0.390
	Back Surface	0	0.861	0.094	2.576	0.016	0.0000010266	0.877	0.110	2.592
	Top Edge	0	0.893	0.171	1.662	0.051	0.0000010266	0.944	0.222	1.713
	Bottom Edge	0	0.102	0.006	0.120	0.001	0.0000010266	0.103	0.007	0.121
	Left Edge	0	1.124	0.015	0.156	0.004	0.0000010266	1.128	0.019	0.160
	Right Edge	0	0.244	0.050	0.839	0.009	0.0000010266	0.253	0.059	0.848

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Body

	Exposure Position		FCC Reported SAR					Scenario 1	Scenario 2	Scenario 3
			1	2	4	6	7	1+6+7	2+6+7	4+6+7
			WWAN	2.4GHz WLAN Ant 1	5GHz WLAN Ant 1	Bluetooth Ant 1	NFC	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 2	Front Surface	5	0.187	0.017	0.130	0.006	0.0000025665	0.193	0.023	0.136
	Back Surface	5	0.770	0.060	1.090	0.016	0.0000025665	0.786	0.076	1.106
	Top Edge	5	0.780	0.120	0.226	0.059	0.0000025665	0.839	0.179	0.285
	Bottom Edge	5	0.122	0.006	0.061	0.003	0.0000025665	0.125	0.009	0.064
	Left Edge	5	1.190	0.010	0.080	0.004	0.0000025665	1.194	0.014	0.084
	Right Edge	5	0.173	0.033	0.158	0.009	0.0000025665	0.182	0.042	0.167
LTE Band 4	Front Surface	5	0.175	0.017	0.130	0.006	0.0000025665	0.181	0.023	0.136
	Back Surface	5	0.576	0.060	1.090	0.016	0.0000025665	0.592	0.076	1.106
	Top Edge	5	0.594	0.120	0.226	0.059	0.0000025665	0.653	0.179	0.285
	Bottom Edge	5	0.115	0.006	0.061	0.003	0.0000025665	0.118	0.009	0.064
	Left Edge	5	0.711	0.010	0.080	0.004	0.0000025665	0.715	0.014	0.084
	Right Edge	5	0.161	0.033	0.158	0.009	0.0000025665	0.170	0.042	0.167
LTE Band 5	Front Surface	5	0.087	0.017	0.130	0.006	0.0000025665	0.093	0.023	0.136
	Back Surface	5	0.480	0.060	1.090	0.016	0.0000025665	0.496	0.076	1.106
	Top Edge	5	0.395	0.120	0.226	0.059	0.0000025665	0.454	0.179	0.285
	Bottom Edge	5	0.022	0.006	0.061	0.003	0.0000025665	0.025	0.009	0.064
	Left Edge	5	0.375	0.010	0.080	0.004	0.0000025665	0.379	0.014	0.084
	Right Edge	5	0.079	0.033	0.158	0.009	0.0000025665	0.088	0.042	0.167
LTE Band 12	Front Surface	5	0.140	0.017	0.130	0.006	0.0000025665	0.146	0.023	0.136
	Back Surface	5	0.512	0.060	1.090	0.016	0.0000025665	0.528	0.076	1.106
	Top Edge	5	0.360	0.120	0.226	0.059	0.0000025665	0.419	0.179	0.285
	Bottom Edge	5	0.023	0.006	0.061	0.003	0.0000025665	0.026	0.009	0.064
	Left Edge	5	0.344	0.010	0.080	0.004	0.0000025665	0.348	0.014	0.084
	Right Edge	5	0.121	0.033	0.158	0.009	0.0000025665	0.130	0.042	0.167
LTE Band 13	Front Surface	5	0.143	0.017	0.130	0.006	0.0000025665	0.149	0.023	0.136
	Back Surface	5	0.512	0.060	1.090	0.016	0.0000025665	0.528	0.076	1.106
	Top Edge	5	0.496	0.120	0.226	0.059	0.0000025665	0.555	0.179	0.285
	Bottom Edge	5	0.025	0.006	0.061	0.003	0.0000025665	0.028	0.009	0.064
	Left Edge	5	0.482	0.010	0.080	0.004	0.0000025665	0.486	0.014	0.084
	Right Edge	5	0.122	0.033	0.158	0.009	0.0000025665	0.131	0.042	0.167
LTE Band 66	Front Surface	5	0.169	0.017	0.130	0.006	0.0000025665	0.175	0.023	0.136
	Back Surface	5	0.774	0.060	1.090	0.016	0.0000025665	0.790	0.076	1.106
	Top Edge	5	0.795	0.120	0.226	0.059	0.0000025665	0.854	0.179	0.285
	Bottom Edge	5	0.030	0.006	0.061	0.003	0.0000025665	0.033	0.009	0.064
	Left Edge	5	0.949	0.010	0.080	0.004	0.0000025665	0.953	0.014	0.084
	Right Edge	5	0.147	0.033	0.158	0.009	0.0000025665	0.156	0.042	0.167

8.4 Conclusion

The simultaneous transmission is compliant because both SAR sum and/or SPLSR are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

9 INSTRUMENTS LIST

Equipment List					
Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
SPEAG	Data acquisition Electronics	DAE4	1260	Sep/14/2023	Sep/13/2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7712	Apr/18/2024	Apr/17/2025
SPEAG	System Validation Dipole	D750V3	1015	Sep/18/2023	Sep/17/2024
SPEAG	System Validation Dipole	D835V2	4d063	Sep/20/2023	Sep/19/2024
SPEAG	System Validation Dipole	D1750V2	1158	Aug/25/2023	Aug/24/2024
SPEAG	System Validation Dipole	D1900V2	5d173	Apr/25/2024	Apr/24/2025
SPEAG	System Validation Dipole	D2450V2	727	Apr/22/2024	Apr/21/2025
SPEAG	System Validation Dipole	D5GHzV2	1023	Jan/24/2024	Jan/23/2025
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/21/2024	Feb/20/2025
R&S	MXG Analog Signal Generator	SMB100A03	182012	May/21/2024	May/20/2025
Agilent	Dual-directional coupler	772D	MY46151258	Sep/26/2023	Sep/25/2024
Agilent	Dual-directional coupler	778D	MY46151242	Sep/26/2023	Sep/25/2024
EMCI	Amplifier	EMC 074225P	980155	Calibration not required	Calibration not required
EMCI	Amplifier	EMC 2830P	980156	Calibration not required	Calibration not required
R&S	Power Sensor	NRP18S	109065	Oct/23/2023	Oct/22/2024
R&S	Power Meter	NRX	102034	Dec/13/2023	Dec/12/2024
R&S	Power Sensor	NRP18S	101974	Nov/21/2023	Nov/20/2024
Keysight	UXM 5G Wireless Test Platform	E7515B	MY60101215	Feb/27/2024	Feb/26/2025
SPEAG	Software	DASY 52 V52.10.4.1527	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	SAM	N/A	Calibration not required	Calibration not required
Anritsu	Radio Communication Test	MT8820C	6201061049	Nov/02/2023	Nov/01/2024
R&S	Spectrum Analyzer	FSV3044	101487	Apr/09/2024	Apr/08/2025
TECPEL	Digital thermometer	DTM-303A	TP130074	May/10/2024	May/09/2025

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

10 UNCERTAINTY BUDGET

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	c	D	e		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
<i>Isotropy, Axial</i>	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
<i>Isotropy, Hemispherical</i>	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	3.32%	N	1	1	0.64	0.43	2.12%	1.43%	M
Liquid Conductivity (mea.)	3.30%	N	1	1	0.6	0.49	1.98%	1.62%	M
Combined standard uncertainty		RSS					12.07%	11.90%	
Expant uncertainty (95% confidence interval), K=2							24.14%	23.81%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	c	D	e		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
<i>Isotropy , Axial</i>	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
<i>Isotropy, Hemispherical</i>	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)									
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	3.32%	N	1	1	0.64	0.43	2.12%	1.43%	M
Liquid Conductivity (mea.)	4.64%	N	1	1	0.6	0.49	2.78%	2.27%	M
Combined standard uncertainty		RSS					11.94%	11.72%	
Expant uncertainty (95% confidence interval), K=2							23.89%	23.44%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

11 SAR MEASUREMENT RESULTS

Date: 2024/5/23

ID: 008

Report No. :TESA2405000290E5

LTE Band 2 (20MHz)_Body_Left Edge_CH 18700_QPSK_1-0_0mm

Communication System: LTE; Frequency: 1860 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 40.859$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.17, 7.9, 8.07) @ 1860 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.87 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.987 V/m; Power Drift = 0.11 dB



Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.39 W/kg; SAR(10 g) = 0.802 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 1.89 W/kg

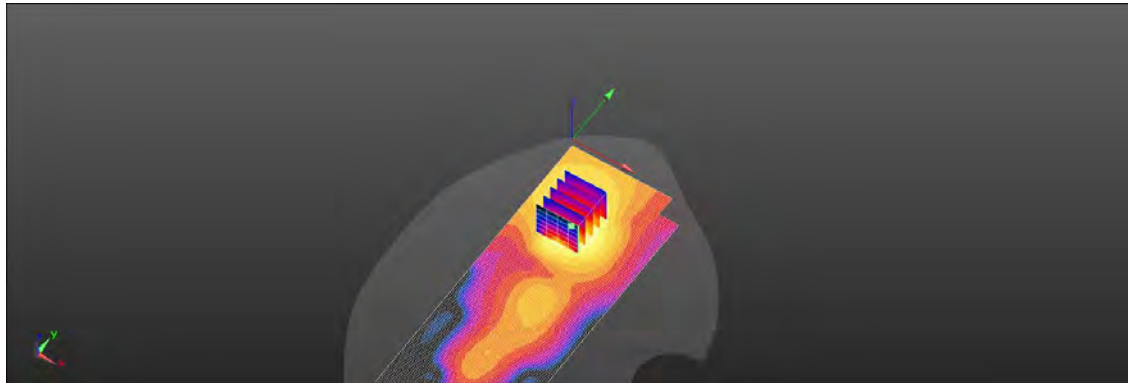

0 dB = 1.87 W/kg = 2.72 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/23

ID: 009

Report No. :TESA2405000290E5

LTE Band 4 (20MHz)_Body_Left Edge_CH 20300_QPSK_1-0_0mm

Communication System: LTE; Frequency: 1745 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.419 \text{ S/m}$; $\epsilon_r = 40.937$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.49, 8.17, 8.46) @ 1745 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.66 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.414 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.496 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.57 W/kg

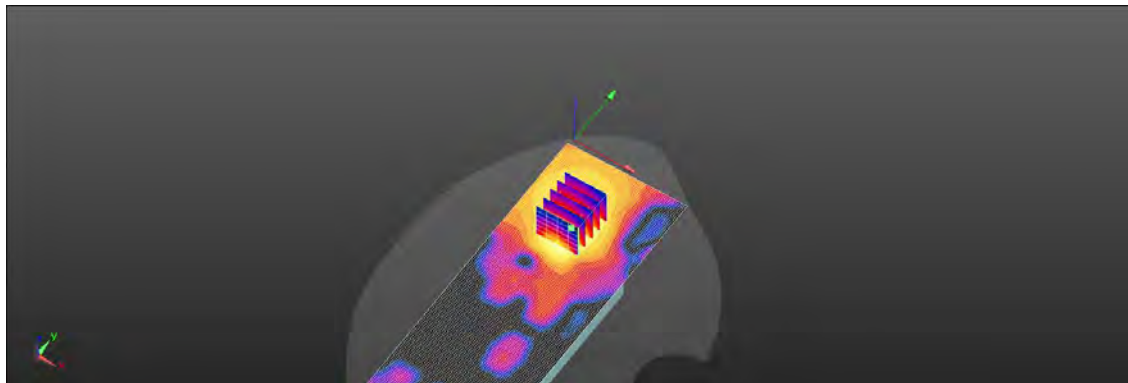

0 dB = 1.66 W/kg = 2.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/23

ID: 010

Report No. :TESA2405000290E5

LTE Band 5 (10MHz)_Body_Back Surface_CH 20600_QPSK_1-0_0mm

Communication System: LTE; Frequency: 844 MHz; Duty cycle= 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.921 \text{ S/m}$; $\epsilon_r = 41.897$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.5, 9.1, 9.44) @ 844 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.41 V/m; Power Drift = 0.12 dB



Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.522 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 1.60 W/kg

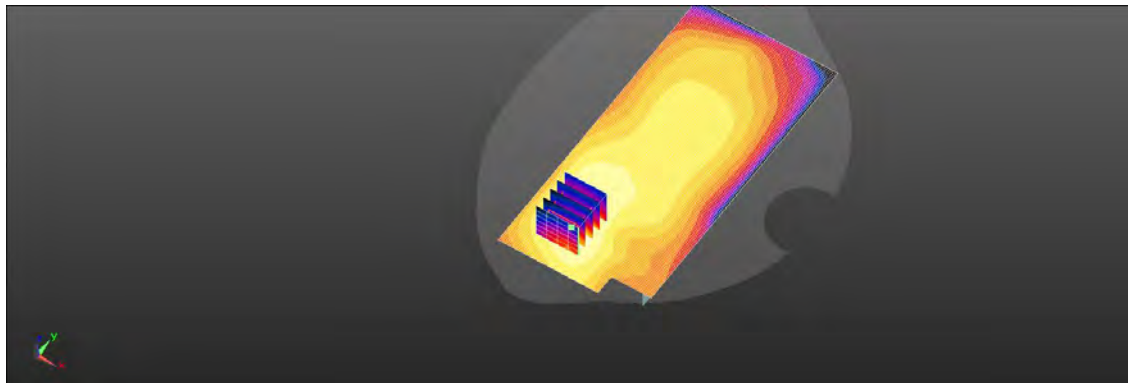

0 dB = 1.30 W/kg = 1.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/23

ID: 011

Report No. :TESA2405000290E5

LTE Band 12 (10MHz)_Body_Back Surface_CH 23060_QPSK_1-0_0mm

Communication System: LTE; Frequency: 704 MHz; Duty cycle= 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 42.383$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.57, 9.46, 9.78) @ 704 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.75 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.16 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 1.39 W/kg; SAR(10 g) = 0.691 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 44%

Maximum value of SAR (measured) = 2.02 W/kg

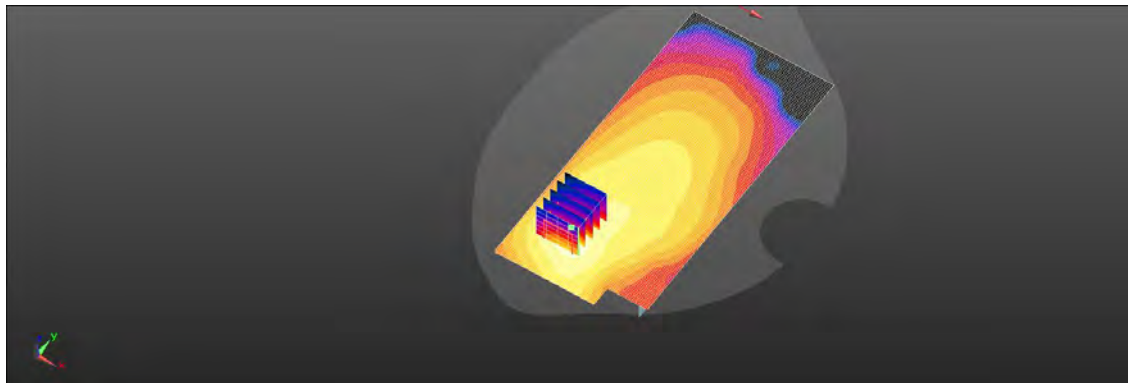

0 dB = 1.75 W/kg = 2.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/23

ID: 012

Report No. :TESA2405000290E5

LTE Band 13 (10MHz)_Body_Back Surface_CH 23230_QPSK_1-0_0mm

Communication System: LTE; Frequency: 782 MHz; Duty cycle= 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.984$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.57, 9.46, 9.78) @ 782 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.899 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.15 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 1.01 W/kg

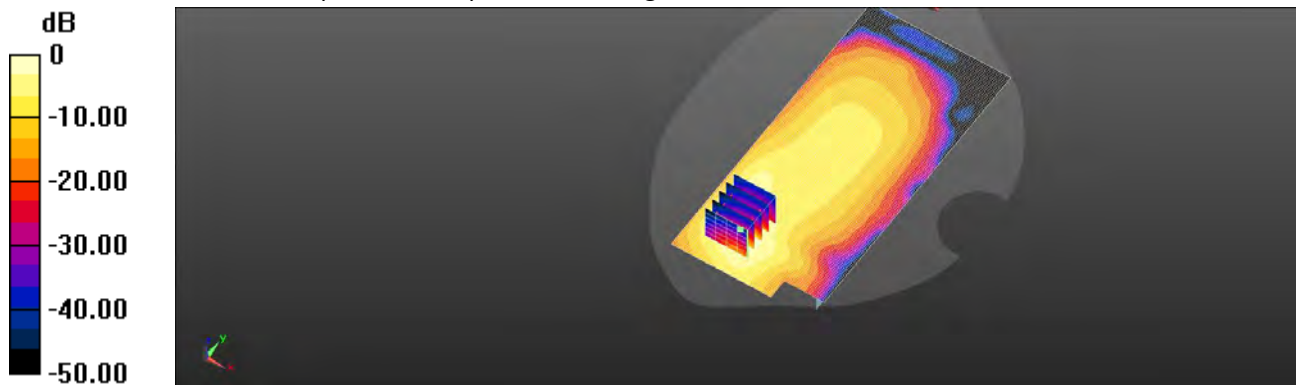

0 dB = 0.899 W/kg = -0.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/5/23

ID: 013

Report No. :TESA2405000290E5

LTE Band 66 (20MHz)_Body_Left Edge_CH 132572_QPSK_1-0_0mm

Communication System: LTE; Frequency: 1770 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1770 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 40.898$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.49, 8.17, 8.46) @ 1770 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.12 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.165 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 1.4 W/kg; SAR(10 g) = 0.746 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 1.89 W/kg

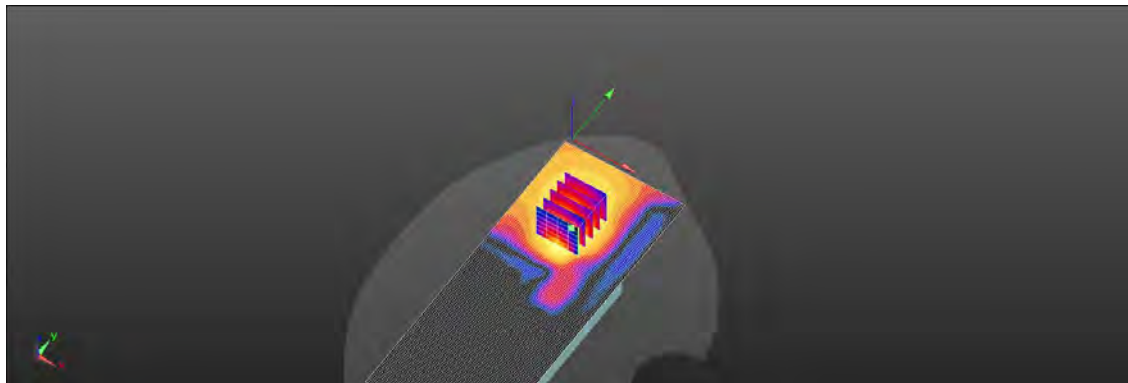

0 dB = 2.12 W/kg = 3.26 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/24

ID: 001

Report No. :TESA2405000290E5

WLAN 802.11b_Body_Top Edge_CH 11_0mm_Ant1

Communication System: WLAN 2.45G; Frequency: 2462 MHz; Duty cycle= 1:1.028

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.758 \text{ S/m}$; $\epsilon_r = 38.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(7.76, 7.48, 7.6) @ 2462 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.287 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.051 V/m; Power Drift = -0.11 dB



Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.076 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 0.265 W/kg

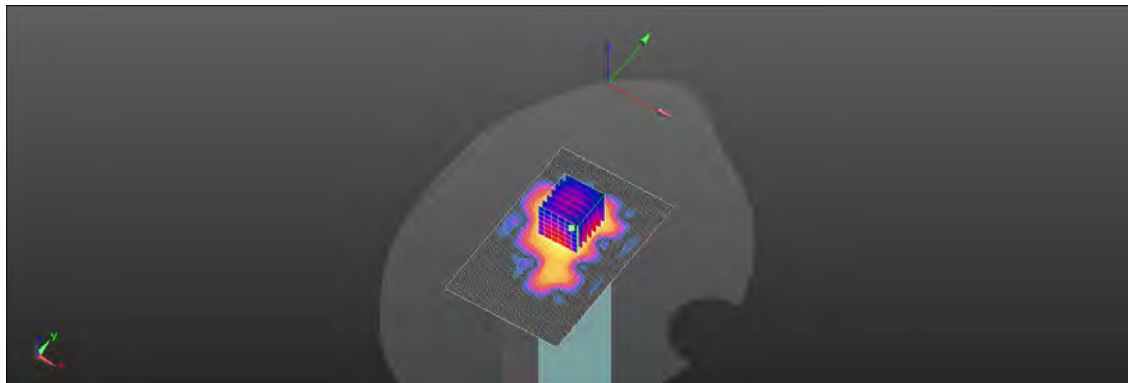

0 dB = 0.287 W/kg = -5.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/5/24

ID: 002

Report No. :TESA2405000290E5

WLAN 802.11n(40M) 2.4G_Body_Top Edge_CH 9_0mm_Ant1

Communication System: WLAN 2.45G; Frequency: 2452 MHz; Duty cycle= 1:1.117

Medium parameters used: $f = 2452 \text{ MHz}$; $\sigma = 1.748 \text{ S/m}$; $\epsilon_r = 38.169$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(7.76, 7.48, 7.6) @ 2452 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.567 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.009 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.570 W/kg

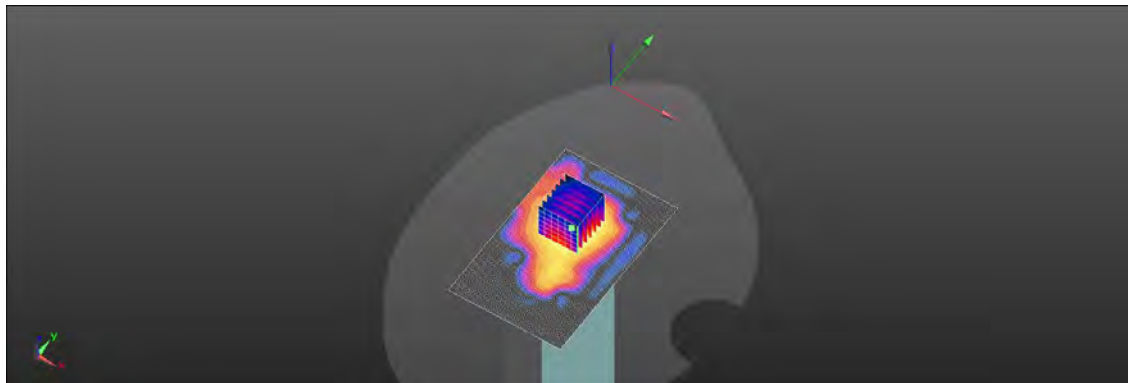

0 dB = 0.567 W/kg = -2.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/5/24

ID: 003

Report No. : TESA2405000290E5

Bluetooth(GFSK)_Body_Top Edge_CH 78_0mm_Ant1

Communication System: Bluetooth; Frequency: 2480 MHz; Duty cycle= 1:1.331

Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.775 \text{ S/m}$; $\epsilon_r = 38.129$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(7.76, 7.48, 7.6) @ 2480 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.109 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.137 V/m; Power Drift = 0.12 dB



Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.0951 W/kg

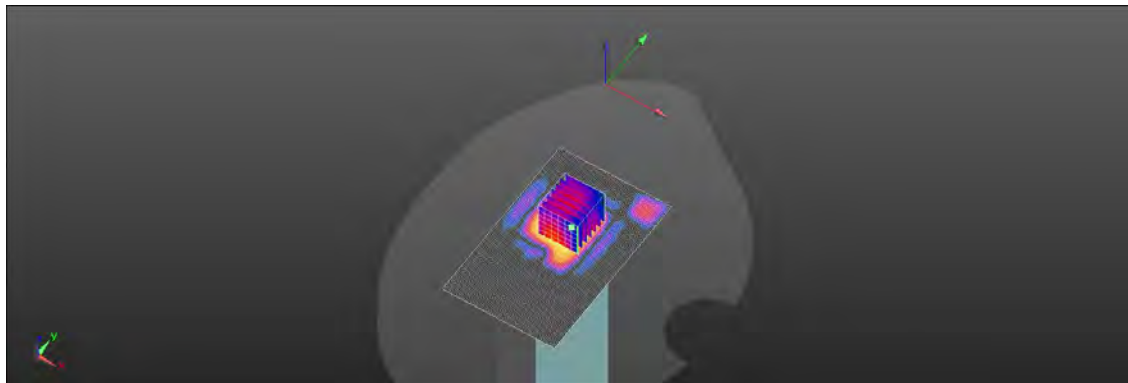

0 dB = 0.109 W/kg = -9.63 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/5/25

ID: 004

Report No. :TESA2405000290E5

WLAN 802.11a 5.2G_Body_Back Surface_CH 48_0mm_Ant1

Communication System: WLAN 5G; Frequency: 5240 MHz; Duty cycle= 1:1.031

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.849 \text{ S/m}$; $\epsilon_r = 37.081$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(5.49, 5.39, 5.43) @ 5240 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (111x221x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 8.71 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.863 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 4.74 W/kg; SAR(10 g) = 1.12 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 9.36 W/kg

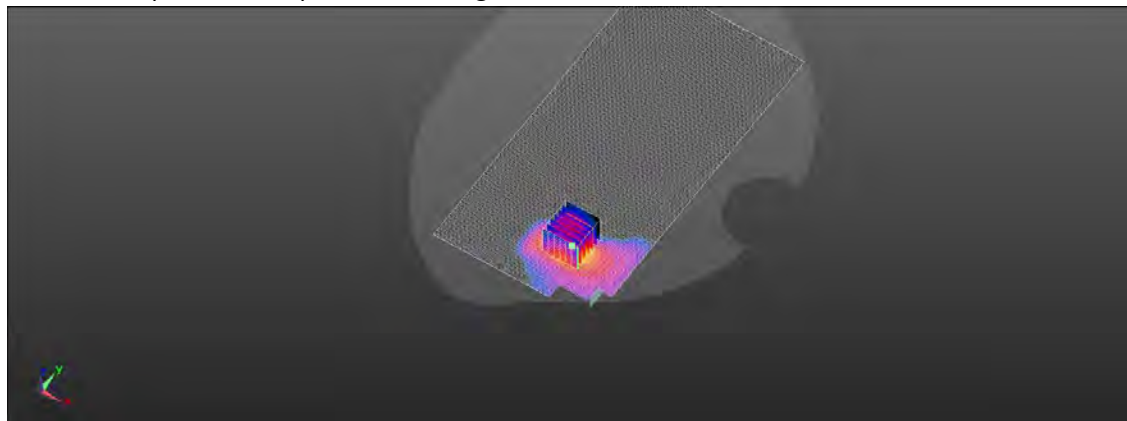

0 dB = 9.36 W/kg = 9.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/25

ID: 005

Report No. :TESA2405000290E5

WLAN 802.11a 5.3G_Body_Back Surface_CH 60_0mm_Ant1

Communication System: WLAN 5G; Frequency: 5300 MHz; Duty cycle= 1:1.029

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.909 \text{ S/m}$; $\epsilon_r = 37.011$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(5.49, 5.39, 5.43) @ 5300 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x221x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 13.3 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.162 V/m; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 6.79 W/kg; SAR(10 g) = 1.41 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 15.5 W/kg

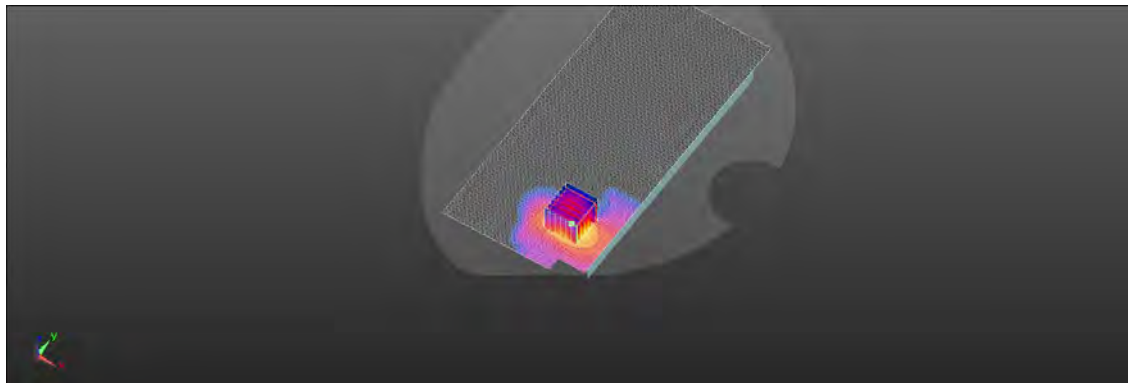

0 dB = 15.5 W/kg = 11.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/25

ID: 006

Report No. :TESA2405000290E5

WLAN 802.11a 5.6G_Body_Back Surface_CH 140_0mm_Ant1

Communication System: WLAN 5G; Frequency: 5700 MHz; Duty cycle= 1:1.029

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.331 \text{ S/m}$; $\epsilon_r = 36.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(4.89, 4.71, 4.77) @ 5700 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x221x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 14.8 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.793 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 33.6 W/kg

SAR(1 g) = 9.33 W/kg; SAR(10 g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 17.3 W/kg

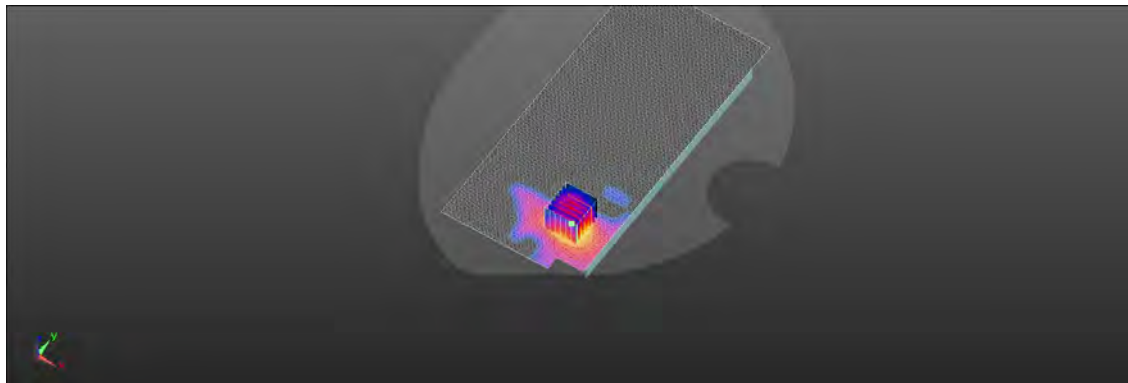

0 dB = 17.3 W/kg = 12.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/5/25

ID: 007

Report No. :TESA2405000290E5

WLAN 802.11a 5.8G_Body_Back Surface_CH 165_0mm_Ant1

Communication System: WLAN 5G; Frequency: 5825 MHz; Duty cycle= 1:1.029

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.464 \text{ S/m}$; $\epsilon_r = 36.361$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(4.89, 4.71, 4.77) @ 5825 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (111x221x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 26.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.527 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 54.1 W/kg

SAR(1 g) = 11.4 W/kg; SAR(10 g) = 2.17 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 29.0 W/kg

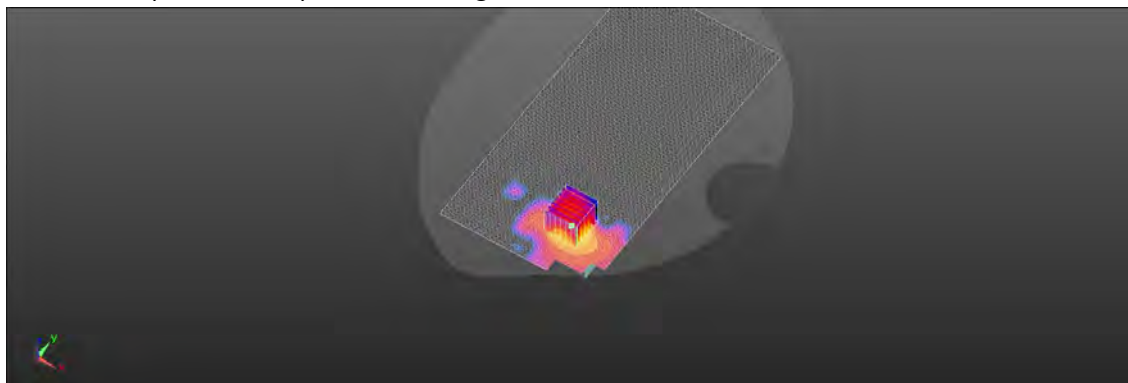

0 dB = 29.0 W/kg = 14.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/24

ID: 014

Report No. :TESA2405000290E5

LTE Band 2 (20MHz)_Body_Left Edge_CH 18700_QPSK_1-0_5mm

Communication System: LTE; Frequency: 1860 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1860 \text{ MHz}$; $\sigma = 1.445 \text{ S/m}$; $\epsilon_r = 39.736$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.17, 7.9, 8.07) @ 1860 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.743 V/m; Power Drift = 0.11 dB



Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.453 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 1.11 W/kg

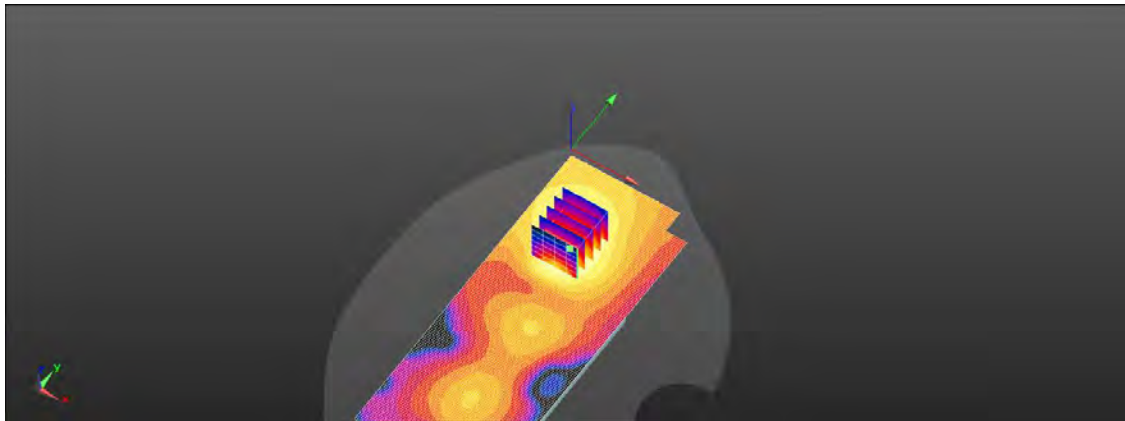

0 dB = 1.09 W/kg = 0.37 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/24

ID: 015

Report No. :TESA2405000290E5

LTE Band 4 (20MHz)_Body_Left Edge_CH 20300_QPSK_1-0_5mm

Communication System: LTE; Frequency: 1745 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.407 \text{ S/m}$; $\epsilon_r = 39.982$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.49, 8.17, 8.46) @ 1745 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.723 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.231 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 0.692 W/kg

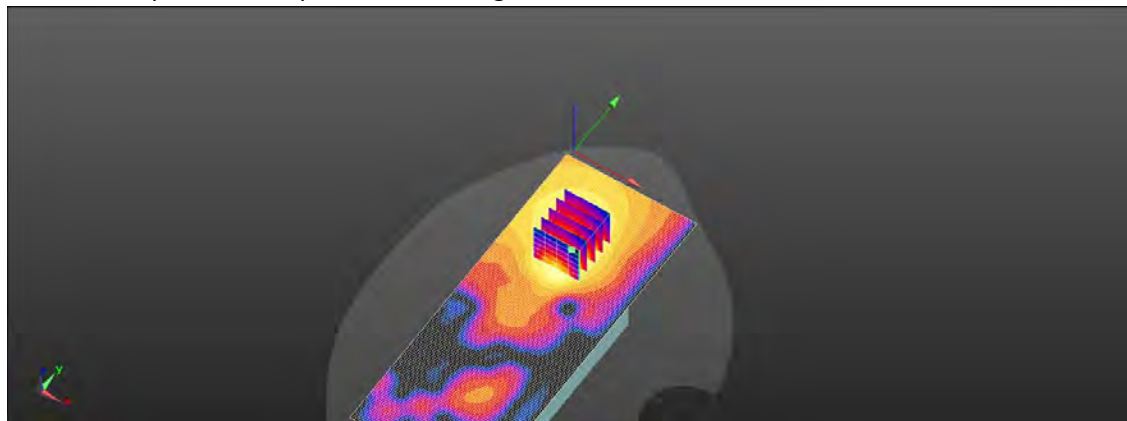

0 dB = 0.723 W/kg = -1.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/23

ID: 016

Report No. :TESA2405000290E5

LTE Band 5 (10MHz)_Body_Back Surface_CH 20600_QPSK_1-0_5mm

Communication System: LTE; Frequency: 844 MHz; Duty cycle= 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.771$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.5, 9.1, 9.44) @ 844 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.585 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.59 V/m; Power Drift = 0.17 dB



Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 0.608 W/kg

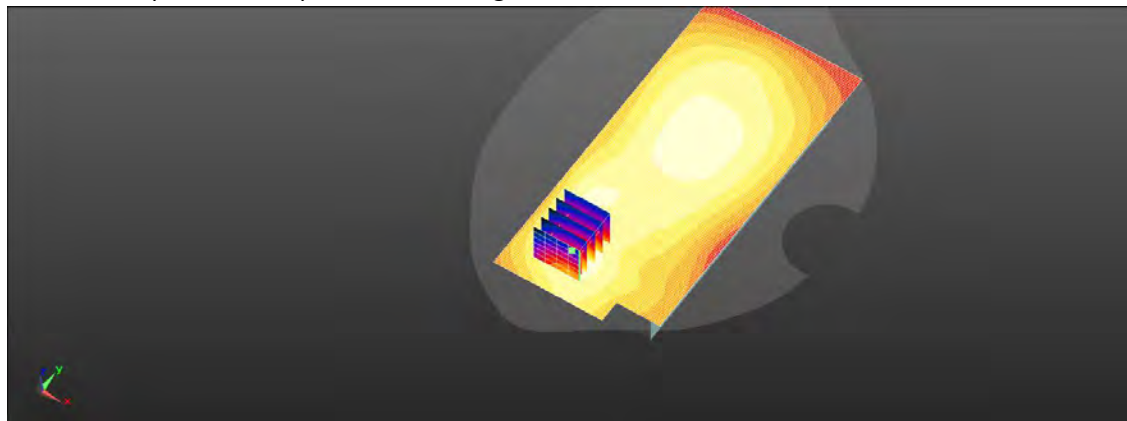

0 dB = 0.585 W/kg = -2.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/6/23

ID: 017

Report No. :TESA2405000290E5

LTE Band 12 (10MHz)_Body_Back Surface_CH 23060_QPSK_1-0_5mm

Communication System: LTE; Frequency: 704 MHz; Duty cycle= 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 42.26$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.57, 9.46, 9.78) @ 704 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.639 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.71 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 0.666 W/kg

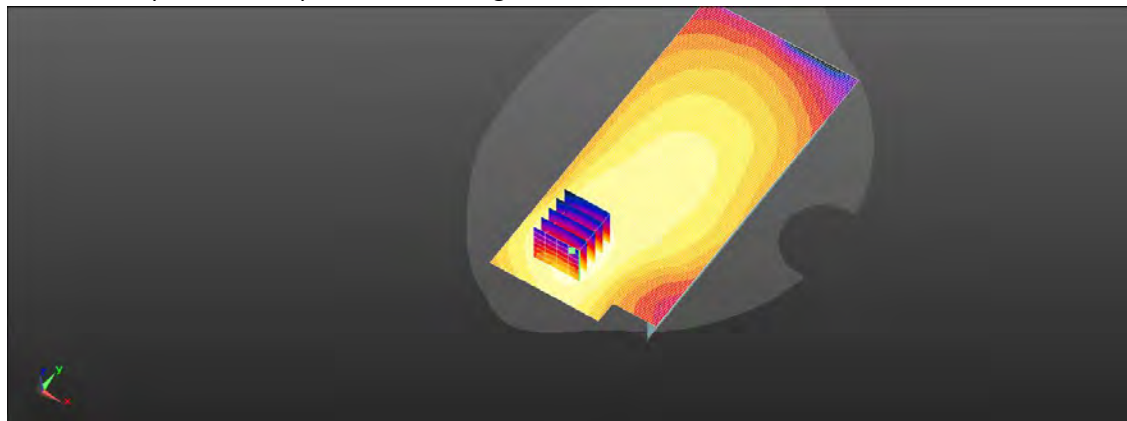

0 dB = 0.639 W/kg = -1.95 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/23

ID: 018

Report No. :TESA2405000290E5

LTE Band 13 (10MHz)_Body_Back Surface_CH 23230_QPSK_1-0_5mm

Communication System: LTE; Frequency: 782 MHz; Duty cycle= 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.892 \text{ S/m}$; $\epsilon_r = 41.861$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.57, 9.46, 9.78) @ 782 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.559 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.96 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 0.584 W/kg

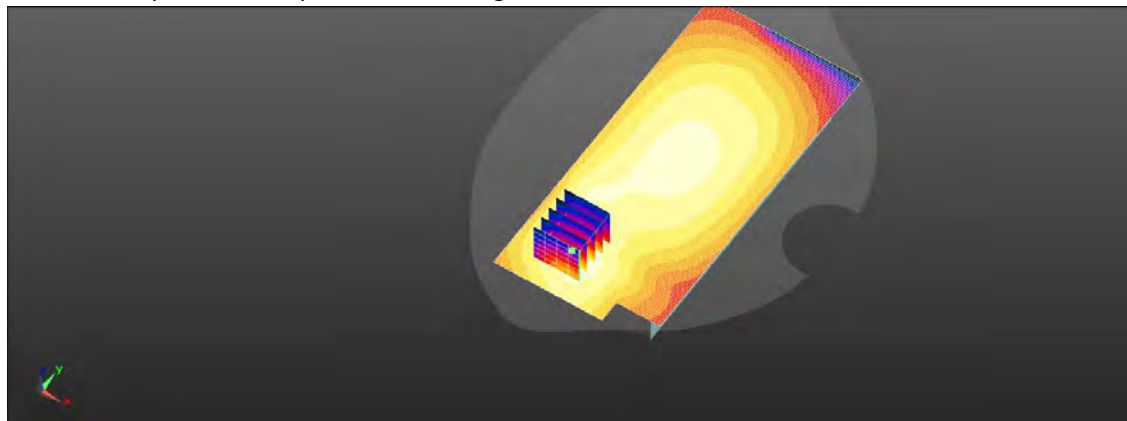

0 dB = 0.559 W/kg = -2.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/24

ID: 019

Report No. :TESA2405000290E5

LTE Band 66 (20MHz)_Body_Left Edge_CH 132572_QPSK_1-0_5mm

Communication System: LTE; Frequency: 1770 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1770 \text{ MHz}$; $\sigma = 1.424 \text{ S/m}$; $\epsilon_r = 39.875$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.49, 8.17, 8.46) @ 1770 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x151x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.936 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.615 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 0.856 W/kg

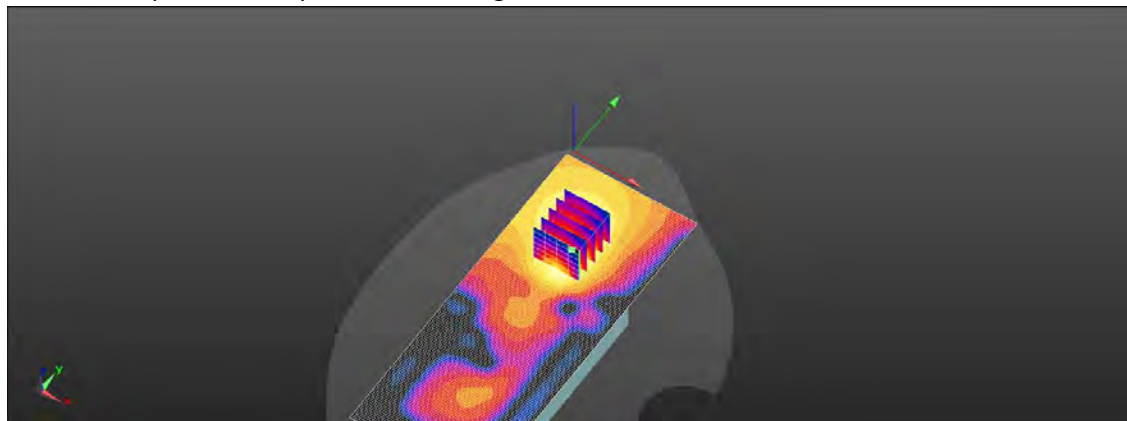

0 dB = 0.936 W/kg = -0.29 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/25

ID: 020

Report No. :TESA2405000290E5

WLAN 802.11b_Body_Top Edge_CH 11_5mm_Ant1

Communication System: WLAN 2.45G; Frequency: 2462 MHz; Duty cycle= 1:1.028

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.746 \text{ S/m}$; $\epsilon_r = 38.032$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(7.76, 7.48, 7.6) @ 2462 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.137 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.102 V/m; Power Drift = 0.15 dB



Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 0.122 W/kg

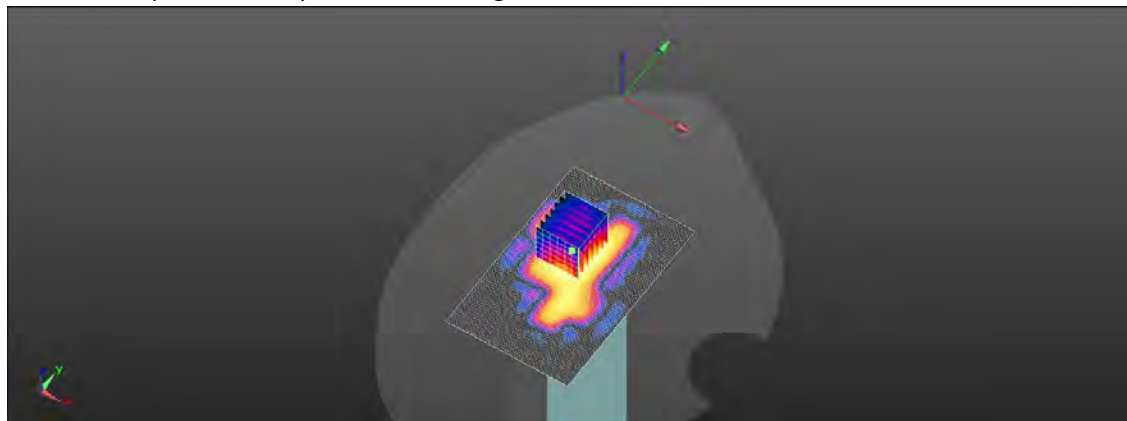

0 dB = 0.137 W/kg = -8.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/25

ID: 021

Report No. :TESA2405000290E5

WLAN 802.11n(40M) 2.4G_Body_Top Edge_CH 9_5mm_Ant1

Communication System: WLAN 2.45G; Frequency: 2452 MHz; Duty cycle= 1:1.117

Medium parameters used: $f = 2452 \text{ MHz}$; $\sigma = 1.738 \text{ S/m}$; $\epsilon_r = 38.046$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(7.76, 7.48, 7.6) @ 2452 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.165 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.942 V/m; Power Drift = 0.09 dB



Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.054 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.167 W/kg

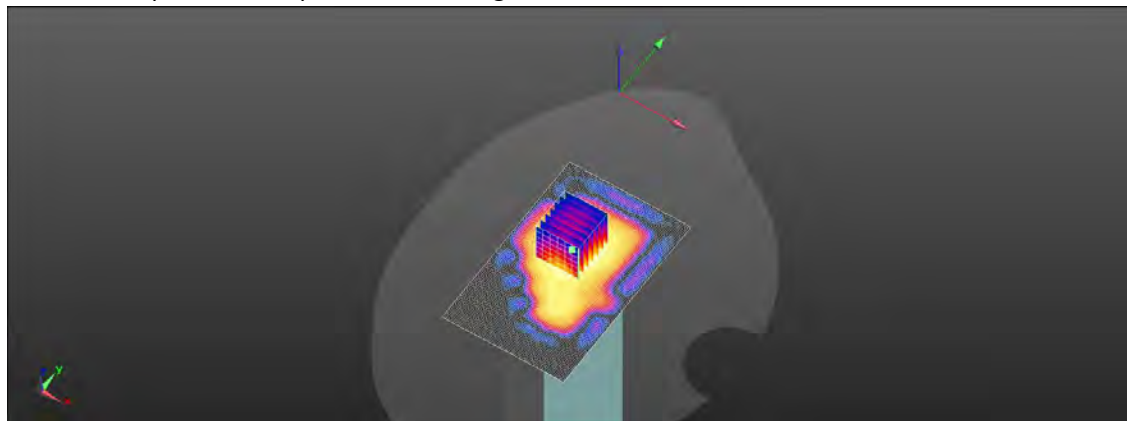

0 dB = 0.165 W/kg = -7.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/25

ID: 022

Report No. :TESA2405000290E5

Bluetooth(GFSK)_Body_Top Edge_CH 78_5mm_Ant1

Communication System: Bluetooth; Frequency: 2480 MHz; Duty cycle= 1:1.331

Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.763 \text{ S/m}$; $\epsilon_r = 38.008$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(7.76, 7.48, 7.6) @ 2480 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0696 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.627 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.0462 W/kg

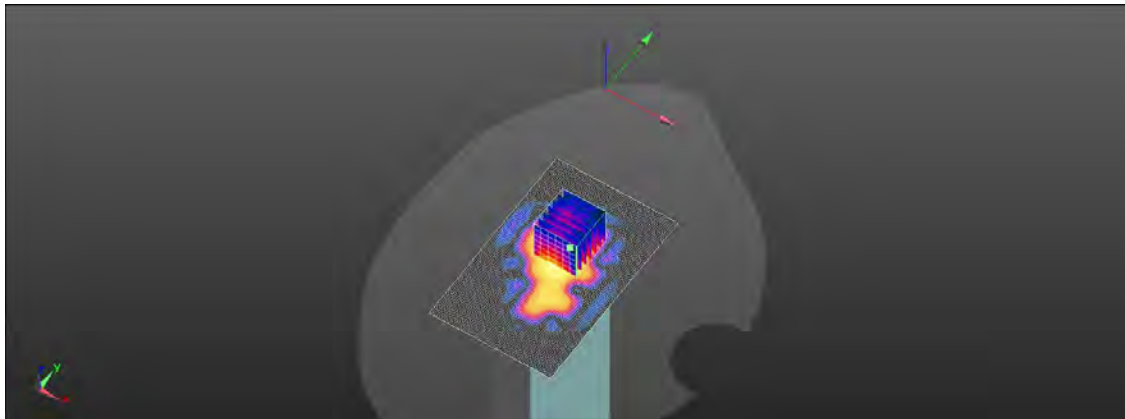

0 dB = 0.0696 W/kg = -11.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/26

ID: 023

Report No. : TESA2405000290E5

WLAN 802.11a 5.2G_Body_Back Surface_CH 44_5mm_Ant1

Communication System: WLAN 5G; Frequency: 5220 MHz; Duty cycle= 1:1.029

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 4.823 \text{ S/m}$; $\epsilon_r = 36.951$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(5.49, 5.39, 5.43) @ 5220 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (111x211x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.76 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.215 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 1.73 W/kg

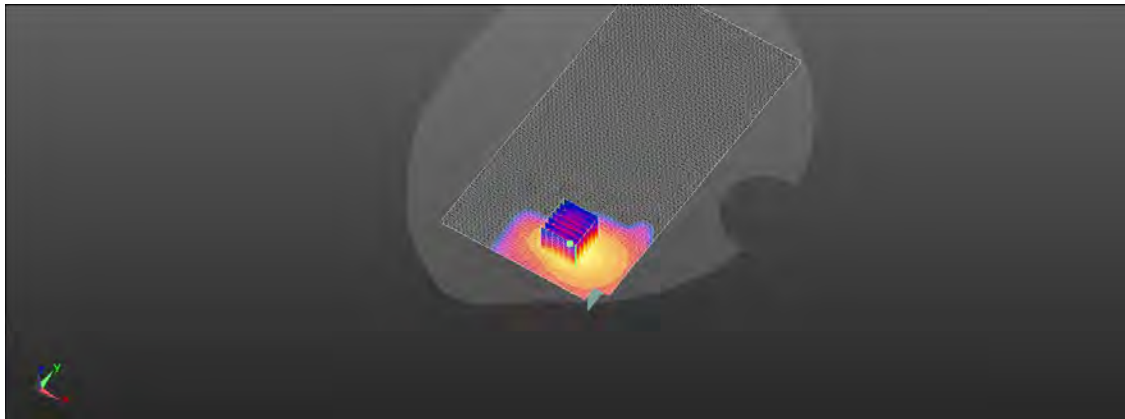

0 dB = 1.73 W/kg = 2.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/6/26

ID: 024

Report No. :TESA2405000290E5

WLAN 802.11a 5.3G_Body_Back Surface_CH 64_5mm_Ant1

Communication System: WLAN 5G; Frequency: 5320 MHz; Duty cycle= 1:1.029

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.922 \text{ S/m}$; $\epsilon_r = 36.843$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(5.49, 5.39, 5.43) @ 5320 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (111x211x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.09 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.521 V/m; Power Drift = 0.06 dB



Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 2.03 W/kg

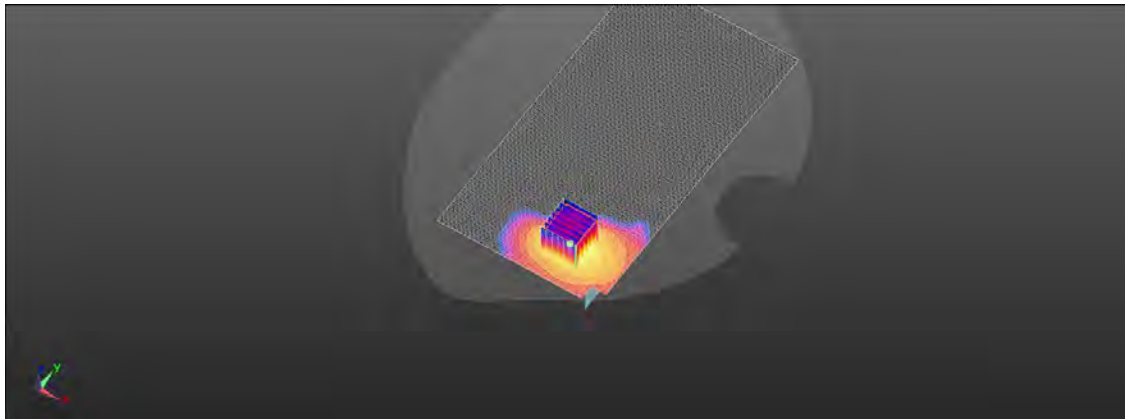

0 dB = 2.03 W/kg = 3.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/6/26

ID: 025

Report No. :TESA2405000290E5

WLAN 802.11a 5.6G_Body_Back Surface_CH 140_5mm_Ant1

Communication System: WLAN 5G; Frequency: 5700 MHz; Duty cycle= 1:1.029

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.318 \text{ S/m}$; $\epsilon_r = 36.458$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(4.89, 4.71, 4.77) @ 5700 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (111x211x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.68 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.984 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 1.62 W/kg

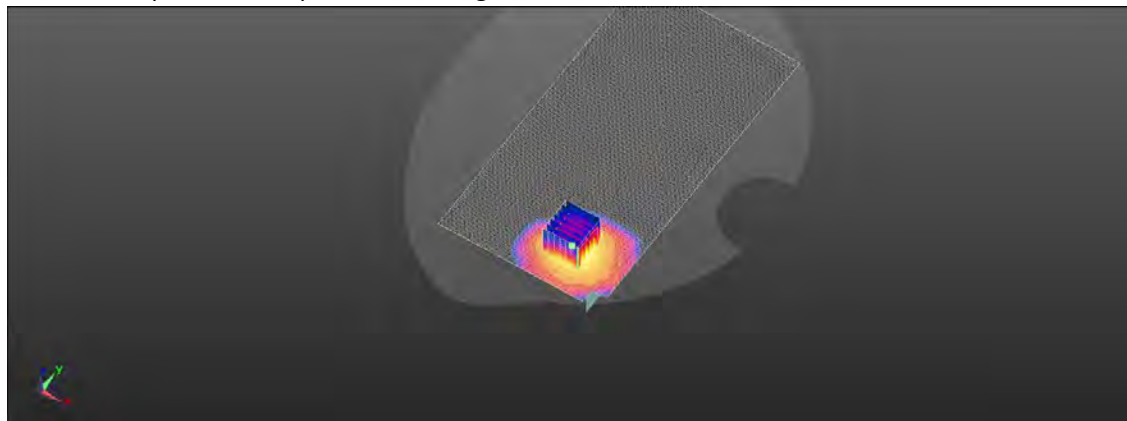

0 dB = 1.62 W/kg = 2.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/26

ID: 026

Report No. : TESA2405000290E5

WLAN 802.11a 5.8G_Body_Back Surface_CH 149_5mm_Ant1

Communication System: WLAN 5G; Frequency: 5745 MHz; Duty cycle= 1:1.029

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.363 \text{ S/m}$; $\epsilon_r = 36.411$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(4.89, 4.71, 4.77) @ 5745 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (111x211x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.67 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.722 V/m; Power Drift = 0.10 dB



Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 1.68 W/kg

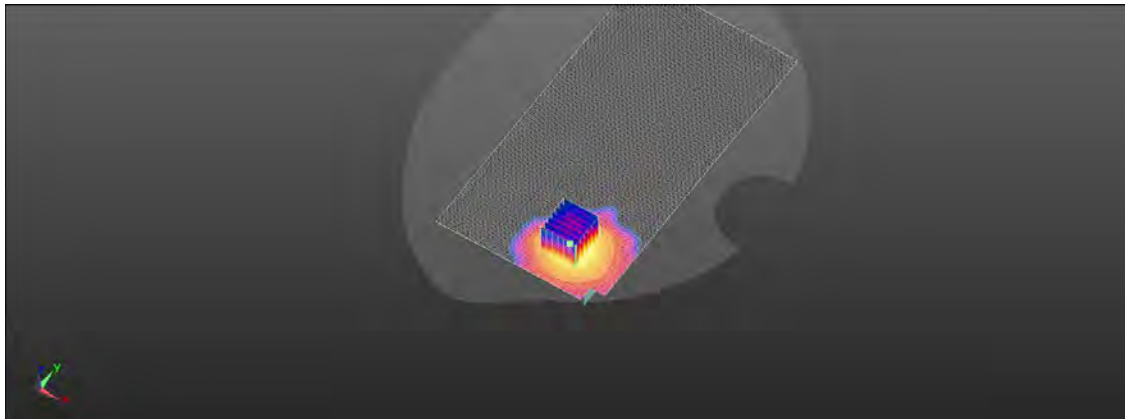

0 dB = 1.68 W/kg = 2.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

12 SAR SYSTEM CHECK RESULTS

Date: 2024/5/23

Report No. :TESA2405000290E5

Dipole 750 MHz_SN:1015

Communication System: CW; Frequency: 750 MHz; Duty cycle= 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 42.132$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.57, 9.46, 9.78) @ 750 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.63 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.85 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.38 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 68.4%

Maximum value of SAR (measured) = 2.60 W/kg

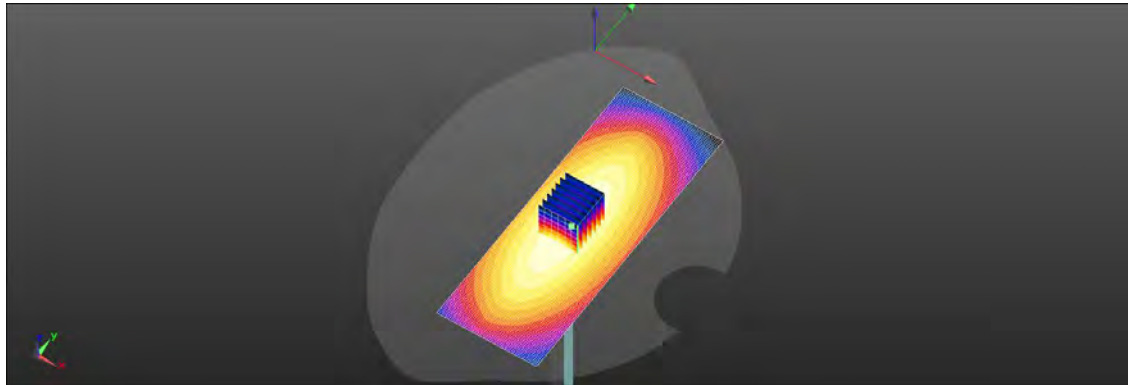

0 dB = 2.63 W/kg = 4.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/23

Report No. :TESA2405000290E5

Dipole 835 MHz_SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty cycle= 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 41.901$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.5, 9.1, 9.44) @ 835 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 3.05 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.91 V/m; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 3.82 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.59 W/kg

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

Maximum value of SAR (measured) = 3.06 W/kg

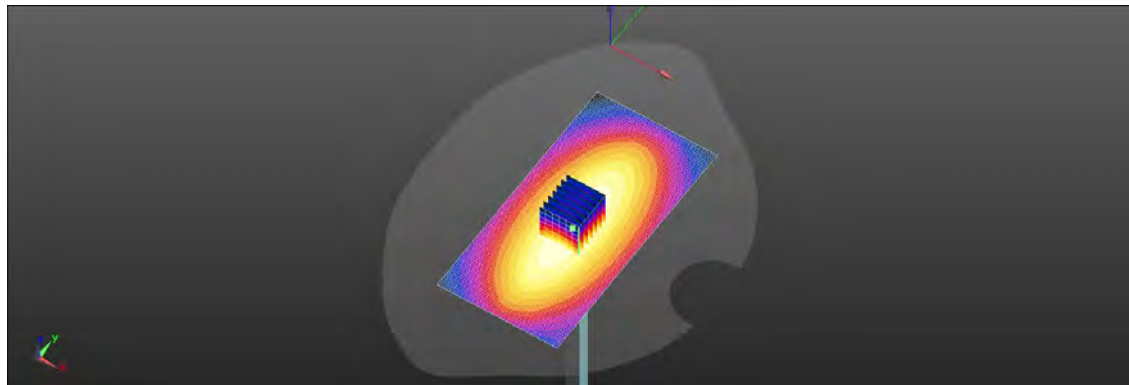

0 dB = 3.05 W/kg = 4.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/23

Report No. :TESA2405000290E5

Dipole 1750 MHz_SN:1158

Communication System: CW; Frequency: 1750 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.422 \text{ S/m}$; $\epsilon_r = 40.924$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.49, 8.17, 8.46) @ 1750 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (41x71x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 12.6 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.22 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 8.79 W/kg; SAR(10 g) = 4.8 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 12.0 W/kg

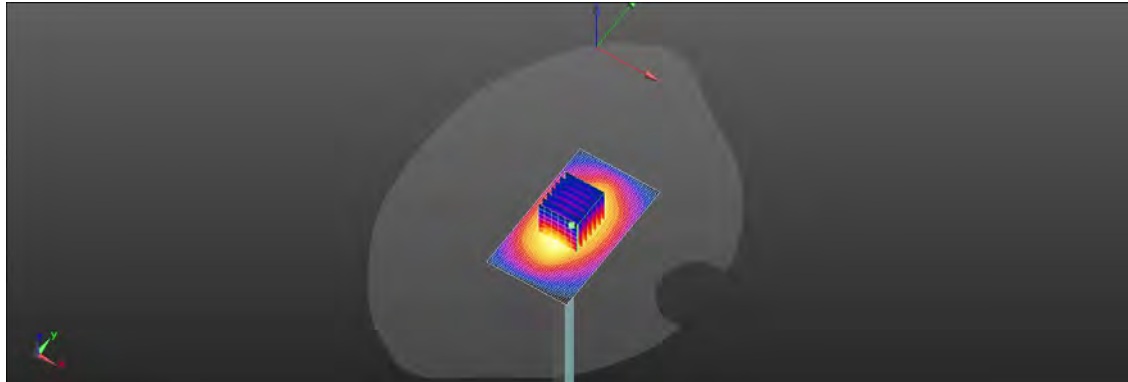

0 dB = 12.6 W/kg = 11.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/5/23

Report No. : TESA2405000290E5

Dipole 1900 MHz_SN:5d173

Communication System: CW; Frequency: 1900 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.465 \text{ S/m}$; $\epsilon_r = 40.807$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.17, 7.9, 8.07) @ 1900 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.39 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.64 W/kg; SAR(10 g) = 5.38 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 13.2 W/kg

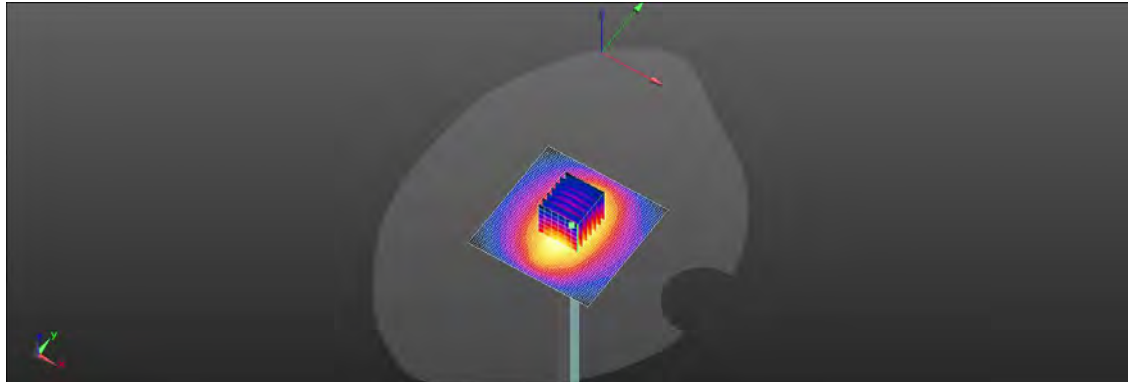

0 dB = 13.1 W/kg = 11.18 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/24

Report No. :TESA2405000290E5

Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.744$ S/m; $\epsilon_r = 38.174$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(7.76, 7.48, 7.6) @ 2450 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x51x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 22.7 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.5 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.33 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 20.6 W/kg

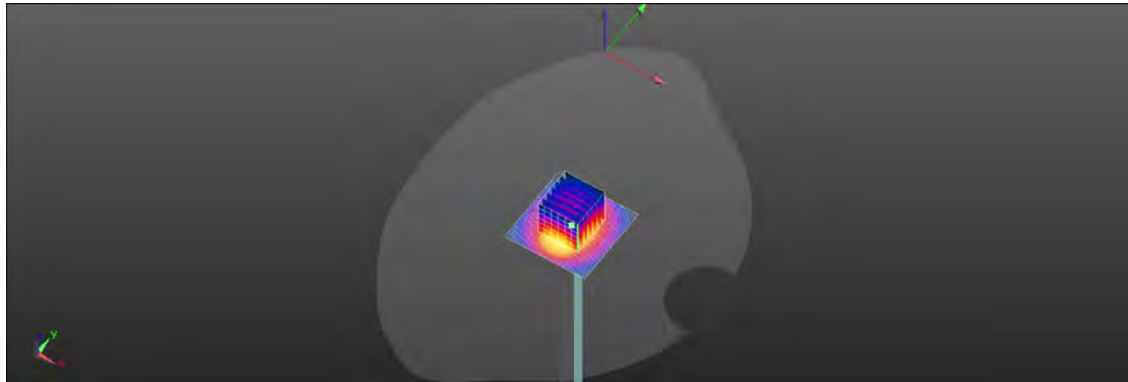

0 dB = 22.7 W/kg = 13.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/5/25

Report No. :TESA2405000290E5

Dipole 5250 MHz_SN:1023

Communication System: CW; Frequency: 5250 MHz; Duty cycle= 1:1

Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.862 \text{ S/m}$; $\epsilon_r = 37.069$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(5.49, 5.39, 5.43) @ 5250 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 18.0 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 60.51 V/m; Power Drift = -0.12 dB



Peak SAR (extrapolated) = 33.9 W/kg

SAR(1 g) = 8.36 W/kg; SAR(10 g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 17.9 W/kg

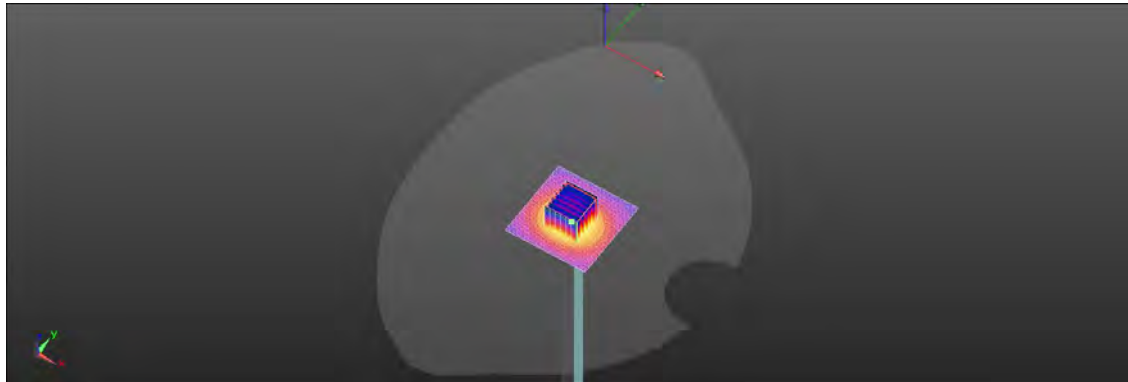

0 dB = 17.9 W/kg = 12.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/5/25

Report No. :TESA2405000290E5

Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.228$ S/m; $\epsilon_r = 36.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(4.82, 4.64, 4.68) @ 5600 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.63 V/m; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 41.2 W/kg

SAR(1 g) = 8.77 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 19.2 W/kg

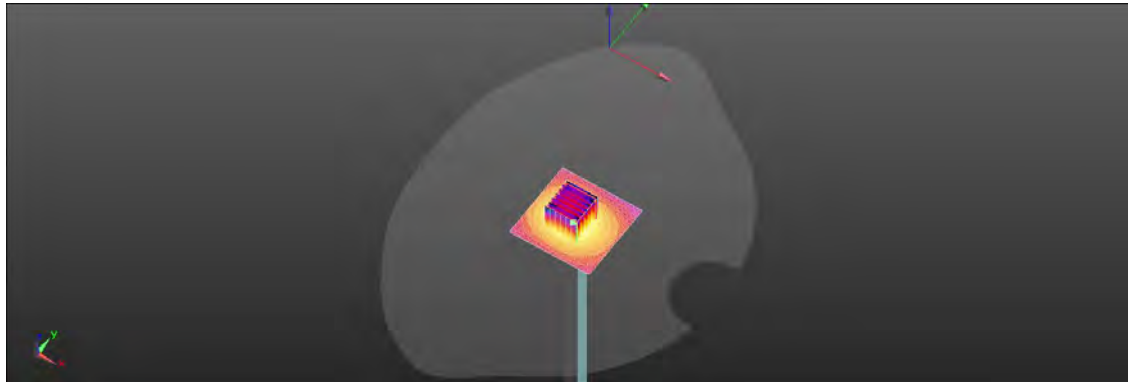

0 dB = 19.2 W/kg = 12.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/5/25

Report No. :TESA2405000290E5

Dipole 5750 MHz_SN:1023

Communication System: CW; Frequency: 5750 MHz; Duty cycle= 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.386 \text{ S/m}$; $\epsilon_r = 36.446$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(4.89, 4.71, 4.77) @ 5750 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.5 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.23 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 36.3 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.34 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 16.9 W/kg

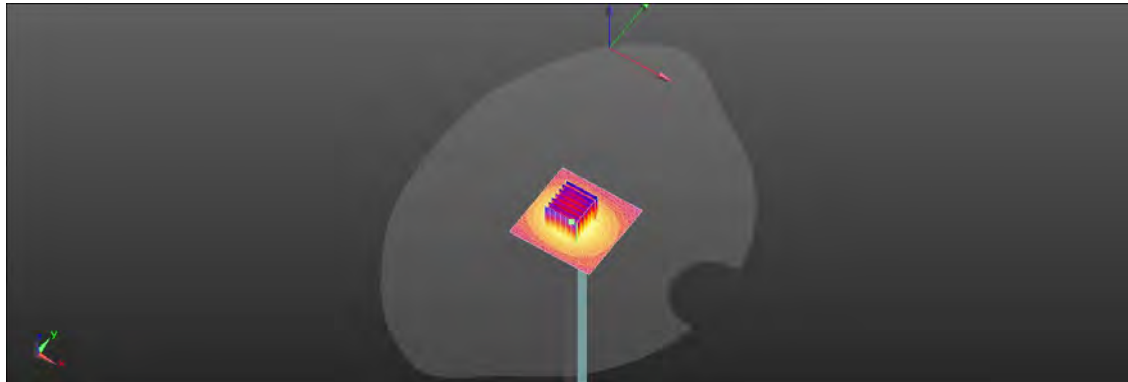

0 dB = 16.9 W/kg = 12.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/23

Report No. :TESA2405000290E5

Dipole 750 MHz_SN:1015

Communication System: CW; Frequency: 750 MHz; Duty cycle= 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.888 \text{ S/m}$; $\epsilon_r = 42.009$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.57, 9.46, 9.78) @ 750 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.59 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.49 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.4 W/kg

Smallest distance from peaks to all points 3 dB below = 21.3 mm

Ratio of SAR at M2 to SAR at M1 = 67.9%

Maximum value of SAR (measured) = 2.62 W/kg

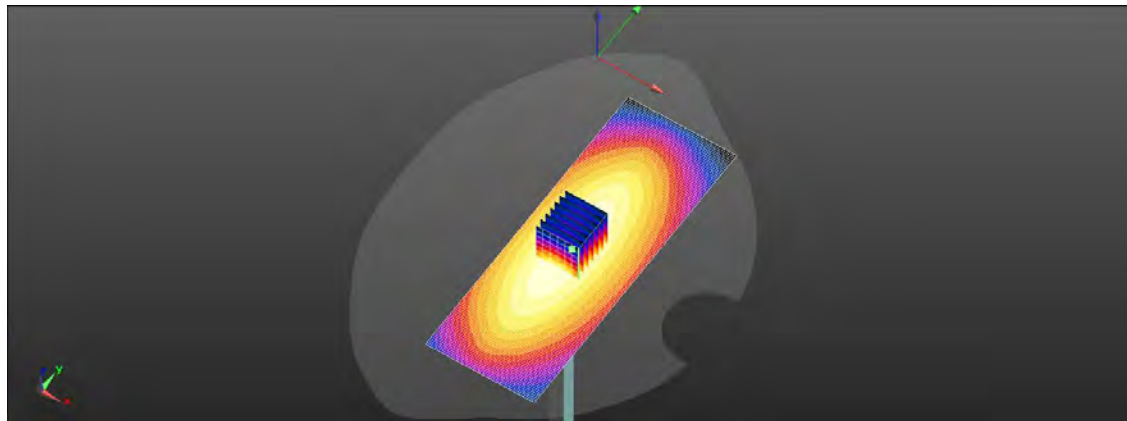

0 dB = 2.59 W/kg = 4.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/6/23

Report No. :TESA2405000290E5

Dipole 835 MHz_SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty cycle= 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 41.778$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(9.5, 9.1, 9.44) @ 835 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (41x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.87 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.22 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 3.43 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.53 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 67.3%

Maximum value of SAR (measured) = 2.92 W/kg

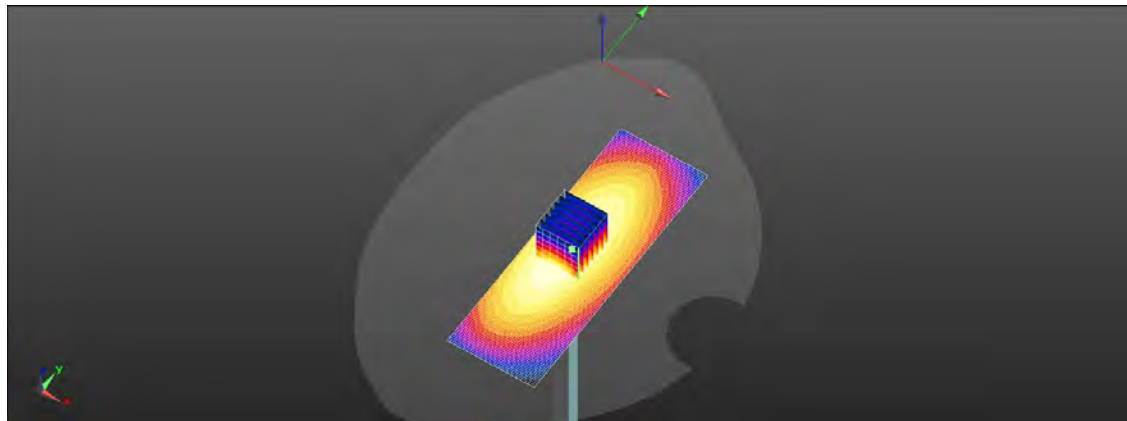

0 dB = 2.87 W/kg = 4.59 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/6/24

Report No. :TESA2405000290E5

Dipole 1750 MHz_SN:1158

Communication System: CW; Frequency: 1750 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 39.977$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.49, 8.17, 8.46) @ 1750 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (41x71x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 14.3 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.31 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.39 W/kg; SAR(10 g) = 4.79 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 13.8 W/kg

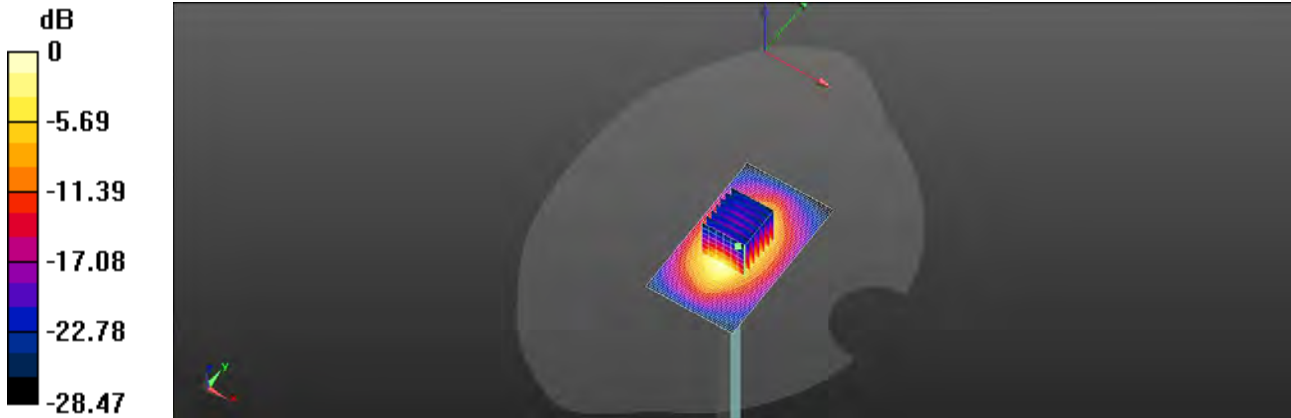

0 dB = 14.3 W/kg = 11.56 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/6/24

Report No. :TESA2405000290E5

Dipole 1900 MHz_SN:5d173

Communication System: CW; Frequency: 1900 MHz; Duty cycle= 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 40.684$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(8.17, 7.9, 8.07) @ 1900 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.4 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.39 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.8 W/kg; SAR(10 g) = 5.44 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 13.5 W/kg

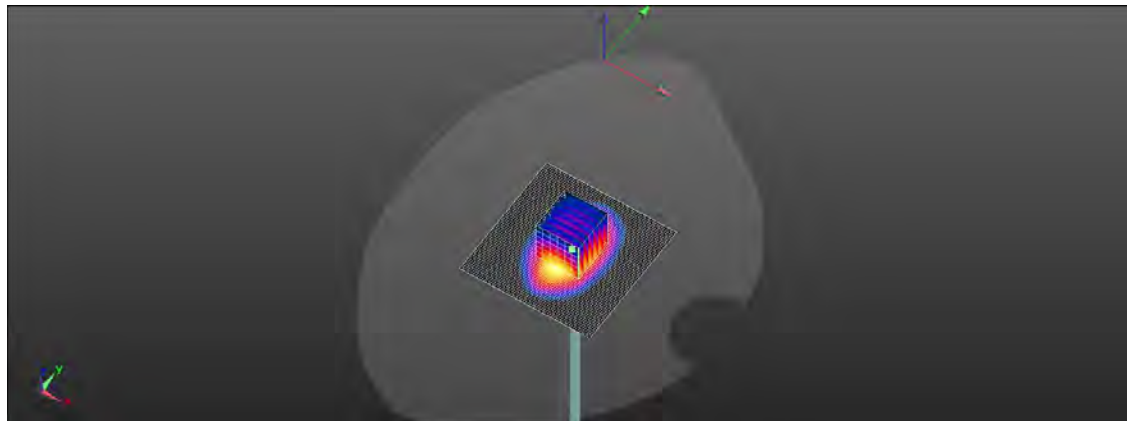

0 dB = 13.5 W/kg = 11.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/6/25

Report No. :TESA2405000290E5

Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.734 \text{ S/m}$; $\epsilon_r = 38.055$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(7.76, 7.48, 7.6) @ 2450 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x51x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 19.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.86 V/m; Power Drift = -0.12 dB



Peak SAR (extrapolated) = 23.0 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 6.44 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 18.2 W/kg

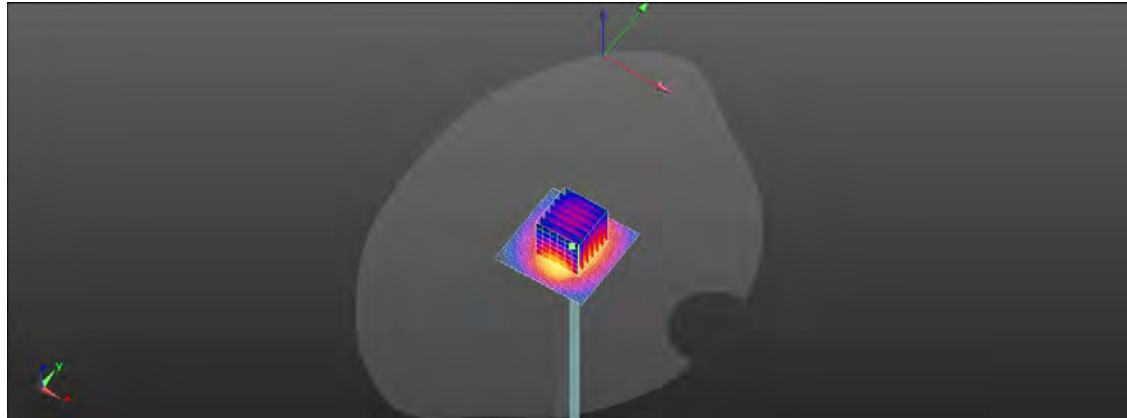

0 dB = 19.1 W/kg = 12.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/25

Report No. :TESA2405000290E5

Dipole 5250 MHz_SN:1023

Communication System: CW; Frequency: 5250 MHz; Duty cycle= 1:1

Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.851 \text{ S/m}$; $\epsilon_r = 36.924$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(5.49, 5.39, 5.43) @ 5250 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 13.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.23 V/m; Power Drift = -0.11 dB



Peak SAR (extrapolated) = 24.5 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.35 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 14.3 W/kg

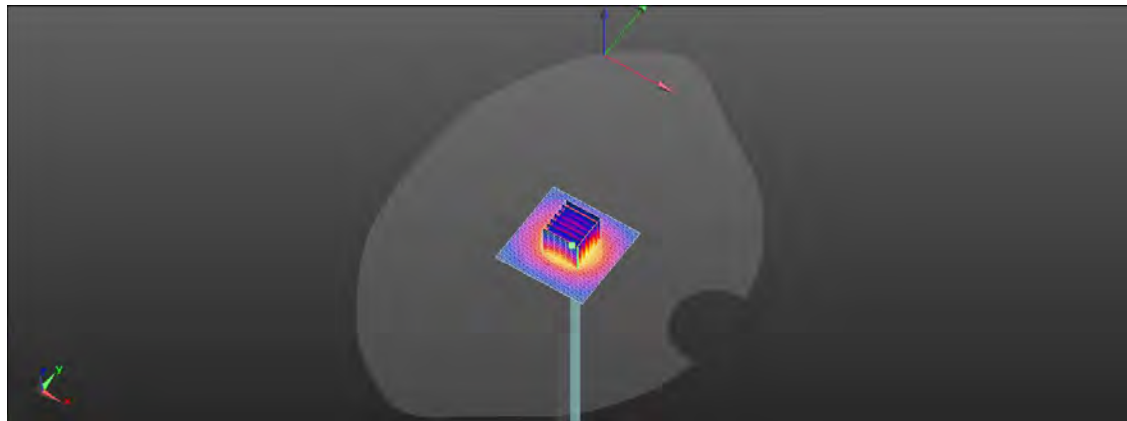

0 dB = 14.3 W/kg = 11.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2024/6/26

Report No. :TESA2405000290E5

Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.219 \text{ S/m}$; $\epsilon_r = 36.534$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(4.82, 4.64, 4.68) @ 5600 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 14.7 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 58.69 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 26.3 W/kg

SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 15.2 W/kg

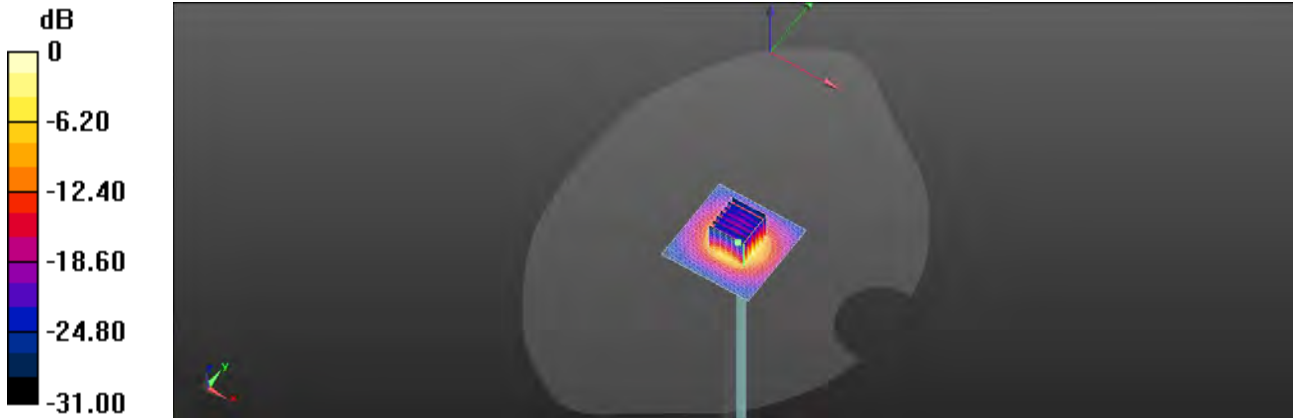

0 dB = 15.2 W/kg = 11.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2024/6/26

Report No. :TESA2405000290E5

Dipole 5750 MHz_SN:1023

Communication System: CW; Frequency: 5750 MHz; Duty cycle= 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.372 \text{ S/m}$; $\epsilon_r = 36.397$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7712; ConvF(4.89, 4.71, 4.77) @ 5750 MHz; Calibrated: 2024/4/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2023/9/14
- Phantom: SAM
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x61x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 14.0 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.76 V/m; Power Drift = -0.07 dB



Peak SAR (extrapolated) = 25.5 W/kg

SAR(1 g) = 7.49 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 14.6 W/kg

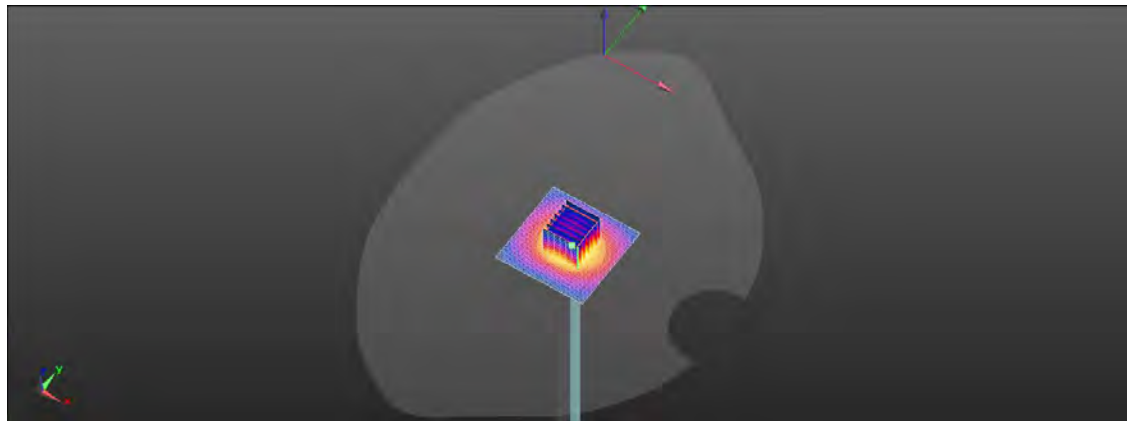

0 dB = 14.6 W/kg = 11.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

13 APPENDIXES

Refer to separated files for the following appendixes.

13.1 SAR_Appendix A Photographs

13.2 SAR_Appendix B DAE & Probe Cal. Certificate

13.3 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.