


Page: 166 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 3 **Test Date** :2021-07-29

**Test Frequency** :5610 MHz Temp./Humi. :21.4/64 Test Mode :TX CH MID Antenna Pol. :Vertical

**EUT Pol** :H Plane :Andy Wang Engineer

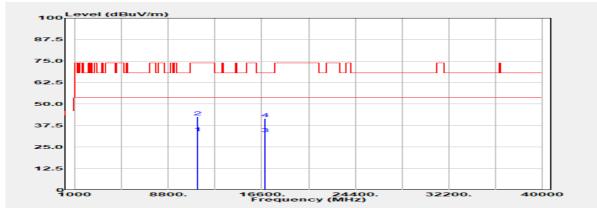

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
•	Mode	Reading Level		FS	@3m	· ·
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1711 12	111/0/1///	чъμν	uБ	αυμν/π	αυμν/ιιι	uБ
11220.000	Average	25.65	7.62	33.27	54.00	-20.73
11220.000	Peak	35.03	7.62	42.65	74.00	-31.35
16830.000	Average	24.85	7.91	32.76	54.00	-21.24
16830.000	Peak	33.74	7.91	41.65	68.20	-26.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 167 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 3 **Test Date** :2021-07-29

**Test Frequency** :5610 MHz Temp./Humi. :21.4/64

Test Mode :TX CH MID Antenna Pol. :Horizontal

**EUT Pol** :H Plane :Andy Wang Engineer

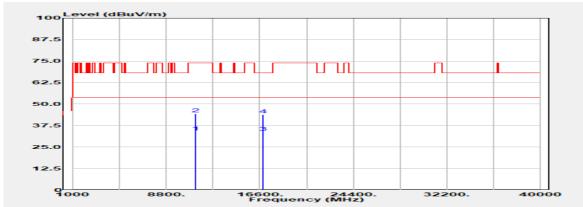

_		<u> </u>				
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
•	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
		4261		usp (7111	42 pt 77	
11220.000	Average	26.13	7.62	33.74	54.00	-20.26
11220.000	Peak	36.77	7.62	44.39	74.00	-29.61
11220.000	reak	30.77	1.02	44.59	74.00	-29.01
16830.000	Average	25.78	7.91	33.69	54.00	-20.31
16830.000	Peak	35.99	7.91	43.89	68.20	-24.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 168 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 4 **Test Date** :2021-07-29

**Test Frequency** :5775 MHz Temp./Humi. :21.4/64 Test Mode :TX CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane :Andy Wang Engineer

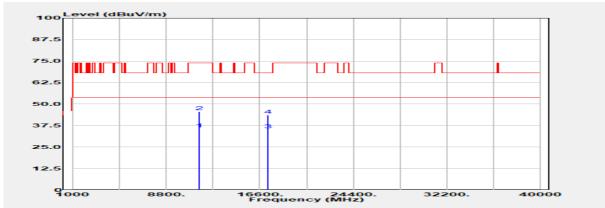

	Ггод	Detector	Chastrum	Costor	Actual	Limit	Morgin
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dBuV	dB	dBµV/m	dBµV/m	dB
-	1411 12	110/00/1///	αυμν	<u> </u>	аБр ү/ш	аБр ү/ш	<u> </u>
	11550.000	Average	26.63	8.91	35.54	54.00	-18.46
		•					
	11550.000	Peak	36.69	8.91	45.60	74.00	-28.40
	17325.000	Average	25.81	9.35	35.16	54.00	-18.84
	17325.000	Peak	34.33	9.35	43.68	68.20	-24.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 169 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 4 **Test Date** :2021-07-29

**Test Frequency** :5775 MHz Temp./Humi. :21.4/64

Test Mode :TX CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane :Andy Wang Engineer

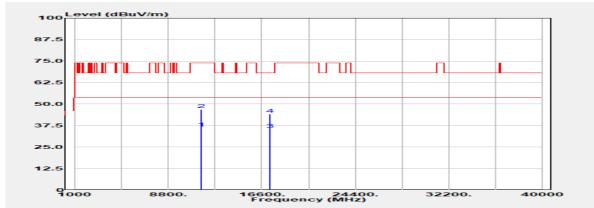

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
11550.000	Average	27.08	8.91	35.99	54.00	-18.01
11550.000	Peak	38.00	8.91	46.90	74.00	-27.10
17325.000	Average	25.94	9.35	35.29	54.00	-18.71
17325.000	Peak	34.70	9.35	44.05	68.20	-24.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 170 of 221

## 11.7.2 Band edge falling to restricted band


:E2/2021/70042 Report Number Test Site :SAC D

**Operation Mode** :802.11a / Band 1 **Test Date** :2021-07-27

Test Frequency :5180 MHz Temp./Humi. :21.9/64

:Vertical Test Mode :BE CH LOW Antenna Pol.

**EUT Pol** :Andy Wang :H Plane Engineer

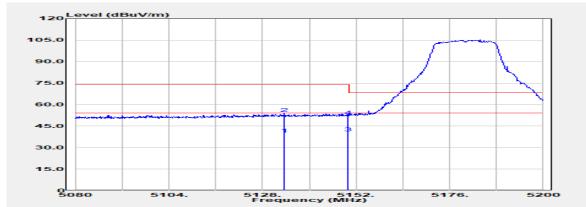

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5133.640	Average	41.72	-2.32	39.40	54.00	-14.60
5133.640	Peak	56.14	-2.32	53.82	74.00	-20.18
5150.000	Average	42.69	-2.53	40.16	54.00	-13.84
5150.000	Peak	54.64	-2.53	52.11	74.00	-21.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

\*\*SCS\_Tailors\*\* | No.1344 | No.1944 | No.1945 | No.1944 | No.1944 | No.1945 | No.1944 | No.1945 | No.1944 | No.1944 | No.1945 | N

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 171 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 1 **Test Date** :2021-07-27

**Test Frequency** :5180 MHz Temp./Humi. :21.9/64

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane :Andy Wang Engineer

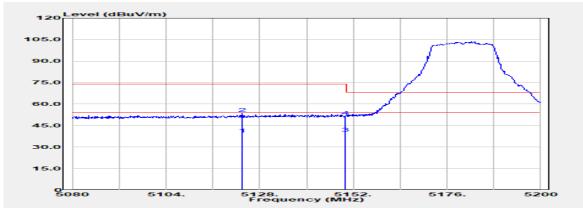

		_				
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
•	Mode	Reading Level		FS	@3m	· ·
		•			_	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
		•		•	•	
5123.560	Average	41.26	<b>-</b> 2.23	39.03	54.00	-14.97
5123.560	Peak	55.63	-2.23	53.40	74.00	-20.60
			_			
5150.000	Average	42.14	-2.53	39.61	54.00	-14.39
5150.000	Peak	53.91	-2.53	51.38	74.00	-22.62
0.00.000	. Jul	00.01		01.00		0_

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 172 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 2 **Test Date** :2021-07-27

**Test Frequency** :5320 MHz Temp./Humi. :21.9/64 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane :Andy Wang Engineer

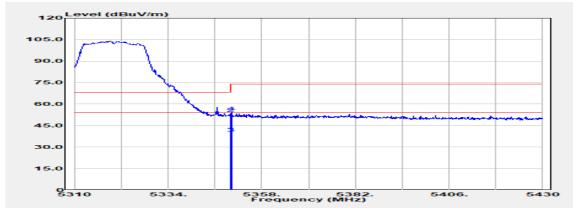

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5350.000	Average	42.62	-2.66	39.95	54.00	-14.05
5350.000	Peak	56.29	-2.66	53.63	74.00	-20.37
5350.200	Average	42.49	-2.67	39.81	54.00	-14.19
5350.200	Peak	57.02	-2.67	54.35	74.00	-19.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 173 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 2 **Test Date** :2021-07-27

**Test Frequency** :5320 MHz Temp./Humi. :21.9/64

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane :Andy Wang Engineer

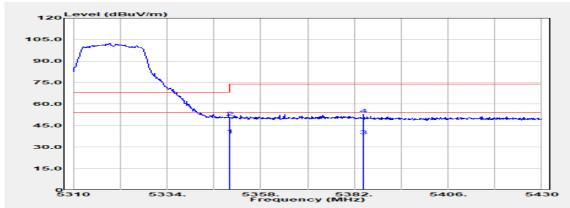

	_						
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	•	Mode	Reading Level		FS	@3m	
	N 41 1		•	ID.		_	ı.
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
_							
	5350.000	Average	41.13	-2.66	38.47	54.00	-15.53
	5350.000	Peak	53.40	-2.66	50.74	74.00	-23.26
	5550.000	reak	55.40	-2.00	30.74	74.00	-23.20
	5384.280	Average	40.24	-2.42	37.81	54.00	-16.19
		•		2.12			
	5384.280	Peak	55.50	-2.42	53.08	74.00	-20.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 174 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 3 **Test Date** :2021-07-27

**Test Frequency** :5500 MHz Temp./Humi. :21.9/64 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane :Andy Wang Engineer

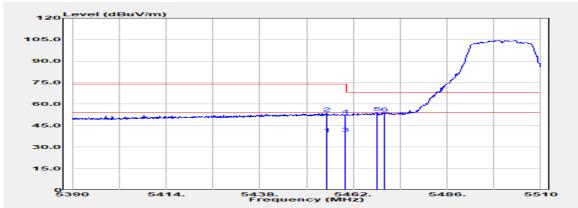

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
5455.280	Average	41.84	-2.29	39.55	54.00	-14.45
5455.280	Peak	56.06	-2.29	53.77	74.00	-20.23
5460.000	Average	41.92	-2.18	39.74	54.00	-14.26
5460.000	Peak	54.58	-2.18	52.40	74.00	-21.60
5468.000	Peak	56.35	-2.31	54.04	68.20	-14.16
5470.000	Peak	56.09	-2.35	53.74	68.20	-14.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 175 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 3 **Test Date** :2021-07-27

**Test Frequency** :5500 MHz Temp./Humi. :21.9/64

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane :Andy Wang Engineer

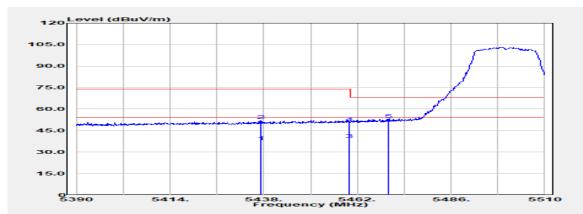

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBµV/m	dB
5437.400	Average	39.83	-2.42	37.41	54.00	-16.59
5437.400	Peak	54.56	-2.42	52.14	74.00	-21.86
5460.000	Average	40.95	-2.18	38.77	54.00	-15.23
5460.000	Peak	52.69	-2.18	50.51	74.00	-23.49
5470.000	Peak	54.83	-2.35	52.49	68.20	-15.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 176 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 3 **Test Date** :2021-07-27

**Test Frequency** :5700 MHz Temp./Humi. :21.9/64 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane :Andy Wang Engineer

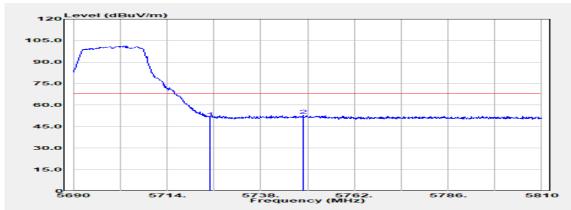

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	5725.000	Peak	53.09	-1.98	51.11	68.20	-17.09
	5748.920	Peak	54.24	-1.18	53.05	68.20	-15.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 177 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 3 **Test Date** :2021-07-27

**Test Frequency** :5700 MHz Temp./Humi. :21.9/64

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane :Andy Wang Engineer

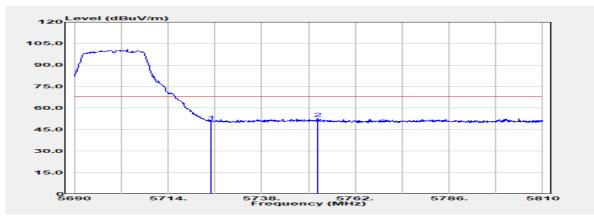

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
	<b>5</b> .	=0 =4	4.00	-0-1		1= 10
5725.000	Peak	52.71	-1.98	50.74	68.20	-17.46
5752.280	Peak	54.36	-1.29	53.07	68.20	-15.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 178 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 3-4 **Test Date** :2021-07-28

**Test Frequency** :5720 MHz Temp./Humi. :21.7/62 Test Mode :BE CH MID Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

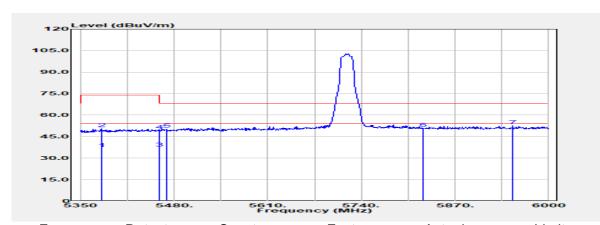

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBμV/m	dB
Average	39.00	-2.28	36.71	54.00	-17.29
Peak	52.84	-2.28	50.56	74.00	-23.44
Average	39.11	-2.18	36.92	54.00	-17.08
Peak	51.52	-2.18	49.34	74.00	-24.66
Peak	52.47	-2.35	50.12	68.20	-18.08
Peak	52.49	-1.60	50.90	68.20	-17.30
Peak	53.74	-1.16	52.58	68.20	-15.62
	Mode PK/QP/AV  Average Peak Average Peak Peak Peak	Mode PK/QP/AV Reading Level dBµV  Average 39.00 Peak 52.84 Average 39.11 Peak 51.52 Peak 52.47 Peak 52.49	Mode PK/QP/AV         Reading Level dBμV         dB           Average Peak         39.00         -2.28           Peak         52.84         -2.28           Average         39.11         -2.18           Peak         51.52         -2.18           Peak         52.47         -2.35           Peak         52.49         -1.60	Mode PK/QP/AVReading Level dBμVFS dBμV/mAverage39.00-2.2836.71Peak52.84-2.2850.56Average39.11-2.1836.92Peak51.52-2.1849.34Peak52.47-2.3550.12Peak52.49-1.6050.90	Mode PK/QP/AV         Reading Level dBμV         FS dBμV/m         @3m dBμV/m           Average         39.00         -2.28         36.71         54.00           Peak         52.84         -2.28         50.56         74.00           Average         39.11         -2.18         36.92         54.00           Peak         51.52         -2.18         49.34         74.00           Peak         52.47         -2.35         50.12         68.20           Peak         52.49         -1.60         50.90         68.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sgs.com.tw



Page: 179 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 3-4 **Test Date** :2021-07-28

**Test Frequency** :5720 MHz Temp./Humi. :21.7/62

Test Mode :BE CH MID Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

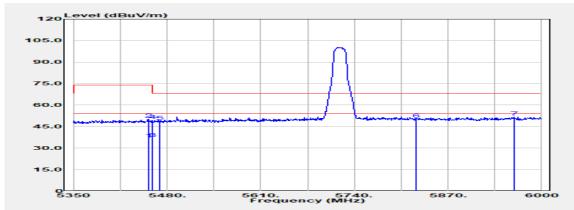

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5454.000	Average	38.85	-2.32	36.53	54.00	-17.47
5454.000	Peak	52.42	-2.32	50.10	74.00	-23.90
5460.000	Average	38.88	-2.18	36.70	54.00	-17.30
5460.000	Peak	51.37	-2.18	49.19	74.00	-24.81
5470.000	Peak	51.16	-2.35	48.81	68.20	-19.39
5825.000	Peak	51.79	-1.60	50.19	68.20	-18.01
5961.650	Peak	52.48	-0.79	51.68	68.20	-16.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 180 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5745 MHz Temp./Humi. :21.9/64 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane :Andy Wang Engineer

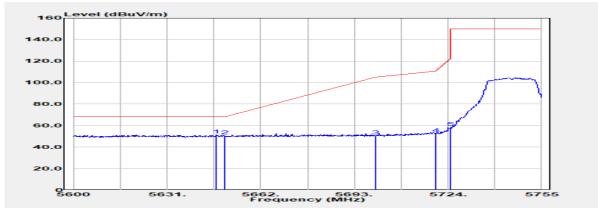

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
		•				
5647.275	Peak	53.70	-2.23	51.47	68.20	-16.73
5650.000	Peak	52.64	-2.20	50.44	68.20	-17.76
5700.000	Peak	52.60	-2.17	50.43	105.20	-54.77
5720.000	Peak	54.14	-1.70	52.45	110.80	-58.35
5725.000	Peak	59.93	-1.98	57.95	122.20	-64.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sgs.com.tw



Page: 181 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5745 MHz Temp./Humi. :21.9/64

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane :Andy Wang Engineer

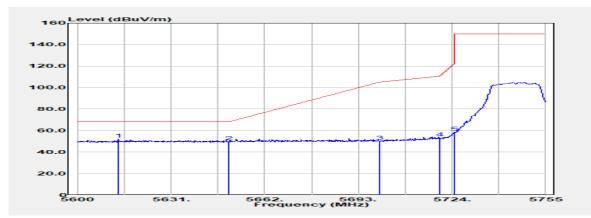

Detector	Spectrum	Factor	Actual	Limit	Margin
	•		. •	_	
PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
Peak	54.27	-2.29	51.98	68.20	-16.22
Peak	51.85	-2.20	49.65	68.20	-18.55
Peak	52.19	-2.17	50.02	105.20	-55.18
Peak	55.07	-1.70	53.37	110.80	-57.43
Peak	60.50	-1.98	58.53	122.20	-63.67
	Mode PK/QP/AV Peak Peak Peak Peak	Mode PK/QP/AV Reading Level dBμV  Peak 54.27 Peak 51.85 Peak 52.19 Peak 55.07	Mode PK/QP/AV         Reading Level dBμV         dB           Peak         54.27         -2.29           Peak         51.85         -2.20           Peak         52.19         -2.17           Peak         55.07         -1.70	Mode PK/QP/AV         Reading Level dBμV         FS dBμV/m           Peak         54.27         -2.29         51.98           Peak         51.85         -2.20         49.65           Peak         52.19         -2.17         50.02           Peak         55.07         -1.70         53.37	Mode PK/QP/AV         Reading Level dBμV         FS dBμV/m         @3m dBμV/m           Peak         54.27         -2.29         51.98         68.20           Peak         51.85         -2.20         49.65         68.20           Peak         52.19         -2.17         50.02         105.20           Peak         55.07         -1.70         53.37         110.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

台灣檢驗科技股份有限公司




Page: 182 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5825 MHz Temp./Humi. :21.9/64 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane :Andy Wang Engineer

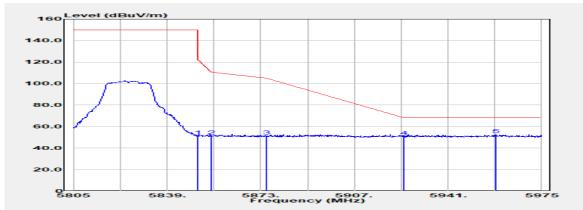

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
5850.000	Peak	52.73	-1.57	51.16	122.20	-71.04
5855.000	Peak	52.73	-1.42	51.31	110.80	-59.49
5875.000	Peak	52.87	-1.42	51.44	105.20	-53.76
5925.000	Peak	52.04	-0.99	51.05	68.20	-17.15
5958.340	Peak	53.29	-0.77	52.51	68.20	-15.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 183 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11a / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5825 MHz Temp./Humi. :21.9/64

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane :Andy Wang Engineer

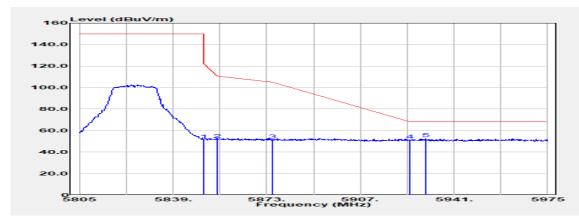

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5850.000	Peak	52.98	-1.57	51.41	122.20	-70.79
5855.000	Peak	53.32	-1.42	51.90	110.80	-58.90
5875.000	Peak	52.70	-1.42	51.28	105.20	-53.92
5925.000	Peak	52.14	-0.99	51.15	68.20	-17.05
5930.630	Peak	53.55	-0.91	52.65	68.20	-15.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 184 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 1 **Test Date** :2021-07-28

**Test Frequency** :5180 MHz Temp./Humi. :21.7/62 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

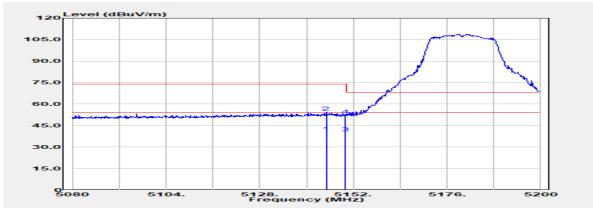

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
•	Mode	Reading Level		FS	@3m	•
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
		p				
	_					
5145.040	Average	42.68	-2.45	40.22	54.00	-13.78
5145.040	Peak	56.78	-2.45	54.33	74.00	-19.67
5150.000	Average	42.39	-2.53	39.86	54.00	-14.14
5150.000	Peak	54.89	-2.53	52.37	74.00	-21.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 185 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 1 **Test Date** :2021-07-28

**Test Frequency** :5180 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

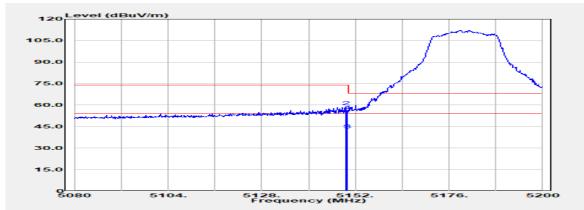

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
5149.480	Average	44.95	-2.52	42.43	54.00	-11.57
5149.480	Peak	61.46	-2.52	58.94	74.00	-15.06
5150.000	Average	45.12	-2.53	42.59	54.00	-11.41
5150.000	Peak	58.45	-2.53	55.93	74.00	-18.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw




Page: 186 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 2 **Test Date** :2021-07-28

**Test Frequency** :5320 MHz Temp./Humi. :21.7/62 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

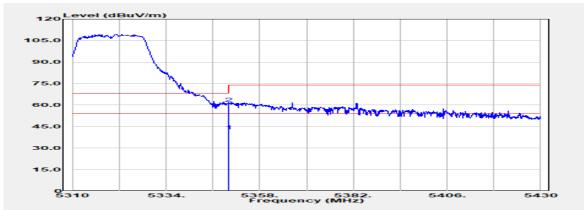

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5350.000	Average	44.92	-2.66	42.25	54.00	-11.75
5350.000	Peak	64.05	-2.66	61.39	74.00	-12.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 187 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 2 **Test Date** :2021-07-28

**Test Frequency** :5320 MHz Temp./Humi. :21.7/62

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

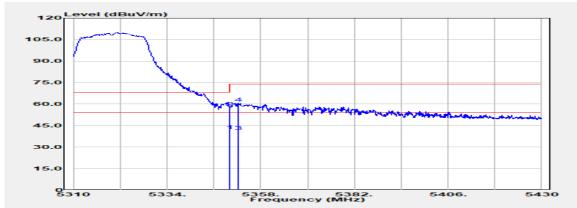

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
		•		•	•	
5350.000	Average	44.31	-2.66	41.65	54.00	-12.35
	Average	77.01	-2.00			
5350.000	Peak	60.46	-2.66	57.80	74.00	-16.20
5352.360	Average	43.55	-2.77	40.78	54.00	-13.22
5352.360	Peak	63.49	-2.77	60.72	74.00	-13.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 188 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 3 **Test Date** :2021-07-28

**Test Frequency** :5500 MHz Temp./Humi. :21.7/62 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane :Jack Tseng Engineer

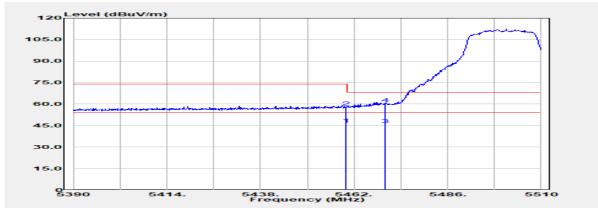

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5460.000	Average	48.06	-2.18	45.88	54.00	-8.12
5460.000	Peak	60.08	-2.18	57.90	74.00	-16.10
5470.000	Average	48.13	-2.35	45.78	54.00	-8.22
5470.000	Peak	62.77	-2.35	60.42	68.20	-7.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 189 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 3 **Test Date** :2021-07-28

**Test Frequency** :5500 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

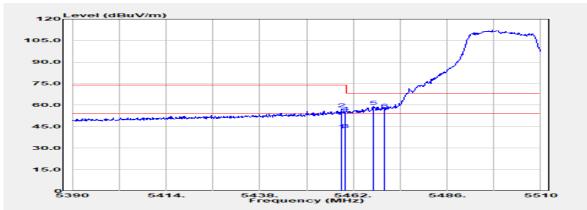

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dΒμV/m	dB
5458.880	Average	44.97	-2.21	42.76	54.00	-11.24
5458.880	Peak	59.55	-2.21	57.34	74.00	-16.66
5460.000	Average	45.12	-2.18	42.94	54.00	-11.06
5460.000	Peak	57.33	-2.18	55.15	74.00	-18.85
5467.280	Peak	61.47	-2.30	59.17	68.20	-9.03
5470.000	Peak	59.64	-2.35	57.29	68.20	-10.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 190 of 221

Report Number :E2/2021/70042 Test Site :SAC D

Operation Mode :802.11ac20 / Band 3 Test Date :2021-07-28

Test Frequency :5700 MHz Temp./Humi. :21.7/62
Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Jack Tseng

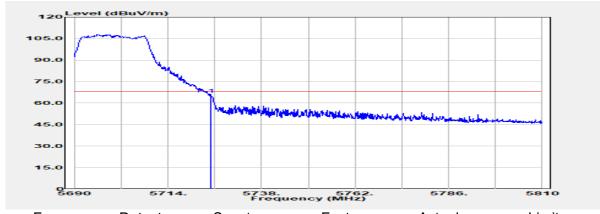

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
5725 000	Peak	68 10	-1 98	66 13	68 20	-2 07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 191 of 221


Report Number :E2/2021/70042 Test Site :SAC D

Operation Mode :802.11ac20 / Band 3 Test Date :2021-07-28

Test Frequency :5700 MHz Temp./Humi. :21.7/62

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Jack Tseng

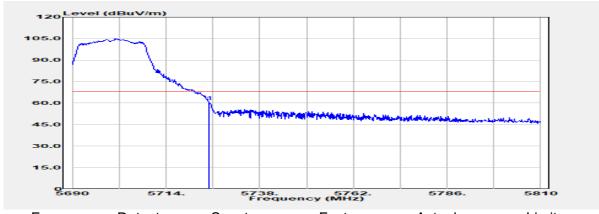

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
5725.000	Peak	62.90	-1.98	60.92	68.20	-7.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號




Page: 192 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 3-4 **Test Date** :2021-07-28

**Test Frequency** :5720 MHz Temp./Humi. :21.7/62 Test Mode :BE CH MID Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

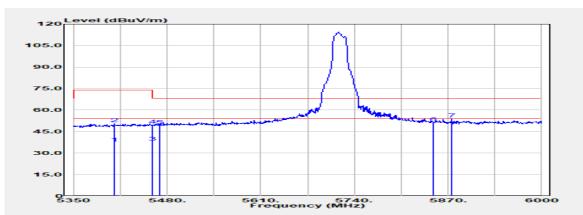

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5407.200	Average	39.50	-2.48	37.02	54.00	-16.98
5407.200	Peak	52.98	-2.48	50.49	74.00	-23.51
5460.000	Average	39.78	-2.18	37.59	54.00	-16.41
5460.000	Peak	51.76	-2.18	49.58	74.00	-24.42
5470.000	Peak	51.70	-2.35	49.35	68.20	-18.85
5850.000	Peak	52.63	-1.57	51.06	68.20	-17.14
5875.850	Peak	55.15	-1.42	53.73	68.20	-14.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 193 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 3-4 **Test Date** :2021-07-28

**Test Frequency** :5720 MHz Temp./Humi. :21.7/62

Test Mode :BE CH MID Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

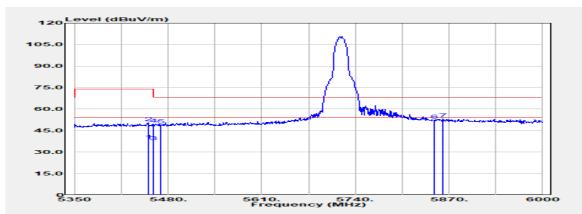

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5452.700	Average	40.54	-2.35	38.19	54.00	-15.81
5452.700	Peak	52.84	-2.35	50.48	74.00	-23.52
5460.000	Average	39.58	-2.18	37.40	54.00	-16.60
5460.000	Peak	51.74	-2.18	49.56	74.00	-24.44
5470.000	Peak	51.45	-2.35	49.11	68.20	-19.09
5850.000	Peak	54.04	-1.57	52.47	68.20	-15.73
5861.550	Peak	54.41	-1.29	53.12	68.20	-15.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 194 of 221

Report Number :E2/2021/70042 Test Site :SAC D

Operation Mode :802.11ac20 / Band 4 Test Date :2021-07-28

Test Frequency :5745 MHz Temp./Humi. :21.7/62
Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Jack Tseng

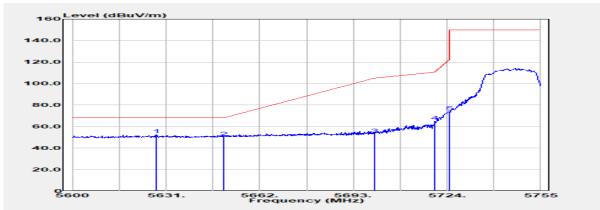

_	<b>D</b>	<b>^</b> '		A		
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
N 41 1—		•	-ID		_	٠ID
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
5627.590	Peak	54.78	-2.08	52.70	68.20	-15.50
5650.000	Peak	52.33	-2.20	50.13	68.20	-18.07
5700.000	Peak	55.02	-2.17	52.85	105.20	-52.35
5720.000	Peak	66.77	-1.70	65.07	110.80	-45.73
5725.000	Peak	75.78	-1.98	73.80	122.20	-48.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 195 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5745 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

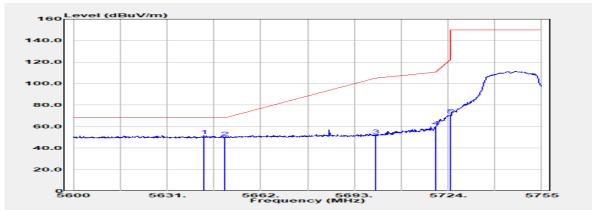

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5643.245	Peak	54.02	-2.28	51.75	68.20	-16.45
5650.000	Peak	52.43	-2.20	50.23	68.20	-17.97
5700.000	Peak	54.16	-2.17	52.00	105.20	-53.20
5720.000	Peak	61.71	-1.70	60.02	110.80	-50.78
5725.000	Peak	73.10	-1.98	71.13	122.20	-51.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 196 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5825 MHz Temp./Humi. :21.7/62 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

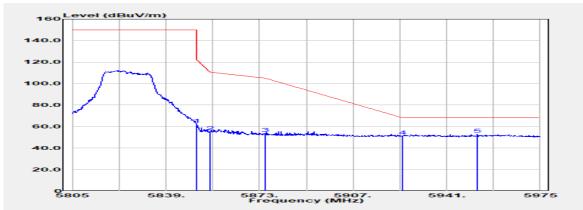

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
5850.000	Peak	63.81	-1.57	62.24	122.20	-59.96
5855.000	Peak	56.82	-1.42	55.40	110.80	-55.40
5875.000	Peak	55.31	-1.42	53.89	105.20	-51.31
5925.000	Peak	52.18	-0.99	51.19	68.20	-17.01
5952.220	Peak	53.97	-1.06	52.91	68.20	-15.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 197 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac20 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5825 MHz Temp./Humi. :21.7/62

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

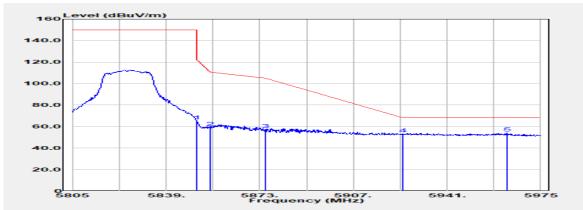

_						
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	_
N 41 1		•	ID.		_	ın
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5850.000	Dook	66.76	1 57	65.19	122.20	57 O1
0000.000	Peak	66.76	-1.57	65.19	122.20	-57.01
5855.000	Peak	60.70	-1.42	59.28	110.80	-51.52
5875.000	Peak	58.59	-1.42	57.17	105.20	-48.03
5925.000	Peak	54.46	-0.99	53.47	68.20	-14.73
5962.930	Peak	55.06	-0.87	54.19	68.20	-14.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279




Page: 198 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 1 **Test Date** :2021-07-28

**Test Frequency** :5190 MHz Temp./Humi. :21.7/62 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

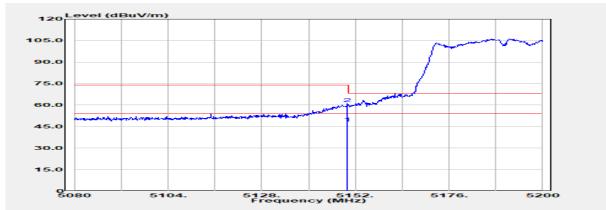

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5150.000	Average	50.08	-2.53	47.55	54.00	-6.45
5150.000	Peak	63.61	-2.53	61.08	74.00	-12.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 199 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 1 **Test Date** :2021-07-28

**Test Frequency** :5190 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

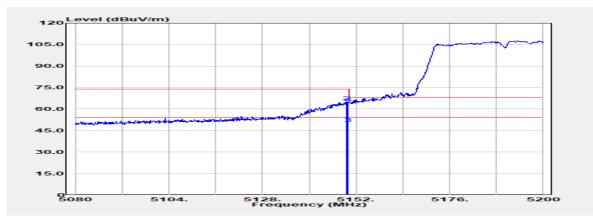

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
5149.720	Average	53.78	-2.52	51.26	54.00	-2.74
5149.720	Peak	67.80	-2.52	65.27	74.00	-8.73
5150.000	Average	52.33	-2.53	49.80	54.00	-4.20
5150.000	Peak	66.53	-2.53	64.00	74.00	-10.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 200 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40/ Band2 **Test Date** :2021-07-28

**Test Frequency** :5310 MHz Temp./Humi. :21.7/62 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

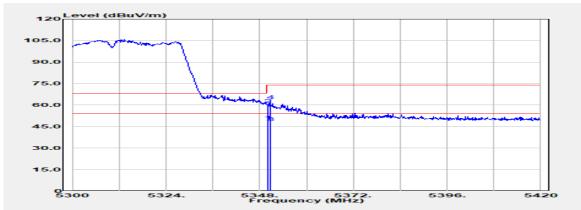

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	•	Mode	Reading Level		FS	@3m	J
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	IVII IZ	rn/Qr/Av	αБμν	uБ	ασμν/π	αυμν/π	uБ
	5350.000	Average	51.41	-2.66	48.75	54.00	-5.25
	5350.000	Peak	63.15	-2.66	60.49	74.00	-13.51
	5350.640	Average	50.66	-2.69	47.96	54.00	-6.04
	5350.640	Peak	65.95	-2.69	63.25	74.00	-10.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 201 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40/ Band2 **Test Date** :2021-07-28

**Test Frequency** :5310 MHz Temp./Humi. :21.7/62

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

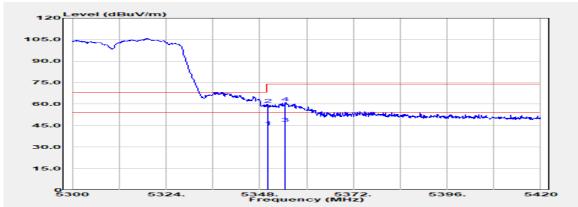

	_		<u> </u>				
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	•	Mode	Reading Level		FS	@3m	J
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	IVII IZ	I IV QI IAV	чъμν	uD u	αρμν/ιιι	αυμν/ιιι	ub_
	5350.000	Average	46.86	-2.66	44.19	54.00	-9.81
	5350.000	Peak	62.58	-2.66	59.92	74.00	-14.08
	5354.480	Average	49.61	-2.86	46.76	54.00	-7.24
	5354.480	Peak	63.93	-2.86	61.07	74.00	-12.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sgs.com.tw




Page: 202 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 3 **Test Date** :2021-07-28

**Test Frequency** :5510 MHz Temp./Humi. :21.7/62 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

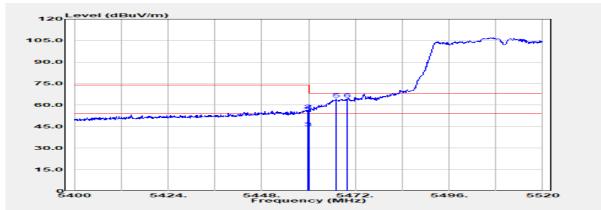

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5459.760	Average	46.42	-2.19	44.24	54.00	-9.76
5459.760	Peak	58.60	-2.19	56.41	74.00	-17.59
5460.000	Average	46.51	-2.18	44.33	54.00	-9.67
5460.000	Peak	58.49	-2.18	56.31	74.00	-17.69
5467.080	Peak	66.61	-2.30	64.31	68.20	-3.89
5470.000	Peak	66.70	-2.35	64.35	68.20	-3.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 203 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 3 **Test Date** :2021-07-28

**Test Frequency** :5510 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

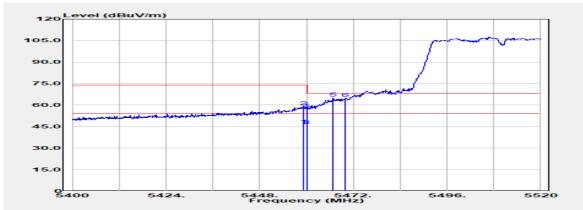

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5459.160	Average	48.07	-2.20	45.87	54.00	-8.13
5459.160	Peak	61.00	-2.20	58.80	74.00	-15.20
5460.000	Average	47.91	-2.18	45.73	54.00	-8.27
5460.000	Peak	59.73	-2.18	57.55	74.00	-16.45
5466.840	Peak	67.41	-2.30	65.11	68.20	-3.09
5470.000	Peak	67.02	-2.35	64.67	68.20	-3.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 204 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 3 **Test Date** :2021-07-28

**Test Frequency** :5670 MHz Temp./Humi. :21.7/62 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

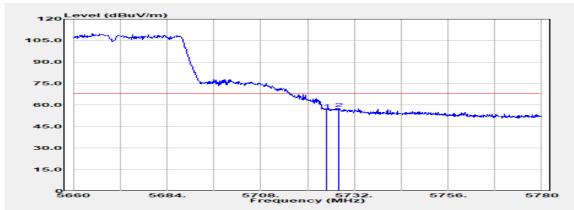

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5725.000	Peak	58.81	-1.98	56.83	68.20	-11.37
5728.040	Peak	60.02	-2.15	57.88	68.20	-10.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sgs.com.tw

台灣檢驗科技股份有限公司



Page: 205 of 221


Report Number :E2/2021/70042 Test Site :SAC D

Operation Mode :802.11ac40 / Band 3 Test Date :2021-07-28

Test Frequency :5670 MHz Temp./Humi. :21.7/62

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Jack Tseng

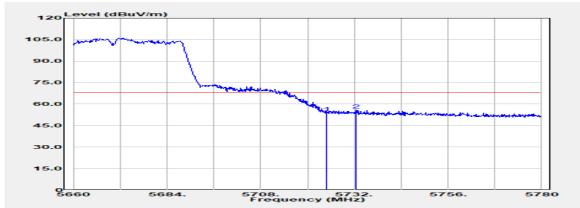

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	5725.000	Peak	56.03	-1.98	54.05	68.20	-14.15
	5732.480	Peak	57.91	-2.07	55.83	68.20	-12.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號




Page: 206 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5755 MHz Temp./Humi. :21.7/62 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

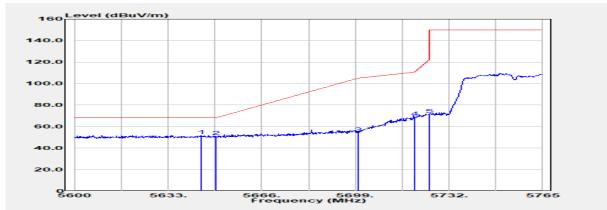

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
5644.550	Peak	54.09	-2.26	51.83	68.20	-16.37
5650.000	Peak	53.11	-2.20	50.91	68.20	-17.29
5700.000	Peak	56.36	-2.17	54.19	105.20	-51.01
5720.000	Peak	70.55	-1.70	68.86	110.80	-41.94
5725.000	Peak	73.48	-1.98	71.51	122.20	-50.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 207 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5755 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

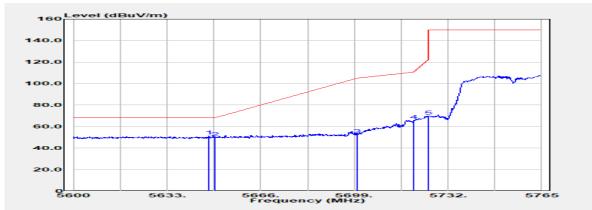

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
5647.685	Peak	53.64	-2.23	51.41	68.20	-16.79
5650.000	Peak	52.00	-2.20	49.80	68.20	-18.40
5700.000	Peak	54.64	-2.17	52.47	105.20	-52.73
5720.000	Peak	67.26	-1.70	65.57	110.80	-45.23
5725.000	Peak	71.56	-1.98	69.58	122.20	-52.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 208 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5795 MHz Temp./Humi. :21.7/62 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

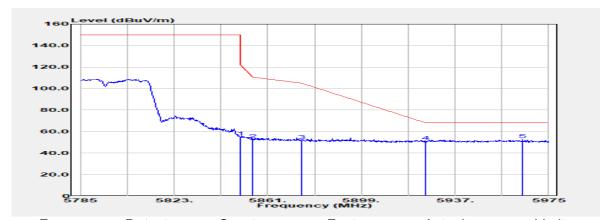

Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
Peak	56.55	-1.57	54.98	122.20	-67.22
Peak	53.99	-1.42	52.58	110.80	-58.22
Peak	53.18	-1.42	51.76	105.20	-53.44
Peak	52.03	-0.99	51.04	68.20	-17.16
Peak	53.32	-0.95	52.36	68.20	-15.84
	Mode PK/QP/AV Peak Peak Peak Peak	Mode PK/QP/AV Reading Level dBμV  Peak 56.55 Peak 53.99 Peak 53.18 Peak 52.03	Mode PK/QP/AV         Reading Level dBμV         dB           Peak         56.55         -1.57           Peak         53.99         -1.42           Peak         53.18         -1.42           Peak         52.03         -0.99	Mode PK/QP/AV         Reading Level dBμV         FS dBμV/m           Peak         56.55         -1.57         54.98           Peak         53.99         -1.42         52.58           Peak         53.18         -1.42         51.76           Peak         52.03         -0.99         51.04	Mode PK/QP/AV         Reading Level dBμV         FS dBμV/m         @3m dBμV/m           Peak         56.55         -1.57         54.98         122.20           Peak         53.99         -1.42         52.58         110.80           Peak         53.18         -1.42         51.76         105.20           Peak         52.03         -0.99         51.04         68.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 209 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac40 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5795 MHz Temp./Humi. :21.7/62

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

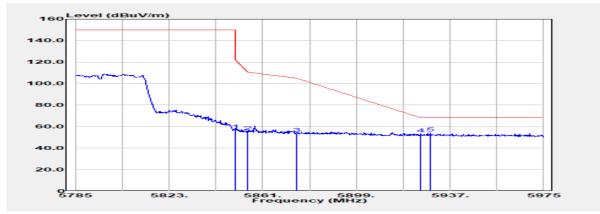

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5850.000	Peak	58.40	-1.57	56.83	122.20	-65.37
5855.000	Peak	56.96	-1.42	55.54	110.80	-55.26
5875.000	Peak	55.13	-1.42	53.71	105.20	-51.49
5925.000	Peak	54.13	-0.99	53.13	68.20	-15.07
5929.020	Peak	54.99	-0.91	54.09	68.20	-14.11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 210 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 1 **Test Date** :2021-07-28

**Test Frequency** :5210 MHz Temp./Humi. :21.7/62 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

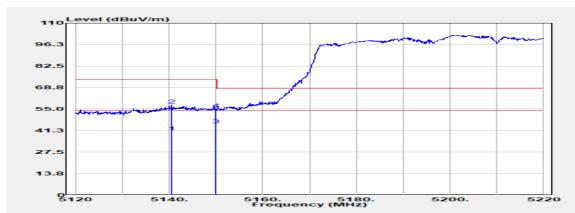

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
•	Mode	Reading Level		FS	@3m	Ū
		•		. •	_	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
		•		•		
5140.500	Average	43.05	<b>-</b> 2.38	40.66	54.00	-13.34
5140.500	Peak	59.92	-2.38	57.53	74.00	-16.47
						_
5150.000	Average	47.39	-2.53	44.86	54.00	-9.14
5150.000	Peak	57.58	-2.53	55.05	74.00	-18.95
0.00.000	. Jun	01.00		00.00	, ,,,,,,	. 5.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 211 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 1 **Test Date** :2021-07-28

**Test Frequency** :5210 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

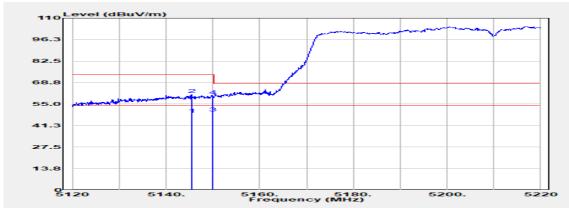

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
•	Mode	Reading Level		FS	@3m	J
MHz	PK/QP/AV	•	٩D	dDuV/m	_	٩D
IVITIZ	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
5145.400	Average	51.10	-2.46	48.65	54.00	-5.35
	•		_			
5145.400	Peak	63.56	-2.46	61.10	74.00	-12.90
5150.000	Average	52.00	-2.53	49.47	54.00	-4.53
5150.000	Peak	62.87	-2.53	60.35	74.00	-13.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 212 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 2 **Test Date** :2021-07-28

**Test Frequency** :5290 MHz Temp./Humi. :21.7/62 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

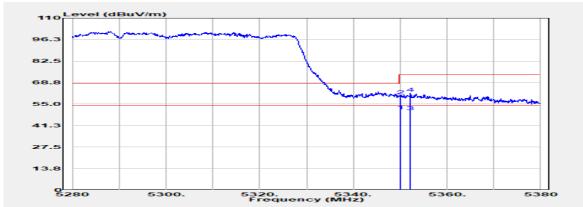

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
	5350.000	Average	53.42	-2.66	50.75	54.00	-3.25
	5350.000	Peak	63.04	-2.66	60.38	74.00	-13.62
	5352.200	Average	52.85	-2.76	50.09	54.00	-3.91
	5352.200	Peak	64.67	-2.76	61.91	74.00	-12.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 213 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 2 **Test Date** :2021-07-28

**Test Frequency** :5290 MHz Temp./Humi. :21.7/62

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

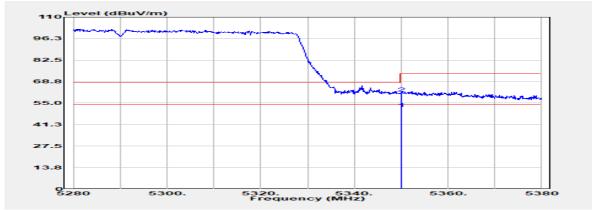

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dΒμV/m	dBμV/m	dB
5350.000	Average	54.13	-2.66	51.46	54.00	-2.54
5350.000	Peak	64.02	-2.66	61.35	74.00	-12.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 214 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 3 **Test Date** :2021-07-28

**Test Frequency** :5530 MHz Temp./Humi. :21.7/62 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

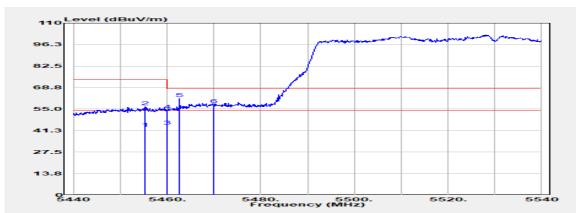

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5455.200	Average	44.97	-2.29	42.67	54.00	-11.33
5455.200	Peak	58.77	-2.29	56.48	74.00	-17.52
5460.000	Average	46.37	-2.18	44.19	54.00	-9.81
5460.000	Peak	56.49	-2.18	54.30	74.00	-19.70
5462.600	Peak	63.90	-2.23	61.67	68.20	-6.53
5470.000	Peak	60.27	-2.35	57.92	68.20	-10.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page: 215 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 3 **Test Date** :2021-07-28

**Test Frequency** :5530 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

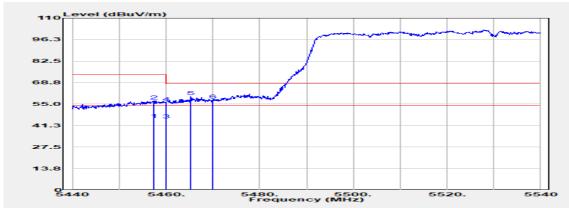

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
5457.300	Average	47.54	-2.24	45.30	54.00	-8.70
5457.300	Peak	59.42	-2.24	57.18	74.00	-16.82
5460.000	Average	47.08	-2.18	44.90	54.00	-9.10
5460.000	Peak	58.09	-2.18	55.91	74.00	-18.09
5465.300	Peak	62.22	-2.27	59.95	68.20	-8.25
5470.000	Peak	59.97	-2.35	57.63	68.20	-10.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 216 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5775 MHz Temp./Humi. :21.7/62 Test Mode :BE CH LOW Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

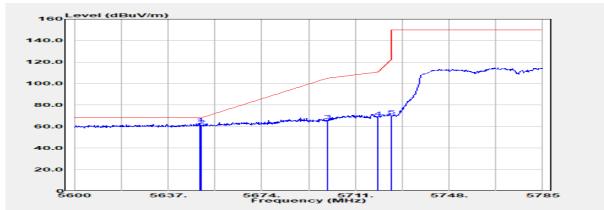

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	IVII IZ	FN/QF/AV	αвμν	uБ	ασμν/π	αυμν/π	ub_
	5649.580	Peak	64.99	-2.20	62.79	68.20	-5.41
	5650.000	Peak	63.11	-2.20	60.91	68.20	-7.29
	5700.000	Peak	67.94	-2.17	65.77	105.20	-39.43
	5720.000	Peak	70.78	-1.70	69.08	110.80	-41.72
	5725.000	Peak	72.01	-1.98	70.04	122.20	-52.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 217 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5775 MHz Temp./Humi. :21.7/62

Test Mode :BE CH LOW Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

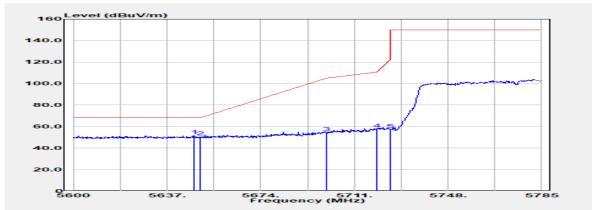

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
5647.730	Peak	54.08	-2.23	51.86	68.20	-16.34
5650.000	Peak	52.74	-2.20	50.54	68.20	-17.66
5700.000	Peak	56.59	-2.17	54.42	105.20	-50.78
5720.000	Peak	59.48	-1.70	57.78	110.80	-53.02
5725.000	Peak	59.45	-1.98	57.47	122.20	-64.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




Page: 218 of 221

Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5775 MHz Temp./Humi. :21.7/62 Test Mode :BE CH HIGH Antenna Pol. :Vertical

**EUT Pol** :H Plane Engineer :Jack Tseng

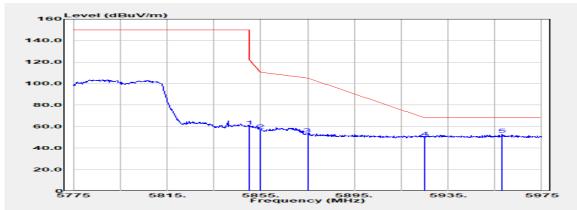

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
5850.000	Peak	61.97	-1.57	60.40	122.20	-61.80
5855.000	Peak	58.38	-1.42	56.96	110.80	-53.84
5875.000	Peak	54.87	-1.42	53.45	105.20	-51.75
5925.000	Peak	51.27	-0.99	50.28	68.20	-17.92
5958.200	Peak	53.80	-0.78	53.02	68.20	-15.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 219 of 221


Report Number :E2/2021/70042 Test Site :SAC D

**Operation Mode** :802.11ac80 / Band 4 **Test Date** :2021-07-28

**Test Frequency** :5775 MHz Temp./Humi. :21.7/62

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

**EUT Pol** :H Plane Engineer :Jack Tseng

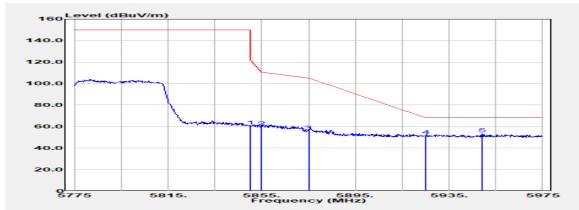

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
5850.000	Peak	61.94	-1.57	60.37	122.20	-61.83
5855.000	Peak	61.33	-1.42	59.91	110.80	-50.89
5875.000	Peak	57.33	-1.42	55.91	105.20	-49.29
5925.000	Peak	52.79	-0.99	51.80	68.20	-16.40
5949.200	Peak	54.37	-1.17	53.21	68.20	-14.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 220 of 221

## 12 TRANSMISSION IN THE ABSENCE OF DATA

## 12.1 Standard Applicable

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

## 12.2 Result

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 221 of 221

# 13 ANTENNA REQUIREMENT

#### 13.1 Standard Applicable

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. According to §15.407, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## 13.2 Antenna Connected Construction

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488