

Page: 1 of 51

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT





Applicant: Quanta Computer Inc.

No. 188, Wenhua 2nd Road, Guishan District, Taoyuan City

33377, Taiwan

Manufacturer: Quanta Computer Inc.

No. 188, Wenhua 2nd Road, Guishan District, Taoyuan City

33377. Taiwan

Product Name: Clover Companion

Brand Name: Clover Model No.: C800

Report Number: TERF2404000846E2

FCC ID HFS-C800

Date of EUT Received: Mar. 29, 2024

Date of Test: Apr. 01, 2024~Apr. 11, 2024

Issue Date: Apr. 26, 2024

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.247.

The results of this report relate only to the sample identified in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 2 of 51

Revision History							
Report Number	Revision	Description	Issue Date	Revised By	Remark		
TERF2404000846E2	00	Original	Apr. 26, 2024	Yami Kuo			

Note:

1 The remark "*" indicates modification of the report upon requests from certification body.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 3 of 51

Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	10
5	MEASUREMENT UNCERTAINTY	12
6	MEASUREMENT EQUIPMENT USED	13
7	PEAK OUTPUT POWER MEASUREMENT	14
8	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 51

GENERAL INFORMATION

1.1 **Product Description**

Product Name:	Clover Companion
Brand Name:	Clover
Model No.:	C800
Hardware Version:	N/A
Firmware Version:	N/A
EUT Series No.:	C080UG40940094
Power Supply:	12Vdc
Test Software (Name/Version)	QRCT4.0.00206.0

1.2 **RF Specification**

Radio Technology:	BT BR+EDR
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	6.91 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	≦ 0.4s

1.3 **Antenna Designation**

Antenna	Supplier	Antenna	Freq.	Peak Antenna
Type		Part No.	(MHz)	Gain (dBi)
PIFA	Advanced Wireless & Antenna INC.	ALF6Y-100004	2402–2480	0.78

Note:

1. Antenna information is provided by the applicant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 51

1.4 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247 FCC KDB 558074 D01 15.247 Meas. Guidance v05r02 ANSI C63.10:2013

1.5 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designa- tion number	IC CAB identifier
		SAC 1		
		SAC 2		
		SAC 3		
	No 124 Wu Kung Bood New Toingi	Conduction 1		
	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New	Conducted 1	TW0027	TW3702
	Taipei City, Taiwan.	Conducted 2	1 440027	
	raiper City, Taiwan.	Conducted 3	_	
		Conducted 4		
		Conducted 5		
SGS Taiwan Ltd.		Conducted 6		
Central RF Lab.		Conduction C		
(TAF code 3702)		SAC C		
		SAC D		
		SAC G	7	
	No 2 Kaji 1et Dd. Cujeban District	Conducted A		
	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333	Conducted B	TW0028	
	ladyuan City, Taiwan 333	Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.6 Special Accessories

There is no special accessory used while test was conducted.

1.7 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 6 of 51

SYSTEM TEST CONFIGURATION

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

Test Procedure 2.3

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 7 of 51

2.4 Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,此数华红用摄影测过之样具色素,同既此样具展展现的主。大数华土德太公司隶而连可,无可如公海测。


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 8 of 51

2.5 **Test Configuration**

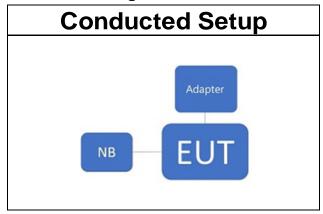

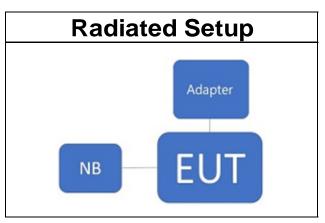

2.6 Control Unit(s)

Conducted Emission Test Site: Conducted C							
EQUIPMENT TYPE MFR MODEL NUMBER SERIAL NUMBER LAST CAL. CAL DUE.							
Adapter clover S024CEU1200200 N/A N/A N/A							
Notebook							

Radiated Emission Test Site: SAC G						
EQUIPMENT TYPE MFR MODEL NUMBER SERIAL NUMBER LAST CAL. CAL DUE.						
Adapter	clover	S024CEU1200200	N/A	N/A	N/A	
Notebook	Lenovo	L480	P0002332	N/A	N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 9 of 51

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(d) §15.209	Radiated Band Edge and Spurious Emission	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 51

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

2400~2483.5 MHz							
СН	Freq. (MHz)	СН	Freq. (MHz)	СН	Freq. (MHz)	СН	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 51

4.2 The Worst Test Modes and Channel Details

- 1 The EUT has been tested under operating condition.
- 2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3 The field strength of radiated emission was measured as the EUT positioned in different orthogonal planes (E1/E2/H) based on actual usage of the EUT to pre-scan the emissions for determining the worst case scenario.
- 4 Investigation has been done on all the possible configurations for searching the worst case.

ANTNNA PORT CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE			
Peak Output Power							
	0 to 78	0,39,78	GFSK	DH5			
Bluetooth	0 to 78	0,39,78	π/4-DQPSK	2DH5			
	0 to 78	0,39,78	8-DPSK	3DH5			

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	
TRANSMIT RADIATED EMISSION TEST (BELOW 1 GHz)					
Bluetooth	0 to 78	39	GFSK	DH5	
TRANSMIT RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth	0 to 78	0,39,78	GFSK/8-DPSK	DH5/3DH5	

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for channel Low, Mid and High, the worst case position was reported.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 12 of 51

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty		nty
AC Power Line Conducted Emission	+/-	1.54	dB
Output Power measurement	+/-	0.97	dB
Emission Bandwidth	+/-	1.38	Hz
Conducted emission measurement	+/-	0.77	dB
Frequency Separation	+/-	1.48	Hz
Number of hopping frequency	+/-	1.48	Hz
Time of Occupancy	+/-	1.48	Hz
Temperature	+/-	0.6	°C
Humidity	+/-	3	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty					
	+/-	1.89	dB	9kHz~30MHz	
Polarization: Vertical	+/-	4.15	dB	30MHz - 1000MHz	
Polarization, vertical	+/-	3.43	dB	1GHz - 18GHz	
	+/-	3.86	dB	18GHz - 40GHz	
	+/-	1.89	dB	9kHz~30MHz	
Polarization: Horizontal	+/-	4.02	dB	30MHz - 1000MHz	
Polarization. Horizontal	+/-	3.43	dB	1GHz - 18GHz	
	+/-	3.86	dB	18GHz - 40GHz	
	+/-	2	dB	33GHz-50GHz	
	+/-	1.59	dB	50GHz-60GHz	
Radiated Spurious Emission	+/-	1.7	dB	60GHz-90GHz	
	+/-	1.64	dB	90GHz-140GHz	
	+/-	3.83	dB	140GHz-220GHz	

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 51

MEASUREMENT EQUIPMENT USED

6.1 **Conducted Measurement**

	- Conducted medical content								
	Conducted Emission Test Site: Conducted C								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Spectrum Analyzer KEYSIGHT		N9010B	MY59071573	05/23/2023	05/22/2024				
Power Meter	Anritsu	ML2496A	2138002	08/31/2023	08/30/2024				
Power Sensor	Anritsu	MA2411B	1911390	08/31/2023	08/30/2024				
Power Sensor	Anritsu	MA2411B	1911398	08/31/2023	08/30/2024				
Test Software SGS Taiwan		Radio Test Software	Ver.21	N.C.R	N.C.R				
Attenuator Woken		WATT-218FS-10	RF18	11/15/2023	11/14/2024				
Attenuator	Woken	WATT-218FS-10	RF19	11/15/2023	11/14/2024				
DC Block	PASTERNACK	PE8210	RF155	11/15/2023	11/14/2024				

6.2 **Radiated Measurement**

	Radiated Emission Test Site: SAC G						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Broadband Antenna	SCHWARZBECK	VULB 9168	1208	07/21/2023	07/20/2024		
Horn Antenna	Schwarzbeck	BBHA9170	185	08/21/2023	08/20/2024		
Horn Antenna	RF SPIN	DRH18-E	210105A18E	04/18/2023	04/17/2024		
Loop Antenna	ETS.LINDGREN	6502	143303	05/23/2023	05/22/2024		
3m Site NSA	SGS	966 chamber G	N/A	03/30/2024	03/29/2025		
Spectrum Analyzer	KEYSIGHT	N9010A	MY51440113	07/17/2023	07/16/2024		
Test Software	audix	e3	E3 20923 SGS Ver.9 (C)	N.C.R	N.C.R		
Pre-Amplifier	EMC Instruments	EMC330N	980781	03/15/2024	03/14/2025		
Pre-Amplifier	EMC Instruments	EMC118A45SE	980815	03/15/2024	03/14/2025		
Pre-Amplifier	EMC Instruments	EMC184945SEE	980938	11/15/2023	11/14/2024		
Coaxial Cable	EMC Instruments	EMCCFD400-NM- NM-8000-5000- 2000	210216 ` 210217 ` 210218	03/15/2024	03/14/2025		
Coaxial Cable	EMC Instruments	EMC104-SM-SM- 8000-5000-5000	210219 \ 210220 \ \ 210221	03/15/2024	03/14/2025		

NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司




Page: 14 of 51

PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

7.2 **Test Setup**



7.3 **Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10 Measurement Guidelines.
- 3. Duty cycle of test signal is < 98 %, duty factor shall be considered.
- 4. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >= 20dB bandwidth)
- 5. Record the max. reading.
- 6. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 51

Peak & Average Power Measurement Result

1M BR mode (Peak):

	IIII BR IIIode (i car).							
	СН	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)		
I	Low	2402	8	5.85	3.846	1000		
ſ	Mid	2441	8	5.44	3.499	1000		
ĺ	High	2480	8	4.86	3.062	1000		

1M BR mode (Average):

21 t 0 to 1 to 2 d /						
СН	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)	
Low	2402	8	5.48	3.535	1000	
Mid	2441	8	5.29	3.384	1000	
High	2480	8	4.53	2.840	1000	

2M EDR mode (Peak):

СН	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	8	5.91	3.899	125
Mid	2441	8	6.12	4.093	125
High	2480	8	6.25	4.217	125

2M EDR mode (Average):

ZWI EDIX IIIO	ac (Avelage).				
СН	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	8	5.30	3.391	125
Mid	2441	8	5.42	3.486	125
High	2480	8	4.68	2.940	125

3M EDR mode (Peak):

СН	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)	
Low	2402	8	6.33	4.295	125	
Mid	2441	8	6.78	4.764	125	
High	2480	8	6.91	4.909	125	

3M EDR mode (Average):

om EBR mode (Average).						
СН	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)	
Low	2402	8	5.45	3.511	125	
Mid	2441	8	5.50	3.551	125	
High	2480	8	4 79	3 016	125	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 16 of 51

RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

8.1 Standard Applicable

8.1.1 **Duty Cycle Correction Factor**

According to 15. 35(c), the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification.

8.1.2 Spurious Emission

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 and limit as below. And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 17 of 51




Test Setup

Duty Cycle Correction Factor 8.2.1




8.2.2 **Radiated Emission**

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

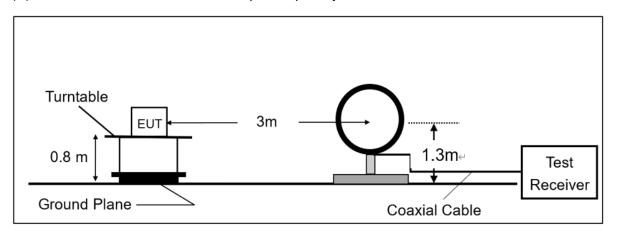

(B) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz.

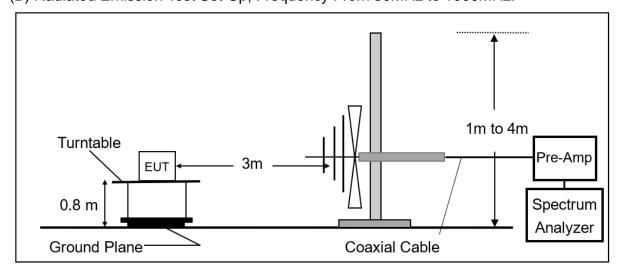


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 18 of 51

(C) Radiated Emission Test Set-Up, Frequency Above 1 GHz.

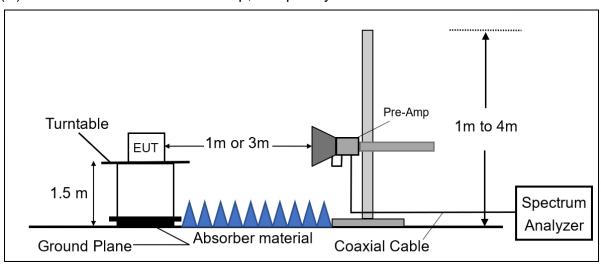

8.3 **Measurement Procedure**

8.3.1 **Duty Cycle Correction Factor**

- 1. Adjust and configure any EUT switches, controls, or input data streams to ensure that the EUT is transmitting or encoded to obtain the "worst-case" pulse ON time.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep=100ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

8.3.2 Radiated Emission

- The testing follows the Measurement Procedure of ANSI C63.10:2013.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=100 kHz and VBW=300 kHz for Peak Detector (PK) at frequency between 30MHz and 1 GHz.
- 6. Use receiver mode as RBW=120 kHz for Quasi-peak (QP) at frequency between 30MHz and 1 GHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.



Page: 19 of 51

7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Maximum Emission Measurements at frequency above 1 GHz.

- 8. According to C63.10:2013 Section 7.5 Procedure for determining the average value of pulsed emissions with duty cycle correction factor 20 log (Ton/100ms).
- 9. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 12. Repeat above procedures until all default test channel measured were complete.

8.4 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual $FS(dB\mu V/m) = SPA$. Reading level(dB μV) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)

Average value(dBµV/m)=Peak Actual FS(dBµV/m)+ Duty Cycle Correction Factor(dB) Duty Cycle Correction Factor(dB) = 20 log (Ton/100 ms)

8.5 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 20 of 51

8.6 **Measurement Result:**

8.6.1 **Duty Cycle Correction Factor**

BR

Time ON of 100ms:	5.800	ms	
Duty Cycle=5.8ms / 100ms=	0.058		
Duty Cycle correction factor=20 LOG 0.058=		-24.73	dB

EDR

Time ON of 100ms:	5.800	ms	
Duty Cycle=5.8ms / 100ms=	0.058		
Duty Cycle correction factor=20	LOG 0.058=	-24.73	dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 21 of 51

8.6.2 Duty Cycle test plot

BR



EDR



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北京方的时,他就是在国际影响是少锋只会表,同时他并且从原则的企业,不可如此推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 22 of 51

Bandedge Result


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode:BR Test Date :2024-04-08

Temp./Humi. :23.6°C/63% Test Frequency :2402 MHz

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :E2 Plane :Temo Chen Engineer

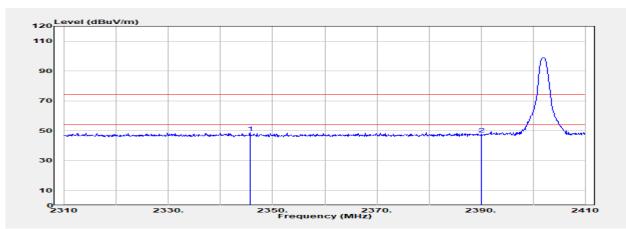

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2345.600	Peak	50.95	-2.23	48.73	74.00	-25.27
2390.000	Peak	50.01	-2.34	47.67	74.00	-26.33
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2345.600	Average	48.73	-24.73	24.00	54.00	-30.00
2390.000	Average	47.67	-24.73	22.94	54.00	-31.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 23 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :BR Test Date :2024-04-08

Test Frequency :2402 MHz Temp./Humi. :23.6°C/63%

Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :E2 Plane Engineer :Temo Chen

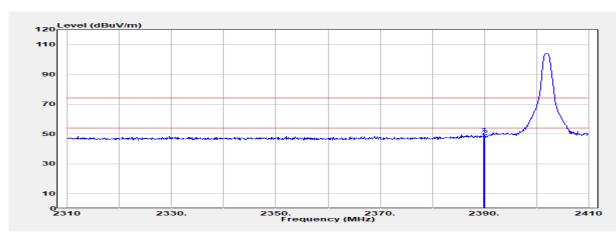

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2389.900	Peak	52.27	-2.34	49.93	74.00	-24.07
2390.000	Peak	50.66	-2.34	48.32	74.00	-25.68
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2389.900	Average	49.93	-24.73	25.20	54.00	-28.80
2390.000	Average	48.32	-24.73	23.59	54.00	-30.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 24 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :BR Test Date :2024-04-08

Test Frequency :2480 MHz Temp./Humi. :23.6°C/63%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

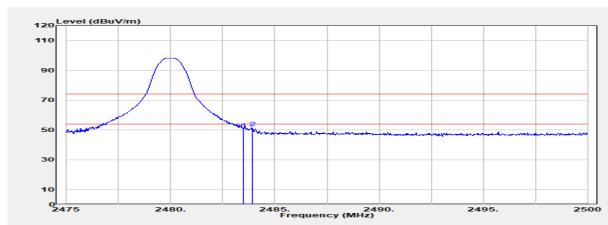

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	52.89	-2.38	50.51	74.00	-23.49
2483.900	Peak	53.91	-2.38	51.54	74.00	-22.46
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
	Mode	FS	Factor	Value	Limit@3m	(dB)
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(ab)
2483.500	Average	50.51	-24.73	25.78	54.00	-28.22
2483.900	Average	51.54	-24.73	26.81	54.00	-27.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分換具有害,同時他幾乎區程內的子。木都些主權大公司事而強可,不可與以資剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 51


Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode: BR Test Date :2024-04-08

Temp./Humi. :23.6°C/63% Test Frequency :2480 MHz

Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :E2 Plane :Temo Chen Engineer

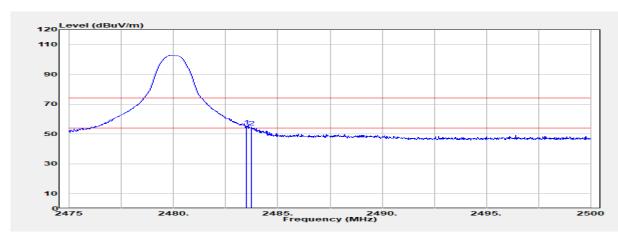

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	57.56	-2.38	55.18	74.00	-18.82
2483.750	Peak	57.08	-2.38	54.70	74.00	-19.30
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2483.500	Average	55.18	-24.73	30.45	54.00	-23.55
2483.750	Average	54.70	-24.73	29.97	54.00	-24.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司




Page: 26 of 51

Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :BR Hopping Test Date :2024-04-08 Test Frequency :2402 MHz Temp./Humi. :23.6°C/63%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

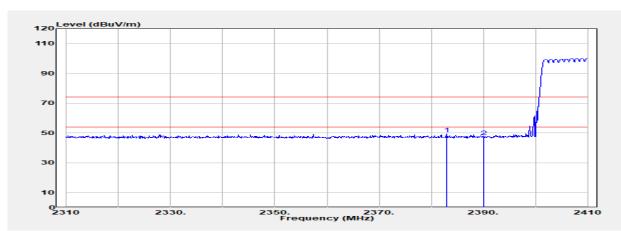

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2382.900	Peak	51.83	-2.32	49.51	74.00	-24.49
2390.000	Peak	49.80	-2.34	47.46	74.00	-26.54
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2382.900	Average	49.51	-24.73	24.78	54.00	-29.22
2390.000	Average	47.46	-24.73	22.73	54.00	-31.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488


SGS Taiwan Ltd.



Page: 27 of 51

Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode :BR Hopping Test Date :2024-04-08 Temp./Humi. :23.6°C/63% Test Frequency :2402 MHz Test Mode :Bandedge Antenna Pol. :Horizontal **EUT Pol** :E2 Plane :Temo Chen Engineer

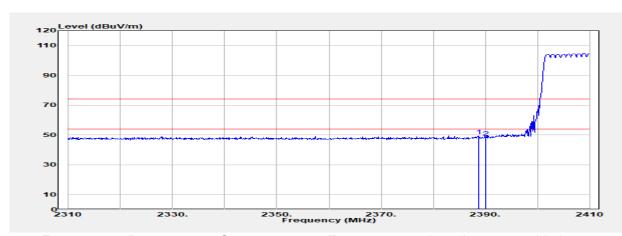

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2388.800	Peak	51.88	-2.34	49.54	74.00	-24.46
2390.000	Peak	50.75	-2.34	48.41	74.00	-25.59
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2388.800	Average	49.54	-24.73	24.81	54.00	-29.19
2390.000	Average	48.41	-24.73	23.68	54.00	-30.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司




Page: 28 of 51

Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode :BR Hopping Test Date :2024-04-08 Temp./Humi. :23.6°C/63% Test Frequency :2480 MHz

Test Mode :Bandedge Antenna Pol. :Vertical

Engineer **EUT Pol** :E2 Plane :Temo Chen

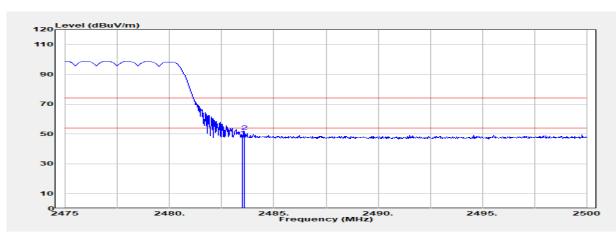

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	50.51	-2.38	48.14	74.00	-25.86
2483.575	Peak	54.06	-2.38	51.68	74.00	-22.32
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2483.500	Average	48.14	-24.73	23.41	54.00	-30.59
2483.575	Average	51.68	-24.73	26.95	54.00	-27.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 29 of 51

Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode :BR Hopping Test Date :2024-04-08 Temp./Humi. :23.6°C/63% Test Frequency :2480 MHz Test Mode :Bandedge Antenna Pol. :Horizontal Engineer **EUT Pol** :E2 Plane :Temo Chen

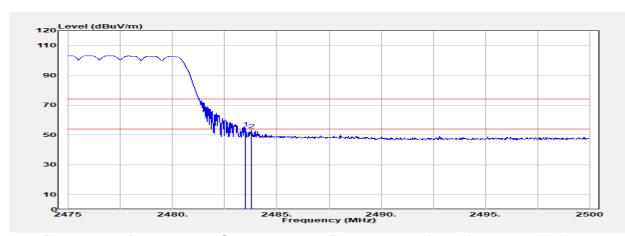

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	57.06	-2.38	54.68	74.00	-19.32
2483.775	Peak	55.64	-2.38	53.27	74.00	-20.73
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2483.500	Average	54.68	-24.73	29.95	54.00	-24.05
2483.775	Average	53.27	-24.73	28.54	54.00	-25.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 www.sgs.com.tw




Page: 30 of 51

Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode: EDR 3M Test Date :2024-04-08 Temp./Humi. :23.6°C/63% Test Frequency :2402 MHz

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :E2 Plane :Temo Chen Engineer

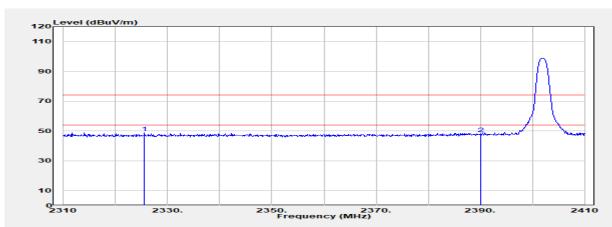

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2325.500	Peak	51.17	-2.29	48.89	74.00	-25.11
2390.000	Peak	50.56	-2.34	48.22	74.00	-25.78
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2325.500	Average	48.89	-24.73	24.16	54.00	-29.84
2390.000	Average	48.22	-24.73	23.49	54.00	-30.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 31 of 51

Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode:EDR 3MTest Date:2024-04-08Test Frequency:2402 MHzTemp./Humi.:23.6°C/63%Test Mode:BandedgeAntenna Pol.:HorizontalEUT Pol:E2 PlaneEngineer:Temo Chen

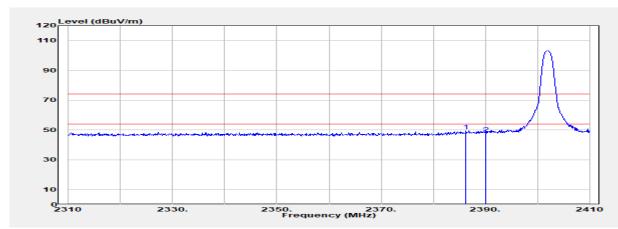

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2386.300	Peak	51.73	-2.33	49.41	74.00	-24.59
2390.000	Peak	50.14	-2.34	47.80	74.00	-26.20
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2386.300	Average	49.41	-24.73	24.68	54.00	-29.32
2390.000	Average	47.80	-24.73	23.07	54.00	-30.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分換具有害,同時他幾乎區程內的子。木都些主權大公司事而強可,不可與以資剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 32 of 51

Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :EDR 3M Test Date :2024-04-08
Test Frequency :2480 MHz Temp./Humi. :23.6℃/63%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

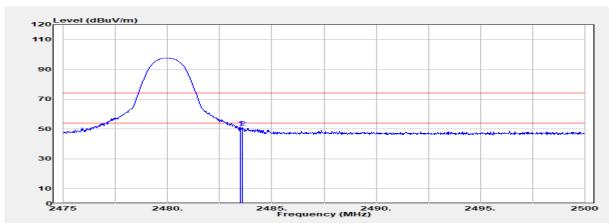

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	53.92	-2.38	51.54	74.00	-22.46
2483.600	Peak	53.32	-2.38	50.95	74.00	-23.05
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Morgin
	Mode	FS	Factor	Value	Limit@3m	Margin (dB)
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(ub)
2483.500	Average	51.54	-24.73	26.81	54.00	-27.19
2483.600	Average	50.95	-24.73	26.22	54.00	-27.78

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 33 of 51

Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode:EDR 3MTest Date:2024-04-08Test Frequency:2480 MHzTemp./Humi.:23.6℃/63%Test Mode:BandedgeAntenna Pol.:HorizontalEUT Pol:E2 PlaneEngineer:Temo Chen

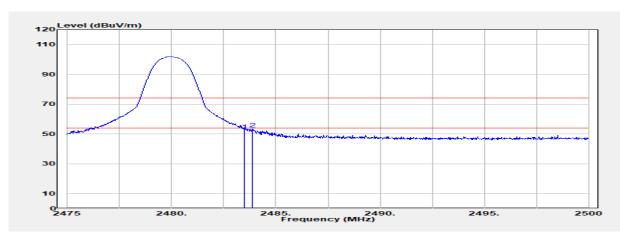

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	54.89	-2.38	52.52	74.00	-21.48
2483.875	Peak	55.71	-2.38	53.34	74.00	-20.66
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2483.500	Average	52.52	-24.73	27.79	54.00	-26.21
2483.875	Average	53.34	-24.73	28.61	54.00	-25.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 34 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :EDR 3M Hopping Test Date :2024-04-08

Test Frequency :2402 MHz Temp./Humi. :23.6℃/63%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

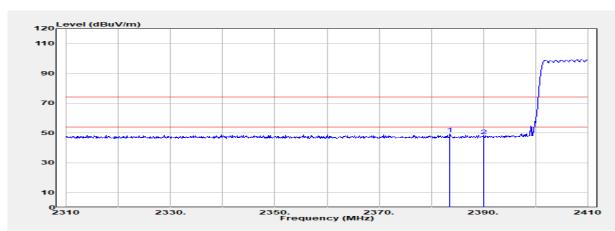

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2383.600	Peak	51.68	-2.32	49.36	74.00	-24.64
2390.000	Peak	50.37	-2.34	48.03	74.00	-25.97
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2383.600	Average	49.36	-24.73	24.63	54.00	-29.37
2390.000	Average	48.03	-24.73	23.30	54.00	-30.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华结甲属影测过之样只有含,同时此样只属是例如于。大规华主领大风司事而连可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 35 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode: EDR 3M Hopping Test Date: 2024-04-08

Test Frequency :2402 MHz Temp./Humi. :23.6°C/63%

Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :E2 Plane Engineer :Temo Chen

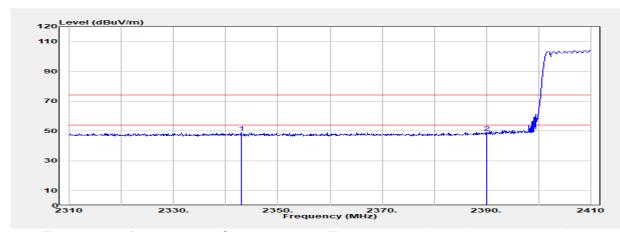

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2342.900	Peak	51.43	-2.23	49.20	74.00	-24.80
2390.000	Peak	51.41	-2.34	49.07	74.00	-24.93
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2342.900	Average	49.20	-24.73	24.47	54.00	-29.53
2390.000	Average	49.07	-24.73	24.34	54.00	-29.66

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 36 of 51


Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode: EDR 3M Hopping Test Date :2024-04-08

Temp./Humi. :23.6°C/63% Test Frequency :2480 MHz

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

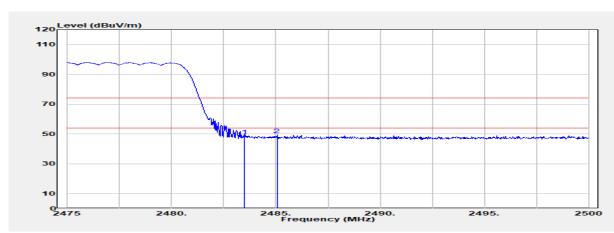

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	51.15	-2.38	48.77	74.00	-25.23
2485.050	Peak	51.94	-2.37	49.57	74.00	-24.43
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2483.500	Average	48.77	-24.73	24.04	54.00	-29.96
2485.050	Average	49.57	-24.73	24.84	54.00	-29.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 37 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode: EDR 3M Hopping Test Date: 2024-04-08

Test Frequency :2480 MHz Temp./Humi. :23.6℃/63%

Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :E2 Plane Engineer :Temo Chen

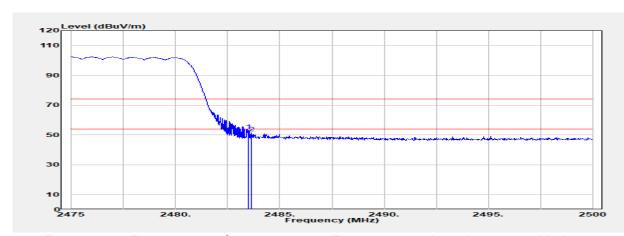

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	55.27	-2.38	52.89	74.00	-21.11
2483.650	Peak	53.69	-2.38	51.32	74.00	-22.68
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2483.500	Average	52.89	-24.73	28.16	54.00	-25.84
2483.650	Average	51.32	-24.73	26.59	54.00	-27.41

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 51

8.6.4 Radiated Spurious Emission


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :BR Test Date :2024-04-11

Test Frequency :2441 MHz Temp./Humi. :23.0°C/50%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

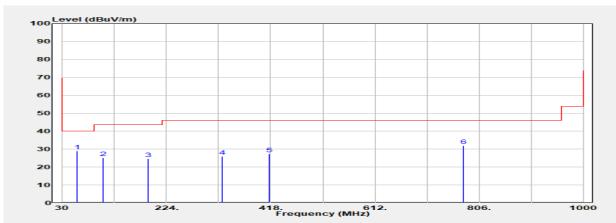

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AVG	dΒμV	dB	dBμV/m	dBμV/m	dB
58.130	Peak	42.06	-12.95	29.11	40.00	-10.89
105.660	Peak	41.93	-16.73	25.20	43.50	-18.30
189.080	Peak	39.78	-15.23	24.55	43.50	-18.95
326.820	Peak	37.14	-11.17	25.97	46.00	-20.03
415.090	Peak	36.70	-9.41	27.29	46.00	-18.71
776.900	Peak	33.50	-1.51	31.99	46.00	-14.01

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 39 of 51


Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode: BR Test Date :2024-04-11

Temp./Humi. :23.0°C/50% Test Frequency :2441 MHz

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :E2 Plane :Temo Chen Engineer

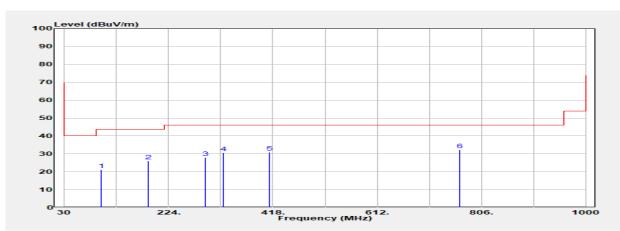

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AVG	dΒμV	dB	dBμV/m	dBμV/m	dB
98.870	Peak	38.80	-17.75	21.06	43.50	-22.44
186.170	Peak	41.02	-14.97	26.04	43.50	-17.46
292.870	Peak	39.91	-12.11	27.80	46.00	-18.20
325.850	Peak	41.82	-11.18	30.65	46.00	-15.35
412.180	Peak	40.32	-9.40	30.92	46.00	-15.08
766.230	Peak	33.86	-1.61	32.25	46.00	-13.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 40 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :BR Test Date :2024-04-08

Test Frequency :2402 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

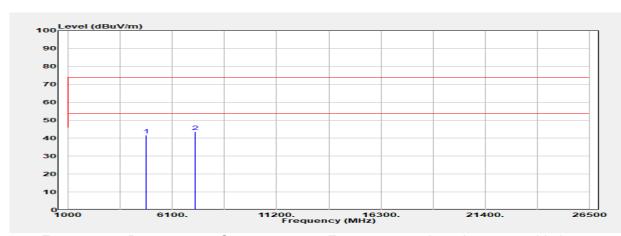

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4804.000	Peak	36.64	4.98	41.63	74.00	-32.37
7206.000	Peak	33.76	9.80	43.56	74.00	-30.44
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4804.000	Average	41.63	-24.73	16.90	54.00	-37.10
7206.000	Average	43.56	-24.73	18.83	54.00	-35.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對文學具有書,同時他學具屬是例的子。本都學主德本公司書面對面,不可可以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

 SGS Taiwan Ltd.
 No.134,W

 台灣檢驗科技股份有限公司
 t (886-2) 2



Page: 41 of 51


Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode: BR Test Date :2024-04-08

Temp./Humi. :23.6°C/63% Test Frequency :2402 MHz

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :E2 Plane :Temo Chen Engineer

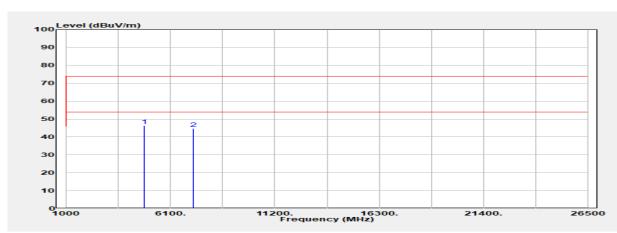

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4804.000	Peak	41.25	4.98	46.24	74.00	-27.76
7206.000	Peak	34.94	9.80	44.74	74.00	-29.26
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4804.000	Average	46.24	-24.73	21.51	54.00	-32.49
7206.000	Average	44.74	-24.73	20.01	54.00	-33.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 42 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :BR Test Date :2024-04-08

Test Frequency :2441 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

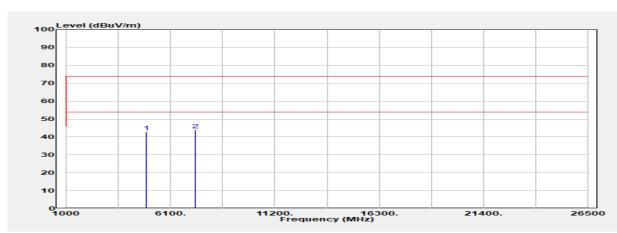

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4882.000	Peak	37.49	5.38	42.87	74.00	-31.13
7323.000	Peak	34.66	9.34	44.00	74.00	-30.00
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4882.000	Average	42.87	-24.73	18.14	54.00	-35.86
7323.000	Average	44.00	-24.73	19.27	54.00	-34.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對文學具有書,同時他學具屬是例的子。本都學主德本公司書面對面,不可可以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 43 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode: BR Test Date: 2024-04-08

Test Frequency :2441 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :E2 Plane Engineer :Temo Chen

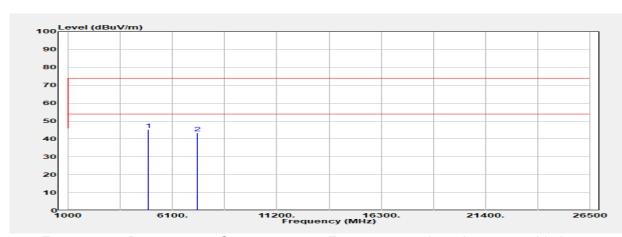

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4882.000	Peak	39.86	5.38	45.24	74.00	-28.76
7323.000	Peak	33.96	9.34	43.29	74.00	-30.71
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4882.000	Average	45.24	-24.73	20.51	54.00	-33.49
7323.000	Average	43.29	-24.73	18.56	54.00	-35.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 44 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :BR Test Date :2024-04-08

Test Frequency :2480 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

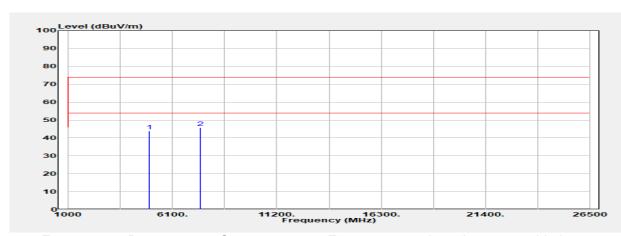

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4960.000	Peak	38.32	5.67	43.99	74.00	-30.01
7440.000	Peak	34.32	11.35	45.67	74.00	-28.33
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4960.000	Average	43.99	-24.73	19.26	54.00	-34.74
7440.000	Average	45.67	-24.73	20.94	54.00	-33.06

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 51


Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :BR Test Date :2024-04-08

Test Frequency :2480 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :E2 Plane Engineer :Temo Chen

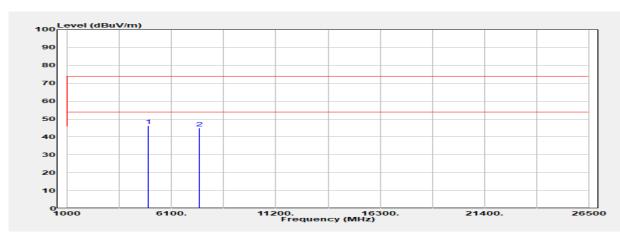

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4960.000	Peak	40.78	5.67	46.45	74.00	-27.55
7440.000	Peak	33.73	11.35	45.08	74.00	-28.92
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4960.000	Average	46.45	-24.73	21.72	54.00	-32.28
7440.000	Average	45.08	-24.73	20.35	54.00	-33.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 46 of 51

Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode: EDR 3M Test Date :2024-04-08 Temp./Humi. :23.6°C/63% Test Frequency :2402 MHz

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :E2 Plane :Temo Chen Engineer

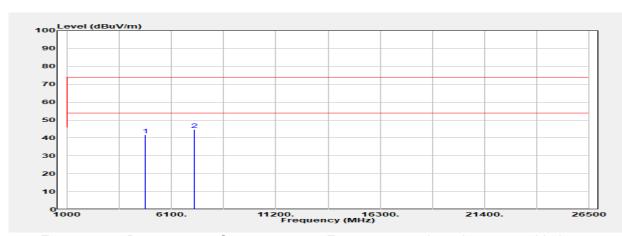

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4804.000	Peak	36.83	4.98	41.81	74.00	-32.19
7206.000	Peak	34.92	9.80	44.72	74.00	-29.28
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4804.000	Average	41.81	-24.73	17.08	54.00	-36.92
7206.000	Average	44.72	-24.73	19.99	54.00	-34.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279




Page: 47 of 51

Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :EDR 3M Test Date :2024-04-08
Test Frequency :2402 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :E2 Plane Engineer :Temo Chen

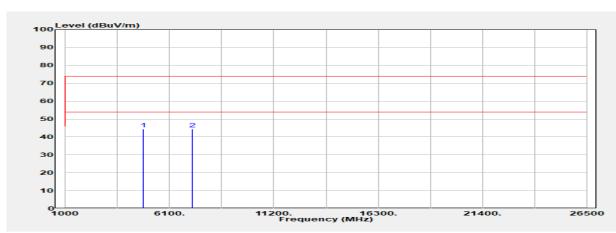

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4804.000	Peak	39.57	4.98	44.55	74.00	-29.45
7206.000	Peak	34.60	9.80	44.40	74.00	-29.60
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4804.000	Average	44.55	-24.73	19.82	54.00	-34.18
7206.000	Average	44.40	-24.73	19.67	54.00	-34.33

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 48 of 51

Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :EDR 3M Test Date :2024-04-08 Test Frequency :2441 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

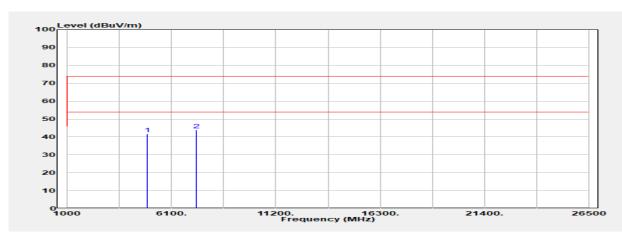

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4882.000	Peak	36.28	5.38	41.66	74.00	-32.34
7323.000	Peak	34.65	9.34	43.99	74.00	-30.01
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4882.000	Average	41.66	-24.73	16.93	54.00	-37.07
7323.000	Average	43.99	-24.73	19.26	54.00	-34.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事高纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 49 of 51

Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :EDR 3M Test Date :2024-04-08
Test Frequency :2441 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :E2 Plane Engineer :Temo Chen

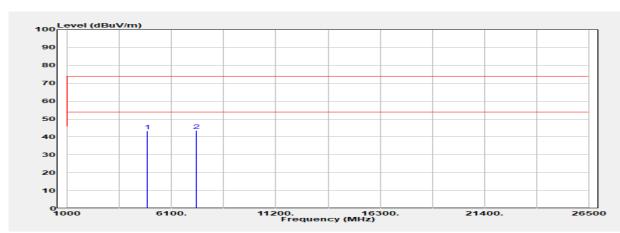

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4882.000	Peak	37.88	5.38	43.26	74.00	-30.74
7323.000	Peak	34.30	9.34	43.64	74.00	-30.36
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4882.000	Average	43.26	-24.73	18.53	54.00	-35.47
7323.000	Average	43.64	-24.73	18.91	54.00	-35.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. No.134,V 台灣檢驗科技股份有限公司 t (886-2)




Page: 50 of 51

Report Number :TERF2404000846E2 Test Site :SAC G Chamber

Operation Mode :EDR 3M Test Date :2024-04-08 Test Frequency :2480 MHz Temp./Humi. :23.6°C/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :E2 Plane Engineer :Temo Chen

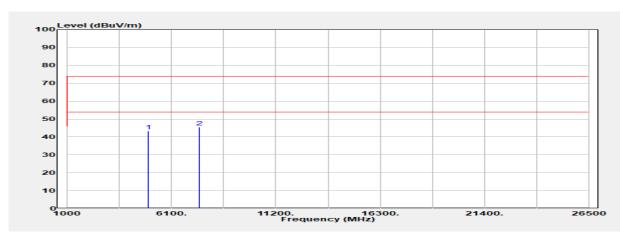

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4960.000	Peak	37.62	5.67	43.30	74.00	-30.70
7440.000	Peak	34.26	11.35	45.61	74.00	-28.39
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4960.000	Average	43.30	-24.73	18.57	54.00	-35.43
7440.000	Average	45.61	-24.73	20.88	54.00	-33.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 51 of 51

Report Number :TERF2404000846E2 **Test Site** :SAC G Chamber

Operation Mode: EDR 3M Test Date :2024-04-08 Temp./Humi. :23.6°C/63% Test Frequency :2480 MHz

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :E2 Plane :Temo Chen Engineer

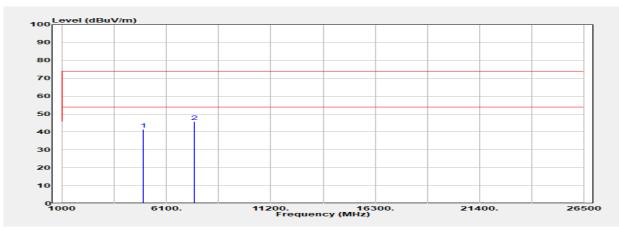

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP	dΒμV	dB	dBμV/m	dBμV/m	dB
4960.000	Peak	35.82	5.67	41.49	74.00	-32.51
7440.000	Peak	34.58	11.35	45.93	74.00	-28.07
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4960.000	Average	41.49	-24.73	16.76	54.00	-37.24
7440.000	Average	45.93	-24.73	21.20	54.00	-32.80

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司