



FCC SAR Test Report

APPLICANT : Quanta Computer Inc
EQUIPMENT : Laptop Computer
BRAND NAME : OLPC
MODEL NAME : XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS
FCC ID : HFS-CL4
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Feb. 21, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
2.1 Testing Laboratory	5
2.2 Applicant	5
2.3 Manufacturer	5
2.4 Application Details	5
3. General Information	6
3.1 Description of Equipment Under Test (EUT)	6
3.2 Maximum RF output power among production units	6
3.3 Product Photos	7
3.4 Applied Standard	7
3.5 Device Category and SAR Limits	7
3.6 Test Conditions	7
4. Specific Absorption Rate (SAR)	8
4.1 Introduction	8
4.2 SAR Definition	8
5. SAR Measurement System	9
5.1 E-Field Probe	10
5.2 Data Acquisition Electronics (DAE)	11
5.3 Robot	11
5.4 Measurement Server	11
5.5 Phantom	12
5.6 Device Holder	12
5.7 Data Storage and Evaluation	13
5.8 Test Equipment List	15
6. Tissue Simulating Liquids	16
7. SAR System Verification	17
7.1 Purpose of System Performance check	17
7.2 System Setup	17
7.3 SAR System Verification Results	18
8. EUT Testing Position	19
9. Measurement Procedures	20
9.1 Spatial Peak SAR Evaluation	20
9.2 Power Reference Measurement	21
9.3 Area & Zoom Scan Procedures	21
9.4 Volume Scan Procedures	22
9.5 SAR Averaged Methods	22
9.6 Power Drift Monitoring	22
10. Conducted RF Output Power (Unit: dBm)	23
11. Exposure Positions Consideration	25
12. SAR Test Results	31
12.1 Test Records for Body SAR Test	31
12.2 Repeated SAR Measurement	32
12.3 Highest SAR Plot	32
12.4 Simultaneous Multi-band Transmission Analysis	35
13. Uncertainty Assessment	37
14. References	40
Appendix A. Plots of System Performance Check	
Appendix B. Plots of SAR Measurement	
Appendix C. DASYS Calibration Certificate	
Appendix D. Product Photos	
Appendix E. Test Setup Photos	



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Quanta Computer Inc;**
DUT: Laptop Computer; Brand Name: OLPC; Model Name: XO-4 Touch, XO-4 HS Touch, XO-4,
XO-4 HS are as follows.

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Highest Reported 1g-SAR (W/kg)	Equipment Class
Body (0 cm Gap)	WLAN 2.4GHz	0.74	DTS
	WLAN 5GHz Band 4	1.37	DTS

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
WLAN 5GHz Band 4	DTS	Body (0 cm Gap)	1.37
Bluetooth	DSS		

Remark:

The highest simultaneous transmission is scalar summation of reported standalone SAR per FCC KDB 690783 D01 v01r02, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

2.2 Applicant

Company Name	Quanta Computer Inc
Address	No.188, Wen Hwa 2nd Rd., Kuei Shan Hsiang, Tao Yuan Shien, TaiWan

2.3 Manufacturer

Company Name	Quanta Computer Inc
Address	No.188, Wen Hwa 2nd Rd., Kuei Shan Hsiang, Tao Yuan Shien, TaiWan

2.4 Application Details

Date of Start during the Test	Feb. 05, 2013
Date of End during the Test	Feb. 21, 2013

3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification																
EUT	Laptop Computer															
Brand Name	OLPC															
Model Name	XO-4 Touch, XO-4 HS Touch, XO-4, XO-4 HS															
WLAN Module	Trade Name: Liteon Model Name: WCBN603MH															
FCC ID	HFS-CL4															
TX Frequency	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5GHz Band: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz															
Antenna Type	WLAN: Monopole Antenna Bluetooth: Monopole Antenna															
Uplink Modulations	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth BDR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK															
DUT Stage	Identical Prototype															
Remark: 1. There are four models of this project. The differences between them are summary below: <table border="1" data-bbox="295 1055 1406 1216"> <thead> <tr> <th>Sample List</th> <th>Model Name</th> <th>Configuration</th> </tr> </thead> <tbody> <tr> <td>Sample 1</td> <td>XO-4 Touch</td> <td>Child Product with touch screen</td> </tr> <tr> <td>Sample 2</td> <td>XO-4 HS Touch</td> <td>ITE Product with touch screen</td> </tr> <tr> <td>Sample 3</td> <td>XO-4</td> <td>Child Product without touch screen</td> </tr> <tr> <td>Sample 4</td> <td>XO-4 HS</td> <td>ITE Product without touch screen</td> </tr> </tbody> </table> <p>The four types of EUT is not affect SAR test, we only choose sample 1 to perform all test.</p> 2. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 3. Voice call is not supported.		Sample List	Model Name	Configuration	Sample 1	XO-4 Touch	Child Product with touch screen	Sample 2	XO-4 HS Touch	ITE Product with touch screen	Sample 3	XO-4	Child Product without touch screen	Sample 4	XO-4 HS	ITE Product without touch screen
Sample List	Model Name	Configuration														
Sample 1	XO-4 Touch	Child Product with touch screen														
Sample 2	XO-4 HS Touch	ITE Product with touch screen														
Sample 3	XO-4	Child Product without touch screen														
Sample 4	XO-4 HS	ITE Product without touch screen														

3.2 Maximum RF output power among production units

IEEE 802.11 average power(dBm)					
Normal					
Mode/Band	a	b	g	n-HT20	n-HT40
WLAN 2.4GHz		17.5	11.5	12	11.5
5 GHz Band 1 WIFI	6.5			7.5	7.5
5 GHz Band 4 WIFI	15			14.5	15

Mode / Band	Bluetooth Average power(dBm)		
	1Mbps (GFSK)	2Mbps ($\pi/4$ -DQPSK)	3Mbps (8-DPSK)
2.4 GHz Bluetooth	1.5	-3	-3



3.3 Product Photos

Please refer to Appendix D.

3.4 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)
FCC KDB 447498 D01 v05
FCC KDB 648474 D04v01
FCC KDB 248227 D01 v01r02
FCC KDB 616217 D04 v01
FCC KDB 865664 D01 v01

3.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.6 Test Conditions

3.6.1 Ambient Condition

Table with 2 columns: Ambient Temperature (20 to 24 °C), Humidity (< 60 %)

3.6.2 Test Configuration

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

Duty factor observed as below:

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

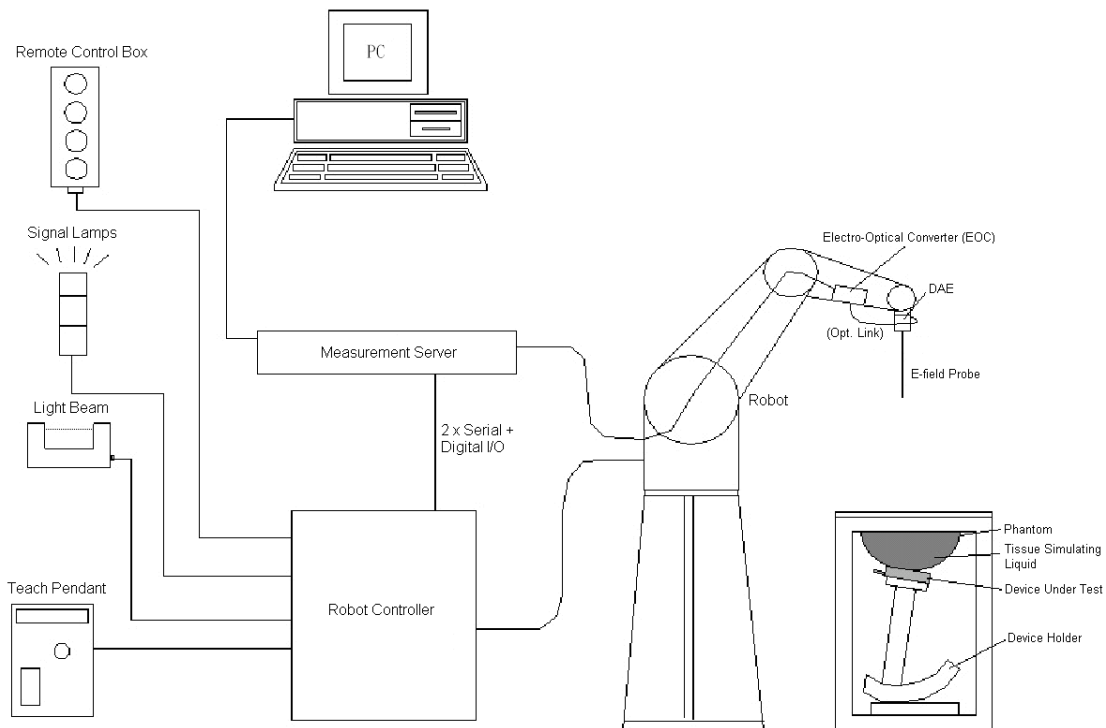


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<EX3DV4 Probe>


Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 5.2 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.3 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

5.5 Phantom

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



Fig 5.6 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

5.6 Device Holder

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

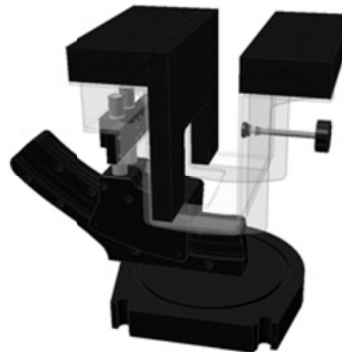


Fig 5.7 Laptop Extension Kit



5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2013
SPEAG	5000MHz System Validation Kit	D5GHzV2	1006	Dec. 11, 2012	Dec. 10, 2013
SPEAG	Data Acquisition Electronics	DAE4	1210	Dec. 05, 2012	Dec. 04, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	Jun. 20, 2012	Jun. 19, 2013
SPEAG	ELI4 Phantom	QD OVA 001 BB	1079	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Wireless Communication Test Set	E5515C	MY48367160	Oct. 25, 2012	Oct. 24, 2013
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Apr. 13, 2012	Apr. 12, 2013
Agilent	Power Meter	E4416A	MY45101555	Aug. 22, 2012	Aug. 21, 2013
Agilent	Power Sensor	E9327A	MY44421198	Aug. 22, 2012	Aug. 21, 2013
Woken	Attenuator 1	WK0602-XX	N/A	Note 4	
PE	Attenuator 2	PE7005-10	N/A	Note 4	
PE	Attenuator 3	PE7005- 3	N/A	Note 4	
Agilent	Dual Directional Coupler	778D	50422	Note 4	
Agilent	Dielectric Probe Kit	85070D	US01440205	Note 5	
AR	Power Amplifier	5S1G4M2	0328767	Note 6	
R&S	Spectrum Analyzer	FSP30	101399	Jun. 01, 2012	May 31, 2013

Table 5.1 Test Equipment List

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D2450V2, SN: 736 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
6. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
7. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



Fig 6.1 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Body								
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

Simulating Liquid for 5G, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	Body	21.2	2.002	53.464	1.95	52.7	2.67	1.45	±5	Feb. 05, 2013
5800	Body	21.3	6.004	48.915	6	48.2	0.07	1.48	±5	Feb. 21, 2013

Table 6.2 Measuring Results for Simulating Liquid

7. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

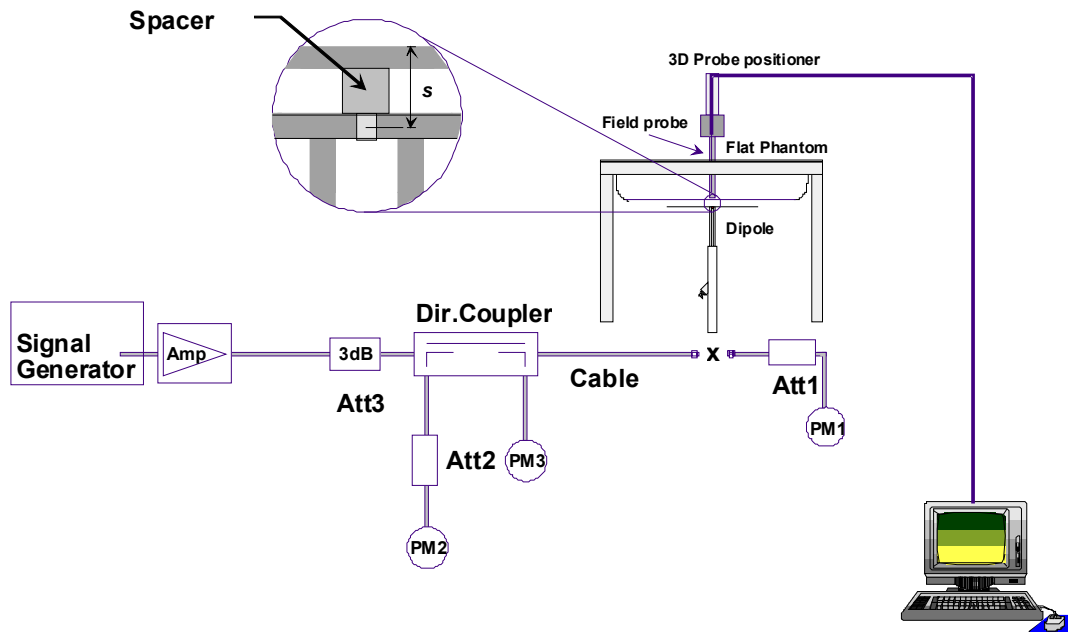


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Targeted SAR (W/kg)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
Feb. 05, 2013	2450	Body	250	52.3	13.1	52.4	0.19
Feb. 21, 2013	5800	Body	100	71.7	7.58	75.8	5.72

Table 7.1 Target and Measurement SAR after Normalized

8. EUT Testing Position

This DUT was tested in four different positions. They are Bottom of Laptop with phantom 0 cm gap, Bottom of Tablet with phantom 0 cm gap, Edge1 with phantom 0 cm gap, and Edge4 with phantom 0 cm gap. In these positions, the antenna of the DUT can be rotated through 0 degree or 180 degrees during the test. The illustrations for lap-touching position are as below.

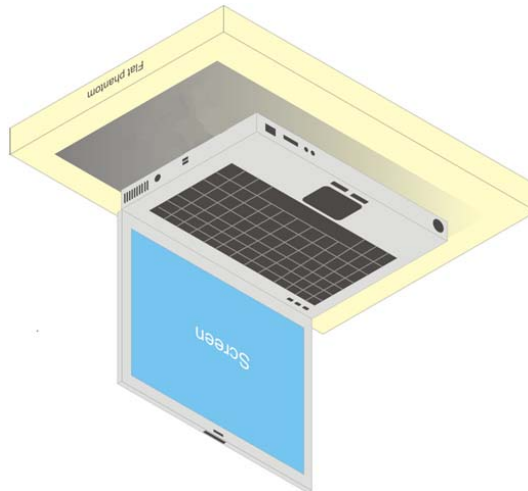


Fig 9.1 Illustration for Laptop PC on Lap-touching Position

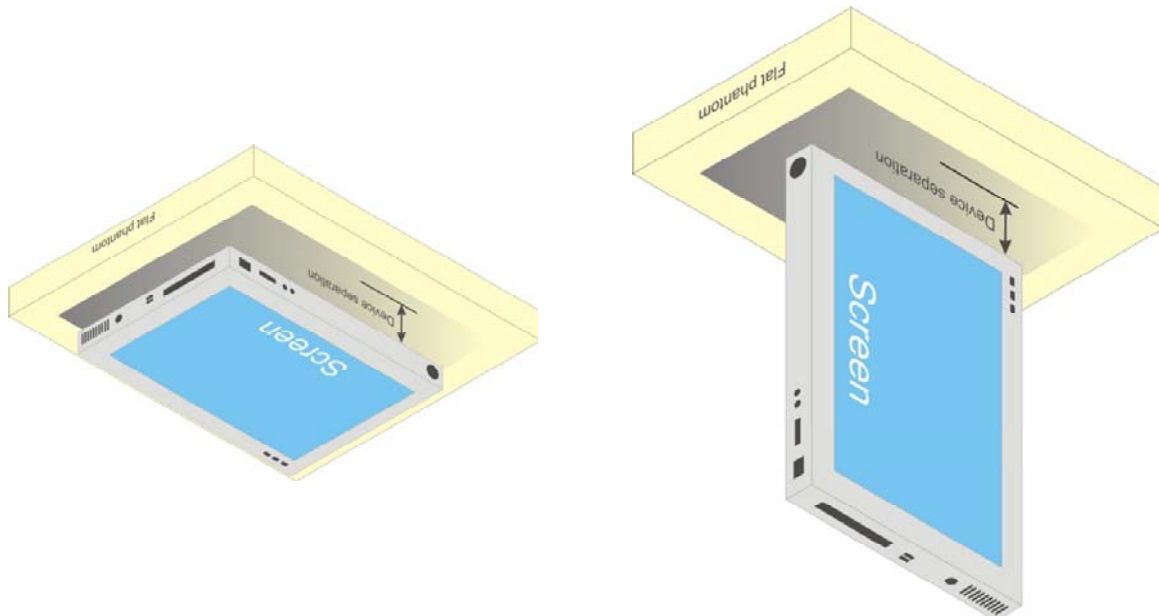


Fig 9.2 Illustration for Tablet PC on Lap-touching Position

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix E demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01 quoted below.

For any secondary peaks found in the area scan which are within 2 dB of the maximum peak and are not within this zoom scan, the zoom scan should be repeated

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom(n)}	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid Δz _{Zoom(1)} : between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	Δz _{Zoom(n>1)} : between subsequent points	≤ 1.5·Δz _{Zoom(n-1)}	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>I-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			



9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Conducted RF Output Power (Unit: dBm)

<WLAN 2.4GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Average power (dBm)			
			Data Rate (bps)			
			1M	2M	5.5M	11M
802.11b	CH 01	2412	15.66	15.46	15.26	14.96
	CH 06	2437	16.96	15.96	16.42	16.38
	CH 11	2462	15.92	16.06	16.25	16.18

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			Data Rate (bps)							
			6M	9M	12M	18M	24M	36M	48M	54M
802.11g	CH 01	2412	9.62	9.32	9.18	9.02	8.95	8.86	8.92	9.21
	CH 06	2437	10.65	10.68	10.65	10.32	10.45	10.86	10.98	10.89
	CH 11	2462	11.02	10.85	10.82	10.78	10.68	10.52	10.45	10.28

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			MCS Index							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n HT20	CH 01	2412	10.04	10.36	10.06	10.02	10.05	10.08	10.09	10.12
	CH 06	2437	11.24	11.28	11.26	11.22	11.38	11.45	11.32	11.29
	CH 11	2462	11.34	11.32	11.28	11.16	11.35	11.42	11.45	11.47

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			MCS Index							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n HT40	CH 03	2422	9.11	9.31	9.24	9.19	9.21	9.12	9.28	9.13
	CH 06	2437	10.41	9.98	9.78	10.21	9.68	9.56	10.24	10.17
	CH 09	2452	10.98	11.04	11.03	10.96	10.62	10.12	10.78	11.12

Note:

- Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
- For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
- Per KDB 248227 D01 v01r02, 11g, 11n-HT20 and 11n-HT40 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Average Power (dBm)								
			Data Rate								
			DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5
Bluetooth	CH 00	2402	-1.32	-1.27	-0.87	-4.87	-5.03	-4.89	-4.56	-4.73	-4.61
	CH 39	2441	-0.28	0.72	1.00	-3.84	-3.93	-4.05	-3.63	-3.92	-3.79
	CH 78	2480	0.43	0.77	1.16	-3.34	-3.65	-3.70	-3.67	-3.84	-3.85



<WLAN 5GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Average Power (dBm)							
			Data Rate (bps)							
			6M	9M	12M	18M	24M	36M	48M	54M
802.11a (5GHz)	CH 036	5180	6.38	6.32	6.32	6.12	6.25	6.13	6.22	6.23
	CH 040	5200	6.10	6.01	6.05	6.08	6.03	5.92	6.05	5.98
	CH 044	5220	6.18	6.01	5.96	6.08	6.02	5.86	6.03	5.82
	CH 048	5240	6.21	6.13	6.12	6.11	6.13	6.12	6.18	6.13
	CH 149	5745	13.49	13.32	13.23	13.44	13.32	13.30	13.46	13.35
	CH 153	5765	14.13	13.85	13.78	14.08	13.85	13.82	13.92	13.84
	CH 157	5785	14.40	14.34	14.28	14.32	14.35	14.28	14.12	14.37
	CH 161	5805	14.43	14.36	14.38	14.12	14.22	14.39	14.16	14.28
CH 165	5825	14.58	14.55	14.45	14.38	14.45	14.37	14.21	14.54	

Mode	Channel	Frequency (MHz)	Average Power (dBm)							
			MCS Index							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n-HT20 (5GHz)	CH 036	5180	6.80	6.69	6.67	6.42	6.52	6.58	6.48	6.38
	CH 040	5200	7.18	7.13	7.15	7.08	6.98	7.02	6.97	6.89
	CH 044	5220	7.13	7.05	6.89	6.92	7.02	6.87	6.78	7.02
	CH 048	5240	7.36	7.28	7.31	7.29	7.18	7.31	7.22	7.11
	CH 149	5745	12.79	12.66	12.7	12.76	12.68	12.59	12.71	12.7
	CH 153	5765	13.63	13.53	13.61	13.56	13.44	13.38	13.31	13.4
	CH 157	5785	14.21	14.18	14.05	14.17	14.1	13.96	14.09	14.08
	CH 161	5805	14.32	14.3	14.26	14.28	14.16	14.01	14.1	14.29
CH 165	5825	14.43	14.39	14.38	14.36	14.23	14.03	14.15	14.21	


Mode	Channel	Frequency (MHz)	Average Power (dBm)							
			MCS Index							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n-HT40 (5GHz)	CH 038	5190	6.96	6.95	6.88	6.82	6.92	6.61	6.59	6.57
	CH 040	5220	6.93	6.91	6.87	6.84	6.75	6.68	6.85	6.87
	CH 044	5220	6.89	6.72	6.65	6.86	6.81	6.86	6.79	6.82
	CH 046	5230	6.91	6.78	6.82	6.75	6.68	6.57	6.85	6.90
	CH 151	5755	13.95	13.85	13.71	13.78	13.8	13.83	13.75	13.82
	CH 159	5795	14.38	14.29	14.22	14.32	14.33	14.2	14.25	14.3

Note:


1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
3. Per KDB 248227 D01 v01r02, 11n-HT20 and 11n-HT40 output power is less than 1/4dB higher than 802.11b mode, thus the SAR can be excluded.

11. Exposure Positions Consideration

<Tablet PC Antenna position 0° >

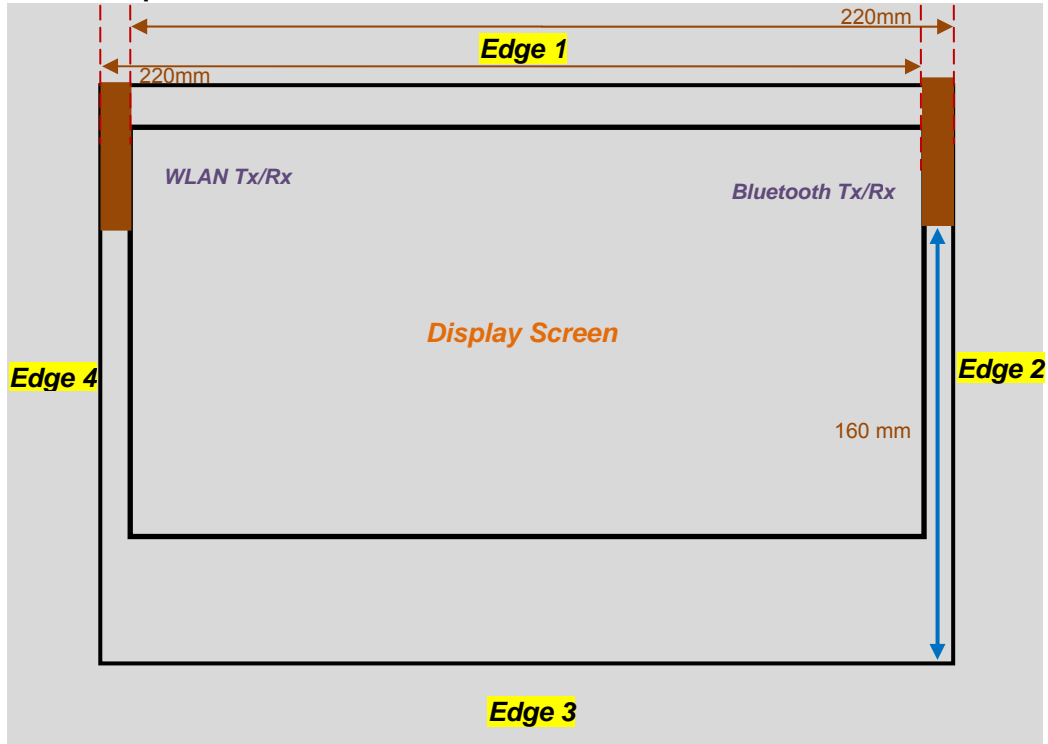


<Tablet PC Antenna position 180° >

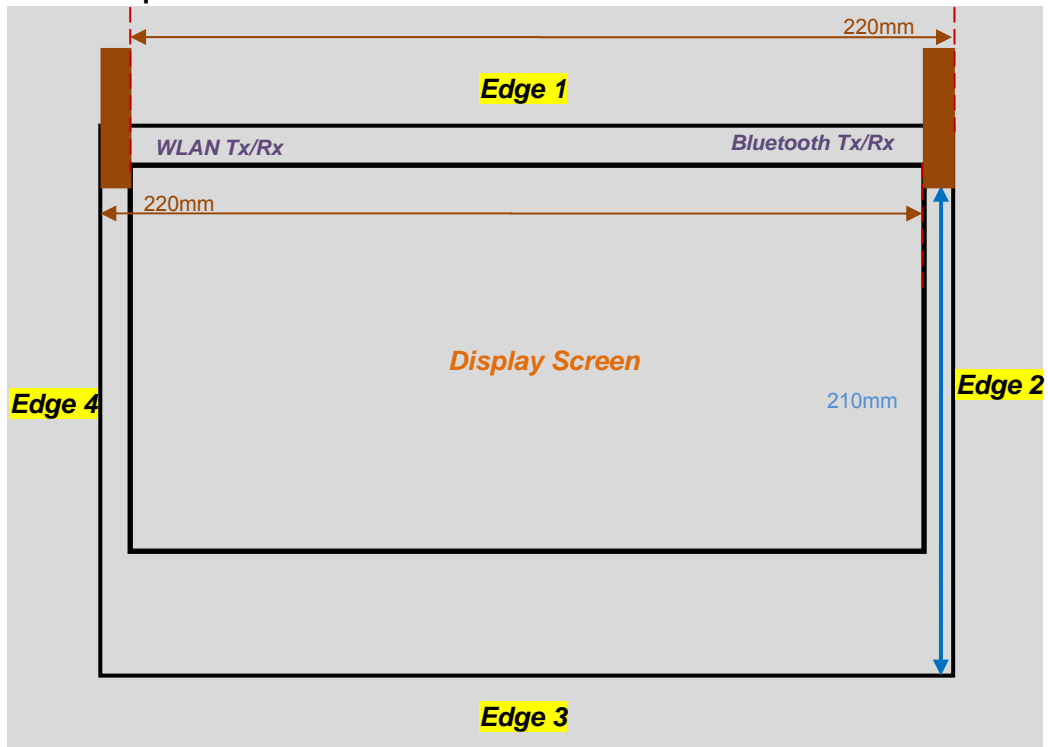


Note: The display screen can be fold onto the keypad and the device is in tablet mode

<Laptop position 0° >

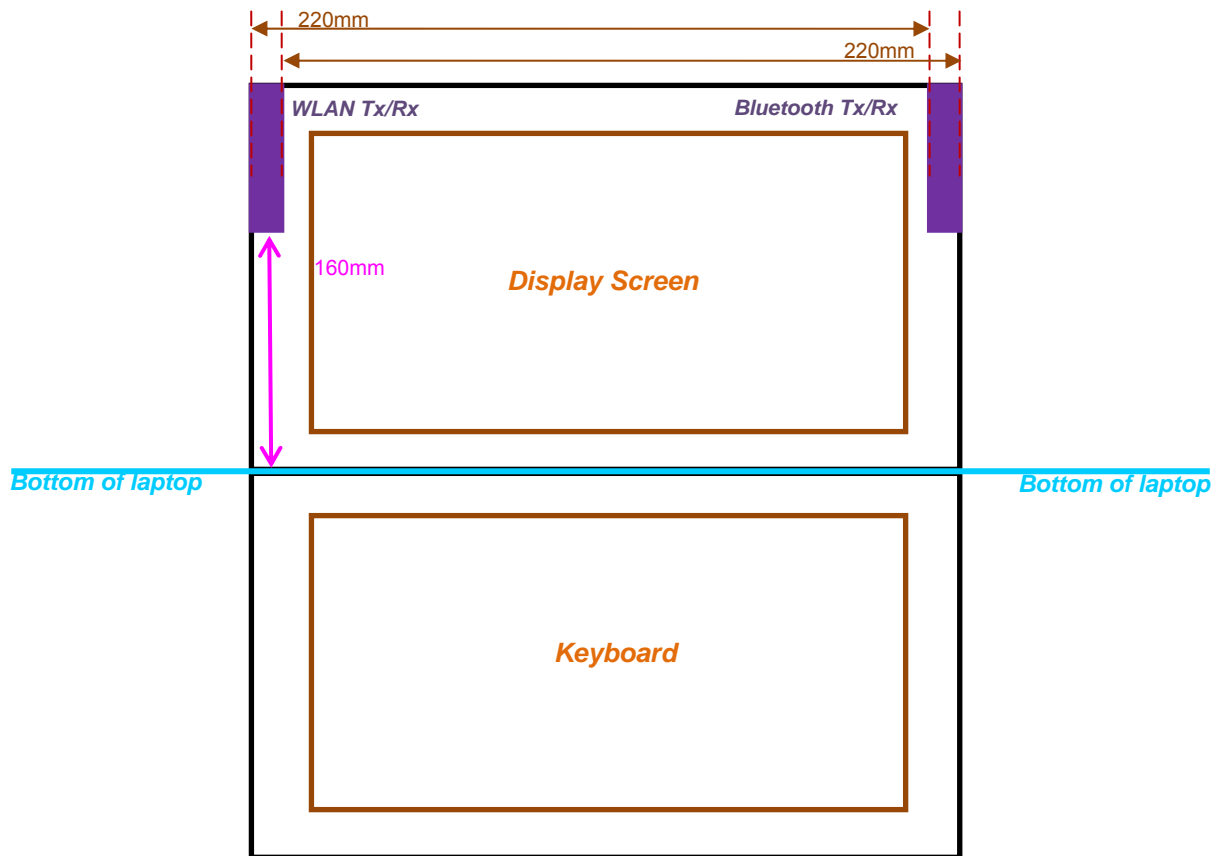

<Laptop position 180° >

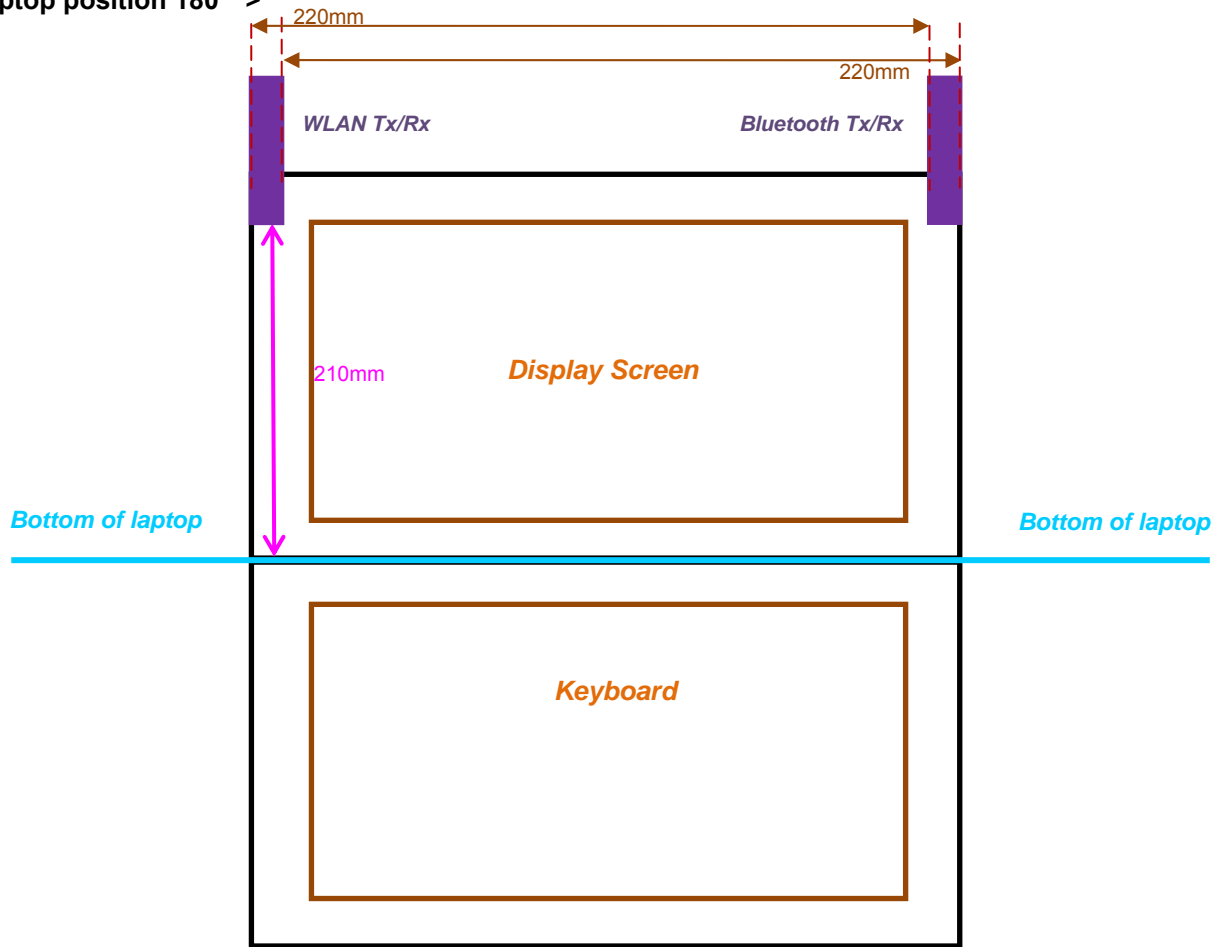

Antennas	Wireless Interface
WLAN Antenna (Tx / Rx)	WLAN 2.4GHz WLAN 5GHz
Bluetooth Antenna (Tx / Rx)	Bluetooth



<Antenna position 0° >					
Exposure Position	Wireless Interface	WLAN 2.4GHz	WLAN 5GHz Band 1	WLAN 5GHz Band 4	Bluetooth
	Tune-up Maximum power (dBm)	17.5	7.5	15	1.5
	Tune-up Maximum rated power (mW)	56.23	5.62	31.62	1.41
Bottom of Laptop	Antenna to user (mm)	5			5
	SAR exclusion threshold (mW)	10	7	6	10
	SAR testing required?	YES	NO	YES	NO
Bottom of Tablet	Antenna to user (mm)	5			5
	SAR exclusion threshold (mW)	10	7	6	10
	SAR testing required?	YES	NO	YES	NO
Edge 1	Antenna to user (mm)	5			5
	SAR exclusion threshold (mW)	10	7	6	10
	SAR testing required?	YES	NO	YES	NO
Edge 2	Antenna to user (mm)	220			5
	SAR exclusion threshold (mW)	1796	1766	1762	10
	SAR testing required?	NO	NO	NO	NO
Edge 3	Antenna to user (mm)	160			160
	SAR exclusion threshold (mW)	1196	1166	1162	1195
	SAR testing required?	NO	NO	NO	NO
Edge 4	Antenna to user (mm)	5			220
	SAR exclusion threshold (mW)	10	7	6	1795
	SAR testing required?	YES	NO	YES	NO

<Antenna position 180° >					
Exposure Position	Wireless Interface	WLAN 2.4GHz	WLAN 5GHz Band 1	WLAN 5GHz Band 4	Bluetooth
	Tune-up Maximum power (dBm)	17.5	7.5	15	1.5
	Tune-up Maximum rated power (mW)	56.23	5.62	31.62	1.41
Bottom of Laptop	Antenna to user (mm)	5			5
	SAR exclusion threshold (mW)	10	7	6	10
	SAR testing required?	YES	NO	YES	NO
Bottom of Tablet	Antenna to user (mm)	5			5
	SAR exclusion threshold (mW)	10	7	6	10
	SAR testing required?	YES	NO	YES	NO
Edge 1	Antenna to user (mm)	5			5
	SAR exclusion threshold (mW)	10	7	6	10
	SAR testing required?	YES	NO	YES	NO
Edge 2	Antenna to user (mm)	220			5
	SAR exclusion threshold (mW)	1796	1766	1762	10
	SAR testing required?	NO	NO	NO	NO
Edge 3	Antenna to user (mm)	210			210
	SAR exclusion threshold (mW)	1696	1666	1662	1695
	SAR testing required?	NO	NO	NO	NO
Edge 4	Antenna to user (mm)	5			220
	SAR exclusion threshold (mW)	10	7	6	1795
	SAR testing required?	YES	NO	YES	NO

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05, for larger devices, the *test separation distance* is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01v05, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v05, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

12. SAR Test Results

Note:

- Per KDB 447498 D01v05, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 $Scaling\ Factor = \frac{tune-up\ limit\ power\ (mW)}{EUT\ RF\ power\ (mW)}$, where tune-up limit is the maximum rated power among all production units.
 $Reported\ SAR(W/kg) = Measured\ SAR(W/kg) * Scaling\ Factor$
- Per KDB 447498 D01v05, for each exposure position, if the highest output channel reported SAR $\leq 0.8W/kg$, other channels SAR testing is not necessary.
- Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$

12.1 Test Records for Body SAR Test

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	DUT Mode	Antenna Position	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#01	WLAN 2.4GHz	802.11b	Laptop PC	0°	Bottom of Laptop	0	6	2437	16.96	17.5	1.132	0.04	0.014	0.016
#02	WLAN 2.4GHz	802.11b	Laptop PC	180°	Bottom of Laptop	0	6	2437	16.96	17.5	1.132	0.06	0.049	0.055
#03	WLAN 2.4GHz	802.11b	Tablet PC	0°	Bottom of Tablet	0	6	2437	16.96	17.5	1.132	0.07	0.027	0.031
#04	WLAN 2.4GHz	802.11b	Tablet PC	180°	Bottom of Tablet	0	6	2437	16.96	17.5	1.132	0.05	0.063	0.071
#05	WLAN 2.4GHz	802.11b	Tablet PC	0°	Edge1	0	6	2437	16.96	17.5	1.132	0.04	0.007	0.008
#06	WLAN 2.4GHz	802.11b	Tablet PC	180°	Edge1	0	6	2437	16.96	17.5	1.132	0.03	0.035	0.040
#11	WLAN 2.4GHz	802.11b	Tablet PC	0°	Edge4	0	6	2437	16.96	17.5	1.132	-0.09	0.381	0.431
#12	WLAN 2.4GHz	802.11b	Tablet PC	180°	Edge4	0	6	2437	16.96	17.5	1.132	0.01	0.652	0.738

<WLAN 5GHz SAR>

Plot No.	Band	Mode	DUT Mode	Antenna Position	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#13	WLAN 5GHz	802.11a	Laptop PC	0°	Bottom of Laptop	0	165	5825	14.58	15	1.102	0.001	0.00937	0.010
#14	WLAN 5GHz	802.11a	Laptop PC	180°	Bottom of Laptop	0	165	5825	14.58	15	1.102	0.02	0.034	0.037
#15	WLAN 5GHz	802.11a	Tablet PC	0°	Bottom of Tablet	0	165	5825	14.58	15	1.102	0.03	0.061	0.067
#16	WLAN 5GHz	802.11a	Tablet PC	180°	Bottom of Tablet	0	165	5825	14.58	15	1.102	0.05	0.120	0.132
#17	WLAN 5GHz	802.11a	Tablet PC	0°	Edge1	0	165	5825	14.58	15	1.102	0.07	0.017	0.019
#18	WLAN 5GHz	802.11a	Tablet PC	180°	Edge1	0	165	5825	14.58	15	1.102	0.01	0.118	0.130
#19	WLAN 5GHz	802.11a	Tablet PC	0°	Edge4	0	165	5825	14.58	15	1.102	-0.02	1.240	1.366
#20	WLAN 5GHz	802.11a	Tablet PC	180°	Edge4	0	165	5825	14.58	15	1.102	0.07	0.896	0.987
#21	WLAN 5GHz	802.11a	Tablet PC	0°	Edge4	0	149	5745	14.58	15	1.102	-0.05	0.854	0.941
#22	WLAN 5GHz	802.11a	Tablet PC	0°	Edge4	0	157	5785	14.58	15	1.102	0.09	1.160	1.278
#23	WLAN 5GHz	802.11a	Tablet PC	180°	Edge4	0	149	5745	14.58	15	1.102	0.02	0.637	0.702
#24	WLAN 5GHz	802.11a	Tablet PC	180°	Edge4	0	157	5785	14.58	15	1.102	0.01	0.854	0.941



12.2 Repeated SAR Measurement

Plot No.	Band	Mode	DUT Mode	Antenna Position	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Ratio	Reported SAR _{1g} (W/kg)
#19	WLAN 5GHz	802.11a	Tablet PC	0°	Edge4	0	165	5825	14.58	15	1.102	-0.02	1.240	1	1.366
#25	WLAN 5GHz	802.11a	Tablet PC	0°	Edge4	0	165	5825	14.58	15	1.102	-0.09	1.220	1.020	1.344

Note:

1. Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01, if the deviation among the repeated measurement is $\leq 20\%$ and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The deviation is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

12.3 Highest SAR Plot

Plot No.	Band	Mode	DUT Mode	Antenna Position	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#12	WLAN 2.4GHz	802.11b	Tablet PC	180°	Edge4	0	6	2437	16.96	17.5	1.132	0.01	0.652	0.738
#19	WLAN 5GHz	802.11a	Tablet PC	0°	Edge4	0	165	5825	14.58	15	1.102	-0.02	1.240	1.366

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-2-5

#12 802.11b_Edge4_0cm_Tablet PC_Ant Degree 180_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (81x281x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.129 mW/g


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.558 W/kg

SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 1.063 mW/g

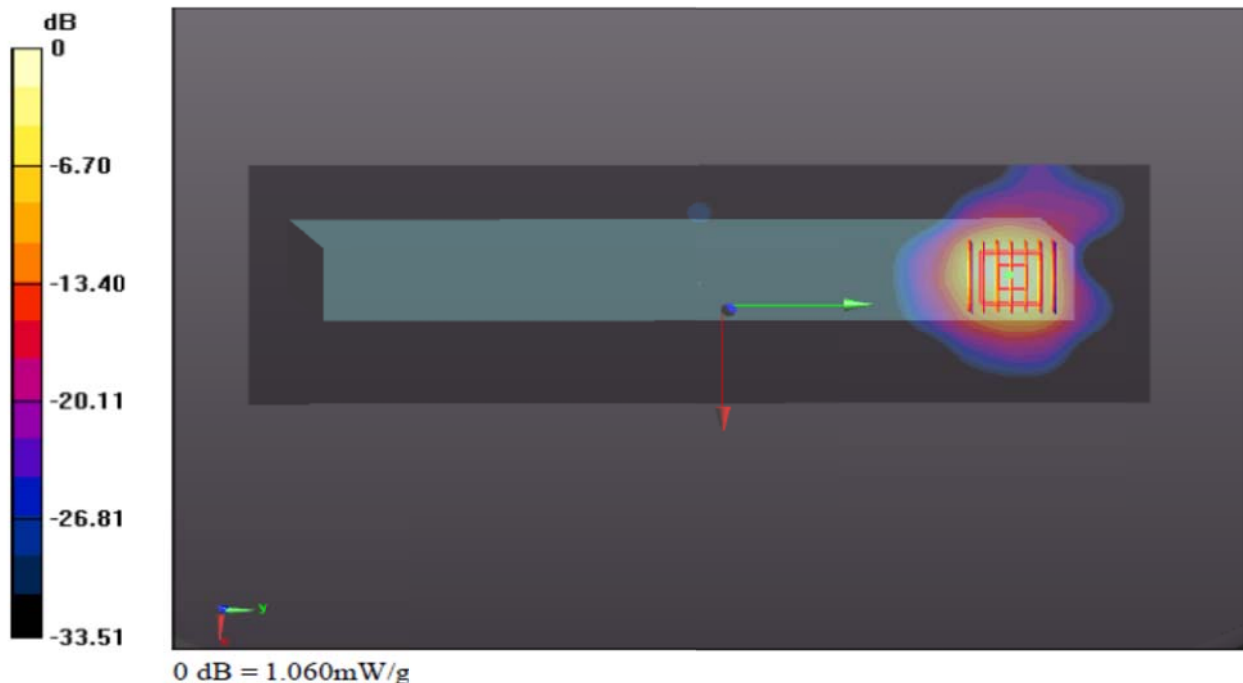

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-2-21

#19 802.11a_Edge4_0cm_Tablet PC_Ant Degree 0_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.065 \text{ mho/m}$; $\epsilon_r =$

48.834 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $21.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.3 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (81x281x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 3.418 mW/g


Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 5.522 W/kg

SAR(1 g) = 1.24 mW/g ; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 3.097 mW/g

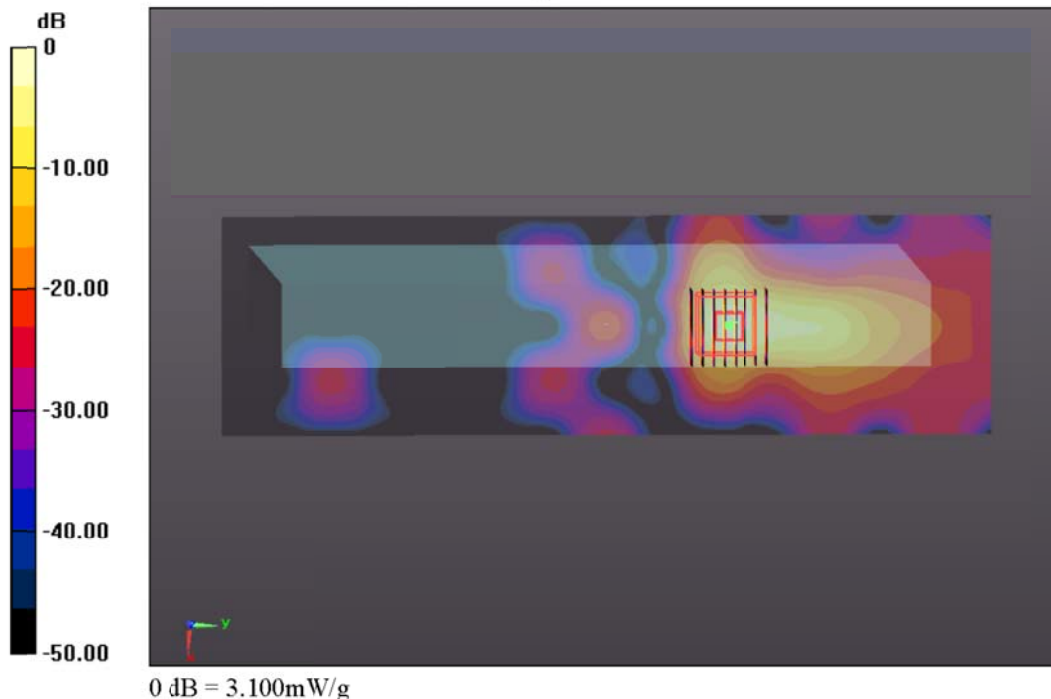

12.4 Simultaneous Multi-band Transmission Analysis

No.	Applicable Simultaneous Transmission Combination
1.	WLAN + Bluetooth

Note:

1. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, they will not transmit simultaneously.
2. The reported SAR summation is calculated based on the same configuration and test position.
3. For simultaneous transmission analysis, Bluetooth and WLAN 5GHz Band 1 SAR are estimated per KDB 447498 D01v05 based on the formula below.
 - 1) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{W/kg}$ for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - 2) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth				
Exposure Position	Bottom of Laptop	Bottom of Tablet	Edge 1	Edge 4
Test separation	0 mm	0 mm	0 mm	0 mm
Antenna to user distance	5 mm	5 mm	5 mm	220 mm
Estimated SAR (W/kg)	0.059 W/kg	0.059 W/kg	0.059 W/kg	0.001 W/kg

WLAN 5GHz Band 1				
Exposure Position	Bottom of Laptop	Bottom of Tablet	Edge 1	Edge 4
Test separation	0 mm	0 mm	0 mm	0 mm
Antenna to user distance	5 mm	5 mm	5 mm	5 mm
Estimated SAR (W/kg)	0.343 W/kg	0.343 W/kg	0.343 W/kg	0.343 W/kg

4. Per KDB 447498 D01v05, simultaneous transmission SAR is compliant if,
 - (i) Scalar SAR summation $< 1.6 \text{W/kg}$.
 - (ii) $\text{SPLSR} = (\text{SAR1} + \text{SAR2}) \cdot 1.5 / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - (iii) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6 \text{W/kg}$.



Position	WLAN			Bluetooth	WLAN + Bluetooth	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Estimated Bluetooth SAR (W/kg)	(W/kg)		
Bottom of Laptop	WLAN 2.4GHz	#02	0.055	0.059	0.11	-	-
	WLAN 5GHz Band 1	-	0.343	0.059	0.40	-	-
	WLAN 5GHz Band 4	#14	0.037	0.059	0.10	-	-
Bottom of Tablet	WLAN 2.4GHz	#03	0.071	0.059	0.13	-	-
	WLAN 5GHz Band 1	-	0.343	0.059	0.40	-	-
	WLAN 5GHz Band 4	#16	0.132	0.059	0.19	-	-
Edge 1	WLAN 2.4GHz	#06	0.040	0.059	0.10	-	-
	WLAN 5GHz Band 1	-	0.343	0.059	0.40	-	-
	WLAN 5GHz Band 4	#18	0.130	0.059	0.19	-	-
Edge 4	WLAN 2.4GHz	#12	0.738	0.001	0.74	-	-
	WLAN 5GHz Band 1	-	0.343	0.001	0.34	-	-
	WLAN 5GHz Band 4	#19	1.366	0.001	1.37	-	-

Test Engineer : Fulu Hu

13. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 13.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty	Probability	Divisor	Ci	Ci	Standard	Standard
	Value (±%)	Distribution		(1g)	(10g)	Uncertainty (1g)	Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 13.2 Uncertainty Budget of DASYS for frequency range 300 MHz to 3 GHz from IEEE Std 1528™-2003



Error Description	Uncertainty	Probability	Divisor	Ci	Ci	Standard	Standard
	Value (±%)	Distribution		(1g)	(10g)	Uncertainty (1g)	Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 13.3 Uncertainty Budget of DASYS for frequency range 3 GHz to 6 GHz from IEEE Std 1528™-2003



14. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, “SAR Measurement Procedures for 802.11 a/b/g Transmitters”, May 2007
- [7] FCC KDB 447498 D01 v05, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, October 2012
- [8] FCC KDB 648474 D04 v01, “SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas”, October 2012
- [9] FCC KDB 616217 D04 v01, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, October 2012.
- [10] FCC KDB 865664 D01 v01, “SAR Measurement Requirements for 100MHz to 6GHz”, October 2012



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Body_2450MHz_130205

DUT: D2450V2 - SN:736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.002$ mho/m; $\epsilon_r =$

53.464; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.423 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.861 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.247 W/kg

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.05 mW/g

Maximum value of SAR (measured) = 20.005 mW/g

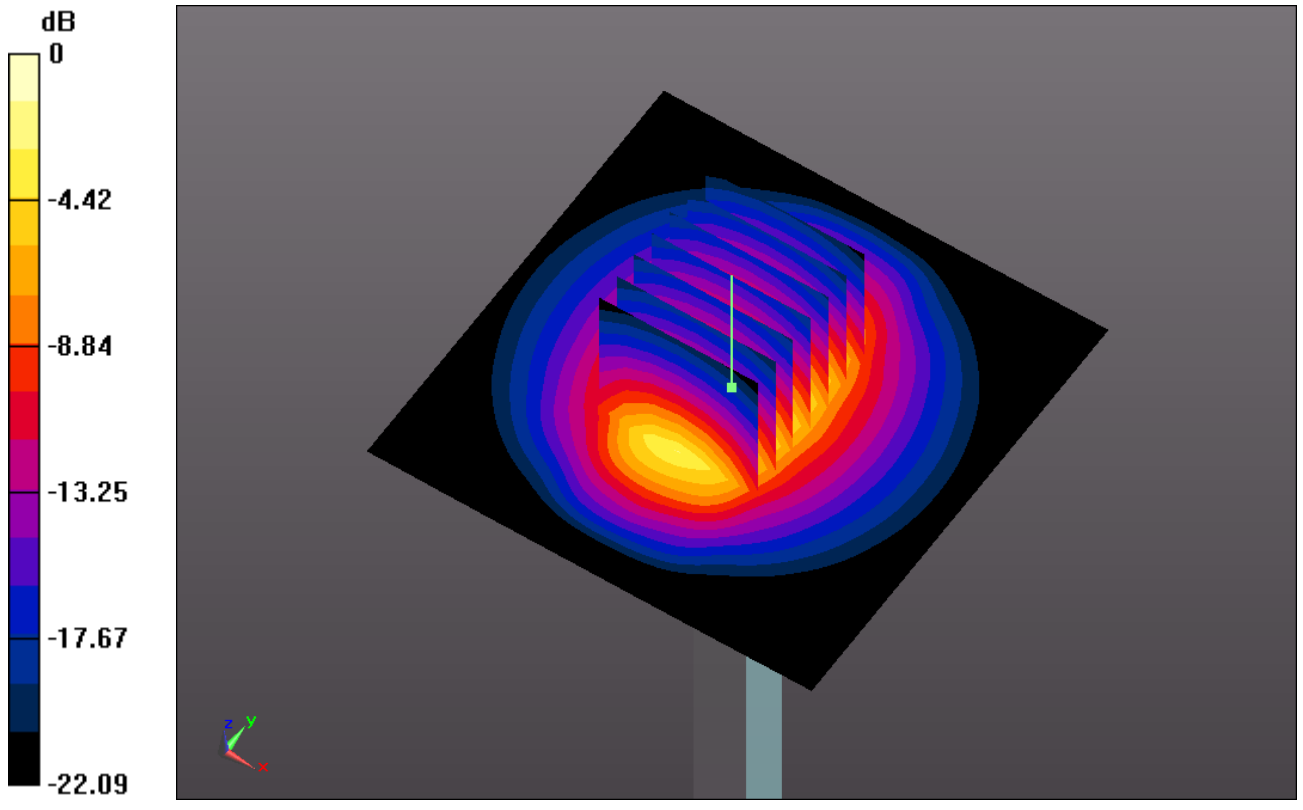

0 dB = 20.000mW/g

System Check_Body_5800MHz_130221

DUT: D5GHzV2 - SN: 1006

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5800$ MHz; $\sigma = 6.004$ mho/m; $\epsilon_r =$

48.915; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Pin=100mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 18.851 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.564 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 31.298 W/kg

SAR(1 g) = 7.58 mW/g; SAR(10 g) = 2.09 mW/g

Maximum value of SAR (measured) = 19.012 mW/g

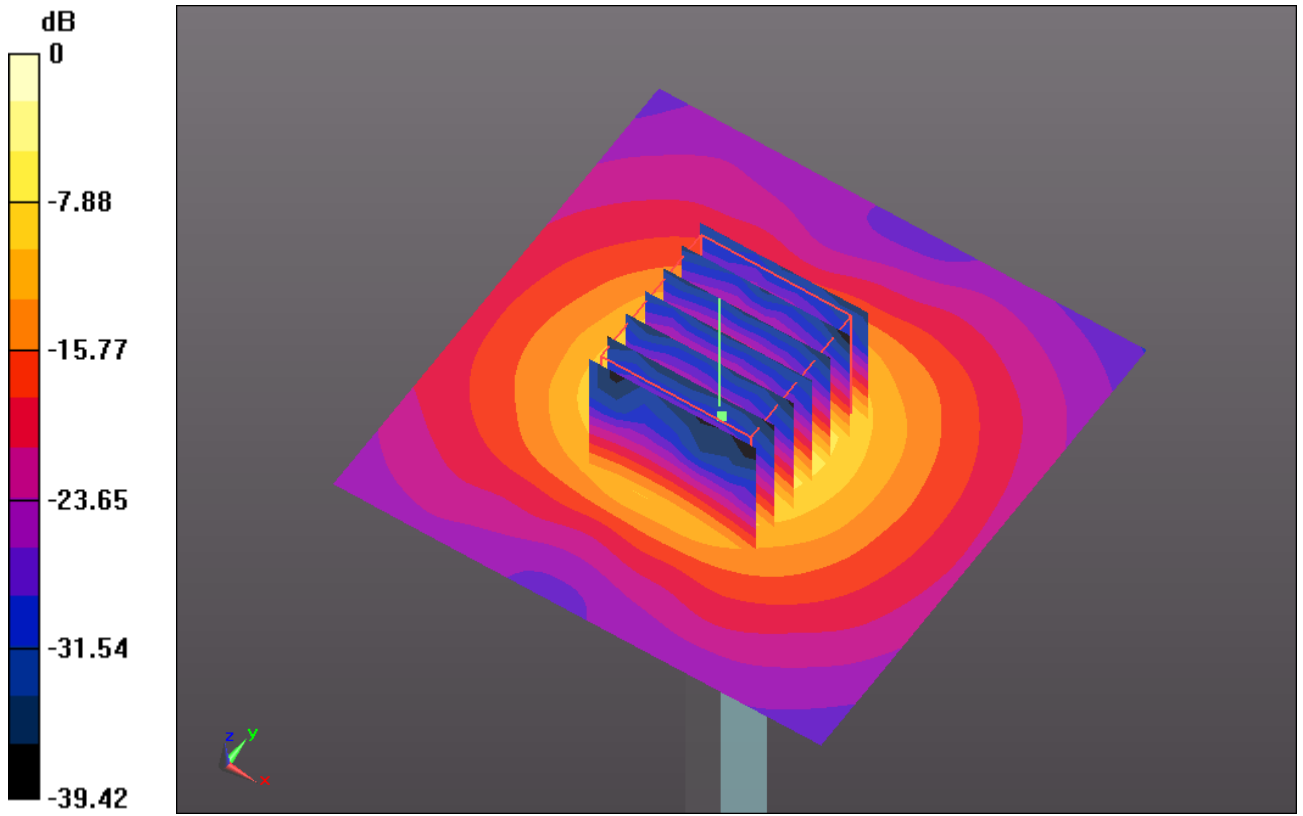

0 dB = 19.010mW/g



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

#01 WLAN 2.4GHz_802.11b_Bottom of Laptop_0cm_Laptop PC_Ant Degree 0_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (231x251x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.016 mW/g

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.446 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.024 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.017 mW/g



Ch6/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.446 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.014 W/kg

SAR(1 g) = 0.010 mW/g; SAR(10 g) = 0.00752 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

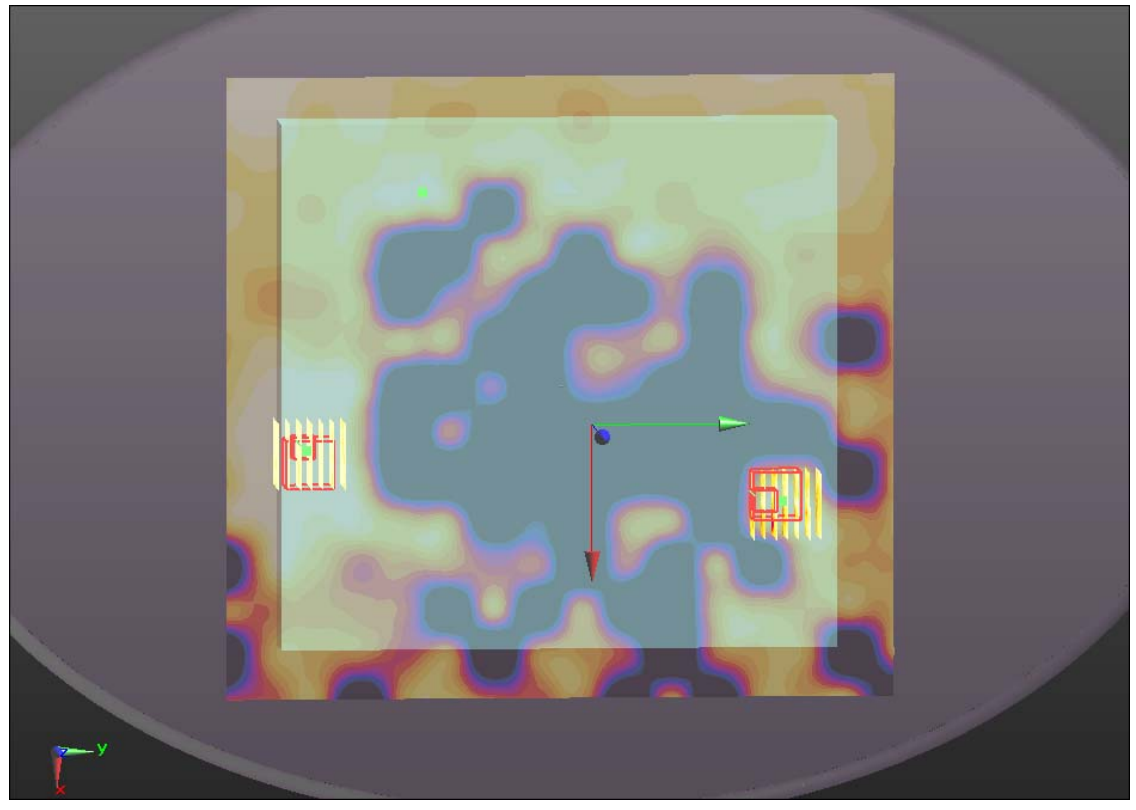

0 dB = 0.010mW/g

#02 WLAN 2.4GHz_802.11b_Bottom of Laptop_0cm_Laptop PC_Ant Degree 180_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (261x251x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.072 mW/g



Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.634 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.090 W/kg

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.068 mW/g

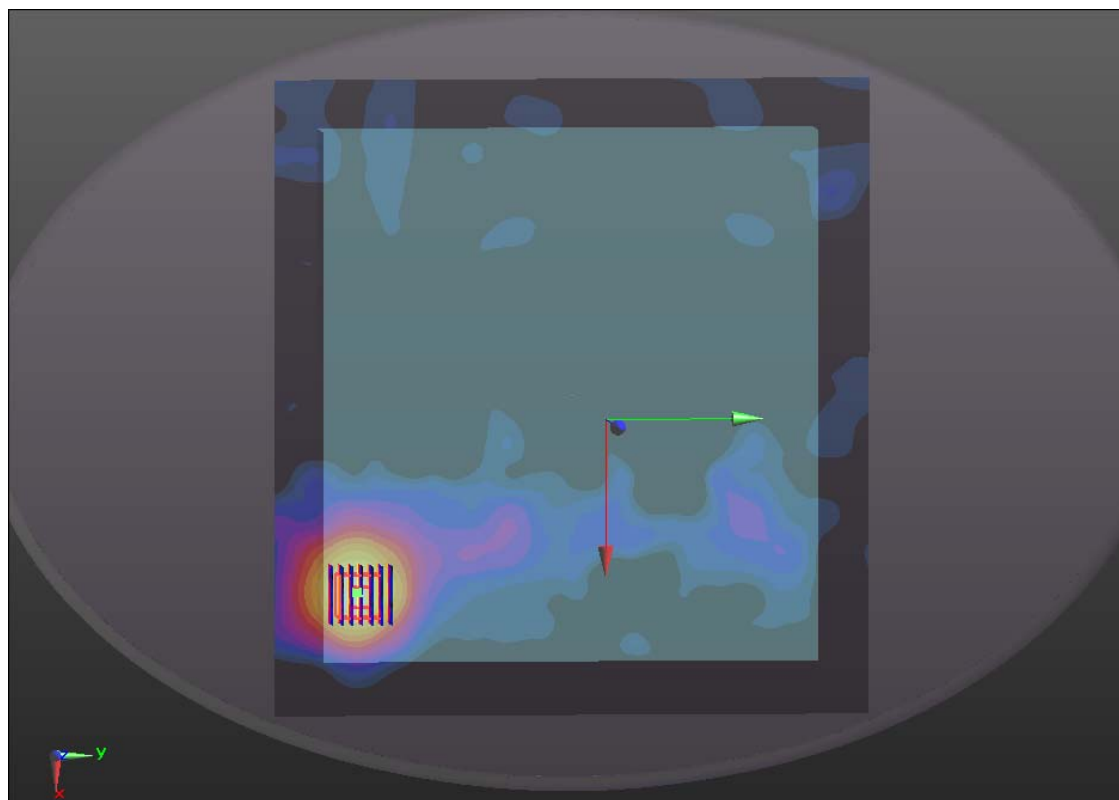

0 dB = 0.070mW/g

#03 WLAN 2.4GHz_802.11b_Bottom of Tablet_0cm_Tablet PC_Ant Degree 0_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (231x251x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.033 mW/g

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.081 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.050 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.034 mW/g



Ch6/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.081 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.030 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

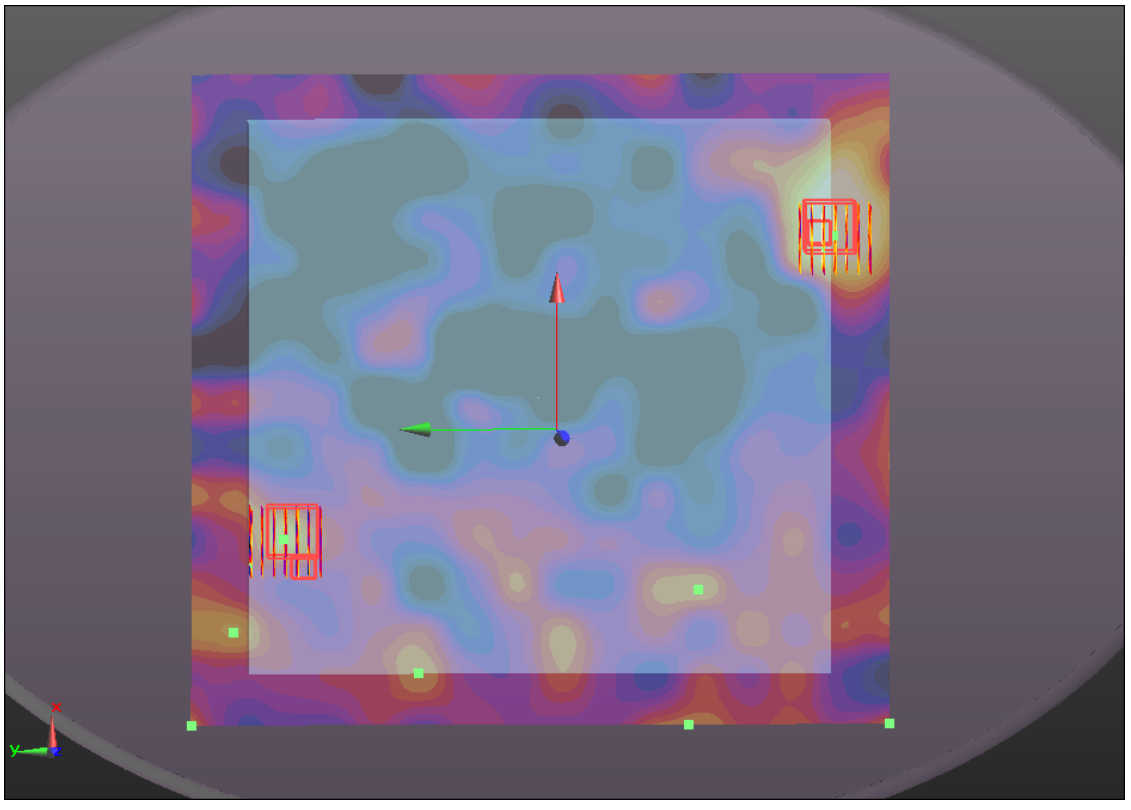

0 dB = 0.030mW/g

#04 WLAN 2.4GHz_802.11b_Bottom of Tablet_0cm_Tablet PC_Ant Degree 180_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (261x251x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.079 mW/g



Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.834 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.084 mW/g

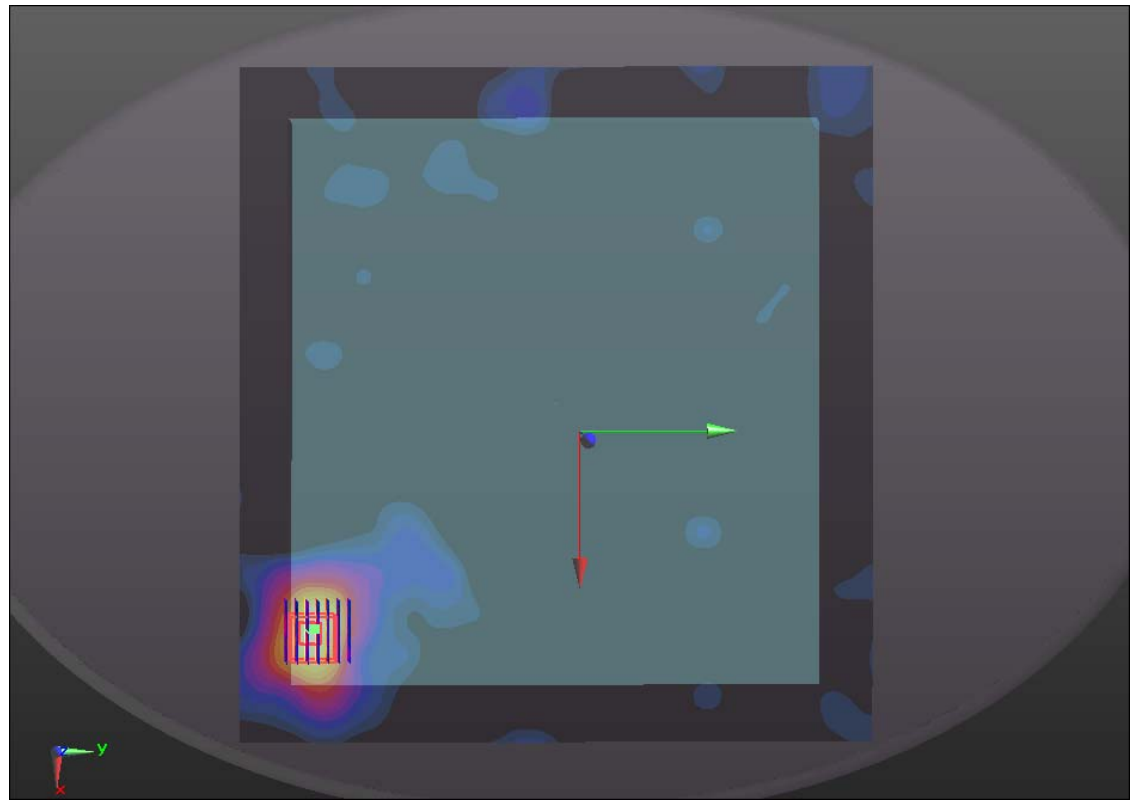

0 dB = 0.080mW/g

#05 WLAN 2.4GHz_802.11b_Edge1_0cm_Tablet PC_Ant Degree 0_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (81x261x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.00944 mW/g

Ch6/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.788 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.013 W/kg

SAR(1 g) = 0.007 mW/g; SAR(10 g) = 0.00584 mW/g

Maximum value of SAR (measured) = 0.00992 mW/g



Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.788 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.016 W/kg

SAR(1 g) = 0.00621 mW/g; SAR(10 g) = 0.0053 mW/g

Maximum value of SAR (measured) = 0.00916 mW/g

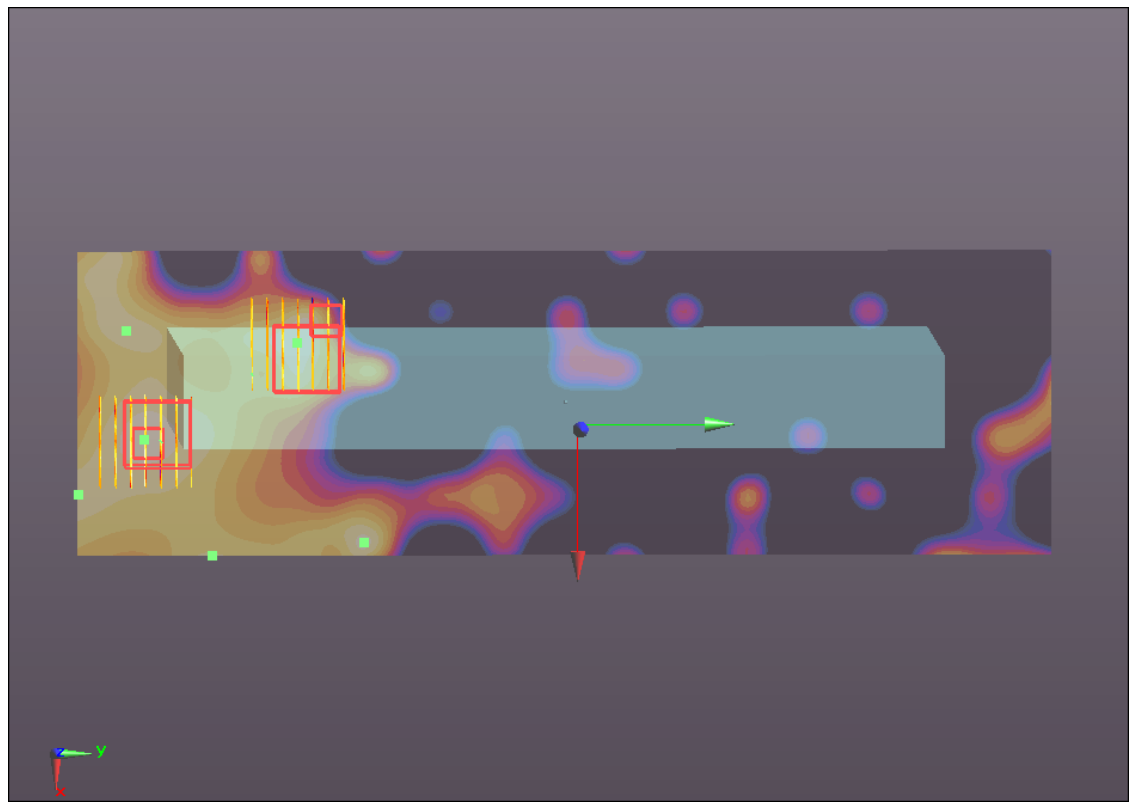

0 dB = 0.0092mW/g

#06 WLAN 2.4GHz_802.11b_Edge1_0cm_Tablet PC_Ant Degree 180_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (81x261x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.040 mW/g


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.748 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

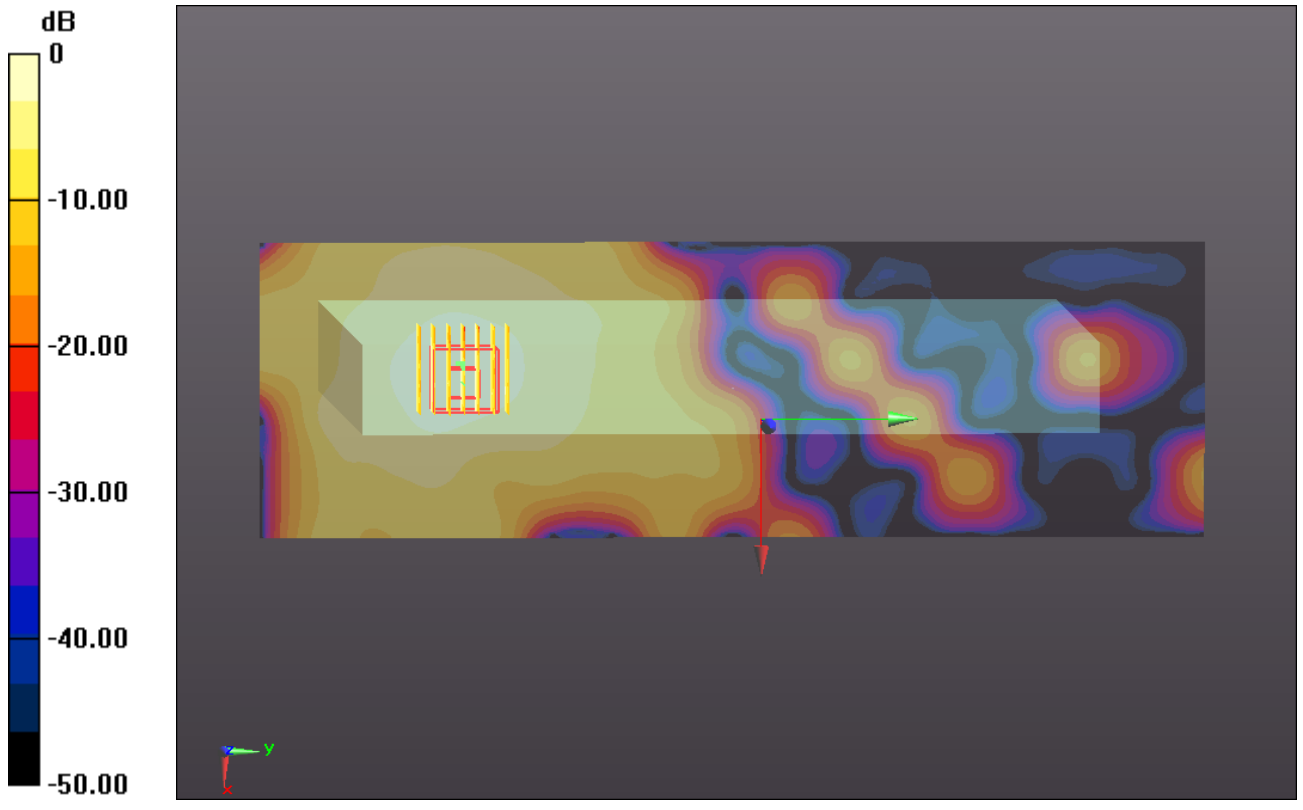

0 dB = 0.050mW/g

#11 WLAN 2.4GHz_802.11b_Edge4_0cm_Tablet PC_Ant Degree 0_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (81x281x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.551 mW/g



Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.281 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.635 mW/g

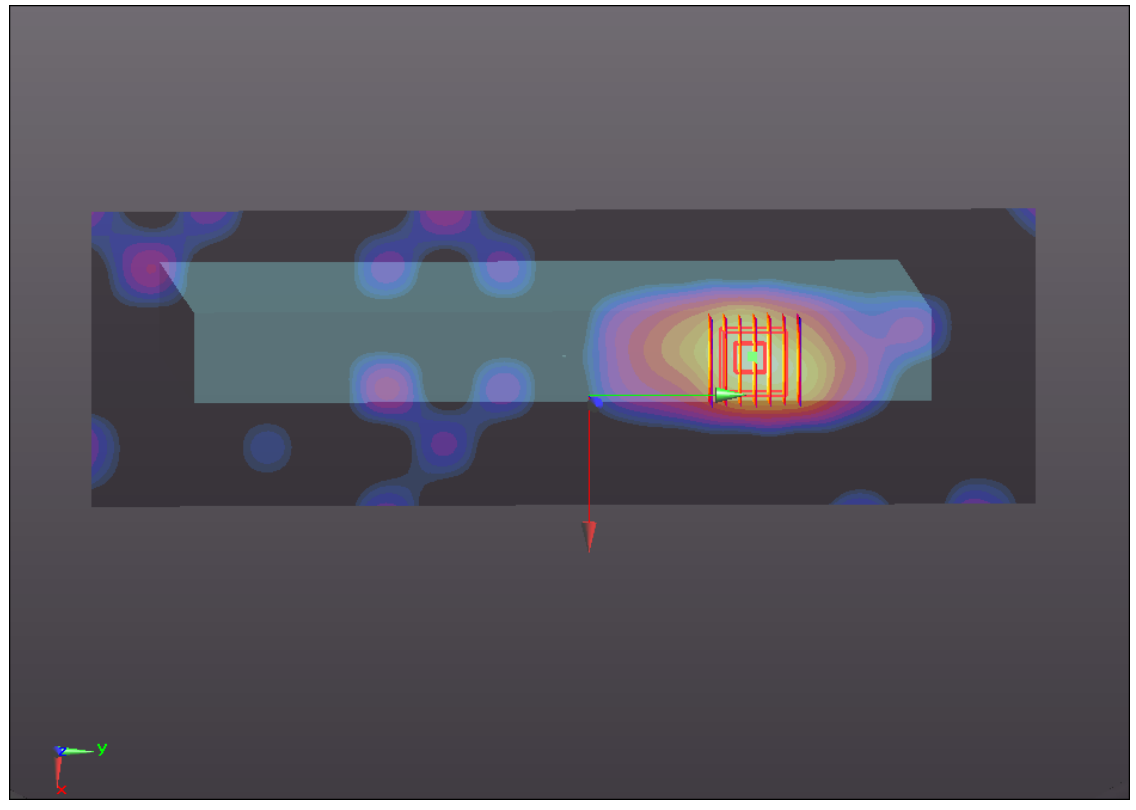

0 dB = 0.640mW/g

#12 WLAN 2.4GHz_802.11b_Edge4_0cm_Tablet PC_Ant Degree 180_6

DUT: 2D1707

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130205 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

53.488; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch6/Area Scan (81x281x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.129 mW/g


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.558 W/kg

SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 1.063 mW/g

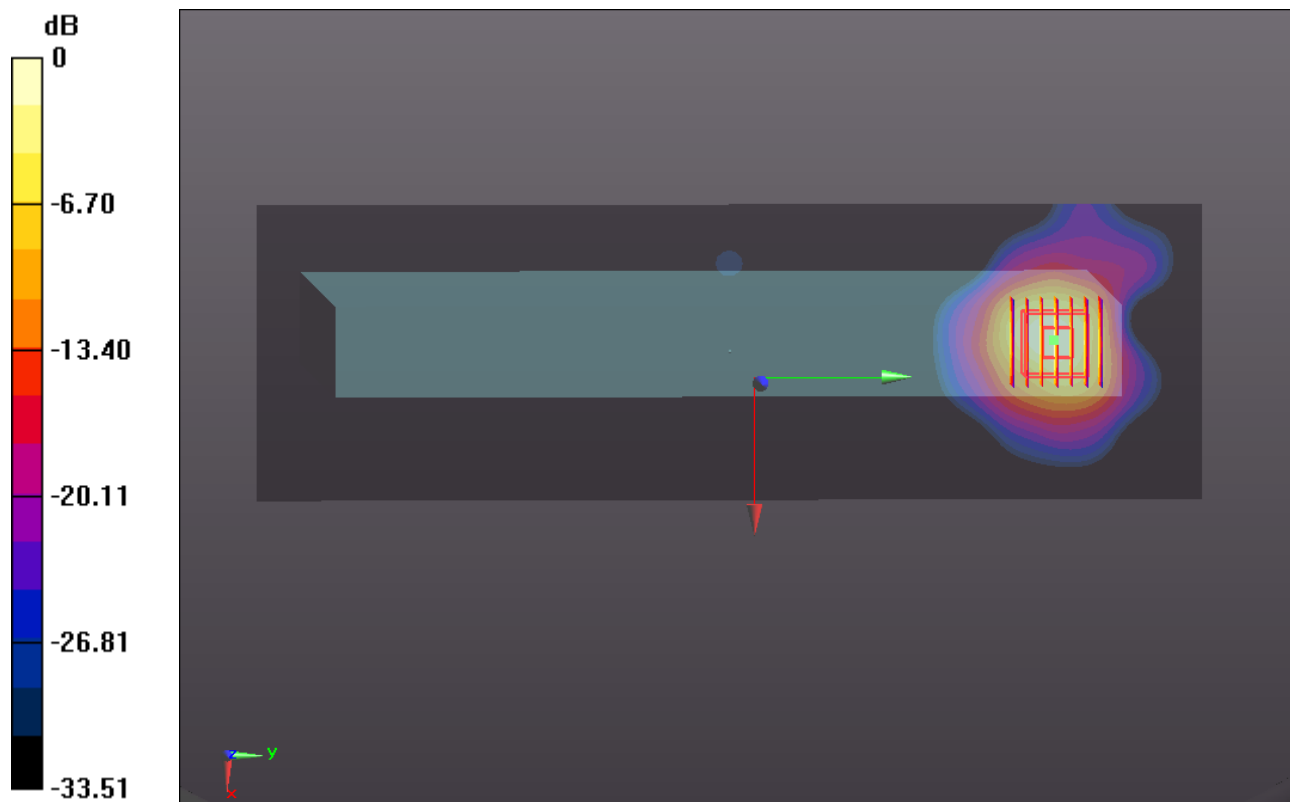

0 dB = 1.060mW/g

#13 WLAN 5GHz_802.11a_Bottom of Laptop_0cm_Laptop PC_Ant Degree 0_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (281x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.022 mW/g



Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.00937 mW/g; SAR(10 g) = 0.00287 mW/g

Maximum value of SAR (measured) = 0.030 mW/g

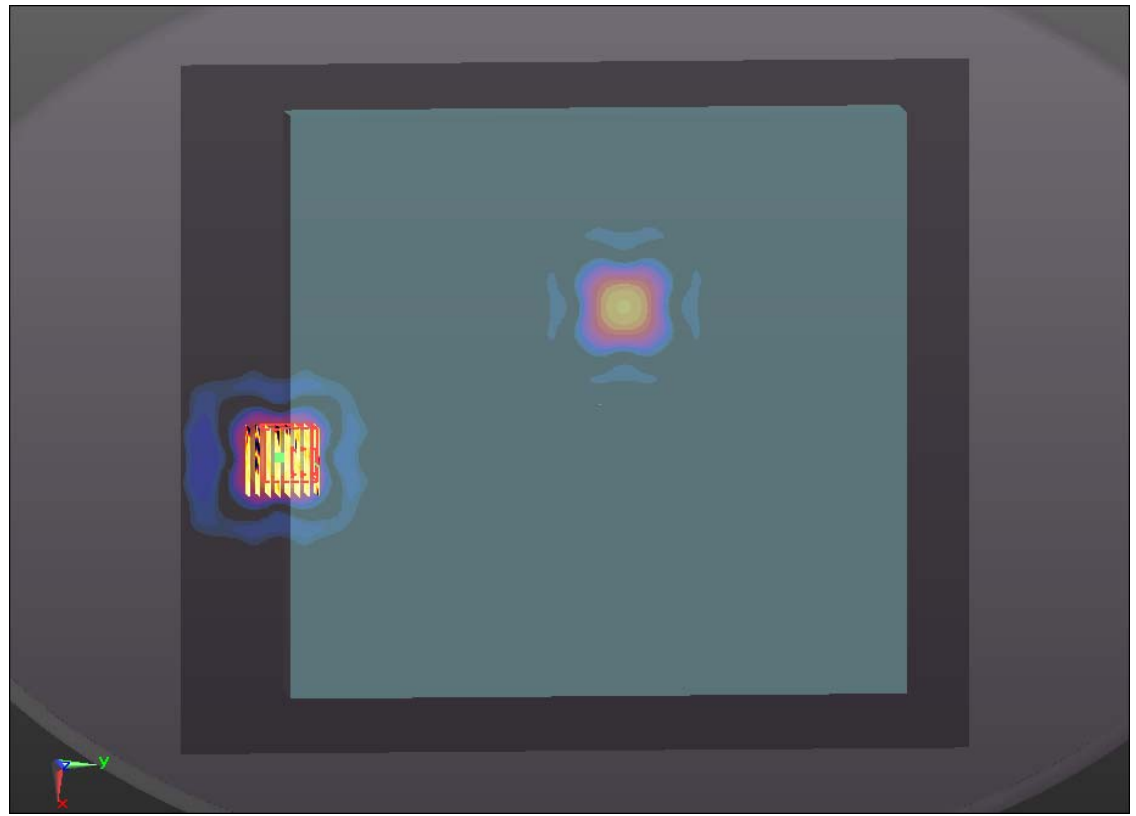

0 dB = 0.030mW/g

#14 WLAN 5GHz_802.11a_Bottom of Laptop_0cm_Laptop PC_Ant Degree 180_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (301x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.130 mW/g

Ch165/Zoom Scan (8x8x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.109 mW/g



Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.090 mW/g

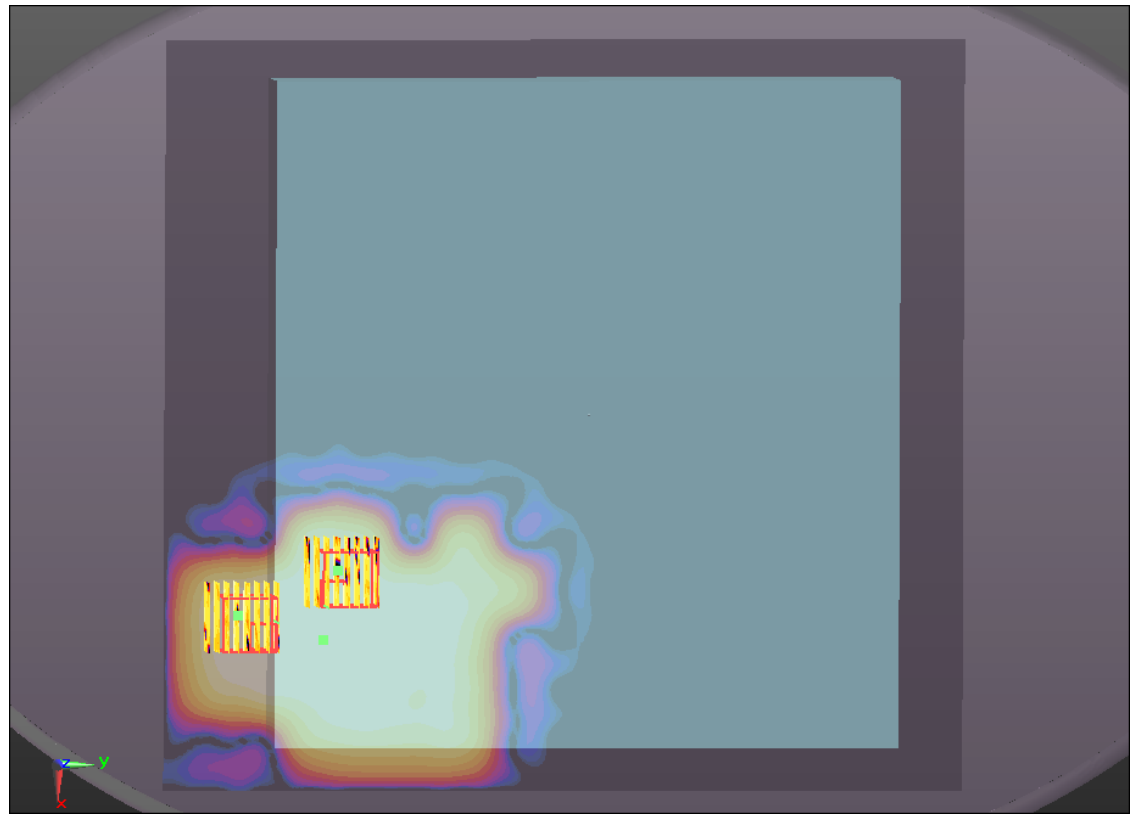

0 dB = 0.090mW/g

#15 WLAN 5GHz_802.11a_Bottom of Tablet_0cm_Tablet PC_Ant Degree 0_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (281x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.268 mW/g


Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.164 mW/g

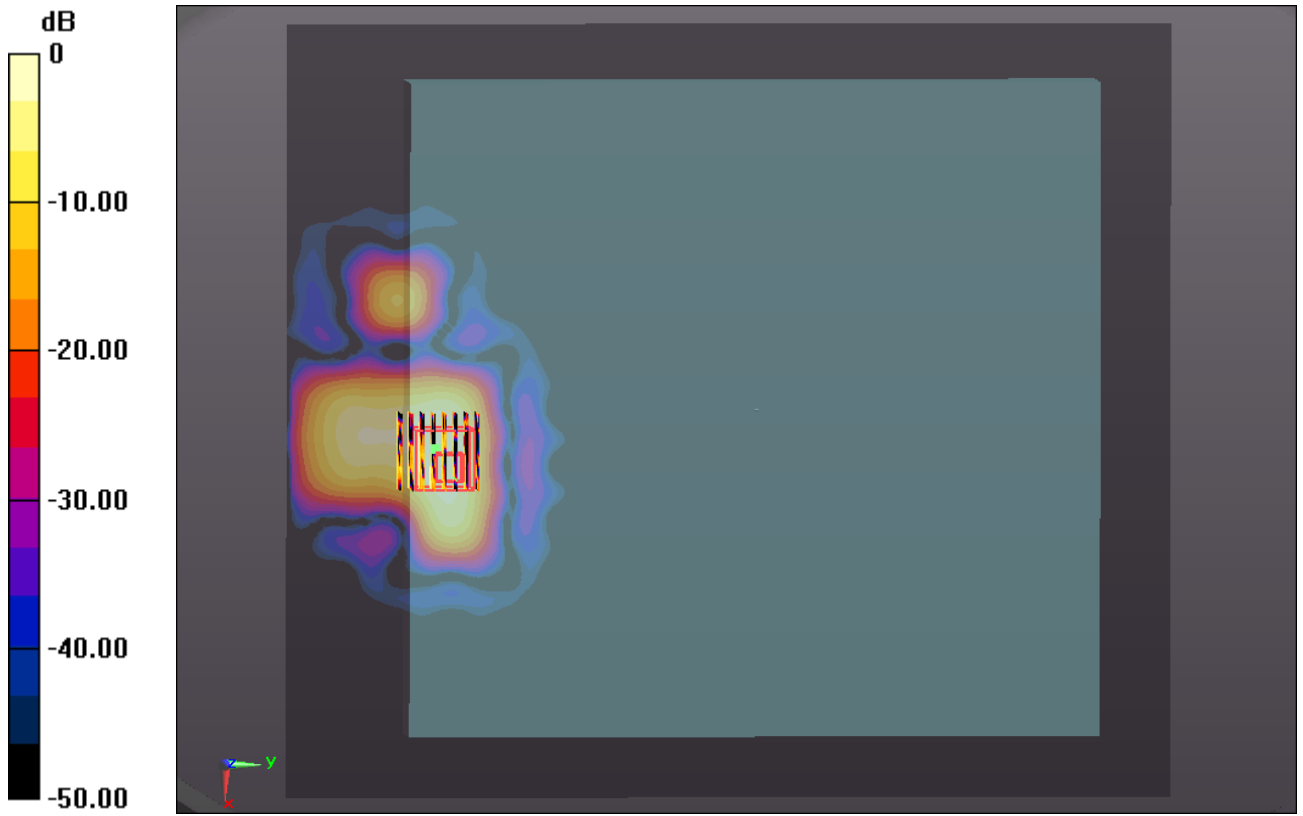

0 dB = 0.160mW/g

#16 WLAN 5GHz_802.11a_Bottom of Tablet_0cm_Tablet PC_Ant Degree 180_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (281x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.272 mW/g


Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.263 mW/g

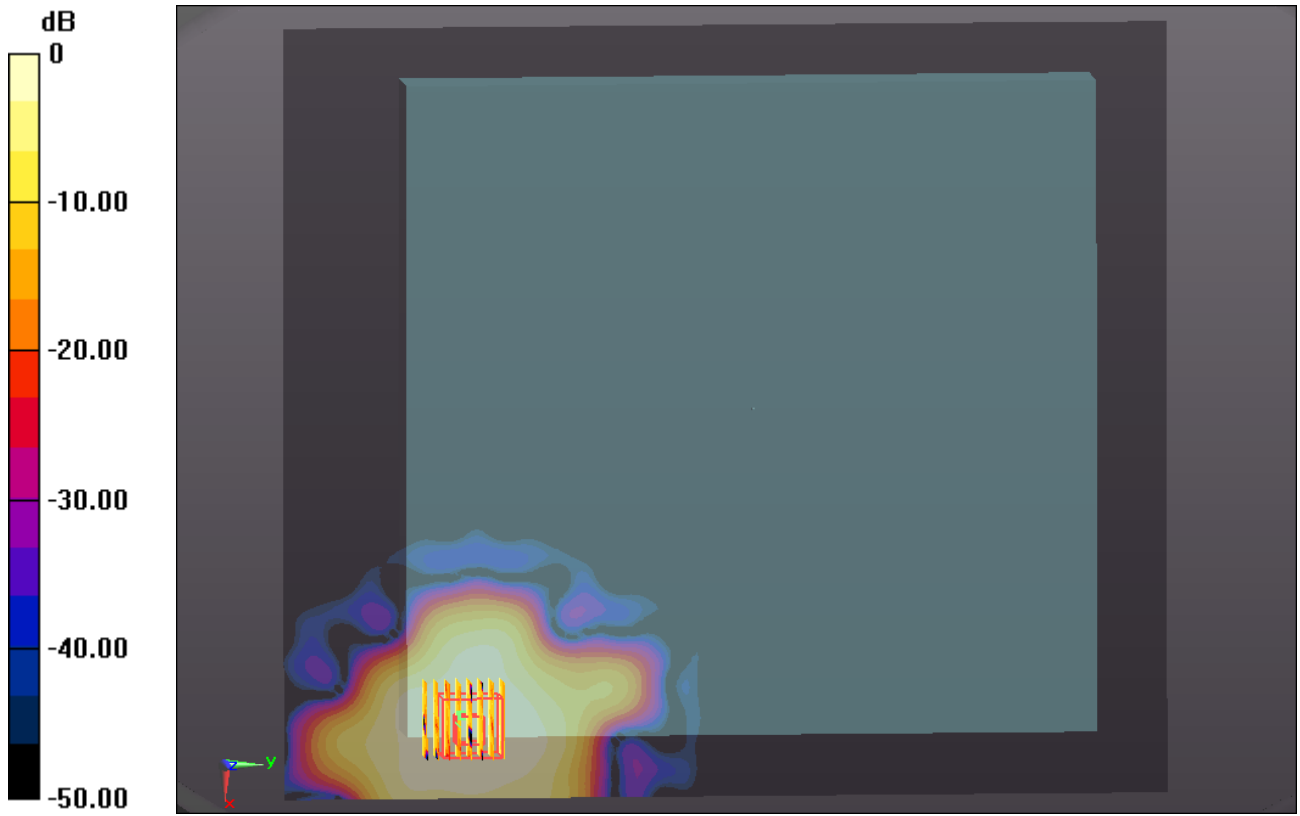

0 dB = 0.260mW/g

#17 WLAN 5GHz_802.11a_Edge1_0cm_Tablet PC_Ant Degree 0_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (81x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.036 mW/g

Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00671 mW/g

Maximum value of SAR (measured) = 0.056 mW/g



Ch165/Zoom Scan (8x8x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.00617 mW/g; SAR(10 g) = 0.000832 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

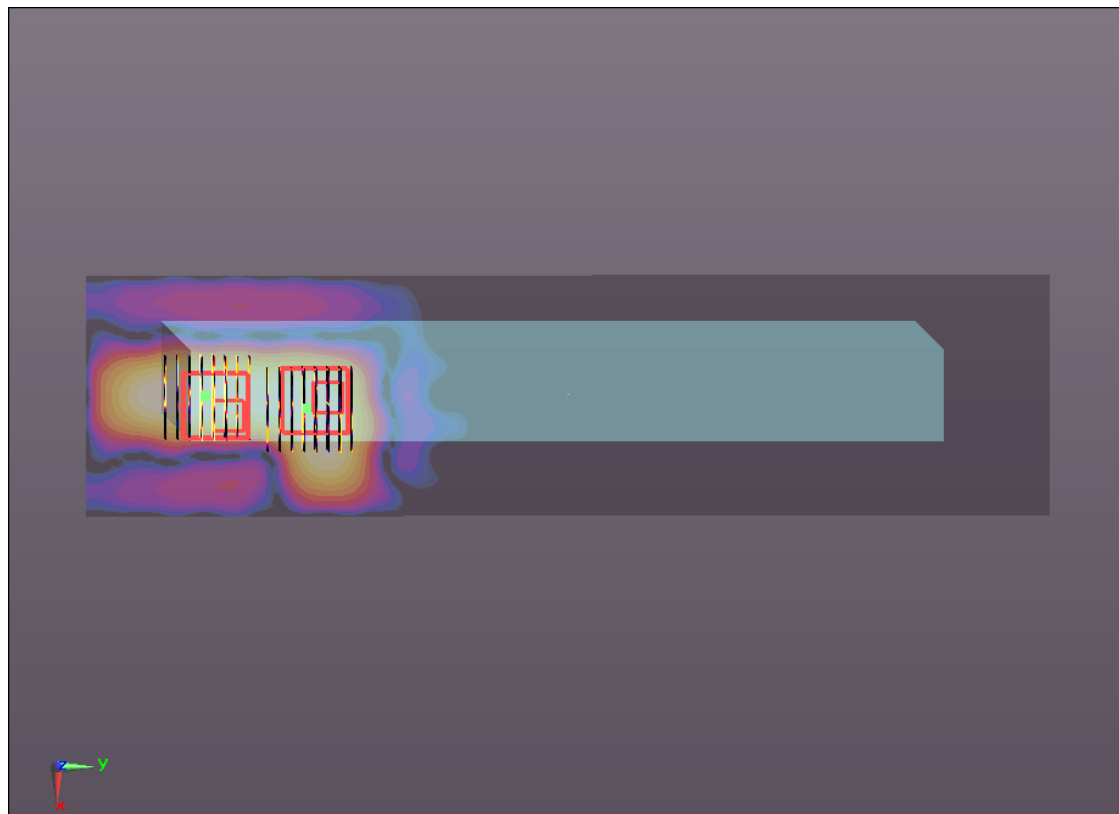

0 dB = 0.020mW/g

#18 WLAN 5GHz_802.11a_Edge1_0cm_Tablet PC_Ant Degree 180_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (81x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.251 mW/g



Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

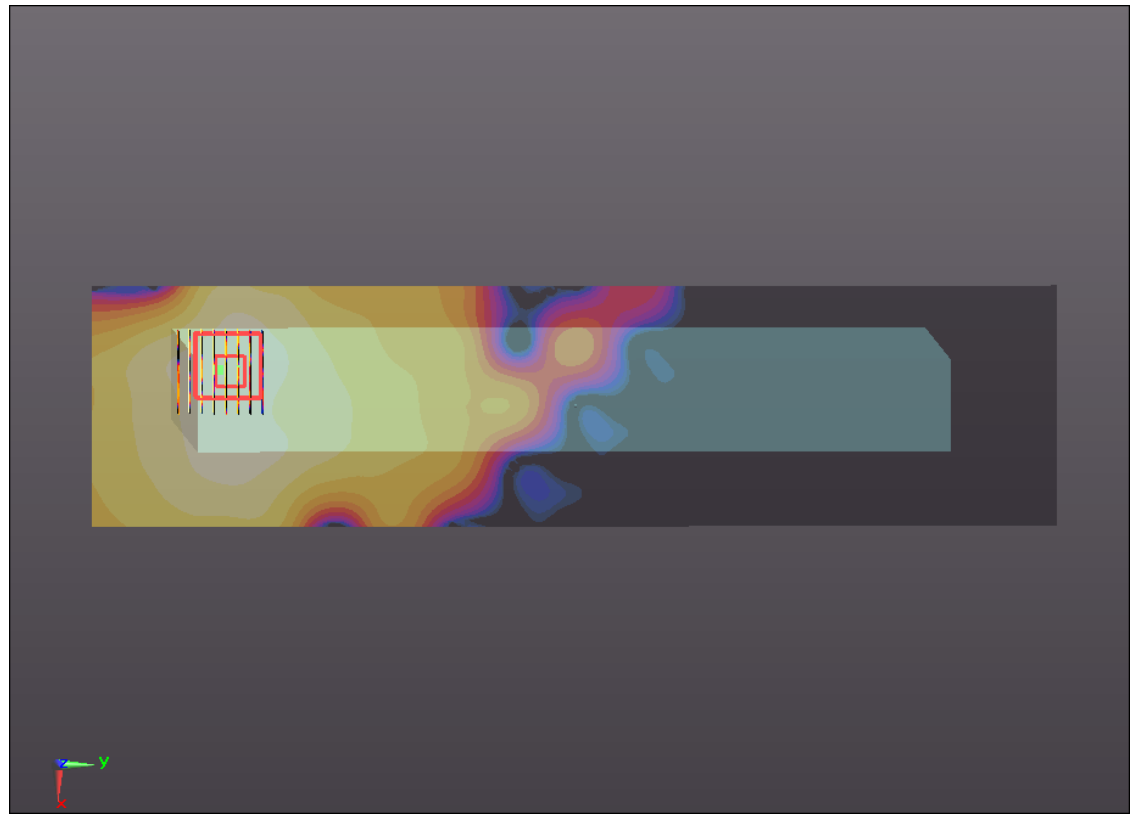

0 dB = 0.310mW/g

#19 WLAN 5GHz_802.11a_Edge4_0cm_Tablet PC_Ant Degree 0_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (81x281x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 3.418 mW/g


Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 5.522 W/kg

SAR(1 g) = 1.240 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 3.097 mW/g

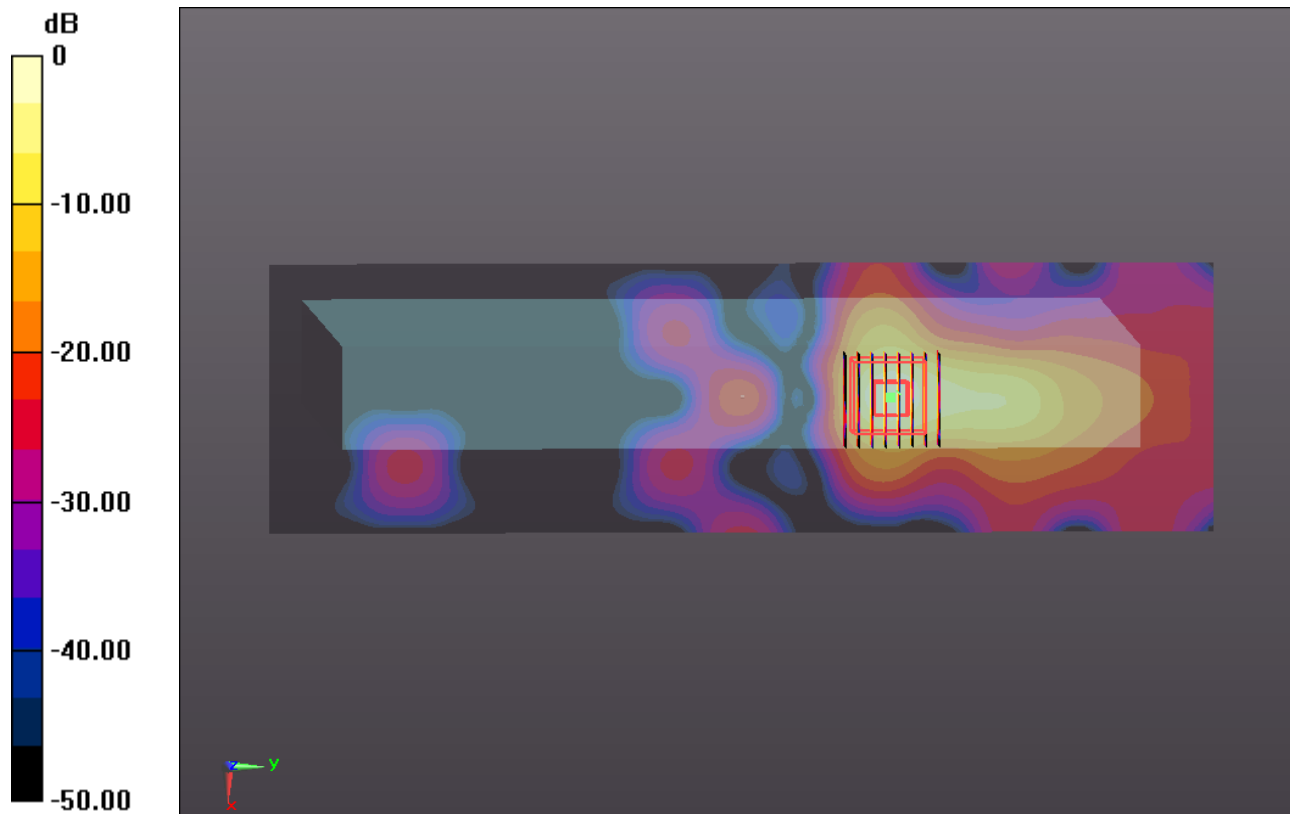

0 dB = 3.100mW/g

#25 WLAN 5GHz_802.11a_Edge4_0cm_Tablet PC_Ant Degree 0_165_Repeat SAR

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (41x141x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.961 mW/g


Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.489 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 5.119 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.293 mW/g

Maximum value of SAR (measured) = 3.082 mW/g

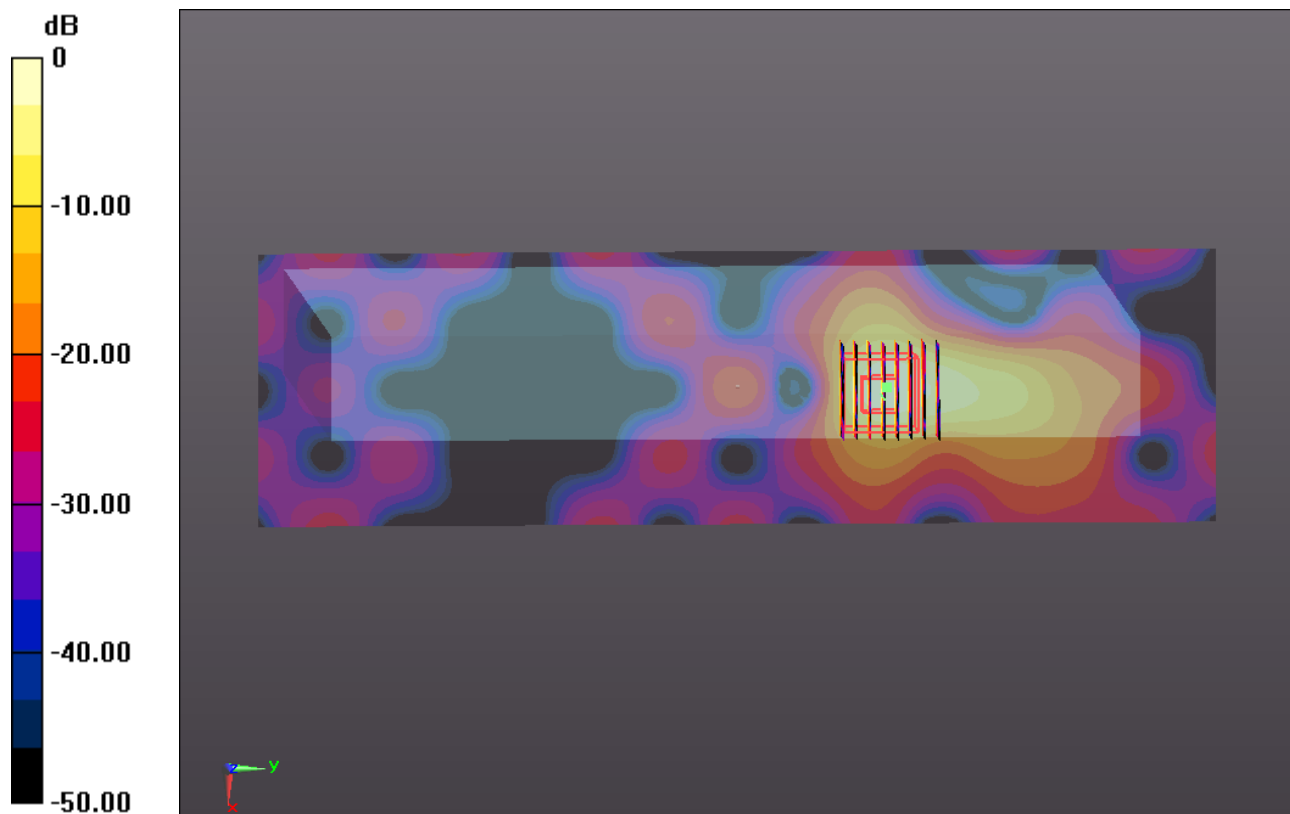

0 dB = 3.080mW/g

#20 WLAN 5GHz_802.11a_Edge4_0cm_Tablet PC_Ant Degree 180_165

DUT: 2D1707

Communication System: WIFI; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$

48.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch165/Area Scan (81x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.957 mW/g


Ch165/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.921 W/kg

SAR(1 g) = 0.896 mW/g; SAR(10 g) = 0.238 mW/g

Maximum value of SAR (measured) = 2.372 mW/g

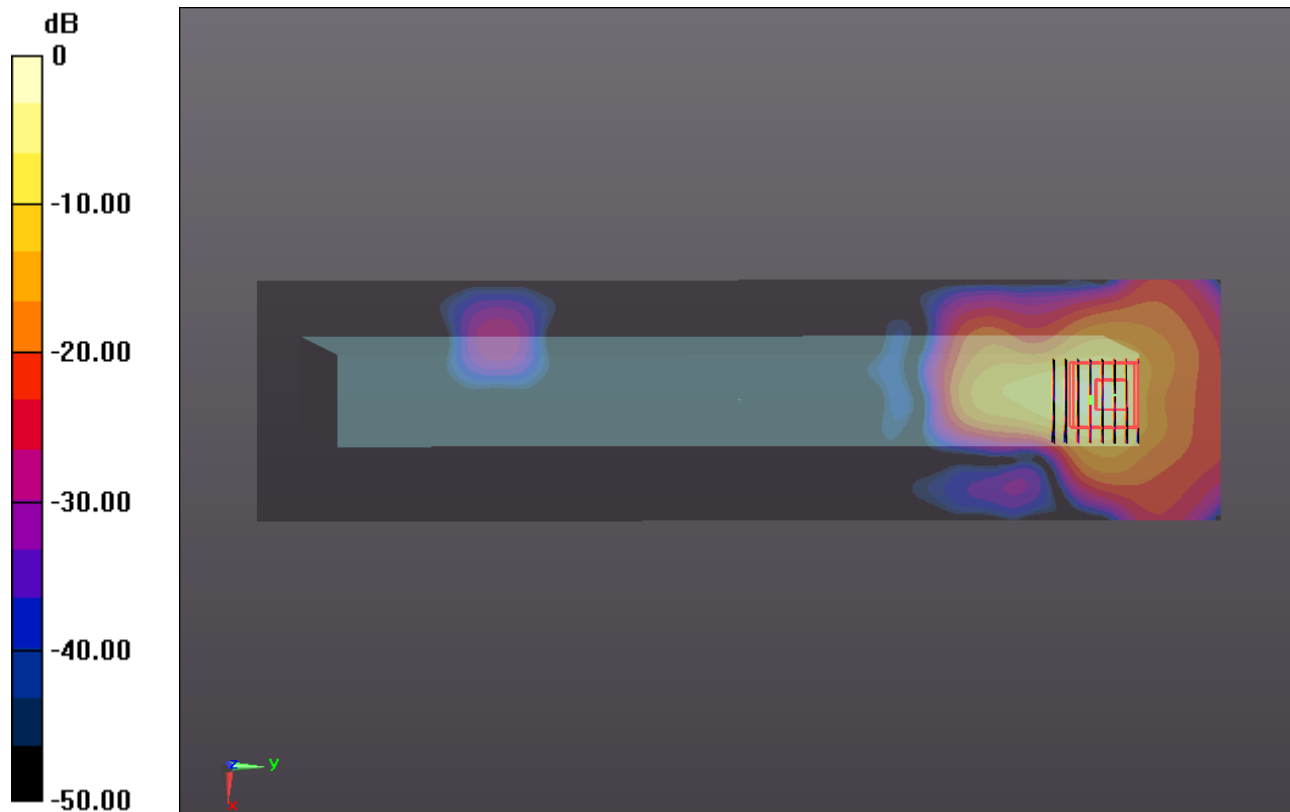

0 dB = 2.370mW/g

#21 WLAN 5GHz_802.11a_Edge4_0cm_Tablet PC_Ant Degree 0_149

DUT: 2D1707

Communication System: WIFI; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.963$ mho/m; $\epsilon_r =$

49.131; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch149/Area Scan (81x281x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.907 mW/g


Configuration/Ch149/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.723 W/kg

SAR(1 g) = 0.854 mW/g; SAR(10 g) = 0.202 mW/g

Maximum value of SAR (measured) = 2.185 mW/g

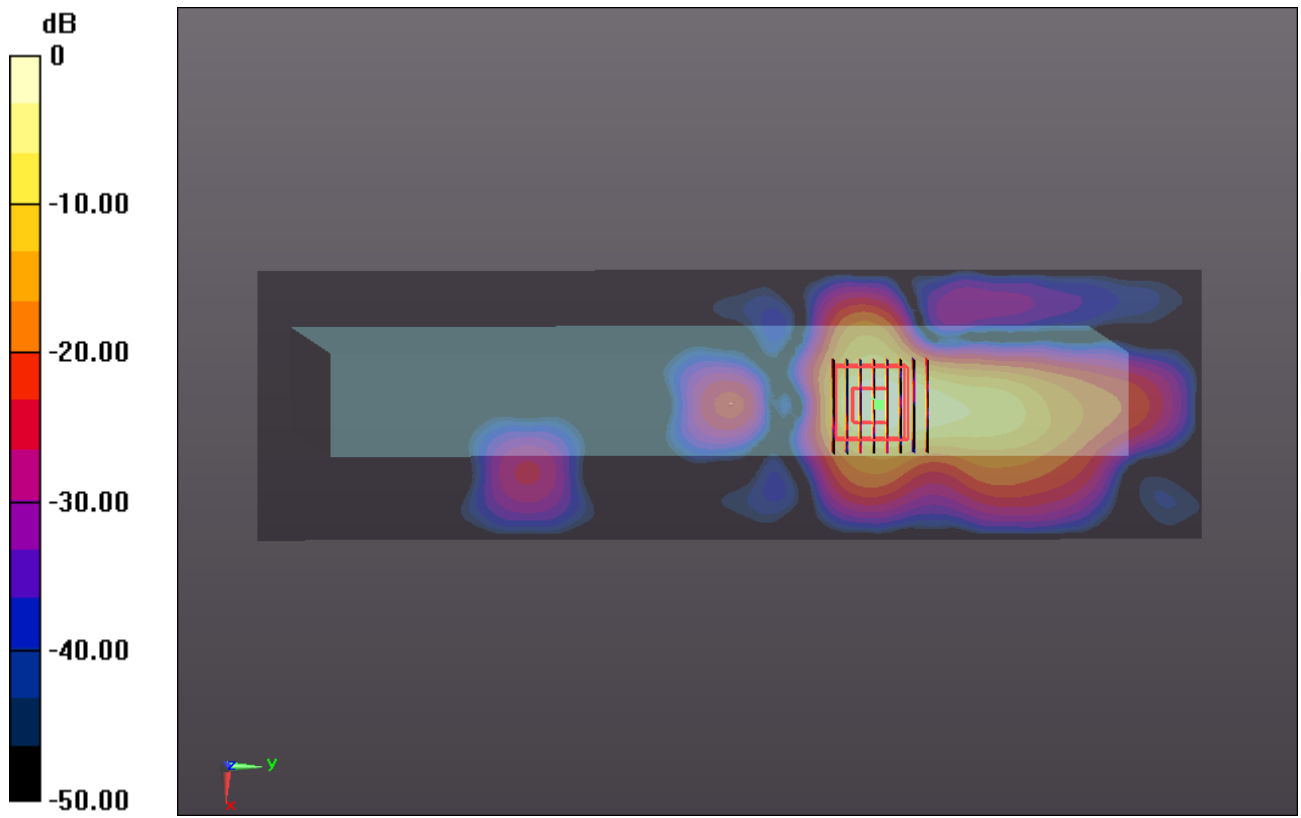

0 dB = 2.190mW/g

#22 WLAN 5GHz_802.11a_Edge4_0cm_Tablet PC_Ant Degree 0_157

DUT: 2D1707

Communication System: WIFI; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.995$ mho/m; $\epsilon_r =$

48.979; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch157/Area Scan (81x281x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.326 mW/g


Ch157/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 5.233 W/kg

SAR(1 g) = 1.160 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 3.201 mW/g

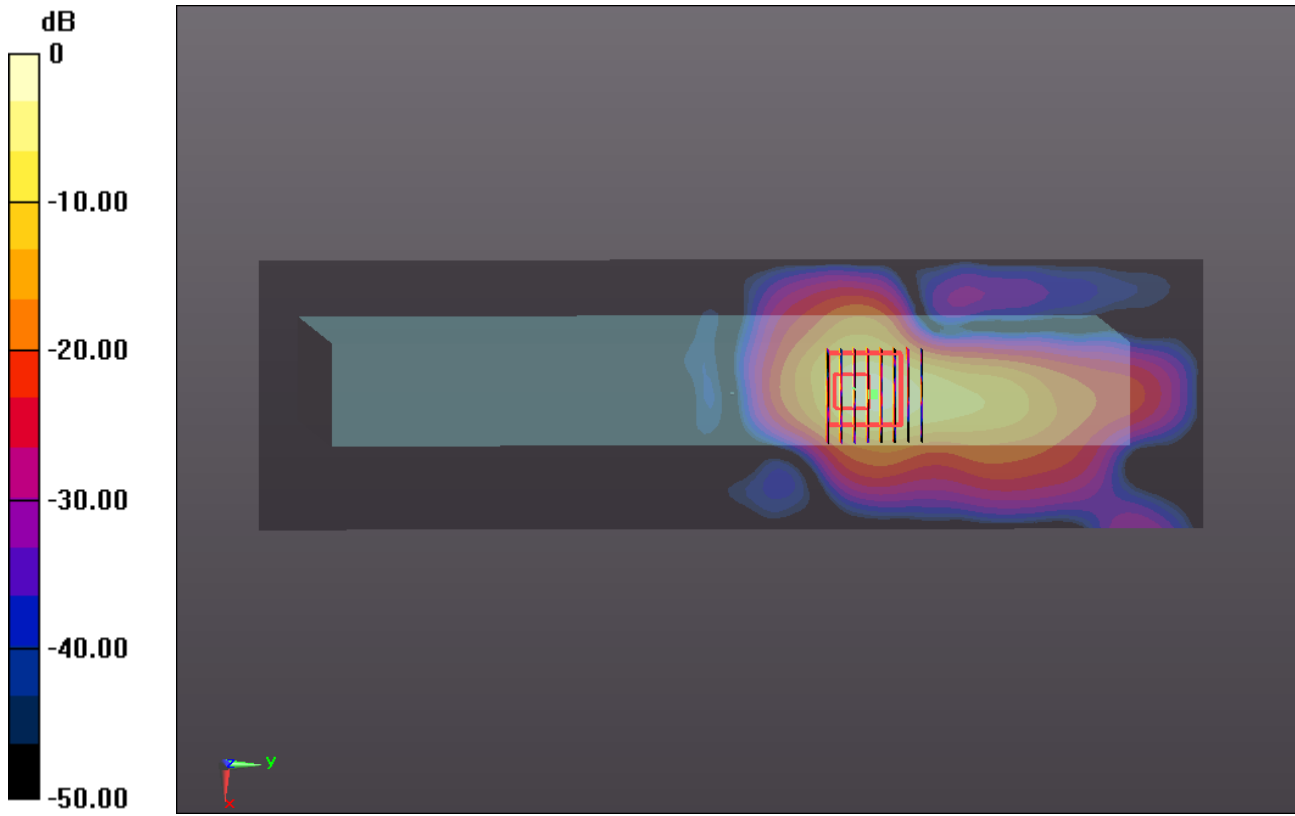

0 dB = 3.200mW/g

#23 WLAN 5GHz_802.11a_Edge4_0cm_Tablet PC_Ant Degree 180_149

DUT: 2D1707

Communication System: WIFI; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.963$ mho/m; $\epsilon_r =$

49.131; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch149/Area Scan (81x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.591 mW/g


Ch149/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.727 W/kg

SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.173 mW/g

Maximum value of SAR (measured) = 1.572 mW/g

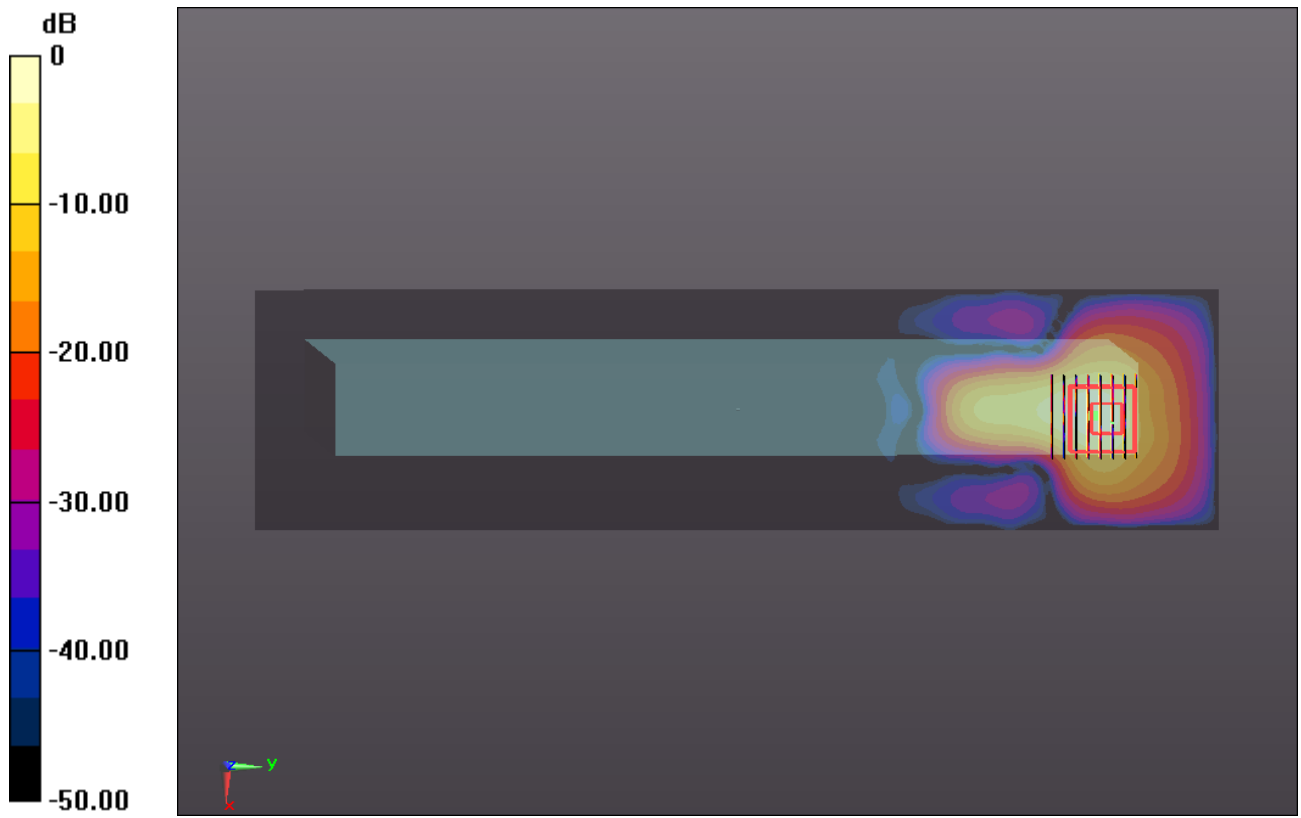

0 dB = 1.570mW/g

#24 WLAN 5GHz_802.11a_Edge4_0cm_Tablet PC_Ant Degree 180_157

DUT: 2D1707

Communication System: WIFI; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: MSL_5000_130221 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.995$ mho/m; $\epsilon_r =$

48.979; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(3.99, 3.99, 3.99); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch157/Area Scan (81x321x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.666 mW/g


Ch157/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.737 W/kg

SAR(1 g) = 0.854 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 2.316 mW/g

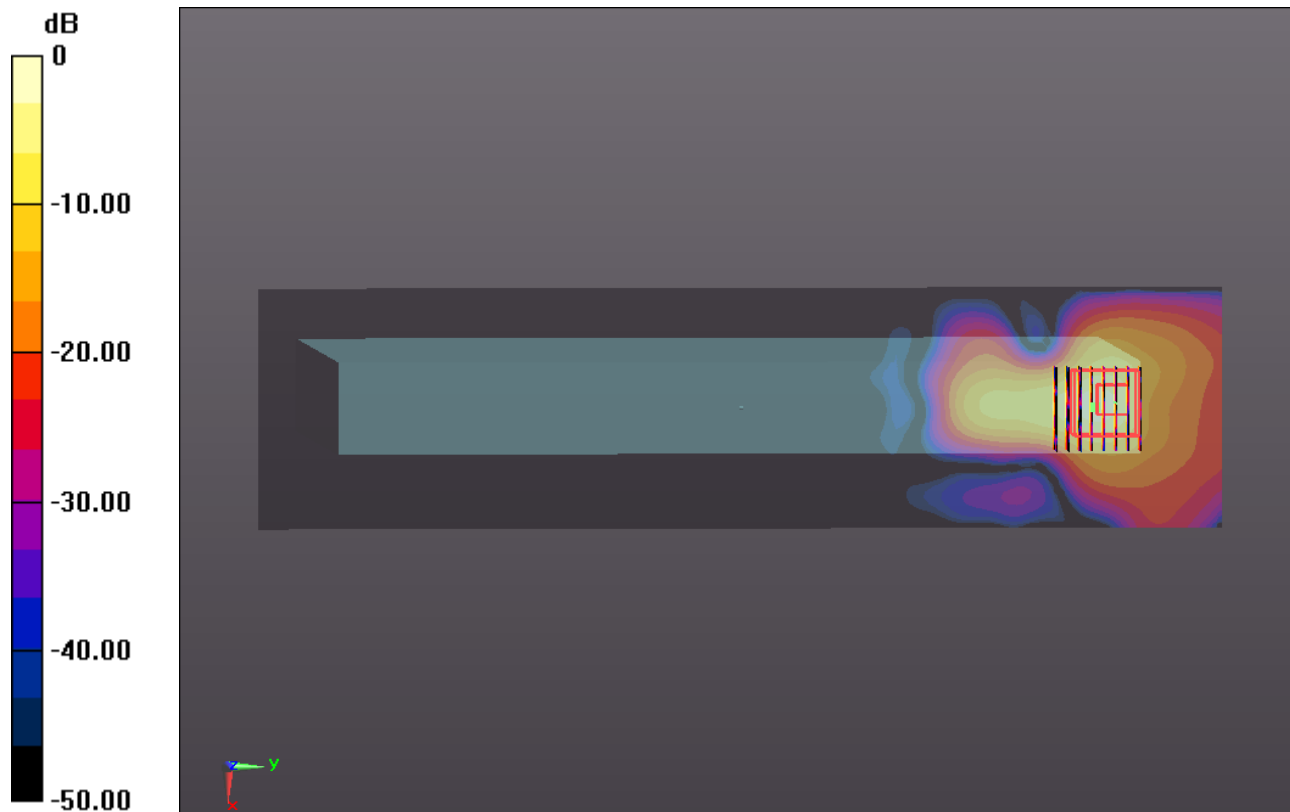

0 dB = 2.320mW/g