



# FCC RADIO TEST REPORT

FCC ID : HFS-GRS6B  
Equipment : Wireless Device  
Model Name : GRS6B  
Applicant : Quanta Computer Inc.  
No.188, Wenhua 2nd Rd., Guishan Dist.,  
Taoyuan City 33377, Taiwan  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 02, 2024 and testing was performed from Feb. 23, 2024 to Mar. 23, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report .....	3
Summary of Test Result .....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Modification of EUT .....	7
1.3 Testing Location .....	7
1.4 Applicable Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Carrier Frequency and Channel .....	8
2.2 Test Mode .....	8
2.3 Connection Diagram of Test System .....	9
2.4 Support Unit used in test configuration and system .....	11
2.5 EUT Operation Test Setup .....	11
2.6 Measurement Results Explanation Example .....	11
<b>3 Test Result.....</b>	<b>12</b>
3.1 6dB and 99% Bandwidth Measurement .....	12
3.2 Output Power Measurement .....	13
3.3 Power Spectral Density Measurement .....	14
3.4 Conducted Band Edges and Spurious Emission Measurement .....	16
3.5 Radiated Band Edges and Spurious Emission Measurement .....	17
3.6 AC Conducted Emission Measurement .....	21
3.7 Antenna Requirements .....	23
<b>4 List of Measuring Equipment .....</b>	<b>24</b>
<b>5 Measurement Uncertainty .....</b>	<b>26</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR413008C	01	Initial issue of report	Apr. 02, 2024
FR413008C	02	Revise Test Configuration of Equipment Under Test and List of Measuring Equipment This report is an updated version, replacing the report issued on Apr. 02, 2024.	May 07, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	2.33 dB under the limit at 2483.68 MHz
3.6	15.207	AC Conducted Emission	Pass	15.86 dB under the limit at 0.16 MHz
3.7	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Avis Chuang**

**Report Producer: Clio Lo**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
<b>General Specs</b> Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac and Thread.	
<b>Antenna Type</b> WLAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna Bluetooth: PIFA Antenna Thread: PIFA Antenna	

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Ant. 1: 1.43 Ant. 2: 0.44

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List	
S/N	Performed Test Item
41301HFBS011W3	RF Conducted Measurement
41311HFBS012CP	Radiated Spurious Emission
41311HFBS012BG 41311HFBS012CP	Conducted Emission

### 1.1.1 Antenna Directional Gain

**<For CDD Mode>**

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

$G_{ANT}$  is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.

As minimum  $N_{SS}=1$  is supported by EUT, the formula can be simplified as:

$$Directional\ gain = 10 \cdot \log \left[ \frac{10^{G_1 / 20} + 10^{G_2 / 20} + \dots + 10^{G_N / 20}}{N_{ANT}} \right]^2 \text{ dBi}$$

Where  $G_1, G_2, \dots, G_N$  denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
<b>2.4GHz</b>	1.43	0.44	1.43	3.96	0.00	0.00

Calculation example:

If a device has two antenna,  $G_{ANT1}= 1.43\text{dBi}$ ;  $G_{ANT2}=0.44\text{dBi}$

Directional gain of power measurement =  $\max(1.43, 0.44) + 0 = 1.43 \text{ dBi}$

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[ 10^{(1.43 \text{ dBi} / 20)} + 10^{(0.44 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

= 3.96 dBi

Power and PSD limit reduction = Composite gain – 6dBi, ( min = 0 )



### 1.2 Modification of EUT

No modifications made to the EUT during the testing.

### 1.3 Testing Location

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, CO07-HY, 03CH11-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Full connection mode (Ethernet port connected to WLAN AP and HDMI port connected to TV) and stand-alone mode have been verified. Based on the verification results, the worst case (stand-alone mode) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

### 2.2 Test Mode

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The final test modes include the worst data rates for each modulation shown in the table below.

#### MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

**Remark:** The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.



Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : Bluetooth TX (BDR 1M) Channel 39 + USB Cable 1 (Charging from AC Adapter 1) Mode 2 : Bluetooth-LE TX (1Mbps) Channel 19 + USB Cable 1 (Charging from AC Adapter 1) Mode 3 : Thread TX Channel 18 + USB Cable 1 (Charging from AC Adapter 1) Mode 4 : WLAN (2.4GHz) 802.11b TX Channel 6 + USB Cable 1 (Charging from AC Adapter 1)
<b>Remark:</b>	
1. The worst case of Conducted Emission is mode 4; only the test data of it was reported. 2. For Radiated Test Cases, the tests were performed with USB Cable 2.	


Ch. #	2400-2483.5 MHz		
	802.11b	802.11g	802.11n HT20
Low	01	01	01
Middle	06	06	06
High	11	11	11

**Remark:** For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.


## 2.3 Connection Diagram of Test System

<Stand-alone Mode>

<AC Conducted Emission Mode>

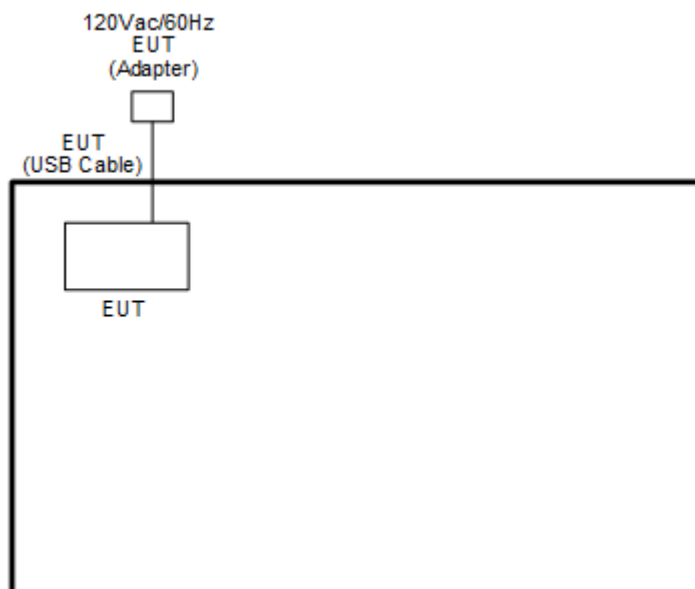


<WLAN Tx Mode>

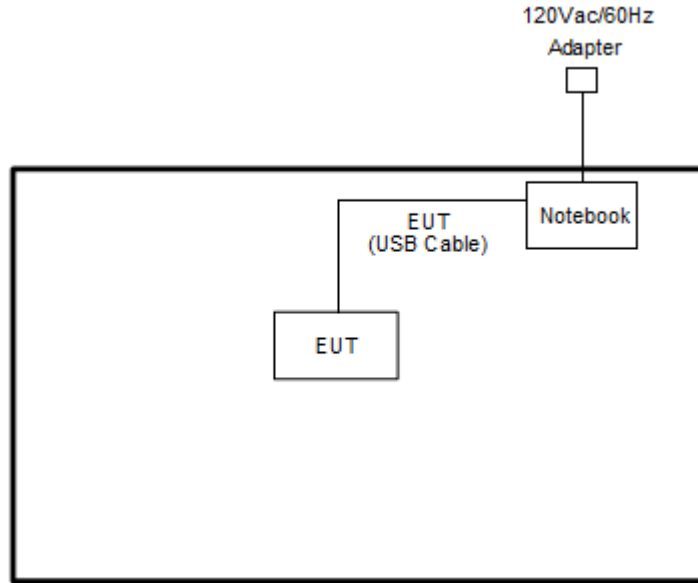

<Full Connection Mode>

<AC Conducted Emission Mode / WLAN Tx Mode>

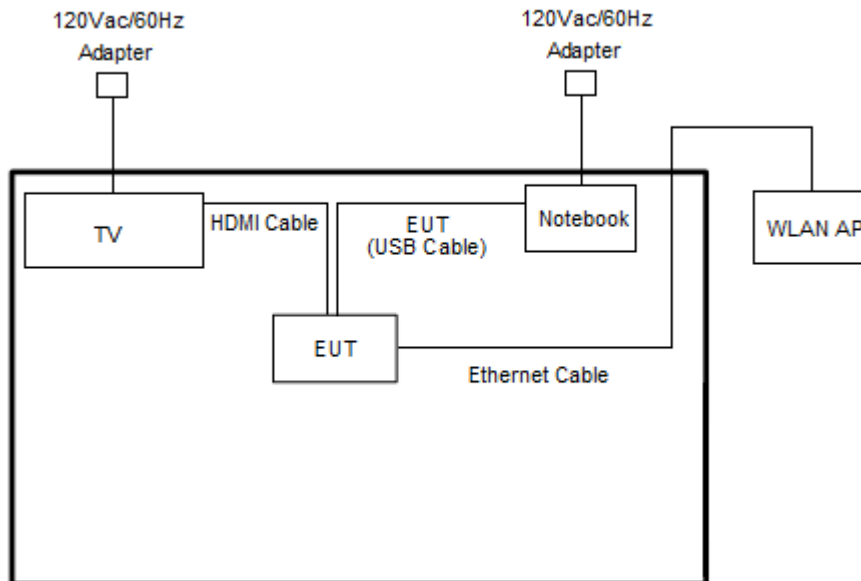



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	TV	LG	LG49SM8111PWA	FCC DoC	N/A	Unshielded, 1.8 m
3.	TV	Sharp	LC-50UA6800T	FCC DoC	N/A	Unshielded, 1.8 m
4.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
5.	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00	N/A	Unshielded, 1.8 m

## 2.5 EUT Operation Test Setup

The RF test items, utility “adb version 1.0.40” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

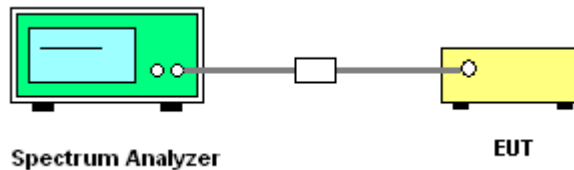

##### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

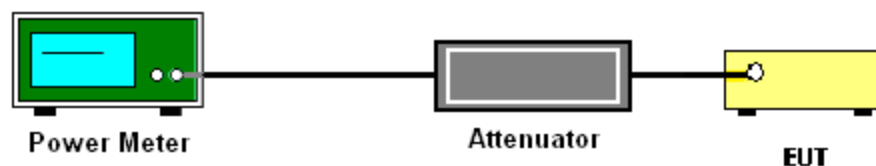

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add  $10 \log(N_{ANT})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{ANT})$  dB serves to apportion the emission limit among the  $N_{ANT}$  outputs so that each output is permitted to contribute no more than  $1/N_{ANT}^{th}$  of the PSD limit .

### 3.3.4 Test Setup

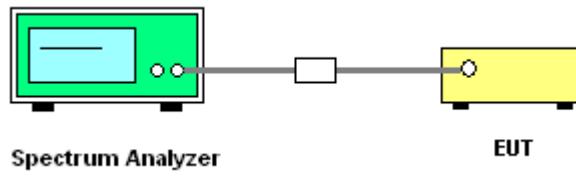

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

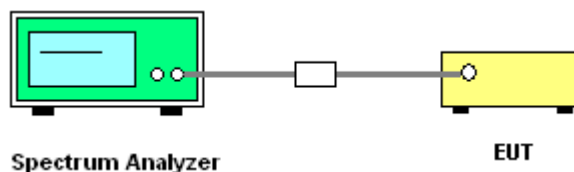

### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.





### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


#### 3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3 MHz for  $f \geq 1$  GHz for peak measurement.For average measurement:
  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

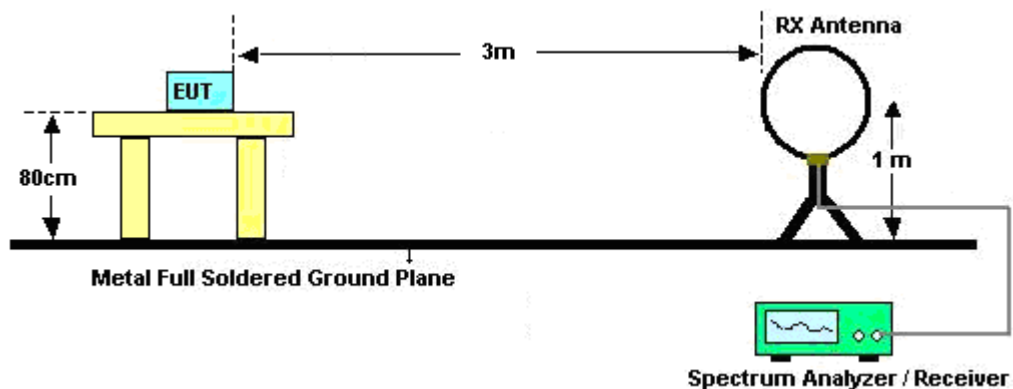


For radiated emissions from 30MHz to 1GHz

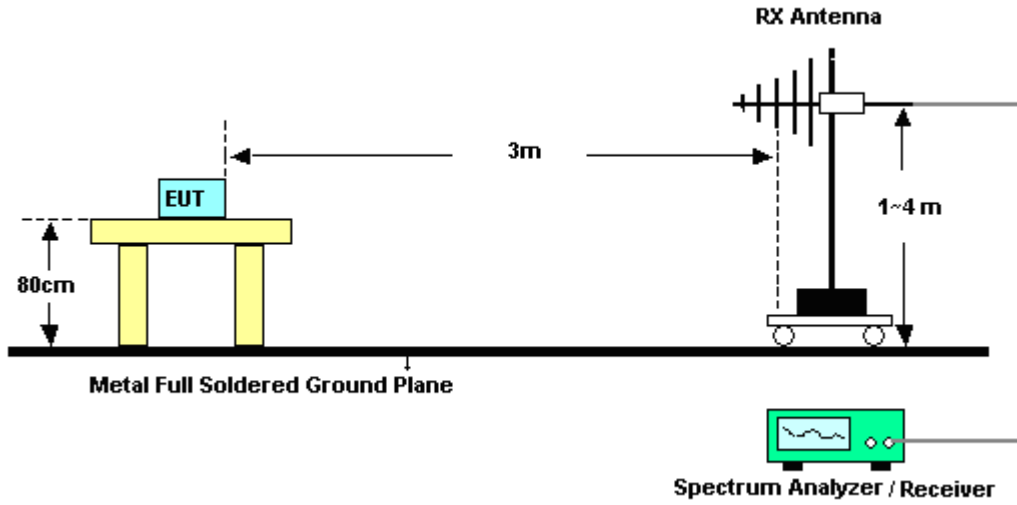

For radiated test from 1GHz to 18GHz

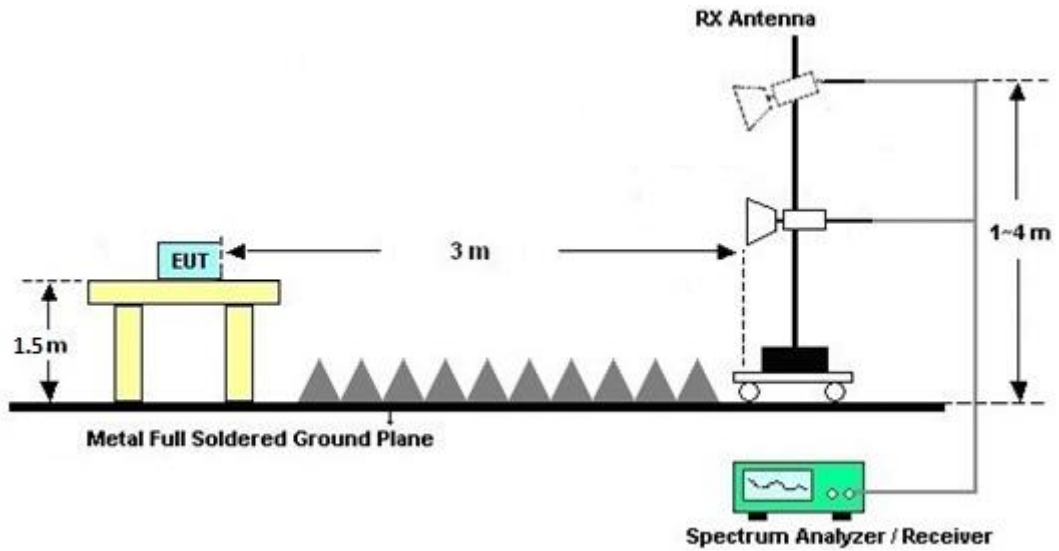

For radiated test above 18GHz

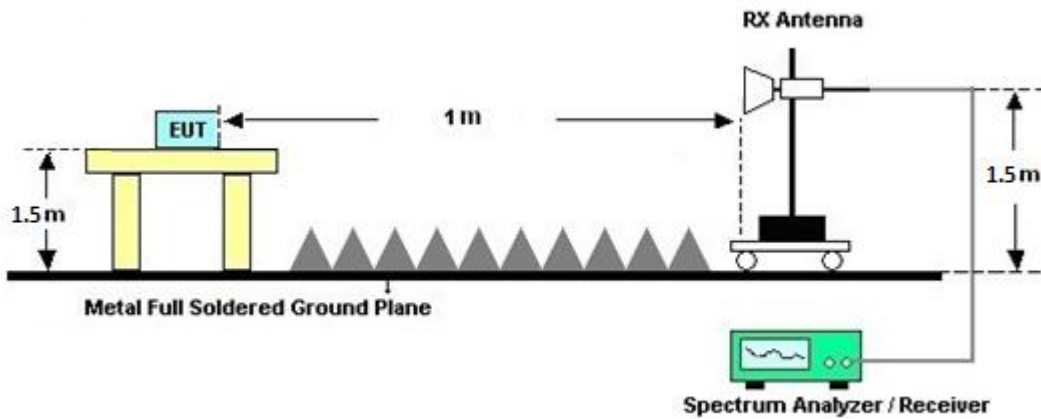

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

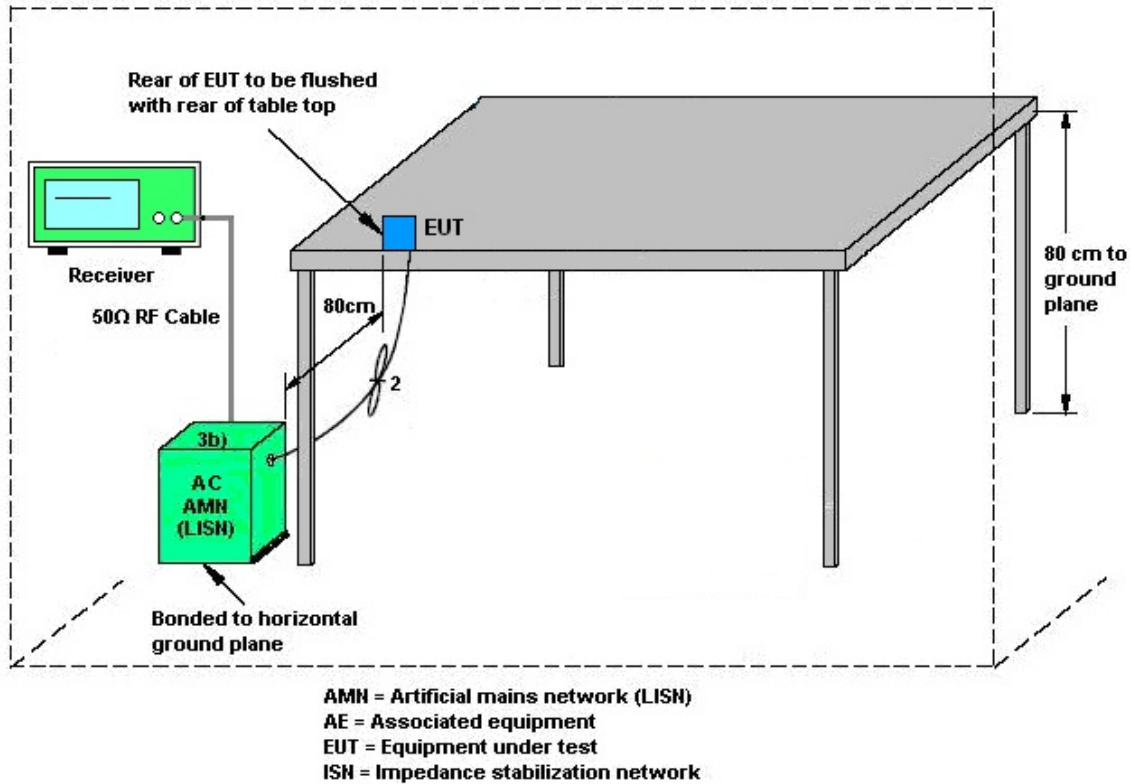

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 07, 2023	Feb. 23, 2024~ Mar. 15, 2024	Oct. 06, 2024	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Feb. 23, 2024~ Mar. 15, 2024	Sep. 11, 2024	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 17, 2023	Feb. 23, 2024~ Mar. 15, 2024	Aug. 16, 2024	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00993	18GHz~40GHz	Nov. 24, 2023	Feb. 23, 2024~ Mar. 15, 2024	Nov. 23, 2024	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 08, 2023	Feb. 23, 2024~ Mar. 15, 2024	Dec. 07, 2024	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-10M-7000-MR	EC1900245	10MHz-7GHz	Jan. 09, 2024	Feb. 23, 2024~ Mar. 15, 2024	Jan. 08, 2025	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303	1710001800055007	1GHz~18GHz	Jun. 14, 2023	Feb. 23, 2024~ Mar. 15, 2024	Jun. 13, 2024	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 27, 2023	Feb. 23, 2024~ Mar. 15, 2024	Jun. 26, 2024	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 05, 2023	Feb. 23, 2024~ Mar. 15, 2024	Oct. 04, 2024	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Aug. 02, 2023	Feb. 23, 2024~ Mar. 15, 2024	Aug. 01, 2024	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 23, 2024~ Mar. 15, 2024	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 23, 2024~ Mar. 15, 2024	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 23, 2024~ Mar. 15, 2024	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 23, 2024~ Mar. 15, 2024	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY1595/2	30MHz~40GHz	Mar. 07, 2023	Feb. 23, 2024~ Mar. 05, 2024	Mar. 06, 2024	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 07, 2023	Feb. 23, 2024~ Mar. 05, 2024	Mar. 06, 2024	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 07, 2023	Feb. 23, 2024~ Mar. 05, 2024	Mar. 06, 2024	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 07, 2023	Feb. 23, 2024~ Mar. 05, 2024	Mar. 06, 2024	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY1595/2	30MHz~40GHz	Mar. 06, 2024	Mar. 06, 2024~ Mar. 15, 2024	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 06, 2024	Mar. 06, 2024~ Mar. 15, 2024	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Mar. 06, 2024~ Mar. 15, 2024	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 06, 2024	Mar. 06, 2024~ Mar. 15, 2024	Mar. 05, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53G Low Pass	Sep. 11, 2023	Feb. 23, 2024~ Mar. 15, 2024	Sep. 10, 2024	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 11, 2023	Feb. 23, 2024~ Mar. 15, 2024	Sep. 10, 2024	Radiation (03CH11-HY)
Hygrometer	TECEPIL	DTM-303B	TP140325	N/A	Dec. 08, 2023	Feb. 23, 2024~ Mar. 15, 2024	Dec. 07, 2024	Radiation (03CH11-HY)
Hygrometer	TECEPIL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Mar. 21, 2024~ Mar. 23, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15100041SNO10 (NO:248)	10MHz~6GHz	Jun. 05, 2023	Mar. 21, 2024~ Mar. 23, 2024	Jun. 04, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	Mar. 21, 2024~ Mar. 23, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Switch Control Mainframe	E-Instrument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 10, 2023	Mar. 21, 2024~ Mar. 23, 2024	Jul. 09, 2024	Conducted (TH05-HY)





Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 20, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 20, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2023	Mar. 20, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Mar. 20, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Mar. 20, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Mar. 20, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Mar. 20, 2024	Sep. 19, 2024	Conduction (CO07-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.44 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.10 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.30 dB
---	---------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.30 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.30 dB
---	---------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2024/3/21~2024/3/23	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	2	1	2412	13.54	13.44	9.05	9.03	0.50	Pass
11b	1Mbps	2	6	2437	13.54	13.44	9.03	9.04	0.50	Pass
11b	1Mbps	2	11	2462	13.54	13.54	9.02	8.54	0.50	Pass
11g	6Mbps	2	1	2412	16.68	16.78	16.32	16.33	0.50	Pass
11g	6Mbps	2	6	2437	16.68	16.73	16.35	16.33	0.50	Pass
11g	6Mbps	2	11	2462	16.58	16.68	16.32	16.31	0.50	Pass
HT20	MCS0	2	1	2412	17.68	17.68	17.57	17.58	0.50	Pass
HT20	MCS0	2	6	2437	17.68	17.68	17.56	17.59	0.50	Pass
HT20	MCS0	2	11	2462	17.63	17.68	17.57	17.53	0.50	Pass

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	15.90	16.40	19.17	30.00		1.43		20.60		36.00	Pass	
11b	1Mbps	2	6	2437	16.50	16.40	19.46	30.00		1.43		20.89		36.00	Pass	
11b	1Mbps	2	11	2462	16.50	16.70	19.61	30.00		1.43		21.04		36.00	Pass	
11g	6Mbps	2	1	2412	16.30	16.40	19.36	30.00		1.43		20.79		36.00	Pass	
11g	6Mbps	2	6	2437	17.70	17.60	20.66	30.00		1.43		22.09		36.00	Pass	
11g	6Mbps	2	11	2462	15.60	15.60	18.61	30.00		1.43		20.04		36.00	Pass	
HT20	MCS0	2	1	2412	17.60	17.60	20.61	30.00		1.43		22.04		36.00	Pass	
HT20	MCS0	2	6	2437	17.00	17.50	20.27	30.00		1.43		21.70		36.00	Pass	
HT20	MCS0	2	11	2462	14.80	15.20	18.01	30.00		1.43		19.44		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**


2.4GHz Band MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	-4.86	-5.12	-1.85	3.96		8.00		Pass
11b	1Mbps	2	6	2437	-5.06	-4.92	-1.91	3.96		8.00		Pass
11b	1Mbps	2	11	2462	-4.54	-5.26	-1.53	3.96		8.00		Pass
11g	6Mbps	2	1	2412	-7.54	-7.51	-4.50	3.96		8.00		Pass
11g	6Mbps	2	6	2437	-6.67	-6.21	-3.20	3.96		8.00		Pass
11g	6Mbps	2	11	2462	-8.09	-8.56	-5.08	3.96		8.00		Pass
HT20	MCS0	2	1	2412	-7.42	-6.98	-3.97	3.96		8.00		Pass
HT20	MCS0	2	6	2437	-5.43	-6.08	-2.42	3.96		8.00		Pass
HT20	MCS0	2	11	2462	-9.34	-8.86	-5.85	3.96		8.00		Pass

Measured power density (dBm) has offset with cable loss.




6dB and 99% Occupied Bandwidth

<802.11b>

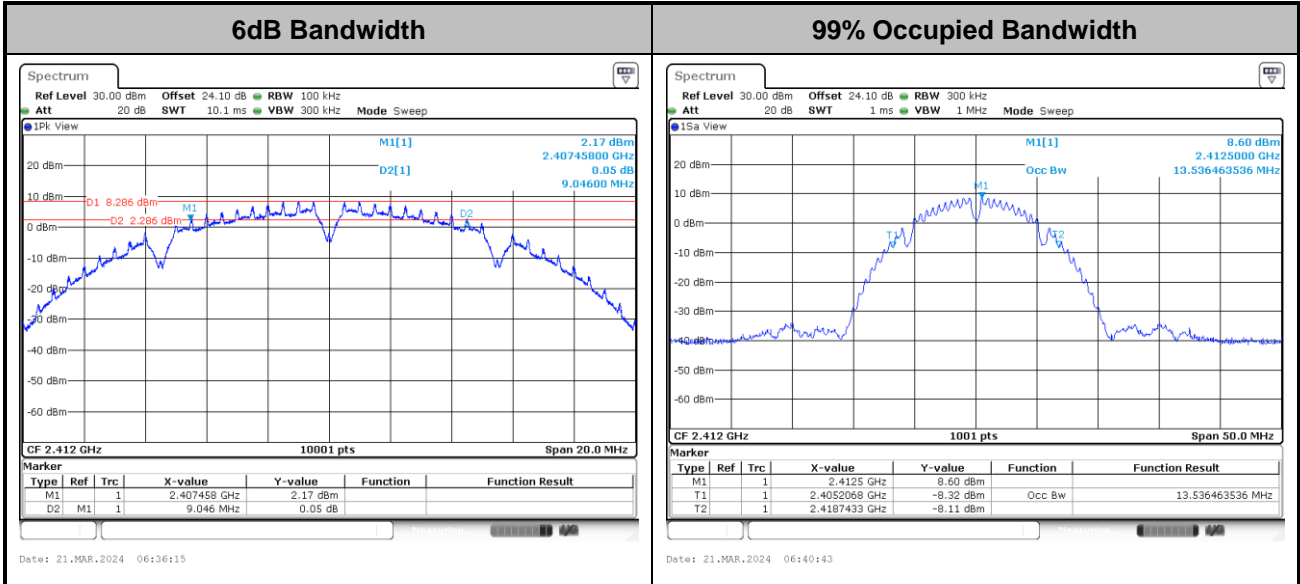

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

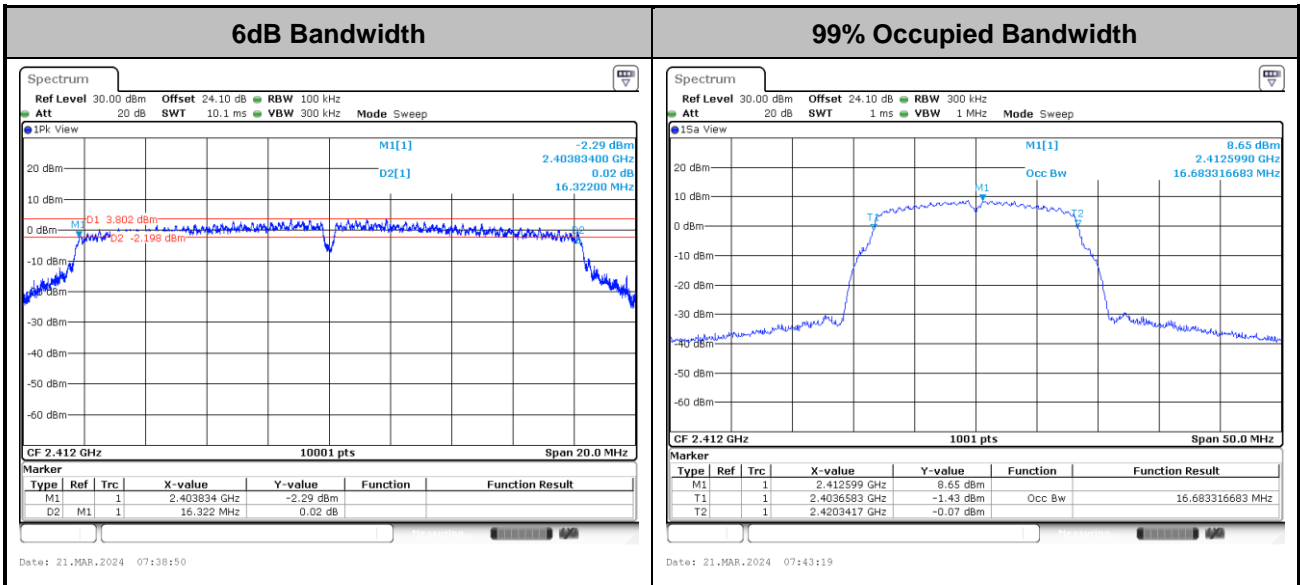

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11n HT20>

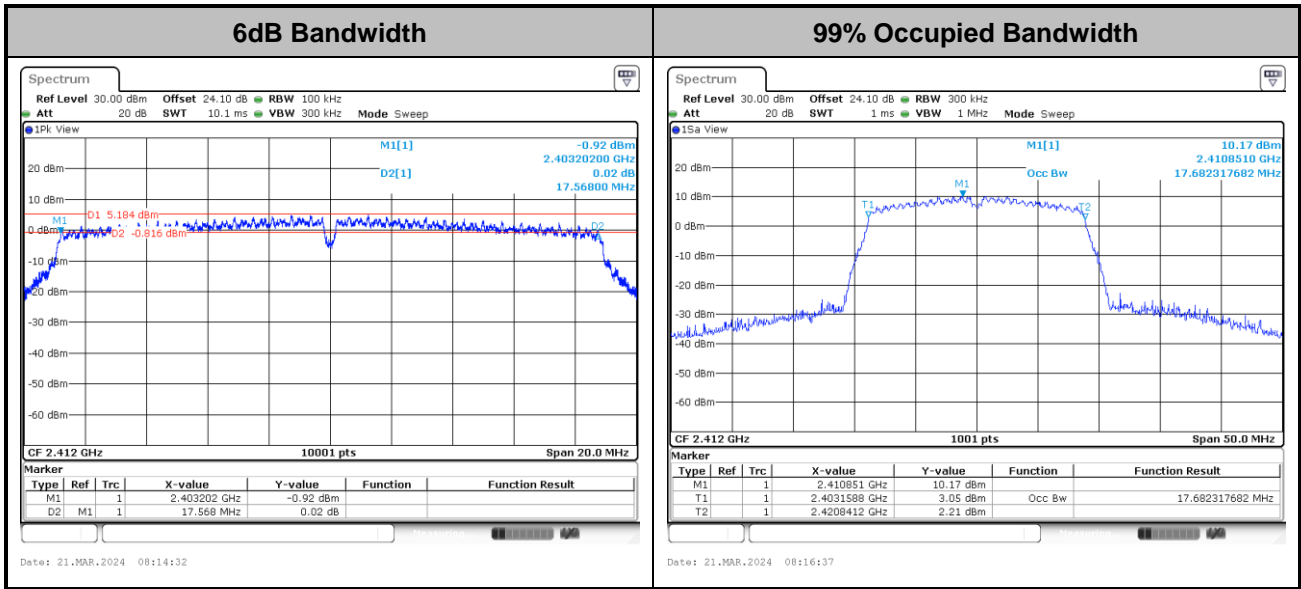

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.






Power Spectral Density(dBm/3kHz)


<802.11b>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

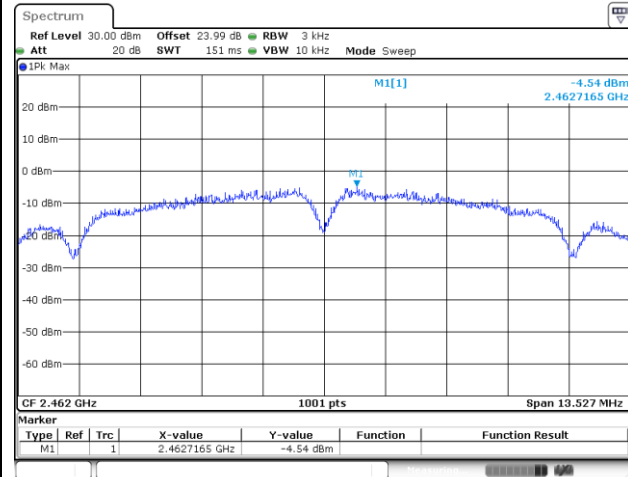


MIMO Ant 2

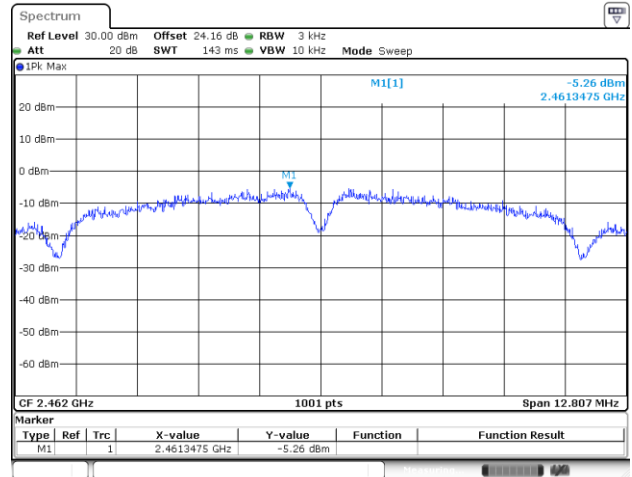


<802.11g>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

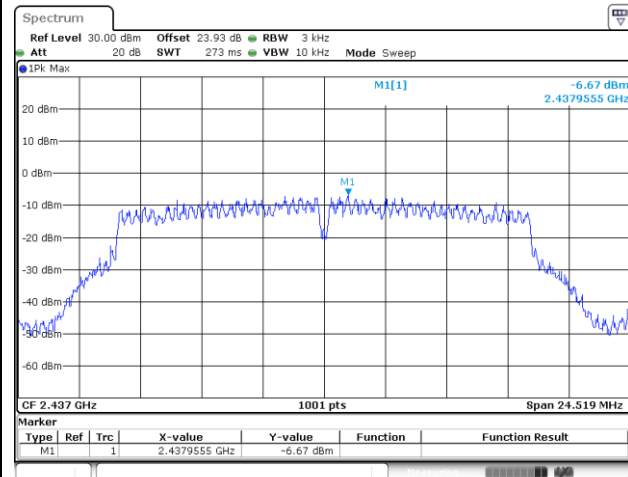

MIMO Ant 2

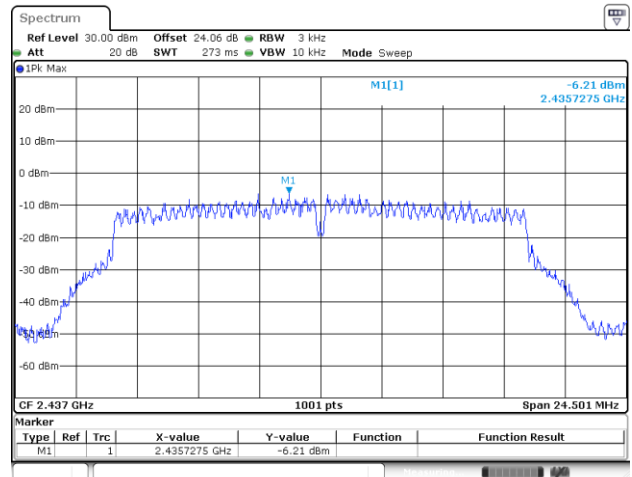





<802.11n HT20>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

MIMO Ant 2

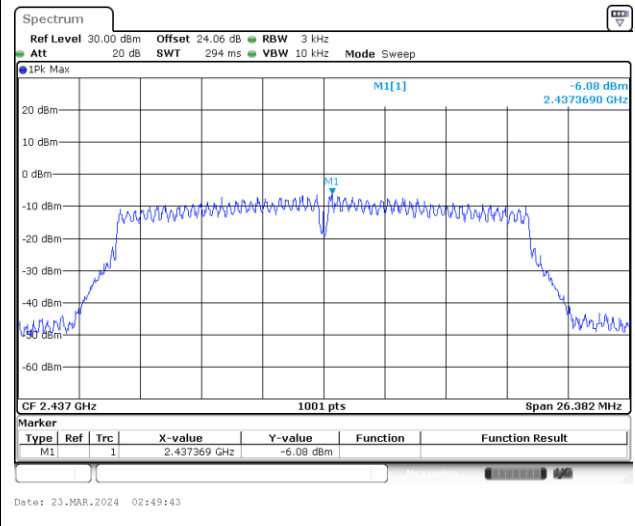
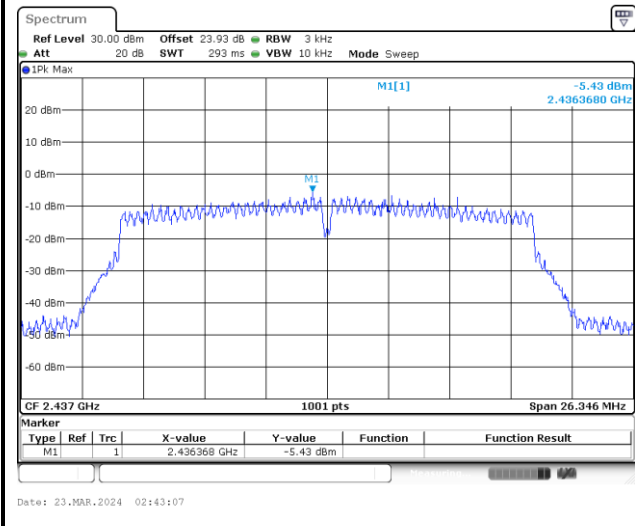




**Band Edges and Spurious Emission**


Number of TX = 2, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

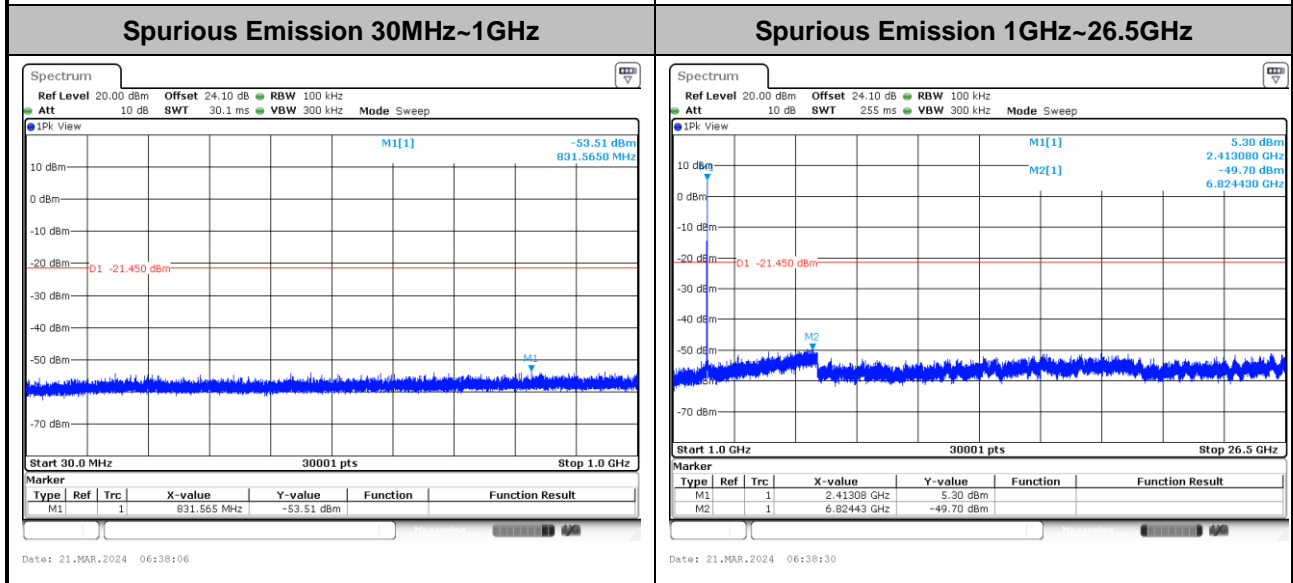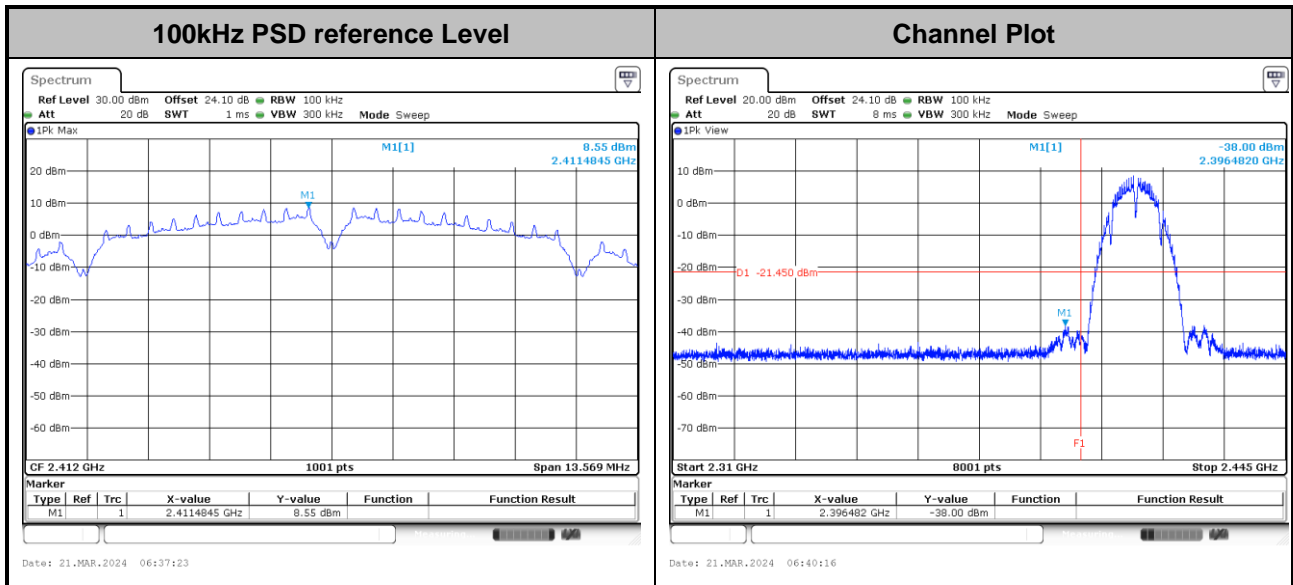




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

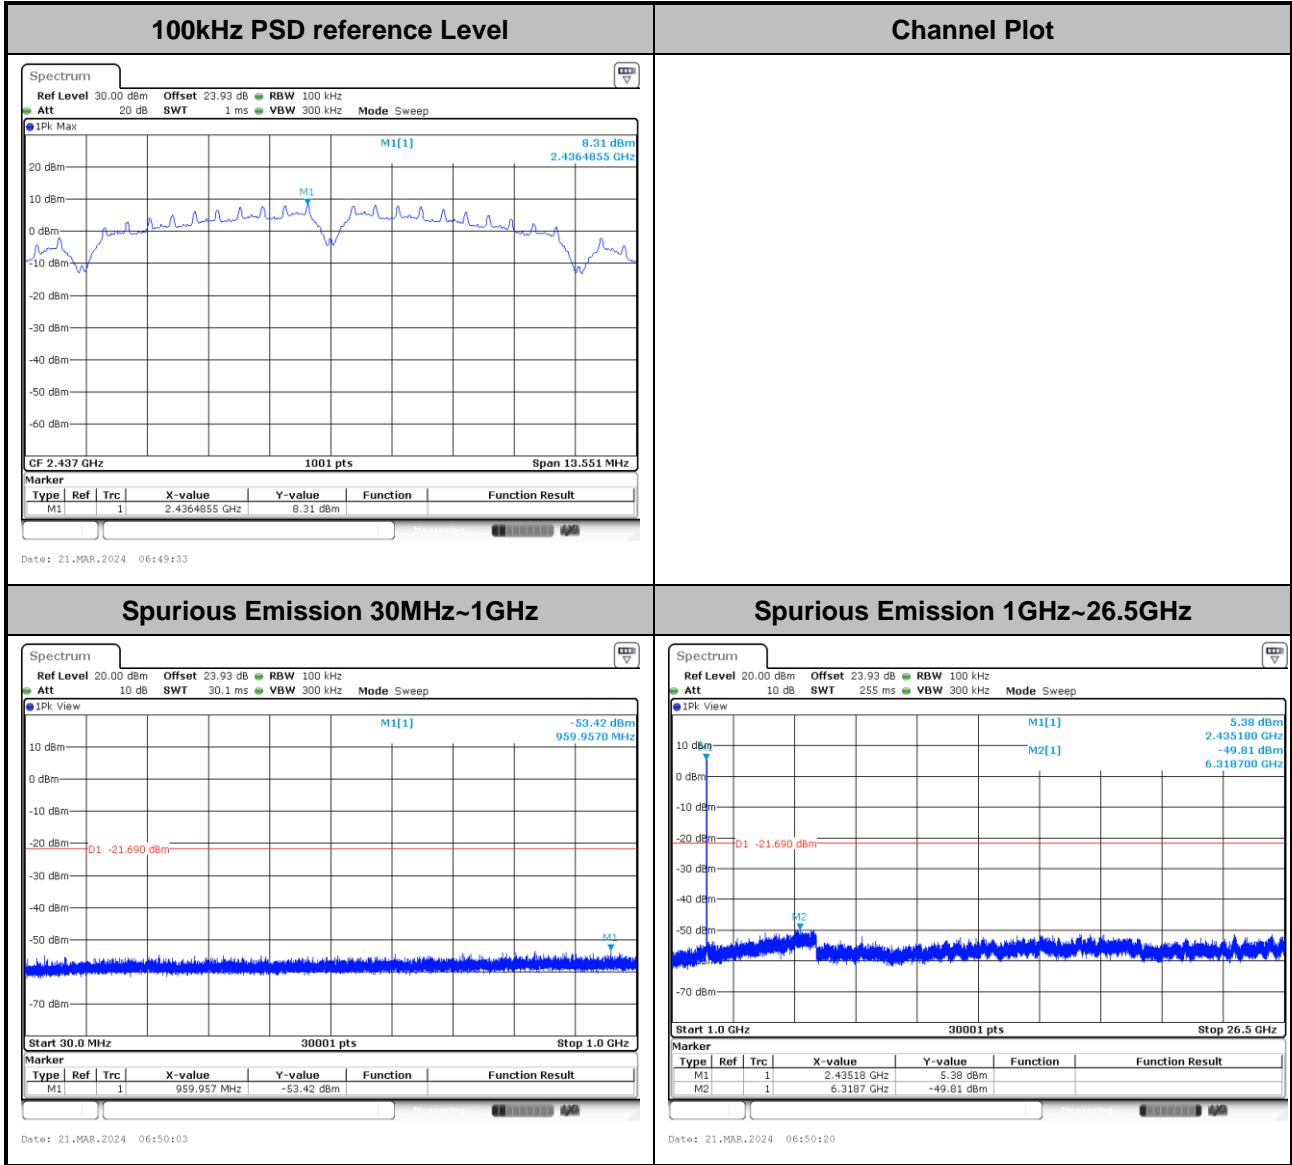




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

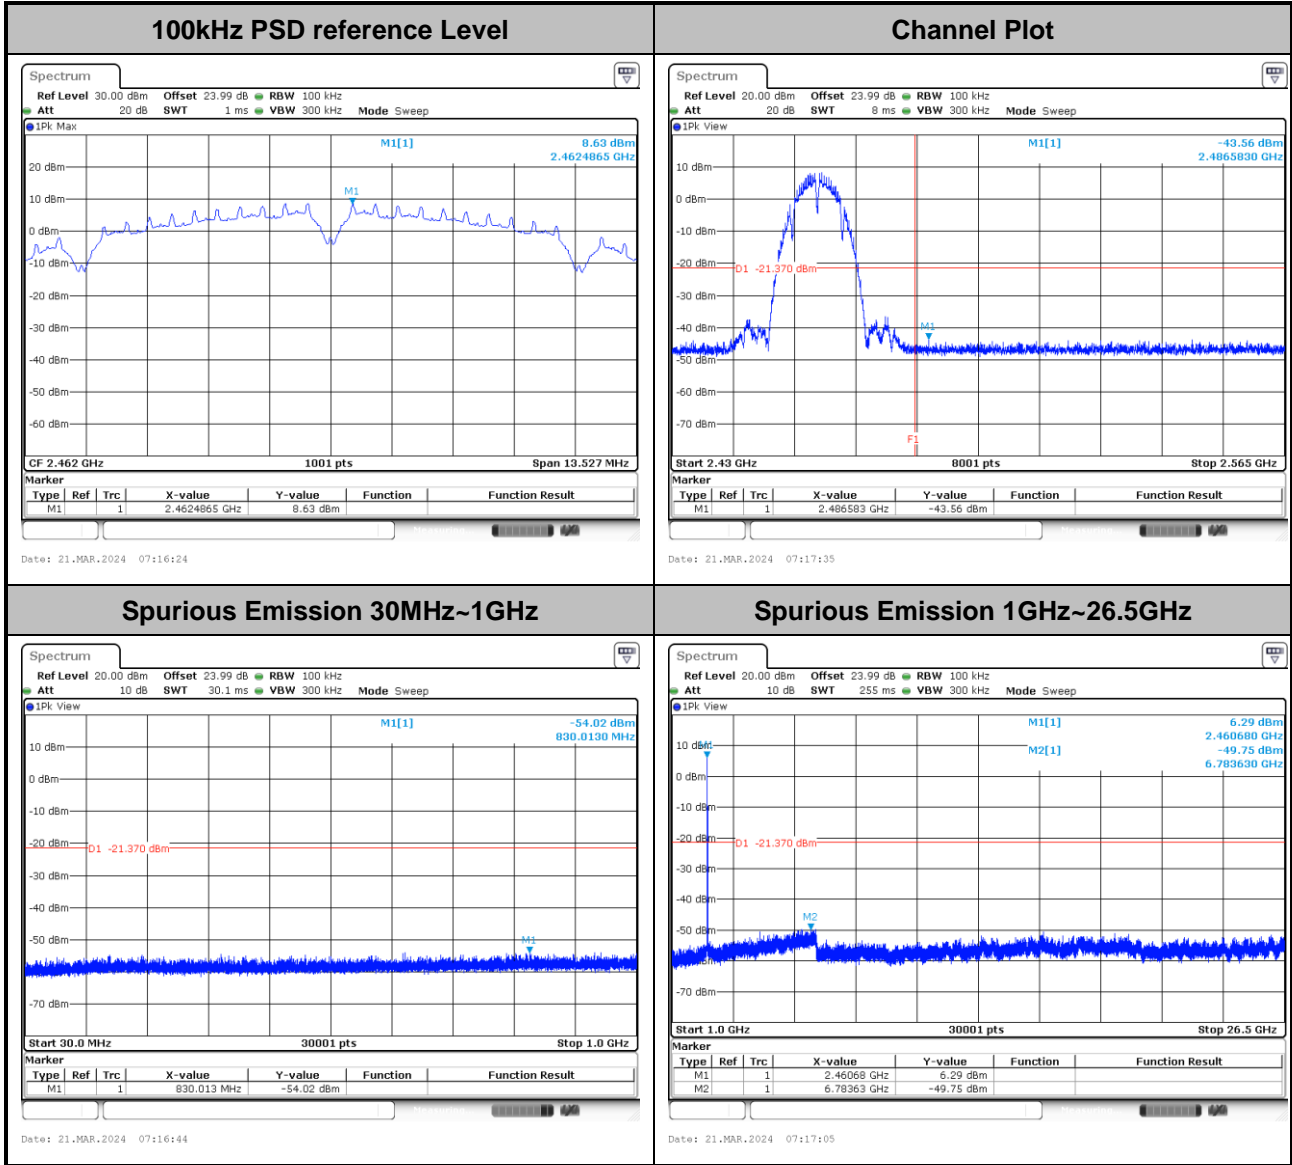




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

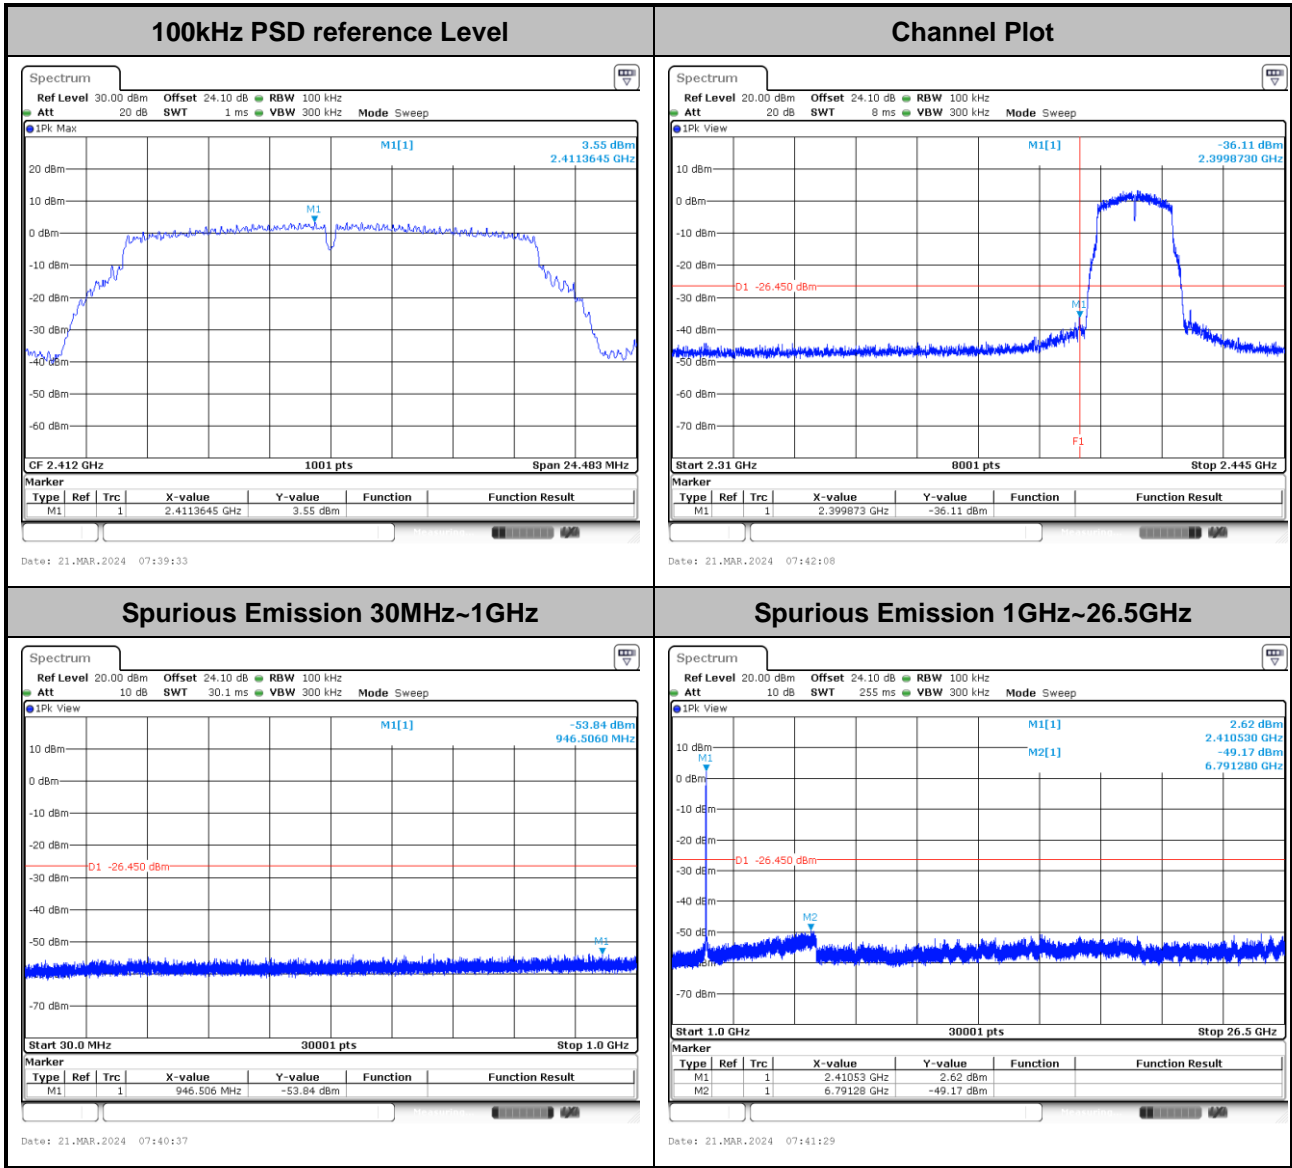




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

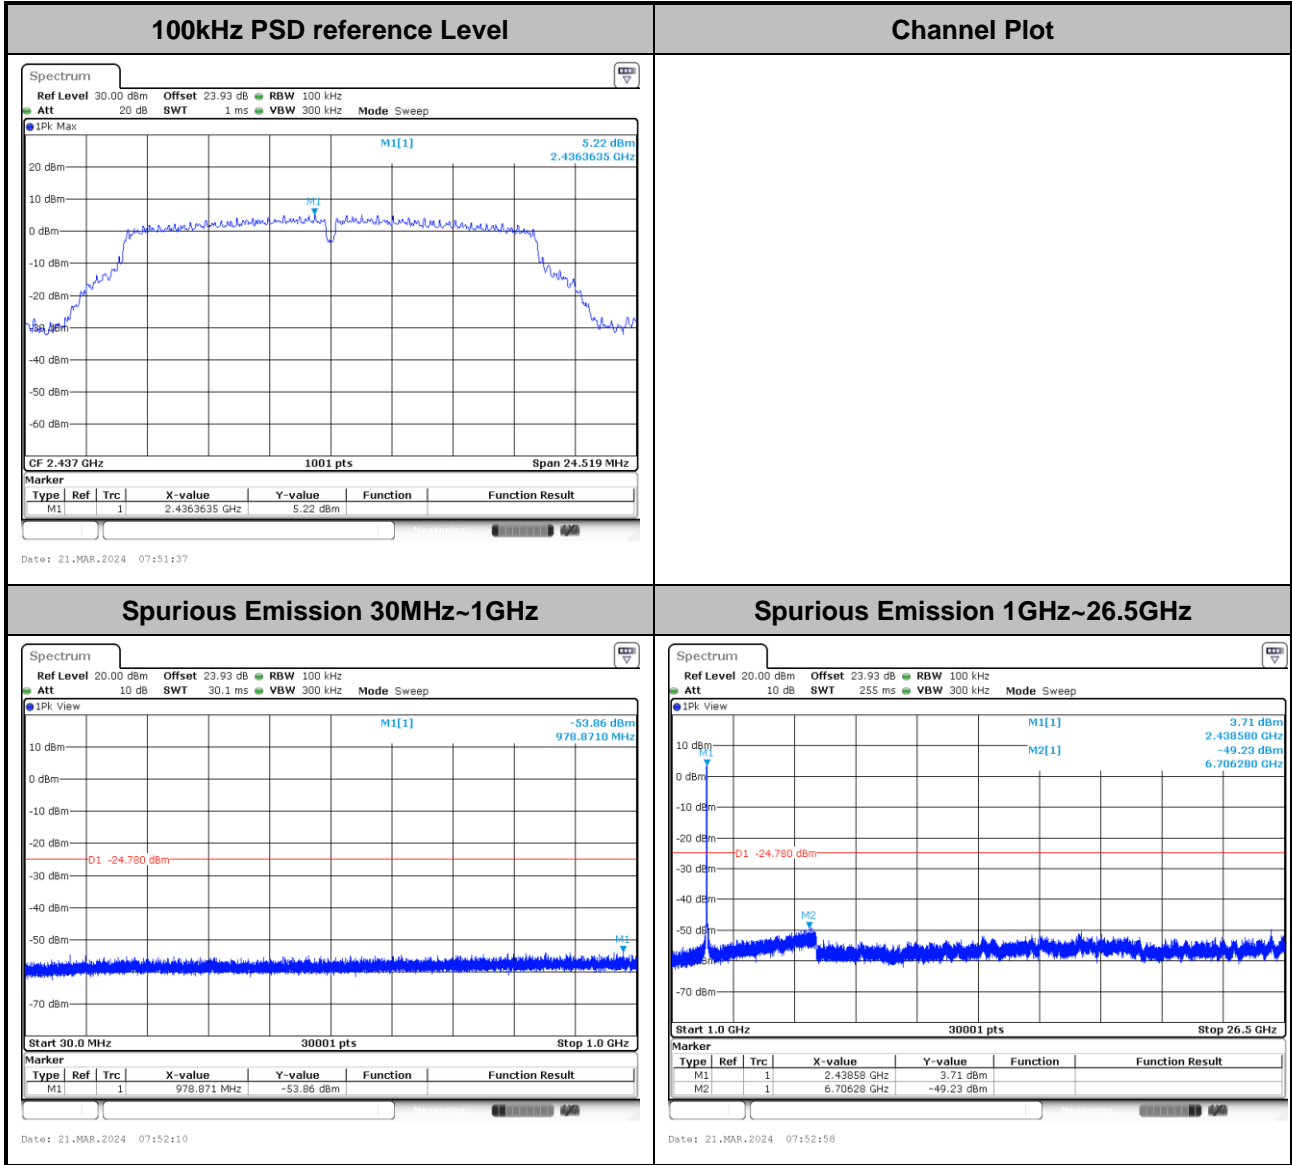




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

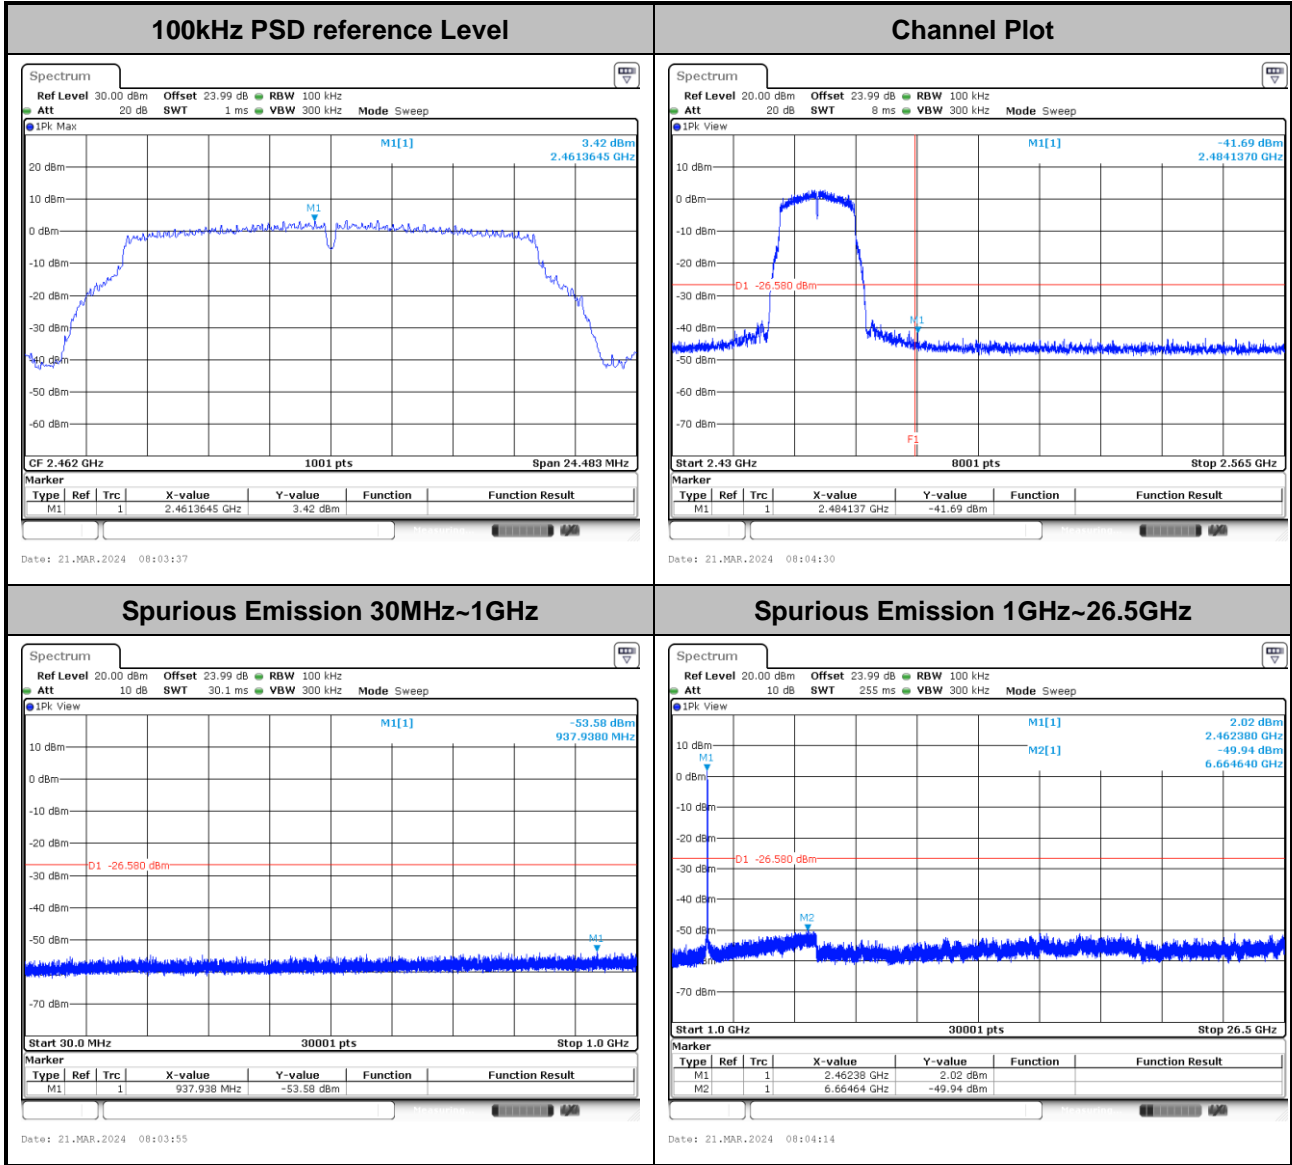






Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

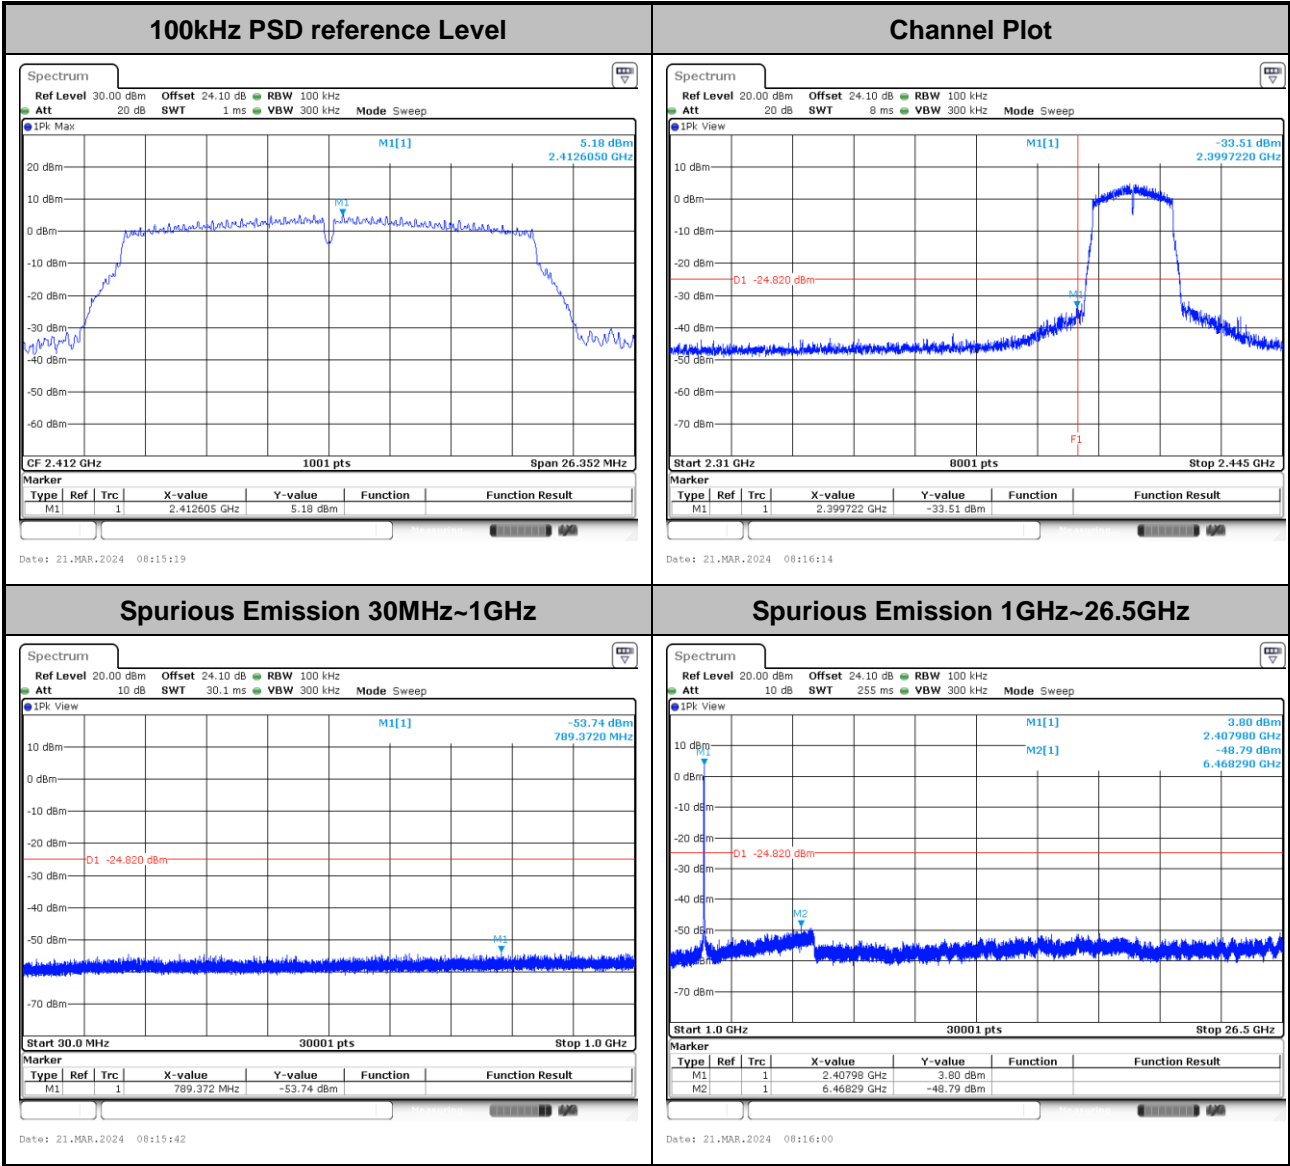




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

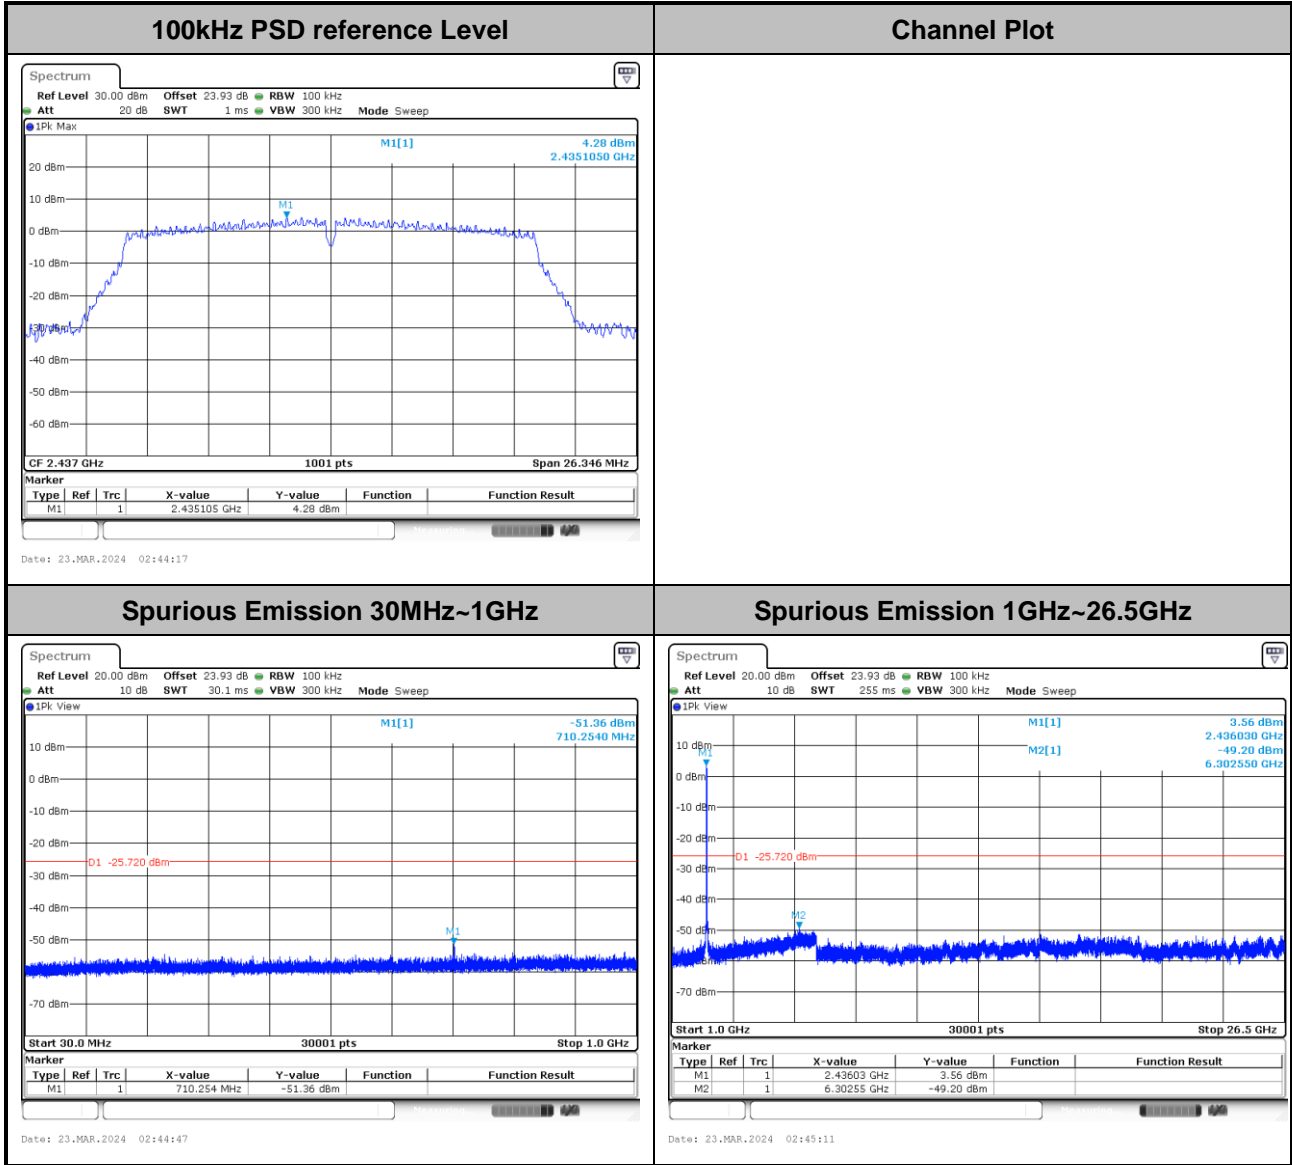




Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

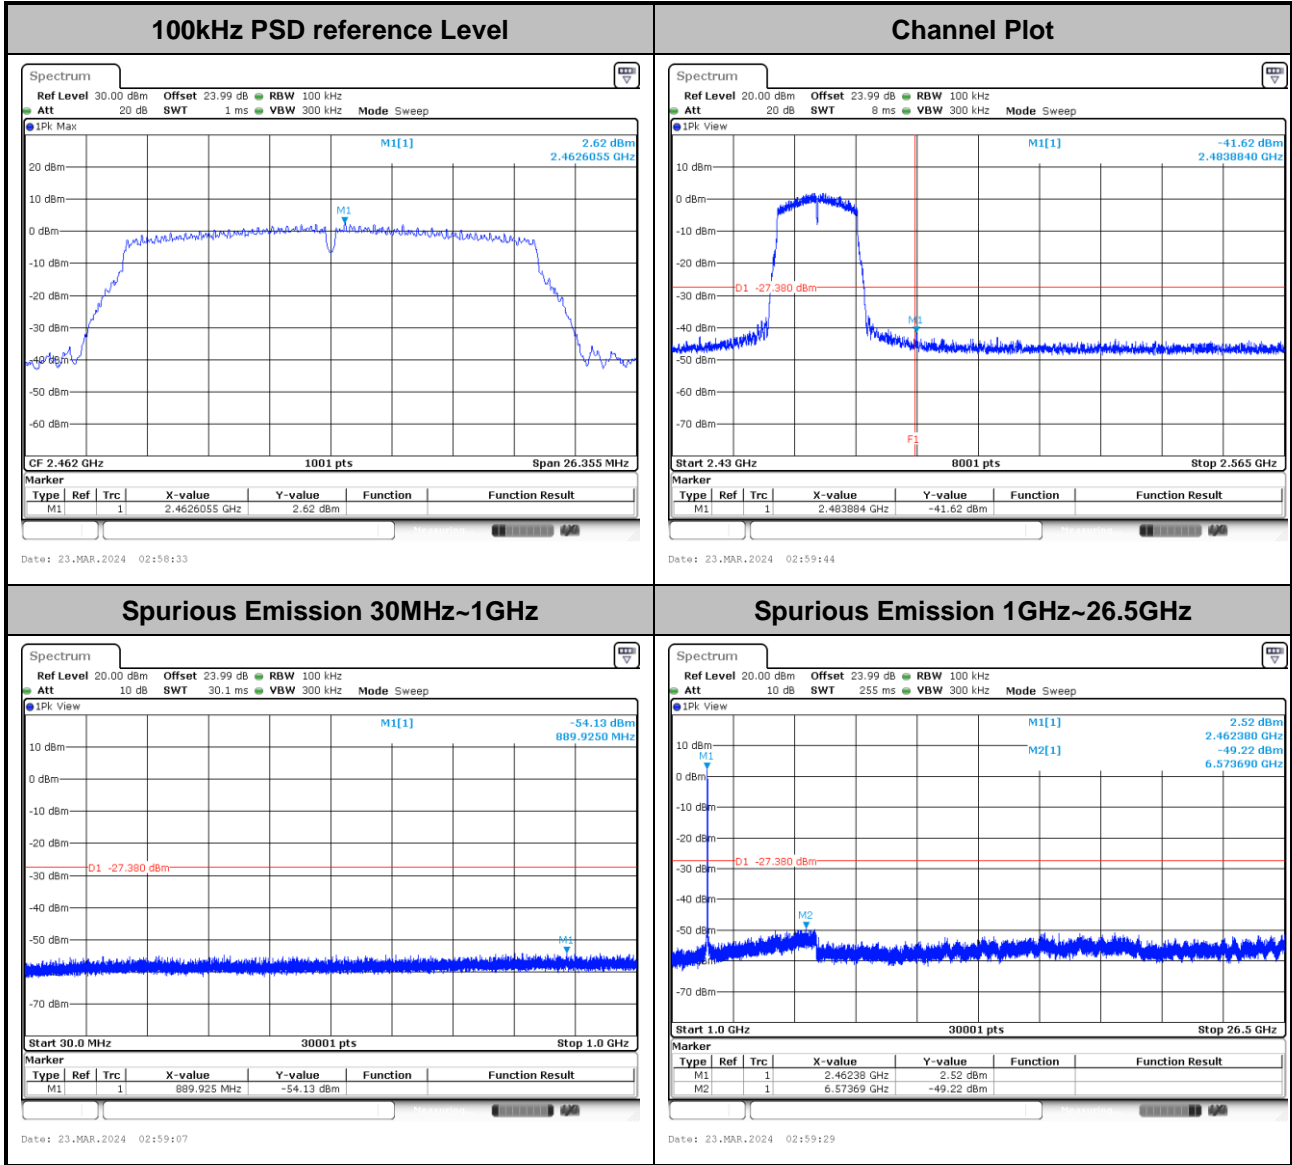




Number of TX = 2, Ant. 2 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

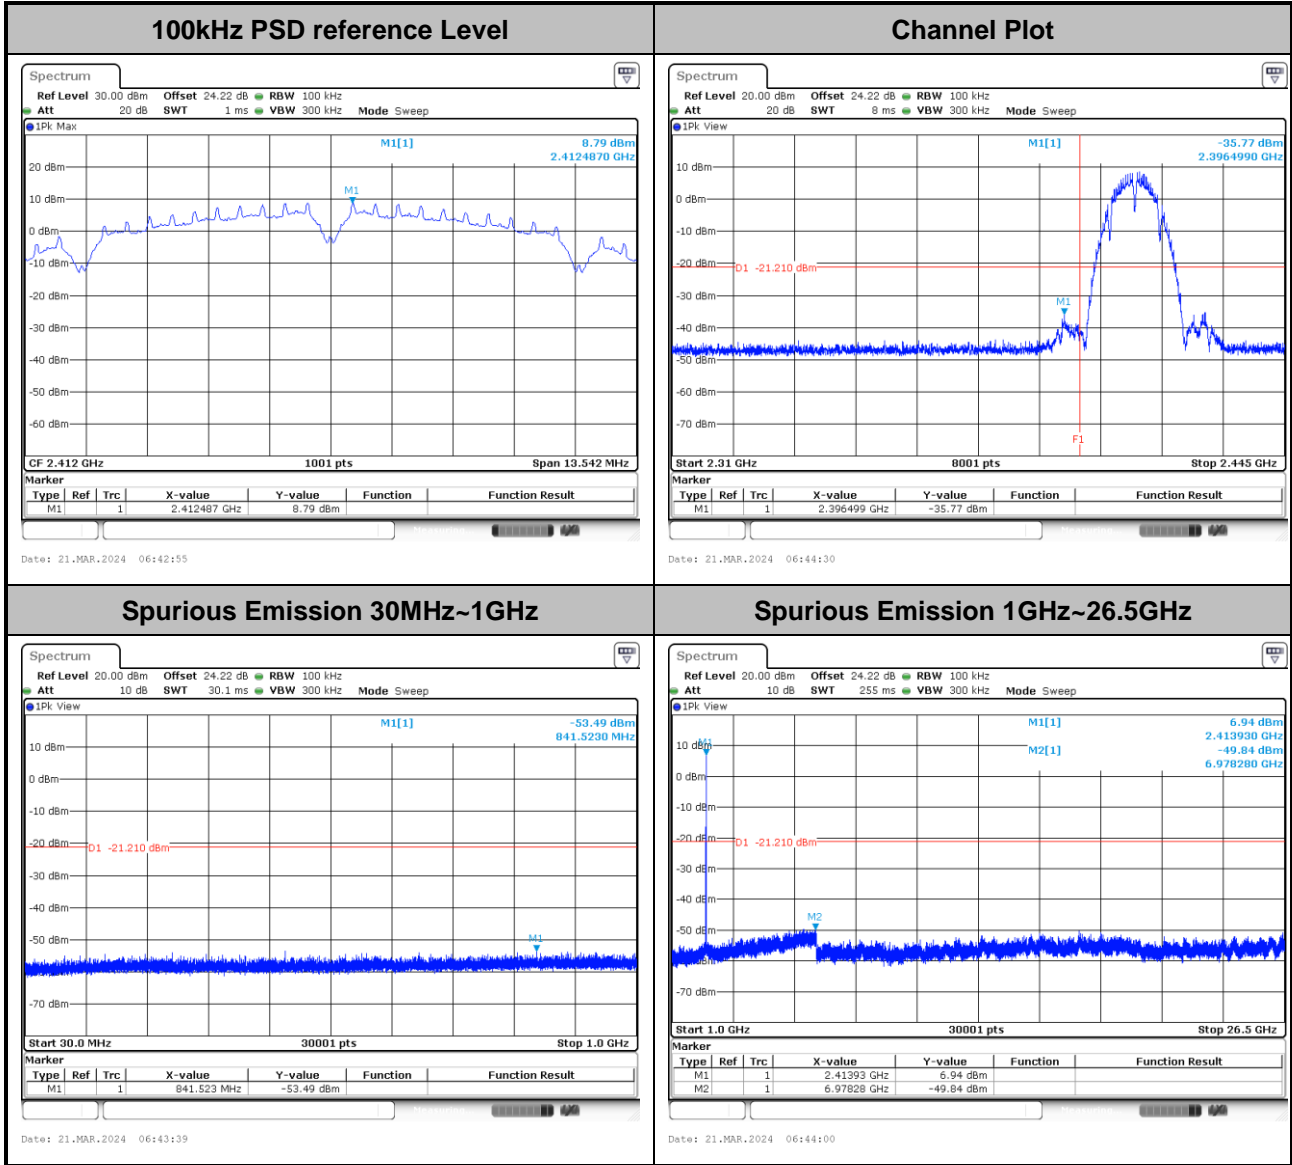




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

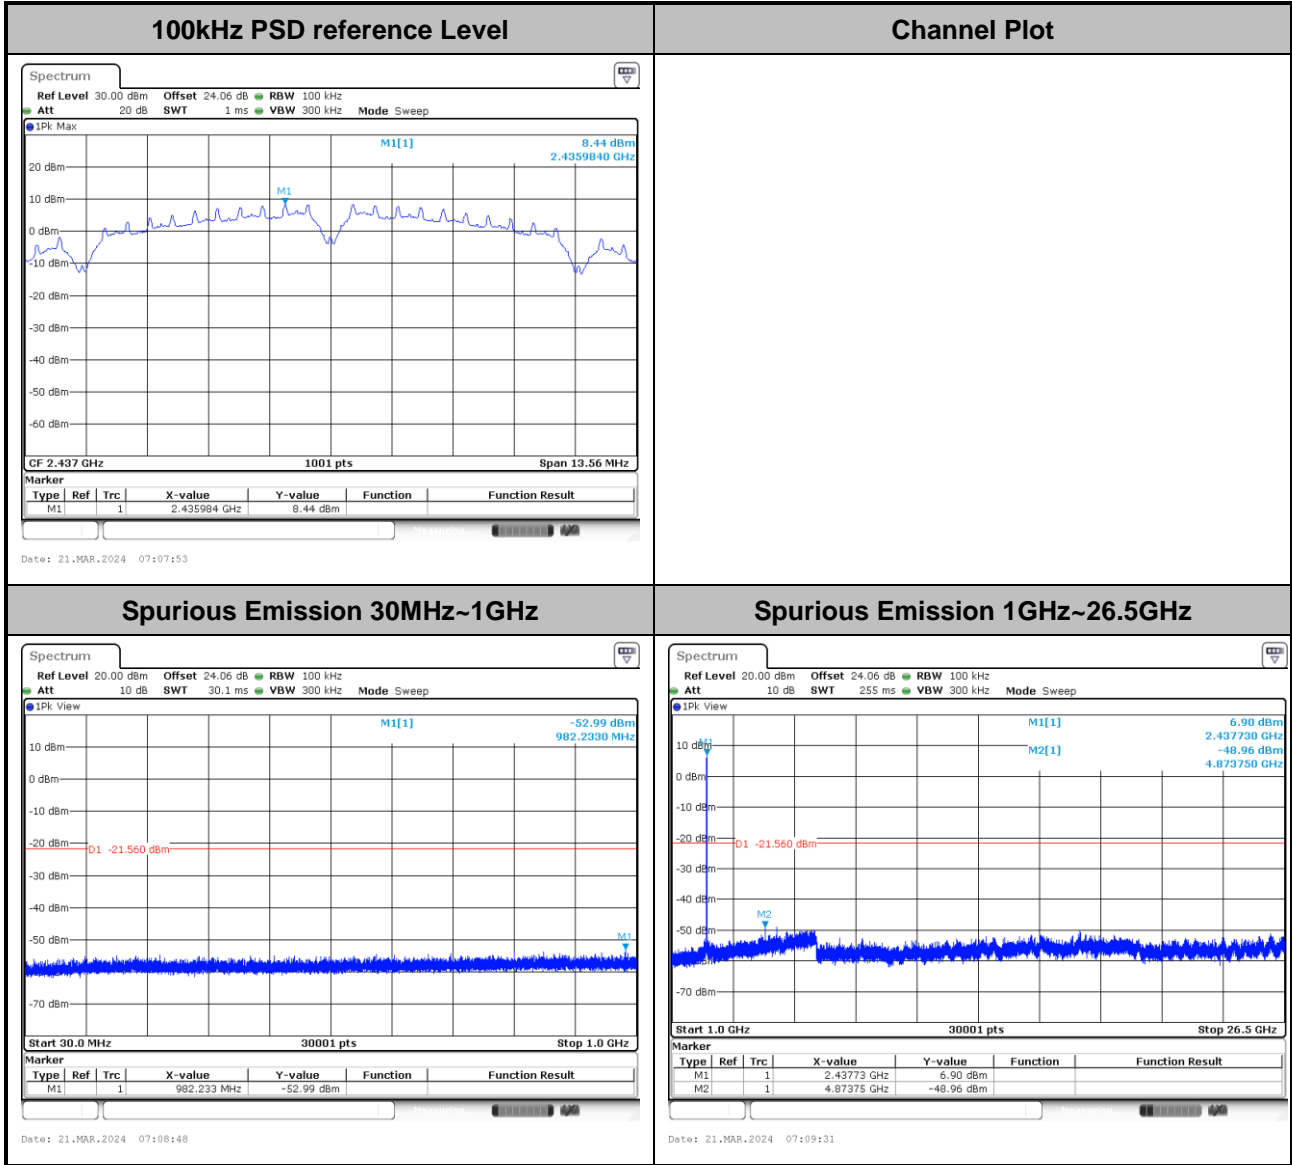




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

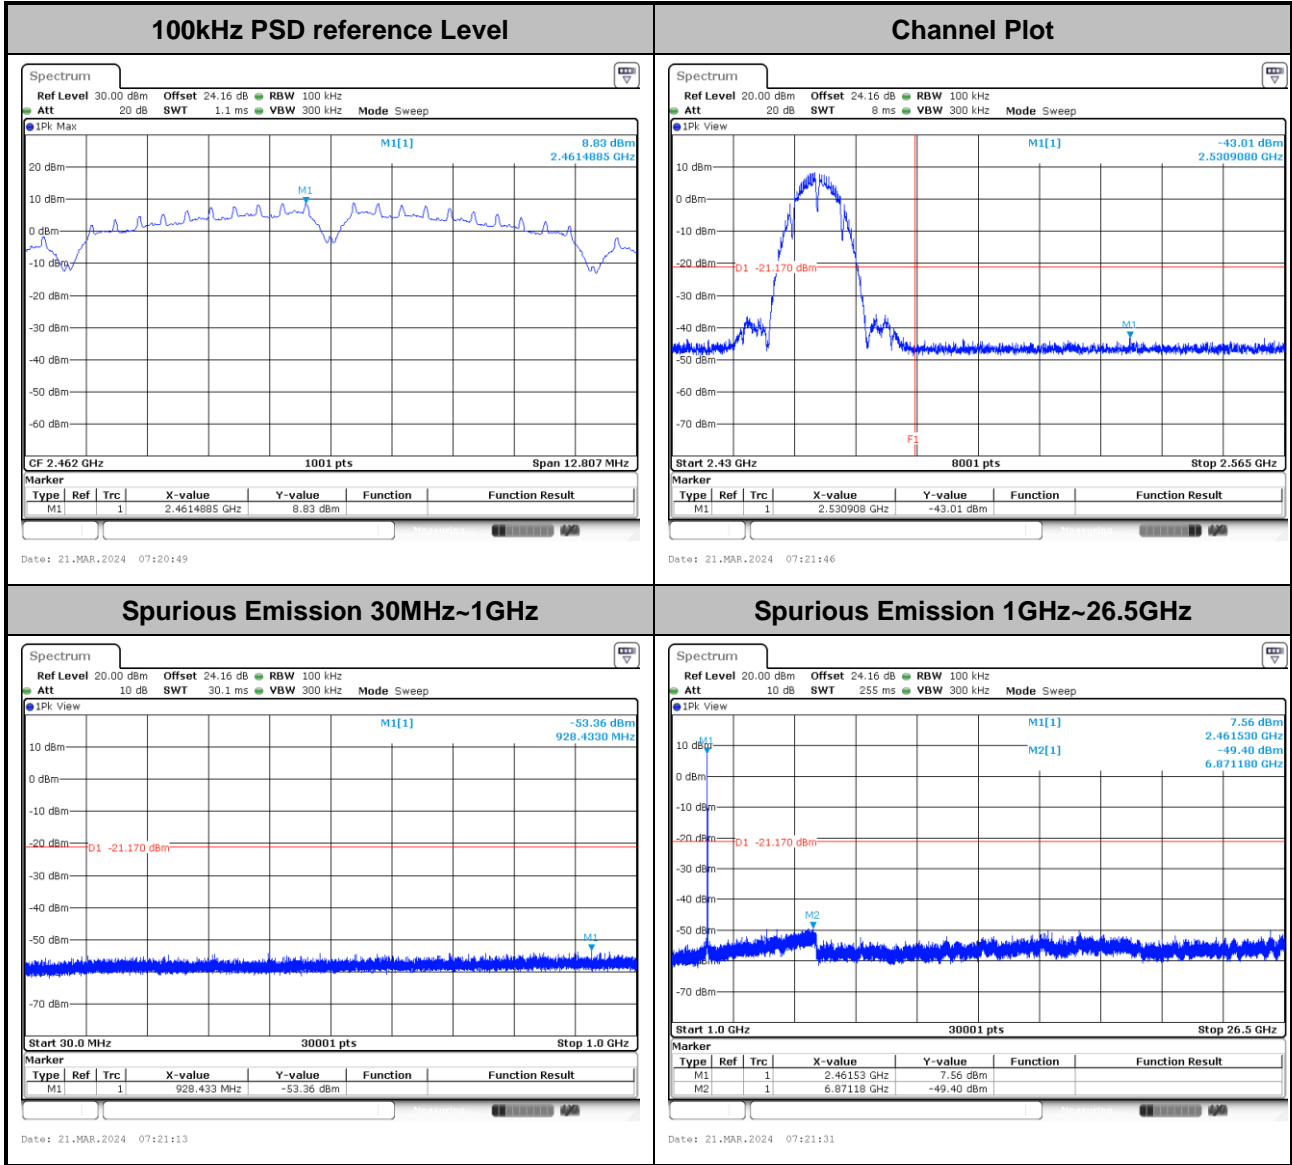




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

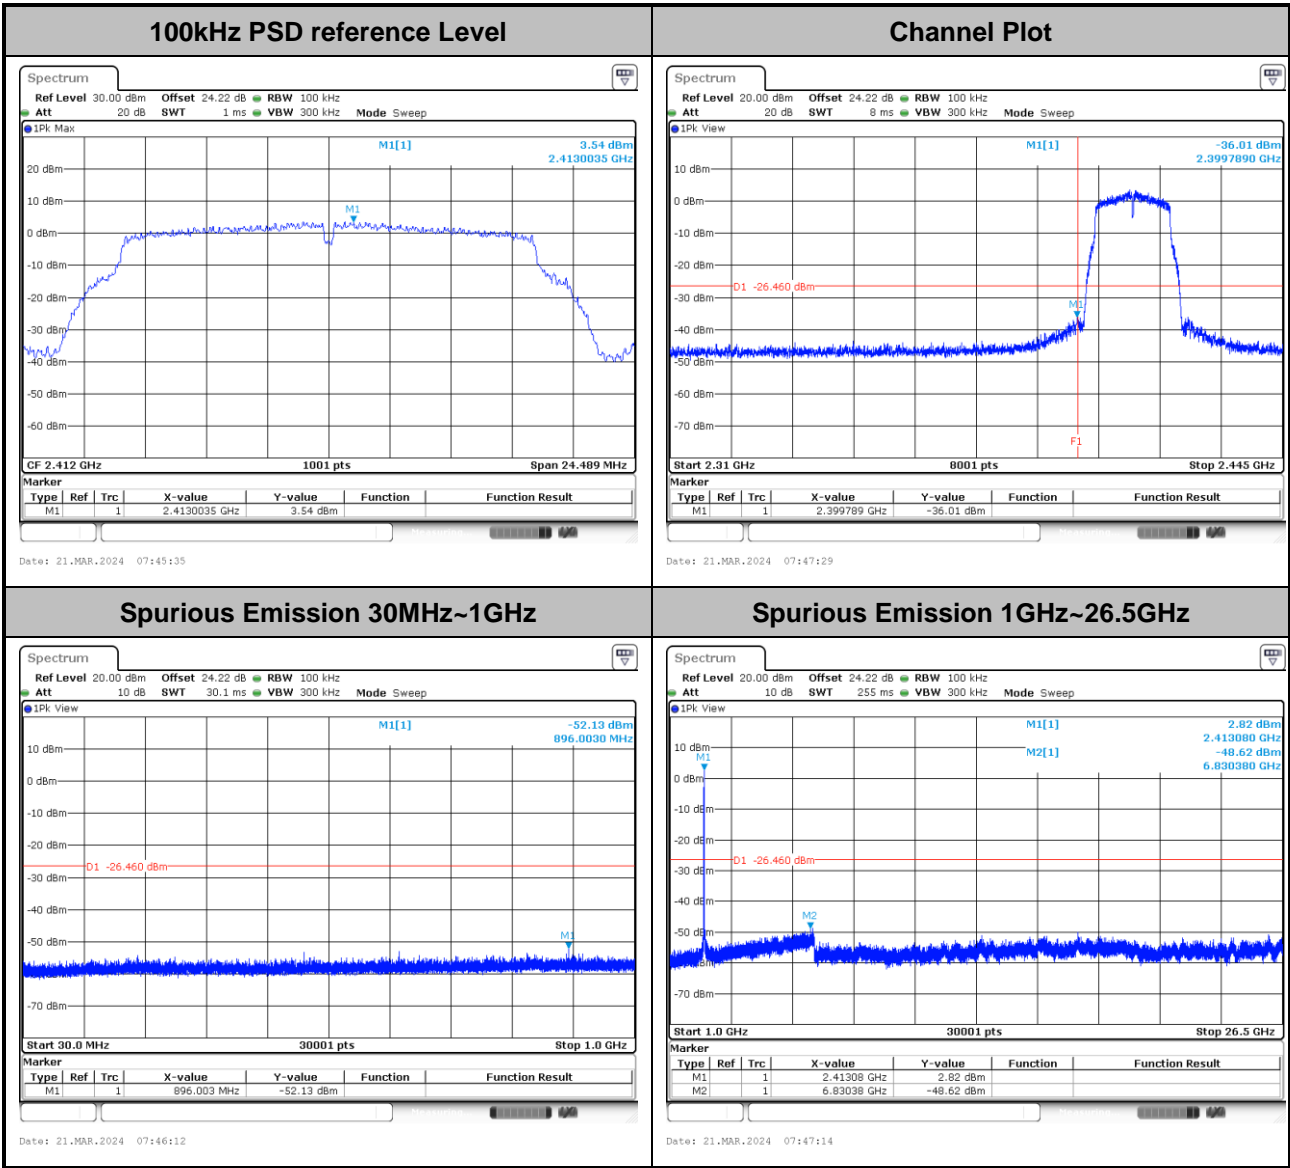




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

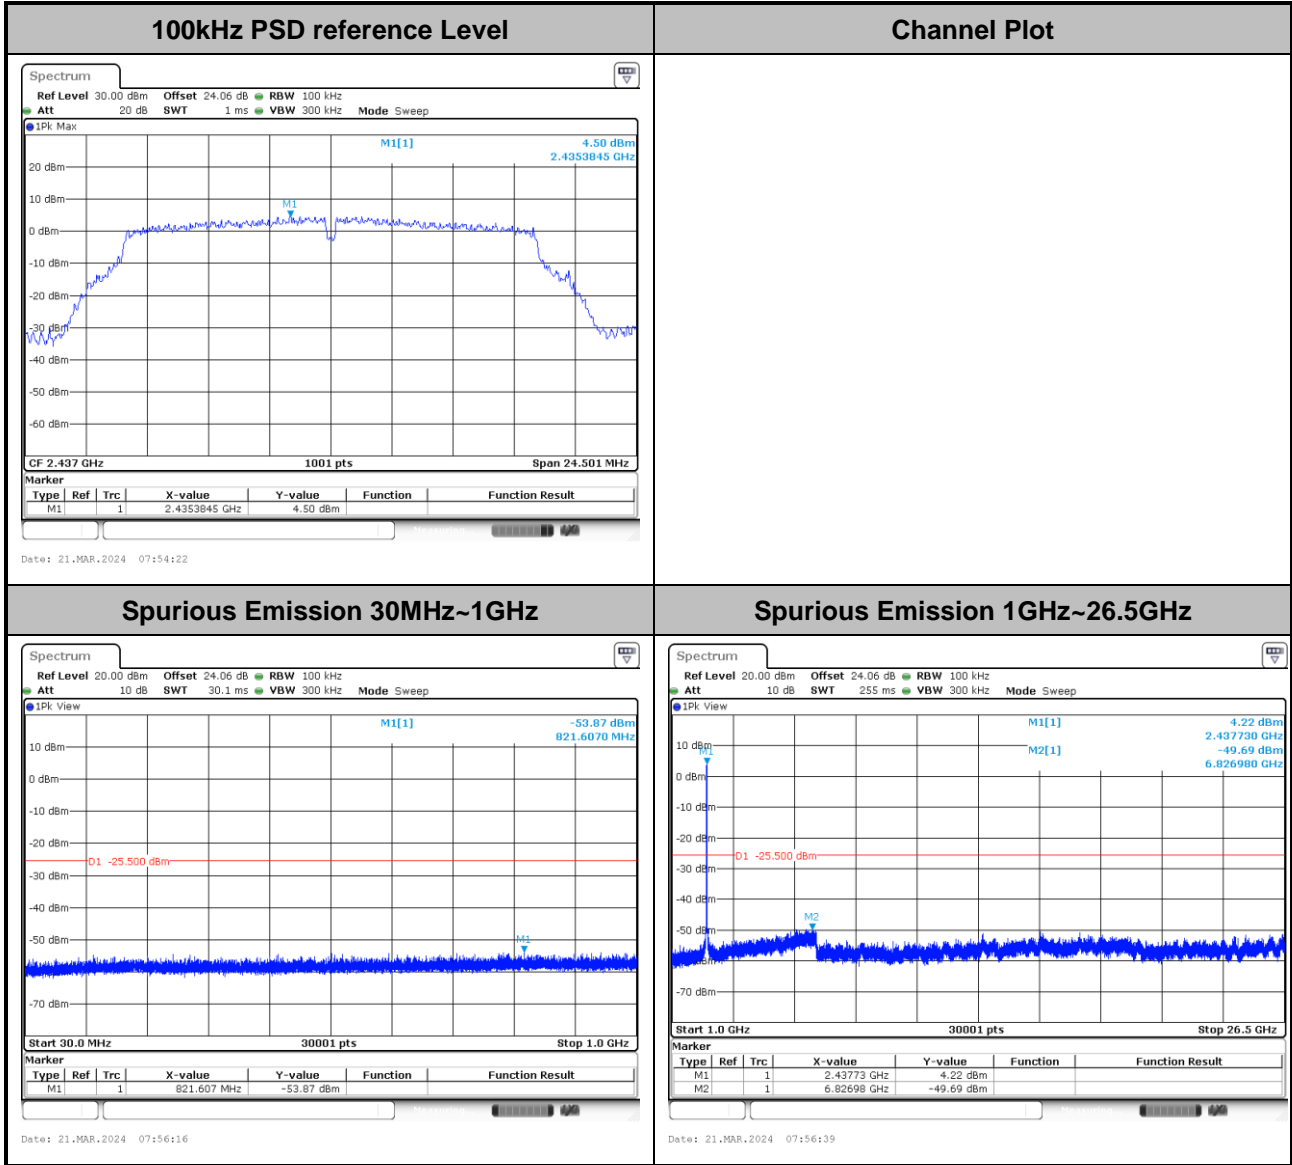






Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

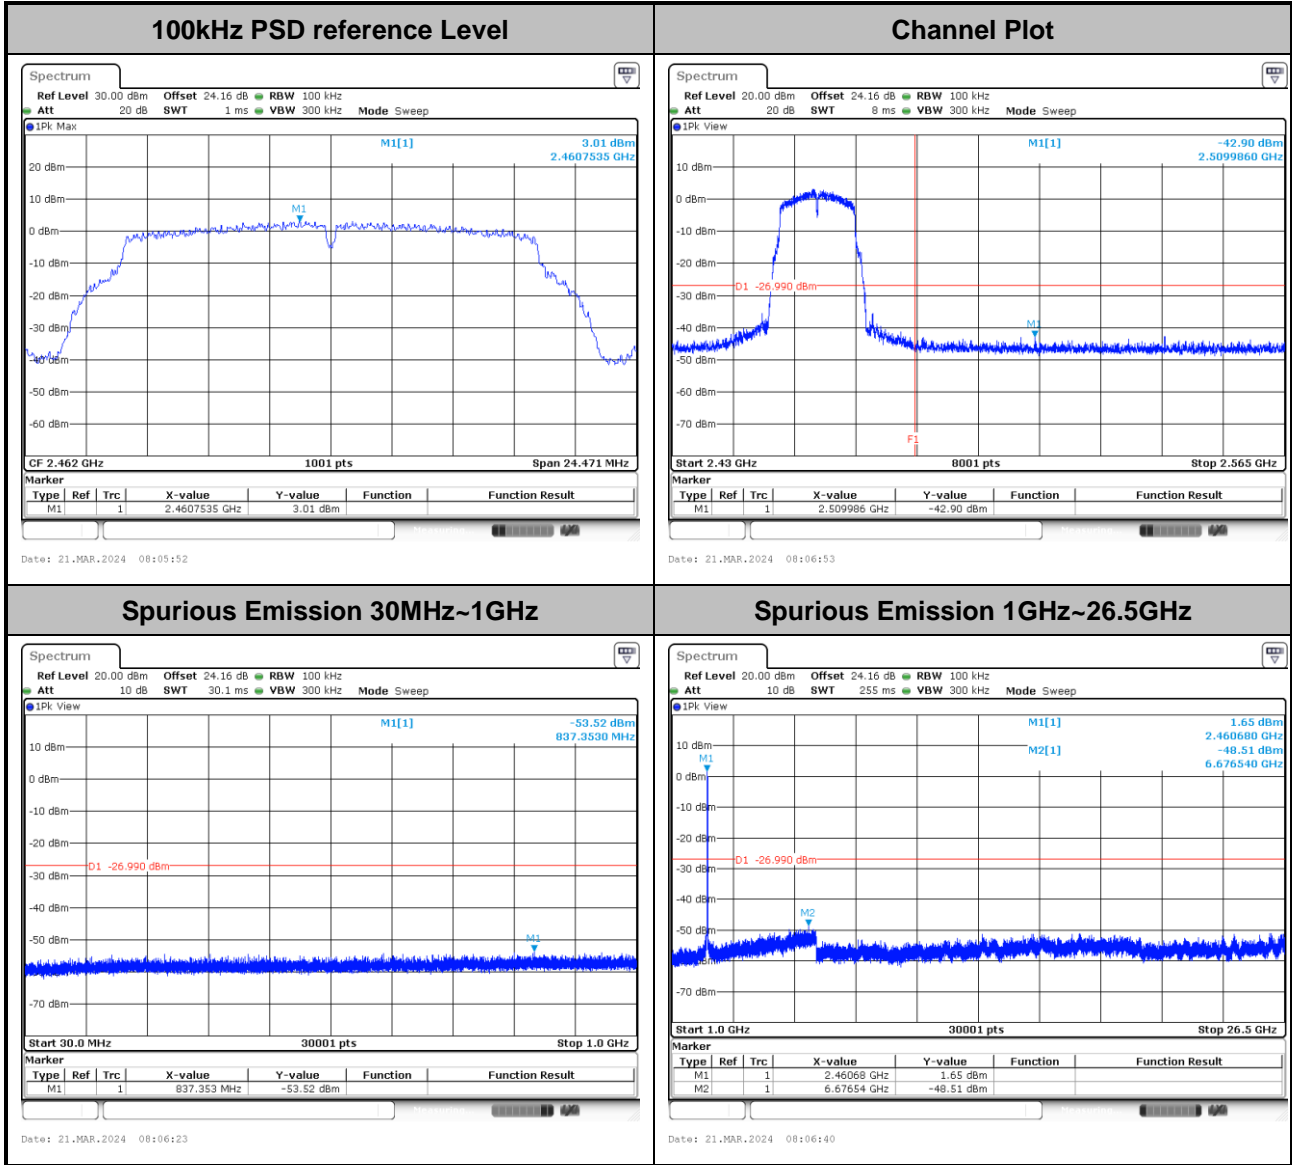




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

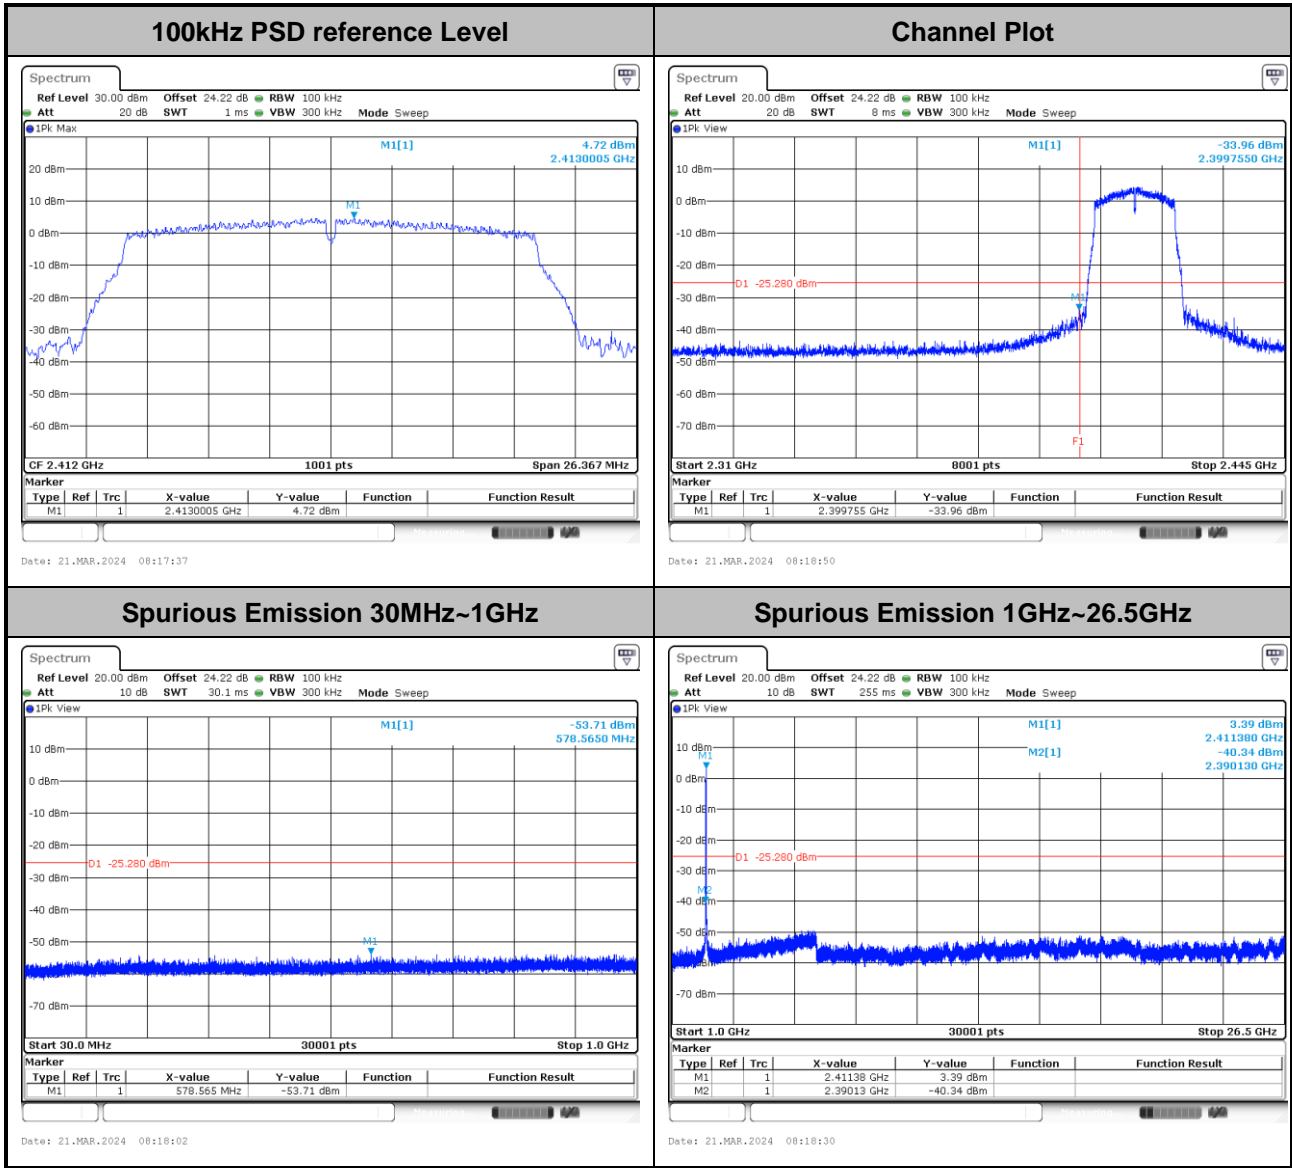




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

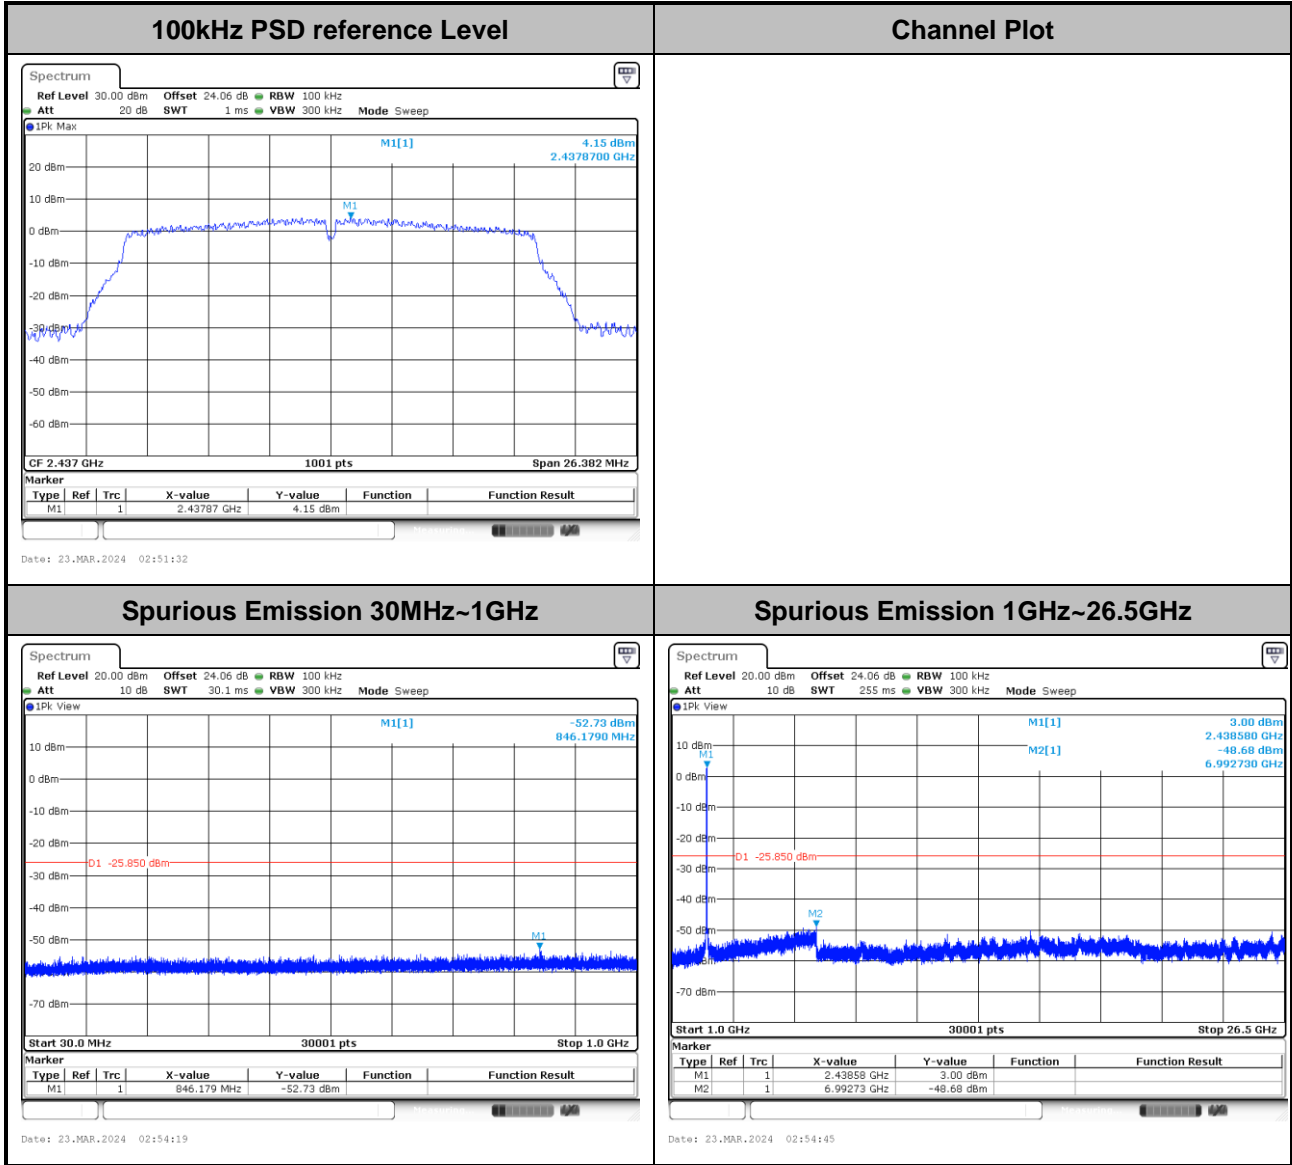



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

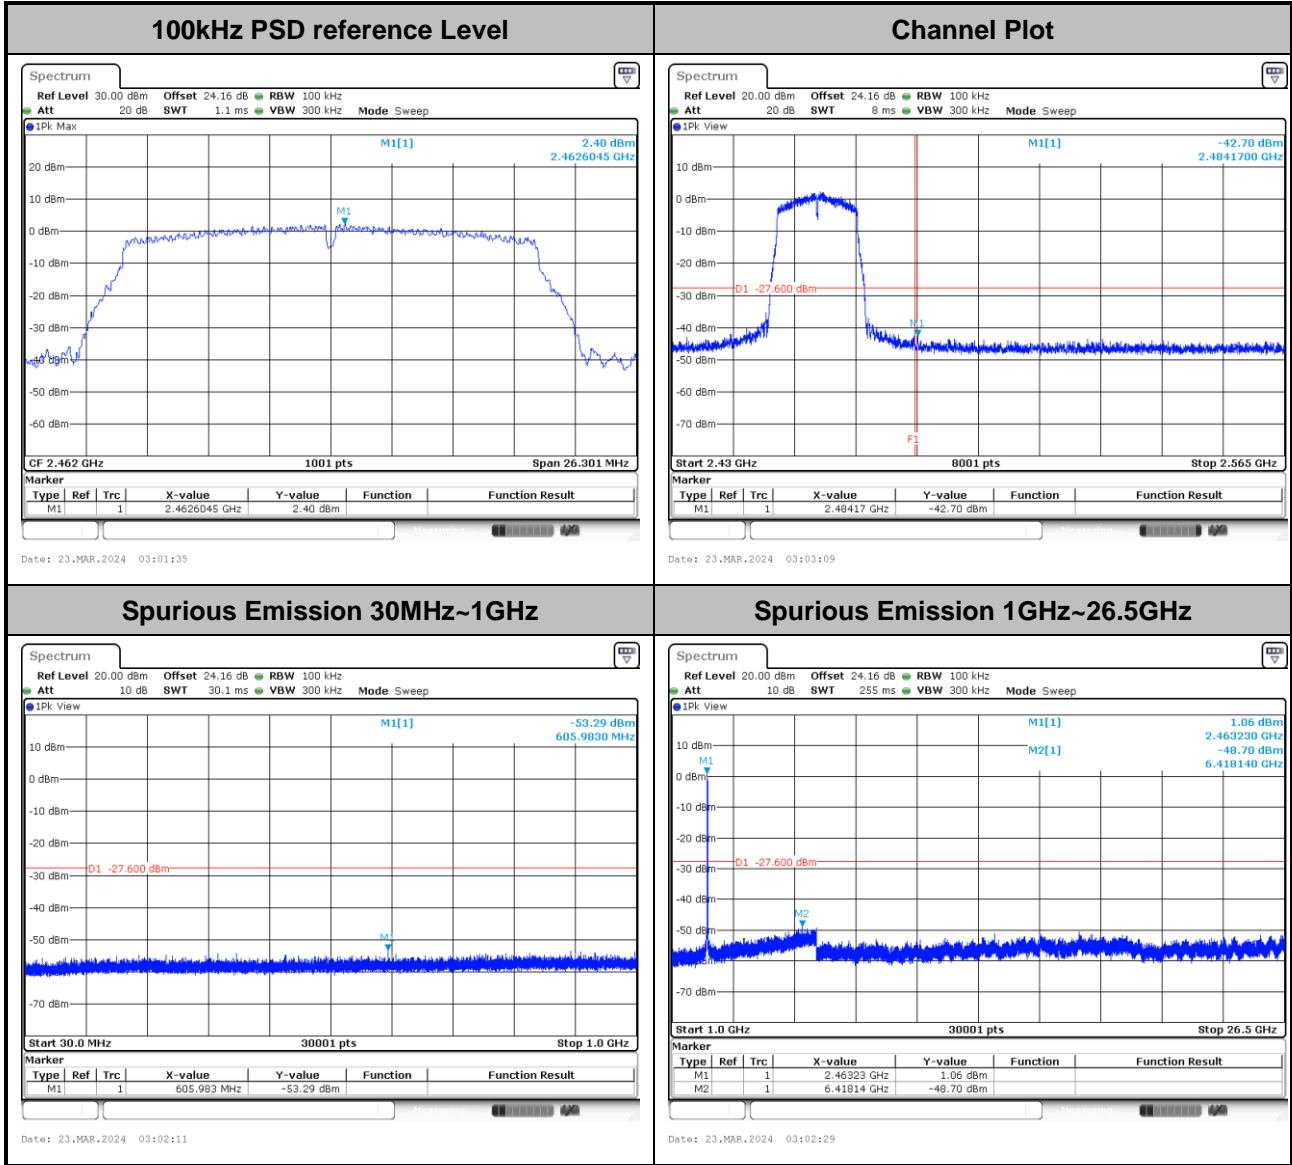




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	18.5~22.7°C
		Relative Humidity :	43.3~48.7%

## EUT Information

Report NO : 413008  
 Test Mode : Mode 4  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

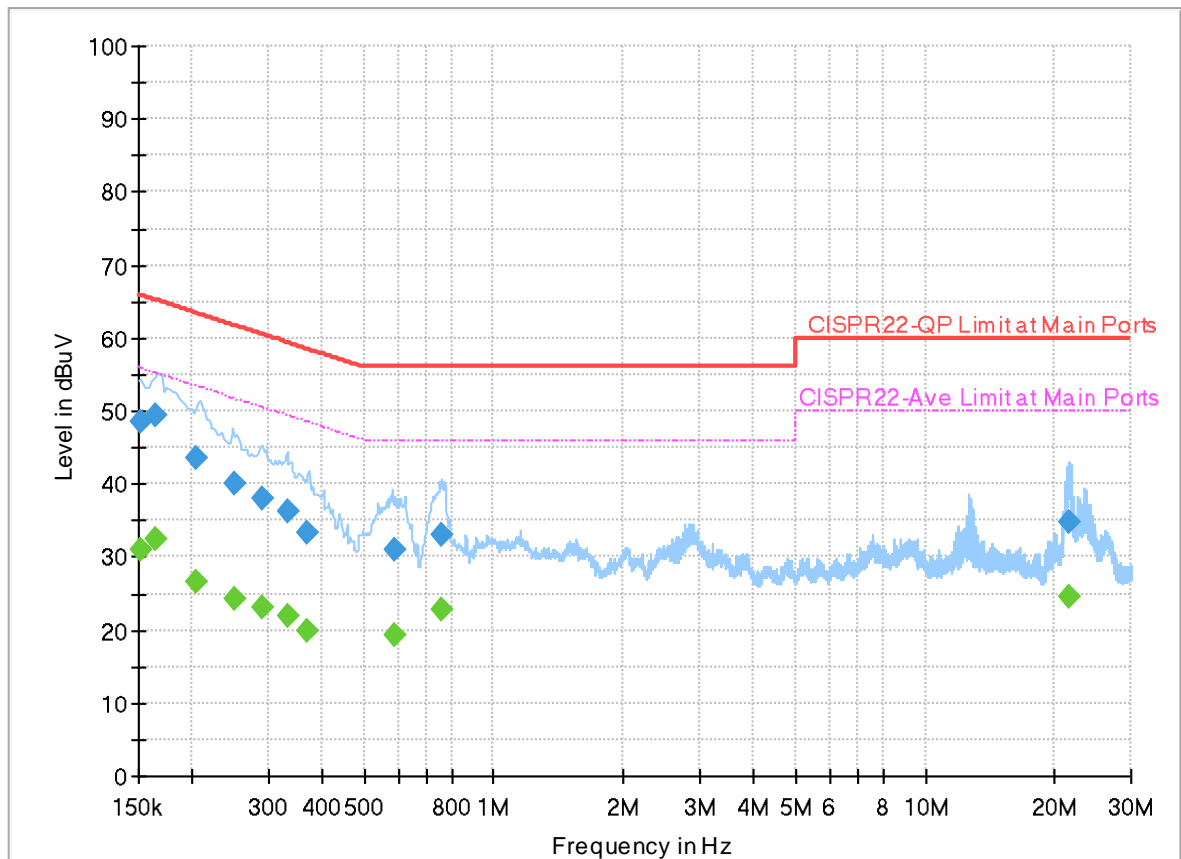

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.151755	---	30.88	55.90	25.02	L1	OFF	19.9
0.151755	48.64	---	65.90	17.26	L1	OFF	19.9
0.163860	---	32.54	55.27	22.73	L1	OFF	19.9
0.163860	49.35	---	65.27	15.92	L1	OFF	19.9
0.204000	---	26.63	53.45	26.82	L1	OFF	19.9
0.204000	43.69	---	63.45	19.76	L1	OFF	19.9
0.249450	---	24.25	51.78	27.53	L1	OFF	19.9
0.249450	40.02	---	61.78	21.76	L1	OFF	19.9
0.289320	---	23.09	50.54	27.45	L1	OFF	19.9
0.289320	38.07	---	60.54	22.47	L1	OFF	19.9
0.331260	---	21.83	49.42	27.59	L1	OFF	19.9
0.331260	36.40	---	59.42	23.02	L1	OFF	19.9
0.369330	---	19.93	48.52	28.59	L1	OFF	19.9
0.369330	33.31	---	58.52	25.21	L1	OFF	19.9
0.586500	---	19.23	46.00	26.77	L1	OFF	19.9
0.586500	30.86	---	56.00	25.14	L1	OFF	19.9
0.753000	---	22.79	46.00	23.21	L1	OFF	19.9
0.753000	32.92	---	56.00	23.08	L1	OFF	19.9
21.540750	---	24.59	50.00	25.41	L1	OFF	20.1

21.540750	34.87	---	60.00	25.13	L1	OFF	20.1
-----------	-------	-----	-------	-------	----	-----	------

# EUT Information

Report NO : 413008  
 Test Mode : Mode 4  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

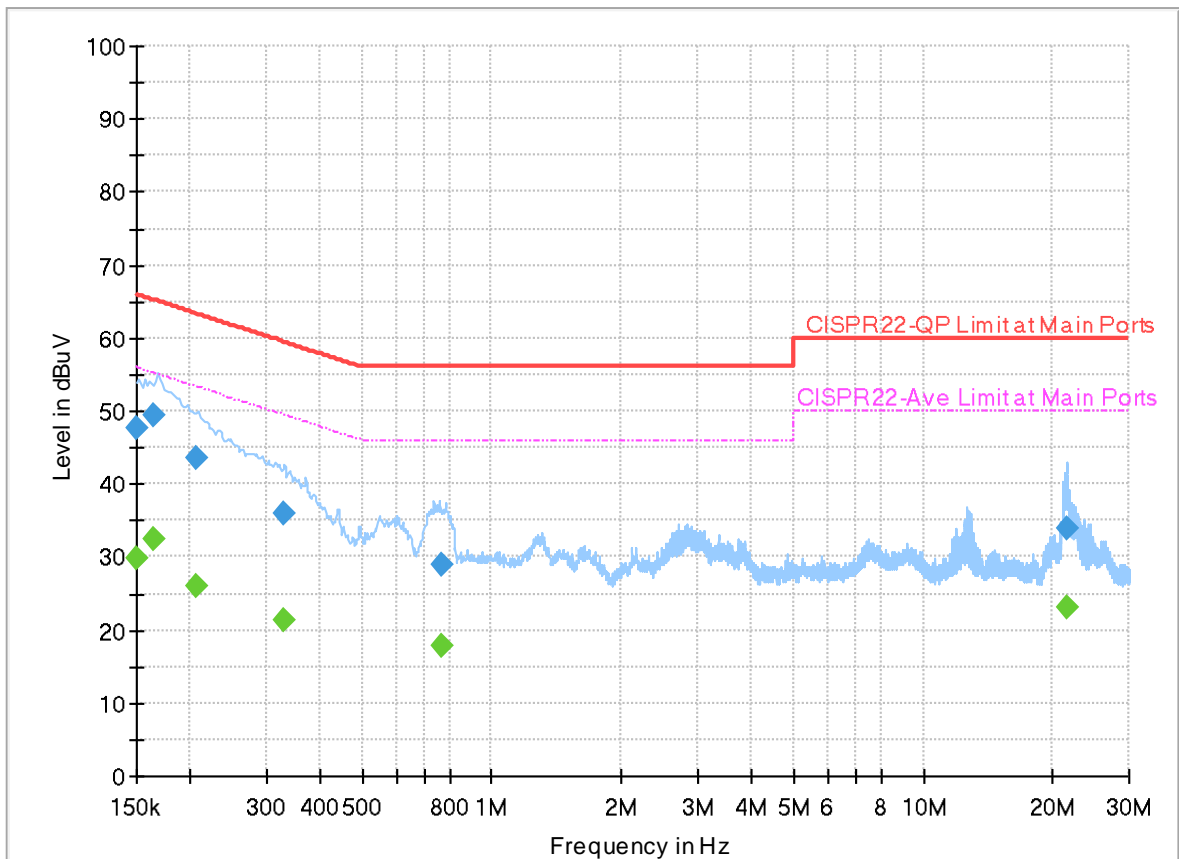

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	29.89	56.00	26.11	N	OFF	19.9
0.150000	47.56	---	66.00	18.44	N	OFF	19.9
0.163500	---	32.59	55.28	22.69	N	OFF	19.9
0.163500	49.42	---	65.28	15.86	N	OFF	19.9
0.207240	---	26.15	53.32	27.17	N	OFF	19.9
0.207240	43.46	---	63.32	19.86	N	OFF	19.9
0.328020	---	21.26	49.50	28.24	N	OFF	19.9
0.328020	36.07	---	59.50	23.43	N	OFF	19.9
0.762000	---	17.92	46.00	28.08	N	OFF	19.9
0.762000	28.90	---	56.00	27.10	N	OFF	19.9
21.438960	---	23.17	50.00	26.83	N	OFF	20.2
21.438960	33.97	---	60.00	26.03	N	OFF	20.2





### Appendix C. Radiated Spurious Emission

Test Engineer :	Fu Chen, Sam Chou and Troye Hsieh	Temperature :	18.9~21.8°C
		Relative Humidity :	42.5~65.8%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11b CH 01 2412MHz		2380.035	53.26	-20.74	74	43.95	27.4	16.71	34.8	134	139	P	H	
		2390	43.39	-10.61	54	33.98	27.5	16.71	34.8	134	139	A	H	
	*	2412	113.12	-	-	103.68	27.5	16.74	34.8	134	139	P	H	
	*	2412	110.06	-	-	100.62	27.5	16.74	34.8	134	139	A	H	
													H	
														H
			2383.08	51.51	-22.49	74	42.17	27.43	16.71	34.8	388	256	P	V
			2390	40.82	-13.18	54	31.41	27.5	16.71	34.8	388	256	A	V
	*		2412	107.76	-	-	98.32	27.5	16.74	34.8	388	256	P	V
	*		2412	104.71	-	-	95.27	27.5	16.74	34.8	388	256	A	V
													V	
													V	
802.11b CH 06 2437MHz		2383.6	51.68	-22.32	74	42.33	27.44	16.71	34.8	109	234	P	H	
		2385.04	41.29	-12.71	54	31.93	27.45	16.71	34.8	109	234	A	H	
	*	2437	113.59	-	-	104.02	27.6	16.77	34.8	109	234	P	H	
	*	2437	110.54	-	-	100.97	27.6	16.77	34.8	109	234	A	H	
			2484.24	54.25	-19.75	74	44.51	27.7	16.84	34.8	109	234	P	H
			2494.48	43.08	-10.92	54	33.32	27.7	16.86	34.8	109	234	A	H
			2386.64	50.91	-23.09	74	41.53	27.47	16.71	34.8	371	159	P	V
			2388.24	40.67	-13.33	54	31.28	27.48	16.71	34.8	371	159	A	V
	*		2437	108.9	-	-	99.33	27.6	16.77	34.8	371	159	P	V
	*		2437	105.8	-	-	96.23	27.6	16.77	34.8	371	159	A	V
			2489.68	51.7	-22.3	74	41.95	27.7	16.85	34.8	371	159	P	V
			2489.6	40.66	-13.34	54	30.91	27.7	16.85	34.8	371	159	A	V



<b>802.11b</b>  <b>CH 11</b>  <b>2462MHz</b>	*	2462	114.21	-	-	104.68	27.52	16.81	34.8	103	232	P	H
	*	2462	111.27	-	-	101.74	27.52	16.81	34.8	103	232	A	H
		2484.12	54.63	-19.37	74	44.89	27.7	16.84	34.8	103	232	P	H
		2483.52	44.59	-9.41	54	34.85	27.7	16.84	34.8	103	232	A	H
													H
													H
	*	2462	106.91	-	-	97.38	27.52	16.81	34.8	400	142	P	V
	*	2462	103.96	-	-	94.43	27.52	16.81	34.8	400	142	A	V
		2490.68	52.39	-21.61	74	42.64	27.7	16.85	34.8	400	142	P	V
		2483.96	41.5	-12.5	54	31.76	27.7	16.84	34.8	400	142	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 01 2412MHz		4824	49.32	-24.68	74	62.78	32.54	11.8	57.8	100	265	P	H	
		4824	46.73	-7.27	54	60.19	32.54	11.8	57.8	100	265	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4824	46.01	-27.99	74	59.47	32.54	11.8	57.8	400	46	P	V
			4824	35.49	-18.51	54	48.95	32.54	11.8	57.8	400	46	A	V
														V
														V
														V
														V
														V
														V
													V	



WiFi Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11b CH 06 2437MHz		4874	49	-25	74	62.31	32.7	11.81	57.82	100	265	P	H
		4874	47.26	-6.74	54	60.57	32.7	11.81	57.82	100	265	A	H
		7311	48.26	-25.74	74	55.08	36.86	14.77	58.45	100	287	P	H
		7311	42.77	-11.23	54	49.59	36.86	14.77	58.45	100	287	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4874	44.52	-29.48	74	57.83	32.7	11.81	57.82	400	44	P	V
		4874	39.08	-14.92	54	52.39	32.7	11.81	57.82	400	44	A	V
		7311	47.34	-26.66	74	54.16	36.86	14.77	58.45	400	71	P	V
		7311	36.99	-17.01	54	43.81	36.86	14.77	58.45	400	71	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11b CH 11 2462MHz		4924	52.33	-21.67	74	65.53	32.84	11.8	57.84	105	299	P	H	
		4924	43.42	-10.58	54	56.62	32.84	11.8	57.84	105	299	A	H	
		7386	45.86	-28.14	74	52.97	36.48	14.83	58.42	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4924	44.05	-29.95	74	57.25	32.84	11.8	57.84	-	-	P	V
			7386	44.86	-29.14	74	51.97	36.48	14.83	58.42	-	-	P	V
														V
														V
														V
														V
														V
														V
														V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11g CH 01 2412MHz		2389.485	65.95	-8.05	74	56.55	27.49	16.71	34.8	113	133	P	H	
		2390	51.6	-2.4	54	42.19	27.5	16.71	34.8	113	133	A	H	
	*	2412	114.59	-	-	105.15	27.5	16.74	34.8	113	133	P	H	
	*	2412	107.04	-	-	97.6	27.5	16.74	34.8	113	133	A	H	
													H	
														H
			2390	60.38	-13.62	74	50.97	27.5	16.71	34.8	400	271	P	V
			2390	47.33	-6.67	54	37.92	27.5	16.71	34.8	400	271	A	V
	*		2412	109.64	-	-	100.2	27.5	16.74	34.8	400	271	P	V
	*		2412	101.7	-	-	92.26	27.5	16.74	34.8	400	271	A	V
														V
														V
802.11g CH 06 2437MHz		2389.84	56.14	-17.86	74	46.73	27.5	16.71	34.8	138	228	P	H	
		2389.68	46.08	-7.92	54	36.67	27.5	16.71	34.8	138	228	A	H	
	*	2437	116.96	-	-	107.39	27.6	16.77	34.8	138	228	P	H	
	*	2437	109.47	-	-	99.9	27.6	16.77	34.8	138	228	A	H	
			2483.52	58.54	-15.46	74	48.8	27.7	16.84	34.8	138	228	P	H
			2483.52	47.94	-6.06	54	38.2	27.7	16.84	34.8	138	228	A	H
			2380.56	52.55	-21.45	74	43.23	27.41	16.71	34.8	361	265	P	V
			2386.96	41.63	-12.37	54	32.25	27.47	16.71	34.8	361	265	A	V
	*		2437	107.36	-	-	97.79	27.6	16.77	34.8	361	265	P	V
	*		2437	99.5	-	-	89.93	27.6	16.77	34.8	361	265	A	V
			2485.92	54.11	-19.89	74	44.37	27.7	16.84	34.8	361	265	P	V
			2484.96	42.81	-11.19	54	33.07	27.7	16.84	34.8	361	265	A	V



<b>802.11g CH 11 2462MHz</b>	*	2462	114.77	-	-	105.24	27.52	16.81	34.8	100	241	P	H
	*	2462	107.07	-	-	97.54	27.52	16.81	34.8	100	241	A	H
		2484.8	65.55	-8.45	74	55.81	27.7	16.84	34.8	100	241	P	H
		2484	51.59	-2.41	54	41.85	27.7	16.84	34.8	100	241	A	H
													H
													H
	*	2462	107.25	-	-	97.72	27.52	16.81	34.8	369	256	P	V
	*	2462	98.9	-	-	89.37	27.52	16.81	34.8	369	256	A	V
		2484.36	58.83	-15.17	74	49.09	27.7	16.84	34.8	369	256	P	V
		2483.68	45.91	-8.09	54	36.17	27.7	16.84	34.8	369	256	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	47.24	-26.76	74	60.7	32.54	11.8	57.8	100	289	P	H
		4824	40.78	-13.22	54	54.24	32.54	11.8	57.8	100	289	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4824	41.75	-32.25	74	55.21	32.54	11.8	57.8	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V





WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 06 2437MHz		4874	50.91	-23.09	74	64.22	32.7	11.81	57.82	100	263	P	H
		4874	45.98	-8.02	54	59.29	32.7	11.81	57.82	100	263	A	H
		7311	50.49	-23.51	74	57.31	36.86	14.77	58.45	100	122	P	H
		7311	42.05	-11.95	54	48.87	36.86	14.77	58.45	100	122	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4874	43.05	-30.95	74	56.36	32.7	11.81	57.82	-	-	P
		7311	46.65	-27.35	74	53.47	36.86	14.77	58.45	100	276	P	V
		7311	37.55	-16.45	54	44.37	36.86	14.77	58.45	100	276	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11g CH 11 2462MHz		4924	51.52	-22.48	74	64.72	32.84	11.8	57.84	100	257	P	H	
		4924	42	-12	54	55.2	32.84	11.8	57.84	100	257	A	H	
		7386	47.64	-26.36	74	54.75	36.48	14.83	58.42	100	214	P	H	
		7386	40.75	-13.25	54	47.86	36.48	14.83	58.42	100	214	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4924	43.51	-30.49	74	56.71	32.84	11.8	57.84	100	271	P	V
			4924	34.04	-19.96	54	47.24	32.84	11.8	57.84	100	271	A	V
			7386	43.97	-30.03	74	51.08	36.48	14.83	58.42	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 01 2412MHz		2389.485	67.75	-6.25	74	63.36	27.49	11.7	34.8	128	306	P	H	
		2389.8	51.31	-2.69	54	46.91	27.5	11.7	34.8	128	306	A	H	
	*	2412	109.94	-	-	105.54	27.5	11.7	34.8	128	306	P	H	
	*	2412	102.09	-	-	97.69	27.5	11.7	34.8	128	306	A	H	
													H	
														H
			2388.12	62.49	-11.51	74	58.11	27.48	11.7	34.8	400	279	P	V
			2389.065	46.1	-7.9	54	41.71	27.49	11.7	34.8	400	279	A	V
		*	2412	105.67	-	-	101.27	27.5	11.7	34.8	400	279	P	V
		*	2412	97.17	-	-	92.77	27.5	11.7	34.8	400	279	A	V
													V	
													V	
802.11n HT20 CH 06 2437MHz		2390	56.77	-17.23	74	47.36	27.5	16.71	34.8	100	239	P	H	
		2389.36	45.8	-8.2	54	36.4	27.49	16.71	34.8	100	239	A	H	
		*	2437	116.03	-	-	106.46	27.6	16.77	34.8	100	239	P	H
		*	2437	108.44	-	-	98.87	27.6	16.77	34.8	100	239	A	H
			2493.84	58.13	-15.87	74	48.37	27.7	16.86	34.8	100	239	P	H
			2483.68	47.35	-6.65	54	37.61	27.7	16.84	34.8	100	239	A	H
			2381.36	52.43	-21.57	74	43.11	27.41	16.71	34.8	371	269	P	V
			2390	41.68	-12.32	54	32.27	27.5	16.71	34.8	371	269	A	V
		*	2437	107.78	-	-	98.21	27.6	16.77	34.8	371	269	P	V
		*	2437	100.36	-	-	90.79	27.6	16.77	34.8	371	269	A	V
		2489.44	53.94	-20.06	74	44.19	27.7	16.85	34.8	371	269	P	V	
		2483.6	43.35	-10.65	54	33.61	27.7	16.84	34.8	371	269	A	V	



<b>802.11n</b> <b>HT20</b> <b>CH 11</b> <b>2462MHz</b>	*	2462	114.2	-	-	104.67	27.52	16.81	34.8	100	240	P	H
	*	2462	106.34	-	-	96.81	27.52	16.81	34.8	100	240	A	H
		2483.96	65.93	-8.07	74	56.19	27.7	16.84	34.8	100	240	P	H
		2483.68	51.67	-2.33	54	41.93	27.7	16.84	34.8	100	240	A	H
													H
													H
	*	2462	106.02	-	-	96.49	27.52	16.81	34.8	368	260	P	V
	*	2462	97.9	-	-	88.37	27.52	16.81	34.8	368	260	A	V
		2483.84	59.66	-14.34	74	49.92	27.7	16.84	34.8	368	260	P	V
		2483.56	45.63	-8.37	54	35.89	27.7	16.84	34.8	368	260	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 01 2412MHz		4824	52.39	-21.61	74	65.85	32.54	11.8	57.8	119	270	P	H	
		4824	42.14	-11.86	54	55.6	32.54	11.8	57.8	119	270	A	H	
													H	
													H	
													H	
													H	
														H
			4824	41.95	-32.05	74	55.41	32.54	11.8	57.8	-	-	P	V
														V
														V



WiFi Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 06 2437MHz		4874	49.8	-24.2	74	63.11	32.7	11.81	57.82	100	271	P	H	
		4874	42.15	-11.85	54	55.46	32.7	11.81	57.82	100	271	A	H	
		7311	52.28	-21.72	74	59.1	36.86	14.77	58.45	100	215	P	H	
		7311	42.42	-11.58	54	49.24	36.86	14.77	58.45	100	215	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4874	43.22	-30.78	74	56.53	32.7	11.81	57.82	100	236	P	V
			4874	34.86	-19.14	54	48.17	32.7	11.81	57.82	100	236	A	V
			7311	46.21	-27.79	74	53.03	36.86	14.77	58.45	103	89	P	V
			7311	38.44	-15.56	54	45.26	36.86	14.77	58.45	103	89	A	V
														V
														V
														V
													V	
													V	
													V	



WiFi Ant. 1+2	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 11 2462MHz		4924	50.15	-23.85	74	63.35	32.84	11.8	57.84	100	253	P	H	
		4924	41.02	-12.98	54	54.22	32.84	11.8	57.84	100	253	A	H	
		7386	48.5	-25.5	74	55.61	36.48	14.83	58.42	100	213	P	H	
		7386	41.38	-12.62	54	48.49	36.48	14.83	58.42	100	213	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4924	42.78	-31.22	74	55.98	32.84	11.8	57.84	100	273	P	V
			4924	34.79	-19.21	54	47.99	32.84	11.8	57.84	100	273	A	V
			7386	41.29	-32.71	74	48.4	36.48	14.83	58.42	213	100	P	V
			7386	37.23	-16.77	54	44.34	36.48	14.83	58.42	213	100	A	V
														V
														V
														V
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Emission above 18GHz  
2.4GHz WIFI 802.11b (SHF)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11b SHF		24958	38.95	-35.05	74	35.29	39.27	17.71	53.32	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24930	39.34	-34.66	74	35.74	39.26	17.67	53.33	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												





**Emission below 1GHz  
2.4GHz WIFI 802.11b (LF)**

<b>WIFI Ant. 1+2</b>	<b>Note</b>	<b>Frequency ( MHz )</b>	<b>Level ( dBµV/m )</b>	<b>Margin ( dB )</b>	<b>Limit Line ( dBµV/m )</b>	<b>Read Level ( dBµV )</b>	<b>Antenna Factor ( dB/m )</b>	<b>Path Loss ( dB )</b>	<b>Preamp Factor ( dB )</b>	<b>Ant Pos ( cm )</b>	<b>Table Pos ( deg )</b>	<b>Peak Avg. ( P/A )</b>	<b>Pol. ( H/V )</b>
	1	54.03	27.13	-12.87	40	45.89	12.63	0.78	32.17	-	-	P	H
	2	64.29	25.34	-14.66	40	44.83	11.74	0.88	32.11	-	-	P	H
	3	204.42	35.39	-8.11	43.5	50.92	14.9	1.91	32.34	-	-	P	H
	4	370.7	31.52	-14.48	46	39.84	20.7	2.65	31.67	-	-	P	H
	5	477.8	33.63	-12.37	46	39.47	23.44	3.02	32.3	-	-	P	H
	6	665.4	35.73	-10.27	46	37.53	26.36	3.67	31.83	100	287	Q	H
													H
													H
													H
													H
													H
													H
<b>2.4GHz 802.11b LF</b>	1	40.53	33.27	-6.73	40	45.72	19.21	0.66	32.32	-	-	P	V
	2	125.85	27.36	-16.14	43.5	40.66	17.4	1.42	32.12	-	-	P	V
	3	208.2	34.29	-9.21	43.5	49.66	15.03	1.93	32.33	-	-	P	V
	4	666.1	35.35	-10.65	46	37.14	26.37	3.67	31.83	100	227	Q	V
	5	831.3	33.54	-12.46	46	32.82	28.2	4.12	31.6	-	-	P	V
	6	975.5	36.82	-17.18	54	31.92	31	4.59	30.69	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against limit line.</li> <li>3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>Margin</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Margin(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Margin(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots





Test Engineer :	Fu Chen, Sam Chou and Troye Hsieh	Temperature :	18.9~21.8°C
		Relative Humidity :	42.5~65.8%

### Note symbol

-L	Low channel location
-R	High channel location







**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11b (Band Edge @ 3m)**

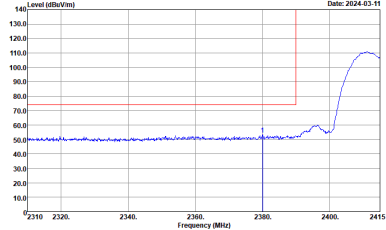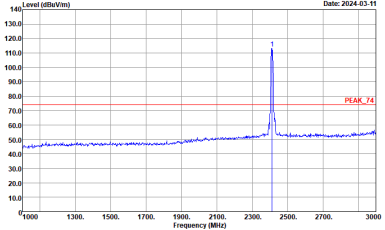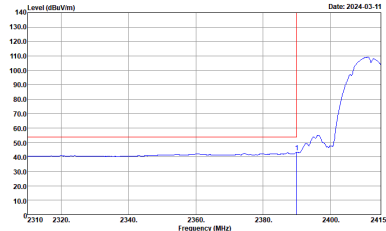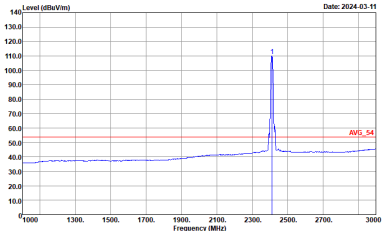WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
<b>Avg.</b>	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	<p>Vertical Peak Spectrum Plot showing Level (dBm/100kHz) vs Frequency (MHz) from 2310 to 2415 MHz. A peak is visible at approximately 2412 MHz. The plot includes a red horizontal line indicating the peak level and a blue trace showing the spectrum. The date is 2024-03-11.</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Fundamental Peak Spectrum Plot showing Level (dBm/100kHz) vs Frequency (MHz) from 1000 to 3000 MHz. A sharp peak is visible at approximately 2412 MHz. The plot includes a red horizontal line indicating the peak level and a blue trace showing the spectrum. The date is 2024-03-11.</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Vertical Avg. Spectrum Plot showing Level (dBm/100kHz) vs Frequency (MHz) from 2310 to 2415 MHz. The plot shows the average spectrum with a red horizontal line indicating the average level and a blue trace showing the spectrum. The date is 2024-03-11.</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Fundamental Avg. Spectrum Plot showing Level (dBm/100kHz) vs Frequency (MHz) from 1000 to 3000 MHz. The plot shows the average spectrum with a red horizontal line indicating the average level and a blue trace showing the spectrum. The date is 2024-03-11.</p> <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

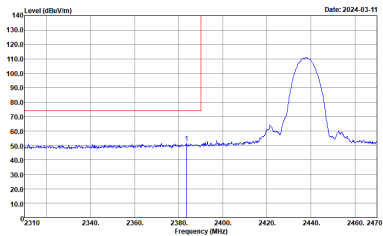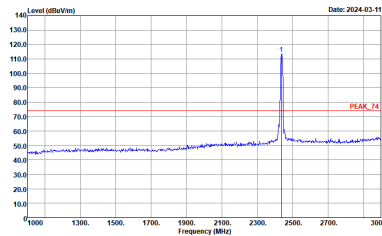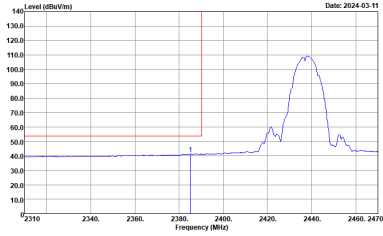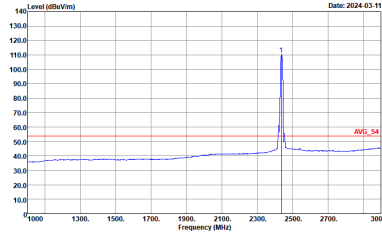

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	Left blank









WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	Left blank

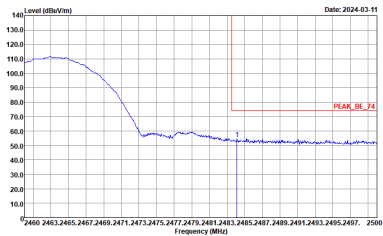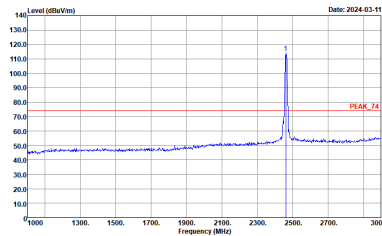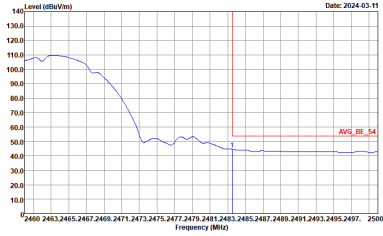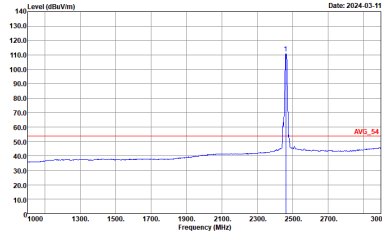

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

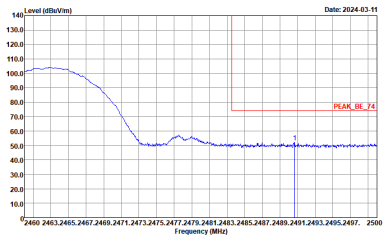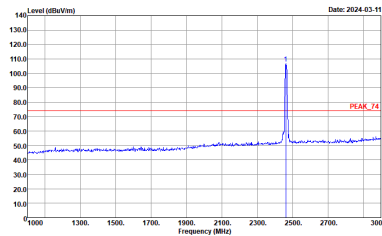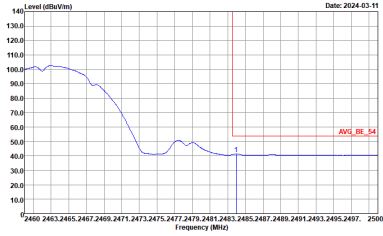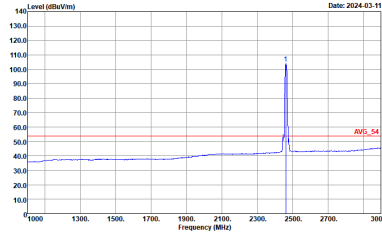

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1+2	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot for Vertical Peak. The plot shows a signal level starting at approximately 100 dBm/100kHz at 2400 MHz and decreasing to about 50 dBm/100kHz at 2462 MHz. A red vertical line marks the peak at 2462 MHz, labeled 'PEAK_BE_74'. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m 91200_01620_230817 VERTICAL                          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a sharp peak at 2462 MHz with a level of approximately 110 dBm/100kHz. A red vertical line marks the peak, labeled 'PEAK_74'. The x-axis ranges from 2450 to 2470 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m 91200_01620_230817 VERTICAL                          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot for Vertical Avg. The plot shows the average signal level across the band, with a red vertical line at 2462 MHz labeled 'AVG_BE_54'. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m 91200_01620_230817 VERTICAL                          : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot for Fundamental Avg. The plot shows the average signal level for the fundamental component, with a red vertical line at 2462 MHz labeled 'AVG_54'. The x-axis ranges from 2450 to 2470 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m 91200_01620_230817 VERTICAL                          : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>







**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Band Edge @ 3m)**

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
<b>Avg.</b>	<p>Site : 03CH11-HY            Condition : AVG_BE_54 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Site : 03CH11-HY            Condition : AVG_54 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	<p>Level (dBm/100kHz) vs Frequency (MHz) for Vertical Peak. The plot shows a signal level rising from approximately 50 dBm/100kHz at 2380 MHz to about 100 dBm/100kHz at 2415 MHz. A red vertical line marks the peak at 2412 MHz.</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Level (dBm/100kHz) vs Frequency (MHz) for Fundamental Peak. The plot shows a sharp peak at 2412 MHz with a level of approximately 110 dBm/100kHz. A red horizontal line labeled 'PEAK_74' is at the peak level.</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
	Avg.	<p>Level (dBm/100kHz) vs Frequency (MHz) for Vertical Avg. The plot shows a signal level rising from approximately 40 dBm/100kHz at 2380 MHz to about 90 dBm/100kHz at 2415 MHz. A red vertical line marks the peak at 2412 MHz.</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

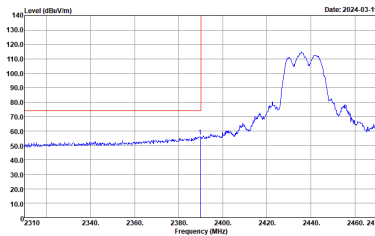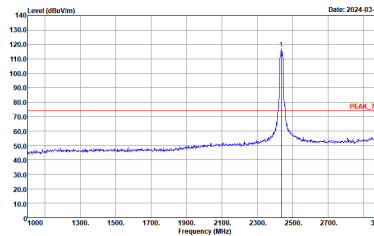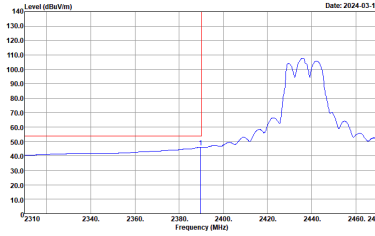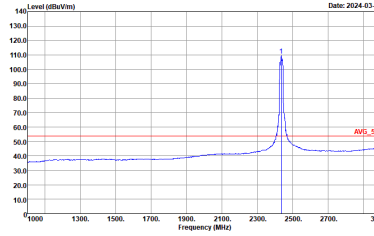





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

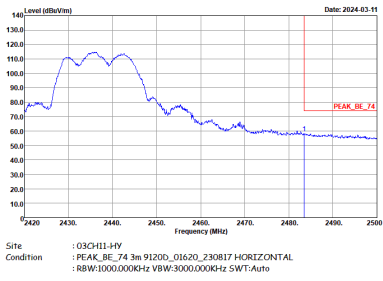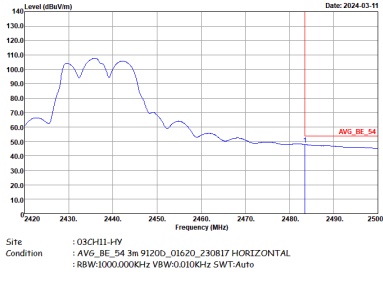



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	Left blank



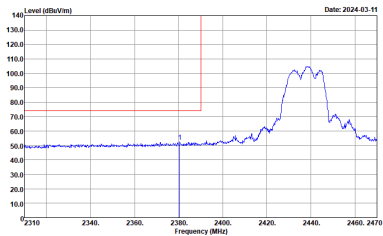
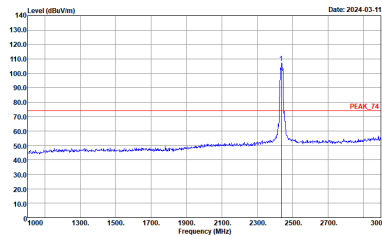
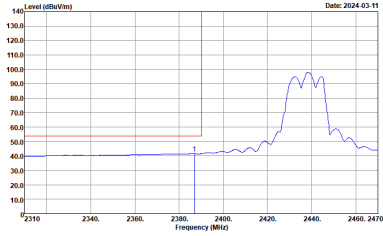
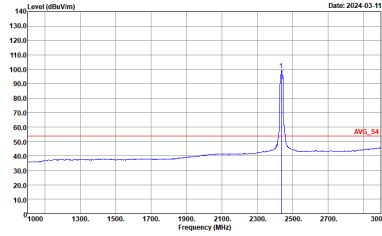


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



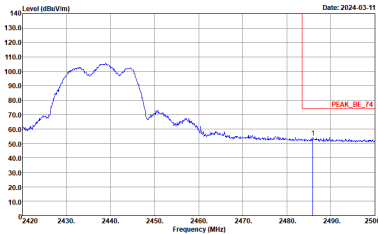
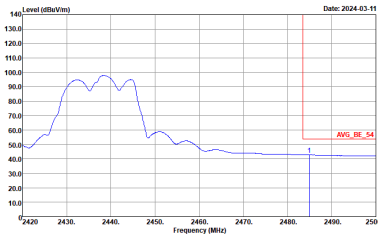


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1+2	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CHI1-HY Condition : PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left Blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CHI1-HY Condition : AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Left Blank</p>

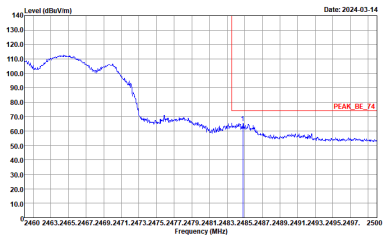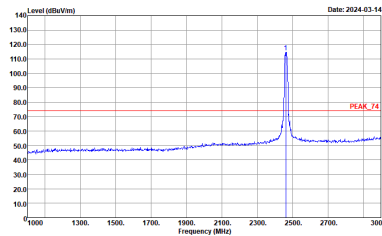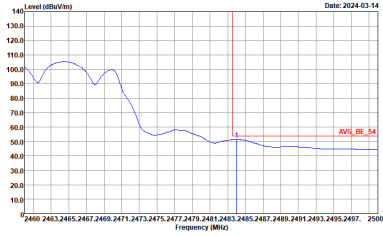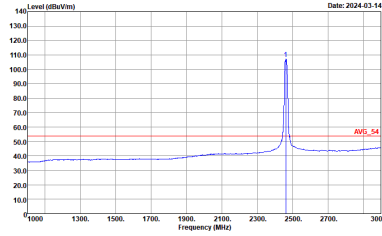

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

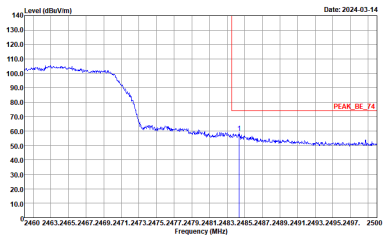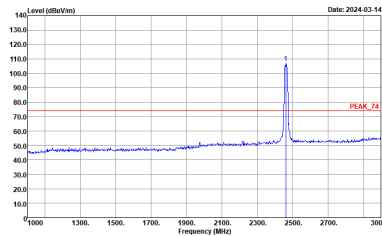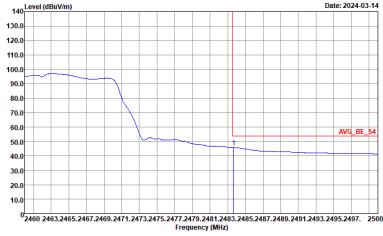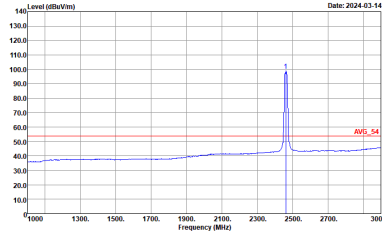

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_01620_230817 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 4 columns: WIFI, ANT, 1+2, and two sub-columns for Horizontal and Fundamental. Rows are labeled Peak and Avg. Each cell contains a spectral plot and technical details like Site, Condition, and measurement parameters.