


FCC SAR Test Report

<Photographs of EUT>

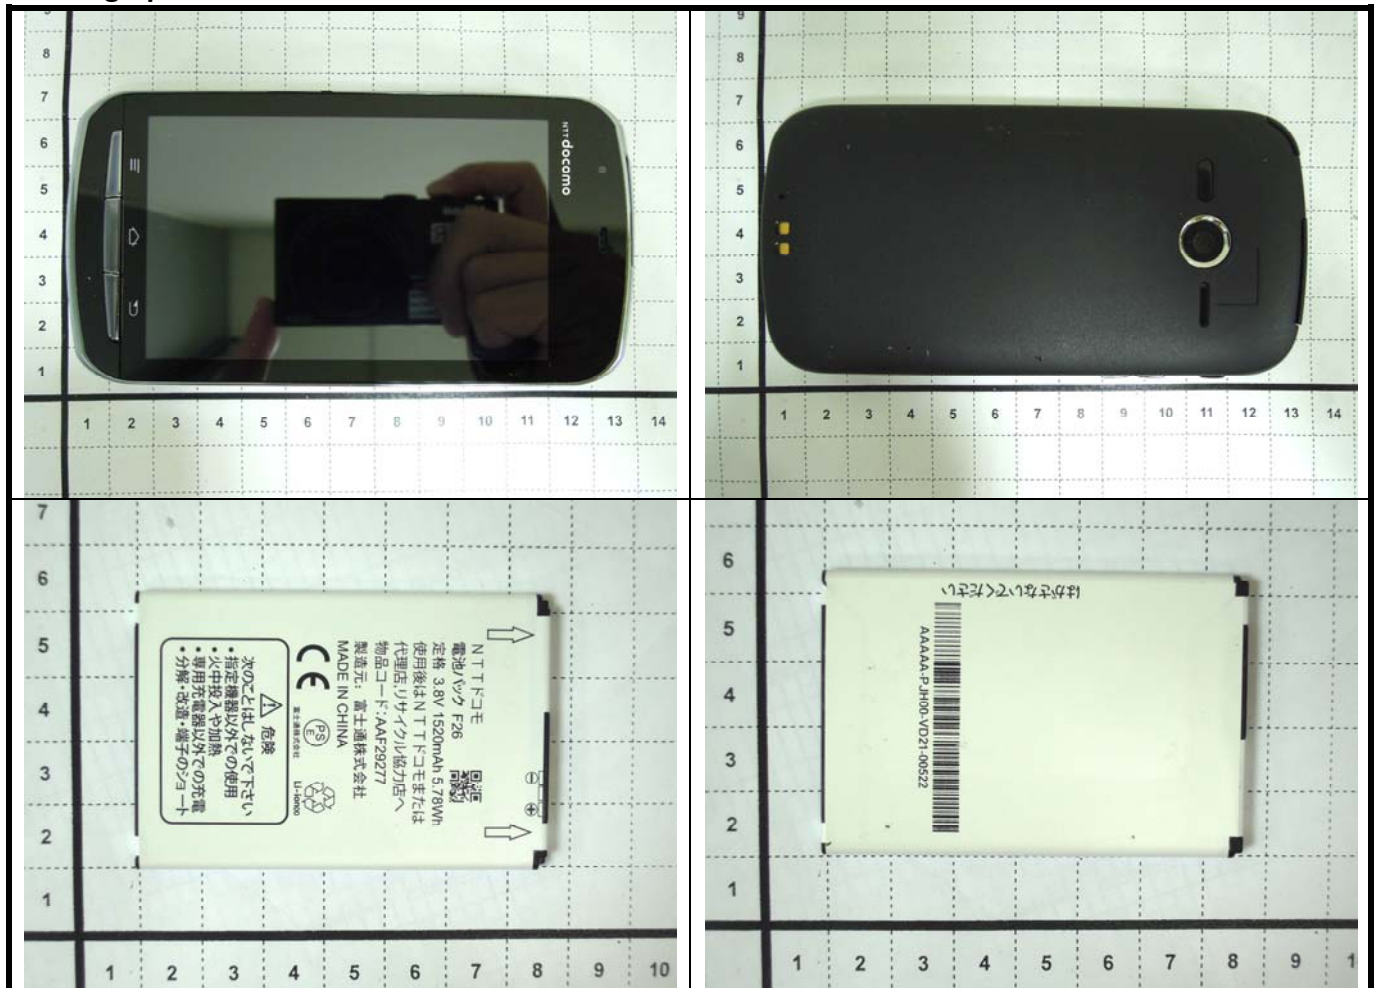

FCC SAR Test Report

<Location of Antennas>



This device supports WiFi hotspot function, so body SAR was tested under 1 cm for the surfaces / slide edges where a transmitting antenna is within 2.5 cm from the edge. Since the SAR is required for antenna located within 2.5 cm from edge, SAR testing for each antenna is listed as below.

WWAN Ant.: Front Face, Rear Face, Left Side, Right Side, Bottom Side


WLAN Ant.: Front Face, Rear Face, Left Side, Top Side

FCC SAR Test Report

<Photographs of SAR Setup>




Right Cheek

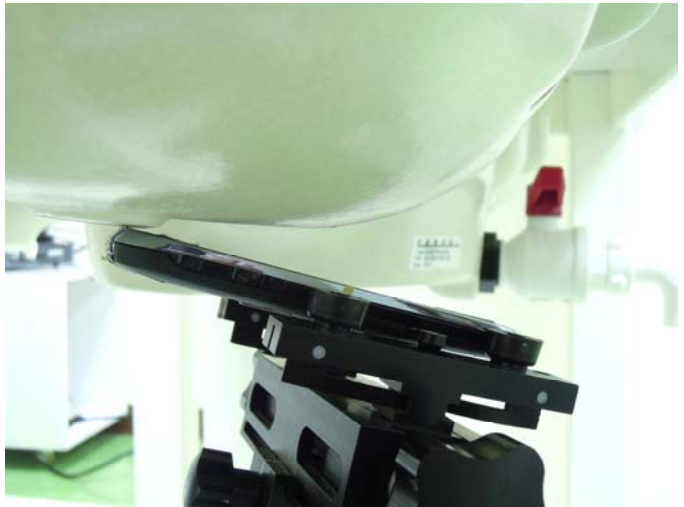

Right Tilted



Left Cheek

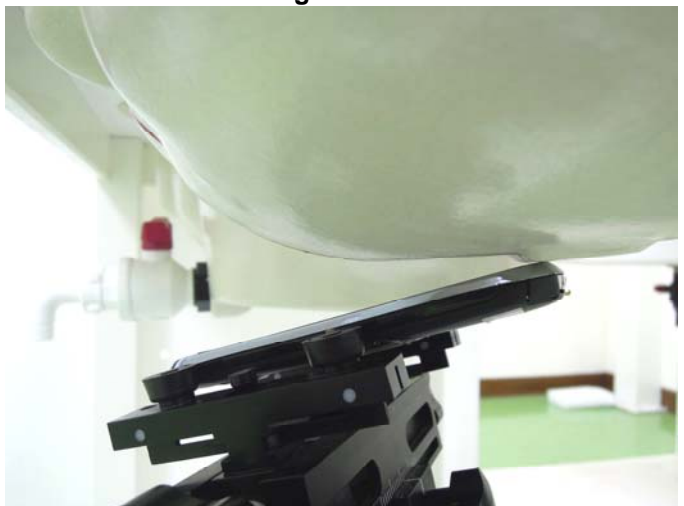

Left Tilted

FCC SAR Test Report



**Front Face of DUT with 1 cm Gap
(Body Worn Mode)**



**Rear Face of DUT with 1 cm Gap
(Body Worn Mode)**



**Front Face of DUT with 1 cm Gap
(Hotspot Mode)**



**Rear Face of DUT with 1 cm Gap
(Hotspot Mode)**

FCC SAR Test Report



Left Side of DUT with 1 cm Gap
(Hotspot Mode)



Right Side of DUT with 1 cm Gap
(Hotspot Mode)



Top of DUT with 1 cm Gap
(Hotspot Mode)



Bottom of DUT with 1 cm Gap
(Hotspot Mode)