

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

OF

	OF		
Product Name:	MID		
Brand Name:	Quanta Computer		
Model No. (FCC):	K72** (* Can be 0~9, A~Z or blank)		
Model No. (IC):	K72A		
Model Difference:	For marketing purpose		
FCC ID:	HFS-K72A		
IC:	1787B-K72A		
Report No.:	E2/2015/C0051		
Issue Date:	Jan. 11, 2016		
FCC Rule Part:	§15.247, Cat: DTS		
IC Rule Part:	RSS-247 issue 1 :2015		
	Quanta Computer Inc.		
Prepared for:	No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan		
	SGS Taiwan Ltd.		
Prepared by:	Electronics & Communication Laboratory		
riepared by.	No.2, Keji 1st Rd., Guishan District,		
	Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS		
Testing Laboratory 0513	Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1

Contention is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



VERIFICATION OF COMPLIANCE

Applicant:	Quanta Computer Inc. No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City 33377,
	Taiwan
Product Name:	MID
Brand Name:	Quanta Computer
Model No. (FCC):	K72** (* Can be 0~9, A~Z or blank)
Model No. (IC):	K72A
Model Difference:	For marketing purpose
FCC ID:	HFS-K72A
IC:	1787B-K72A
Report Number:	E2/2015/C0051
Date of test:	Dec. 15, 2015 ~ Jan. 11, 2016
Date of EUT Received:	Dec. 15, 2015

We hereby certify that:

Unless 除非另

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jerry	Ľu	Date:	Jan. 11, 2016
	Jerry Lu / Eng	gineer		
Prepared By:	Tiffany	Kao	Date:	Jan. 11, 2016
	Tiffany Kao /	Clerk	-	
Approved By:	Jim a	hang	Date:	Jan. 11, 2016
	Jim Chang / Asst	Manager		
有說明,此報告結果僅對測試之 樣	wn in this test report refer only to the sampl &品負責,同時此樣品僅保留90天。本報告オ ny subject to its General Conditions of Servi	、經本公司書面許可,不可音	『份複製。	r 90 days only. cessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for e

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is avised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is and sunder the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市 五股區 新北產業園 區 五工路 134 號



Revision History

Report Number	Revision	Description	Issue Date
E2/2015/C0051	Rev.00	Initial creation of document	Jan. 11, 2016

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Table of Contents

1	GEN	ERAL INFORMATION	6
	1.1	Product Description	6
	1.2	Product Feature of Equipment Under Test	7
	1.3	Test Methodology of Applied Standards	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2	SYS	TEM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	
	2.3	Test Procedure	9
	2.4	Measurement Results Explanation Example	9
	2.5	Configuration of Tested System	10
3	SUM	MARY OF TEST RESULTS	11
4	DES	CRIPTION OF TEST MODES	
	4.1	Operated in 2400 ~ 2483.5MHz Band	11
	4.2	The Worst Test Modes and Channel Details	12
5	MEA	SUREMENT UNCERTAINTY	13
5 6		SUREMENT UNCERTAINTY DUCTED EMISSION TEST	
		DUCTED EMISSION TESTStandard Applicable:	 14 14
	CON	DUCTED EMISSION TEST	 14 14
	CON 6.1	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup:	 14 14 14 14
	CON 6.1 6.2	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup: Test SET-UP (Block Diagram of Configuration)	 14 14 14 14 15
	CON 6.1 6.2 6.3	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup: Test SET-UP (Block Diagram of Configuration) Measurement Procedure:	 14 14 14 14 15 15
	CON 6.1 6.2 6.3 6.4	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup: Test SET-UP (Block Diagram of Configuration)	 14 14 14 14 15 15
	CON 6.1 6.2 6.3 6.4 6.5 6.6	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup: Test SET-UP (Block Diagram of Configuration) Measurement Procedure:	14 14 14 14 15 15 15
6	CON 6.1 6.2 6.3 6.4 6.5 6.6	DUCTED EMISSION TEST	14 14 14 15 15 15 15 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEA	DUCTED EMISSION TEST	14 14 14 15 15 15 15 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEA 7.1	DUCTED EMISSION TEST	14 14 14 14 15 15 15 15 18 18 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEA 7.1 7.2	DUCTED EMISSION TEST	14 14 14 14 15 15 15 15 15 18 18 18 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEA 7.1 7.2 7.3	DUCTED EMISSION TEST	14 14 14 14 15 15 15 15 15 18 18 18 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEA 7.1 7.2 7.3 7.4 7.5	DUCTED EMISSION TEST	14 14 14 14 15 15 15 15 18 18 18 18 19 20



	8.2	Measurement Equipment Used	21
	8.3	Test Set-up:	21
	8.4	Measurement Procedure:	22
	8.5	Measurement Result:	22
9	CON	DUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	27
	9.1	Standard Applicable	27
	9.2	Measurement Equipment Used:	27
	9.3	Test SET-UP:	27
	9.4	Measurement Procedure	28
	9.5	Measurement Result	28
10	RADI	ATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	33
	10.1	Standard Applicable	33
	10.2	Measurement Equipment Used	34
	10.3	Test SET-UP	35
	10.4	Measurement Procedure	36
	10.5	Field Strength Calculation	37
	10.6	Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz	37
	10.7	Measurement Result:	37
11	PEAK	(POWER SPECTRAL DENSITY	52
	11.1	Standard Applicable:	52
	11.2	Measurement Equipment Used:	52
	11.3	Test Set-up:	52
	11.4	Measurement Procedure:	52
	11.5	Measurement Result:	53
12	ANTE	INNA REQUIREMENT	56
	12.1	Standard Applicable:	56
	12.2	Antenna Connected Construction:	56
13	MAXI	MUM PERMISSIBLE EXPOSURE (MPE)(FCC)	57
	13.1	Standard Applicable	57
	13.2	Maximum Permissible Exposure (MPE) Evaluation	
14		MUM PERMISSIBLE EXPOSURE (MPE) (IC)	
	14.1	Standard Applicable:	
	14.2	Maximum Permissible Exposure (MPE) Evaluation	60



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	MID
Brand Name:	Quanta Computer
Model No. (FCC):	K72** (* Can be 0~9, A~Z or blank)
Model No. (IC):	K72A
Model Difference:	For marketing purpose
Product SW/HW version:	B1 / B1
Radio SW/HW version:	v4.3.0_10579.20140221_BTCOEX20140110-4940 / v01
Test SW Version:	N/A
RF power setting in TEST SW:	N/A
Power Supply:	100~240V from AC power cord

Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V4.0 dual mode
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	4.13dBm
Antenna Designation:	PIFA Antenna, Antenna Gain: 2.98dBi Model No.: DQ6WIPB0142, Supplier: Well Green Technology Co., Ltd.



1.2 Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is MID, supporting, Bluetooth with Wi-Fi 802.11bgn feature, and below is details of information.

Product Feature				
Product Name:	MID			
Brand Name:	Quanta Computer			
Model No. (FCC):	K72** (* Can be 0~9, A~Z or blank)			
Model No. (IC):	K72A			
Model Difference:	For marketing purpose			
FCC ID:	HFS-K72A			
IC :	1787B-K72A			
Bluetooth Version	V4.0 dual mode			
Wi-Fi- Specification	802.11b/g/n			
NFC Specification	NFC			

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Test Methodology of Applied Standards 1.3

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance V03r04

ANSI C63.10:2013

Canada RSS-247 issue 1: 2015

Canada RSS-Gen issue 4: 2014

Note:

- 1. All test items have been performed and record as per the above standards.
- 2. The composite system is compliance with FCC Subpart B is authorized under a DoC procedure.

Test Facility 1.4

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan. (TAF code 0513)

FCC Registration Numbers are: 628985

Canada Registration Number: 4620A-5.

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



SYSTEM TEST CONFIGURATION 2

EUT Configuration 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

EUT Exercise 2.2

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz.. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss 2dB and splitter 0dB splitter. Offset = RF cable loss (dB)+ splitter(dB) = 2 + 0 = 2(dB)

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration




Fig. 2- 2 AC Power Line Conducted Emission




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Bran d	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L430	R9-YYG88	shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SUMMARY OF TEST RESULTS 3

FCC Rules / IC Rules	Description Of Test	Result
§15.207(a) RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3) RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2) RSS-247 §5.2 (1) RSS-Gen §6.6	6dB Bandwidth and 99% Power Emission Bandwidth	Compliant
§15.247(d) RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d) RSS-247 §5.5	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e) RSS-247 §5.2(2)	Peak Power Density	Compliant
§15.203 §15.247(b) RSS- Gen §6.7 RSS- Gen §8.3	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402 MHz	14	2430 MHz	28	2458 MHz
1	2404 MHz	15	2432 MHz	29	2460 MHz
2	2406 MHz	16	2434 MHz	30	2462 MHz
3	2408 MHz	17	2436 MHz	31	2464 MHz
4	2410 MHz	18	2438 MHz	32	2466 MHz
5	2412 MHz	19	2440 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Chiven 1 UM 104 WukfuneRoad NewTainel/District NewTain



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE	AVAILABLE CHANNEL	DATA RATE (Mbps)	ANTENNA PORT				
Bluetooth LE	Bluetooth LE 0 to 39 0,20,39 GFSK			1.0	MAIN		
	RADIATED	EMISSION TES	ST (ABOVE 1 GH	z)			
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
Bluetooth LE	0 to 39	0,20,39	GFSK	1.0	MAIN		

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
Bluetooth LE	0 to 39	0,20,39	GFSK	1.0	MAIN		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherWise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty	
AC Power Line Conducted Emission	+/- 2.586 dB	
Peak Output Power	+/- 0.84 dB	
6dB Bandwidth	+/- 51.33 Hz	
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB	
Peak Power Density	+/- 1.3 dB	
Temperature	+/- 0.65 °C	
Humidity	+/- 4.6 %	
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%	

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB		
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB		
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB		
	1GHz - 18GHz: +/- 4.08dB		
	18GHz - 40GHz: +/- 4.08dB		

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CONDUCTED EMISSION TEST 6

6.1 **Standard Applicable:**

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

	Limits					
Frequency range	dB(uV)				
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
Note						
1. The lower limit shall apply at the transition frequencies						
2. The limit decreases linearly wit	2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50					

MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR MODEL		SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2015	12/11/2016		
Coaxial Cables	N/A	N30N30-1042-150 cm	N/A	01/06/2015	01/07/2016		
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016		
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2015	03/03/2016		
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.		

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



6.4 Test SET-UP (Block Diagram of Configuration)

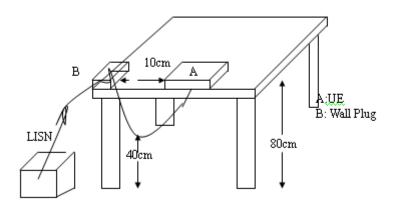

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode: Operation mode Temperature: 26


Test Date: Jan. 05, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Chiven 1 UM 104 WukfuneRoad NewTainel/District NewTain

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



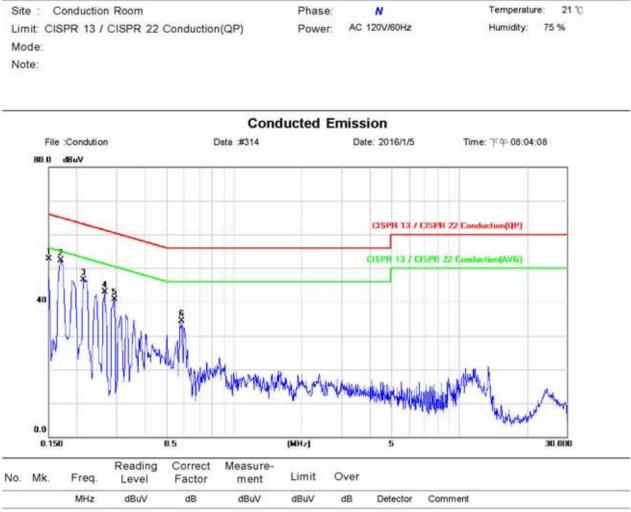

	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.1500	52.60	0.14	52.74	66.00	-13.26	peak		
2 •	0.1700	52.16	0.14	52.30	64.96	-12.66	peak		
3	0.2140	46.44	0.14	46.58	63.05	-16.47	peak		
4	0.2660	42.83	0.16	42.99	61.24	-18.25	peak		
5	0.2940	40.54	0.17	40.71	60.41	-19.70	peak		
6	0.5860	33.94	0.29	34.23	56.00	-21.77	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Chiven 1 UM 104 WukfuneRoad NewTainel/District NewTain



PEAK OUTPUT POWER MEASUREMENT 7

7.1 **Standard Applicable:**

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Measurement Equipment Used: 7.2

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Power Meter	Anritsu	ML2496A	1326001	06/23/2015	06/22/2016		
Power Sensor	Anritsu	MA2411B	1315048	06/23/2015	06/22/2016		
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016		
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016		
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/12/2015	12/11/2016		
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016		

7.3 Test Set-up:



でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna. port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

Duty Factor:

	Duty Cycle	Duty Fator (dB)
Bluetooth LE	64.22%	1.92



Duty Cycle Factor: 10 * log (1/64.62) = 1.92

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5 Measurement Result:

BT4.0 mode:

BLE mode:

СН	Frequency (MHz)	Peak Power Output(dBm)	Required Limit
0	2402	4.02	1 Watt = 30 dBm
20	2442	4.08	1 Watt = 30 dBm
39	2480	4.13	1 Watt = 30 dBm

СН	Frequency (MHz)	Average Power Output(dBm)	Required Limit
0	2402	1.00	1 Watt = 30 dBm
20	2442	1.02	1 Watt = 30 dBm
39	2480	1.21	1 Watt = 30 dBm

*Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter



6dB & 99% BANDWIDTH MEASUREMENT 8

8.1 Standard Applicable


The minimum 6 dB bandwidth shall be at least 500 kHz.

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

8.2 Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT	MENT MFR		SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016				
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016				
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2015	12/11/2016				
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016				

8.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

8.5 Measurement Result:

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (MHz)	Result
2402	0.727	> 0.5	PASS
2442	0.7187	> 0.5	PASS
2480	0.7252	> 0.5	PASS


BLE mode

Frequency (MHz)	99%Bandwidth (MHz)
2402	1.0243
2442	1.055
2480	1.0421

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





BT4.0 mode 6dB Band Width Test Data CH-Low

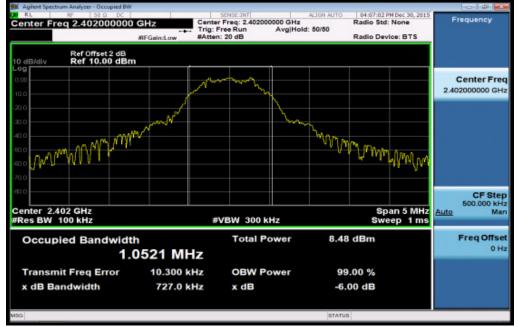

6dB Band Width Test Data CH-Mid




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and statistic(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

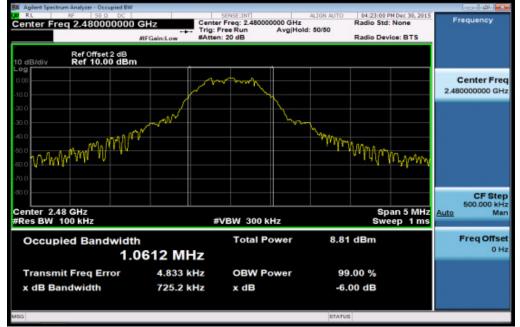


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



99% Band Width Test Data CH-Low

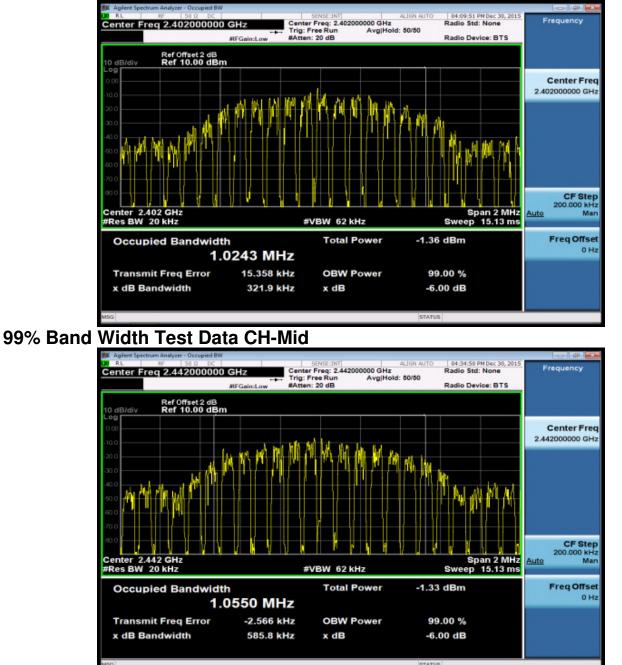


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and statistic(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



99% Band Width Test Data CH-High

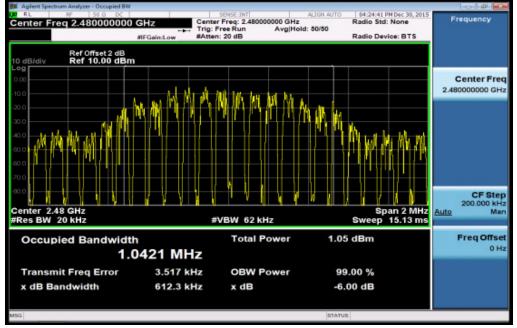

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9


9.1 **Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	EQUIPMENT MFR		SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016				
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016				
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2015	12/11/2016				
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016				

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Re非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



9.4 Measurement Procedure

Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.



BT4.0 mode **Band Edges Test Data CH-Low**

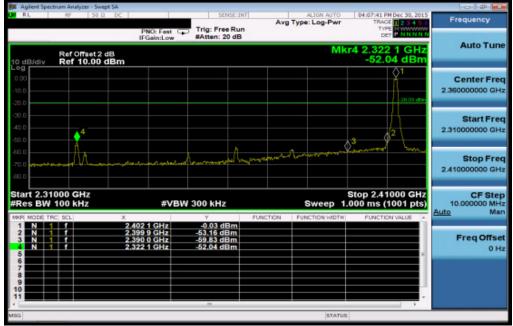

Band Edges Test Data CH-High

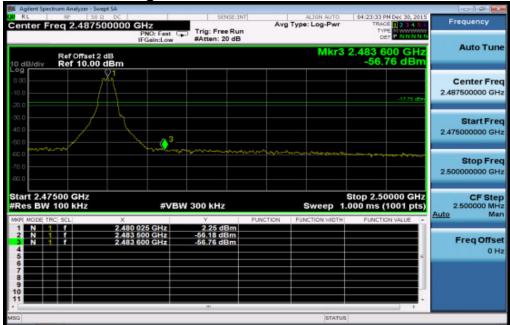


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Conducted Spurious Emission Measurement Result CH-Low 30MHz - 3GHz

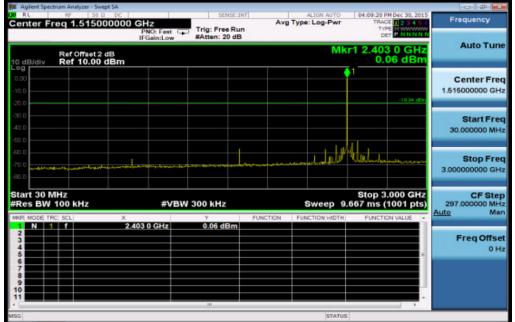

CH-Low 3GHz – 26.5GHz

RL	trum Analyzer - Swept RF 50 Q	DC	SENSE: IN	ALIGN AUTO	04:09:39 PM Dec 30, 2015	Frequency
enter Fi	req 14.7500	PNO: Fast C IFGain:Low	Trig: Free Run #Atten: 20 dB	Avg Type: Log-Pwr	TYPE NWWWWW	
0 dB/div	Ref Offset 2 di Ref 10.00 di			Mkr	1 25.818 5 GHz -58.52 dBm	Auto Tun
0.00 10.0 20.0					-19.94 dBm	Center Fre 14.750000000 GF
90.0 40.0 50.0						Start Fre 3.000000000 GI
50.0 70.0 L./~~~ 50.0	nhannan ma	and the second second	den and my have not	and a state and a state of the		Stop Fre 26.50000000 G
	100 kHz		W 300 kHz		Stop 26.50 GHz 6.40 ms (1001 pts)	CF Sto 2.350000000 G Auto M
NR MODE TR 1 N 1 2 3 4 5 6		× 25.818 5 GHz	-58.52 dBm	FUNCTION FUNCTION WDTH	FUNCTION VALUE	Freq Offs 01
7 8 9 0						
RG				STATU	5	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CH-Mid 30MHz – 3GHz


Agilent Spectrum Analyzer - Swept SA	1			
Center Freq 1.515000000	GHz PNO: Fast _ Trig: Free R	Avg Type: Log-Pwr	04:33:21 PM Dec 30, 2015 TRACE 1 2 3 4 5 0 TYPE NWWWWW DET PNNNNN	Frequency
Ref Offset 2 dB	IFGain:Low #Atten: 20 d	IB	r1 2.441 6 GHz 2.15 dBm	Auto Tun
-10.0			1 .17.65 dBm	Center Fre 1.515000000 GH
30.0 40.0 60.0				Start Fre 30.000000 MF
60.0 70.0 60.0		L	Mullasana	Stop Fre 3.000000000 GH
Start 30 MHz Res BW 100 kHz	#VBW 300 kHz	Sweep 9.	Stop 3.000 GHz 667 ms (1001 pts)	CF Ste 297.000000 MH Auto Mi
1 N 1 1 2.	441 6 GHz 2.15 dBm			Freq Offs 0 F
7 8 9 10 11				
sa		STATUS	•	

CH-Mid 3GHz – 26.5GHz

	ctrum Analyzer - Swept SA						
Center F	reg 14.7500000	00 GHz	SENSE:11	Avg	ALIGN AUTO Type: Log-Pwr	04:34:40 PM Dec 30, 2 TRACE 2 3 4	
		PNO: Fast G IFGain:Low	#Atten: 20 dB	1		DET PINNN	Auto Tupo
10 dB/div	Ref Offset 2 dB Ref 10.00 dBm				Mkr	1 26.359 0 GH -59.75 dB	2
0.00							Center Freq
-10.0						.47.65 d	14.750000000 GHz
-30.0							Start Freq
-40.0							3.00000000 GHz
-60.0	when we are a second and and and and and and and and and a	-		Market Street Street	ومعلوده ومرغور والمهمر وأحدار	aderes and the second second second second	Stop Freq
-70.0			and a subsect of the second				26.50000000 GHz
Start 3.00) GHz					Stop 26.50 G	1Z CF Step
#Res BW		#VB\	V 300 kHz		Sweep 7	6.40 ms (1001 pt	2.350000000 GHz Auto Man
MKR MODE TH		5.359 0 GHz	-59.75 dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	
2							Freq Offset
5							- 0 Hz
7 8 9							
10							
MSG			m		STATUS	•	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Chiven 1 UM 104 WukfuneRoad NewTainel/District NewTain





CH-High 30MHz – 3GHz

Agilent Spec	trum Analyzer - Sv RF 50			SENSE 1		ALIGN AUTO	04.33.40.0	M Dec 30, 2015	0
		000000 GH	Z O: Fast G	Trig: Free Run	Avg	Type: Log-Pwr	TRAC		Frequency
dB/div	Ref Offset 2 Ref 10.00	IFG 2 dB	ain:Low	#Atten: 20 dB		Mk	r1 2.48	0 3 GHz 24 dBm	Auto Tu
								-17 75 dBm	Center F 1.515000000 (
0 0 0									Start F 30.000000 f
	مود (1966م مرد) الم		ine President			سليليهم	Milut.	*************	Stop F 3.000000000
art 30 M es BW	/Hz 100 kHz		#VBV	V 300 kHz		Sweep 9		.000 GHz 1001 pts)	CF S 297.000000 I Auto
NODE TR		× 2.480 3	3 GHz	۲ 2 24 dBm	FUNCTION	FUNCTION WIDTH	FUNCTION	ON VALUE +	Auto
									Freq Off (
				m					

CH- High 3GHz – 26.5GHz

M Agilent Spectrum Ana	ilyzer - Swept SA	v			Construction Construction	
Center Freq 1	4.750000000 GHz	SENSE IN	Avg	ALIGN AUTO Type: Log-Pwr	04:24:24 PM Dec 30, 2015 TRACE 2 3 4 5 6 TVPE	Frequency
10 dB/div Ref	PNO: Fa IFGain:L Diffset 2 dB 10.00 dBm			Mkr	26.359 0 GHz -59.22 dBm	Auto Tune
-10.0					-17.76 obre	Center Freq 14.750000000 GHz
-20.0 -30.0 -40.0 -60.0						Start Freq 3.000000000 GHz
-60.0 -70.0 -80.0	جادم دی ل ور ۱۰۰ نومینو _ی ورور می	ana falilifa alge _{ration} (na marine generik g	angintanga Rilly Angington	اللواجيف وموزاعتها ماحمون	and a second product of the second	Stop Freq 26.50000000 GHz
Start 3.00 GHz #Res BW 100 k	x	VBW 300 kHz	FUNCTION	Sweep 70	Stop 26.50 GHz 5.40 ms (1001 pts) FUNCTION VALUE	CF Step 2.35000000 GHz Auto Man
1 N 1 7	26.359 0 GH	z -59.22 dBm			ř.	Freq Offset 0 Hz
10 11 vsg		m		STATUS	-	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Chiven 1 UM 104 WukfuneRoad NewTainel/District NewTain

10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the limit as below.

For an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.




10.2 Measurement Equipment Used

966 Chamber									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016				
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2015	12/08/2016				
Broadband Antenna	TESEQ	CBL 6112D	35240	10/28/2015	10/27/2016				
Horn Antenna	ETS-Lindgren	3117	00143272	12/08/2015	12/07/2016				
Horn Antenna	Schwarzbeck	BBHA9170	185	07/25/2015	07/24/2016				
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2015	12/11/2016				
Pre Amplifier	EMC Instruments	EMC001183 0	980199	12/12/2015	12/11/2016				
Pre Amplifier	R&S	SCU-18	10204	12/12/2015	12/11/2016				
Pre Amplifier	R&S	SCU-26	100780	12/12/2015	12/11/2016				
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2015	12/11/2016				
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2015	12/11/2016				
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2015	12/11/2016				
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/12/2015	12/11/2016				
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2015	12/11/2016				
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2015	12/11/2016				
Attenuator	WOKEN	218FS-10	RF27	12/12/2015	12/11/2016				
Site NSA	SGS	966 Cham- ber C	SAC-C	03/04/2015	03/03/2016				
Site VSWR	SGS	966 Cham- ber C	SAC-C	03/04/2015	03/03/2016				
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2015	05/03/2016				
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.				
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.				
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.				
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.				




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

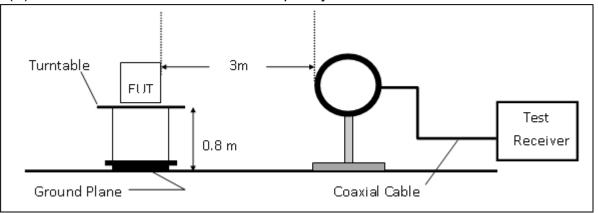

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

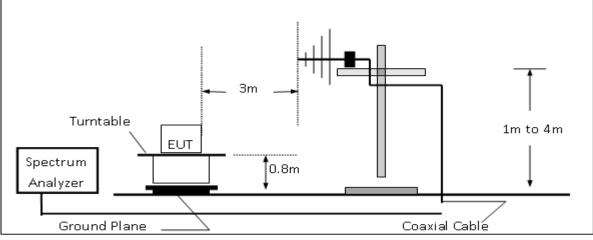

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

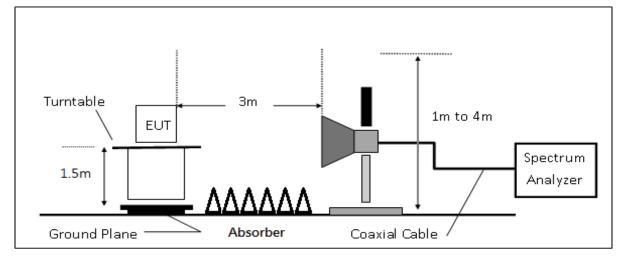

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and statistic(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequen-2. cy> 1GHz above ground plan.
- The turn table shall rotate 360 degrees to determine the position of maximum emission level. 3.
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the 4. highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW \geq 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

GRes 方式说明,此報告結果僅對測試之樣品員,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	5	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Band Edge Measurement Result (BT4.0 mode)


Fundamental Frequency : 2402 MHz Operation Band : BE CH Low			I Low Test Eng	Humi. :	na Pol. :	2015/12/30 24.2 deg/ 6 Vito Vertical	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	60.49	-6.84	53.64	74	-20.36
2390.00	E	Average	40.44	-6.84	33.60	54	-20.40
Operation Fundamen Operation EUT Pol. :	tal Frequen	BT4.0 cy : 2402 M BE CH E2	/Hz Temp. / I Low Test Eng	Humi. :	na Pol. :	2015/12/30 24.2 deg/ 6 Vito Horizontal	
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	62.02	-6.84	55.17	74	-18.83
2390.00	Е	Average	40.47	-6.84	33.63	54	-20.37
		-					



Fundamental Frequency : 2480 MHz Operation Band : BE CH High		Test Date Temp. / I Test Eng Measure	Humi. :	nna Pol. :	2016/1/4 24.2 deg/ Vito Vertical	62 RH		
Freq.	Note	Detector	•	ctum	Factor	Actual	Limit	Margin
		Mode	Readin	g Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dB	μV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	60.	.26	-6.38	53.88	74	-20.12
2483.50	E	Average	41.	.09	-6.38	34.71	54	-19.29
Operation Mode :BT4.0Fundamental Frequency :2480 MHzOperation Band :BE CH HighEUT Pol. :E2			Test Date Temp. / I Test Eng Measure	Humi. :	nna Pol. :	2016/1/4 24.2 deg/ Vito Horizontal		
Freq. <u>MHz</u> 2483.50	Note <u>F/H/E/S</u> E	Detector Mode PK/QP/AV Peak	Readin dB	ctum g Level μV .08	Factor dB -6.38	Actual FS <u>dBµV/m</u> 55.70	Limit @3m dBµV/m 74	Margin <u>dB</u> -18.30
2483.50	E	Average		.30	-6.38	34.92	54	-19.08
		0 -		-			-	



Radiated Spurious Emission Measurement Result (BT4.0 mode) For Frequency form 30MHz to 1000MHz

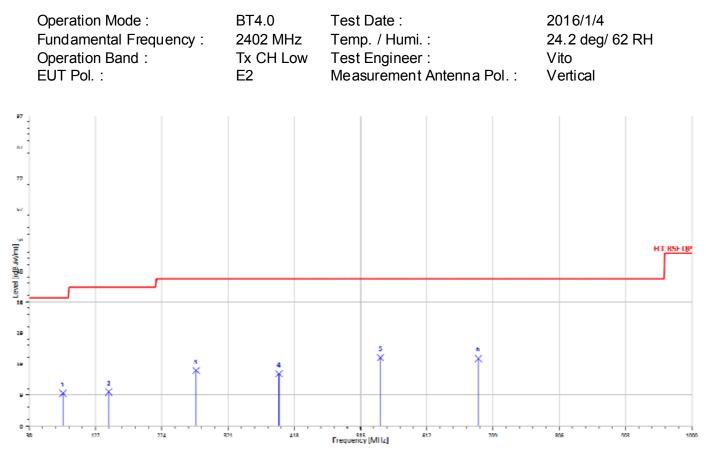


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
79.47	S	Peak	37.90	-27.72	10.18	40	-29.82
146.40	S	Peak	33.08	-22.50	10.58	43.5	-32.92
274.44	S	Peak	39.60	-22.22	17.37	46	-28.63
395.69	S	Peak	35.20	-18.91	16.29	46	-29.71
544.10	S	Peak	37.77	-16.42	21.34	46	-24.66
687.66	S	Peak	34.71	-13.64	21.07	46	-24.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and statistic(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2015/C0051 Page 41 of 60

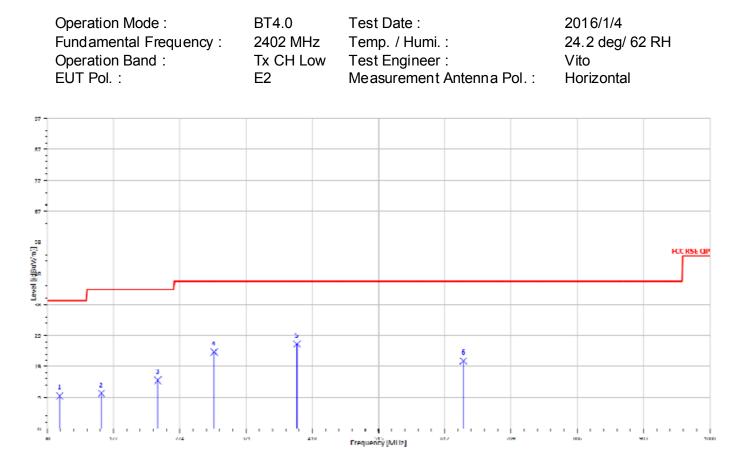


Freq. Note Detector Spectum Factor Actual Limit Margin Mode Reading Level FS @3m MHz F/H/E/S PK/QP/AV dBuV dB dBµV/m dBµV/m dB 48.43 S Peak 33.67 -23.54 10.14 40 -29.86 109.54 S Peak 36.67 -25.68 10.99 43.5 -32.51 191.99 S Peak 40.18 -25.11 15.08 43.5 -28.42 S 274.44 Peak 46.14 -22.22 23.92 46 -22.08 S 395.69 Peak 45.37 -18.91 26.46 46 -19.54 S 639.16 -13.72 21.13 46 -24.87 Peak 34.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and statistic(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Operation Mode :	BT4.0	Test Date :	2016/1/4
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH Mid	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

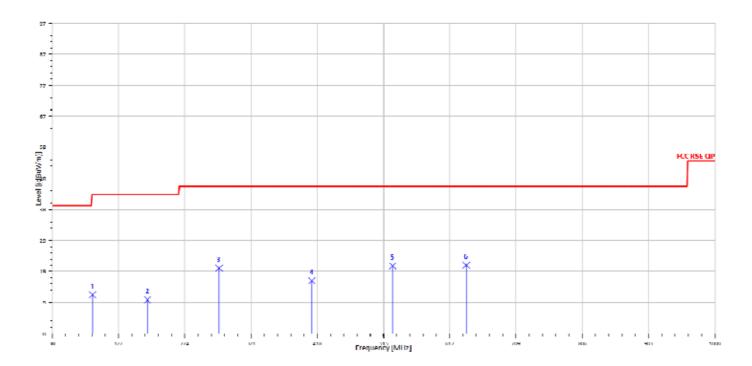

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
89.17	S	Peak	39.79	-27.71	12.08	43.5	-31.42
169.68	S	Peak	33.91	-23.39	10.52	43.5	-32.98
274.44	S	Peak	42.66	-22.22	20.43	46	-25.57
410.24	S	Peak	34.52	-18.05	16.47	46	-29.53
528.58	S	Peak	37.47	-16.32	21.15	46	-24.85
636.25	S	Peak	35.26	-13.90	21.36	46	-24.64




Operation Mode :	BT4.0	Test Date :	2016/1/4
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH Mid	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol.:	Horizontal

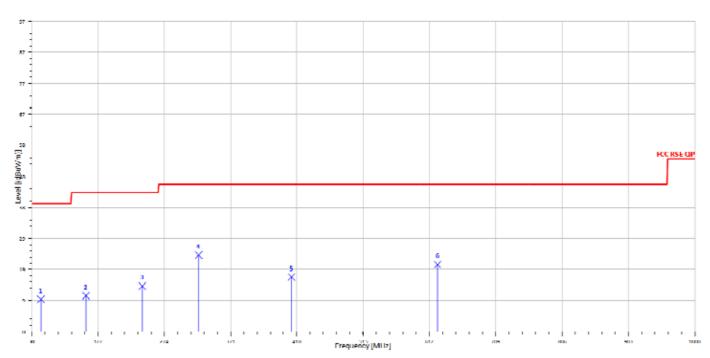

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
43.58	S	Peak	33.15	-23.10	10.05	40	-29.95
109.54	S	Peak	36.87	-25.68	11.19	43.5	-32.31
191.99	S	Peak	39.31	-25.11	14.20	43.5	-29.30
274.44	S	Peak	46.13	-22.22	23.91	46	-22.09
410.24	S	Peak	35.09	-18.05	17.05	46	-28.95
623.64	S	Peak	35.68	-14.75	20.93	46	-25.07




Operation Mode :	BT4.0	Test Date :	2016/1/4
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH High	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol.:	Vertical

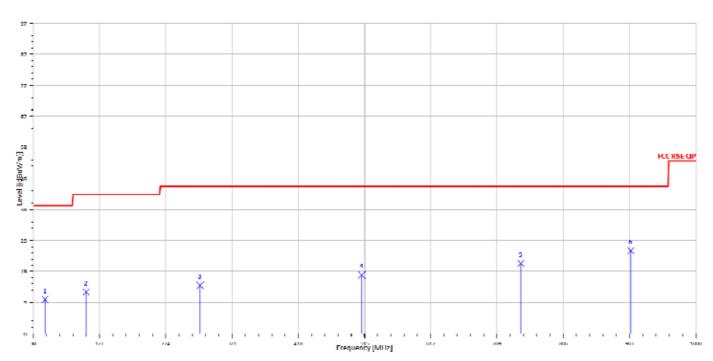

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
47.46	S	Peak	34.04	-23.41	10.63	40	-29.37
107.60	S	Peak	38.90	-25.92	12.98	43.5	-30.52
274.44	S	Peak	37.29	-22.22	15.07	46	-30.93
511.12	S	Peak	35.19	-16.86	18.34	46	-27.66
743.92	S	Peak	34.41	-12.45	21.97	46	-24.03
904.94	S	Peak	36.01	-10.06	25.95	46	-20.05



Operation Mode :	BT4.0	Test Date :	2016/1/4
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH High	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol.:	Horizontal

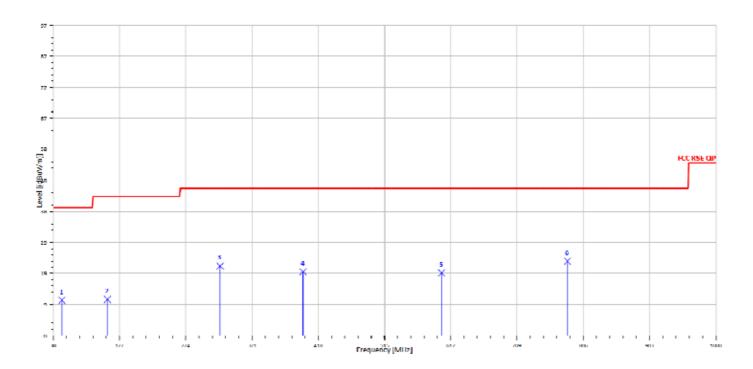


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
42.61	S	Peak	34.14	-23.11	11.03	40	-28.97
109.54	S	Peak	36.95	-25.68	11.28	43.5	-32.22
274.44	S	Peak	43.97	-22.22	21.75	46	-24.25
395.69	S	Peak	38.83	-18.91	19.92	46	-26.08
598.42	S	Peak	34.46	-14.88	19.58	46	-26.42
782.72	S	Peak	35.25	-12.02	23.23	46	-22.77



Radiated Spurious Emission Measurement Result (BT4.0 mode) For Frequency above 1GHz

Operation Mode :	BT4.0	Test Date :	2015/12/31
Fundamental Frequency :	2402 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH Low	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol.:	Vertical

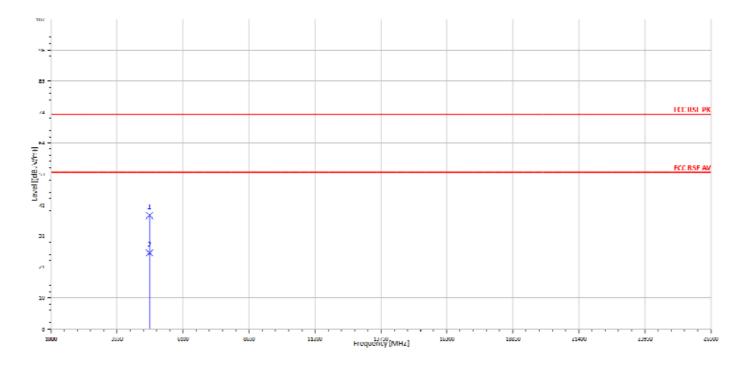


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Peak	40.30	-1.16	39.14	74	-34.86
4804.00	Н	Average	27.34	-1.16	26.18	54	-27.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Operation Mode :	BT4.0	Test Date :	2015/12/31
Fundamental Frequency :	2402 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH Low	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol.:	Horizontal

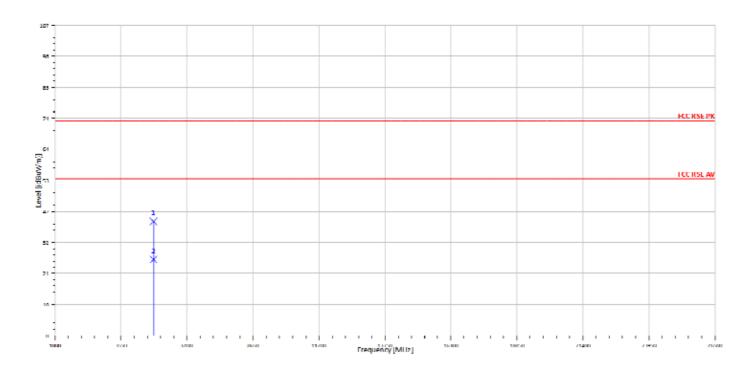

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Peak	40.50	-1.16	39.34	74	-34.66
4804.00	Н	Average	27.38	-1.16	26.22	54	-27.78




Operation Mode :	BT4.0	Test Date :	2015/12/31
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH Mid	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

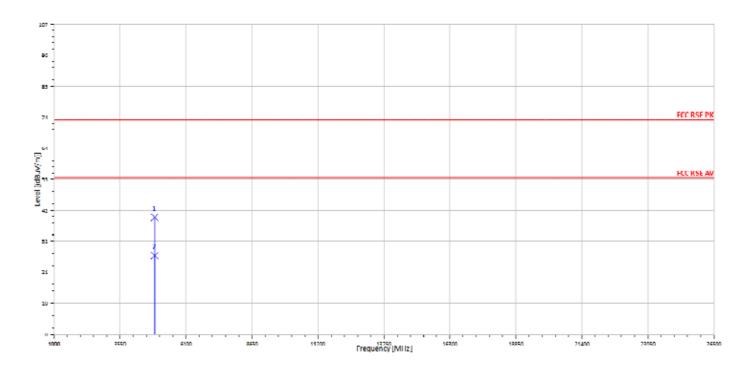

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4884.00	Н	Peak	41.03	-0.69	40.34	74	-33.66
	4884.00	Н	Average	27.77	-0.69	27.08	54	-26.92




Operation Mode :	BT4.0	Test Date :	2015/12/31
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH Mid	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

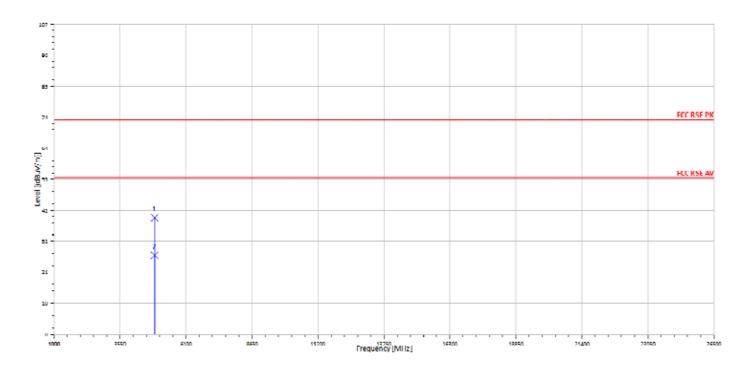

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4884.00	Н	Peak	40.84	-0.69	40.16	74	-33.84
4884.00	Н	Average	27.88	-0.69	27.19	54	-26.81




Operation Mode :	BT4.0	Test Date :	2015/12/31
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH High	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol.:	Vertical

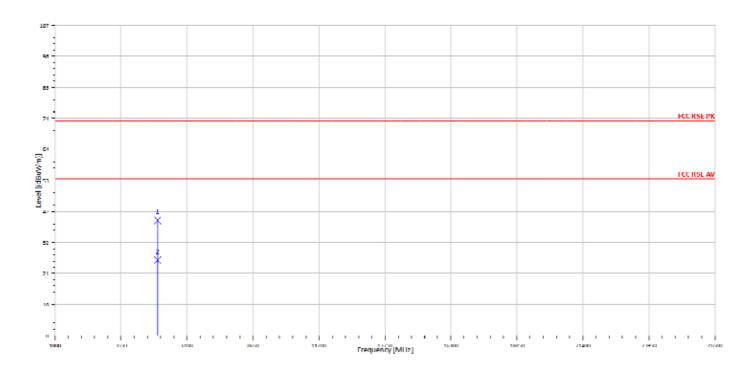

Fred	. Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MH:	z F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.	00 H	Peak	40.36	-0.66	39.71	74	-34.29
4960.	00 H	Average	26.68	-0.66	26.02	54	-27.98



Operation Mode :	BT4.0	Test Date :	2015/12/31
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	24.2 deg/ 62 RH
Operation Band :	Tx CH High	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol.:	Horizontal

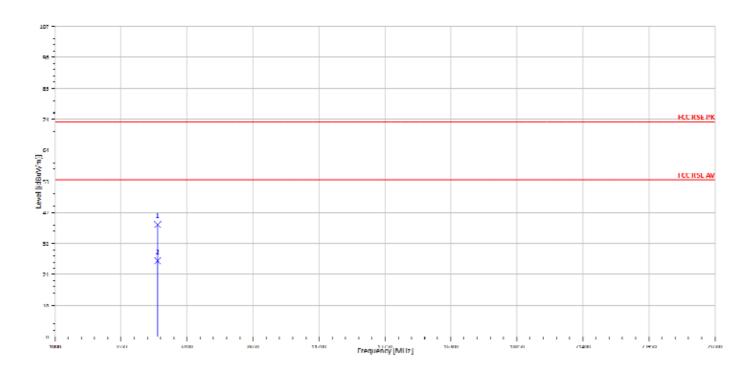

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	39.29	-0.66	38.63	74	-35.37
4960.00	Н	Average	26.80	-0.66	26.14	54	-27.86



11 PEAK POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2015	12/11/2016
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016

11.3 Test Set-up:



11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz.
- 5. Set the VBW = 10 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



11.5 Measurement Result:

BT4.0 mode

BLE mode

DEEIIIouc			
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-14.41	8	PASS
2442	-12.40	8	PASS
2480	-12.29	8	PASS

Note: Refer to next page for plots.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



BT4.0 mode Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)

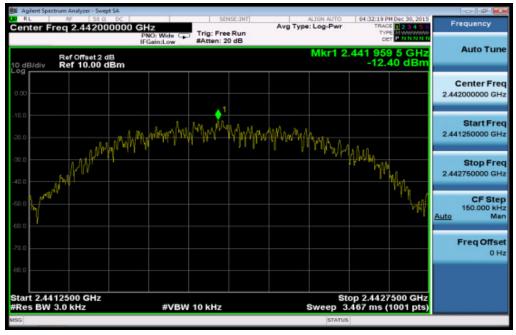


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and statistic(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Power Spectral Density Test Plot (CH-High)

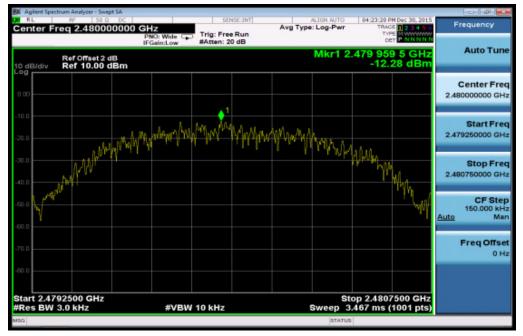

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

According to RSS-GEN 8.3

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

12.2 Antenna Connected Construction:

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



13 MAXIMUM PERMISSIBLE EXPOSURE (MPE)(FCC)

13.1 Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Mobile device, the MPE is required.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissive Exposure (MPE)

Frequency Range	Electric Field	Magnetic Field	Power Density	Averaging Time
(MHz)	Strength (V/m)	Strength (A/m)	(mW/cm ²)	(minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	F/1500	30
1500-15000	/	/	1.0	30

F = frequency in MHz

* = Plane-wave equipment power density

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



13.2 Maximum Permissible Exposure (MPE) Evaluation

СН	Frequency (MHz)	Max. output power includ- ing tune-up tolerancel(dBm)	Required Limit
0	2402	1.00	1 Watt = 30 dBm
20	2442	1.02	1 Watt = 30 dBm
39	2480	1.21	1 Watt = 30 dBm

MPE Prediction (BT)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

S=PG/4πR²

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Max. output power including tune-up tolerancel:	1.21	(dBm)	
Max. output power including tune-up tolerancel:	1.3212956	(mW)	
Duty cycle:	100	(%)	
Maximum Pav :	1.3212956	(mW)	
Peak Antenna gain (Maximum):	2.968	(dBi)	
Peak Antenna gain (linear):	1.9806147	(numeric)	
Prediction distance:	20	(cm)	
Prediction frequency:	2480	(MHz)	
MPE limit for uncontrolled exposure at prediction	1	(mW/cm2)	
Power density at predication frequency at 20 (cm)	0.001	(mW/cm^2)	
Measurement Result The predicted power density level at 20 cm is 0.001 mW/cm2.			
This is holes, the superscript of every sume limit of 4 max///www.at 040004/			

This is below the uncontrolled exposure limit of 1 mW/cm2 at 2480MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherWise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



14 MAXIMUM PERMISSIBLE EXPOSURE (MPE) (IC)

14.1 Standard Applicable:

According to RSS 102 March 19,2015 issue 5 §2.5.2 RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

below 20 MHz₆ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);

at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $22.48/f_{0.5}W$ (adjusted for tune-up tolerance), where *f* is in MHz;

at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f_{0.6834}$ W (adjusted for tune-up tolerance), where *f* is in MHz;

This is a Mobile device, at which separation distance between the user and the device's antenna is 20cm. Therefore, section 2.5.2 shall be complied with

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole reportsulty is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



14.2 Maximum Permissible Exposure (MPE) Evaluation

Maximum average output power at antenna input	1.21	(dBm)
Maximum average output power at antenna input	1.3212956	(mW)
Antenna gain (Peak):	2.98	(dBi)
Maximum antenna gain:	1.9860949	(numeric)
Frenquency	2480	MHz
Limit	2.7355	W

Evaluation Result

The radiated power is 1.21 + 2.98 = 4.19 dBm(EIRP) = 2.624mW = 0.002624W that is less than or equal to 2.6764W. Hence, following section 2.5.2 of RSS102 issue RF exposure evaluation is no longer required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for su days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.