

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

OF

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 210 REQUIREMENT

	OF		
Product Name:	MID		
Brand Name:	Quanta Computer		
Model No. (FCC):	K72** (* Can be 0~9, A~Z or blank)		
Model No. (IC):	K72A		
Model Difference:	For marketing purpose		
FCC ID:	HFS-K72A		
IC:	1787B-K72A		
Report No.:	E2/2015/C0053		
Issue Date:	Jan. 11, 2016		
FCC Rule	§15.225		
IC Rule Part:	RSS-210 issue 8 Dec.2010 Annex 2		
Prepared for:	Quanta Computer Inc. No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan SGS Taiwan Ltd.		
Prepared by:	Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333		
Taff BC-MRA Testing Laboratory 0513	Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



VERIFICATION OF COMPLIANCE

Quanta Computer Inc.
No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City 33377,
Taiwan
MID
Quanta Computer
K72** (* Can be 0~9, A~Z or blank)
K72A
For marketing purpose
HFS-K72A
1787B-K72A
E2/2015/C0053
Dec. 15, 2015 ~ Jan. 11, 2016
Dec. 15, 2015

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jerry	Ľu	Date:	Jan. 11, 2016
	Jerry Lu / Eng	gineer		
Prepared By:	Tiffany	Kao	Date:	Jan. 11, 2016
Approved By:	Tiffany Kao / Jim A	Clerk h ang	Date:	Jan. 11, 2016
	Jim Chang / Asst	. Manager		
除非另有說明,此報告結果僅對測試之樣	wn in this test report refer only to the sampl &品負責,同時此樣品僅保留90天。本報告考 any subject to its General Conditions of 9	:經本公司書面許可,不可音	『份複製。	or 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



Revision History

Report Number	Revision	Description	Issue Date
E2/2015/C0053	Rev.00	Initial creation of document	Jan. 11, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Contents

1 (GENERAL INFORMATION	6
1.1	PRODUCT DESCRIPTION	6
1.2	PRODUCT FEATURE OF EQUIPMENT UNDER TEST	7
1.3	TEST METHODOLOGY OF APPLIED STANDARDS	8
1.4	TEST FACILITY	8
1.5	SPECIAL ACCESSORIES	8
1.6	EQUIPMENT MODIFICATIONS	8
2 \$	SYSTEM TEST CONFIGURATION	9
2.1	EUT CONFIGURATION	9
2.2	EUT EXERCISE	9
2.3	TEST PROCEDURE	9
2.4	MEASUREMENT RESULTS EXPLANATION EXAMPLE	9
2.5	CONFIGURATION OF TESTED SYSTEM	10
3 3	SUMMARY OF TEST RESULTS	11
4 I	DESCRIPTION OF TEST MODES	11
4.1	THE WORST TEST MODES AND CHANNEL DETAILS	11
5 I	MEASUREMENT UNCERTAINTY	12
6 (CONDUCTED EMISSION TEST	13
6.1	STANDARD APPLICABLE:	
6.2	MEASUREMENT EQUIPMENT USED:	
6.3	EUT SETUP:	13
6.4	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
6.5	MEASUREMENT PROCEDURE:	
6.6	MEASUREMENT RESULT:	14
7 I	RADIATED TEST ITEMS	17
7.1	MEASUREMENT PROCEDURE	17
7.2	TEST SET-UP	17
7.3	MEASUREMENT EQUIPMENT USED	
7.4	FIELD STRENGTH CALCULATION	
7.5	FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT	19
7.6	RADIATED EMISSION MEASUREMENT	25



8 FF	REQUENCY STABILITY	
8.1	STANDARD APPLICABLE	
8.2	MEASUREMENT PROCEDURE	
8.3	TEST SET-UP	
8.4	MEASUREMENT EQUIPMENT USED	31
8.5	MEASUREMENT RESULTS	31
9 99	% & 20 DB OCCUPIED BANDWIDTH MEASUREMENT	32
9.1	STANDARD APPLICABLE:	
9.2	LIMIT:	32
9.3	TEST SET-UP	32
9.4	MEASUREMENT PROCEDURE	
9.5	MEASUREMENT EQUIPMENT USED	32
9.6	MEASUREMENT RESULT	33
10 AN	NTENNA REQUIREMENT	34
10.1.	STANDARD APPLICABLE	34
10.2.	ANTENNA CONNECTED CONSTRUCTION	34



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	MID
Brand Name:	Quanta Computer
Model No. (FCC):	K72** (* Can be 0~9, A~Z or blank)
Model No. (IC):	K72A
Model Difference:	For marketing purpose
Product SW/HW version:	B1 / B1
Radio SW/HW version:	v4.3.0_10579.20140221_BTCOEX20140110-4940 / v01
Test SW Version:	N/A
RF power setting in TEST SW:	N/A
Power Supply:	100~240V from AC power cord

NFC:

Operating Frequency:	13.56MHz
Transmit Power:	< 123.90dBuV/m at 3m.
Number of Channels:	1
Antenna Type:	Loop Antenna
Modulation Type:	ASK




1.2 Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is MID, supporting, Bluetooth with Wi-Fi 802 11bon feature and below is details of information

Product Feature		
Product Name:	MID	
Brand Name:	Quanta Computer	
Model No. (FCC):	K72** (* Can be 0~9, A~Z or blank)	
Model No. (IC): K72A		
Model Difference:	For marketing purpose	
FCC ID:	HFS-K72A	
IC :	1787B-K72A	
Bluetooth Version	V4.0 dual mode	
Wi-Fi- Specification802.11b/g/nNFC SpecificationNFC		

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.225 IC RSS 210 issue 8 Dec.2010 Annex 2 RSS-Gen. issue 4 Nov. 2014 ANSI C63.10:2013

Note:

- 1. All test items have been performed and record as per the above standards.
- 2. The composite system (digital device) is compliance with FCC Subpart B is authorized under the certification procedure.

1.4 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan. (TAF code 0513)

FCC Registration Numbers are: 628985

Canada Registration Number: 4620A-5.

1.5 Special Accessories

There is no special accessory used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2.5 Configuration of Tested System

EUT S Windows 7

Fig. 2-1 Radiated Emission & Conducted Emission






Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model / Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L430	R9-YYG88	shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SUMMARY OF TEST RESULTS 3

FCC Rules / IC Rules	Description Of Test	Result
§15.207 RSS-Gen § 8.8	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d) RSS210 Annex 2 A2.6	Radiated Emission	Compliant
§15.209 RSS-Gen § 8.9	Radiated Emission Limits, general requirement	Compliant
§15.225 (e) RSS-Gen § 8.11	Frequency Stability	Compliant
§2.1049 §15.215 (c) RSS-Gen § 6.6	99% & 20 dB OCCUPIED BANDWIDTH	Compliant
§15.203 RSS-Gen § 6.7, § 8.3	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES 4

4.1 The Worst Test Modes and Channel Details

- 1. The EUT stay in continuous transmitting mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION			
NFC	1	1	ASK			
FREQUENCY STABILITY						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION			
NFC	1	1	ASK			
20dB BANDWIDTH						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION			
NFC	1		ASK			

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for NFC Transmitter for channel the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 51.33 Hz
20 dB OCCUPIED BANDWIDTH	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB

Measurement uncertainty (Polarization : Horizontal)	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
0.000						

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2015	12/11/2016		
Coaxial Cables	N/A	N30N30-1042-150cm	N/A	01/06/2015	01/07/2016		
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016		
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2015	03/03/2016		
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.		

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非 是 去 投租, 正 提上 建 体型 通行 之 择 卫 备 素 , 回 其正 样 卫 体 足 的 的 子 。 太 提上 本 领 太 八 司 孝 五 社 可 , 太 可 部 公 造 劑 。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6.4 Test SET-UP (Block Diagram of Configuration)

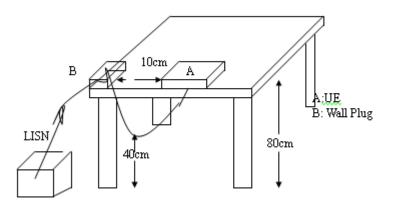

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



AC POWER LINE CONDUCTED EMISSION TEST DATA


Operation Mode: Operation mode Temperature: 26

Test Date: Jan. 05, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



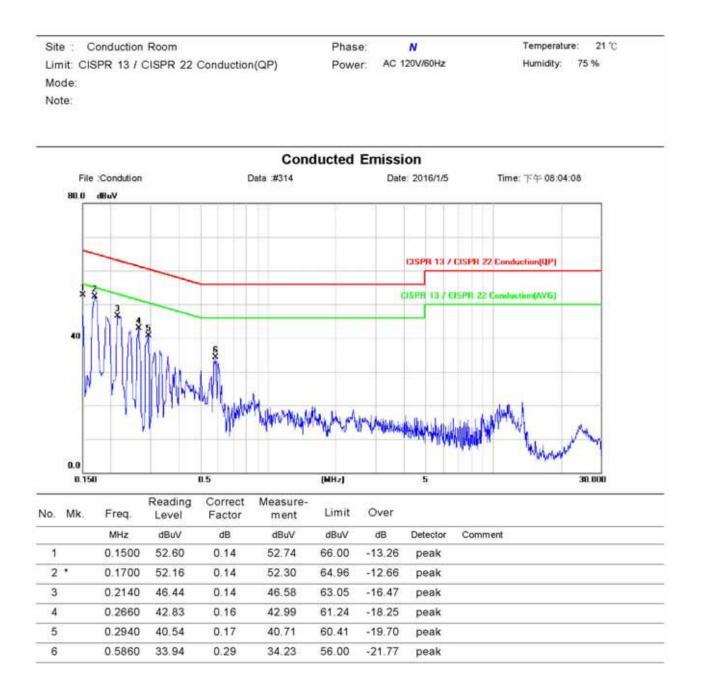

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




RADIATED TEST ITEMS

7.1 Measurement Procedure


- 1. Configure the EUT according to ANSI C63.4.
- 2. The EUT was placed on a turn table which is 0.8m above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were complete

7.2 Test SET-UP

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

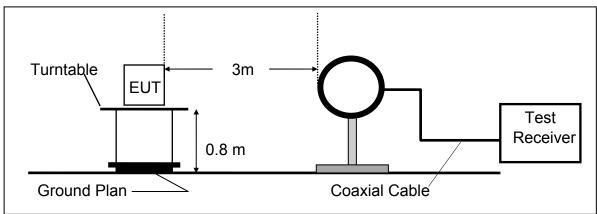

Radiated Emission Test Set-Up, Frequency Below 1000MHz (B)

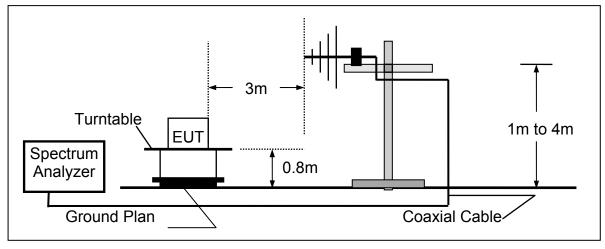

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.3 Measurement Equipment Used

966 Chamber							
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016		
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2015	12/08/2016		
Broadband Antenna	TESEQ	CBL 6112D	35240	12/05/2015	12/04/2016		
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2015	12/11/2016		
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016		
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016		
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2015	05/03/2016		
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.		
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.		
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.		
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.		

7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	0	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency.; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.5 Field Strength of Fundamental Emissions and Mask Measurement

7.5.1 Standard Applicable

Limit:

Rules and specifiactions	CFR 47 Part 15 section 15.225(a)-(d)				
Frequency of Emission (MHz)	Field Strength Field Strength (μV/m)at 30m (dBμV/m)at 30m		Field Strength (dBµV/m)at 3m		
1.705~13.110	30	29.5	69.5		
13.110~13.410	106	40.5	80.5		
13.410~13.553	334	50.5	90.47		
13.553~13.567	15848	84	123.9		
13.567~13.710	334	50.5	90.47		
13.710~14.010	106	40.5	80.5		
14.010~30.00	30	29.5	69.5		

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 124.00dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = 40 *log (30/3) = 40 dB

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m

- 1. Emission level in dBuV/m=20 log (μ V/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No: E2/2015/C0053 Page: 20 of 34

Radiated Mask for RSS 210 Annex 2 A2.6

- (a) 15.848 millivolts/m (84 dBµV/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dBµV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dBµV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.

Distance extrapolation = $40 \times \log(30/3) = 40 \text{ dB}$

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a) 20 *log (15848uV/m) + 40dB = 124.00dBuV/m
- b) 20 *log(334uV/m) + 40dB = 90.47dBuV/m
- c) $20^{106}uV/m$ + 40dB = 80.50dBuV/m


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.5.2 Field Strength of Fundamental Emission Measurement Result


Operation Mode : Fundamental Frequency : Operation Band : EUT Pol. :	NFC 13.56 MHz Main_M E2	Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol	2016/1/4 22.7deg_C/57RH Vito . : Vertical
107			
112			
:			

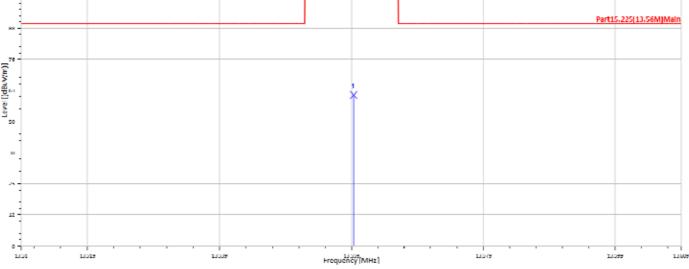

	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
-	13.56	F	Peak	50.34	11.27	61.60	123.9	-62.30



Fundamental Frequency :13.56 MHzOperation Band :Main_M	Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :	2016/1/4 22.7deg_C/57RH Vito Horizontal
--	---	--

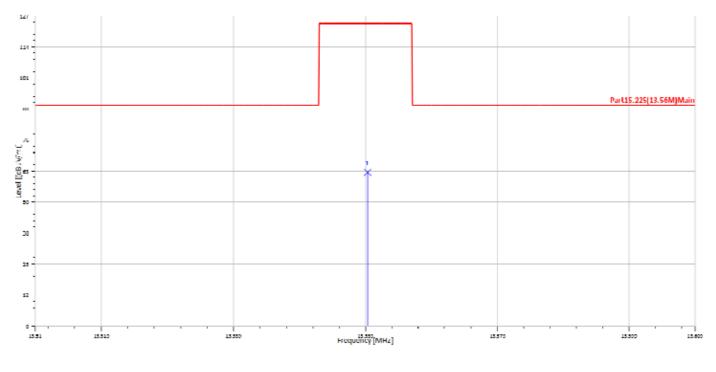


Fre	q. Note	Detector	Spectum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MH	z F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
13.5	6 F	Peak	51.71	11.27	62.98	123.9	-60.92	




7.5.3 Mask Measurement Result


Operation Mode :	NFC	Test Date :	2016/1/4
Fundamental Frequency :	13.56 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Mask_M	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol.:	Vertical

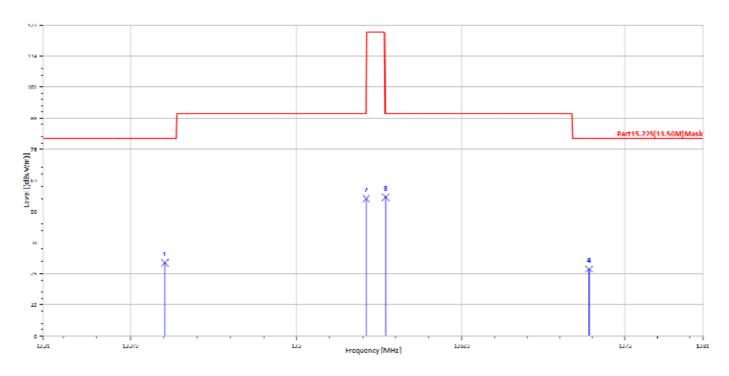

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.40	S	Peak	18.60	11.27	29.86	80.5	-50.64
13.55	S	Peak	44.77	11.27	56.04	90.47	-34.43
13.57	S	Peak	45.36	11.27	56.63	90.47	-33.84
13.72	S	Peak	16.04	11.26	27.30	80.5	-53.20





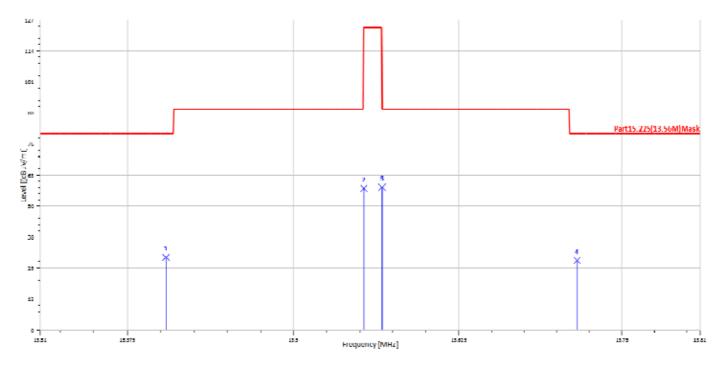

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.40	S	Peak	18.57	11.27	29.84	80.5	-50.66
13.55	S	Peak	46.80	11.27	58.07	123.9	-65.83
13.57	S	Peak	47.26	11.27	58.52	123.9	-65.38
13.72	S	Peak	17.26	11.26	28.52	80.5	-51.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.6 Radiated Emission Measurement

7.6.1 Standard Applicable

The field strength of any emission which appear outside of 13.553~13.567MHz Band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. Emission level in $dB\mu V/m=20 \log (\mu V/m)$
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

According to § RSS-210 A2.6

(d) 30 microvolts/m (29.4 dBµV/m) at 30 m, outside the band 13.110-14.010 MHz.

Limit is converted by adding the distance extrapolation factor as the measurement distance was to place at 3m.

a) 20*log(30uV/m) + 40dB = 69.54 dBuV/m


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Emission Measurement Result

Operation Mode :	NFC	Test Date :	2016/1/4
Fundamental Frequency :	13.56 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx_M	Test Engineer :	Vito
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

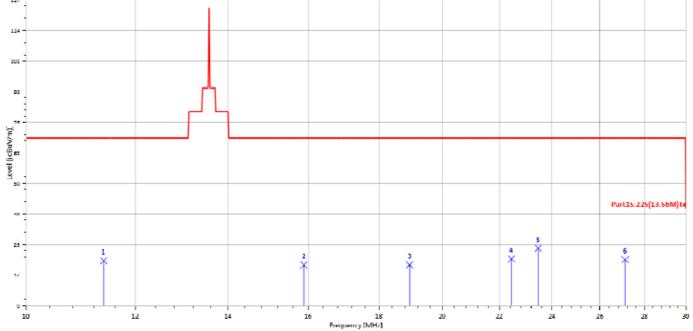


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
11.38	S	Peak	7.31	11.31	18.62	69.54	-50.92
15.88	S	Peak	5.65	11.22	16.87	69.54	-52.67
18.94	S	Peak	5.75	11.15	16.90	69.54	-52.64
22.44	S	Peak	8.71	10.69	19.40	69.54	-50.14
23.46	S	Peak	13.30	10.51	23.81	69.54	-45.73
27.12	S	Peak	9.18	9.85	19.03	69.54	-50.51



٥

26

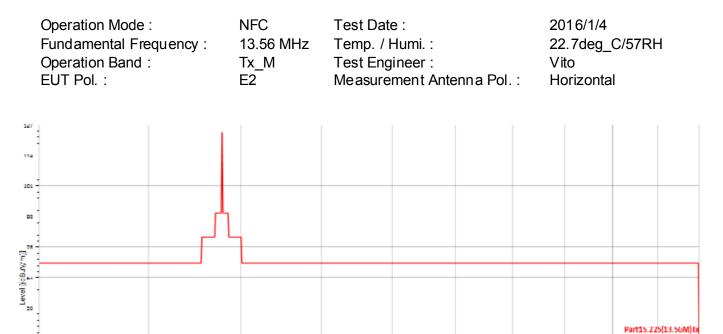


l requency (Miliz)							
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
11.72	S	Peak	8.86	11.30	20.17	69.54	-49.37
14.80	S	Peak	7.69	11.24	18.93	69.54	-50.61
17.40	S	Peak	5.69	11.18	16.88	69.54	-52.66
20.90	S	Peak	7.16	10.97	18.13	69.54	-51.41
23.46	S	Peak	17.39	10.51	27.90	69.54	-41.64
27.12	S	Peak	9.83	9.85	19.68	69.54	-49.86

18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



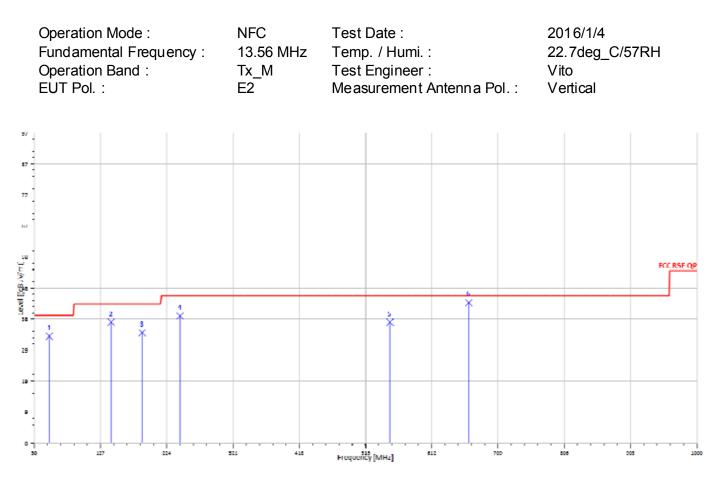


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	57.34	-23.93	33.41	40	-6.59
142.52	S	Peak	60.63	-22.82	37.82	43.5	-5.68
188.11	S	Peak	59.50	-24.98	34.52	43.5	-8.98
243.40	S	Peak	62.98	-23.21	39.78	46	-6.22
550.89	S	Peak	54.15	-16.38	37.77	46	-8.23
666.32	S	Peak	57.90	-14.00	43.90	46	-2.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



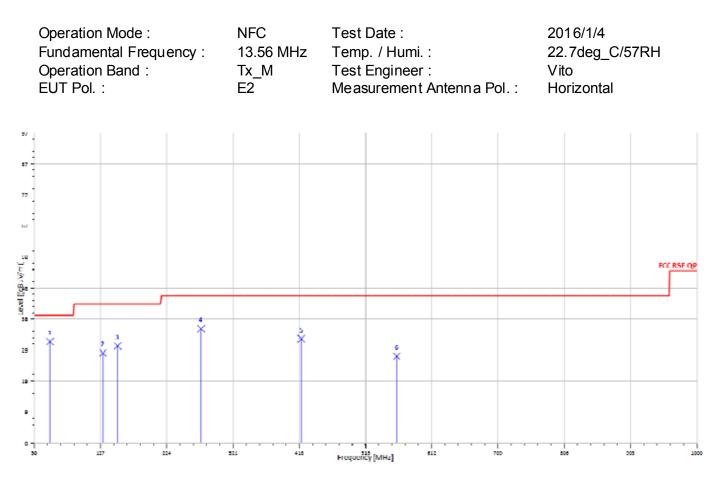

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
53.28	S	Peak	55.79	-24.01	31.79	40	-8.21
130.88	S	Peak	52.69	-24.51	28.18	43.5	-15.32
152.22	S	Peak	52.55	-22.19	30.36	43.5	-13.14
274.44	S	Peak	58.01	-22.22	35.79	46	-10.21
420.91	S	Peak	50.72	-18.11	32.61	46	-13.39
560.59	S	Peak	43.19	-16.04	27.15	46	-18.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



FREQUENCY STABILITY 8

8.1 Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

For licence-exempt radio apparatus, the frequency stability shall be measured at temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F).

8.2 Measurement Procedure

- The EUT was placed inside temperature chamber and powered and powered by nominal 1. DC voltage.
- 2. Set EUT as normal operation.
- 3. Turn the EUT on and couple its output to spectrum.
- 4. Turn the EUT off and set the chamber to the highest temperature specified.
- 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
- 6. Repeat step with the temperature chamber set to the lowest temperature.
- 7. Set spectrum Center Frequency = fundamental frequency, RBW, VBW= 10 kHz, Span =100 kHz, Detector =Max hold, Mark peak.

Test SET-UP 8.3

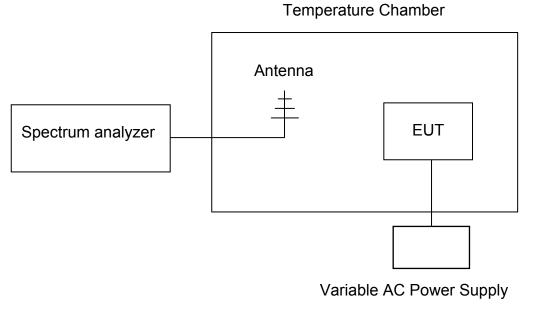

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8.4 Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016				
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2015	12/10/2016				
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/10/2016				
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/10/2016				
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2015	05/03/2016				
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2015	12/08/2016				

Measurement Results 8.5

A. Temperature Variation

Power Supply	Environment	Frequency	Dolto (Uz)	
Vac	Temperature	(MHz)	Delta (Hz)	Limit (KHz)
110	-20	13.55966667	333.33	+/- 1.356
110	-10	13.56016667	-166.67	+/- 1.356
110	0	13.56033333	-333.33	+/- 1.356
110	10	13.55916667	833.33	+/- 1.356
110	20	13.56	0.00	+/- 1.356
110	30	13.56	0.00	+/- 1.356
110	40	13.56033333	-333.33	+/- 1.356
110	50	13.55983333	166.67	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (KHz)
Vac	Temperature	(MHz)		
128	20	13.56	0.00	+/- 1.356
110	20	13.56	0.00	+/- 1.356
102	20	13.56016667	-166.67	+/- 1.356



99% & 20 dB OCCUPIED BANDWIDTH MEASUREMENT 9

9.1 Standard Applicable:

The 20 dB bandwidth shall be specified in operating frequency band.

9.2 Limit:

None

Test Set-up 9.3



Measurement Procedure 9.4

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.

Measurement Equipment Used 9.5


Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/11/2015	12/12/2016
DC Block	PASTERNACK	PE8210	RF29	12/11/2015	12/12/2016
Attenuator	WOKEN	218FS-10	RF23	12/11/2015	12/12/2016
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2015	05/03/2016
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2015	12/08/2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




9.6 Measurement Result

20dB Bandwidth

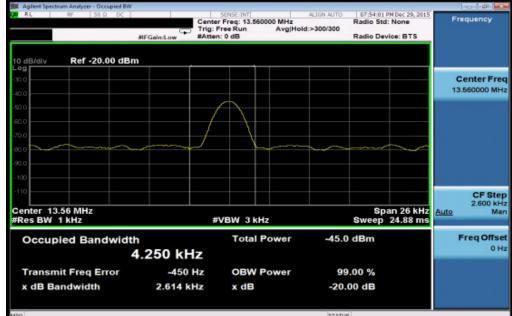

99% Bandwidth

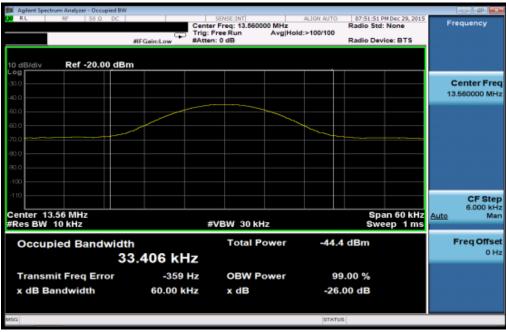

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10 ANTENNA REQUIREMENT

10.1. Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

According to RSS-GEN 8.3

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

10.2. Antenna Connected Construction

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.