



**FCC 47 CFR PART 15 SUBPART E &  
INDUSTRY CANADA RSS-210**

**TEST REPORT**

**For**

**Notebook Computer**

**FCC Model: Satellite P30W-B, Satellite Click 2 Pro P30W-B,  
Satellite Click 2 Pro P35W-B, dynabook P53**

**IC Model: Satellite P30W-B**

**Trade Name: TOSHIBA**

*Issued to*

**Quanta Computer Inc.**

**No. 188, Wen Hwa 2nd RD., Kuei Shan Hsiang, Taoyuan Hsien, Taiwan, R.O.C.**

*Issued by*

**Compliance Certification Services Inc.**

**No.11, Wugong 6th Rd., Wugu Dist.,**

**New Taipei City 24891, Taiwan. (R.O.C.)**

**<http://www.ccsrf.com>**

**[service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: May 9, 2014**



Testing Laboratory  
1309

---

*Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



**Revision History**

| Rev. | Issue Date  | Revisions     | Effect Page | Revised By  |
|------|-------------|---------------|-------------|-------------|
| 00   | May 9, 2014 | Initial Issue | ALL         | Kelly Cheng |



## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>1. TEST RESULT CERTIFICATION.....</b>                            | <b>4</b>  |
| <b>2. EUT DESCRIPTION .....</b>                                     | <b>5</b>  |
| <b>3. TEST METHODOLOGY .....</b>                                    | <b>7</b>  |
| 3.1 EUT CONFIGURATION .....   | 7         |
| 3.2 EUT EXERCISE .....  | 7         |
| 3.3 GENERAL TEST PROCEDURES .....                                   | 7         |
| 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....             | 8         |
| 3.5 DESCRIPTION OF TEST MODES .....                                 | 9         |
| <b>4. INSTRUMENT CALIBRATION.....</b>                               | <b>11</b> |
| 4.1 MEASURING INSTRUMENT CALIBRATION.....                           | 11        |
| 4.2 MEASUREMENT EQUIPMENT USED .....                                | 11        |
| 4.3 MEASUREMENT UNCERTAINTY .....                                   | 12        |
| <b>5. FACILITIES AND ACCREDITATIONS .....</b>                       | <b>13</b> |
| 5.1 FACILITIES.....   | 13        |
| 5.2 EQUIPMENT.....  | 13        |
| 5.3 LABORATORY ACCREDITATIONS AND LISTING.....                      | 13        |
| 5.4 TABLE OF ACCREDITATIONS AND LISTINGS .....                      | 14        |
| <b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>                       | <b>15</b> |
| 6.1 SETUP CONFIGURATION OF EUT .....                                | 15        |
| 6.2 SUPPORT EQUIPMENT .....   | 15        |
| <b>7. APPLICABLE RULES .....</b>                                    | <b>16</b> |
| <b>8. FCC PART 15 REQUIREMENTS &amp; RSS 210 REQUIREMENTS .....</b> | <b>25</b> |
| 8.1 MAXIMUM CONDUCTED OUTPUT POWER .....                            | 25        |
| 8.2 BAND EDGES MEASUREMENT .....                                    | 30        |
| 8.3 RADIATED UNDESIRABLE EMISSION .....                             | 47        |
| <b>APPENDIX I PHOTOGRAPHS OF TEST SETUP .....</b>                   | <b>84</b> |
| <b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>                              |           |



# 1. TEST RESULT CERTIFICATION

**Applicant:** Quanta Computer Inc.  
No. 188, Wen Hwa 2nd RD., Kuei Shan Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

**Manufacturer:** Quanta Computer Inc.  
No. 188, Wen Hwa 2nd RD., Kuei Shan Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

**Equipment Under Test:** Notebook Computer

**Trade Name:** TOSHIBA

**FCC Model Number:** Satellite P30W-B, Satellite Click 2 Pro P30W-B, Satellite Click 2 Pro P35W-B, dynabook P53

**IC Model Number:** Satellite P30W-B

**Date of Test:** April 17 ~ May 9, 2014

| APPLICABLE STANDARDS   |                         |
|--|-------------------------|
| STANDARD   | TEST RESULT             |
| FCC 47 CFR Part 15 Subpart E & Industry Canada RSS-210 Issue 8 <small>December, 2010</small> | No non-compliance noted |

### We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407 and Industry Canada RSS-210 Issue 8.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

---

Miller Lee  
Section Manager  
Compliance Certification Services Inc.

---

Angel Cheng  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

|   |  |                        |                              |                           |                         |
|---|--|------------------------|------------------------------|---------------------------|-------------------------|
| <b>Product</b>  | Notebook Computer  |                        |                              |                           |                         |
| <b>Trade Name</b>   | TOSHIBA  |                        |                              |                           |                         |
| <b>FCC Model Number</b>                                   | Satellite P30W-B, Satellite Click 2 Pro P30W-B, Satellite Click 2 Pro P35W-B, dynabook P53   |                        |                              |                           |                         |
| <b>IC Model Number</b>                                    | Satellite P30W-B   |                        |                              |                           |                         |
| <b>Model Discrepancy</b>                                  | All the specification and layout are identical except they come with different model numbers for marketing purposes.   |                        |                              |                           |                         |
| <b>Received Date</b>                                      | March 26, 2014   |                        |                              |                           |                         |
| <b>Power Supply</b>                                       | Powered from host device   |                        |                              |                           |                         |
| <b>Operating Frequency Range &amp; Number of Channels</b> |  | <b>Mode</b>            | <b>Frequency Range (MHz)</b> | <b>Number of Channels</b> |                         |
|   | UNII Band I  | IEEE 802.11a           | 5180 – 5240                  | 4 Channels                |                         |
|   |  | IEEE 802.11n HT 20 MHz | 5180 – 5240                  | 4 Channels                |                         |
|   |  | IEEE 802.11n HT 40 MHz | 5190 ~ 5230                  | 2 Channels                |                         |
|   |  | IEEE 802.11n HT 80 MHz | 5210                         | 1 Channels                |                         |
|   | UNII Band II   | IEEE 802.11a           | 5260 - 5320                  | 4 Channels                |                         |
|   |  | IEEE 802.11n HT 20 MHz | 5260 - 5320                  | 4 Channels                |                         |
|   |  | IEEE 802.11n HT 40 MHz | 5270 - 5310                  | 2 Channels                |                         |
|   |  | IEEE 802.11n HT 80 MHz | 5290                         | 1 Channels                |                         |
|   | UNII Band III  | IEEE 802.11a           | 5500 - 5700                  | 8 Channels                |                         |
|   |  | IEEE 802.11n HT 20 MHz | 5500 – 5700                  | 8 Channels                |                         |
|   |  | IEEE 802.11n HT 40 MHz | 5510 - 5670                  | 3 Channels                |                         |
|   |  | IEEE 802.11n HT 80 MHz | 5530 - 5690                  | 2 Channels                |                         |
| <b>Transmit Power</b>                                     |  | <b>Mode</b>            | <b>Frequency Range (MHz)</b> | <b>Output Power (dBm)</b> | <b>Output Power (w)</b> |
|   | UNII Band I  | IEEE 802.11a           | 5180 – 5240                  | 13.46                     | 0.0222                  |
|   |  | IEEE 802.11n HT 20 MHz | 5180 – 5240                  | 16.48                     | 0.0445                  |
|   |  | IEEE 802.11n HT 40 MHz | 5190 ~ 5230                  | 16.48                     | 0.0445                  |
|   |  | IEEE 802.11n HT 80 MHz | 5210                         | 11.49                     | 0.0141                  |
|   | UNII Band II   | IEEE 802.11a           | 5260 - 5320                  | 13.50                     | 0.0224                  |
|   |  | IEEE 802.11n HT 20 MHz | 5260 - 5320                  | 16.51                     | 0.0448                  |
|   |  | IEEE 802.11n HT 40 MHz | 5270 - 5310                  | 14.03                     | 0.0253                  |
|   |  | IEEE 802.11n HT 80 MHz | 5290                         | 13.74                     | 0.0237                  |
|   | UNII Band III  | IEEE 802.11a           | 5500 - 5700                  | 13.48                     | 0.0223                  |
|   |  | IEEE 802.11n HT 20 MHz | 5500 – 5700                  | 16.49                     | 0.0446                  |
|   |  | IEEE 802.11n HT 40 MHz | 5510 - 5670                  | 16.46                     | 0.0443                  |
|   |  | IEEE 802.11n HT 80 MHz | 5530 - 5690                  | 16.50                     | 0.0447                  |
| <b>Modulation Technique</b>                               | OFDM (QPSK, BPSK, 16-QAM, 64-QAM)  |                        |                              |                           |                         |
| <b>Transmit Data Rate</b>                                 | IEEE 802.11a mode: 54, 48, 36, 24, 18, 12, 9, 6 Mbps<br>IEEE 802.11n HT 20 mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps)<br>IEEE 802.11n HT 40 mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)<br>IEEE 802.11n HT 80 mode: OFDM (29.3, 58.5, 87.8, 117, 175.5, 234, 263.3, 292.5, 351, 390, 468, 526.5, 585, 702, 780 Mbps) |                        |                              |                           |                         |
| <b>Antenna Specification</b>                              | Antenna Gain: 2.45 dBi   |                        |                              |                           |                         |
| <b>Antenna Designation</b>                                | PIFA Antenna   |                        |                              |                           |                         |



**Operation Frequency:**

| UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) |       |         |       |         |       |
|--|-------|---------|-------|---------|-------|
| CHANNEL  | MHz   | CHANNEL | MHz   | CHANNEL | MHz   |
| 36   | 5.18  | 71      | 5.355 | 106     | 5.53  |
| 37   | 5.185 | 72      | 5.36  | 107     | 5.535 |
| 38   | 5.19  | 73      | 5.365 | 108     | 5.54  |
| 39   | 5.195 | 74      | 5.37  | 109     | 5.545 |
| 40   | 5.2   | 75      | 5.375 | 110     | 5.55  |
| 41   | 5.205 | 76      | 5.38  | 111     | 5.555 |
| 42   | 5.21  | 77      | 5.385 | 112     | 5.56  |
| 43   | 5.215 | 78      | 5.39  | 113     | 5.565 |
| 44   | 5.22  | 79      | 5.395 | 114     | 5.57  |
| 45   | 5.225 | 80      | 5.4   | 115     | 5.575 |
| 46   | 5.23  | 81      | 5.405 | 116     | 5.58  |
| 47   | 5.235 | 82      | 5.41  | 117     | 5.585 |
| 48   | 5.24  | 83      | 5.415 | 118     | 5.59  |
| 49   | 5.245 | 84      | 5.42  | 119     | 5.595 |
| 50   | 5.25  | 85      | 5.425 | 120     | 5.6   |
| 51   | 5.255 | 86      | 5.43  | 121     | 5.605 |
| 52   | 5.26  | 87      | 5.435 | 122     | 5.61  |
| 53   | 5.265 | 88      | 5.44  | 123     | 5.615 |
| 54   | 5.27  | 89      | 5.445 | 124     | 5.62  |
| 55   | 5.275 | 90      | 5.45  | 125     | 5.625 |
| 56   | 5.28  | 91      | 5.455 | 126     | 5.63  |
| 57   | 5.285 | 92      | 5.46  | 127     | 5.635 |
| 58   | 5.29  | 93      | 5.465 | 128     | 5.64  |
| 59   | 5.295 | 94      | 5.47  | 129     | 5.645 |
| 60   | 5.3   | 95      | 5.475 | 130     | 5.65  |
| 61   | 5.305 | 96      | 5.48  | 131     | 5.655 |
| 62   | 5.31  | 97      | 5.485 | 132     | 5.66  |
| 63   | 5.315 | 98      | 5.49  | 133     | 5.665 |
| 64   | 5.32  | 99      | 5.495 | 134     | 5.67  |
| 65   | 5.325 | 100     | 5.5   | 135     | 5.675 |
| 66   | 5.33  | 101     | 5.505 | 136     | 5.68  |
| 67   | 5.335 | 102     | 5.51  | 137     | 5.685 |
| 68   | 5.34  | 103     | 5.515 | 138     | 5.69  |
| 69   | 5.345 | 104     | 5.52  | 139     | 5.695 |
| 70   | 5.35  | 105     | 5.525 | 140     | 5.7   |

**Remark:** The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.



### **3. TEST METHODOLOGY**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2009 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47 Part 15.207, 15.209 and 15.247, RSS-GEN Issue 2, and RSS-210 Issue 8.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

##### **Radiated Emissions**

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                 | MHz             | GHz              |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 -         | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.52525           | 2655 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 156.7 - 156.9       | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 162.0125 - 167.17   | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 167.72 - 173.2      | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 240 - 285           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              | 322 - 335.4         |                 |                  |

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.





### 3.5 DESCRIPTION OF TEST MODES

The EUT (FCC model: Satellite P30W-B, IC model: Satellite P30W-B) had been tested under operating condition.

The EUT is a 2x2 configuration spatial MIMO (2TX & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

#### UNII Band I:

##### **IEEE 802.11a for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6.5Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 40 MHz Channel for 5190 ~ 5230MHz:**

Channel Low (5190MHz) and Channel High (5230MHz) with 13.5Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 80 MHz Channel for 5190 ~ 5230MHz:**

Channel Low(5210MHz) with 29.3Mbps data rate were chosen for full testing.

#### UNII Band II:

##### **IEEE 802.11a for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 20 MHz for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6.5Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 40 MHz for 5270 ~ 5310MHz:**

Channel Low (5270MHz) and Channel High (5310MHz) with 13.5Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 80 MHz for 5270 ~ 5310MHz:**

Channel Low(5290MHz) with 29.3Mbps data rate were chosen for full testing..



**UNII Band III:**

**IEEE 802.11a for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5580MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5580MHz) and Channel High (5700MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz for 5510 ~ 5670MHz:**

Channel Low (5510MHz), Channel Mid (5590MHz) and Channel High (5670MHz) with 13.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 80 MHz for 5510 ~ 5670MHz:**

Channel Low (5530MHz), Channel High (5690MHz) and Channel with 29.3Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the worst case was recorded.

Test items for conducted and radiated emission were performed for report. Other testing data please refer to module (Brand: Intel, Model: 7260NGW, FCC ID: PD97260NG and PD97260NGU))



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.*

| Conducted Emissions Test Site |              |         |               |                 |
|-------------------------------|--------------|---------|---------------|-----------------|
| Name of Equipment             | Manufacturer | Model   | Serial Number | Calibration Due |
| Spectrum Analyzer             | Agilent      | E4446A  | MY43360131    | 03/19/2015      |
| Power Meter                   | Anritsu      | ML2495A | 1012009       | 06/03/2015      |
| Power Sensor                  | Anritsu      | MA2411A | 0917072       | 06/03/2015      |

| 3M Chamber Test Site |                    |                          |               |                 |
|----------------------|--------------------|--------------------------|---------------|-----------------|
| Name of Equipment    | Manufacturer       | Model                    | Serial Number | Calibration Due |
| Spectrum Analyzer    | Agilent            | E4446A                   | US42510268    | 11/05/2014      |
| EMI Test Receiver    | R&S                | ESCI                     | 100064        | 02/27/2015      |
| Pre-Amplifier        | Mini-Circuits      | ZFL-1000LN               | SF350700823   | 01/11/2015      |
| Pre-Amplifier        | MITEQ              | AFS44-00102650-42-10P-44 | 1415367       | 11/18/2014      |
| Bilog Antenna        | Sunol Sciences     | JB3                      | A030105       | 10/01/2014      |
| Horn Antenna         | EMCO               | 3117                     | 00055165      | 02/12/2015      |
| Horn Antenna         | EMCO               | 3116                     | 2487          | 10/09/2014      |
| Loop Antenna         | EMCO               | 6502                     | 8905/2356     | 06/09/2014      |
| Turn Table           | CCS                | CC-T-1F                  | N/A           | N.C.R           |
| Antenna Tower        | CCS                | CC-A-1F                  | N/A           | N.C.R           |
| Controller           | CCS                | CC-C-1F                  | N/A           | N.C.R           |
| Site NSA             | CCS                | N/A                      | N/A           | 12/21/2014      |
| Test S/W             | EZ-EMC (CCS-3A1RE) |                          |               |                 |



### 4.3 MEASUREMENT UNCERTAINTY

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| 3M Semi Anechoic Chamber / 30M~200M   | +/- 4.0138  |
| 3M Semi Anechoic Chamber / 200M~1000M | +/- 3.9483  |
| 3M Semi Anechoic Chamber / 1G~8G      | +/- 2.5975  |
| 3M Semi Anechoic Chamber / 8G~18G     | +/- 2.6112  |
| 3M Semi Anechoic Chamber / 18G~26G    | +/- 2.7389  |
| 3M Semi Anechoic Chamber / 26G~40G    | +/- 2.9683  |

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.




All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.



### 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency          | Scope of Accreditation   | Logo  |
|---------|-----------------|--|---|
| USA     | FCC             | 3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements   | <br>FCC MRA: TW1039          |
| Taiwan  | TAF             | LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310<br>IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17<br>FCC OET Bulletin 65 + Supplement C,<br>EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959<br>FCC Method -47 CFR Part 15 Subpart B<br>IEC / EN 61000-3-2, IEC / EN 61000-3-3,<br>IEC / EN 61000-4-2/3/4/5/6/8/11 |                              |
| Canada  | Industry Canada | 3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform  | <br>IC 2324G-1<br>IC 2324G-2 |

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

| No. | Device Type | Brand | Model | Series No. | FCC ID | Data Cable | Power Cord |
|-----|-------------|-------|-------|------------|--------|------------|------------|
|     | N/A         |       |       |            |        |            |            |

**Remark:**

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



## 7. APPLICABLE RULES

### **RSS-210 §2 General Certification Requirements and Specifications**

#### **RSS-210 §2.1 RSS-Gen Compliance**

In addition to RSS-210, the requirements in RSS-Gen, *General Requirements and Information for the Certification of Radio Apparatus*, must be met.

#### **RSS-210 §2.2 Emissions Falling Within Restricted Frequency Bands**

Category I licence-exempt equipment is required to comply with the provisions in RSS-Gen with respect to emissions falling within restricted frequency bands. These restricted frequency bands are listed in RSS-Gen.

#### **RSS-210 §2.3 Receivers**

Category I equipment receivers for use with transmitters subject to RSS-210 must comply with the applicable requirements set out in RSS-Gen and be certified under RSS-210. Category II equipment receivers for use with transmitters subject to RSS-210 are exempt from certification, but are subject to compliance with RSS-Gen and RSS-310.

#### **RSS-210 §2.5 General Field Strength Limits**

RSS-Gen includes the general field strength limits of unwanted emissions, where applicable, for transmitters and receivers operating in accordance with the provisions specified in this standard. Unwanted emissions of transmitters and receivers are permitted to fall within the restricted bands listed in RSS-Gen, and including the TV bands, but fundamental emissions are prohibited in the restricted bands.

##### **RSS-210 §2.5.1 Transmitters with Wanted Emissions that are Within the General Field Strength Limits**

Whether or not their operation is addressed by published RSS standards, transmitters whose wanted and unwanted emissions are within the general field strength limits shown in RSS-Gen, they may operate in any of the frequency bands, other than the restricted bands listed in RSS-Gen and including the TV bands, and shall be certified under RSS-210. Under no conditions may the level of any unwanted emissions exceed the level of the fundamental emission.

**Note:** Devices operating below 490 kHz in which all emissions are at least 40 dB below the limit listed in RSS-Gen (*General Field Strength Limits for Transmitters at Frequencies below 30 MHz*) are Category II devices and are subject to RSS-310.





## **RSS-210 §2.7 Tables**

### **RSS-210 §Annex 8: Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands**

This section applies to systems that employ frequency hopping (FH) and digital modulation technology in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. Systems in these bands may employ frequency hopping, digital modulation and or a combination (hybrid) of both techniques.

A frequency hopping system that synchronizes with another or several other systems (to avoid frequency collision among them) via off-air sensing or via connecting cables is not hopping randomly and therefore is not in compliance with RSS-210.

### **RSS-210 §A8.1 Frequency Hopping Systems**

Frequency hopping systems are spread spectrum systems in which the carrier is modulated with coded information in a conventional manner causing a conventional spreading of the RF energy about the carrier frequency. The frequency of the carrier is not fixed but changes at fixed intervals under the direction of a coded sequence.

Frequency hopping systems are not required to employ all available hopping frequencies during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream.

Incorporation of intelligence into a frequency hopping system that enables it to recognize other users of the band and to avoid occupied frequencies is permitted, provided that the frequency hopping system does it individually, and independently chooses or adapts its hopset. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The following applies to frequency hopping systems in each of the three bands.

(a) The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system RF bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset while the long term distribution appears evenly distributed.



(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(d) Frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

### **RSS-210 §A8.2 Digital Modulation Systems**

These include systems employing digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to all three bands.

### **RSS-210 §A8.4 Transmitter Output Power and e.i.r.p. Requirements**

(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum peak conducted power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power (see RSS-Gen)

(5) Point-to-point systems in the bands 2400-2483.5 MHz and 5725-5850 MHz are permitted to have an e.i.r.p. higher than 4 W, provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omni-directional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding 4 W e.i.r.p. However, remote stations of point-to-multipoint systems shall be allowed to operate at greater than 4 W e.i.r.p. under the same conditions as for point-to-point systems.

**Note:** "Fixed, point-to-point operation", excludes point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information.



### **RSS-210 §A8.5 Out-of-band Emissions**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

### **RSS-Gen §2 General Information**

#### **RSS-Gen §2.1.2 Category II Equipment**

Category II equipment comprises radio devices where a standard has been prescribed but for which a TAC is not required, that is, equipment certification by Industry Canada or a Certification Body (CB) is not required (certification exempt), pursuant to subsection 4(3) of the Radiocommunication Act. The manufacturer or importer shall nevertheless ensure that the standards are complied with. A test report shall be available on request and the device shall be properly labelled.

#### **RSS-Gen §2.2 Receivers**

Receivers that are used for radiocommunication other than broadcasting are defined as Category I equipment or Category II equipment, subject to compliance with applicable Industry Canada standards.

Receivers shall be capable of operation only with transmitters for which RSSs are published. Receivers are classified as described in sections 2.2.1 and 2.2.2.

##### **RSS-Gen §2.2.1 Category I Equipment Receivers**

A receiver is classified as Category I equipment if it meets one of the following conditions:

- (a) a stand-alone receiver (see Note 1, below), which operates on any frequency in the band 30-960 MHz, and is used for the reception of signals in that frequency band from a transmitter classified as Category I equipment;
- (b) a Citizen's Band (CB) receiver (26.96-27.410 MHz);
- (c) a scanner receiver.

**Note 1:** A *stand-alone receiver* is defined as any receiver that is not permanently combined together with a transmitter in a single case (transceiver), in which it functions as the receiver component of the transceiver.

Receivers classified as Category I equipment shall comply with the limits for receiver spurious emissions set out in RSS-Gen; however, equipment certification is granted under the applicable RSS standard along with the associated transmitter classified as Category I equipment. Scanner receivers are covered under their own specific RSS.

##### **RSS-Gen §2.2.2 Category II Equipment Receivers**

A receiver is classified as Category II equipment if it does not meet any of the conditions of Section 2.2.1.

Category II receivers shall comply with the applicable testing, labelling and user manual requirements in RSS-310.



**RSS-Gen §5.6 Exposure of Humans to RF Fields**

Category I and Category II equipment shall comply with the applicable requirements of RSS-102.

**RSS-Gen §6 Receiver Spurious Emission Standard**

Receivers shall comply with the limits of spurious emissions set out in this section, measured over the frequency range determined in accordance with Section 4.10.

**RSS-Gen §6.1 Radiated Limits**

Radiated spurious emission measurements shall be performed with the receiver antenna connected to the receiver antenna terminals.

Spurious emissions from receivers shall not exceed the radiated limits shown in the table below:

**RSS-Gen Table 2 - Spurious Emission Limits for Receivers**

| Frequency (MHz) | Field Strength microvolts/m at 3 metres |
|-----------------|---|
| 30-88           | 100                                     |
| 88-216          | 150                                     |
| 216-960         | 200                                     |
| Above 960       | 500                                     |

\*Measurements for compliance with limits in the above table may be performed at distances other than 3 metres, in accordance with Section 7.2.7.



**RSS- Gen Table 3: Restricted Frequency Bands** <sup>(Note)</sup>

| MHz             | MHz                | MHz                 | MHz           | GHz         |
|-----------------|--------------------|---------------------|---------------|-------------|
| 0.090-0.110     | 8.37625-8.38675    | --                  | 1718.8-1722.2 | 9.0-9.2     |
| --              | 8.41425-8.41475    | 156.52475-156.52525 | 2200-2300     | 9.3-9.5     |
| 2.1735-2.1905   | 12.29-12.293       | 156.7-156.9         | 2310-2390     | 10.6-12.7   |
| 3.020-3.026     | 12.51975-12.52025  | --                  | --            | 13.25-13.4  |
| 4.125-4.128     | 12.57675-12.57725  | --                  | 2655-2900     | 14.47-14.5  |
| 4.17725-4.17775 | 13.36-13.41        | 240-285             | 3260-3267     | 15.35-16.2  |
| 4.20725-4.20775 | 16.42-16.423       | 322-335.4           | 3332-3339     | 17.7-21.4   |
| 5.677-5.683     | 16.69475-16.69525  | 399.9-410           | 3345.8-3358   | 22.01-23.12 |
| 6.215-6.218     | 16.80425-16.80475  | 608-614             | 3500-4400     | 23.6-24.0   |
| 6.26775-6.26825 | 25.5-25.67         | 960-1427            | 4500-5150     | 31.2-31.8   |
| 6.31175-6.31225 | 37.5-38.25         | 1435-1626.5         | 5350-5460     | 36.43-36.5  |
| 8.291-8.294     | 73-74.6; 74.8-75.2 | 1645.5-1646.5       | 7250-7750     | Above 38.6  |
| 8.362-8.366     | 108-138            | 1660-1710           | 8025-8500     |             |

*Note: Certain frequency bands listed in Table 2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard as well as RSS-310.*

**RSS- Gen Table 5: General Field Strength Limits for Transmitters at Frequencies Above 30 MHz**

| Frequency (MHz) | Field Strength (microvolt/m at 3 metres) |
|-----------------|--|
| 30-88           | 100                                      |
| 88-216          | 150                                      |
| 216-960         | 200                                      |
| Above 960       | 500                                      |

*Note: Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands(54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).*



**RSS- Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)**

| Frequency<br>(fundamental<br>or spurious) | Field Strength<br>(microvolts/m) | Magnetic<br>H-Field<br>(microamperes/m) | Measurement<br>Distance<br>(metres) |
|---|----------------------------------|---|-------------------------------------|
| 9-490 kHz                                 | 2,400/F<br>(F in kHz)            | 2,400/377F<br>(F in Hz)                 | 300                                 |
| 490-1.705 kHz                             | 24,000/F<br>(F in kHz)           | 24,000/377F<br>(F in kHz)               | 30                                  |
| 1.705-30 MHz                              | 30                               | N/A                                     | 30                                  |

*Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.*



### **RSS-Gen §7.1.2 Transmitter Antenna**

A transmitter can only be sold or operated with antennas with which it was approved. Transmitter may be approved with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest gain antenna of each combination of transmitter and antenna type for which approval is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type having equal or lesser gain as an antenna that had been successfully tested with the transmitter, will also be considered approved with the transmitter, and may be used and marketed with the transmitter. For Category I transmitters, the manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits. User manuals for transmitters shall display the following notice in a conspicuous location:

*Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.*

The above notice may be affixed to the device instead of displayed in the user manual.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

*This radio transmitter (identify the device by certification number, or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.*

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi) and required impedance for each.



**RSS-Gen §7.2.4 Transmitter and Receiver AC Power Lines Conducted Emission Limits**

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The more stringent limit applies at the frequency range boundaries.

The conducted emissions shall be measured with a 50 ohm/50 microhenry line impedance stabilization network (LISN).

**RSS-Gen Table 4 – AC Power Line Conducted Emission Limits**

| Frequency Range (MHz) | Conducted limit (dBμV) |           |
|-----------------------|------------------------|-----------|
|                       | Quasi-peak             | Average   |
| 0.15 to 0.5           | 66 to 56*              | 56 to 46* |
| 0.5 to 5              | 56                     | 46        |
| 5 to 30               | 60                     | 50        |

*\*Decreases with the logarithm of the frequency.*





## 8. FCC PART 15 REQUIREMENTS & RSS 210 REQUIREMENTS

### 8.1 MAXIMUM CONDUCTED OUTPUT POWER

#### LIMIT

##### **According to §15.407(a),**

- (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz.

*If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*

##### **According to RSS-210 §A9.2,**

- (1) For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or  $10 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
- (2) For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \text{ Log}_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

*In addition, devices with maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.*


*The peak power shall not exceed the limit as follow:*



## **TEST CONFIGURATION**

*The EUT was connected to a spectrum analyzer through a 50  $\Omega$  RF cable.*

## **TEST PROCEDURE**



Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

## **TEST RESULTS**

*No non-compliance noted*



**Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low     | 5180            | 13.41                                | 17.00       |
| Mid     | 5220            | 13.46                                | 17.00       |
| High    | 5240            | 13.42                                | 17.00       |

**Test mode: IEEE 802.11n HT 20 mode / 5180 ~ 5240MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Low     | 5180            | 13.40                      | 12.83                      | 16.13                                      | 17.00       |
| Mid     | 5220            | 13.45                      | 13.45                      | 16.46                                      | 17.00       |
| High    | 5240            | 13.46                      | 13.48                      | 16.48                                      | 17.00       |

**Test mode: IEEE 802.11n HT 40 mode / 5190 ~ 5230MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Low     | 5190            | 9.47                       | 9.92                       | 12.71                                      | 17.00       |
| High    | 5230            | 13.50                      | 13.43                      | 16.48                                      | 17.00       |

**Test mode: IEEE 802.11n HT 80 mode / 5210MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Mid     | 5210            | 8.55                       | 8.41                       | 11.49                                      | 17.00       |

**Remark:** Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000) + Chain 1 (10^(Output Power /10)/1000))



**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low     | 5260            | 13.46                                | 24.00       |
| Mid     | 5280            | 13.50                                | 24.00       |
| High    | 5320            | 13.42                                | 24.00       |

**Test mode: IEEE 802.11n HT 20 mode / 5260 ~ 5320MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Low     | 5260            | 13.46                      | 12.95                      | 16.22                                      | 24.00       |
| Mid     | 5280            | 13.50                      | 13.50                      | 16.51                                      | 24.00       |
| High    | 5320            | 13.42                      | 12.97                      | 16.21                                      | 24.00       |

**Test mode: IEEE 802.11n HT 40 mode / 5270 ~ 5310MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Low     | 5270            | 9.43                       | 9.94                       | 12.70                                      | 24.00       |
| High    | 5310            | 11.11                      | 10.92                      | 14.03                                      | 24.00       |

**Test mode: IEEE 802.11n HT 80 mode / 5290MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Mid     | 5290            | 10.48                      | 10.97                      | 13.74                                      | 24.00       |

**Remark:** Total Output Power (w) = Chain 0 (10<sup>^(Output Power /10)</sup>/1000) + Chain 1 (10<sup>^(Output Power /10)</sup>/1000)

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low     | 5500            | 13.46                                | 24.00       |
| Mid     | 5580            | 13.48                                | 24.00       |
| High    | 5700            | 12.95                                | 24.00       |

**Test mode: IEEE 802.11n HT 20 mode / 5500 ~ 5700MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Low     | 5500            | 13.46                      | 12.97                      | 16.23                                      | 24.00       |
| Mid     | 5580            | 13.48                      | 13.47                      | 16.49                                      | 24.00       |
| High    | 5700            | 12.95                      | 12.47                      | 15.73                                      | 24.00       |

**Test mode: IEEE 802.11n HT 40 mode / 5510 ~ 5670MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Low     | 5510            | 10.42                      | 10.41                      | 13.43                                      | 24.00       |
| Mid     | 5550            | 13.47                      | 13.42                      | 16.46                                      | 24.00       |
| High    | 5670            | 12.47                      | 13.47                      | 16.01                                      | 24.00       |

**Test mode: IEEE 802.11n HT 80 mode / 5530 ~ 5690MHz**

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|--|-------------|
| Low     | 5530            | 8.92                       | 8.93                       | 11.94                                      | 24.00       |
| High    | 5690            | 13.48                      | 13.49                      | 16.50                                      | 24.00       |

**Remark:** Total Output Power (w) = Chain 0 ( $10^{(Output\ Power / 10) / 1000}$ ) + Chain 1 ( $10^{(Output\ Power / 10) / 1000}$ )



## 8.2 BAND EDGES MEASUREMENT


### LIMIT

According to §15.407(b),

(1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

### Test Configuration

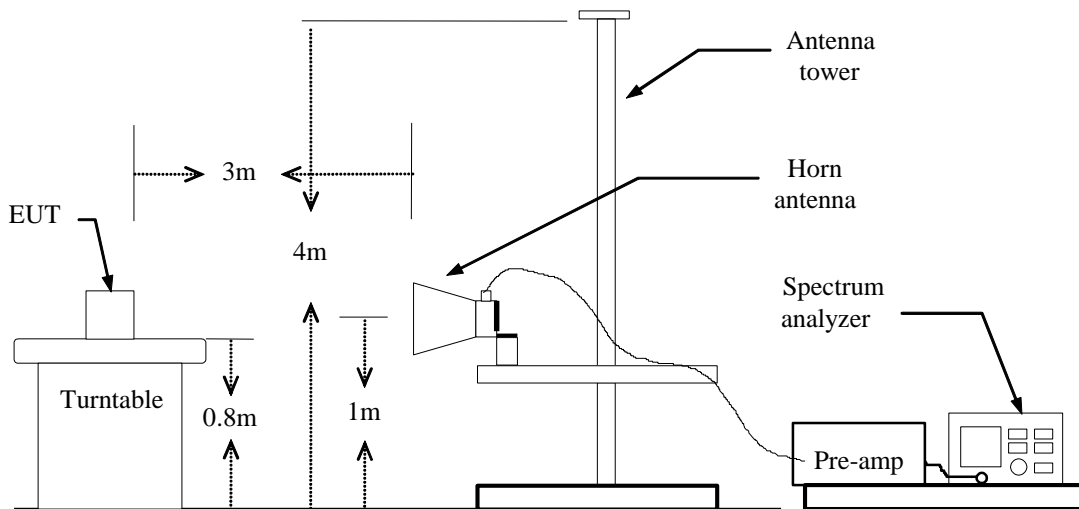

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz VBW=3MHz Sweep=100ms
  - (b) AVERAGE: RBW=1MHz VBW=300Hz
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS


Refer to attach spectrum analyzer data chart.



### Band Edges (IEEE 802.11a mode / 5180 MHz)


Detector mode: Peak

Polarity: Vertical

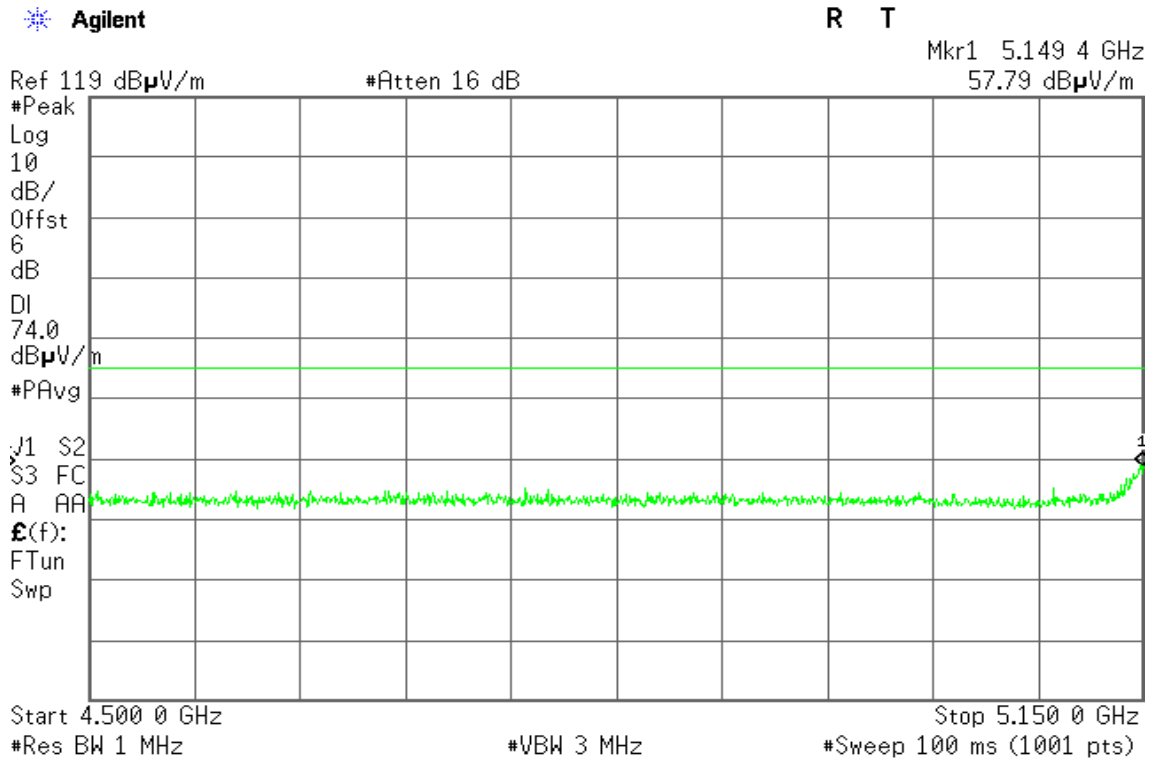

Detector mode: Average

Polarity: Vertical

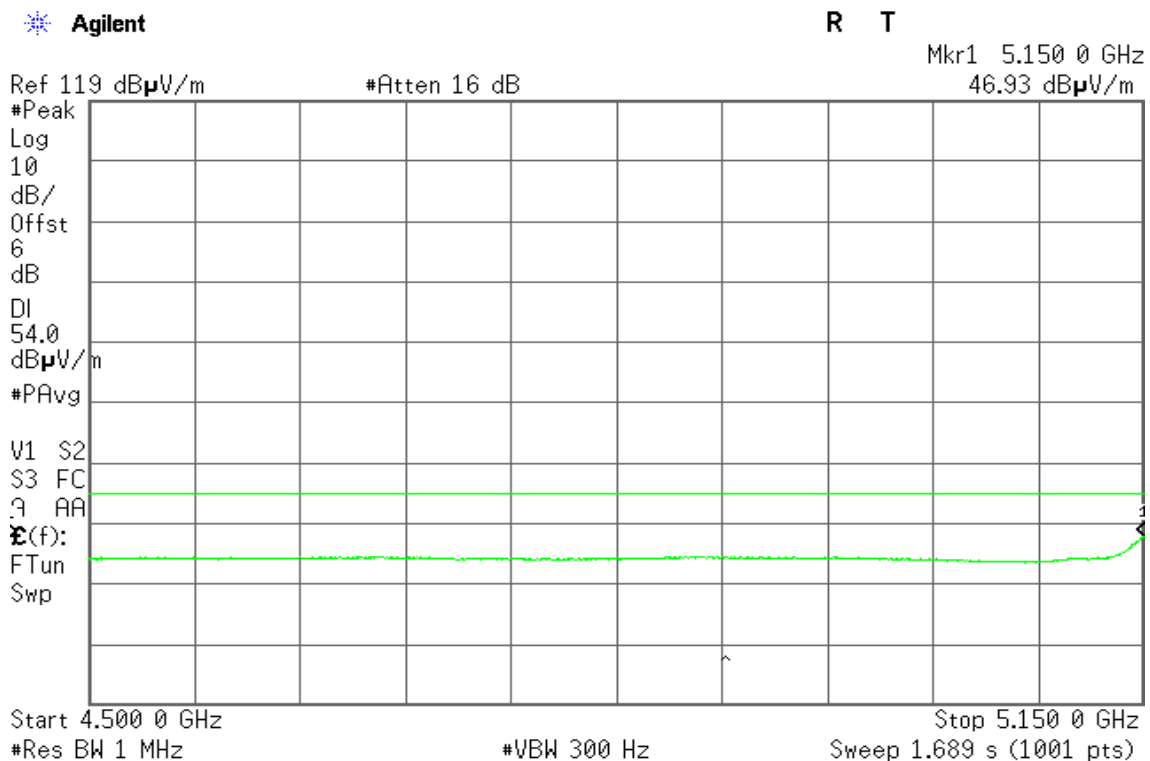




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

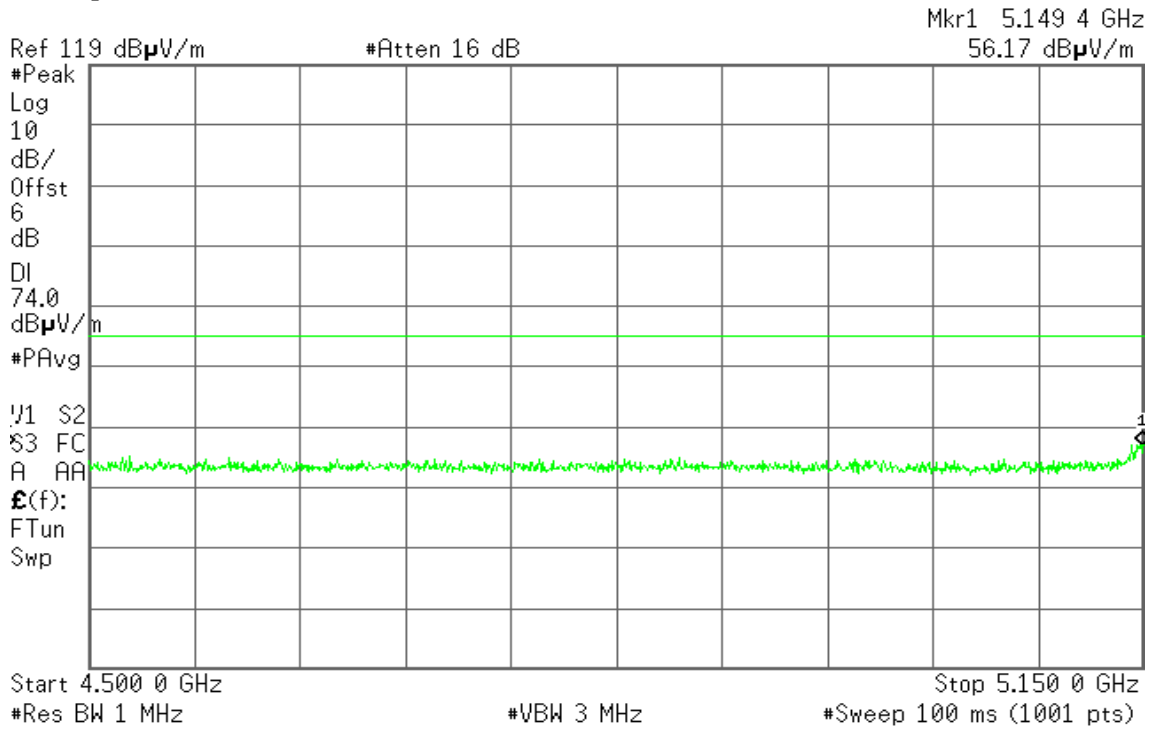


Detector mode: Average

Polarity: Horizontal

Agilent

R T

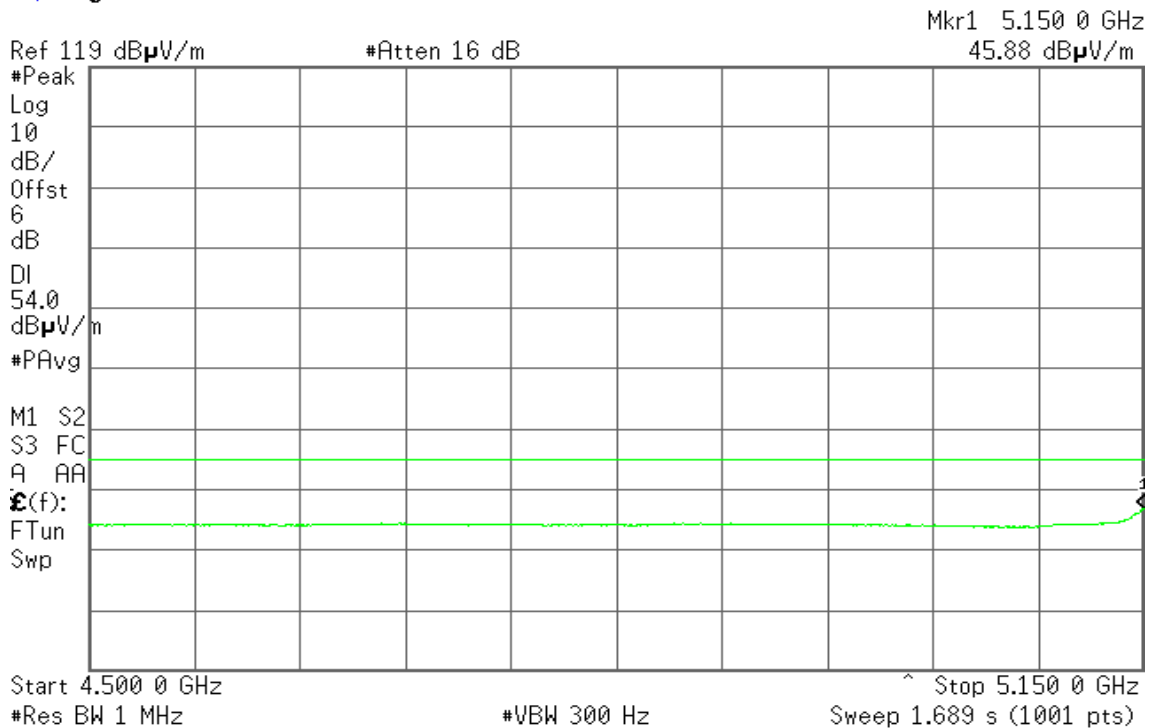






Band Edges (IEEE 802.11a mode / 5320 MHz)


Detector mode: Peak

Polarity: Vertical

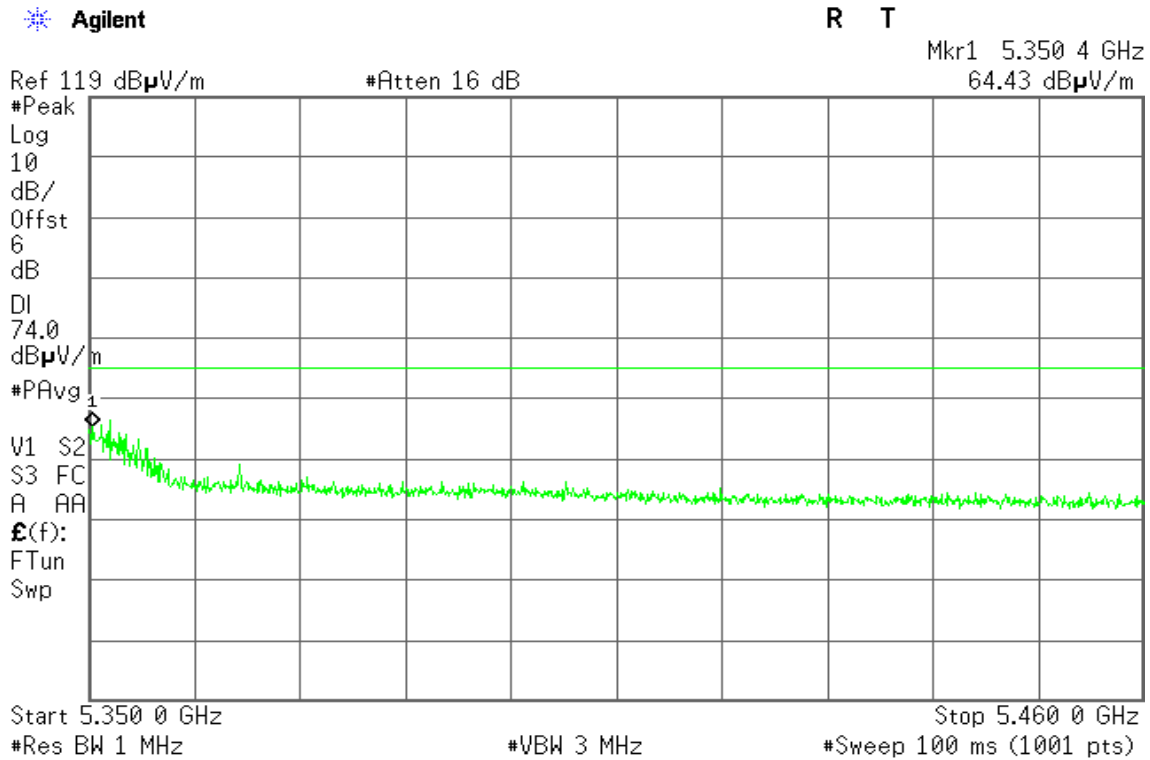

Detector mode: Average

Polarity: Vertical

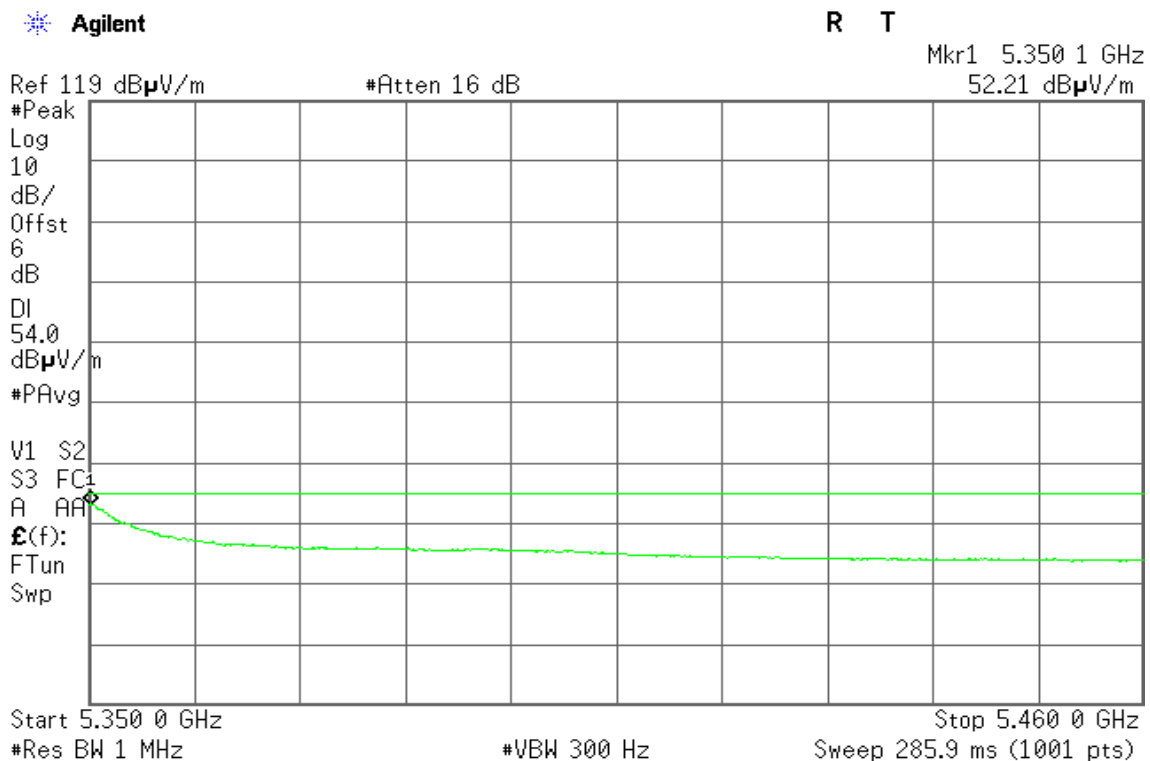




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

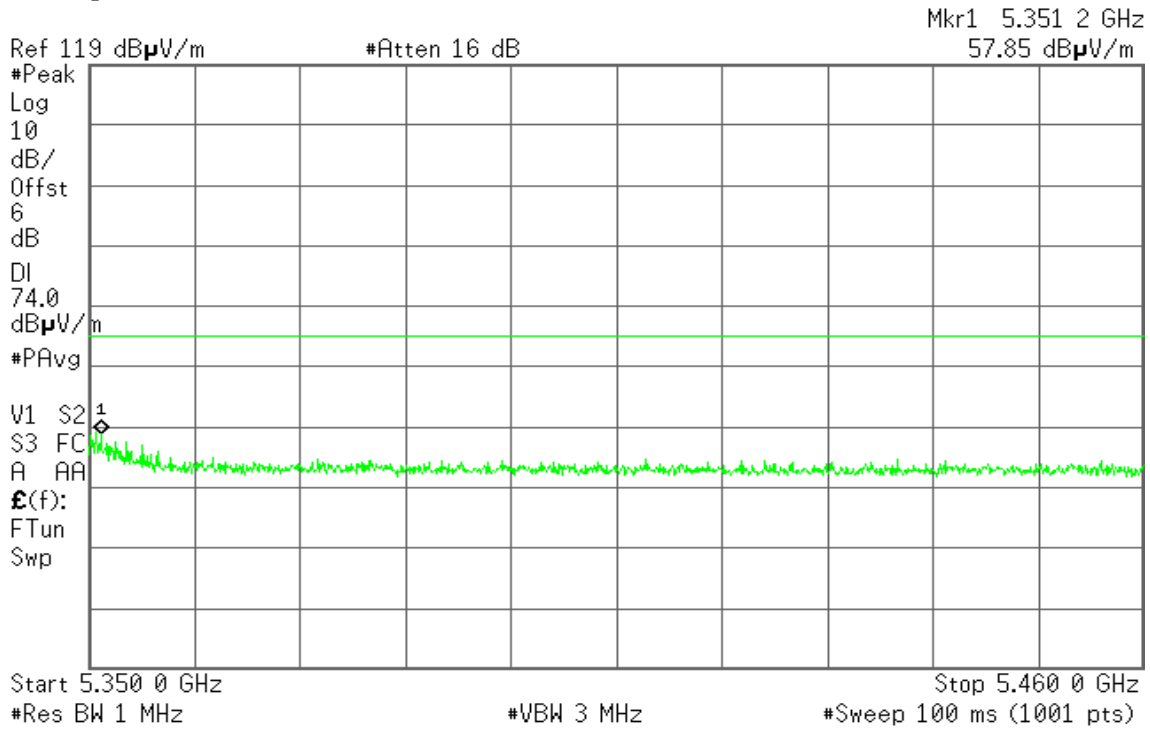

Detector mode: Average

Polarity: Horizontal

Agilent

R T






### Band Edges (IEEE 802.11n HT 20 mode / 5180 MHz)


Detector mode: Peak

Polarity: Vertical

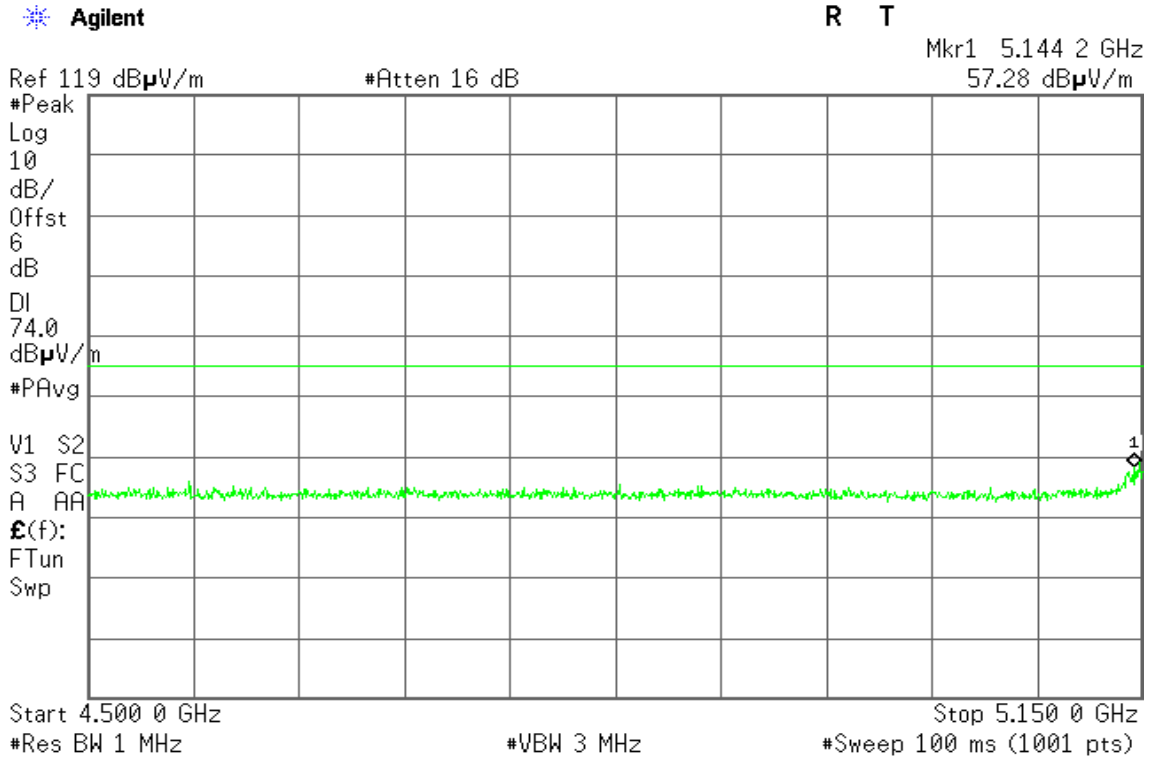

Detector mode: Average


Polarity: Vertical

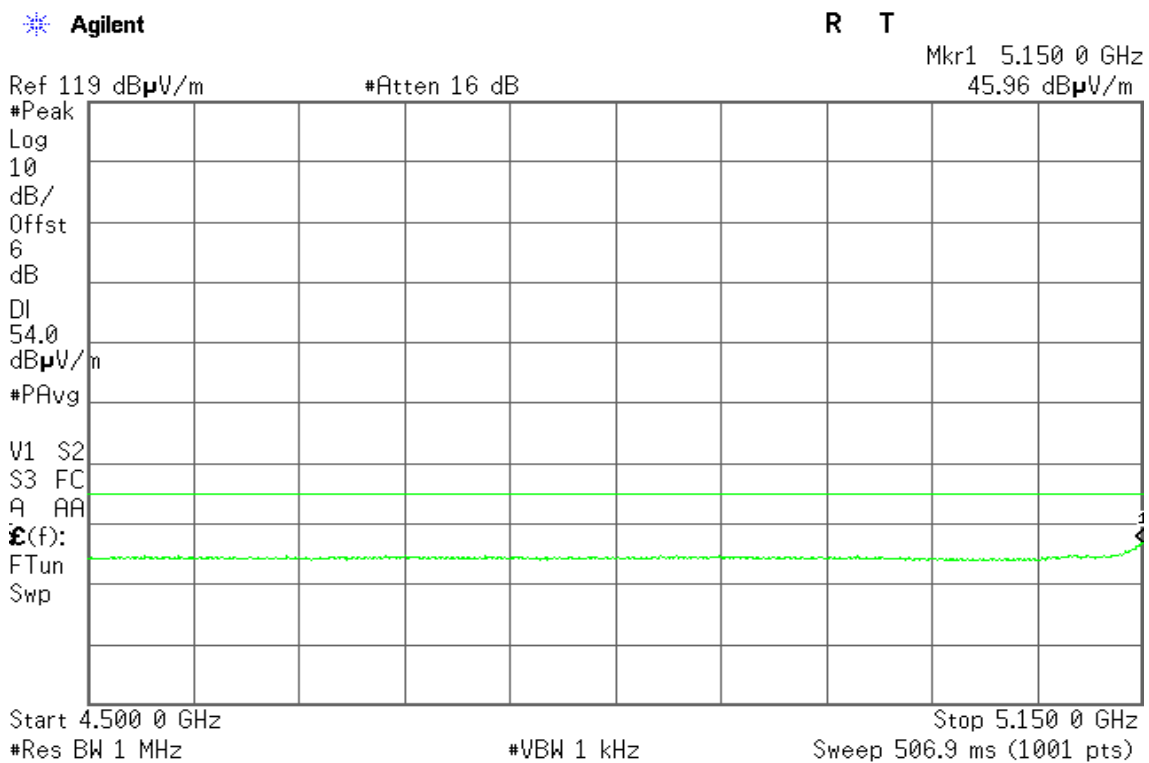




Detector mode: Peak

Polarity: Horizontal

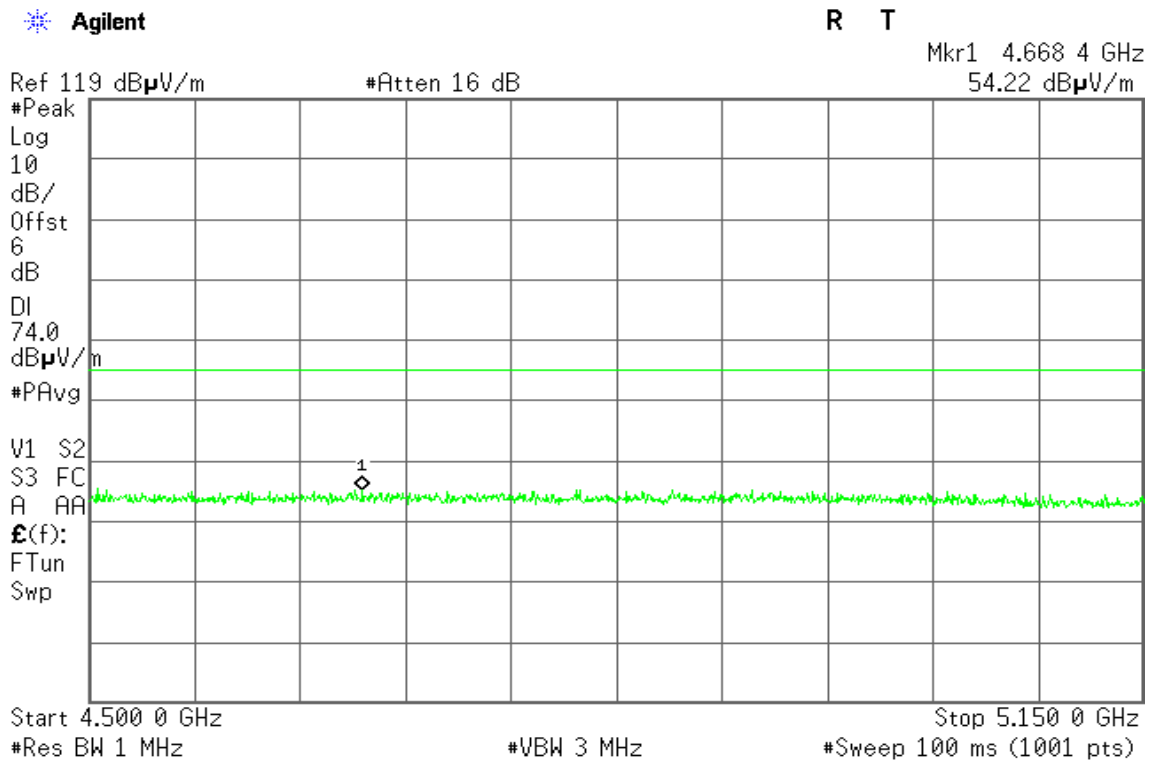

Detector mode: Average

Polarity: Horizontal

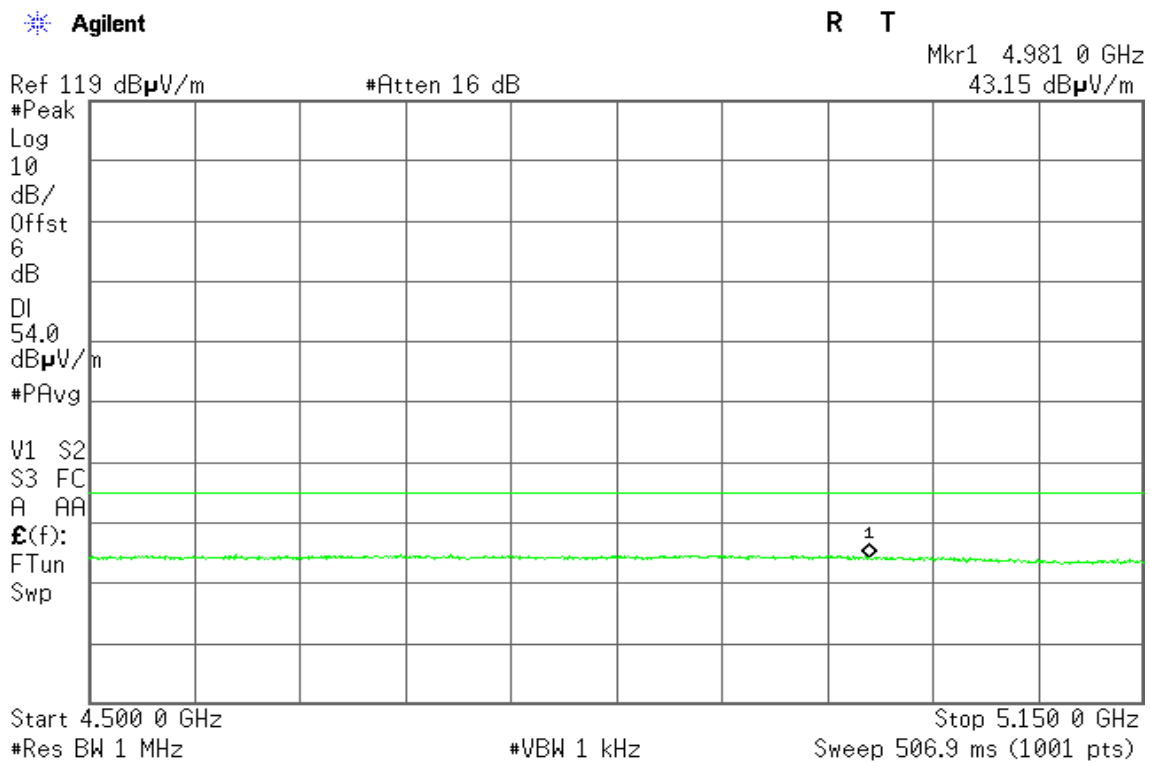




Band Edges (IEEE 802.11n HT 20 mode / 5320 MHz)


Detector mode: Peak

Polarity: Vertical

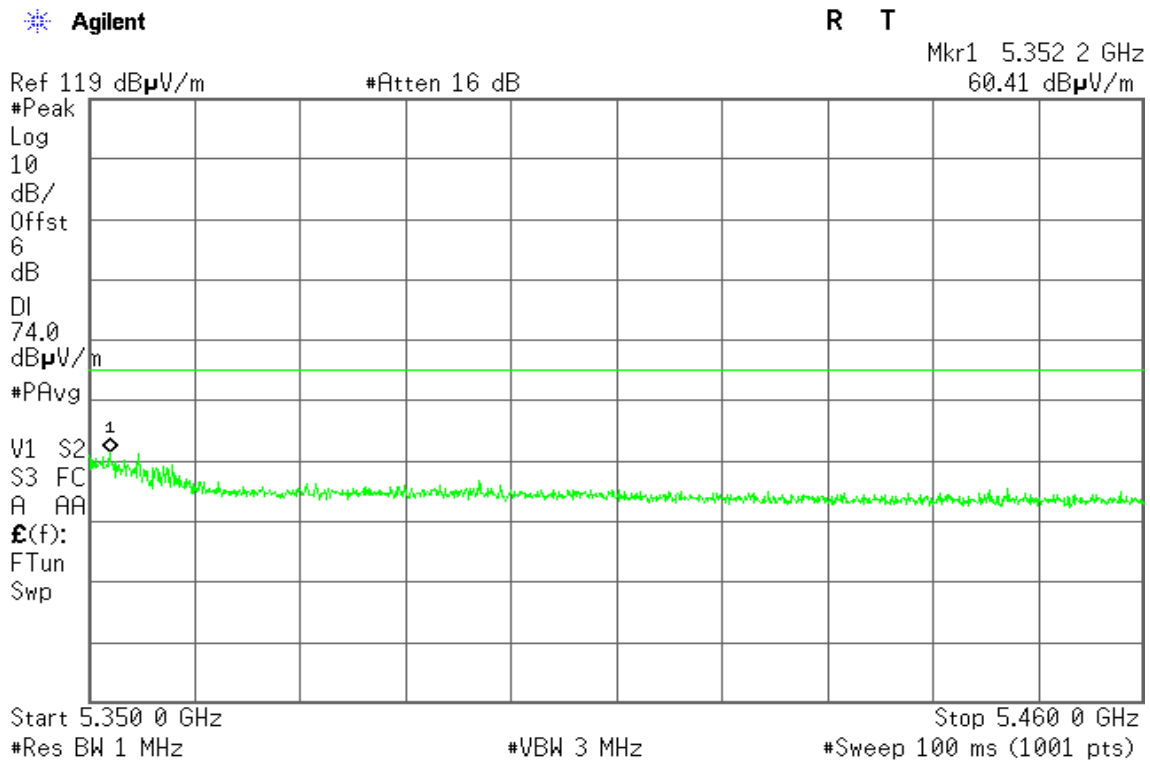

Detector mode: Average


Polarity: Vertical

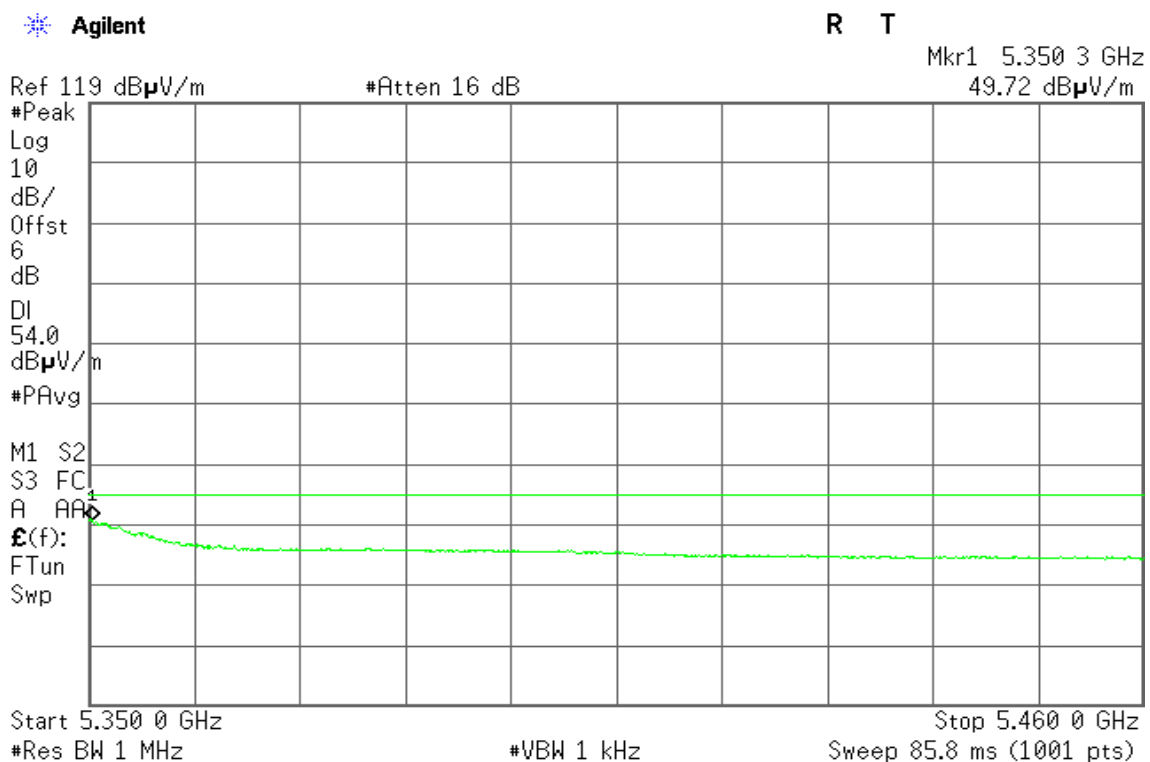




Detector mode: Peak

Polarity: Horizontal

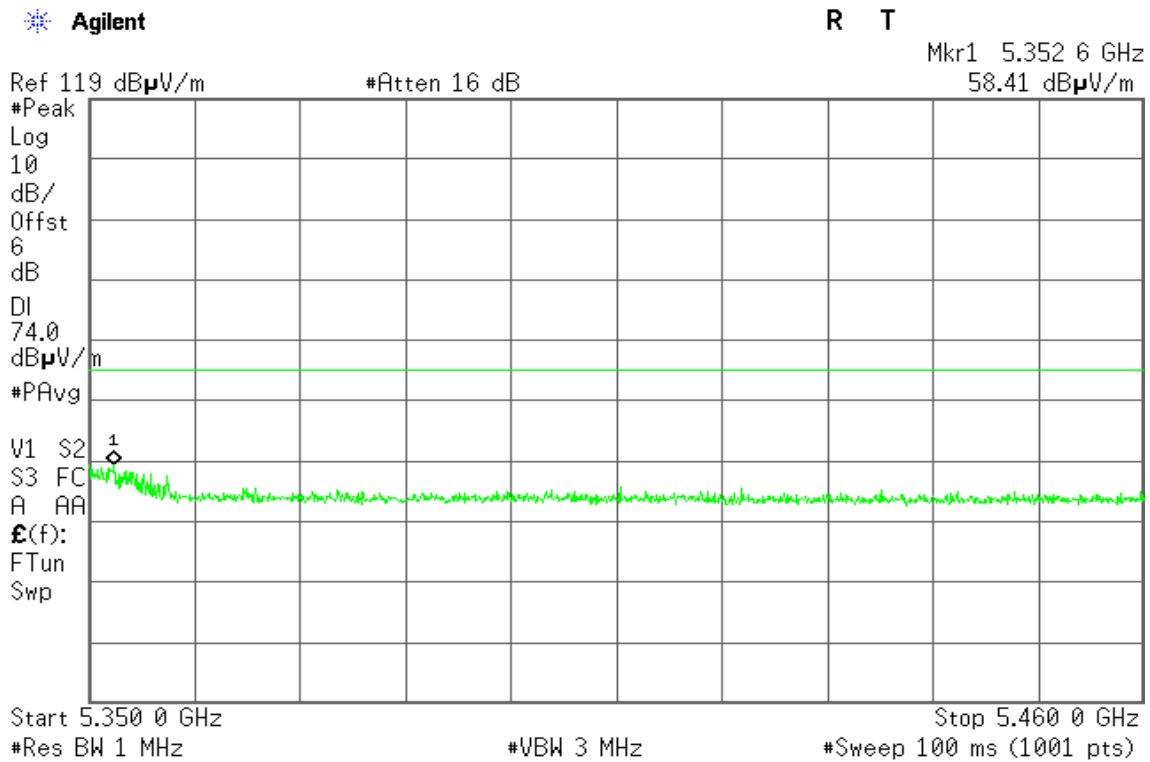

Detector mode: Average

Polarity: Horizontal

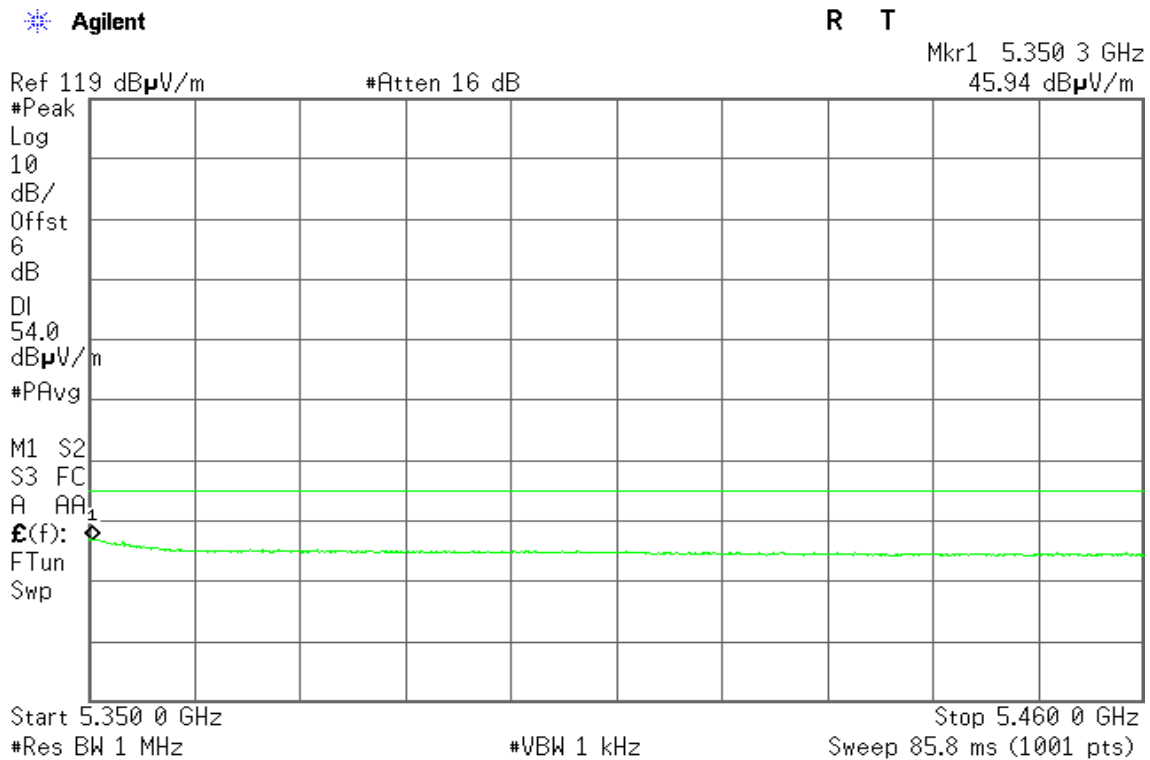




### Band Edges (IEEE 802.11n HT 40 mode / 5190 MHz)


Detector mode: Peak

Polarity: Vertical

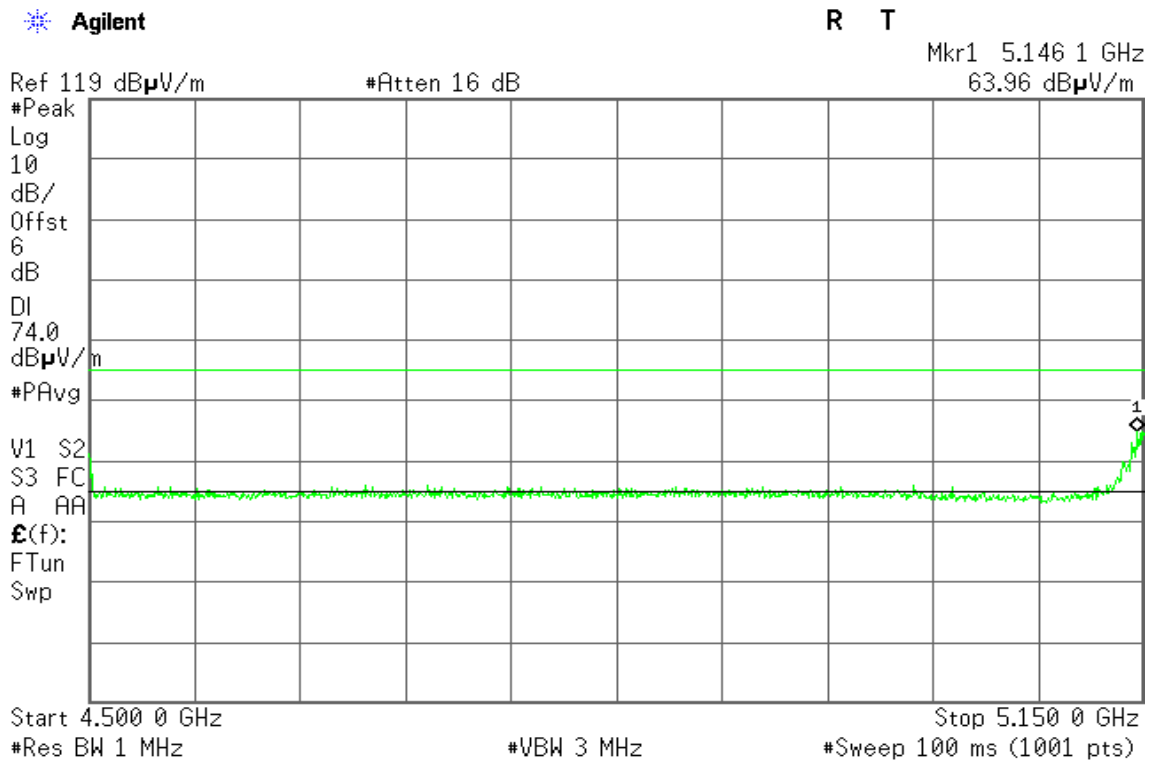

Detector mode: Average


Polarity: Vertical

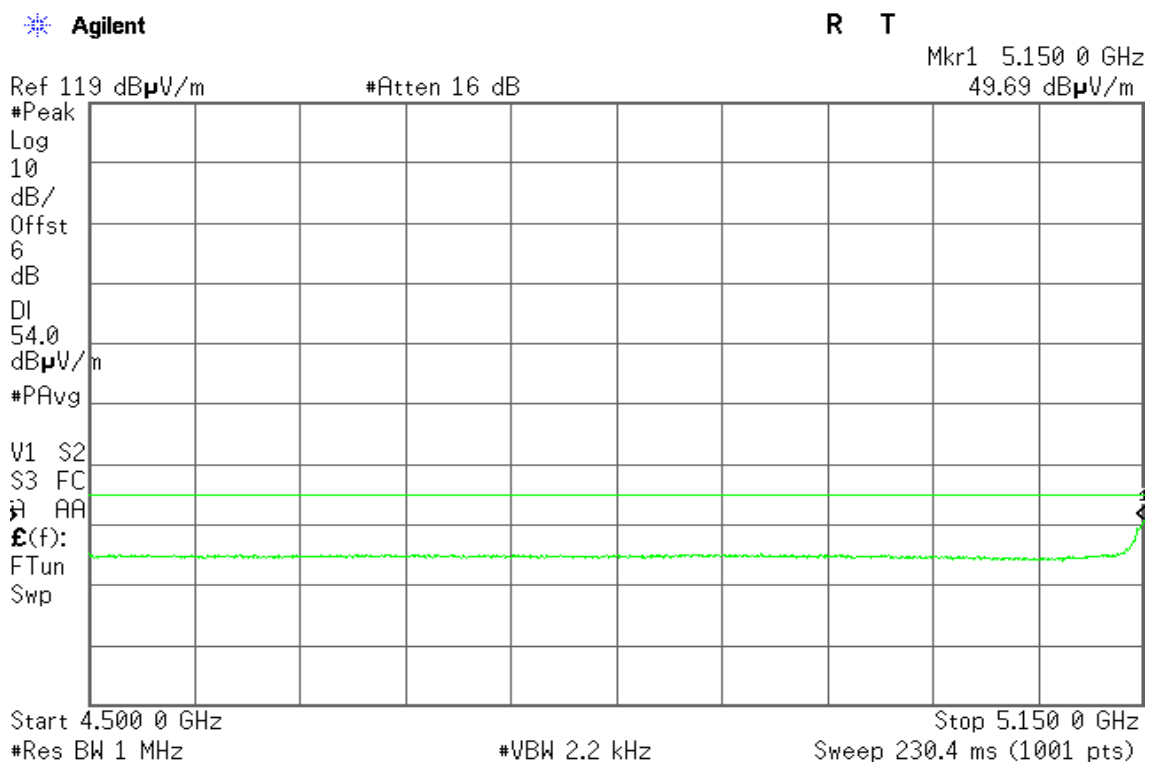




Detector mode: Peak

Polarity: Horizontal

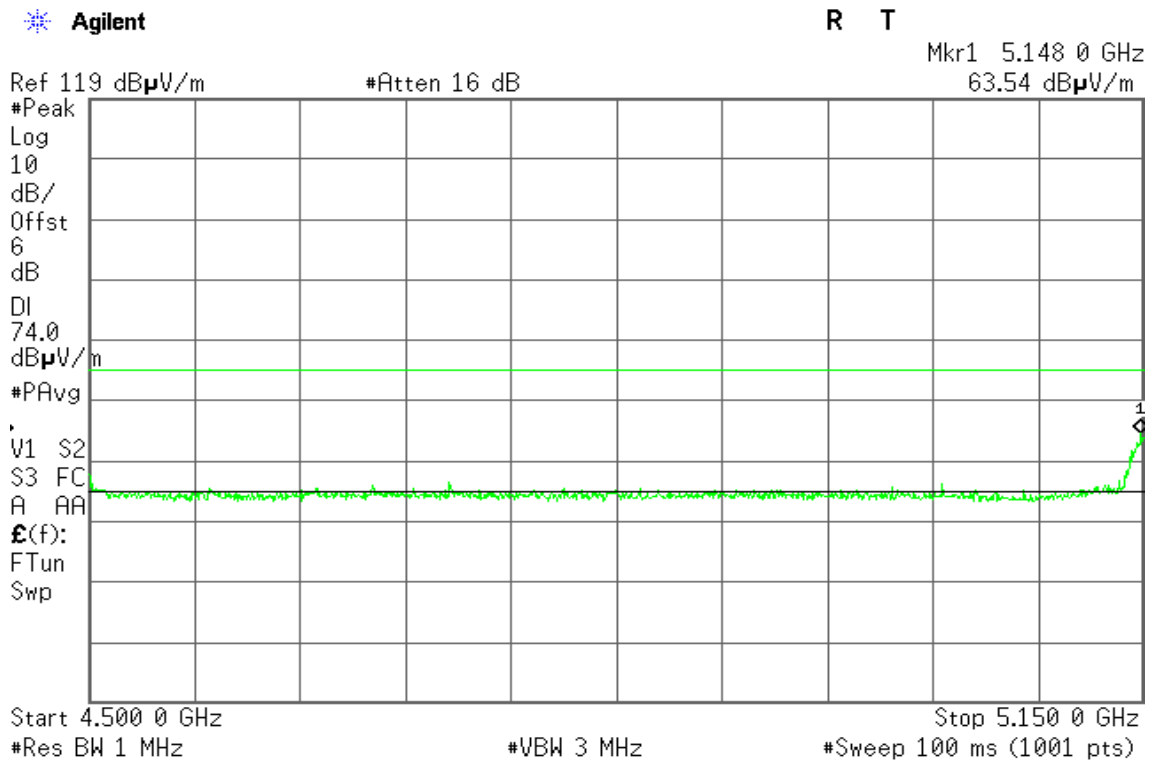

Detector mode: Average

Polarity: Horizontal

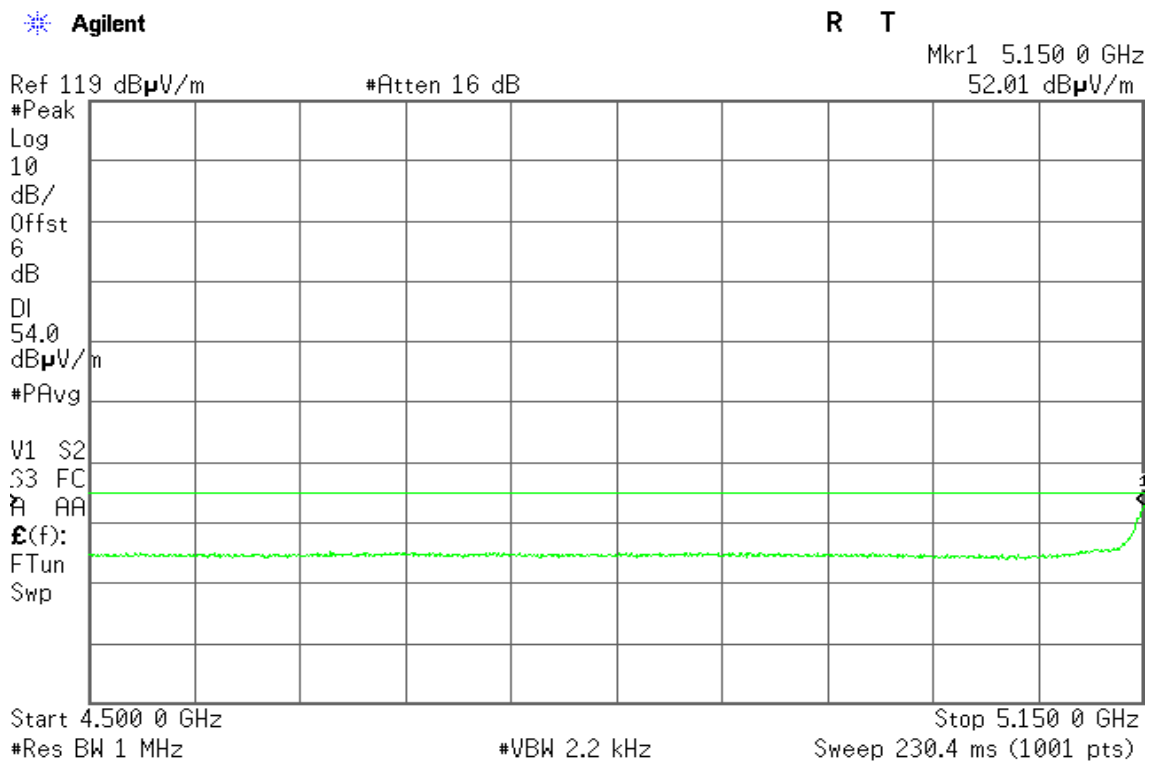






### Band Edges (IEEE 802.11n HT 40 mode / CH 5310 MHz)


Detector mode: Peak

Polarity: Vertical

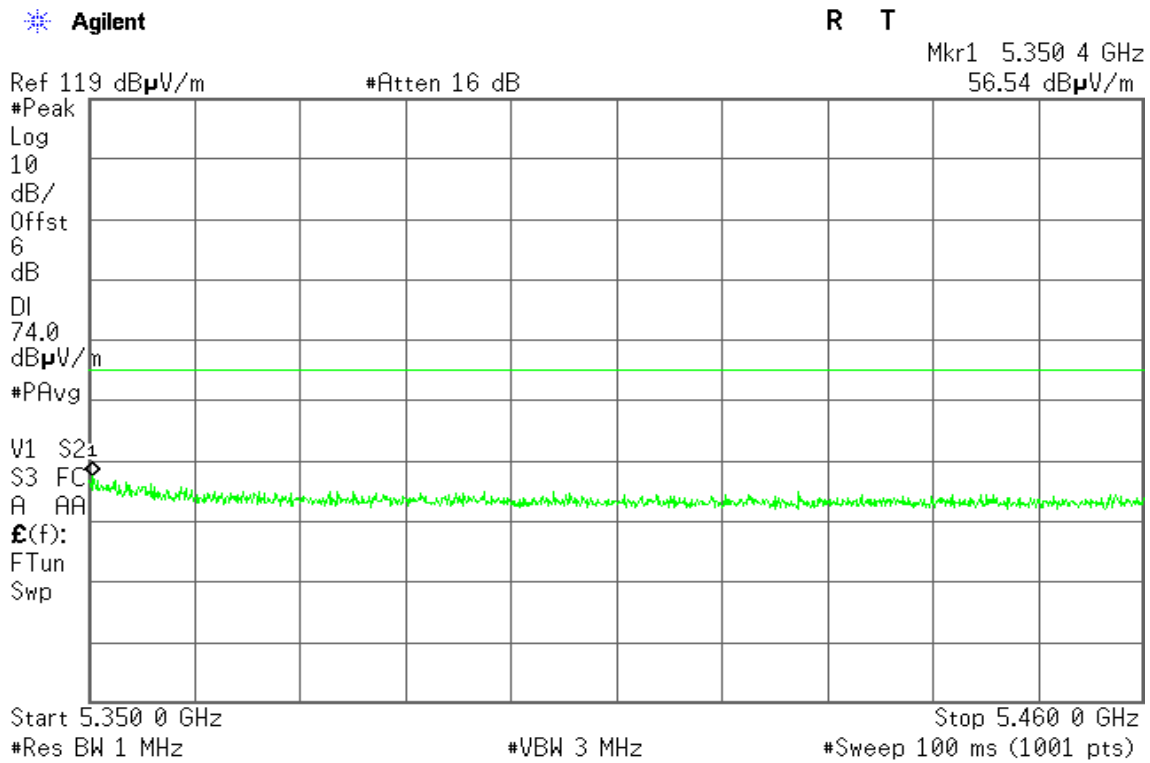

Detector mode: Average

Polarity: Vertical

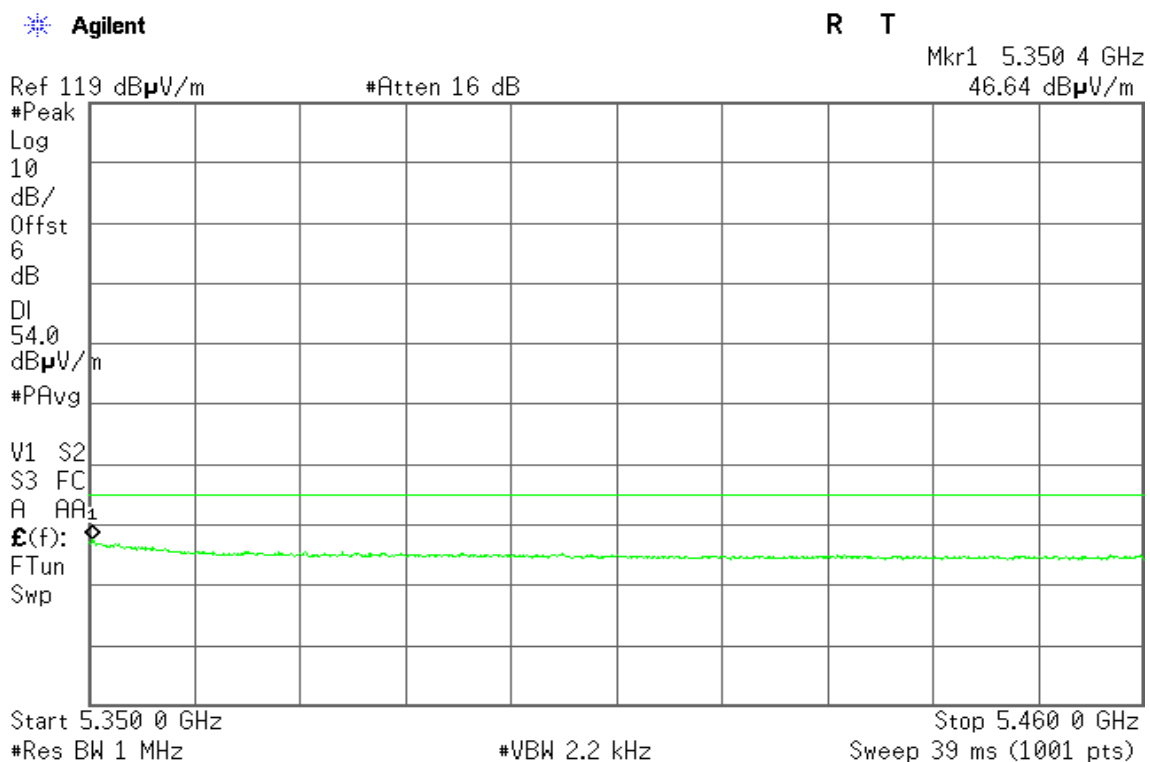




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

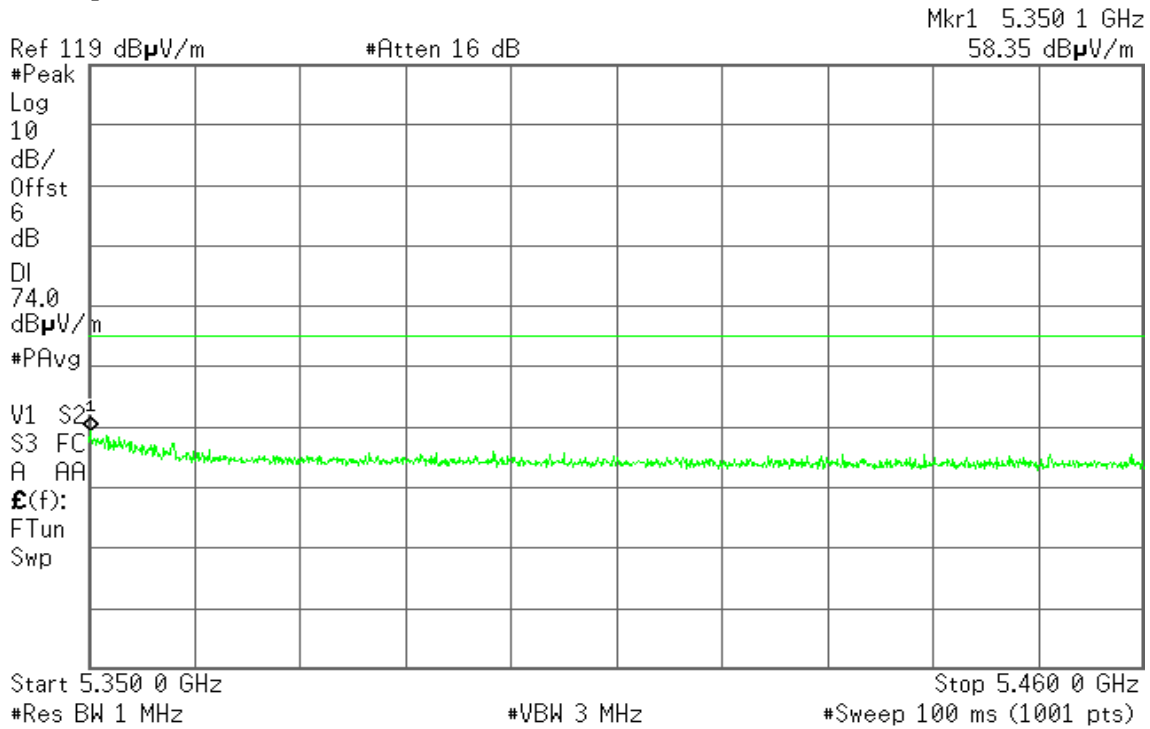


Detector mode: Average

Polarity: Horizontal

Agilent

R T

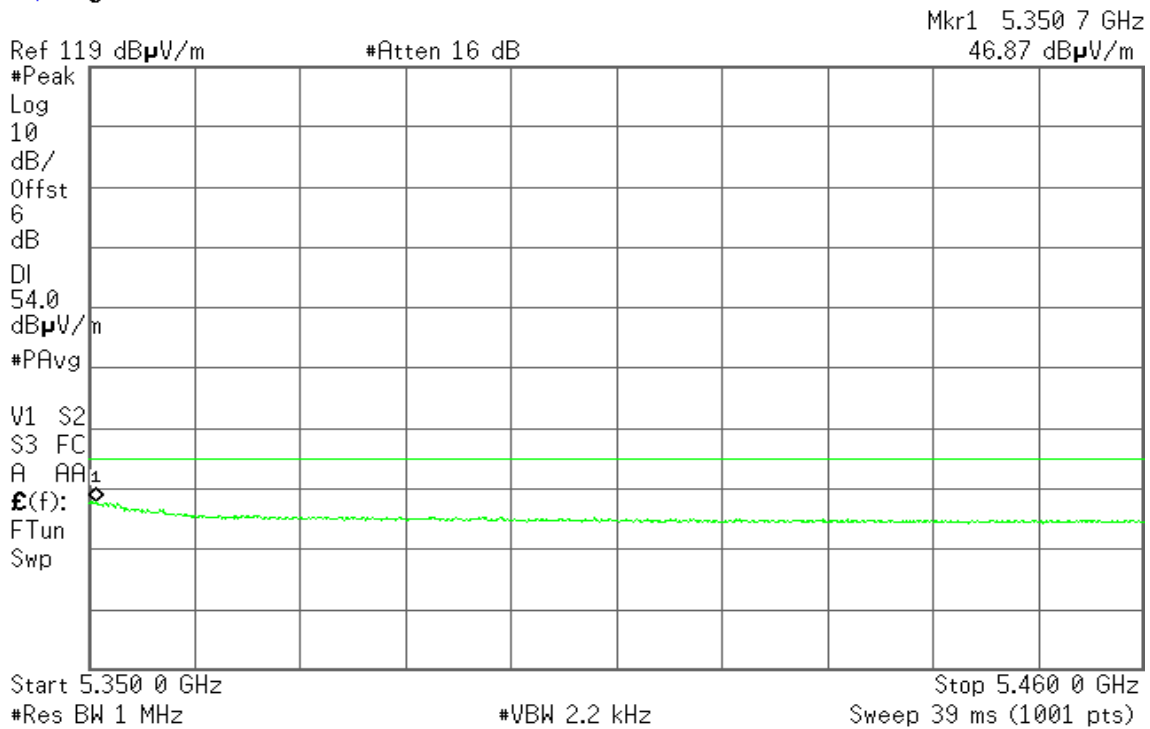




### Band Edges (IEEE 802.11n HT 80 mode / CH 5210 MHz)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

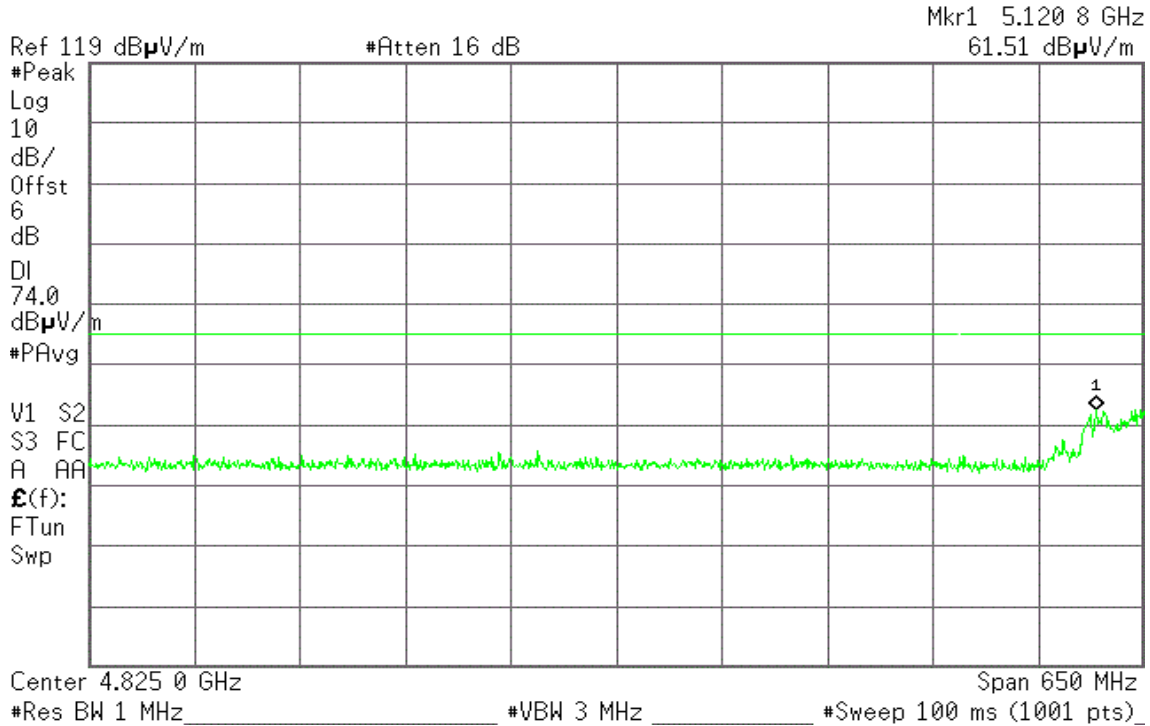


Detector mode: Average

Polarity: Vertical

Agilent

R T

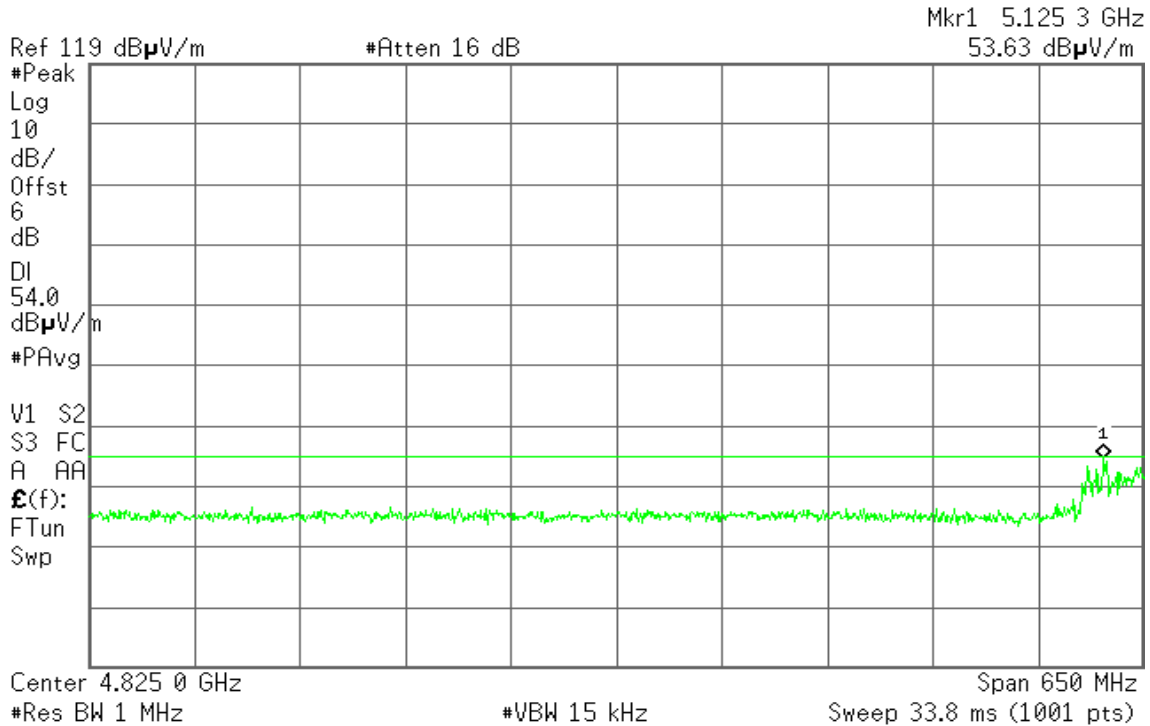



**Detector mode: Peak**

**Polarity: Horizontal**

Agilent


R T

Mkr1 5.127 9 GHz  
49.96 dB $\mu$ V/m

Ref 119 dB $\mu$ V/m

#Atten 16 dB

#Peak  
Log  
10  
dB/  
Offst  
6  
dB  
DI  
54.0  
dB $\mu$ V/m  
#PAvg  
V1 S2  
S3 FC  
A AA  
E(f):  
FTun  
Swp

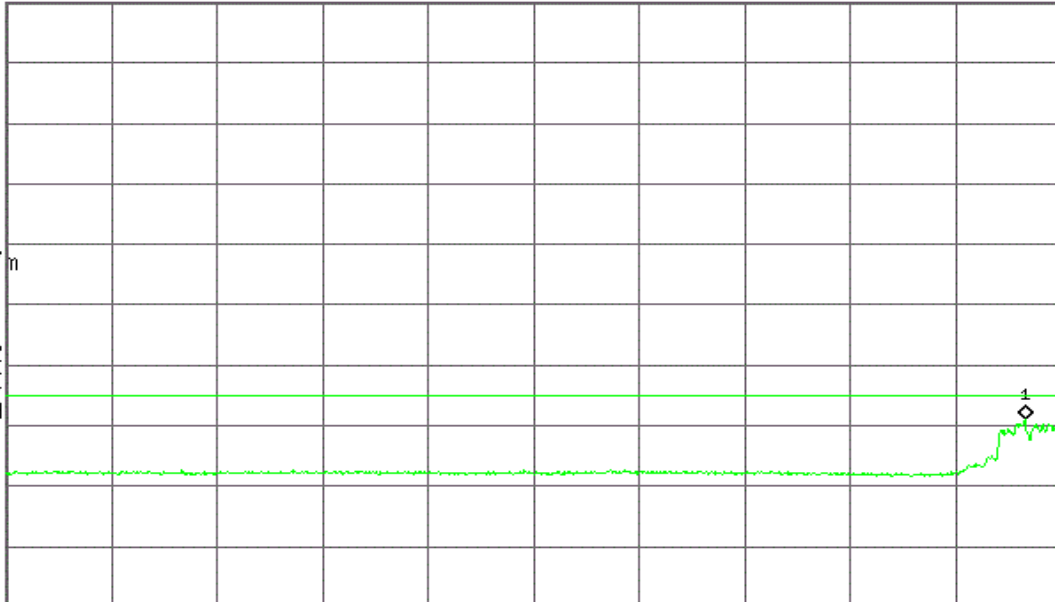

Center 4.825 0 GHz

Span 650 MHz

#Res BW 1 MHz

#VBW 1.5 kHz

Sweep 337.9 ms (1001 pts)

**Detector mode: Average**

**Polarity: Horizontal**

Agilent


R T

Mkr1 5.150 0 GHz  
53.54 dB $\mu$ V/m

Ref 119 dB $\mu$ V/m

#Atten 16 dB

#Peak  
Log  
10  
dB/  
Offst  
6  
dB  
DI  
54.0  
dB $\mu$ V/m  
#PAvg  
V1 S2  
S3 FC  
A AA  
E(f):  
FTun  
Swp

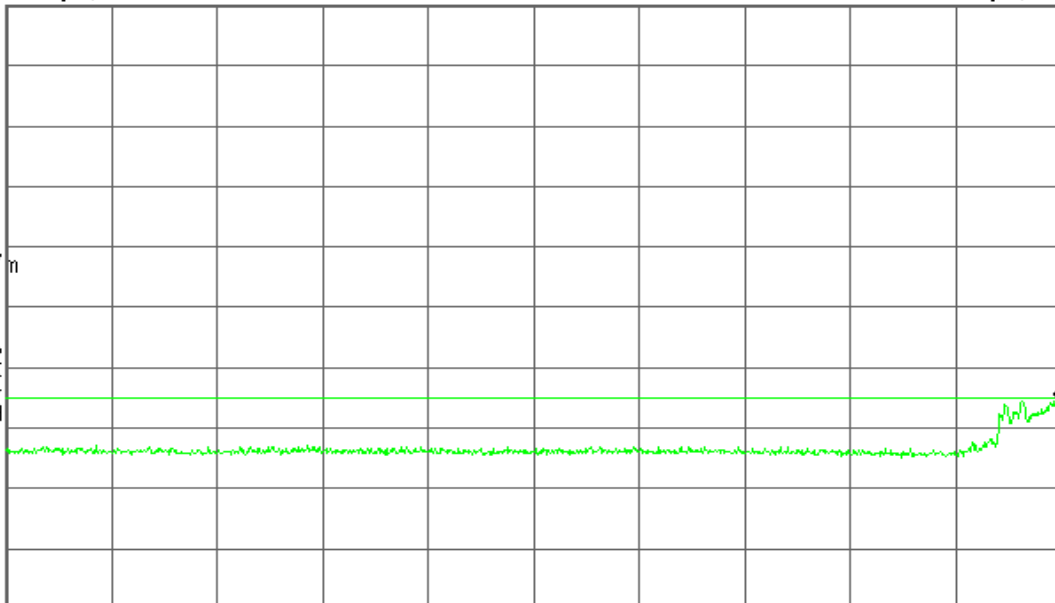

Center 4.825 0 GHz

Span 650 MHz

#Res BW 1 MHz

#VBW 15 kHz

Sweep 33.8 ms (1001 pts)



### Band Edges (IEEE 802.11n HT 80 mode / CH 5290 MHz)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 5.357 5 GHz  
57.05 dB $\mu$ V/m

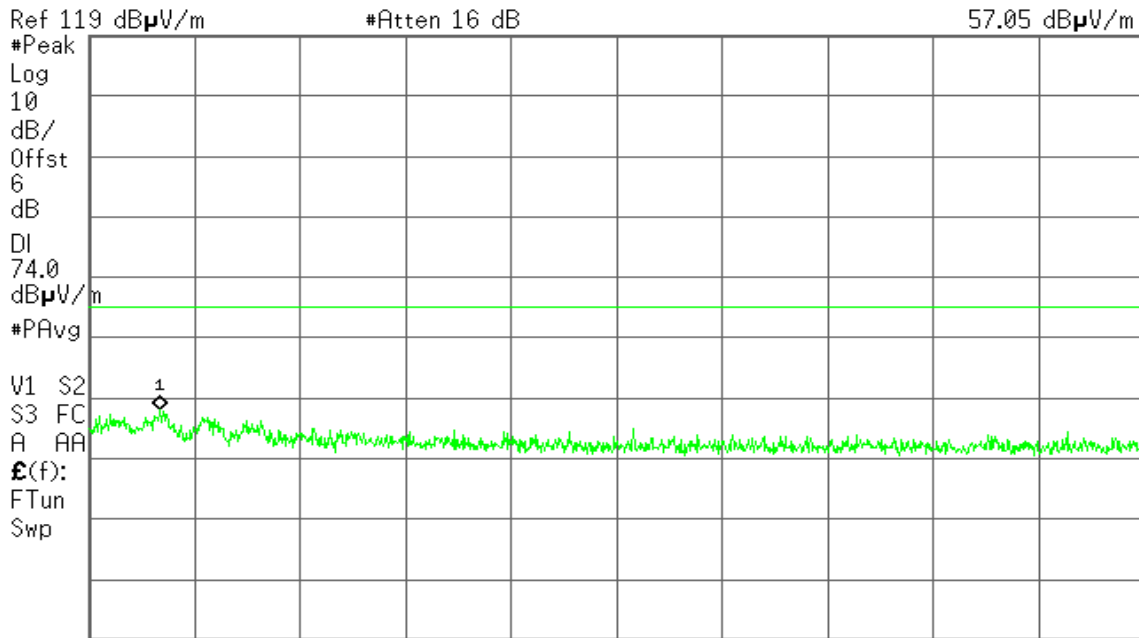

Start 5.350 0 GHz #Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (1001 pts) Stop 5.460 0 GHz


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 5.357 5 GHz  
51.70 dB $\mu$ V/m

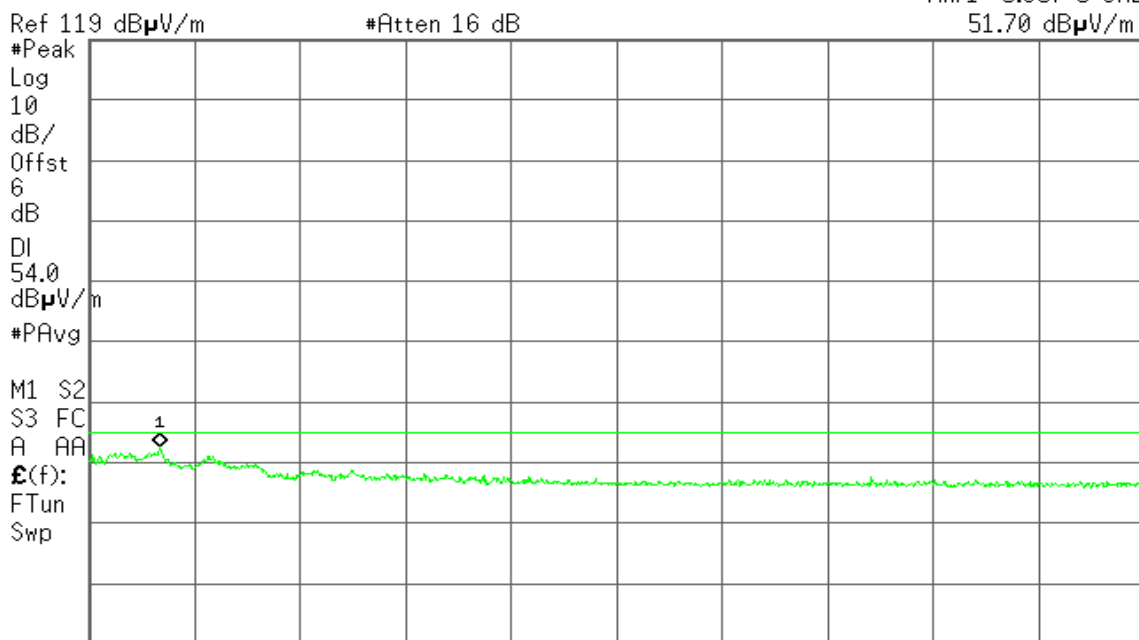

Start 5.350 0 GHz #Res BW 1 MHz #VBW 15 kHz Sweep 5.733 ms (1001 pts) Stop 5.460 0 GHz




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

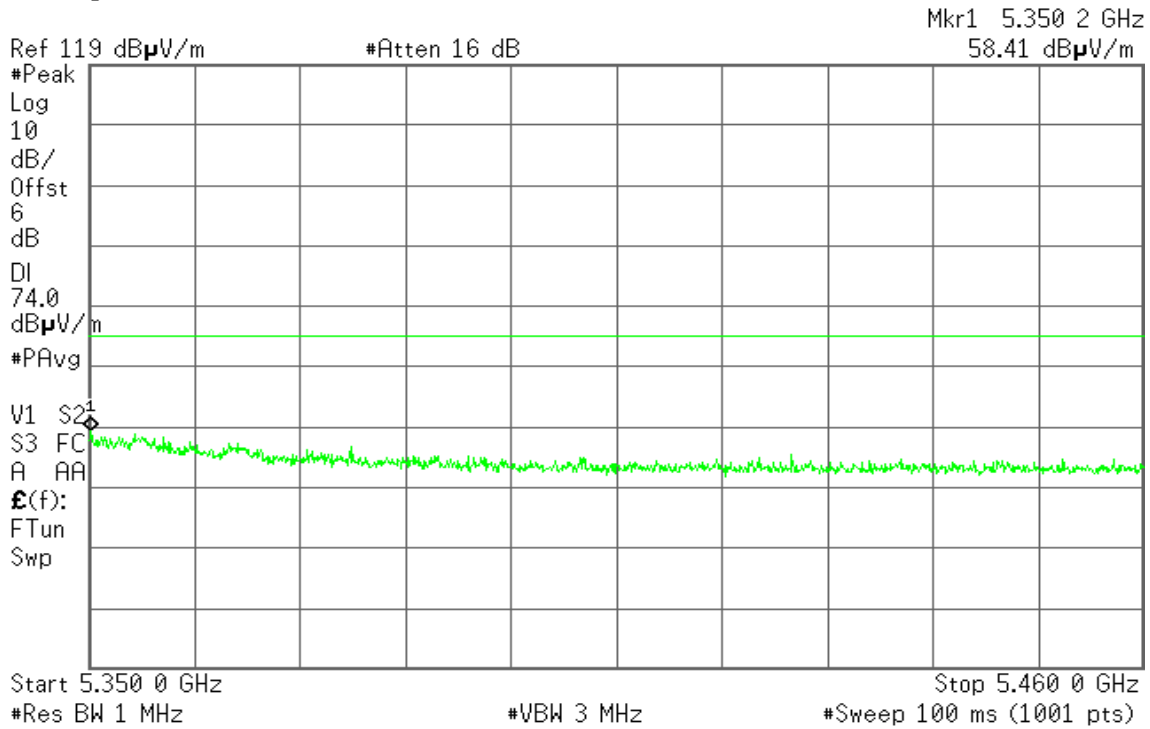


Detector mode: Average

Polarity: Horizontal

Agilent

R T

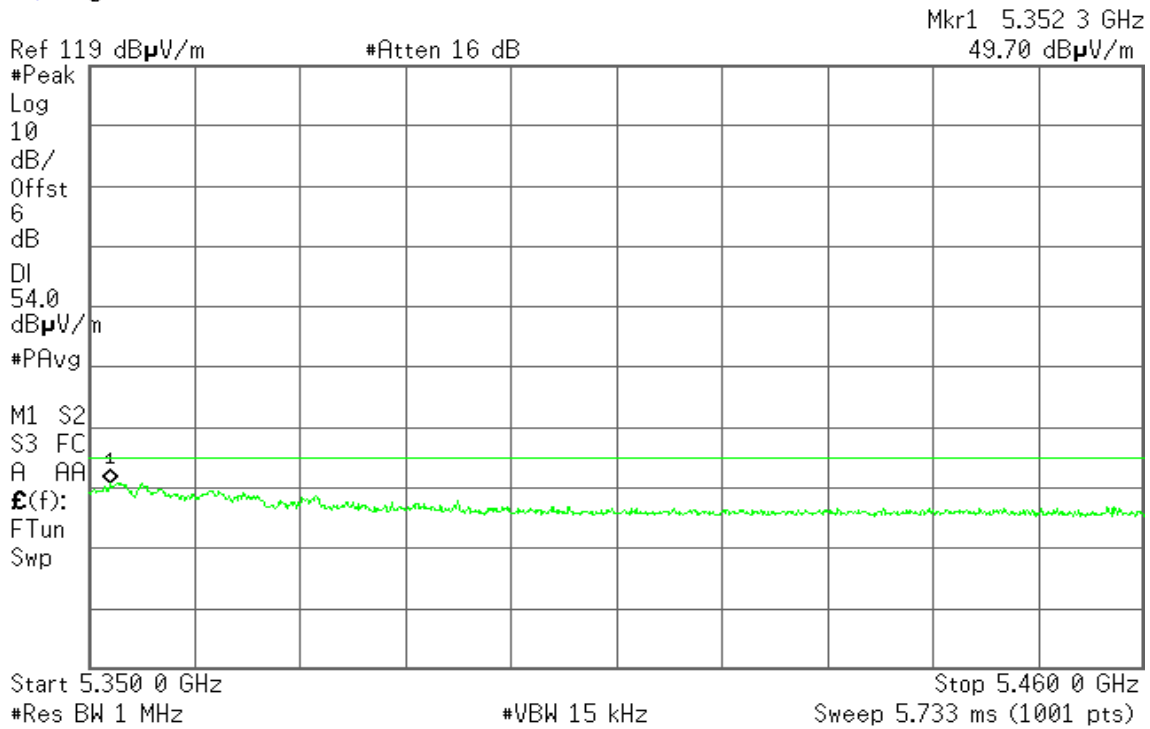



### 8.3 RADIATED UNDESIRABLE EMISSION

1. According to §15.209(a) & RSS-210 §A9.3, except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 30-88           | 100*                               | 3                        |
| 88-216          | 150*                               | 3                        |
| 216-960         | 200*                               | 3                        |
| Above 960       | 500                                | 3                        |

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ at 3-meter) | Field Strength (dB $\mu\text{V/m}$ at 3-meter) |
|-----------------|--|--|
| 30-88           | 100  | 40   |
| 88-216          | 150  | 43.5   |
| 216-960         | 200  | 46   |
| Above 960       | 500  | 54   |




## Test Configuration

### 9kHz ~ 30MHz

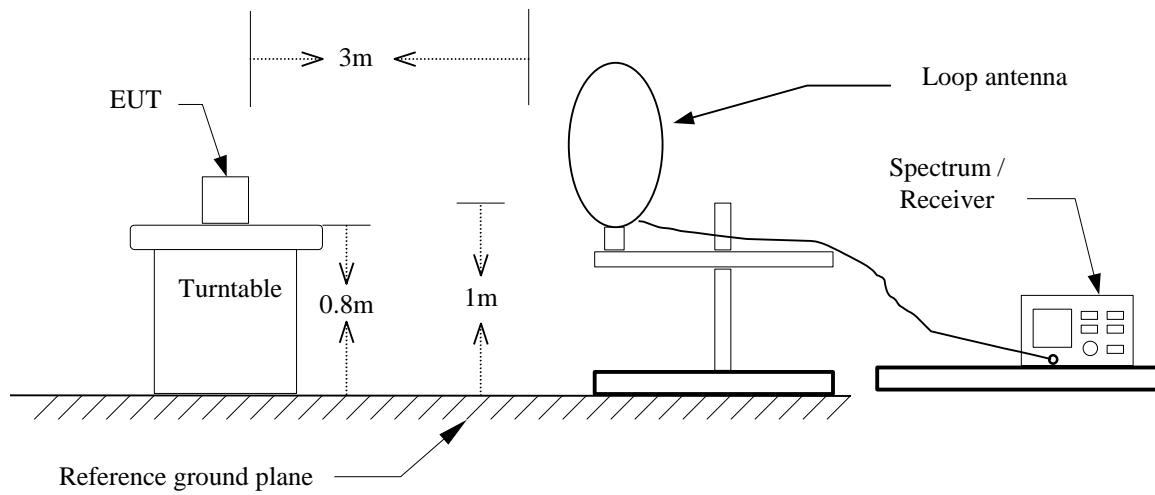


### 30MHz ~ 1GHz

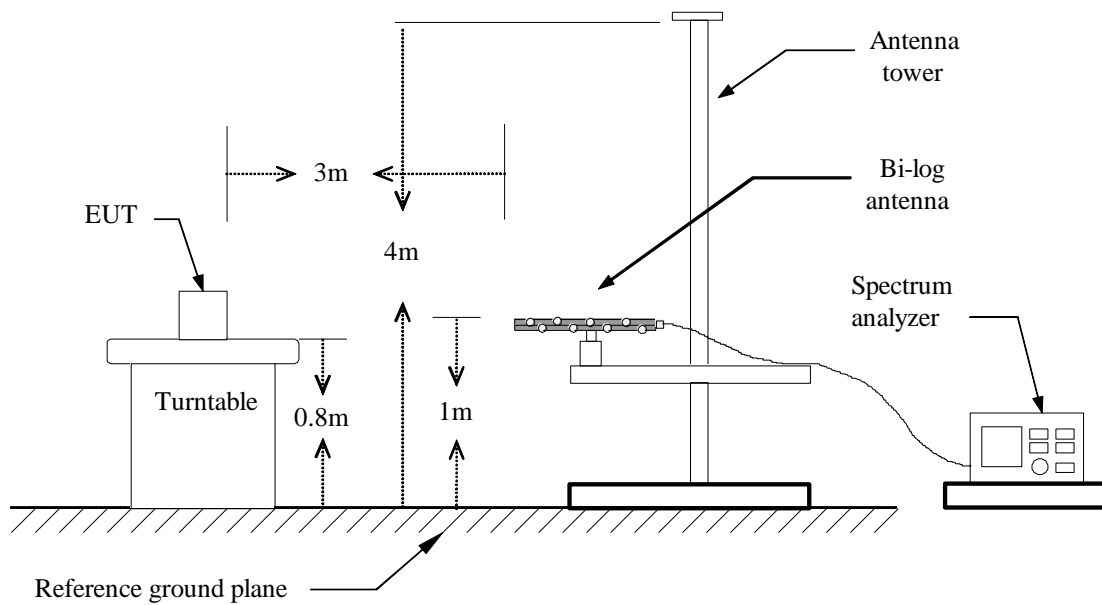





Above 1 GHz

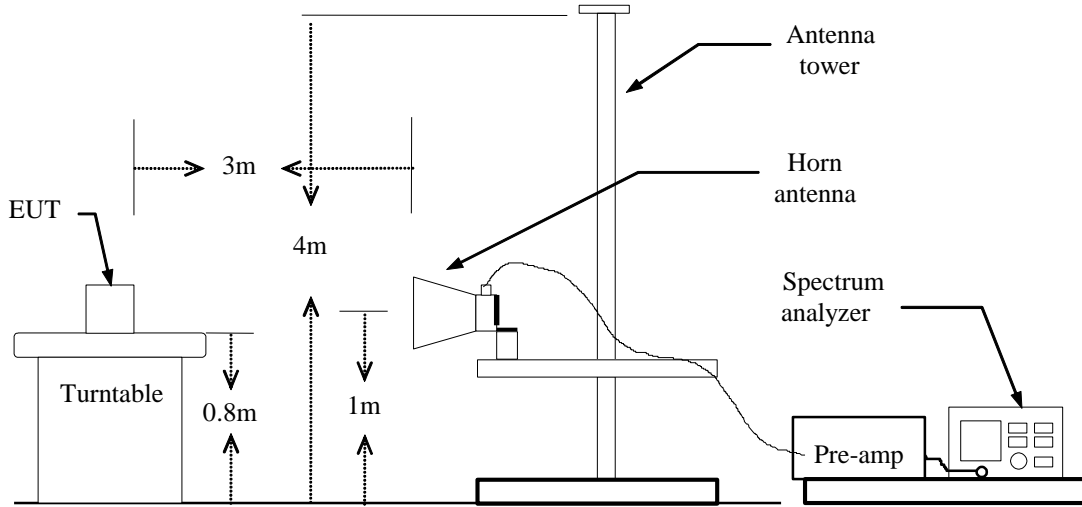



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** April 20, 2014**Temperature:** 27°C**Tested by:** David Shu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------|----------------|
| 38.7300         | 48.32          | -16.27                   | 32.05           | 40.00          | -7.95       | peak   | V              |
| 159.0100        | 48.96          | -18.24                   | 30.72           | 43.50          | -12.78      | peak   | V              |
| 231.7600        | 53.02          | -18.77                   | 34.25           | 46.00          | -11.75      | peak   | V              |
| 268.6200        | 52.18          | -17.04                   | 35.14           | 46.00          | -10.86      | peak   | V              |
| 450.0100        | 41.60          | -12.66                   | 28.94           | 46.00          | -17.06      | peak   | V              |
| 694.4500        | 38.40          | -8.85                    | 29.55           | 46.00          | -16.45      | peak   | V              |
| 30.9700         | 45.12          | -10.58                   | 34.54           | 40.00          | -5.46       | peak   | H              |
| 158.0400        | 53.79          | -18.21                   | 35.58           | 43.50          | -7.92       | peak   | H              |
| 236.6100        | 57.98          | -18.67                   | 39.31           | 46.00          | -6.69       | peak   | H              |
| 367.5600        | 48.96          | -14.78                   | 34.18           | 46.00          | -11.82      | peak   | H              |
| 450.0100        | 46.36          | -12.66                   | 33.70           | 46.00          | -12.30      | peak   | H              |
| 696.3900        | 40.15          | -8.83                    | 31.32           | 46.00          | -14.68      | peak   | H              |

**Remark:**

- 1 Measuring frequencies from 30 MHz to the 1GHz.
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3 Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4 Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5 Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



**Above 1 GHz**

**Operation Mode:** TX / IEEE 802.11a mode / 5180 ~ 5240MHz / CH Low      **Test Date:** April 17, 2014

**Temperature:** 27°C      **Tested by:** David Shu

**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3254.000        | 52.90          | -1.39             | 51.51           | 74.00          | -22.49      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2582.000        | 50.54          | -3.08             | 47.46           | 74.00          | -26.54      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11a mode / 5180 ~ 5240MHz / CH Mid **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3877.000        | 50.21          | 1.73              | 51.94           | 74.00          | -22.06      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3303.000        | 52.26          | -1.23             | 51.03           | 74.00          | -22.97      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11a mode / 5180 ~ 5240MHz / CH High

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3576.000        | 51.18          | -0.12             | 51.06           | 74.00          | -22.94      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3296.000        | 53.04          | -1.25             | 51.79           | 74.00          | -22.21      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Low

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3310.000        | 52.15          | -1.21             | 50.94           | 74.00          | -23.06      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3051.000        | 52.81          | -2.04             | 50.77           | 74.00          | -23.23      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Mid

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3275.000        | 52.34          | -1.32             | 51.02           | 74.00          | -22.98      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3205.000        | 53.43          | -1.55             | 51.88           | 74.00          | -22.12      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





**Operation Mode:** TX / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH High **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2442.000        | 52.86          | -3.57             | 49.29           | 74.00          | -24.71      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2421.000        | 51.03          | -3.67             | 47.36           | 74.00          | -26.64      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / CH Low **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2246.000        | 57.27          | -4.52             | 52.75           | 74.00          | -21.25      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3079.000        | 52.19          | -1.95             | 50.24           | 74.00          | -23.76      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / CH High      **Test Date:** April 17, 2014  
**Temperature:** 27°C      **Tested by:** David Shu  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2358.000        | 51.78          | -4.12             | 47.66           | 74.00          | -26.34      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3219.000        | 52.27          | -1.50             | 50.77           | 74.00          | -23.23      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 80 MHz mode  
5210MHz / CH Low

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3072.000        | 52.25          | -1.98             | 50.27           | 74.00          | -23.73      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3114.000        | 52.96          | -1.84             | 51.12           | 74.00          | -22.88      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11a mode / 5260 ~ 5320MHz / CH Low **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3331.000        | 52.17          | -1.14             | 51.03           | 74.00          | -22.97      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3212.000        | 52.93          | -1.52             | 51.41           | 74.00          | -22.59      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11a mode / 5260 ~ 5320MHz / CH Mid **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3184.000        | 53.09          | -1.61             | 51.48           | 74.00          | -22.52      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3387.000        | 51.84          | -0.96             | 50.88           | 74.00          | -23.12      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11a mode / 5260 ~ 5320MHz / CH High      **Test Date:** April 17, 2014  
**Temperature:** 27°C      **Tested by:** David Shu  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3149.000        | 52.77          | -1.73             | 51.04           | 74.00          | -22.96      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3100.000        | 53.18          | -1.89             | 51.29           | 74.00          | -22.71      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz / CH Low

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2547.000        | 51.71          | -3.15             | 48.56           | 74.00          | -25.44      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3198.000        | 52.44          | -1.57             | 50.87           | 74.00          | -23.13      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz / CH Mid

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3191.000        | 52.72          | -1.59             | 51.13           | 74.00          | -22.87      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2841.000        | 51.26          | -2.54             | 48.72           | 74.00          | -25.28      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz / CH High **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2183.000        | 51.22          | -4.61             | 46.61           | 74.00          | -27.39      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3226.000        | 52.90          | -1.48             | 51.42           | 74.00          | -22.58      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz / CH Low **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2470.000        | 51.19          | -3.55             | 47.64           | 74.00          | -26.36      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2540.000        | 51.05          | -3.17             | 47.88           | 74.00          | -26.12      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz / CH High      **Test Date:** April 17, 2014

**Temperature:** 27°C      **Tested by:** David Shu

**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3233.000        | 52.85          | -1.46             | 51.39           | 74.00          | -22.61      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3156.000        | 53.62          | -1.70             | 51.92           | 74.00          | -22.08      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 80 MHz mode / 5290MHz / CH Low

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2617.000        | 50.36          | -3.01             | 47.35           | 74.00          | -26.65      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2554.000        | 51.65          | -3.14             | 48.51           | 74.00          | -25.49      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11a mode / 5500 ~ 5700MHz / CH Low      **Test Date:** April 17, 2014  
**Temperature:** 27°C      **Tested by:** David Shu  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3254.000        | 52.47          | -1.39             | 51.08           | 74.00          | -22.92      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3198.000        | 52.32          | -1.57             | 50.75           | 74.00          | -23.25      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11a mode / 5500 ~ 5700MHz /CH Mid **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2673.000        | 51.58          | -2.89             | 48.69           | 74.00          | -25.31      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2778.000        | 52.01          | -2.67             | 49.34           | 74.00          | -24.66      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11a mode / 5500 ~ 5700MHz / CH High **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3275.000        | 52.39          | -1.32             | 51.07           | 74.00          | -22.93      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2624.000        | 50.99          | -2.99             | 48.00           | 74.00          | -26.00      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11a mode / 5720MHz

Test Date: May 9, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 1602.000        | 55.20          | -7.43             | 47.77           | 74.00          | -26.23      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 1595.000        | 54.96          | -7.48             | 47.48           | 74.00          | -26.52      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $Margin (dB) = Remark\ result (dBuV/m) - Average\ limit (dBuV/m)$ .



Operation Mode: TX / IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz / CH Low

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2414.000        | 50.86          | -3.71             | 47.15           | 74.00          | -26.85      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2127.000        | 50.88          | -4.73             | 46.15           | 74.00          | -27.85      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz / CH Mid

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2533.000        | 51.21          | -3.18             | 48.03           | 74.00          | -25.97      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2393.000        | 51.68          | -3.80             | 47.88           | 74.00          | -26.12      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz / CH High

Test Date: April 17, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3254.000        | 52.98          | -1.39             | 51.59           | 74.00          | -22.41      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2421.000        | 51.19          | -3.67             | 47.52           | 74.00          | -26.48      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz Channel mode / 5720MHz

Test Date: May 9, 2014

Temperature: 27°C

Tested by: David Shu

Humidity: 53% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 1595.000        | 56.90          | -7.48             | 49.42           | 74.00          | -24.58      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 1595.000        | 57.19          | -7.48             | 49.71           | 74.00          | -24.29      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz / CH Low      **Test Date:** April 17, 2014  
**Temperature:** 27°C      **Tested by:** David Shu  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3296.000        | 52.56          | -1.25             | 51.31           | 74.00          | -22.69      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2442.000        | 51.34          | -3.57             | 47.77           | 74.00          | -26.23      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz / CH Mid **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2750.000        | 51.20          | -2.73             | 48.47           | 74.00          | -25.53      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2624.000        | 50.63          | -2.99             | 47.64           | 74.00          | -26.36      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz / CH High      **Test Date:** April 17, 2014  
**Temperature:** 27°C      **Tested by:** David Shu  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 2505.000        | 50.58          | -3.24             | 47.34           | 74.00          | -26.66      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 2855.000        | 50.79          | -2.51             | 48.28           | 74.00          | -25.72      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / 5710 MHz  
Temperature: 27°C  
Humidity: 53% RH

Test Date: May 9, 2014  
Tested by: David Shu  
Polarity: Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 1595.000        | 56.20          | -7.48             | 48.72           | 74.00          | -25.28      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 1595.000        | 54.69          | -7.48             | 47.21           | 74.00          | -26.79      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 80 MHz mode / 5530 ~ 5690MHz / CH Low **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3198.000        | 52.31          | -1.57             | 50.74           | 74.00          | -23.26      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3100.000        | 52.28          | -1.89             | 50.39           | 74.00          | -23.61      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 80 MHz mode / 5530 ~ 5690MHz / CH High **Test Date:** April 17, 2014  
**Temperature:** 27°C **Tested by:** David Shu  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Ant.Pol. (H/V) |
|-----------------|----------------|-------------------|-----------------|----------------|-------------|--------|----------------|
| 3345.000        | 52.55          | -1.09             | 51.46           | 74.00          | -22.54      | peak   | V              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
| 3191.000        | 52.86          | -1.59             | 51.27           | 74.00          | -22.73      | peak   | H              |
| N/A             |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |
|                 |                |                   |                 |                |             |        |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).