

Page 1 of 66

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

Applicant: Quanta Computer Inc.

No.188, Wenhua 2nd Rd., Guishan Dist., Taoyuan City, Taiwan

Product Name: QUANTA Portable ECG Monitoring Device

Brand Name: Quanta

Model No.: Q-ecg-wu2

Model Difference: N/A

Report Number: T190313W12-RP

FCC ID: **HFSCIR**

§15.247, Cat: DTS **FCC Rule Part:**

Sep. 25, 2019 Issue Date:

Date of Test: Mar. 15, 2019 ~ Apr. 23, 2019

Date of EUT Received: Mar. 13, 2019

Issued by: Compliance Certification Services Inc. Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-

wan. (R.O.C.) service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Jerry Lu / Sr. Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 2 of 66

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190313W12-RP	Rev.00	Initial creation of docu- ment	All	Sep. 25, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.









Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	10
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	PEAK OUTPUT POWER MEASUREMENT	17
8	6dB BANDWIDTH MEASUREMENT	22
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	27
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	34
11	POWER SPECTRAL DENSITY	63
12	ANTENNA REQUIREMENT	66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





1.1 Product Description

Product Name:	QUANTA Portable ECG Monitoring Device				
Brand Name:	Quanta				
Model No.:	Q-ecg-wu2				
Model Difference:	N/A				
Hardware Version:	N/A				
Software Version:	N/A				
Dawar Cumhu	3.7Vdc from Rechargeable Li-ion Battery or 5V from USB Port				
Power Supply:	Battery: Model No.: CIR Battery, Supplier: N/A				

Radio Technology:	Bluetooth LE Single mode
Frequency Range:	2402 – 2480MHz
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	BLE 1M:3.70 dBm BLE 2M:3.70 dBm
Antenna Designation:	FPC Antenna, Peak Gain: 1.87 dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 5 of 66

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas. Guidance v05r02

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 6 of 66

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

Conducted Test (RF) 2.3.2

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

Radiated Emissions 2.3.3

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 7 of 66

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Page 8 of 66



2.5 Configuration of Tested System

Fig. 2-1 Conducted (Antenna Port) & Radiated Emission Configuration



Fig. 2-2 AC Power Line Conducted Emission





Table 2-1 Equipment Used in Tested System

Ite	m Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Ca- ble	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	T420	S0012407	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.205 §15.209 §15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 10 of 66

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

	•				
ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	15	2430 MHz	29	2458 MHz
2	2404 MHz	16	2432 MHz	30	2460 MHz
3	2406 MHz	17	2434 MHz	31	2462 MHz
4	2408 MHz	18	2436 MHz	32	2464 MHz
5	2410 MHz	19	2438 MHz	33	2466 MHz
6	2412 MHz	20	2440 MHz	34	2468 MHz
7	2414 MHz	21	2442 MHz	35	2470 MHz
8	2416MHz	22	2444 MHz	36	2472 MHz
9	2418 MHz	23	2446 MHz	37	2474 MHz
10	2420 MHz	24	2448 MHz	38	2476 MHz
11	2422 MHz	25	2450 MHz	39	2478 MHz
12	2424 MHz	26	2452 MHz	40	2480 MHz
13	2426 MHz	27	2454 MHz		
14	2428 MHz	28	2456 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 11 of 66

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST:

INADIA LE LI	mooron reon.						
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)			
	RADIATED EMISSION TEST (BELOW 1 GHz)						
Bluetooth LE	2402 to 2480	2442	GFSK	1			
Bluetooth LE	2402 to 2480	2442	GFSK	2			
	RADIATED EMISSION TEST (ABOVE 1 GHz)						
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1			
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	2			
1							


Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST						
MODE	AVAILABLE FREQUENCY (MHz)	MODULATION DATA RAT (Mbps)				
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1		
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 12 of 66



MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.92 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.92 dB
Peak Power Density	+/- 1.996 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Limits			
dB(μV)			
Quasi-peak	Average		
66 to 56	56 to 46		
56	46		
60	50		
	dB(Quasi-peak 66 to 56 56		

Note

6.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019	
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019	
LISN	SCHWARZ- BECK	NSLK 8127	8127-541	01/31/2019	01/30/2020	
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020	
Software	EZ-EMC(CCS-3A1-CE)					

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

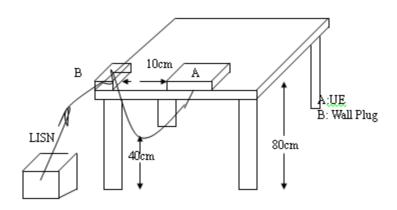
Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50



6.4 Test SET-UP (Block Diagram of Configuration)



6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

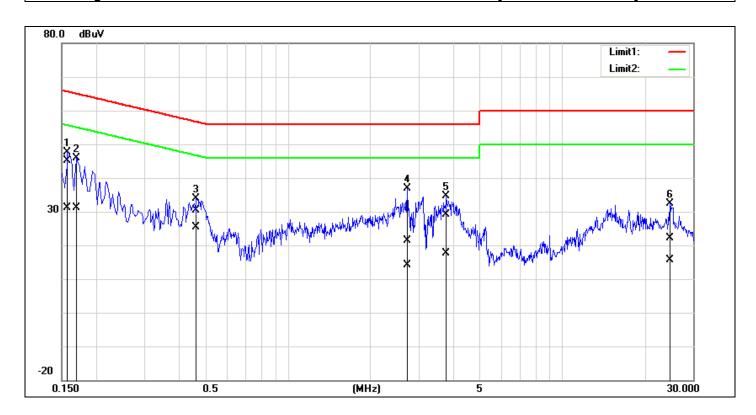
Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 15 of 66

AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Operation 2019/4/23 Line: 25(°C)/60% Temp.(°C)/Hum.(%): AC 120V/60Hz **Test Voltage:** Test By: Henry




No.	Frequency	QuasiPeak reading	Average reading	Correction	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1580	44.99	31.00	0.16	45.15	31.16	65.56	55.57	-20.41	-24.41	Pass
2*	0.1700	45.71	30.95	0.16	45.87	31.11	64.96	54.96	-19.09	-23.85	Pass
3	0.4660	30.29	25.11	0.16	30.45	25.27	56.58	46.58	-26.13	-21.31	Pass
4	2.7340	21.07	13.81	0.24	21.31	14.05	56.00	46.00	-34.69	-31.95	Pass
5	3.7940	28.76	17.46	0.27	29.03	17.73	56.00	46.00	-26.97	-28.27	Pass
6	24.7340	21.24	14.68	0.83	22.07	15.51	60.00	50.00	-37.93	-34.49	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.


Phis facture of the state of the sample of the documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)





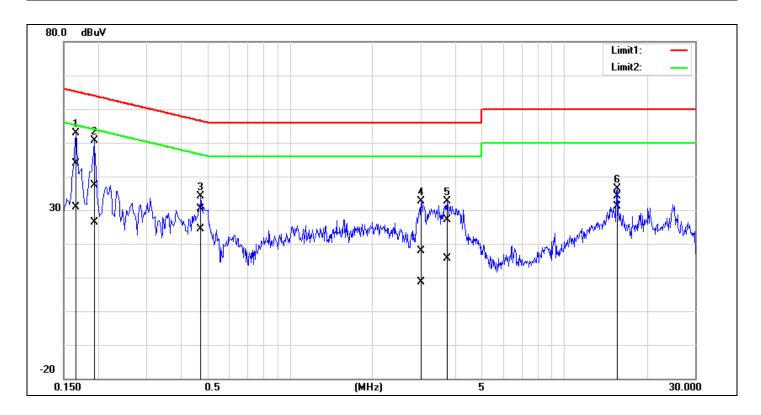Description: Operation Date: 2019/4/23 Line: Temp.(°C)/Hum.(%): 25(°C)/60% AC 120V/60Hz **Test Voltage:** Test By: Henry



No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1660	43.88	30.73	0.10	43.98	30.83	65.15	55.16	-21.17	-24.33	Pass
2	0.1940	37.36	26.36	0.10	37.46	26.46	63.86	53.86	-26.40	-27.40	Pass
3	0.4740	30.20	24.31	0.11	30.31	24.42	56.44	46.44	-26.13	-22.02	Pass
4	3.0100	17.73	8.43	0.19	17.92	8.62	56.00	46.00	-38.08	-37.38	Pass
5	3.7540	26.97	15.36	0.21	27.18	15.57	56.00	46.00	-28.82	-30.43	Pass
6*	15.7100	33.73	30.68	0.47	34.20	31.15	60.00	50.00	-25.80	-18.85	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Replay a state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Replay a state of the results shown in this test report refer only to the sample(s) tested and such sample(s) teste document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 17 of 66

PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

	Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Power Meter	Anritsu	ML2496A	1326001	08/03/2018	08/02/2019		
Power Sensor	Anritsu	MA2411B	1315048	08/03/2018	08/02/2019		
Power Sensor	Anritsu	MA2411B	1315049	08/03/2018	08/02/2019		

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.4 Measurement Procedure:

- 1.Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

Formula:


Duty Cycle = Ton / (Ton+Toff)

BLE:


Duty Factor:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	62.50	2.04	2.53	3.00

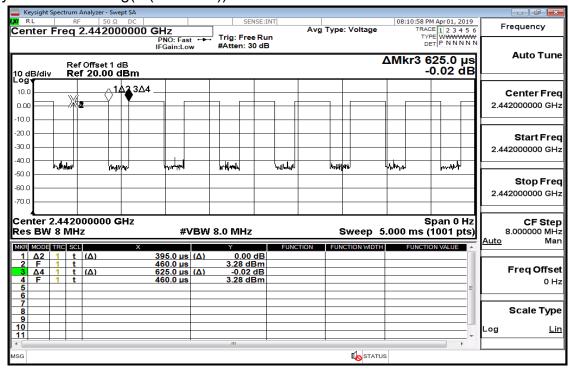Duty Cycle Factor: 10*log(1/(62.5/100))=2.04



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






BLE 2M:

Duty Factor:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	33.00	4.81	4.88	5.00

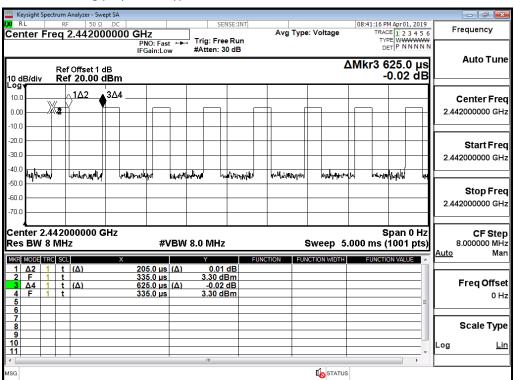Duty Cycle Factor: 10*log(1/(33/100))=4.81



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis facture of the state of the sample of the documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)





7.5 **Measurement Result:**


BI F

DLL			
СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	3.70	1 Watt = 30 dBm
Mid	2442	3.34	1 Watt = 30 dBm
High	2480	3.31	1 Watt = 30 dBm
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	3.59	1 Watt = 30 dBm
Mid	2442	3.29	1 Watt = 30 dBm
High	2480	3.21	1 Watt = 30 dBm

*Note: Measured by power meter, cable loss as 1 dB that offsets on the power meter in Peak

*Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

*Note: Max. Output include tune up tolerance Power is average power





BLE 2M

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	3.70	1 Watt = 30 dBm
Mid	2442	3.32	1 Watt = 30 dBm
High	2480	3.31	1 Watt = 30 dBm
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	3.45	1 Watt = 30 dBm
Mid	2442	3.15	1 Watt = 30 dBm
High	2480	3.24	1 Watt = 30 dBm

^{*}Note: Measured by power meter, cable loss as 1 dB that offsets on the power meter in Peak

^{*}Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

^{*}Note: Max. Output include tune up tolerance Power is average power





6DB BANDWIDTH MEASUREMENT 8

8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

	Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019			
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020			

8.3 Test Set-up:




8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
 - Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.
- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:
 - Set the spectrum analyzer as RBW=1%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.
- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

8.5 Measurement Result:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






BLE

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	0.7145	> 0.5	PASS
2442	0.7142	> 0.5	PASS
2480	0.7156	> 0.5	PASS

BLE 2M

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	1.16	> 0.5	PASS
2442	1.172	> 0.5	PASS
2480	1.153	> 0.5	PASS

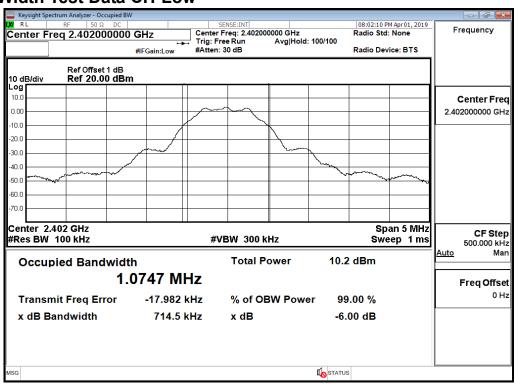
BLE 6dB Band Width Test Data CH-Low




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



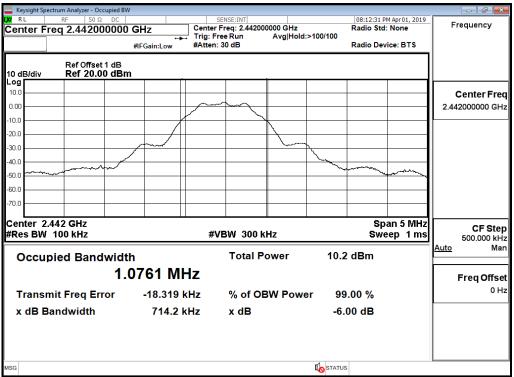6dB Band Width Test Data CH-Mid




6dB Band Width Test Data CH-High

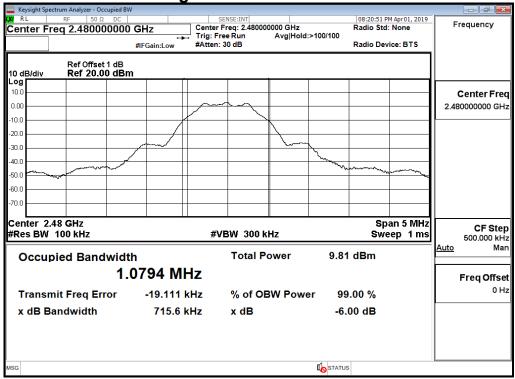


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



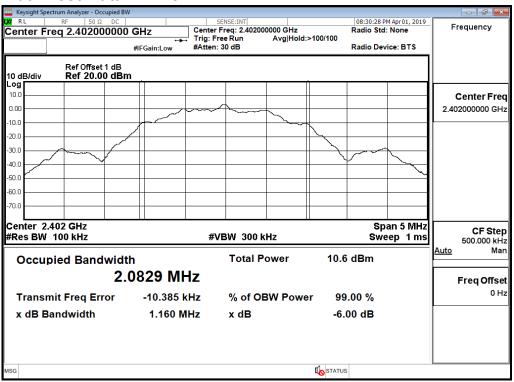BLE 2M 6dB Band Width Test Data CH-Low




6dB Band Width Test Data CH-Mid

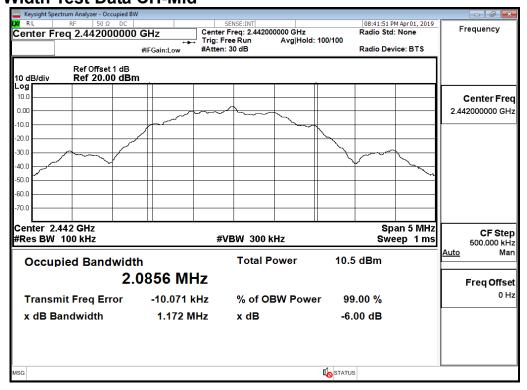

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



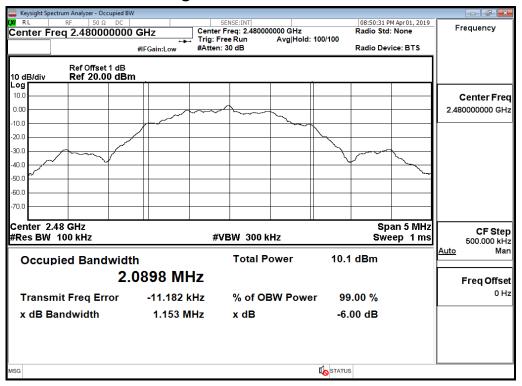6dB Band Width Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis facture of the state of the sample of the documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page 27 of 66

CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020	

9.3 Test SET-UP:




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results smown in this test report retier only to the sample(s) tested and students and process the state of 90 days only.

Ref. 8月 有规则,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction. documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



Page 28 of 66



9.4 Measurement Procedure

9.4.1 **Reference Level of Emission Limit:**

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

9.4.2 **Conducted Band Edge:**

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- **6.** Mark the highest reading of the emission as the reference level measurement.
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5MHz) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



9.4.3 **Conducted Spurious Emission:**

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector = Peak, Sweep = Auto
- Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	3.31	-16.69
2442	3.24	-16.76
2480	2.89	-17.11

NOTE: cable loss as 1dB that offsets in the spectrum

NOTE: Refer to next page for plots.

BLE 2M Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)		
2402	3.33	-16.67		
2442	3.20	-16.80		
2480	2.85	-17.15		

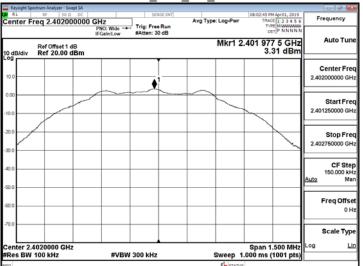
NOTE: cable loss as 1dB that offsets in the spectrum

NOTE: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Reference Level_BLE_1M_LowCH00-2402




Reference Level BLE 1M MidCH19-2442

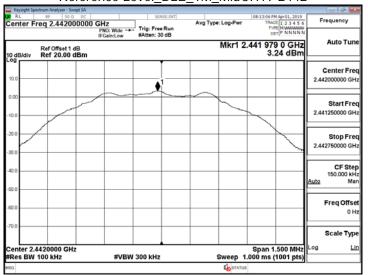


Reference Level BLE 1M HighCH39-2480

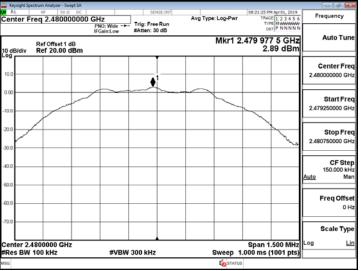


Reference Level_BLE_2M_LowCH00-2402

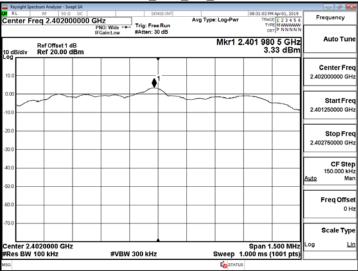

Reference Level BLE 2M MidCH19-2442

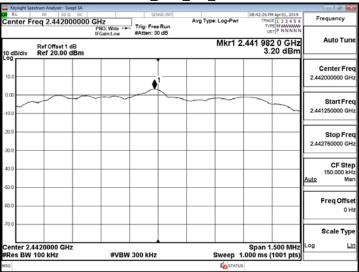

Reference Level BLE 2M HighCH39-2480

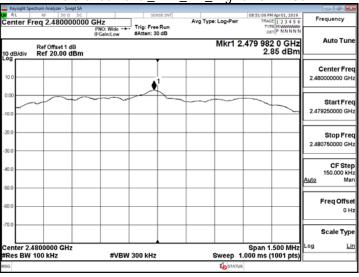

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

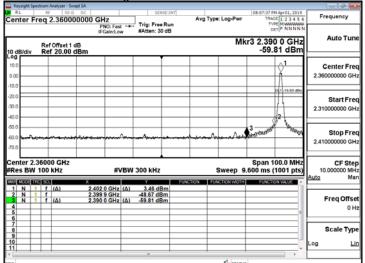
Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對测试之樣品負責,同時此樣品僅保留90天。本報告未剩本公司書面许可,不可命份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law prosecuted to the fullest extent of the law.

程智科技股份有限公司






Band Edge_BLE_1M_LowCH00-2402




Band Edge_BLE_1M_HighCH39-2480

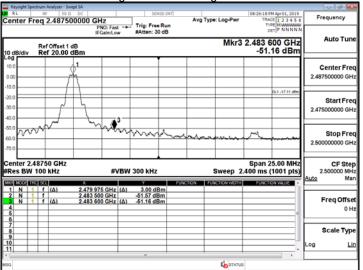

Band Edge_BLE_2M_LowCH00-2402



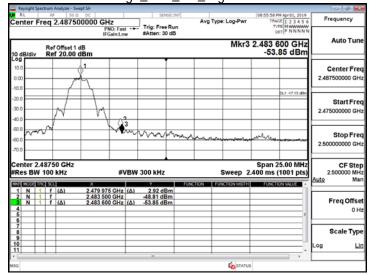Band Edge_BLE_2M_HighCH39-2480




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Rps 月有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的兒、本根告未總本公司書面許可,不可可的複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law prosecuted to the fullest extent of the law.

程智科技股份有限公司







Spurious Emission_BLE_1M_LowCH00-2402

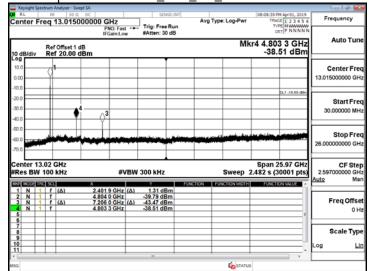


Spurious Emission BLE 1M MidCH19-2442

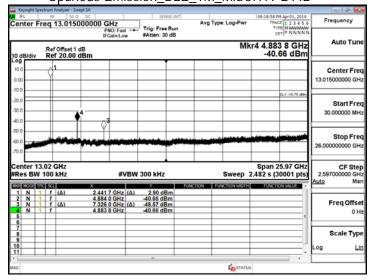

Spurious Emission_BLE_1M_HighCH39-2480

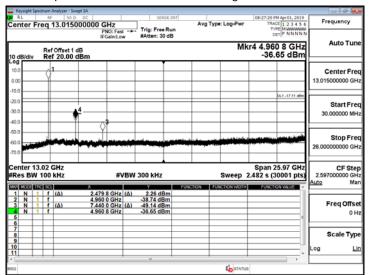


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only







Spurious Emission_BLE_2M_LowCH00-2402

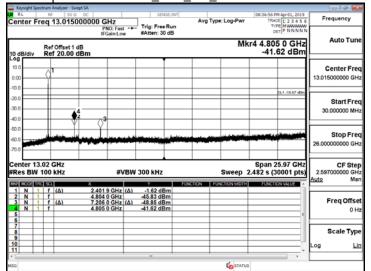

Spurious Emission BLE 2M MidCH19-2442

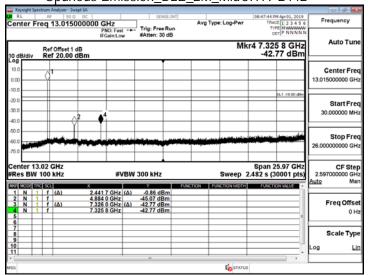

Spurious Emission_BLE_2M_HighCH39-2480

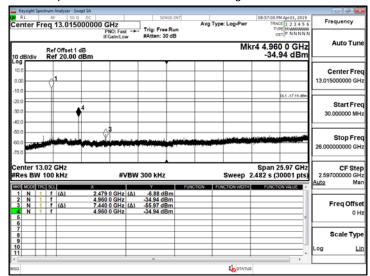

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Page 34 of 66

10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2.Emission level ($dB\mu V/m$) = 20 log Emission level ($dB\mu V/m$)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





10.2 **Measurement Equipment Used**


966A Chamber									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Band Reject Filters	MICRO TRON- ICS	BRM 50702	120	02/26/2019	02/25/2020				
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019				
Cable	HUBER SU- HNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020				
Cable	HUBER SU- HNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020				
Digital Ther- mo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020				
double Ridged Guide Horn Anten- na	ETC	MCTD 1209	DRH13M020 03	08/20/2018	08/19/2019				
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020				
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020				
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020				
PSA Series Spec- trum Analyzer	Agilent	E4446A	MY4618032 3	05/31/2018	05/30/2019				
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R				
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R				
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R				
Software	e3 V6.11-20180413								

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




10.3 **Test SET-UP**

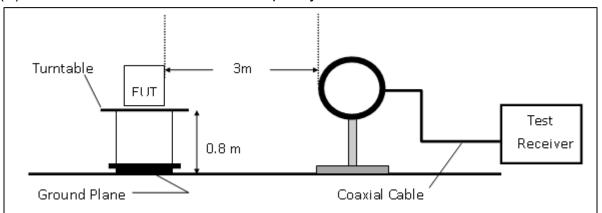
(A) Radiated Emission Test Set-UP Frequency Below 30MHz.



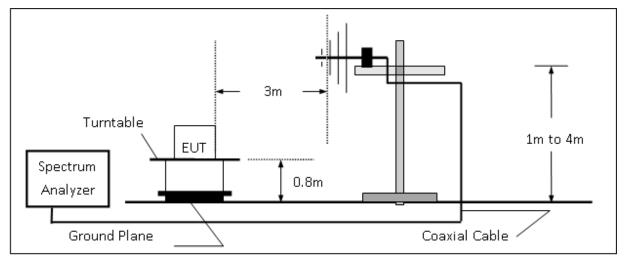(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz



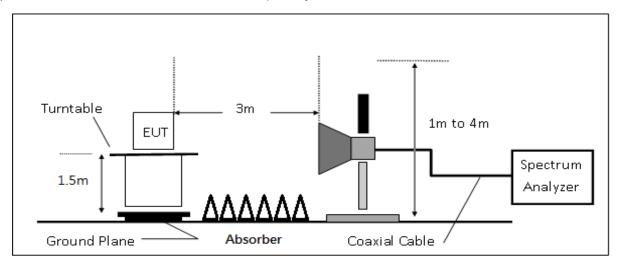(C) Radiated Emission Test Set-UP Frequency Over 1 GHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 **Measurement Procedure**

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission
- 4.EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.



Page 38 of 66

10.5 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	S .	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 **Measurement Result:**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



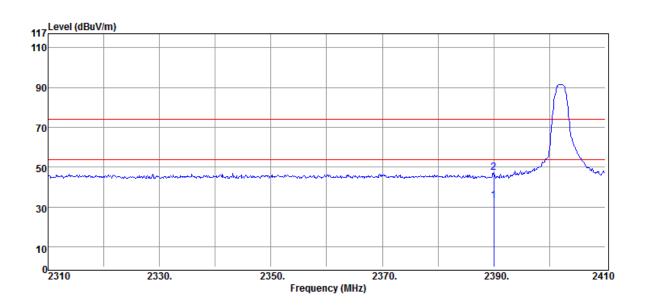
Page 39 of 66

Radiated Band Edge Measurement Result

:BLE **Operation Band** Test Date :2019-03-29

Fundamental Frequency Temp./Humi. :2402 MHz :24.1 deg C / 65 RH

Operation Mode :Bandedge CH LOW Engineer :Jerry EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	36.59	-3.33	33.26	54.00	-20.74
2390.00	Peak	50.64	-3.33	47.31	74.00	-26.69


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Replay a state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Replay a state of the results shown in this test report refer only to the sample(s) tested and such sample(s) teste document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)





Operation Band Fundamental Frequency

Operation Mode

EUT Pol.

:BLE :2402 MHz

:Bandedge CH LOW

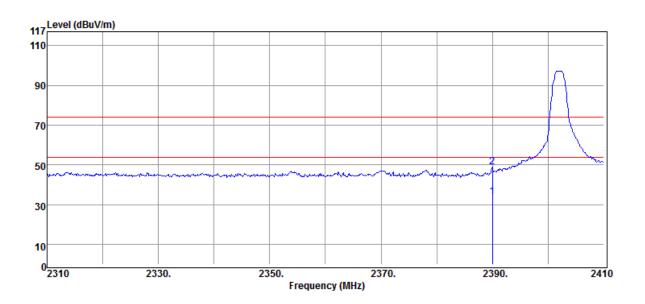
:E2 Plane

Test Date :2019-03-29

Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	37.21	-3.33	33.88	54.00	-20.12
2390.00	Peak	52.35	-3.33	49.02	74.00	-24.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 41 of 66

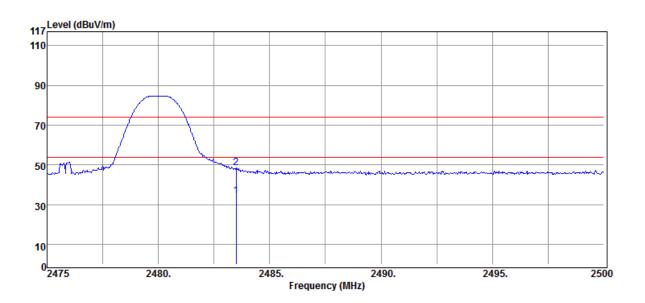
Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2480 MHz :Bandedge CH HIGH :E2 Plane

Test Date :2019-03-29 Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	37.27	-2.72	34.55	54.00	-19.45
2483.50	Peak	51.41	-2.72	48.69	74.00	-25.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 42 of 66

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2480 MHz :Bandedge CH HIGH

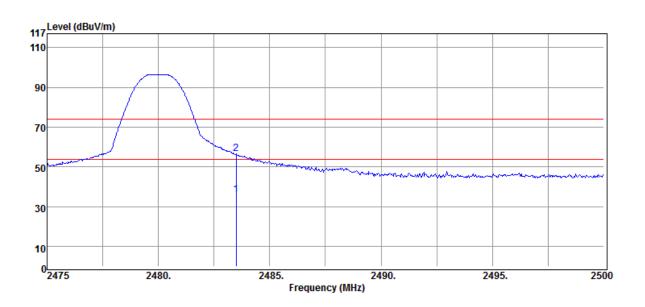
:E2 Plane

Test Date :2019-03-29

Temp./Humi. :24.1 deg_C / 65 RH

Engineer

:HORIZONTAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	38.73	-2.72	36.01	54.00	-17.99
2483.50	Peak	59.32	-2.72	56.60	74.00	-17.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 43 of 66

BLE 2M

Operation Band :BLE 2M Fundamental Frequency :2402 MHz

Operation Mode EUT Pol.

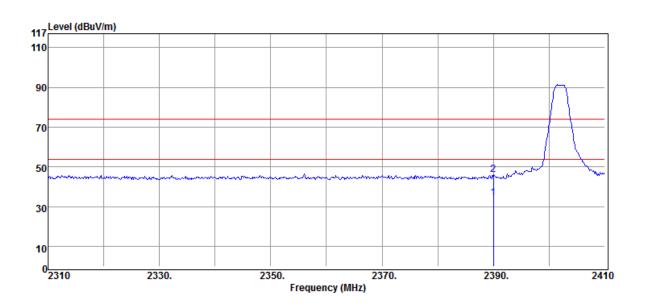
:Bandedge CH LOW :E2 Plane

Test Date :2019-03-29

Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Jerry

:VERTICAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	37.66	-3.33	34.33	54.00	-19.67
2390.00	Peak	49.48	-3.33	46.15	74.00	-27.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 44 of 66

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BLE 2M :2402 MHz

:Bandedge CH LOW

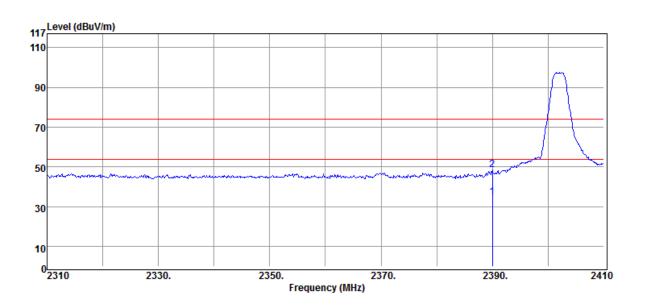
:E2 Plane

Test Date :2019-03-29

Temp./Humi. :24.1 deg_C / 65 RH


Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	38.33	-3.33	35.00	54.00	-19.00
2390.00	Peak	51.77	-3.33	48.44	74.00	-25.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode**

EUT Pol.

:BLE 2M :2480 MHz

:Bandedge CH HIGH

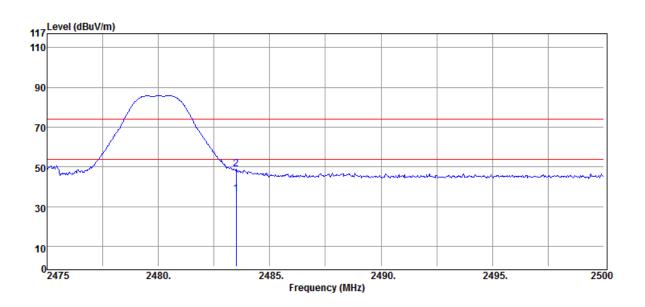
:E2 Plane

Test Date :2019-03-29

Temp./Humi. :24.1 deg_C / 65 RH


Engineer :Jerry

:VERTICAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	39.11	-2.72	36.39	54.00	-17.61
2483.50	Peak	51.83	-2.72	49.11	74.00	-24.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode**

EUT Pol.

:BLE 2M :2480 MHz

:Bandedge CH HIGH

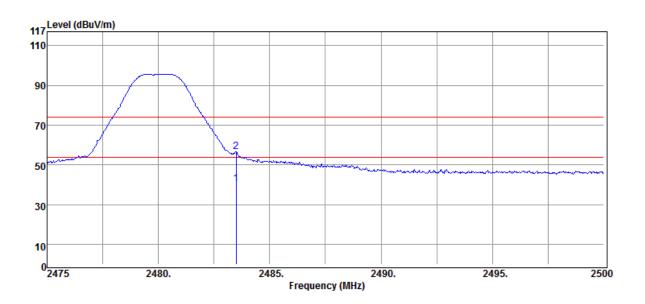
:E2 Plane

Test Date :2019-03-29

Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	43.38	-2.72	40.66	54.00	-13.34
2483.50	Peak	59.20	-2.72	56.48	74.00	-17.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



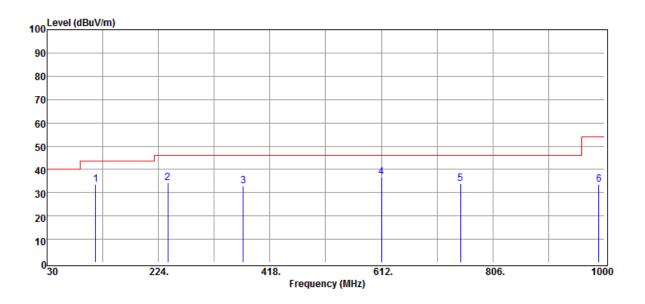
Page 47 of 66

Radiated Spurious Emission Measurement Result For Frequency form 30MHz to 1000MHz **BLE**

Operation Band :BLE **Test Date** :2019-03-29

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH


Operation Mode :Tx CH MID Engineer :Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
114.39	Peak	42.86	-9.35	33.51	43.50	-9.99
240.49	Peak	44.37	-10.25	34.12	46.00	-11.88
371.44	Peak	39.13	-6.42	32.71	46.00	-13.29
612.00	Peak	37.82	-1.03	36.79	46.00	-9.21
749.74	Peak	31.87	2.12	33.99	46.00	-12.01
990.30	Peak	28.23	5.31	33.54	54.00	-20.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Operation Band :BLE **Test Date** :2019-03-29

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH **Operation Mode** :Tx CH MID Engineer

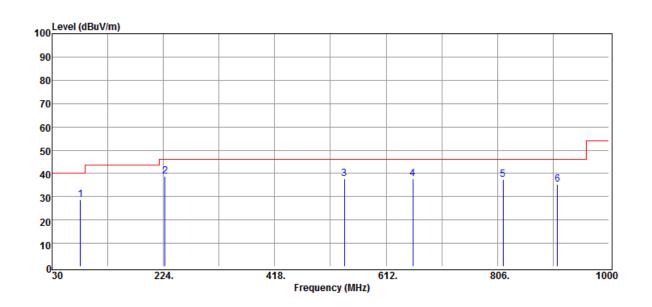:Jerry EUT Pol. :E2 Plan :HORIZONTAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
79.47	Peak	43.92	-15.14	28.78	40.00	-11.22
226.91	Peak	49.77	-11.00	38.77	46.00	-7.23
539.25	Peak	40.03	-2.25	37.78	46.00	-8.22
658.56	Peak	37.87	-0.21	37.66	46.00	-8.34
815.70	Peak	34.98	2.56	37.54	46.00	-8.46
910.76	Peak	31.34	3.89	35.23	46.00	-10.77

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 49 of 66

BLE 2M

Operation Band :BLE 2M **Test Date** :2019-04-09


Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH Operation Mode :Tx CH MID Engineer

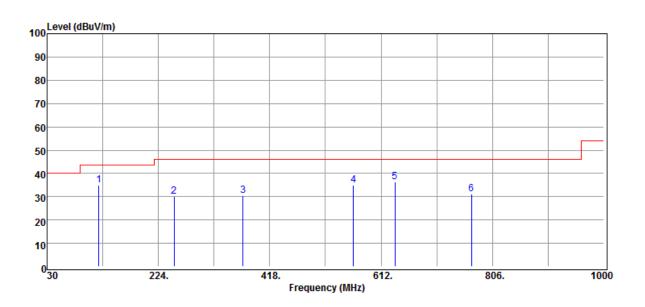:Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
120.21	Peak	43.80	-8.88	34.92	43.50	-8.58
251.16	Peak	40.38	-10.38	30.00	46.00	-16.00
371.44	Peak	36.99	-6.42	30.57	46.00	-15.43
563.50	Peak	37.09	-2.24	34.85	46.00	-11.15
636.25	Peak	36.67	-0.30	36.37	46.00	-9.63
769.14	Peak	29.68	1.58	31.26	46.00	-14.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :BLE 2M **Test Date** :2019-03-29

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Jerry

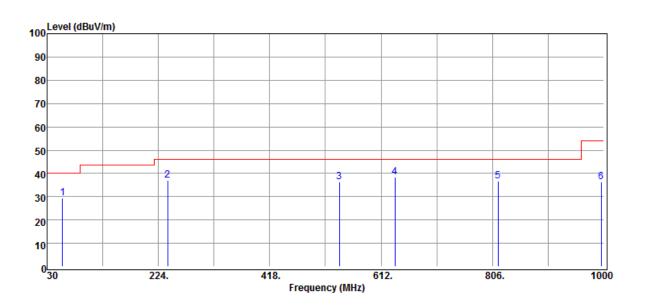EUT Pol. :E2 Plan :HORIZONTAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
57.16	Peak	45.37	-15.91	29.46	40.00	-10.54
240.49	Peak	47.20	-10.25	36.95	46.00	-9.05
539.25	Peak	38.54	-2.25	36.29	46.00	-9.71
636.25	Peak	38.82	-0.30	38.52	46.00	-7.48
815.70	Peak	33.99	2.56	36.55	46.00	-9.45
995.15	Peak	31.14	5.17	36.31	54.00	-17.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 51 of 66

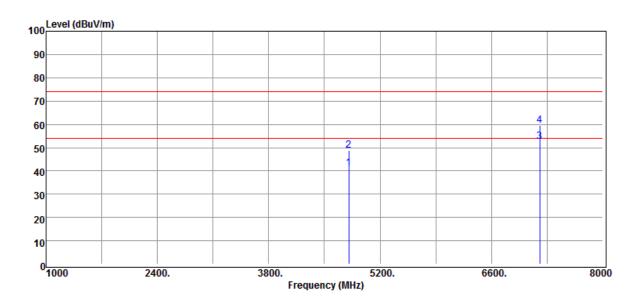
Radiated Spurious Emission Measurement Result For Frequency above 1GHz

BLE

Operation Band Test Date :2019-03-29

Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg C / 65 RH

Operation Mode :Tx CH LOW Engineer :Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	38.21	3.11	41.32	54.00	-12.68
4804.00	Peak	45.84	3.11	48.95	74.00	-25.05
7206.00	Average	41.12	11.31	52.43	54.00	-1.57
7206.00	Peak	48.19	11.31	59.50	74.00	-14.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis facture of the state of the sample of the documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 52 of 66

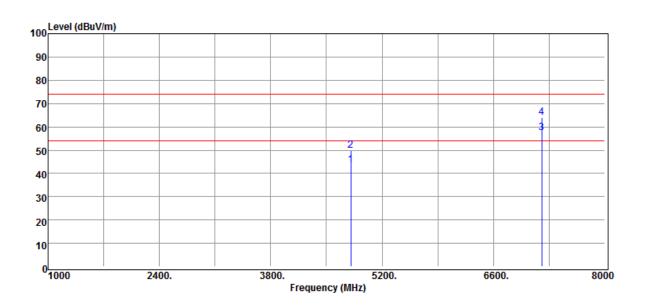
Operation Band :BLE Fundamental Frequency :2402 MHz **Operation Mode** :Tx CH LOW

EUT Pol. :E2 Plan **Test Date** :2019-03-29

Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4804.00	Average	40.50	3.11	43.61	54.00	-10.39
4804.00	Peak	46.76	3.11	49.87	74.00	-24.13
7206.00	Average	46.29	11.31	57.60	54.00	3.60
7206.00	Peak	52.63	11.31	63.94	74.00	-10.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

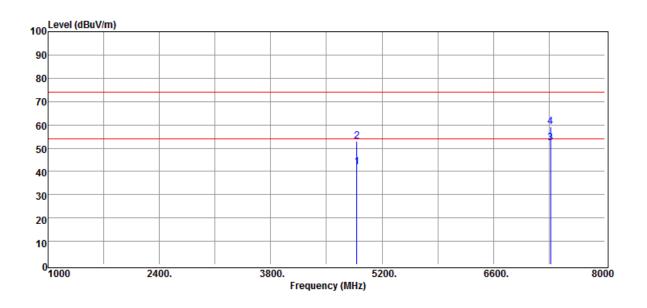


Page 53 of 66

Operation Band :BLE **Test Date** :2019-03-29

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4884.00	Average	38.56	3.47	42.03	54.00	-11.97
4884.00	Peak	49.38	3.47	52.85	74.00	-21.15
7320.00	Average	41.31	10.87	52.18	54.00	-1.82
7320.00	Peak	48.16	10.87	59.03	74.00	-14.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)

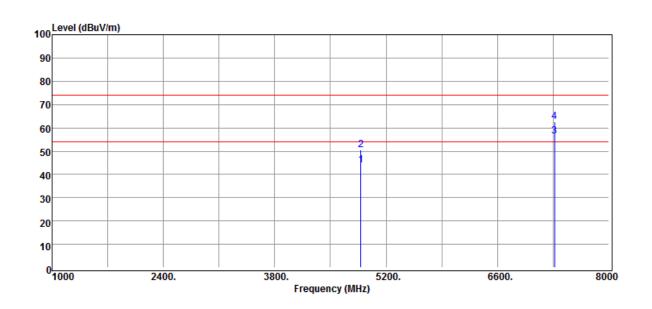


Page 54 of 66

Operation Band :BLE **Test Date** :2019-03-29

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH **Operation Mode** :Tx CH MID Engineer

:Jerry EUT Pol. :E2 Plan :HORIZONTAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4884.00	Average	40.36	3.47	43.83	54.00	-10.17
4884.00	Peak	47.13	3.47	50.60	74.00	-23.40
7320.00	Average	45.37	10.87	56.24	54.00	2.24
7320.00	Peak	51.71	10.87	62.58	74.00	-11.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

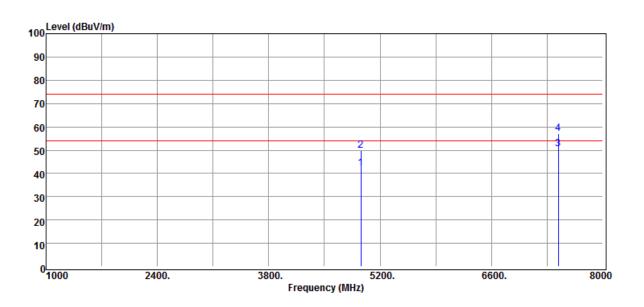


Page 55 of 66

Operation Band :BLE **Test Date** :2019-03-29

Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH HIGH Engineer :Jerry EUT Pol. ·F2 Plan :VERTICAL Measurement Antenna Pol.




Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4960.00	Average	37.69	4.48	42.17	54.00	-11.83
4960.00	Peak	45.38	4.48	49.86	74.00	-24.14
7440.00	Average	39.50	10.93	50.43	54.00	-3.57
7440 00	Peak	46 26	10 93	57 19	74 00	-16 81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)






Operation Band :BLE **Test Date** :2019-03-29

Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH

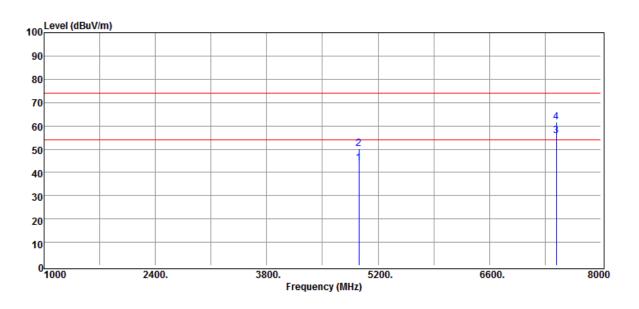Operation Mode :Tx CH HIGH Engineer :Jerry EUT Pol. ·F2 Plan :HORIZONTAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4960.00	Average	39.59	4.48	44.07	54.00	-9.93
4960.00	Peak	45.69	4.48	50.17	74.00	-23.83
7440.00	Average	44.91	10.93	55.84	54.00	1.84
7440.00	Peak	50.58	10.93	61.51	74.00	-12.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 57 of 66

BLE 2M


Operation Band :BLE 2M **Test Date** :2019-03-29 :2402 MHz Temp./Humi. :24.1 deg_C / 65 RH

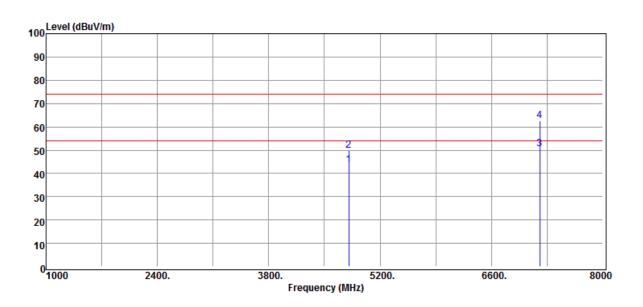Fundamental Frequency Operation Mode :Tx CH LOW Engineer :Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dΒμV/m	dB
4804.00	Average	40.57	3.11	43.68	54.00	-10.32
4804.00	Peak	46.88	3.11	49.99	74.00	-24.01
7206.00	Average	39.26	11.31	50.57	54.00	-3.43
7206.00	Peak	51.38	11.31	62.69	74.00	-11.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode**

EUT Pol.

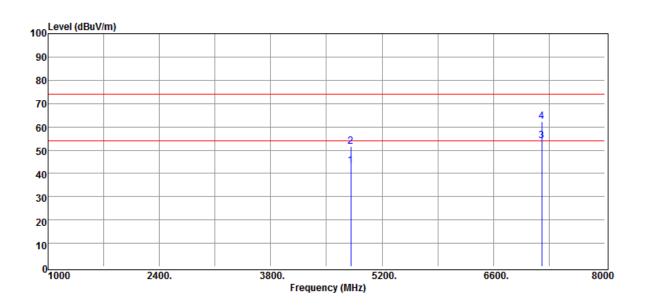
:BLE 2M :2402 MHz :Tx CH LOW :E2 Plan

Test Date :2019-03-29

Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4804.00	Average	40.17	3.11	43.28	54.00	-10.72
4804.00	Peak	48.31	3.11	51.42	74.00	-22.58
7206.00	Average	42.55	11.31	53.86	54.00	-0.14
7206.00	Peak	51.05	11.31	62.36	74.00	-11.64


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Replay a state of the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Replay a state of the results shown in this test report refer only to the sample(s) tested and such sample(s) teste document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)






Operation Band :BLE 2M **Test Date** :2019-03-29


Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

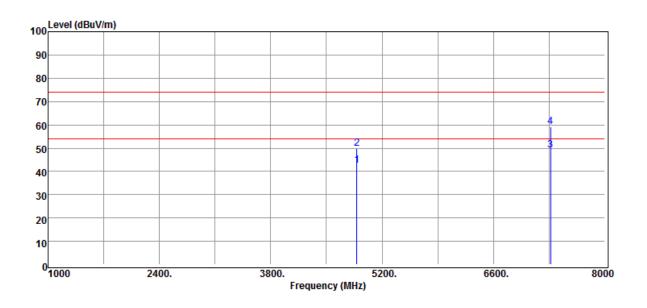Operation Mode :Tx CH MID Engineer :Jerry EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4884.00	Average	39.08	3.47	42.55	54.00	-11.45
4884.00	Peak	46.37	3.47	49.84	74.00	-24.16
7320.00	Average	38.10	10.87	48.97	54.00	-5.03
7320.00	Peak	48.30	10.87	59.17	74.00	-14.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :BLE 2M **Test Date** :2019-03-29

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Jerry

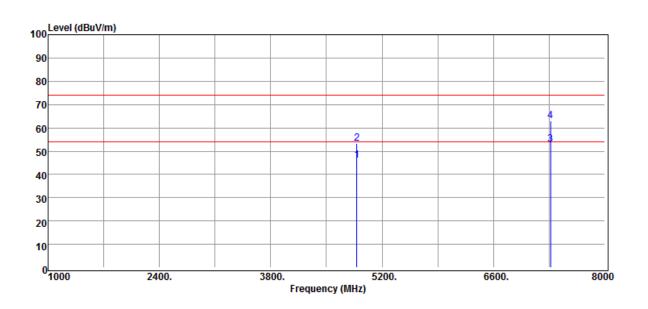EUT Pol. :E2 Plan :HORIZONTAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4884.00	Average	42.57	3.47	46.04	54.00	-7.96
4884.00	Peak	49.66	3.47	53.13	74.00	-20.87
7320.00	Average	42.24	10.87	53.11	54.00	-0.89
7320.00	Peak	52.05	10.87	62.92	74.00	-11.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 61 of 66

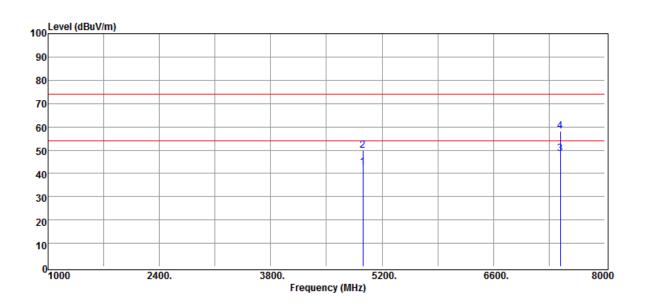
Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BLE 2M :2480 MHz :Tx CH HIGH :E2 Plan

Test Date :2019-03-29


Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Jerry :VERTICAL Measurement Antenna Pol.



Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4960.00	Average	38.22	4.48	42.70	54.00	-11.30
4960.00	Peak	45.27	4.48	49.75	74.00	-24.25
7440.00	Average	37.55	10.93	48.48	54.00	-5.52
7440.00	Peak	47.21	10.93	58.14	74.00	-15.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :BLE 2M **Test Date** :2019-03-29


Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH

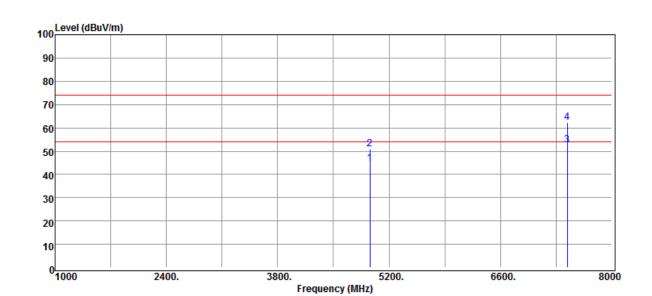Operation Mode :Tx CH HIGH Engineer :Jerry EUT Pol. :E2 Plan :HORIZONTAL Measurement Antenna Pol.



Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4960.00	Average	40.23	4.48	44.71	54.00	-9.29
4960.00	Peak	46.23	4.48	50.71	74.00	-23.29
7440.00	Average	41.76	10.93	52.69	54.00	-1.31
7440.00	Peak	51.28	10.93	62.21	74.00	-11.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 63 of 66



11 POWER SPECTRAL DENSITY

11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 **Measurement Equipment Used:**

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019	
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020	

11.3 Test Set-up:



11.4 **Measurement Procedure:**

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 64 of 66

11.5 **Measurement Result:**

BLE

Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-11.89	8	PASS
2442	-12.01	8	PASS
2480	-12.50	8	PASS

NOTE: cable loss as 1dB that offsets in the spectrum

BLE 2M


Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-14.30	8	PASS
2442	-14.62	8	PASS
2480	-14.99	8	PASS

NOTE: cable loss as 1dB that offsets in the spectrum


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Power Density_BLE_1M_LowCH00-2402




1M MidCH19-2442 Power Density BLE




Power Density BLE 1M_HighCH39-2480




Power Density_BLE_2M_LowCH00-2402



2M Power Density BLE MidCH19-2442



Power Density BLE 2M HighCH39-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

12.2 **Antenna Connected Construction:**

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.