

FCC Part 15

TEST REPORT

of

E.U.T. : **Portable Navigation System**

Trade Name : Panasonic

Model Number : CN-GP50U; CN-GP50N; CN-GP50

Prepared for

Quanta Computer Inc.

188, Wen Hwa 2nd Rd., Kuei Shan, Tao Yuan 33377, Taiwan

TEL : +886 3 327 2345

FAX : +886 3 396 1334

Prepared by

Interocean EMC Technology Corp.

244 No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark:

1. The test report consists of **96** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document. The test results in the report only to the tested sample.
2. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

TEST REPORT CERTIFICATION

Applicant: Quanta Computer Inc.
Manufacturer: Quanta Changshu Manufacturing City Tech-Full Computer (Changshu) Co., Ltd.
EUT Description: Portable Navigation System
Model No.: CN-GP50U; CN-GP50N; CN-GP50
Serial No.: N/A
Tested Power Supply: 120Vac; 60Hz
Date of Final Test: Aug. 14, 2007

Configuration of Measurements and Standards Used :

FCC Rules and Regulations Part 15 Subpart B & C
RSS-210 Issue 7 : 2007

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

- Note:** 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of IETC

Report Issued: 2007/09/06

Test Engineer: Anya Lee
Anya Lee

Checked: Danny Tang
Danny Tang

Approved: Mike Huang
Mike Huang 2007
09/06

Table of Contents

1	General Information	6
1.1	Description of Equipment Under Test	6
1.2	Technical Specifications	8
1.3	Table for Carrier Frequencies	10
1.4	Tested Supporting System Detail	11
1.5	Test Facility	13
1.6	Test Methodology	14
1.7	Bluetooth Approvals	14
1.8	Test Facility	14
2	PROVISIONS APPLICABLE.	15
2.1	Definition	15
2.2	Requirement for Compliance	16
2.3	Summary of Measurement	18
2.4	Restricted Bands of Operation	19
2.5	Labeling Requirement	20
2.6	User Information	20
3	SYSTEM TEST CONFIGURATION	21
3.1	Justification	21
4	Power Line Conducted Emission Measurement	22
4.1	Instrument	22
4.2	Block Diagram of Test Configuration	22
4.3	Conducted Limit (Power Line)	22
4.4	Instrument configuration	23
4.5	Configuration of Measurement	23
4.6	Test Result	23
5	Radiated Emission Measurement	26
5.1	Instrument	26
5.2	Instrument (For frequencies measured below 18 GHz)	26
5.3	Standard Applicable and limit	27
5.4	Measuring Instrument Setting	27
5.5	Block Diagram of Test Configuration	28
5.6	Measurement Instrument setting	29
5.7	Configuration of Measurement	29
5.8	Test Result	29
5.9	Field Strength Calculation	48
6	ANTENNA REQUIREMENT	49
6.1	Standard Applicable	49
6.2	Antenna Construction and Directional Gain	49

7	HOPPING CHANNEL BANDWIDTH MEASUREMENT	50
7.1	Instrument	50
7.2	Standard Applicable and limit	50
7.3	Block Diagram of Test Configuration	50
7.4	Measuring Instrument Setting	50
7.5	Configuration of Measurement	51
7.6	Test result	51
8	MAXIMUM OUTPUT POWER MEASUREMENT	54
8.1	Measurement Equipment	54
8.2	Standard Applicable and limit	54
8.3	Block Diagram of Test Configuration	54
8.4	Measurement Instrument setting	54
8.5	Configuration of Measurement	55
8.6	Test Result	55
9	100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT	58
9.1	Instrument	58
9.2	Standard Applicable	58
9.3	Block Diagram of Test Configuration	58
9.4	Measuring Instrument Setting	59
9.5	Configuration of Measurement	59
9.6	Test Result	59
10	HOPPING CHANNEL SEPARATION	62
10.1	Instrument	62
10.2	Standard Applicable	62
10.3	Block Diagram of Test Configuration	62
10.4	Measuring Instrument Setting	62
10.5	Configuration of Measurement	63
10.6	Test Result	63
11	NUMBER OF HOPPING FREQUENCY USED	66
11.1	Instrument	66
11.2	Standard Applicable and limit	66
11.3	Block Diagram of Test Configuration	66
11.4	Measuring Instrument Setting	66
11.5	Configuration of Measurement	67
11.6	Test Result	67

12 DWELL TIME ON EACH CHANNEL	70
12.1 Instrument	70
12.2 Standard Applicable and limit	70
12.3 Block Diagram of Test Configuration	70
12.4 Measuring Instrument Setting	70
12.5 Configuration of Measurement	71
12.6 Test Result	71
13 HOPPING SEQUENCE TEST	79
14 Photographs of Test	80
14.1 Power Line Conducted Emission Measurement	80
14.2 Radiated Emission Measurement	81
15 Photographs of EUT	84

1 General Information

1.1 Description of Equipment Under Test

Equipment Under Test : Portable Navigation System

Model Number : CN-GP50U; CN-GP50N; CN-GP50

Serial Number : N/A

Type of Sample Tested : Proto-type Pre-Production Mass Production

Applicant : **Quanta Computer Inc.**
188, Wen Hwa 2nd Rd., Kuei Shan, Tao Yuan 33377, Taiwan

Manufacturer : **Quanta Changshu Manufacturing City Tech-Full Computer (Changshu) Co., Ltd.**
No.8, Jinzhou Road, High-tech Industrial Park, Changshu Economic Development Zone, Changshu, Jiangsu Province, 215500 China

Power Supply : **Switching Adapter** :
Manufacturer : DVE ; Model No. : DSA-10P-05 050100
Input : 100~240Vac, 50-60Hz, 0.3A
Output : 5Vdc, 2A
Power cable : Non-shielded Un-detachable, 1.5m w/o core

Cigarette Lighter Adapter :
Input : 12-24Vdc
Output : 5Vdc, 2A
Power cable : Non-shielded Un-detachable, 1.8m w/o core
Serial No. : Y782007022GE3C

Build-in Li-ion battery :
2400mAh

Date of Receipt Sample : Aug. 10, 2007

Date of Test : Aug. 10~14, 2007

Description of E.U.T. : Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices. Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 81MHz width is available. In this band, 79 RF channels spaced 1MHz apart a defined. The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is deviled into time slots, with a nominal slot length of 625 μ s, where each slot corresponds to different RF hop frequencies. The nominal hop rate is1600 hops/s. All frequencies are equally used. The average time of occupancy is 0.3797 s within a 31.6 second period. The symbol rate on the channel is 1 Ms/s.

- Product Information** : 1. The model **CN-GP50U** is representative selected in the test and included in this report.
2. The serial model numbers only for the different electric plugs for separate markets.
3. **Data Cable :**
USB Cable*1: Shielded Detachable, 0.6m w/o core
4. **TMC Traffic Receiver :**
Model No. : CY-TM200U
5. **External GPS active Antenna :**
Model No. : CA-GP60U

1.2 Technical Specifications

Item		Description
1	CPU	400MHz
2	System Memory	SDRAM : 128MB
		NAND Flash memory : 128MB
3	Storage	2GB SD card for Map and media playback
4	Display	5" TFT-LCD transmissive type
		Digital RGB interface with resolution up to 480 * 272
		Touch screen : Resistive type, 3H hardness
		Combination brightness of 300nits
5	GPS receiver	SIRF Star III
		High sensitivity
		Built-in patch antenna
		External active antenna, MMCX
6	Direction Recognition	3D Electrical Compass with 3D G sensor for direction assistant
7	Audio	I2S
		2W mono speaker
		Build in Microphone for Bluetooth voice communication
8	Bluetooth	Fully compliant with Bluetooth TM 1.2 Standard
		Integrated Chip Antenna : Peak gain 0dBi
		UART interface
		Support profiles : SIM, Handfree, Headset
		With H/W Enhanced Echo cancellation
9	RDS-TMC	Optional external module
		UART I/F
10	Power	2.5mm DC jack
		2W max; 5V/2A for AC adapter input
		Build-in Li-ion battery : 2400mAh
		Battery operation : 3.5hours
		Source : AC adapter, USB, Cigar plug, Battery
11	OS	WinCE 5.0
12	Buttons	1 buttons : Power
		1Slide SW : Battery ON/OFF
13	PC link	USB 1.1 to PC for file transferring
14	LCD brightness	GUI adjustment
15	Volume control	GUI adjustment
16	I/O connection	DC-in jack, USB mini B connector, SD slot, external GPS antenna, external RDS_TMC (mini USB A type connector)
17	Car mount	Suction with holder

18	Accessory	Cigar plug, DC12~24V/5V, 2A, 1.8m (color : black)
		AC adapter, 100~240V, 50/60Hz,5V/2A (color : black)
		Map data DVD
		USB cable, 60cm; Standard A to mini B (color : black)
		Operation Manual in CD
		Quick manual (A3 folding) and Installation quick manual (A3 folding)
19	Options	RDS-TMC module-mini USB A type connector
		External GPS active antenna : 6m (color : black)

1.3 Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	31	2432 MHz	61	2462 MHz
2	2403 MHz	32	2433 MHz	62	2463 MHz
3	2404 MHz	33	2434 MHz	63	2464 MHz
4	2405 MHz	34	2435 MHz	64	2465 MHz
5	2406 MHz	35	2436 MHz	65	2466 MHz
6	2407 MHz	36	2437 MHz	66	2467 MHz
7	2408 MHz	37	2438 MHz	67	2468 MHz
8	2409 MHz	38	2439 MHz	68	2469 MHz
9	2410 MHz	39	2440 MHz	69	2470 MHz
10	2411 MHz	40	2441 MHz	70	2471 MHz
11	2412 MHz	41	2442 MHz	71	2472 MHz
12	2413 MHz	42	2443 MHz	72	2473 MHz
13	2414 MHz	43	2444 MHz	73	2474 MHz
14	2415 MHz	44	2445 MHz	74	2475 MHz
15	2416 MHz	45	2446 MHz	75	2476 MHz
16	2417 MHz	46	2447 MHz	76	2477 MHz
17	2418 MHz	47	2448 MHz	77	2478 MHz
18	2419 MHz	48	2449 MHz	78	2479 MHz
19	2420 MHz	49	2450 MHz	79	2480 MHz
20	2421 MHz	50	2451 MHz		
21	2422 MHz	51	2452 MHz		
22	2423 MHz	52	2453 MHz		
23	2424 MHz	53	2454 MHz		
24	2425 MHz	54	2455 MHz		
25	2426 MHz	55	2456 MHz		
26	2427 MHz	56	2457 MHz		
27	2428 MHz	57	2458 MHz		
28	2429 MHz	58	2459 MHz		
29	2430 MHz	59	2460 MHz		
30	2431 MHz	60	2461 MHz		

1.4 Tested Supporting System Detail

1.4.1 Personal Computer

PC14

Model Number : IBM ThinkCentre 8175-IWV
Serial Number : 99ZF224
CPU Speed : Pentium 4 Celeron 2.66 GHz
EMC Compliance : CE FCC DoC, BSMI R33026
Manufacturer : IBM
RAM : 256M*1
Hard Disk Driver : 40GB

1.4.2 Monitor

MT14

Model Number : E71f
Serial Number : P3C041910760
EMC Compliance : FCC, CE, BSMI: R31374, UL, TUV
Manufacturer : ViewSonic
Data Cable : Shielded, Un-detachable, 1.2m

1.4.3 Keyboard

KB18

Model Number : Y-SM48
Serial Number : SY506U67239
EMC Compliance : FCC DoC, CE, C-Tick, BSMI T51160, VCCI
Manufacturer : LOGITECH
Data Cable : Shielded, Un-detachable, 1.5m

1.4.4 Mouse

MS25

Model Number : M-SBF83
Serial Number : HCA51802344
EMC Compliance : UL, BSMI R41126
Manufacturer : Logitech
Data Cable : Shielded, Un-detachable, 1.8m

1.4.5 Modem

MD02

Model Number : 199450041
Serial Number : 211-28E1-1100-3
EMC Compliance : N/A
Manufacturer : DATATRONICS
Data Cable : Shielded, Detachable, 1.5m
Power Adapter : Amigo, Model AM-12830A
Non-Shielded, Detachable, 1.8m

1.4.6 Printer

PR04

Model Number : C20SX
Serial Number : DW4Y038113
EMC Compliance : BSMI 3902E004
Manufacturer : EPSON
Data Cable : Shielded, Detachable, 1.8m
Power Cord : Non-shielded, Un-detachable, 1.8m

1.4.7 Secure Digital Card

SD-03

Model Number : TS128MSDC
Serial Number : 113785-0363
Manufacturer : Transcend
EMC Compliance : CE, FCC
Description : 128MB

1.5 Test Facility

- Site Description** : ☑OATS 2 ☑Conduction 2
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Site 1, 2 Location** : No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.
- Site 3, 4 Location** : No. 12, Ruei-Shu Valley, Ruei-Ping Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.
- Site Filing** : ● Federal Communication Commissions – USA
Registration No.: 96399 (OATS 1 & 2)
Registration No.: 518958 (OATS 3 & 4)
- Voluntary Control Council for Interference by Information
Technology Equipment (VCCI) – Japan
Registration No. (Conducted Room): C-1094
Registration No. (Conducted Room): T-271
Registration No. (OATS 1): R-1040
Registration No. (OATS 2): R-1041
- Industry Canada (IC)
Submission: 113543
- Japan Electrical Safety & Environment Technology Laboratories (JET)
Registration No.: 04S03-01
- Site Accreditation** : ● Bureau of Standards and Metrology and Inspection (BSMI) –
Taiwan, R.O.C.
Accreditation No.:
SL2-IN-E-0026 for CNS13438 / CISPR22
SL2-R1-E-0026 for CNS13439 / CISPR13
SL2-R2-E-0026 for CNS13439 / CISPR13
SL2-A1-E-0026 for CNS13783-1 / CISPR14-1
- National Voluntary Laboratory Accreditation Program
(NVLAP) - USA
NVLAP LAB CODE 200458
- Nemko AS
Authorization No.: ELA 181A
Authorization No.: ELA 181B
- Taiwan Accreditation Foundation (TAF)
Accrditation No.: 1113



1.6 Test Methodology

For Portable Navigation System, both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (2003) and other required measurements were illustrated in separate sections of this test report for details.

1.7 Bluetooth Approvals

For Portable Navigation System meeting the Bluetooth Specifications in the 2.4GHz band as of February 2001 operating in the USA.

1.8 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei County, Taiwan, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Oct 28,2002.

2 PROVISIONS APPLICABLE.

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device:

A digital device is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note: A manufacturer may also qualify a device intended to be marketed in a commercial business or industrial environment as a Class B digital device, and in fact is encouraged to do so provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as below table.

For unintentional device, according to CISPR Line Conducted Emission Limits class B is as following:

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 - 0.5	66-56	56-46
0.5 - 5.0	56	46
5.0 - 30.0	60	50

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters (m)	Radiated (dB μ V/m)	Radiated (μ V/m)
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

For unintentional device, according to CISPR Line Radiated Emission Limits class B is as following:

Frequency (MHz)	Distance Meters (m)	Radiated (dB μ V/m)
30 to 230	10	30
230 to 1000	10	37

Frequency (MHz)	Average dB (μ V/m)
Above 1000	54.0

(3) Hopping Channel Separation and 20 dB Bandwidth

According to 15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

(4) Maximum Output Power Requirement

According to 15.247(b)(1) For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 hopping channels and all frequency hopping systems in the 5725MHz-5850MHz band: 1 Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (20.97dBm). The limitation has to be reduced by the amount in dB that the gains of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

(5) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), in any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

(6) Number of Hopping Frequency used

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

(7) Dwell Time on each channel

According to 15.247(a)(1)(iii), The average time of occupancy on any frequency shall not be greater than 0.4 second within a period of 0.4 seconds multiplied by the number of hopping channels employed.

2.3 Summary of Measurement

Report Clause	Test Parameter	Remarks	Reference Document CFR47 Part15	Test result
4	Conducted Emission Requirement	Applicable	§15.207(a)	PASSED
5	Radiated Emission Requirement	Applicable	§15.209(a)	PASSED
7	20 dB Bandwidth	Applicable	§15.247(a) (1)	PASSED
8	Maximum Output Power Requirement	Applicable	§15.247(b) (1)	PASSED
9	100 kHz Bandwidth of Frequency Band Edges Requirement	Applicable	§15.247(d)	PASSED
10	Hopping Channel Separation	Applicable	§15.247(a) (1)	PASSED
11	Number of Hopping Frequency used	Applicable	§15.247(b) (1) (iii)	PASSED
12	Dwell Time on each channel	Applicable	§15.247(a)(1)(iii)	PASSED
6	Antenna Requirement	N/A	§15.203	Compliance

2.4 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.5 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.6 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3 SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion, as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT to maximize the emission from EUT.

For conducted emissions, only measured on TX / RX and charge mode operation, for the digital circuits portion also function normally whenever TX or RX is operated. For radiated emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed by operation mode. During the preliminary test, the worse cases are TX / RX and charge mode, and data presented in this test report just shows the worse case.

4 Power Line Conducted Emission Measurement


4.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Last Calibration
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100135	2007/08/03
L.I.S.N.	Schwarzbeck	NNLK8121	8121417	2007/07/17
L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100176	2007/02/14
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	843602/02	2006/09/11
RF Cable	HARBOUR	RG400	CBL04	2007/08/09

Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

4.2 Block Diagram of Test Configuration

Configuration of Instrument Setup.

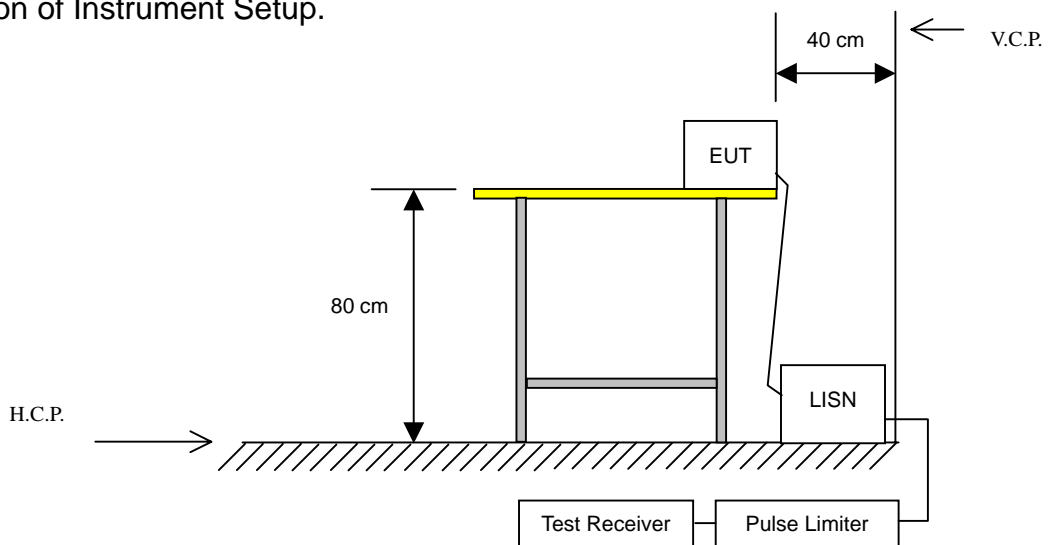

4.3 Conducted Limit (Power Line)

Limits for conducted emissions

Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)
0.15 to 0.5	66 to 56	56 to 46
> 0.5 to 5	56	46
> 5 to 30	60	50

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

Limits for conducted emissions of equipment intended to be used in telecommunication centers only

Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)
0.15 to 0.5	79	66
> 0.5 to 30	73	60

4.4 Instrument configuration

- 4.4.1 Set the EMI test receiver frequency range from 150 kHz to 30 MHz.
- 4.4.2 Set the EMI test receiver bandwidth at 9kHz.
- 4.4.3 Set the EMI test receiver detector as Quasi-Peak (Q.P.) and Average (AV).

4.5 Configuration of Measurement

- 4.5.1 The EUT was placed on a non-conductive table whose total height equaled 80cm and vertical conducting plane located 40cm to the rear of the EUT.
- 4.5.2 The EUT was connected to the main power through Line Impedance Stabilization Networks (LISN). This setup provided a 50ohm / 50mH coupling impedance for the measuring equipment. The auxiliary equipment was also connected to the main power through a LISN that provided a 50ohm/50mH coupling impedance with 50ohm termination. (Refer to the block diagram of the test setup and photographs.)
- 4.5.3 The conducted disturbance was measured between the phase lead and the reference ground, and between the neutral lead and reference ground. The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.
- 4.5.4 The identification of the frequency of highest disturbance with respect to the limit was found by investigating disturbances at a number of significant frequencies. The probable frequency of maximum disturbance had been found and that the associated cable and EUT configuration and mode of operation had been identified.

4.6 Test Result

PASS.

The final test data is shown on as following pages.


Power Line Conducted Test Data

EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 27.0 °C Humidity: 52 %	POLARITY: Line DISTANCE: Serial No.: FILE/DATA#: Quanta.emi/56 OPERATOR: Sunny TEST SITE: Conduction2
---	--

Frequency (MHz)	Factor (dB)	Meter Reading (dBuV)		Emission Level (dBuV)		Limits (dBuV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.498	0.14	48.66	37.70	48.80	37.84	56.03	46.03	-7.23	-8.19
0.627	0.14	48.07	34.35	48.21	34.49	56.00	46.00	-7.79	-11.51
0.724	0.14	45.70	33.27	45.84	33.41	56.00	46.00	-10.16	-12.59
0.931	0.15	49.10	35.93	49.25	36.08	56.00	46.00	-6.75	-9.92
1.060	0.15	50.92	36.64	51.07	36.79	56.00	46.00	-4.93	-9.21
1.228	0.16	49.44	34.50	49.60	34.66	56.00	46.00	-6.40	-11.34

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

LIMIT: CISPR 22-B(QP).LMT

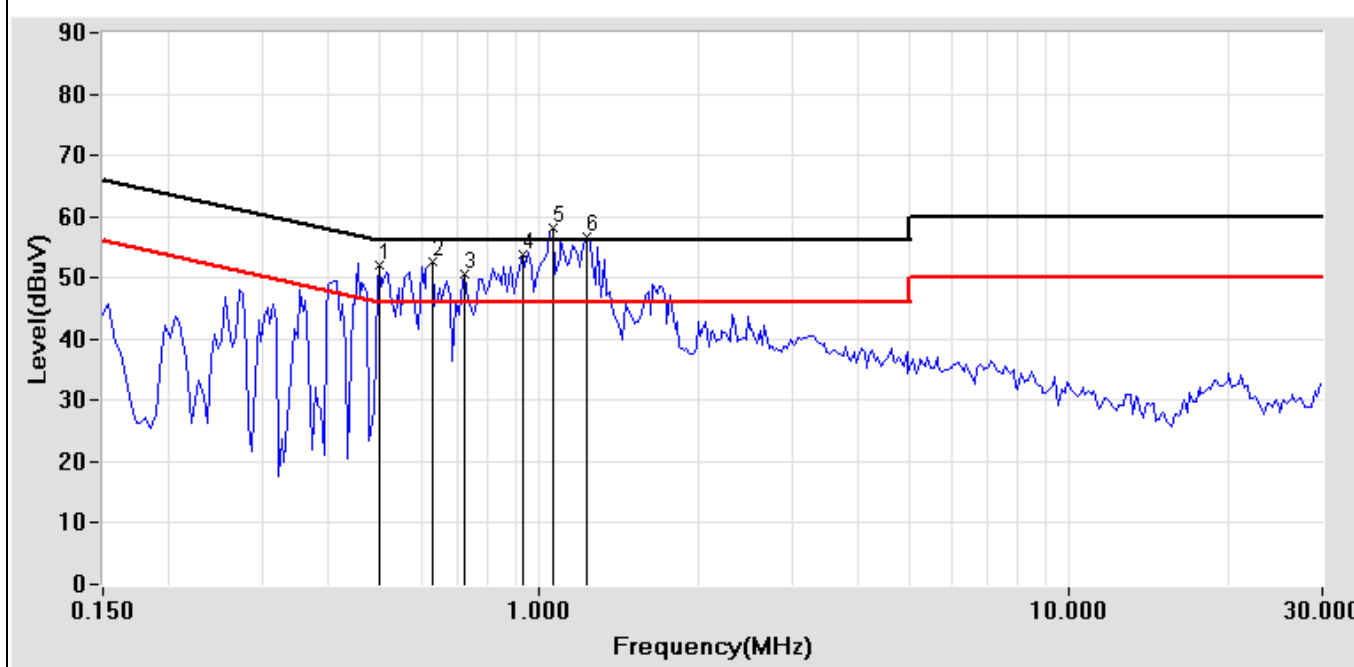

Test Mode: Mode 1: Operation Mode


Power Line Conducted Test Data

EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 27.0 °C Humidity: 52 %	POLARITY: Neutral DISTANCE: Serial No.: FILE/DATA#: Quanta.emi/57 OPERATOR: Sunny TEST SITE: Conduction2
---	---

Frequency (MHz)	Factor (dB)	Meter Reading (dBuV)		Emission Level (dBuV)		Limits (dBuV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.498	0.14	48.62	32.04	48.76	32.18	56.03	46.03	-7.27	-13.85
0.681	0.14	45.00	25.62	45.14	25.76	56.00	46.00	-10.86	-20.24
0.959	0.15	50.00	32.22	50.15	32.37	56.00	46.00	-5.85	-13.63
1.127	0.15	51.42	32.99	51.57	33.14	56.00	46.00	-4.43	-12.86
1.224	0.16	50.54	30.96	50.70	31.12	56.00	46.00	-5.30	-14.88
1.693	0.17	41.56	25.55	41.73	25.72	56.00	46.00	-14.27	-20.28

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

LIMIT: CISPR 22-B(QP).LMT

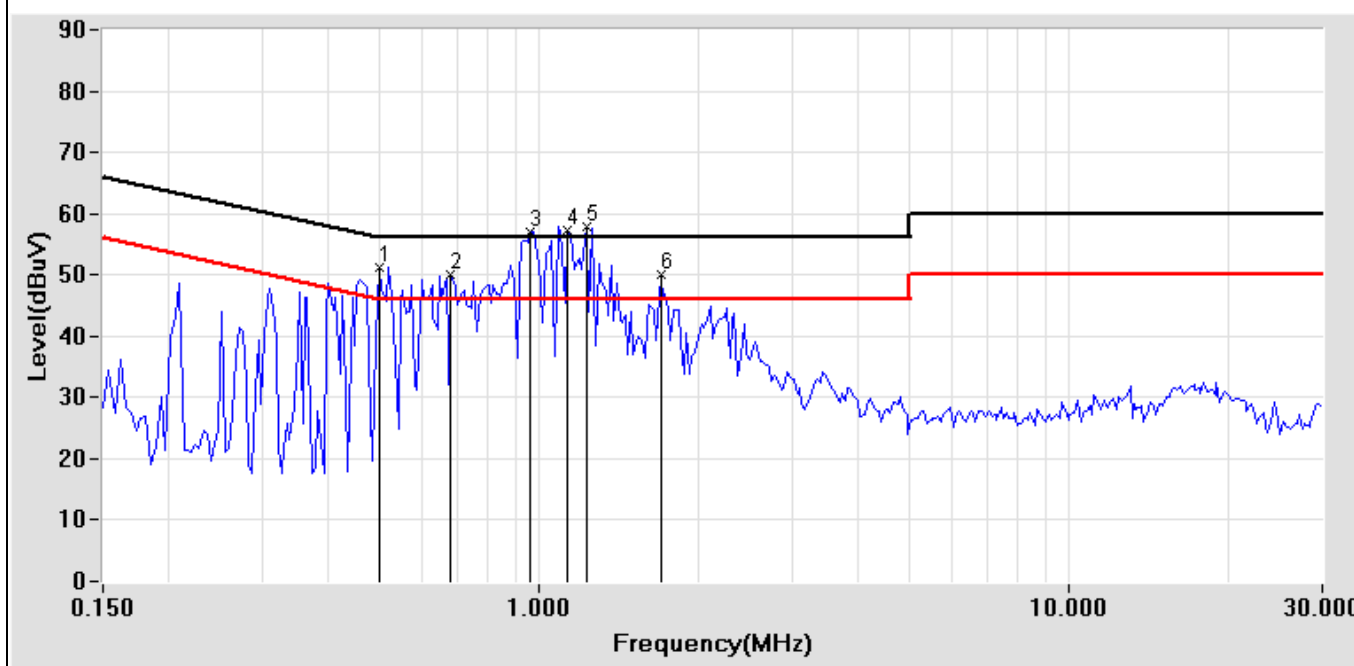

Test Mode: Mode 1: Operation Mode

5 Radiated Emission Measurement

5.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Last Calibration
Spectrum Analyzer	R&S	FSP30	100002	2006/11/14
EMI Test Receiver	Rohde & Schwarz	ESVS10	826148/011	2007/07/04
Biconical Antenna	Schwarzbeck	VHA 9103	2484	2006/10/19
Log Antenna	Schwarzbeck	UHALP 9108	A 0765	2006/09/07
Pre-Amplifier	HP	8447D	2944A10321	2007/07/17
RF Cable	Ultra Link	CBL02	CBL02	2007/05/04

Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

Instrument	Manufacturer	Model	Serial No.	Last Calibration
Horn Antenna	COM-POWER	AH-118	10081	2006/05/16
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170213	2006/06/13

Note: All instrument upon which need to be calibrated are within calibration period of 2 year.

5.2 Instrument (For frequencies measured below 18 GHz)

Instrument	Manufacturer	Model	Serial No.	Last Calibration
Spectrum Analyzer	R&S	FSP30	100002	2006/11/14
Cable	IETC	CBL07	CBL07	2007/05/08

Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

Instrument	Manufacturer	Model	Serial No.	Last Calibration
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170213	2006/06/13
Preamplifier	Agilent	83050A	3950A00225	2006/08/03

Note: All instrument upon which need to be calibrated are within calibration period of 2 year.

5.3 Standard Applicable and limit

For intentional radiator, the radiated emission shall comply with §15.209(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

Frequency (MHz)	Field strength dB(μ V/m)	Measurement distance (meters)
1.705~30.0	29.5	30
30 ~ 88	40	3
88~216	43.5	3
216~960	46	3
Above 960	54	3


5.4 Measuring Instrument Setting

Spectrum Parameter	Setting
Span Frequency	wide enough to fully capture the emission being measured
Resolution BW	1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
Video BW	\geq Resolution BW
Detector function	Peak
Trace	Max Hold
Sweep Time	Auto


Spectrum Parameter	Setting
Span Frequency	wide enough to fully capture the emission being measured
Resolution BW	1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
Video BW	10Hz
Detector function	Average
Trace	Max Hold
Sweep Time	Auto

5.5 Block Diagram of Test Configuration


Frequencies measured below 1 GHz configuration

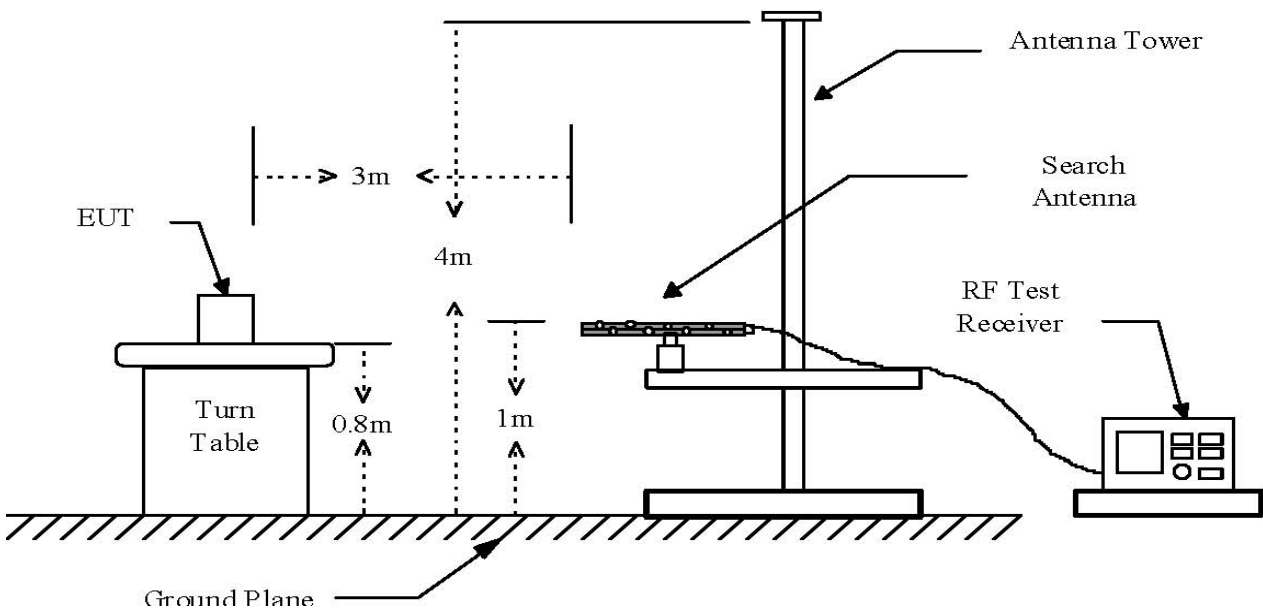

Frequencies measured from 1GHz to 18 GHz configuration

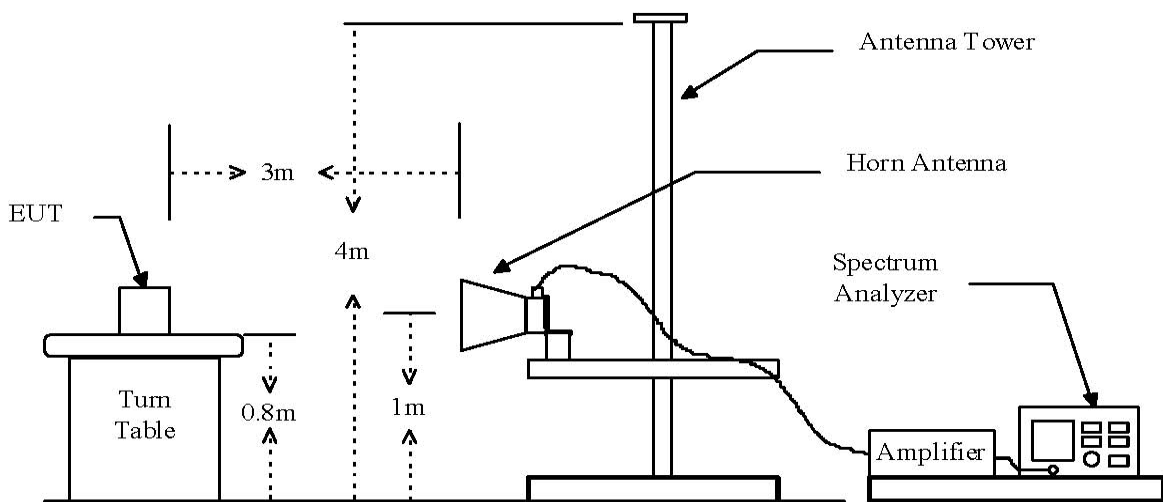

Frequencies measured above 18 GHz configuration

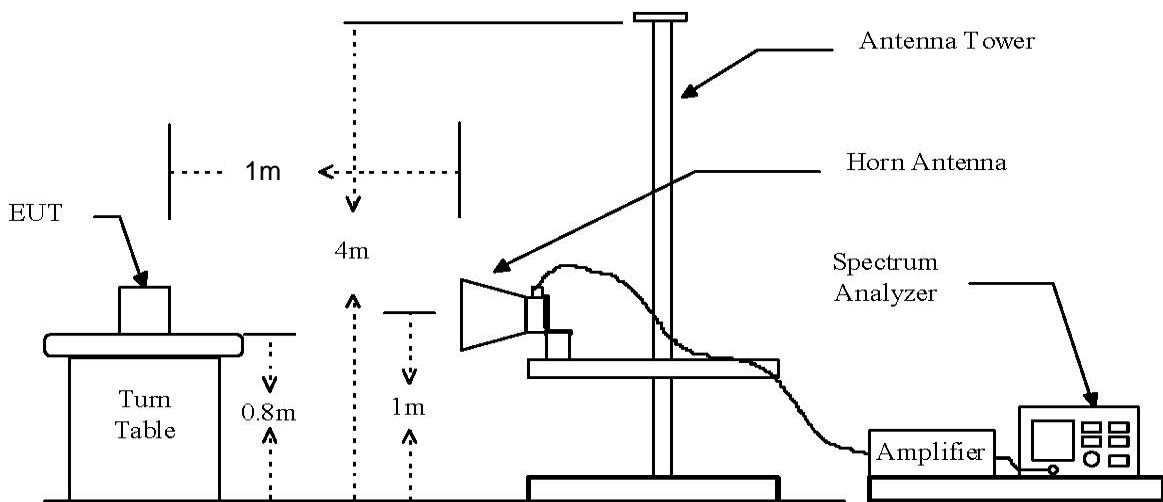

5.6 Measurement Instrument setting

- 5.6.1 Set the EMI test receiver frequency range from 30 MHz to 1000 MHz.
- 5.6.2 Set the EMI test receiver bandwidth at 120 kHz.
- 5.6.3 Set the EMI test receiver detector as Quasi-Peak (Q.P.).

5.7 Configuration of Measurement

- 5.7.1 Setup the configuration per 5.2 for frequencies measured below and above 1 GHz respectively.
- 5.7.2 For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
- 5.7.3 For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 5.5.2.
- 5.7.4 The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
- 5.7.5 Note: A band pass filter was used to avoid pre-amplifier saturated when measure TX operation mode in frequency band above 1 GHz.
- 5.7.6 Repeat step 5.5.4 until all frequencies need to be measured were complete.
- 5.7.7 Repeat step 5.5.5 with search antenna in vertical polarized orientations.
- 5.7.8 Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

5.8 Test Result

PASS.

Results for the radiated measurements below 30MHz according §15.33

Frequency	Measured Values	Remarks
10kHz-30MHz	No emission found, caused by the EUT	This is valid for all the test channels

The final tested data are shown on following pages.

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Horizontal DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/32 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
71.100 **	-23.37	50.17	26.80	40.00	-13.20
122.710 **	-15.76	49.33	33.57	43.52	-9.95
190.370 **	-11.53	43.11	31.58	43.52	-11.94
481.710 **	-8.00	46.70	38.70	46.02	-7.32
677.400 **	-4.06	42.80	38.74	46.02	-7.28
780.100 **	-3.19	34.70	31.51	46.02	-14.51

Remark:

1. " ** " Mark means readings are Quasi-Peak values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCB_30m-1G(3m).LMT

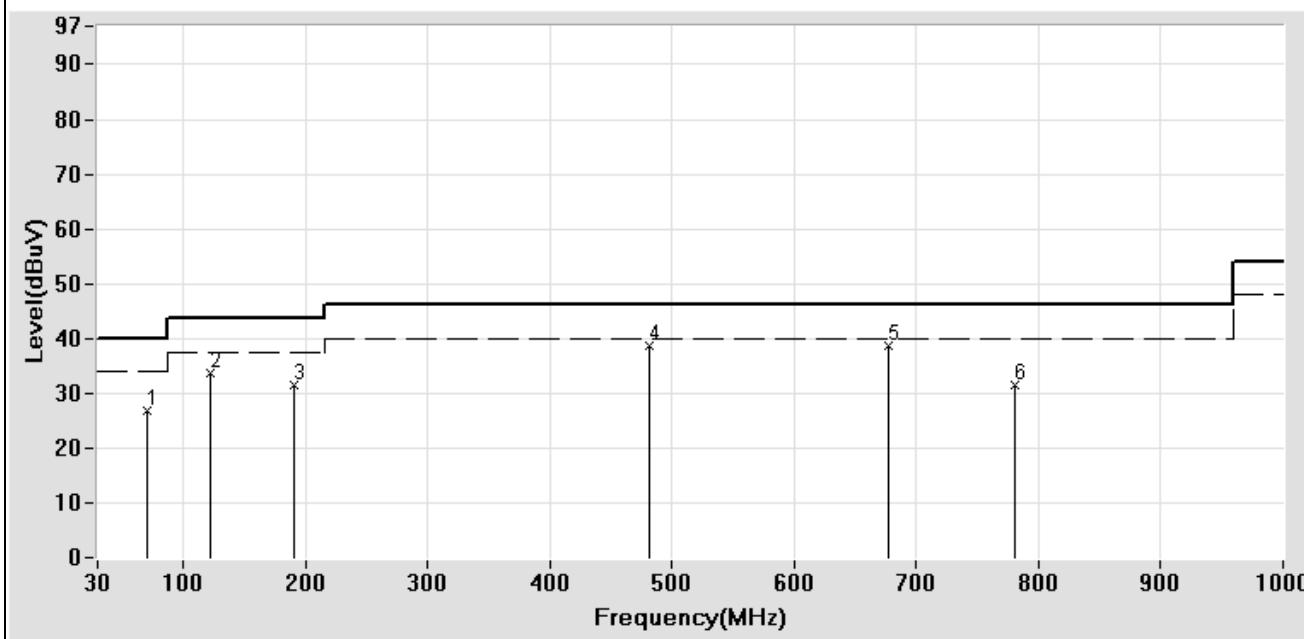

Test Mode: Operation Mode (CH1)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Vertical DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/31 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
61.000 **	-21.74	50.10	28.36	40.00	-11.64
120.002 **	-16.17	45.27	29.10	43.52	-14.42
175.364 **	-12.30	47.33	35.03	43.52	-8.49
359.955 **	-11.68	49.80	38.12	46.02	-7.90
480.030 **	-8.05	42.97	34.92	46.02	-11.10
777.117 **	-3.23	36.80	33.57	46.02	-12.45

Remark:

1. " ** " Mark means readings are Quasi-Peak values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCB_30m-1G(3m).LMT

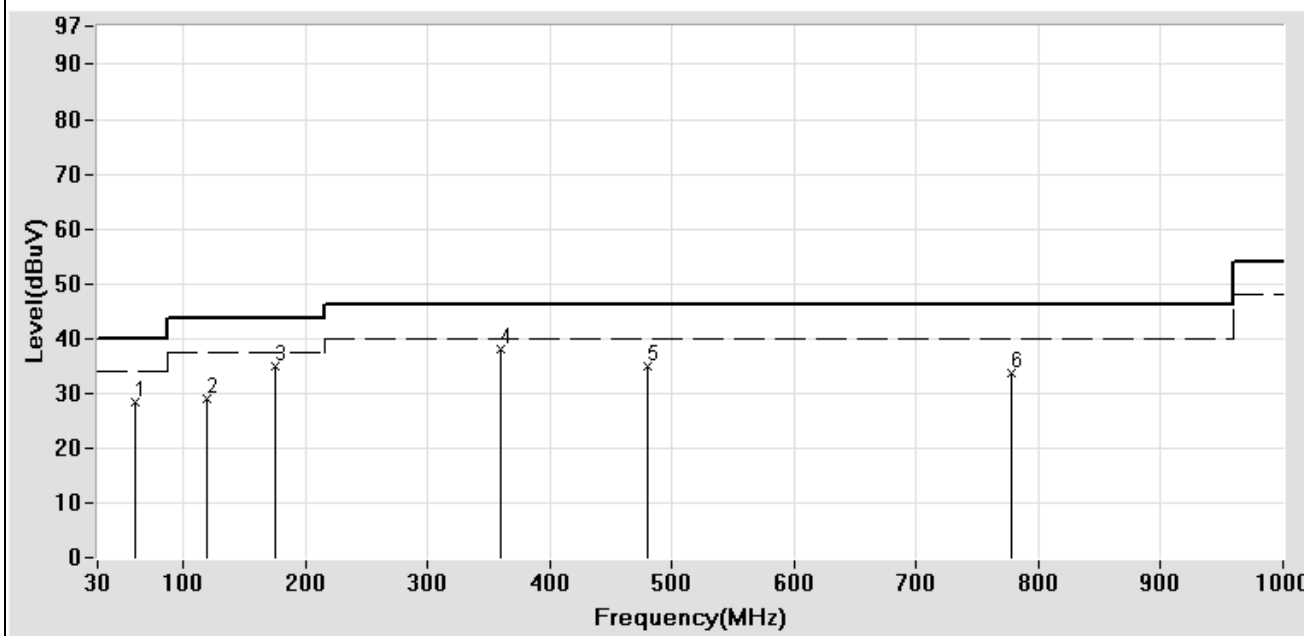

Test Mode: Operation Mode (CH1)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Horizontal DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/23 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
60.564 **	-21.60	49.71	28.11	40.00	-11.89
120.012 **	-16.17	43.60	27.43	43.52	-16.09
189.148 **	-11.58	42.21	30.63	43.52	-12.89
480.036 **	-8.05	45.93	37.88	46.02	-8.14
678.108 **	-4.07	43.16	39.09	46.02	-6.93
774.364 **	-3.28	35.76	32.48	46.02	-13.54

Remark:

1. " ** " Mark means readings are Quasi-Peak values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCB_30m-1G(3m).LMT

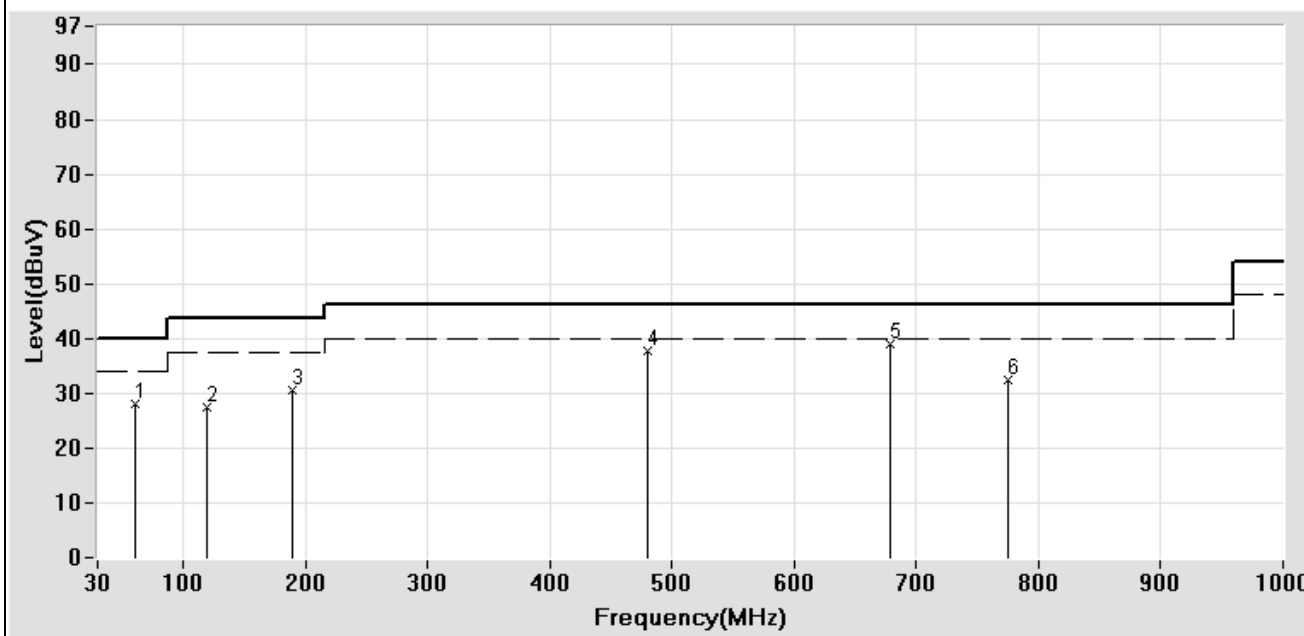

Test Mode: Operation Mode (CH40)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Vertical DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/22 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
60.660 **	-21.63	50.10	28.47	40.00	-11.53
120.012 **	-16.17	47.90	31.73	43.52	-11.79
191.988 **	-11.53	42.90	31.37	43.52	-12.15
480.400 **	-8.04	45.12	37.08	46.02	-8.94
678.128 **	-4.07	42.15	38.08	46.02	-7.94
720.000 **	-3.64	43.10	39.46	46.02	-6.56

Remark:

1. " ** " Mark means readings are Quasi-Peak values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCB_30m-1G(3m).LMT

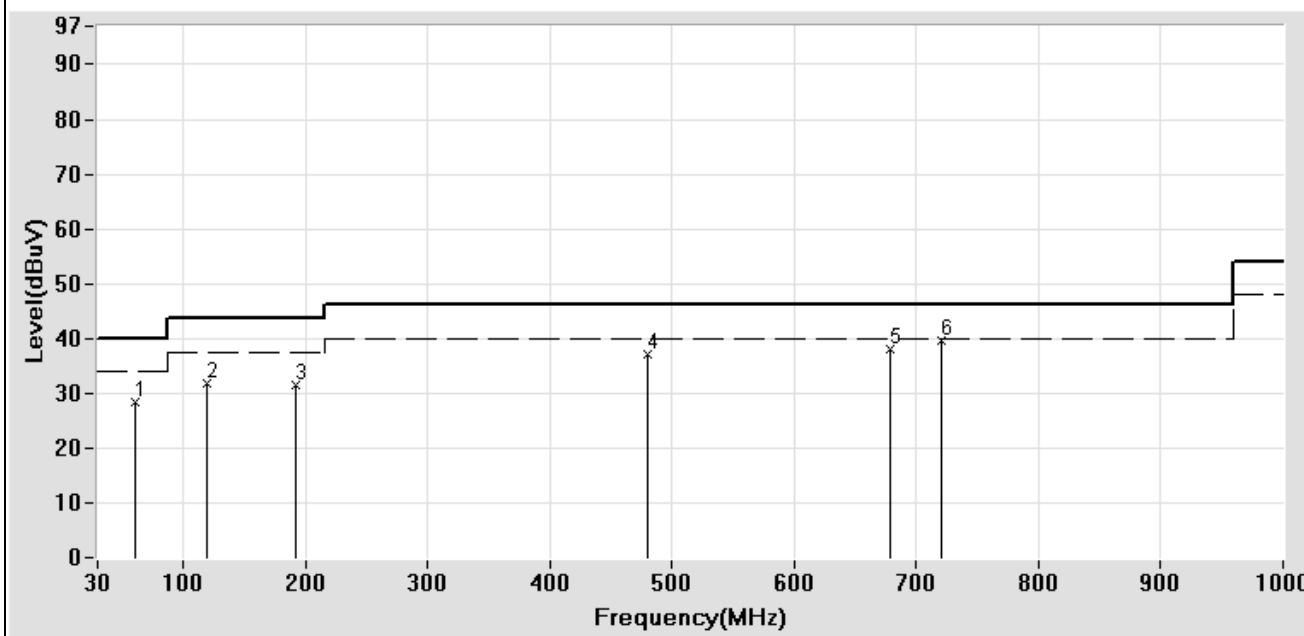

Test Mode: Operation Mode (CH40)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Horizontal DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/29 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
59.952 **	-21.41	52.33	30.92	40.00	-9.08
120.024 **	-16.17	44.49	28.32	43.52	-15.20
189.172 **	-11.57	42.25	30.68	43.52	-12.84
480.012 **	-8.05	43.16	35.11	46.02	-10.91
678.900 **	-4.06	43.87	39.81	46.02	-6.21
718.900 **	-3.66	41.77	38.11	46.02	-7.91

Remark:

1. " ** " Mark means readings are Quasi-Peak values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCB_30m-1G(3m).LMT

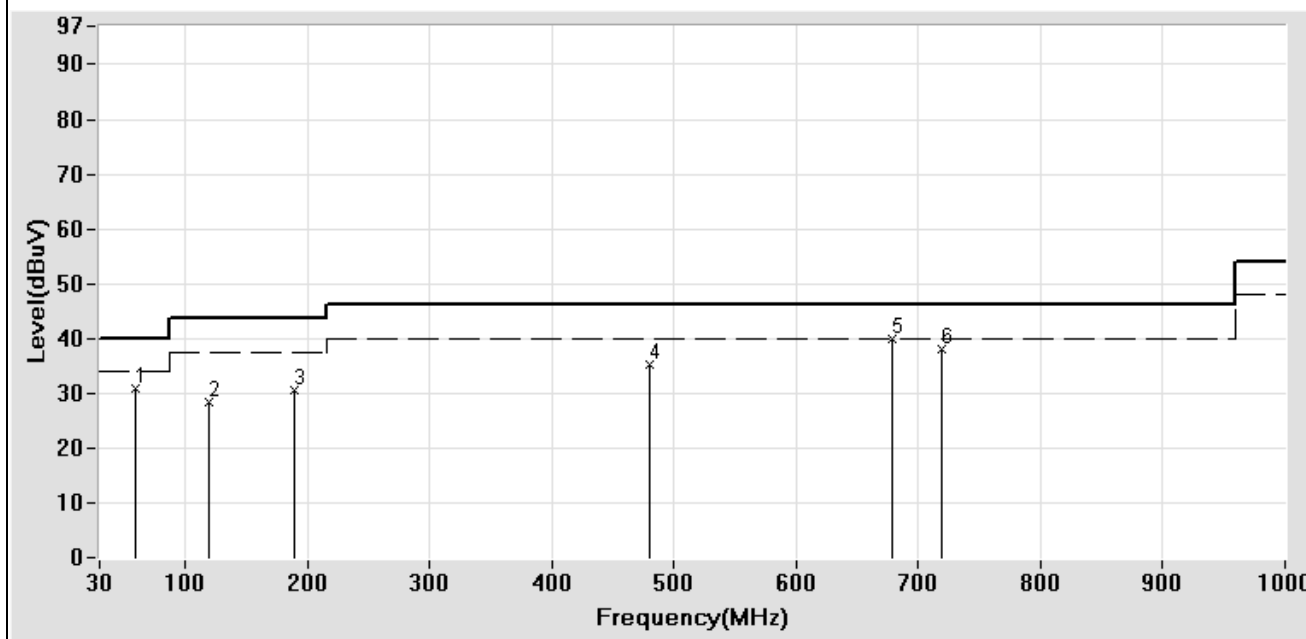

Test Mode: Operation Mode (CH79)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Vertical DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/30 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
60.700 **	-1.38	33.94	32.56	40.00	-7.44
121.870 **	4.09	29.10	33.19	43.52	-10.33
190.222 **	8.26	26.33	34.59	43.52	-8.93
480.000 **	11.58	26.08	37.66	46.02	-8.36
677.900 **	14.98	21.17	36.15	46.02	-9.87
717.900 **	15.31	24.12	39.43	46.02	-6.59

Remark:

1. " ** " Mark means readings are Quasi-Peak values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCB_30m-1G(3m).LMT

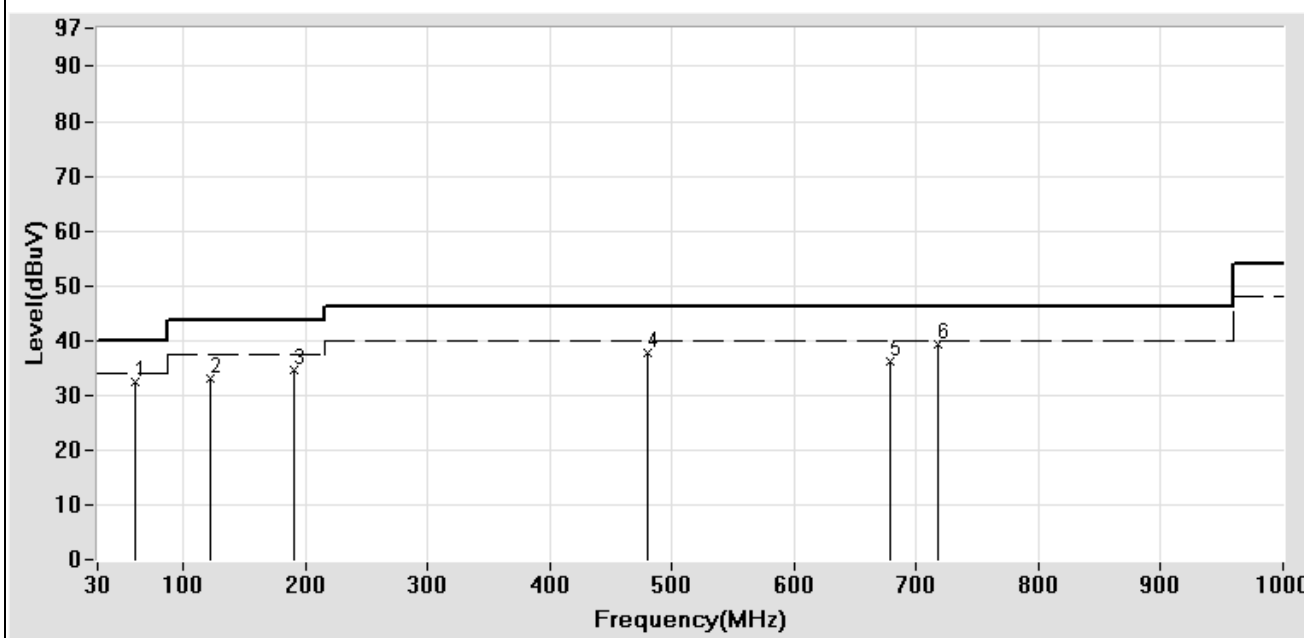

Test Mode: Operation Mode (CH79)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 27.3 °C Humidity: 58 %	POLARITY: Horizontal DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/17 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
4804.060 *	12.04	38.74	50.78	74.00	-23.22
4804.060 **	12.04	28.79	40.83	54.00	-13.17

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Average values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 1G(3MPK).LMT

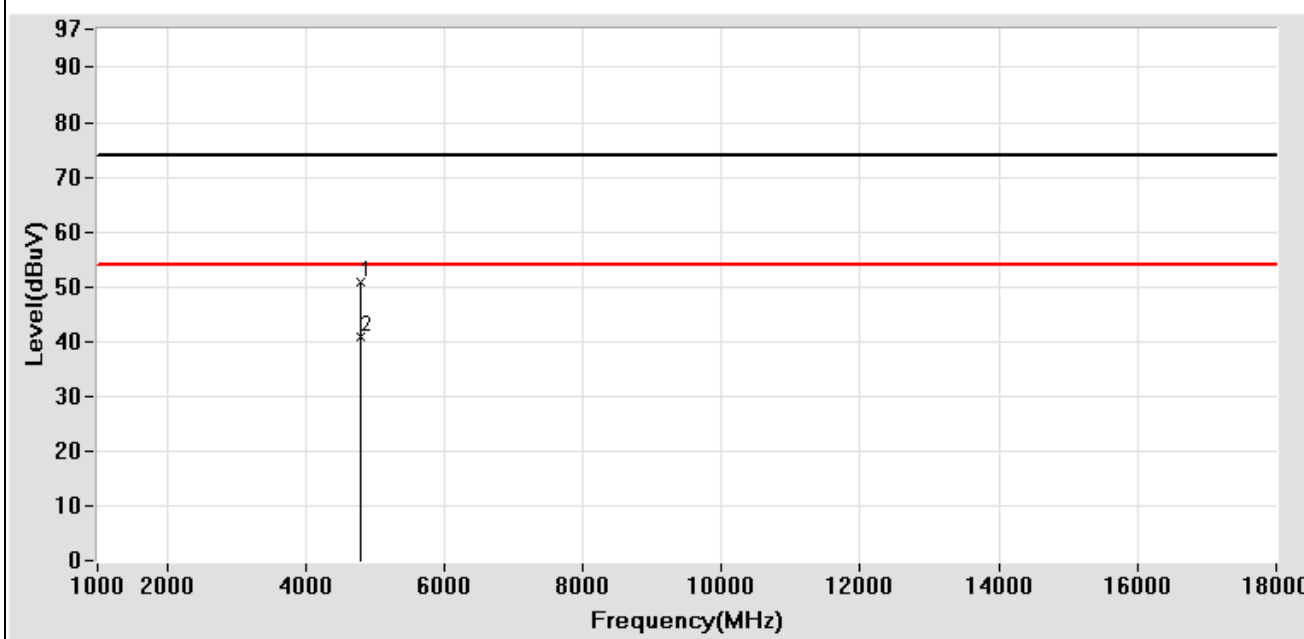

Test Mode: Operation Mode (CH1)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 27.3 °C Humidity: 58 %	POLARITY: Vertical DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/16 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
4804.120 *	12.04	39.93	51.97	74.00	-22.03
4804.120 **	12.04	35.28	47.32	54.00	-6.68

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Average values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 1G(3MPK).LMT

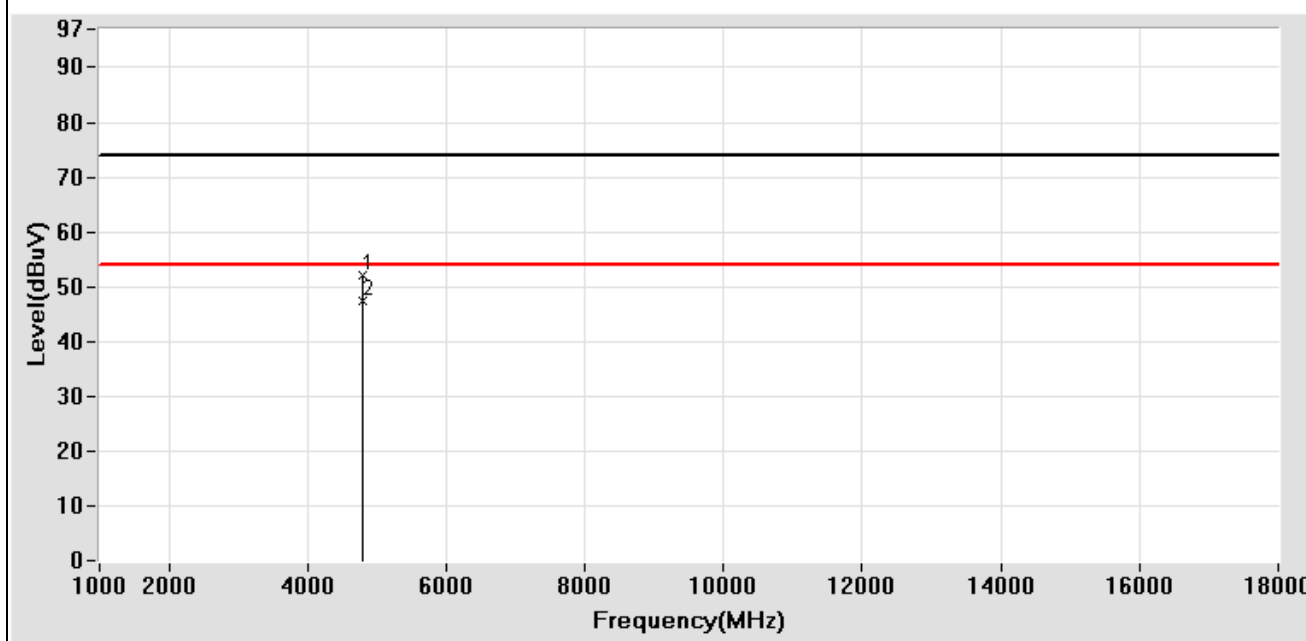

Test Mode: Operation Mode (CH1)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Horizontal DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/27 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
4882.036 *	12.22	38.11	50.33	74.00	-23.67
4882.036 **	12.22	34.55	46.77	54.00	-7.23

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Average values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 1G(3MPK).LMT

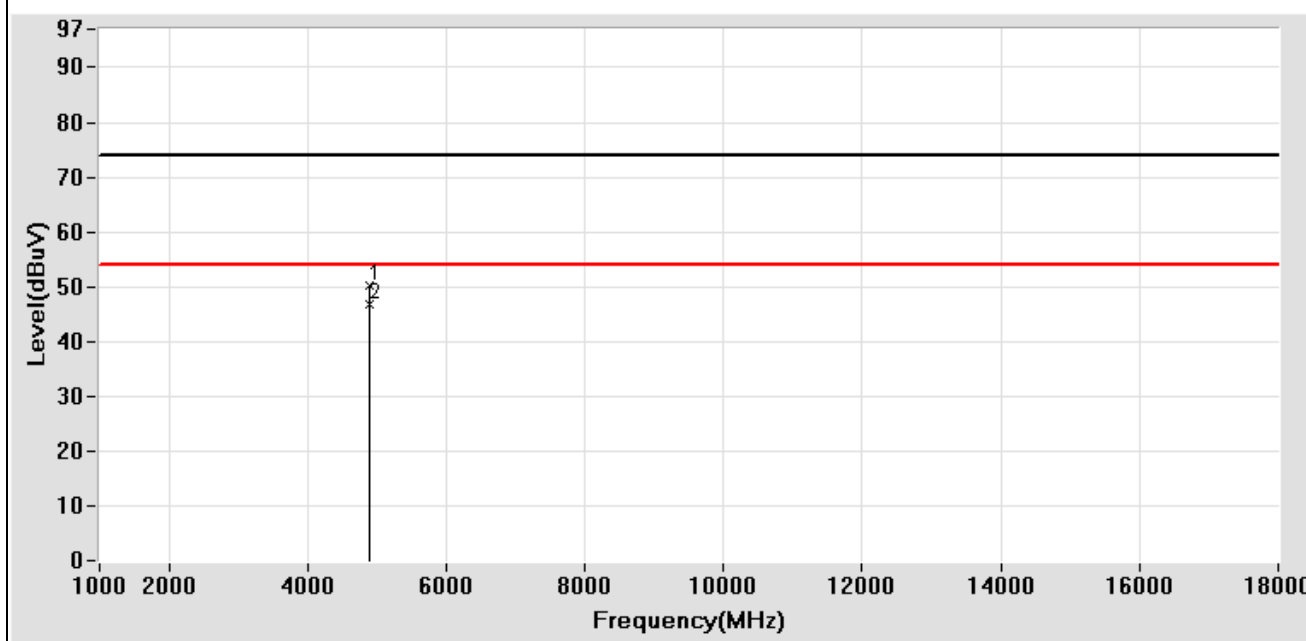

Test Mode: Operation Mode (CH40)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Vertical DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/28 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
4882.250 *	12.22	39.28	51.50	74.00	-22.50
4882.250 **	12.22	31.79	44.01	54.00	-9.99

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Average values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 1G(3MPK).LMT

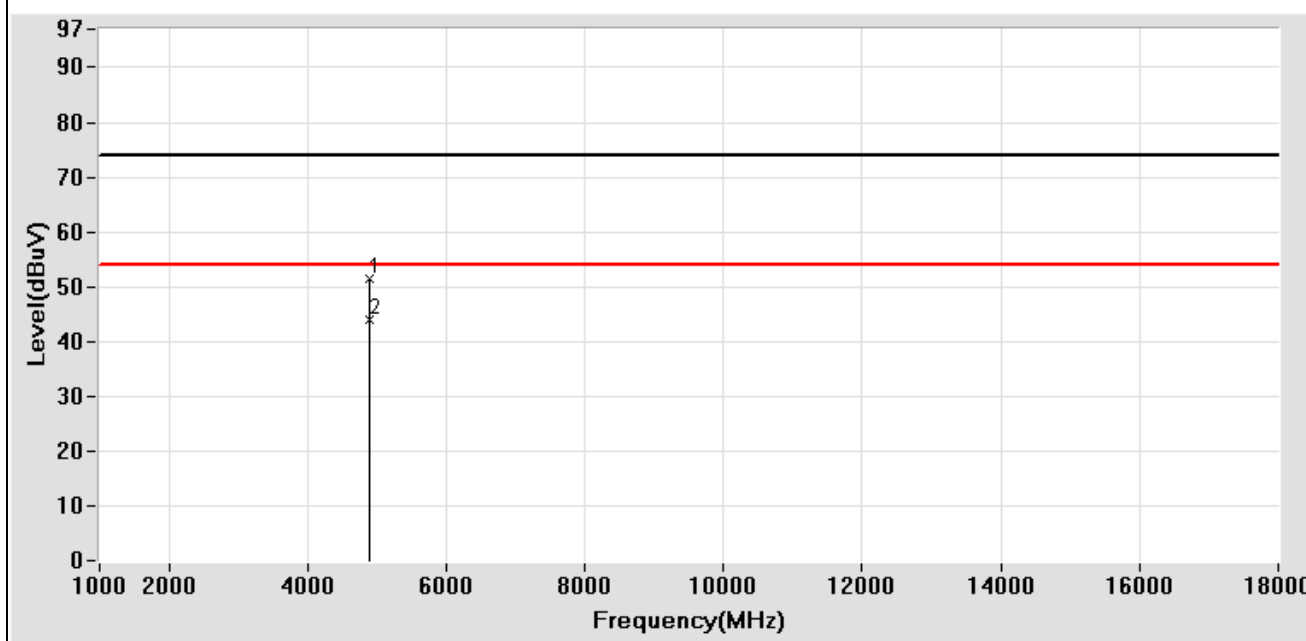

Test Mode: Operation Mode (CH40)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Horizontal DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/26 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
4957.898 *	12.40	40.34	52.74	74.00	-21.26
4957.898 **	12.40	31.46	43.86	54.00	-10.14

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Average values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 1G(3MPK).LMT

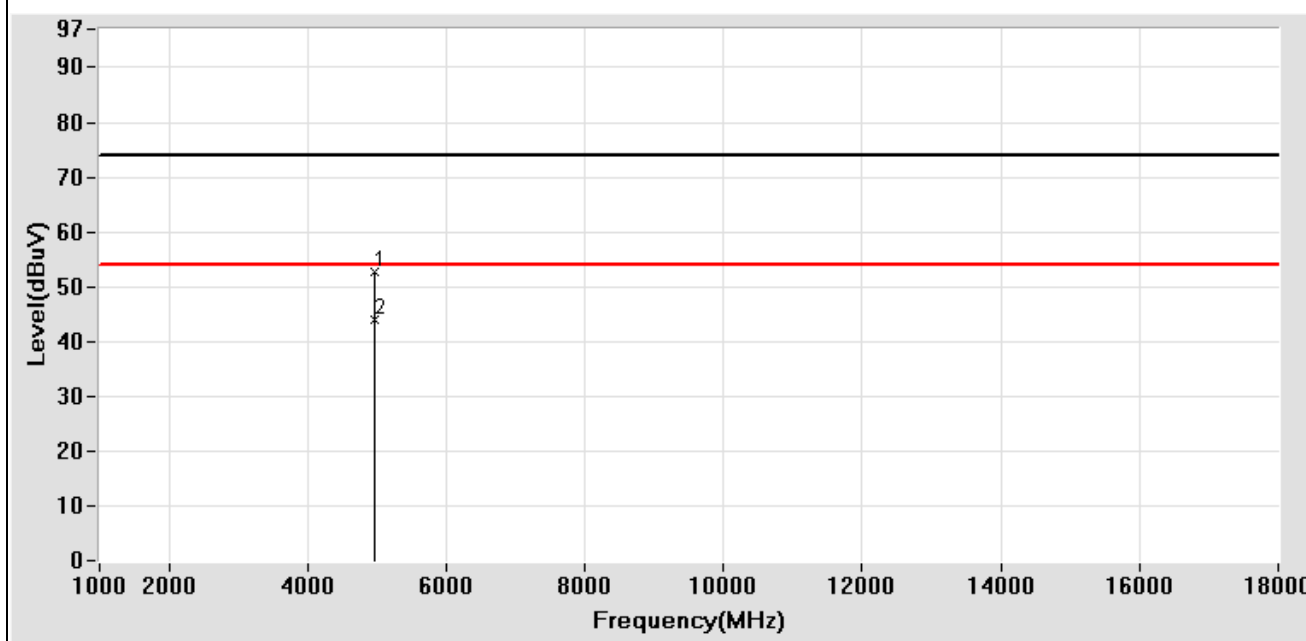

Test Mode: Operation Mode (CH79)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Vertical DISTANCE: 3 m Serial No.: FILE/DATA#: Quanta.emi/25 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
4957.996 *	12.40	40.10	52.50	74.00	-21.50
4957.996 **	12.40	36.50	48.90	54.00	-5.10

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Average values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 1G(3MPK).LMT

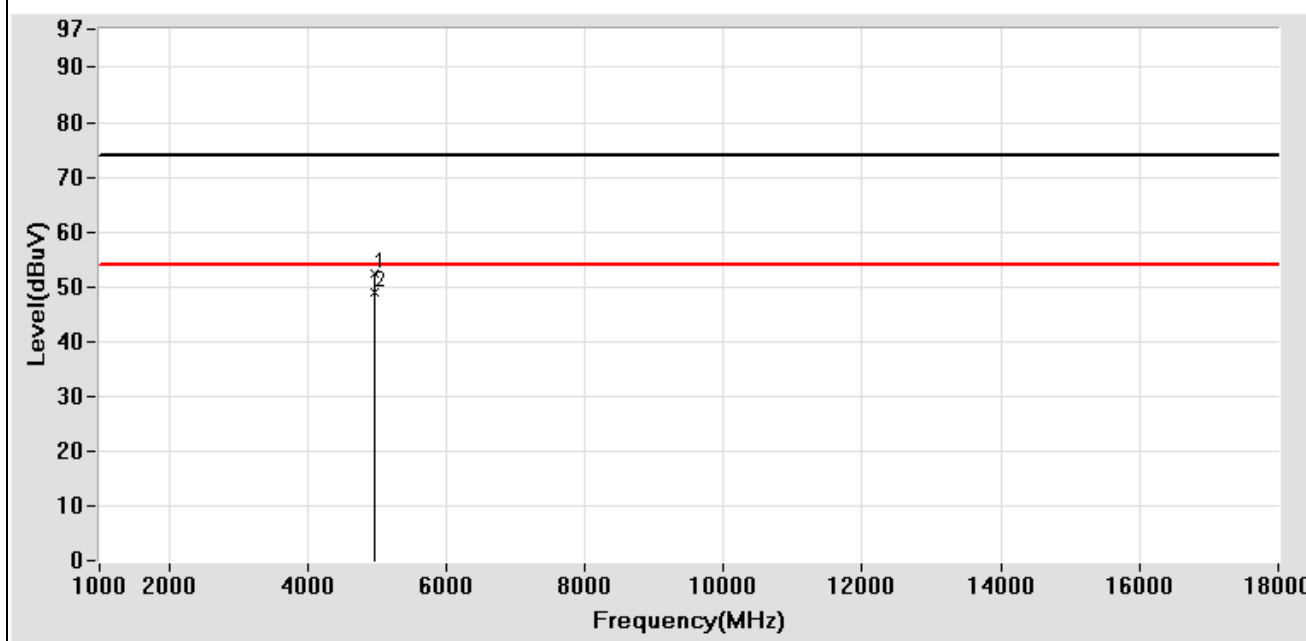

Test Mode: Operation Mode (CH79)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Horizontal DISTANCE: 1 m Serial No.: FILE/DATA#: Quanta.emi/34 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
19187.801 *	30.71	23.10	53.81	63.50	-9.69
21611.600 *	32.65	21.50	54.15	63.50	-9.35

Remark:

1. " * " Mark means readings are Peak Values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 18-25G(1m).LMT

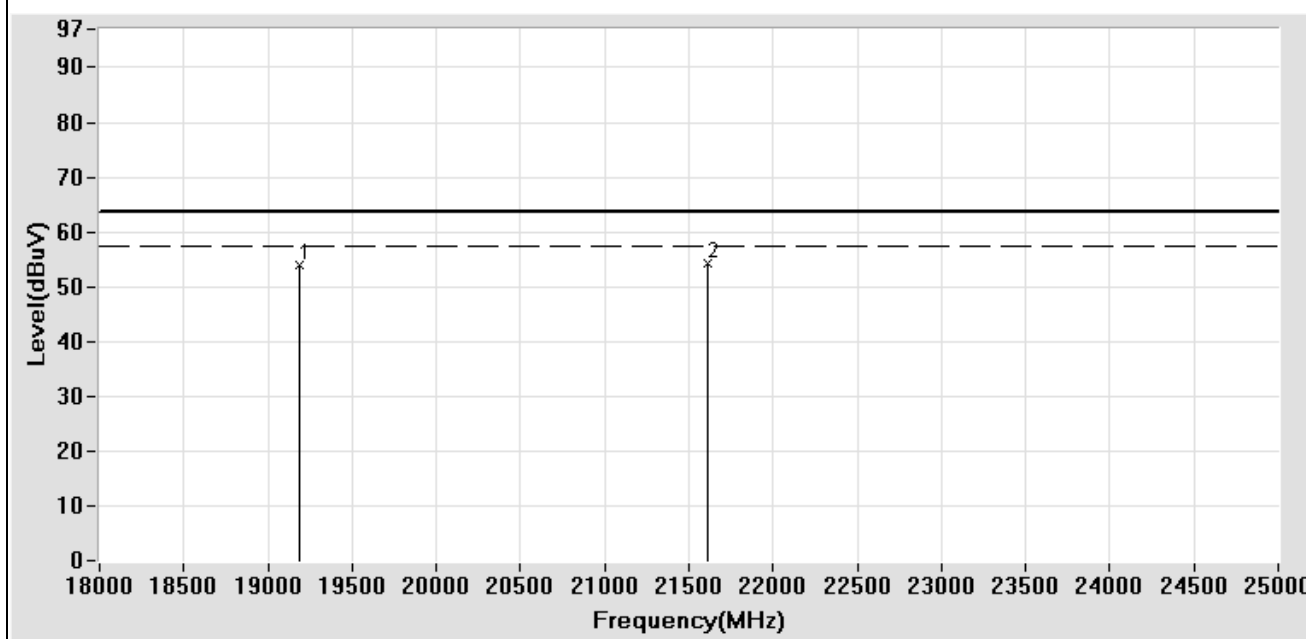

Test Mode: Operation Mode (CH1)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 27.3 °C Humidity: 58 %	POLARITY: Vertical DISTANCE: 1 m Serial No.: FILE/DATA#: Quanta.emi/20 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
19225.801 *	30.74	23.43	54.17	63.50	-9.33
24653.000 *	33.13	18.97	52.10	63.50	-11.40

Remark:

1. " * " Mark means readings are Peak Values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 18-25G(1m).LMT

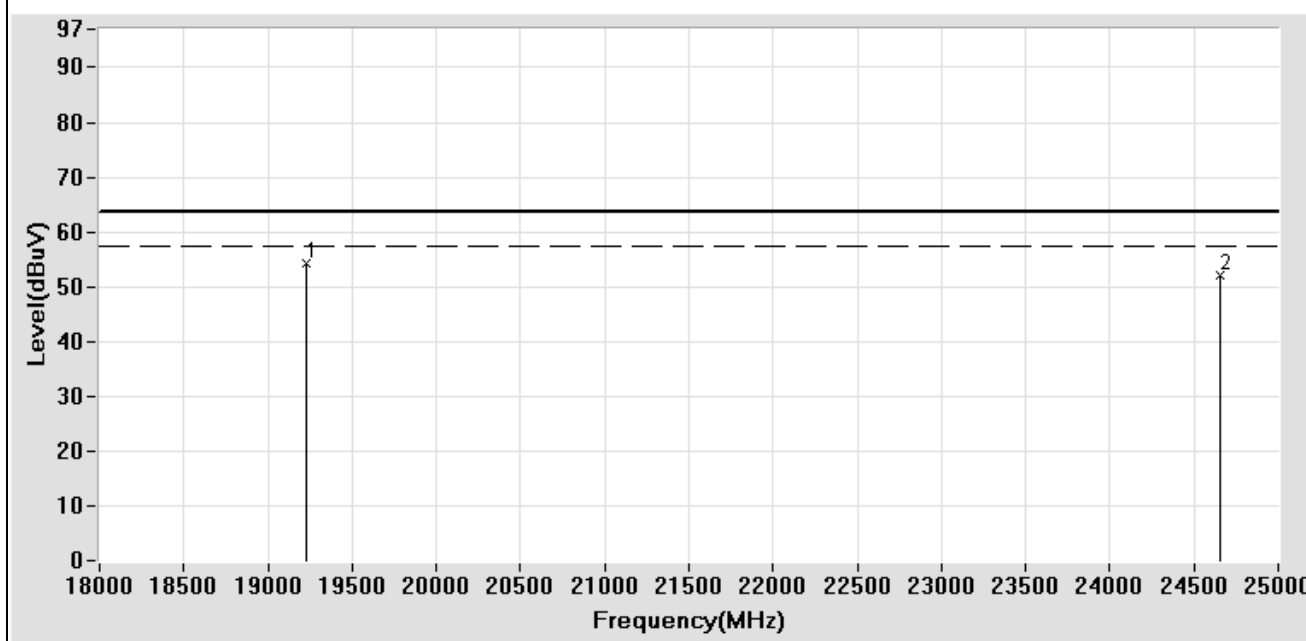

Test Mode: Operation Mode (CH1)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Horizontal DISTANCE: 1 m Serial No.: FILE/DATA#: Quanta.emi/35 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
19512.600 *	30.93	21.50	52.43	63.50	-11.07
22012.100 *	32.81	23.50	56.31	63.50	-7.19

Remark:

1. " * " Mark means readings are Peak Values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 18-25G(1m).LMT

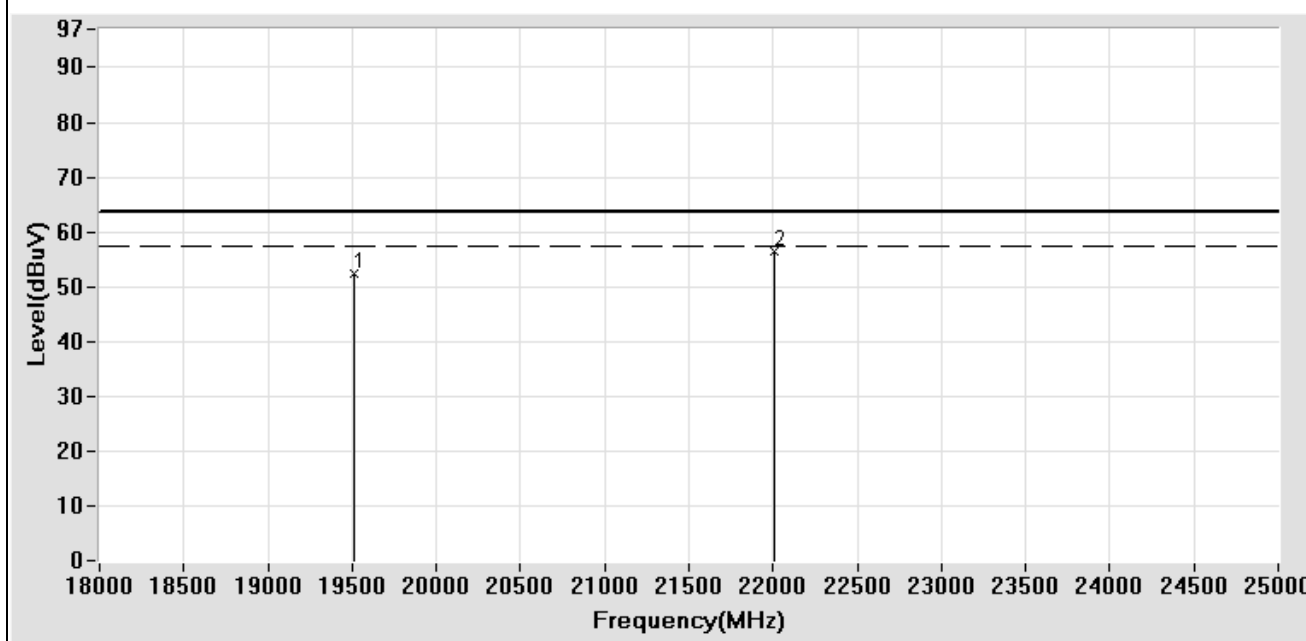

Test Mode: Operation Mode (CH40)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Vertical DISTANCE: 1 m Serial No.: FILE/DATA#: Quanta.emi/36 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
19568.600 *	31.12	19.40	50.52	63.50	-12.98
21942.199 *	32.79	18.50	51.29	63.50	-12.21

Remark:

1. " * " Mark means readings are Peak Values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 18-25G(1m).LMT

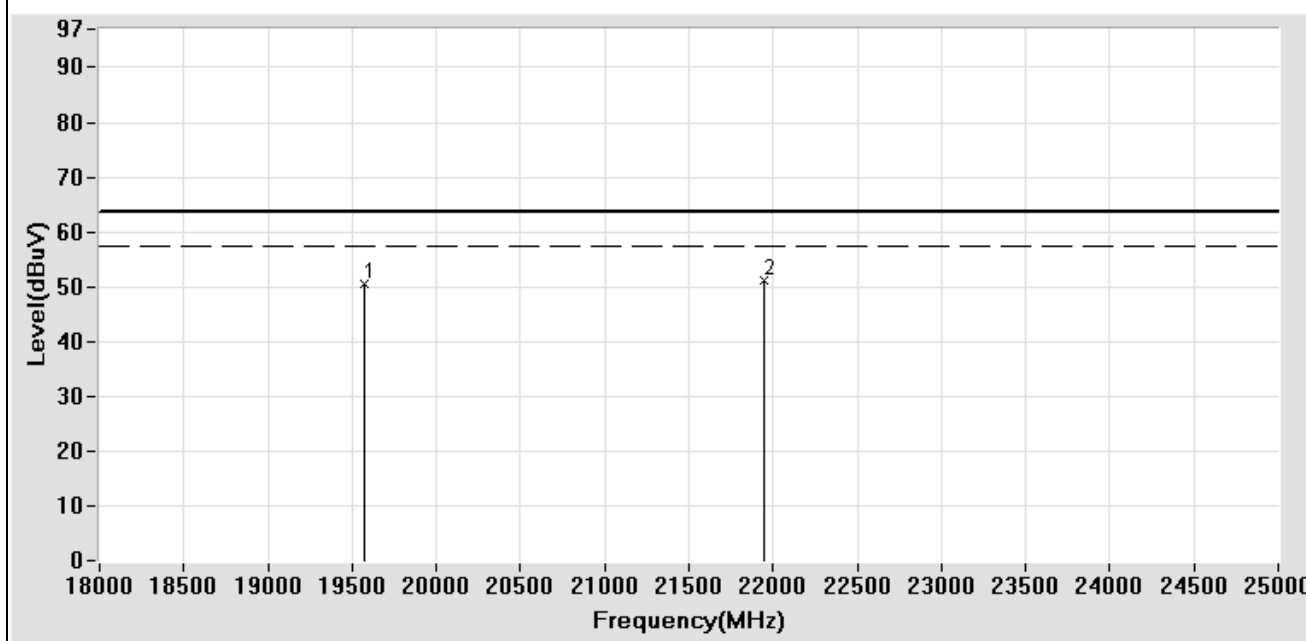

Test Mode: Operation Mode (CH40)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Horizontal DISTANCE: 1 m Serial No.: FILE/DATA#: Quanta.emi/38 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
19800.600 *	31.86	18.70	50.56	63.50	-12.94
22294.199 *	33.05	19.50	52.55	63.50	-10.95

Remark:

1. " * " Mark means readings are Peak Values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 18-25G(1m).LMT

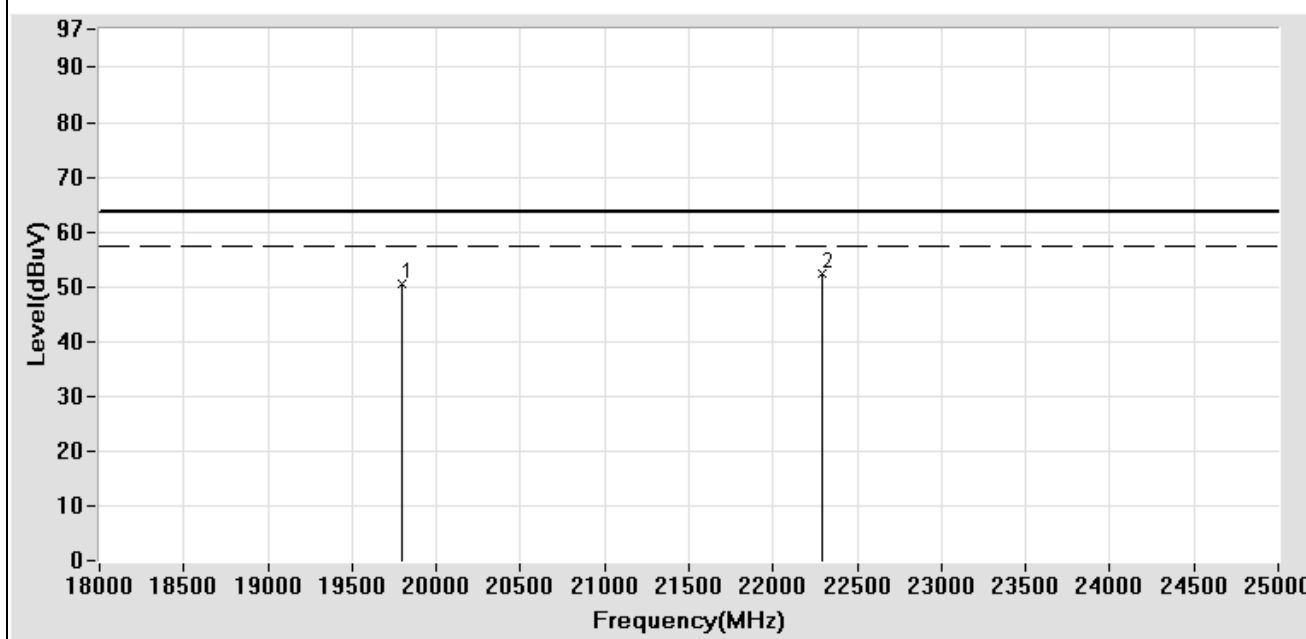

Test Mode: Operation Mode (CH79)

Radiated Emission Measurement Data


EUT: Portable Navigation System CLIENT: Quanta MODEL: CN-GP50U RATING: 120V/60Hz Temperature: 25.9 °C Humidity: 68 %	POLARITY: Vertical DISTANCE: 1 m Serial No.: FILE/DATA#: Quanta.emi/37 OPERATOR: ANYA TEST SITE: OATS2
---	---

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)
19831.430 **	31.95	21.50	53.45	63.50	-10.05
22280.000 **	33.03	18.50	51.53	63.50	-11.97

Remark:

1. " * " Mark means readings are Peak Values.
2. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LIMIT: FCCBH_ABOVE 18-25G(1m).LMT

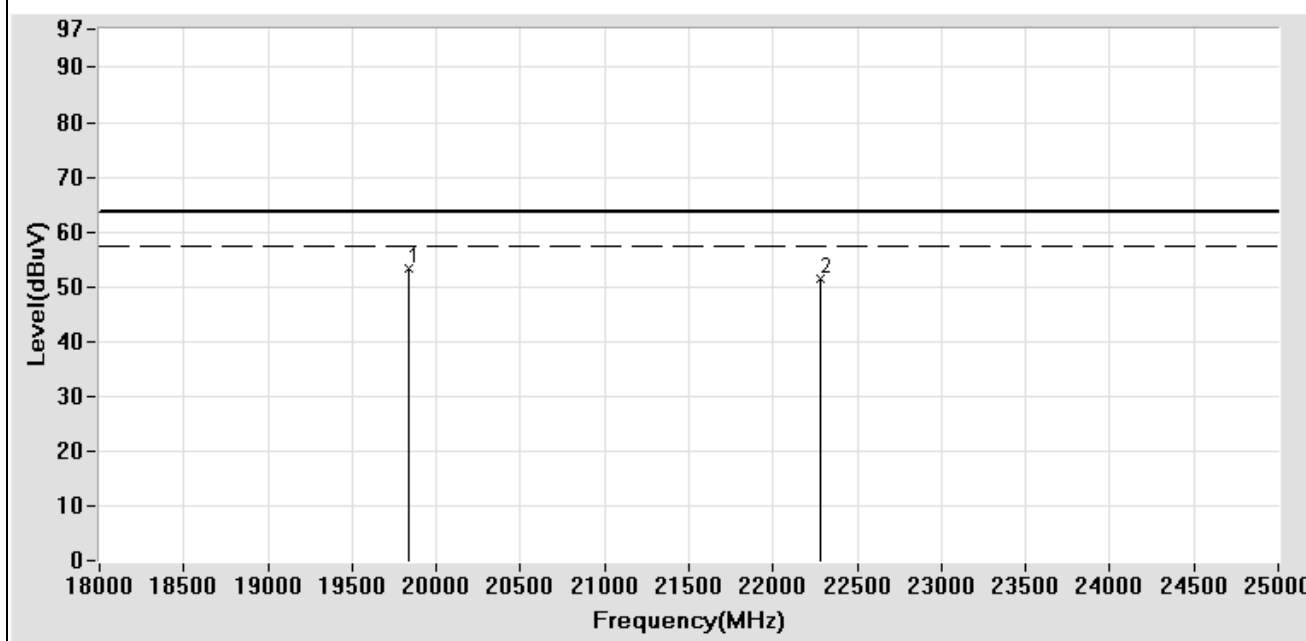

Test Mode: Operation Mode (CH79)

5.9 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where Corrected Factor = Antenna FACTOR + Cable Loss + High Pass Filter Loss - Amplifier Gain

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

This device uses CHIP antenna. Please see photo of EUT (**Page 92**).
The max antenna gain is **0 dBi** for EUT.

7 HOPPING CHANNEL BANDWIDTH MEASUREMENT

7.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Last Calibration
Spectrum Analyzer	Rohde & Schwarz	FSP30	100002	2006/11/14


Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

7.2 Standard Applicable and limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

7.3 Block Diagram of Test Configuration

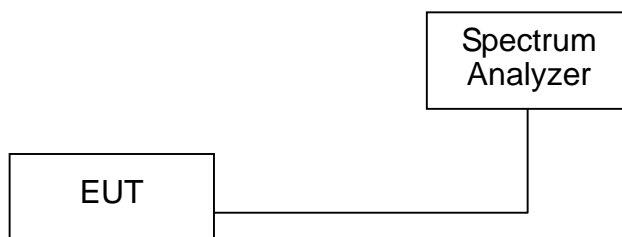

7.4 Measuring Instrument Setting

Spectrum Parameter	Setting
Attenuation	40dB
Span Frequency	> Measurement Bandwidth or Channel Separation
Resolution BW	100 kHz (20dB Bandwidth) / 1MHz (Channel Separation)
Video BW	1MHz (20dB Bandwidth) / 1MHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.5 Configuration of Measurement

- 7.5.1 Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 7.5.2 Position the EUT as shown in section 7.3 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 7.5.3 Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- 7.5.4 Repeat above procedures until all frequencies measured were complete.

7.6 Test result

PASS.

The final test data and waveform are shown on as following pages


HOPPING CHANNEL BANDWIDTH MEASUREMENT DATA

Ambient temperature : 28.3°C
 Relative humidity : 45%

Channel	Frequency (MHz)	20dB Emission Bandwidth (kHz)	Max. Limit (dB)
CH1	2402	1130	> 20dB or 2/3 of 20dB
CH40	2441	1120	> 20dB or 2/3 of 20dB
CH79	2480	1130	> 20dB or 2/3 of 20dB


Note: 1. The expanded uncertainty of the emission bandwidth tests is 1500Hz

Measurement waveform

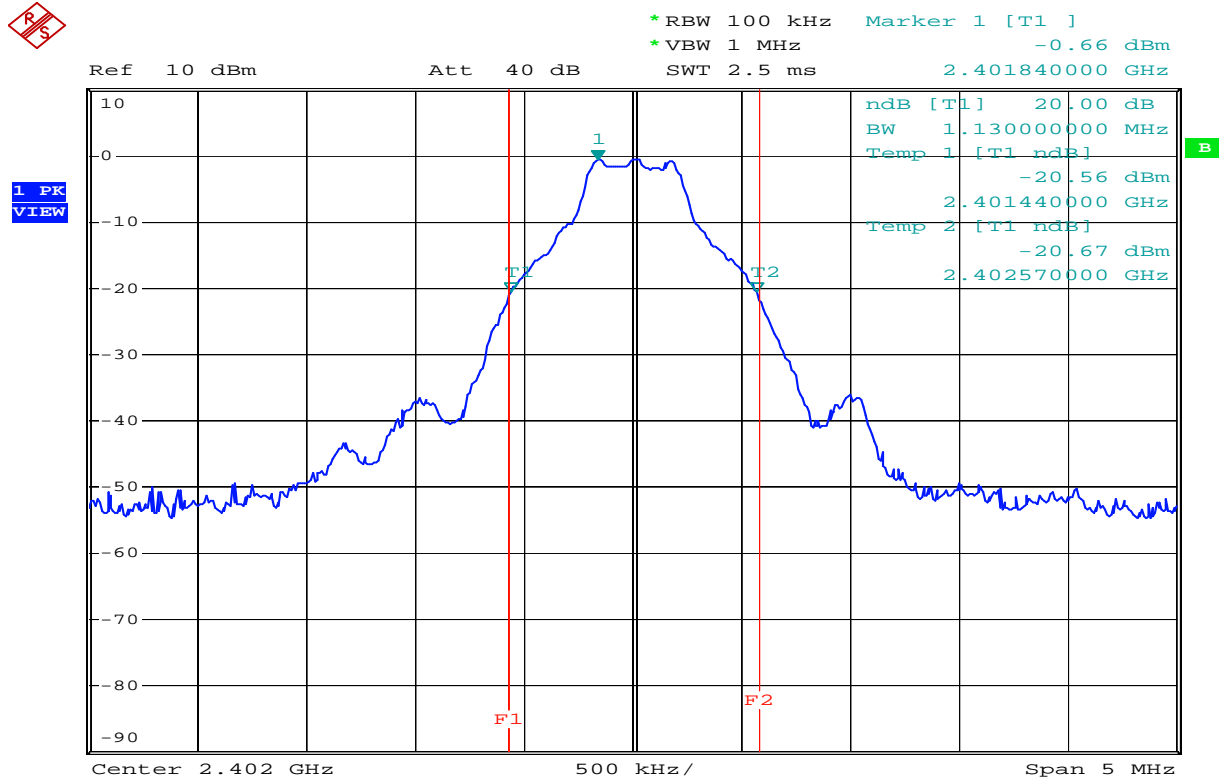


Date: 23.JUL.2007 17:37:34

CH1

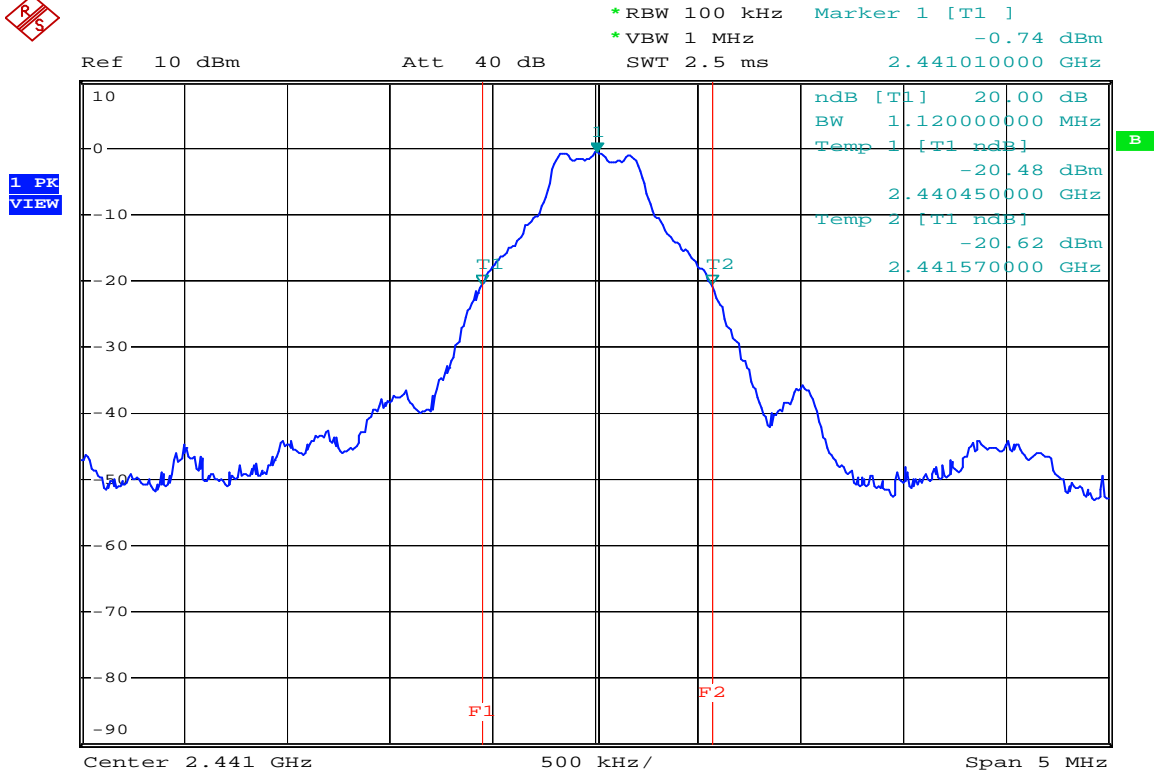

Date: 23.JUL.2007 17:39:59

CH40

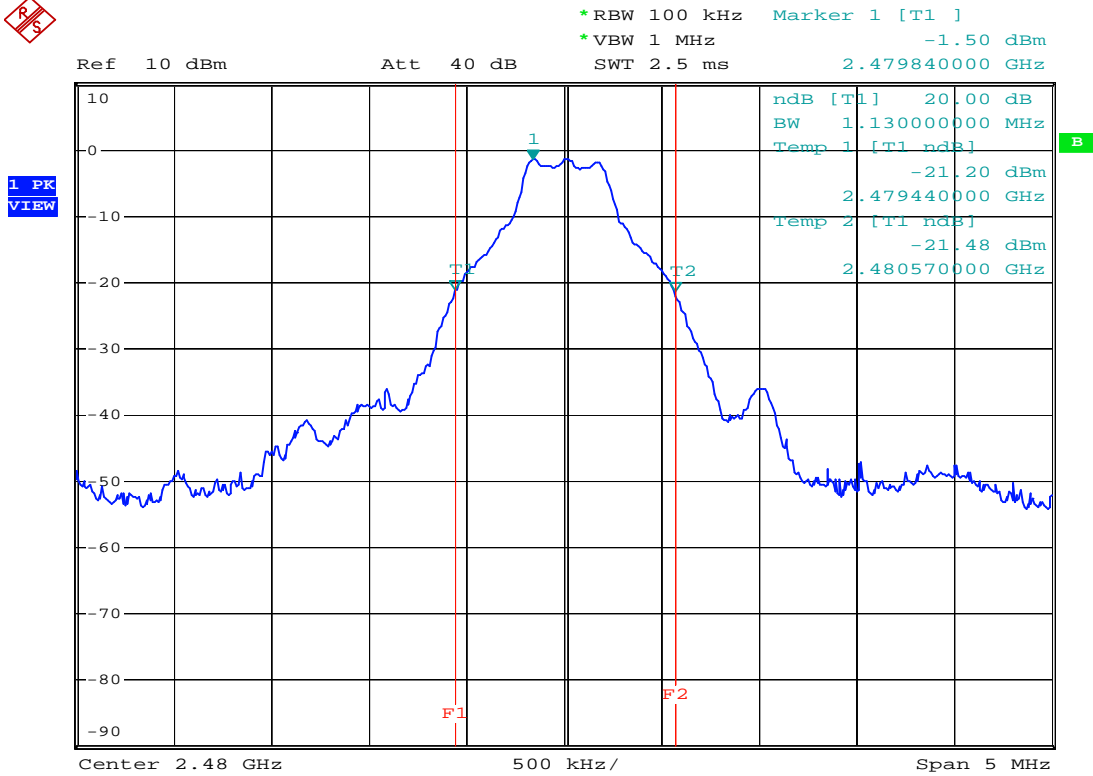

Date: 23.JUL.2007 17:41:27

CH79

8 MAXIMUM OUTPUT POWER MEASUREMENT

8.1 Measurement Equipment


Instrument	Manufacturer	Model	Serial No.	Last Calibration
Spectrum Analyzer	R&S	FSP30	100002	2006/11/14

Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

8.2 Standard Applicable and limit

According to §15.247(b)(1) For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 hopping channels and all frequency hopping systems in the 5725MHz-5850MHz band: 1 Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (20.97dBm). The limitation has to be reduced by the amount in dB that the gains of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

8.3 Block Diagram of Test Configuration

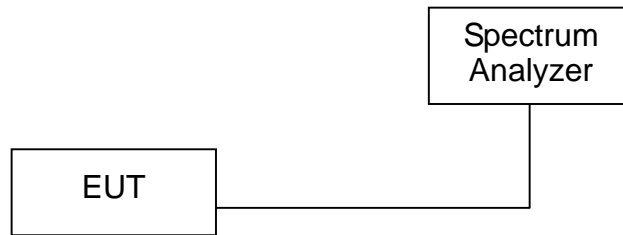

8.4 Measurement Instrument setting

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

8.5 Configuration of Measurement

- 8.5.1 Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 8.5.2 Position the EUT as shown in section 8.3 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 8.5.3 Set Resolution BW of spectrum analyzer to 100kHz and Video BW to 1MHz.
- 8.5.4 Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
- 8.5.5 Repeat above procedures until all frequencies measured were complete.

8.6 Test Result

Pass.

The final test data is shown on as following pages.


MAXIMUM OUTPUT POWER MEASUREMENT

Ambient temperature : 28.3°C
 Relative humidity : 45%

Channel	Frequency (MHz)	Output Peak Power (dBm)	Max. Limit (dBm)
CH1	2402	-1.15	30
CH40	2441	-0.78	30
CH79	2480	-1.53	30


Note: 1. The expanded uncertainty of the output power tests is 2dB.

Measurement waveform

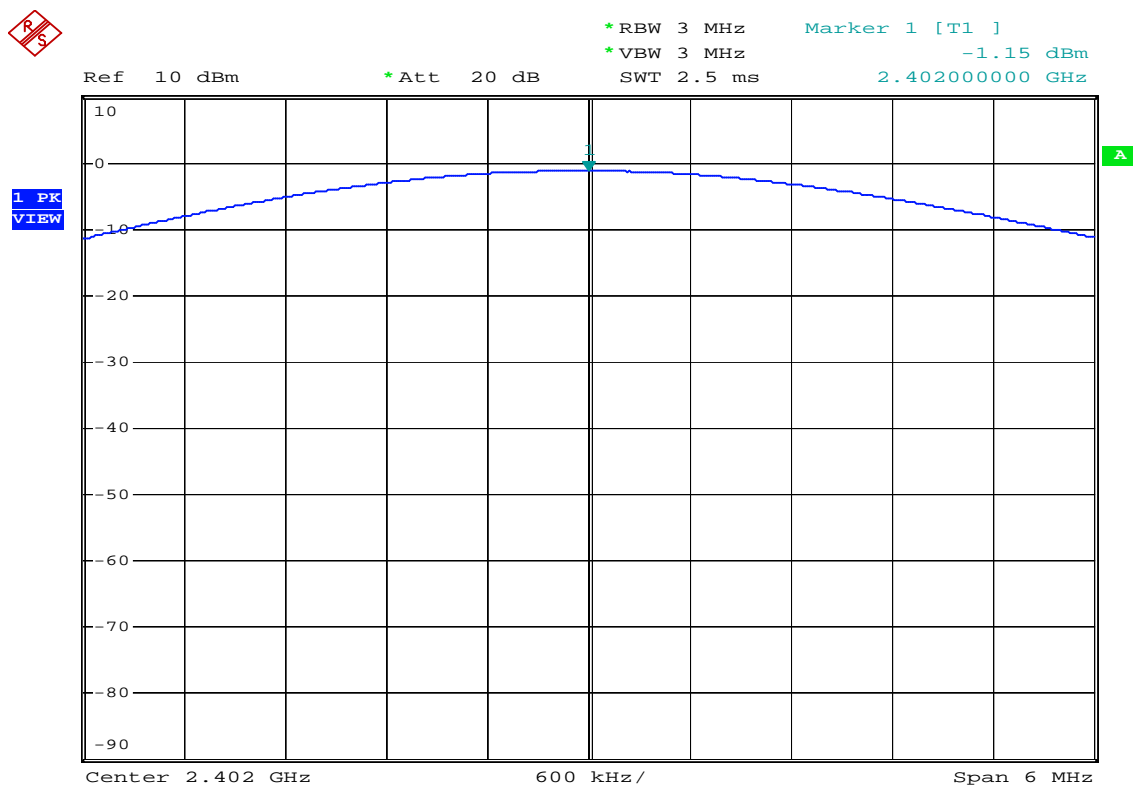


Date: 6.SEP.2007 12:51:30

CH1

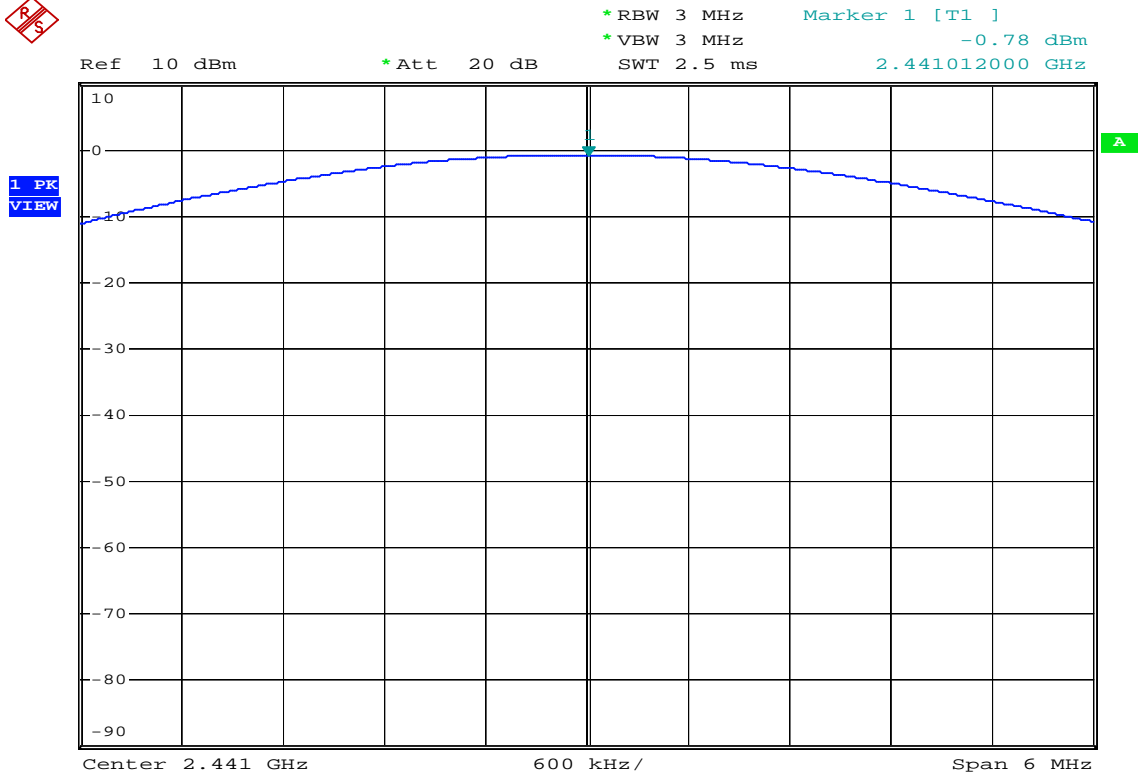

Date: 6.SEP.2007 12:54:23

CH40

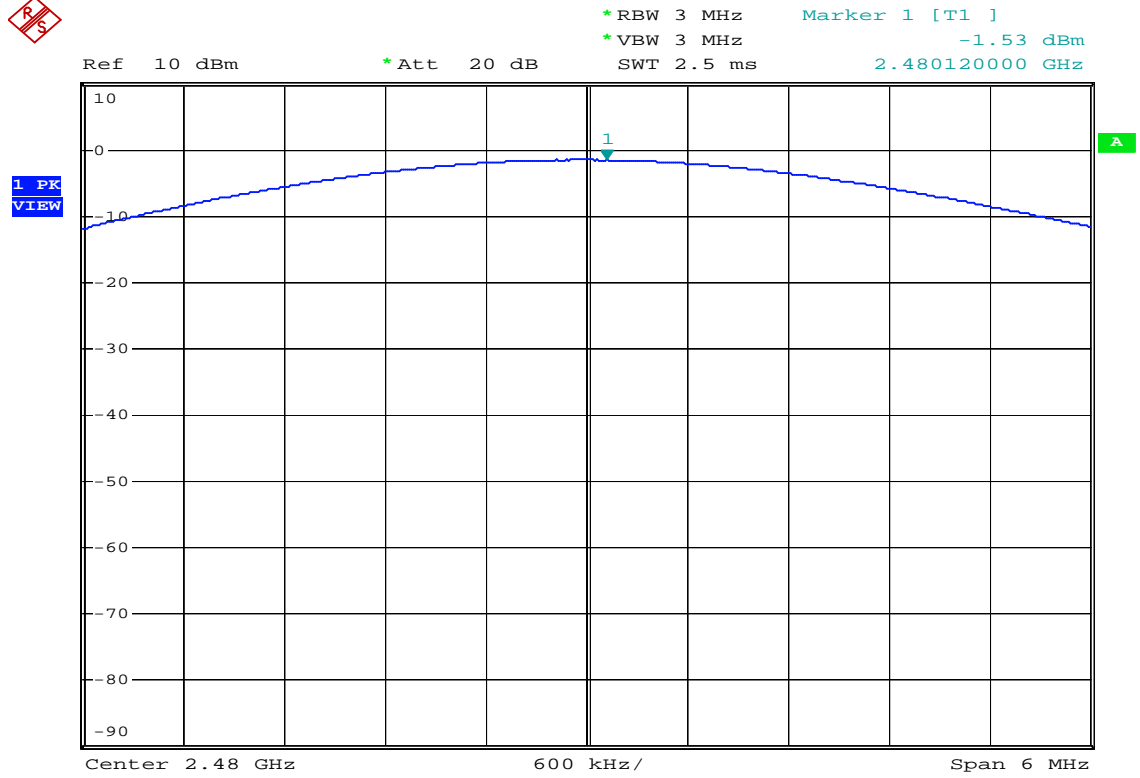

Date: 6.SEP.2007 12:55:59

CH79

9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Last Calibration
Spectrum Analyzer	Rohde & Schwarz	FSP30	100002	2006/11/14


Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

9.2 Standard Applicable

According to §15.247(d), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

9.3 Block Diagram of Test Configuration

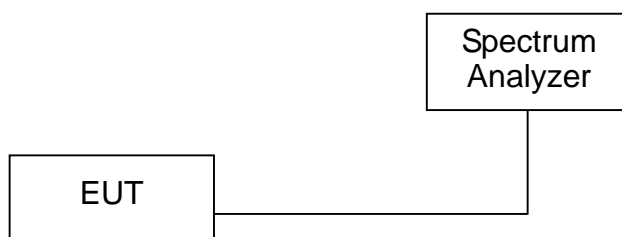

9.4 Measuring Instrument Setting

Spectrum Parameter	Setting
Attenuation	40dB
Span Frequency	5 MHz
Resolution BW / Video BW (emission in restricted band)	100 kHz / 1MHz for Peak, 1 MHz / 10Hz for Average
Resolution BW / Video BW (other emission)	100 kHz /100 kHz for Peak

9.5 Configuration of Measurement

- 9.5.1 Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 9.5.2 Position the EUT as shown in section 9.3 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 9.5.3 Set both Resolution BW and Video BW of spectrum analyzer to 30 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
- 9.5.4 Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 9.5.5 Repeat above procedures until all measured frequencies were complete.

9.6 Test Result

Pass.

The final test data is shown on as following pages.


100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

Ambient temperature : 28.1°C
 Relative humidity : 44%

	FREQUENCY (MHz)	Reading (mv)	Cable Loss (mv)	Adjusted (mv)	Limit (mv)	Result
CH1	2402.000	204.439	0.567	250.006	N/A	N/A
F BE	2401.330	8.059	0.504	8.563	19.999	PASS

f_L 2.40133GHz > 2.4GHz

Measurement waveform

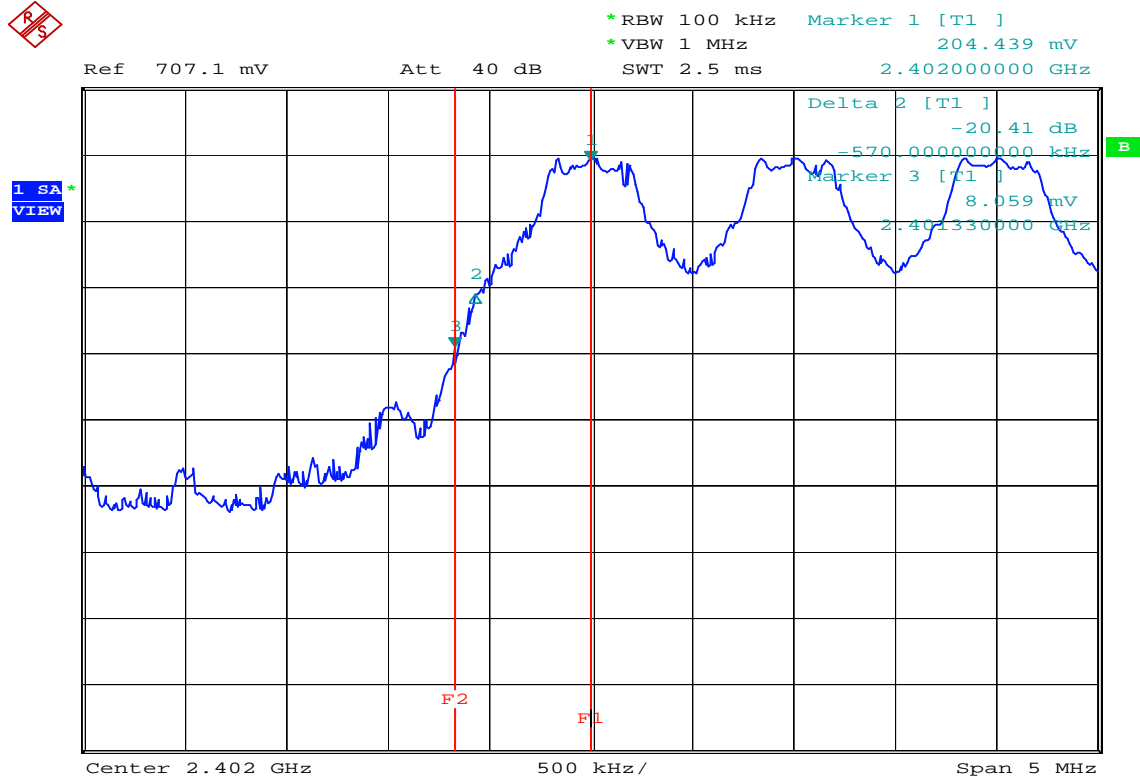


Date: 23.JUL.2007 18:59:55

CH1

	FREQUENCY (MHz)	Reading (mv)	Cable Loss (mv)	Adjusted (mv)	Limit (mv)	Result
CH79	2480.000	182.571	0.507	183.078	N/A	N/A
F BE	2480.660	7.496	0.316	7.812	18.023	PASS

f_H 2.48066GHz < 2.4835GHz

Measurement waveform

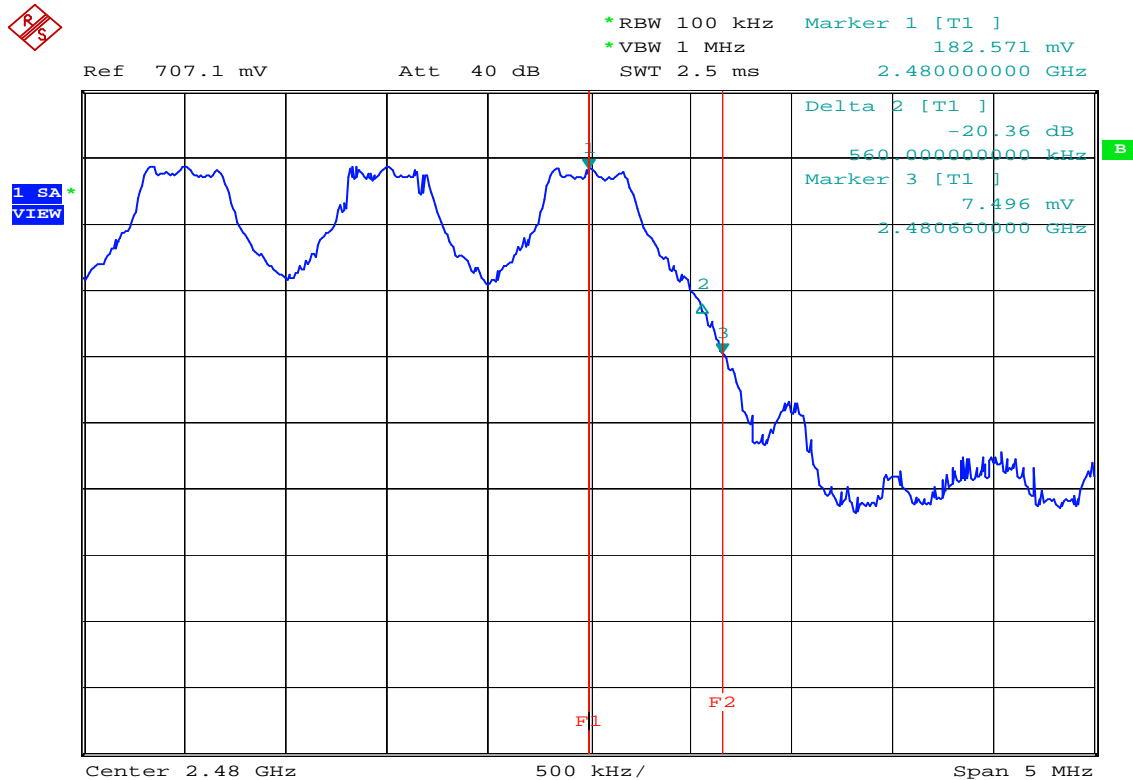

Date: 23.JUL.2007 19:16:05

CH79

Note: 1. The expanded uncertainty of the 100kHz bandwidth of band edges tests is 2dB.

10 HOPPING CHANNEL SEPARATION

10.1 Instrument


Instrument	Manufacturer	Model	Serial No.	Last Calibration
Spectrum Analyzer	Rohde & Schwarz	FSP30	100002	2006/11/14

Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

10.2 Standard Applicable

According to §15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

10.3 Block Diagram of Test Configuration

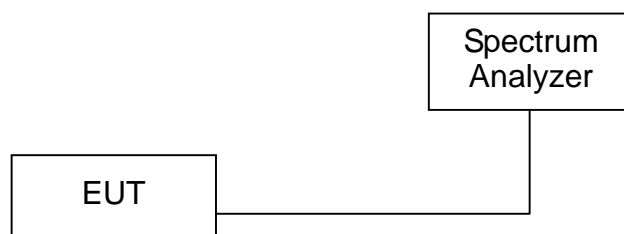

10.4 Measuring Instrument Setting

Spectrum Parameter	Setting
Attenuation	40dB
Span Frequency	> Measurement Bandwidth or Channel Separation
Resolution BW	100 kHz (20dB Bandwidth) / 1MHz (Channel Separation)
Video BW	1MHz (20dB Bandwidth) / 1MHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

10.5 Configuration of Measurement

- 10.5.1 Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 10.5.2 Position the EUT as shown in section 10.3 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- 10.5.3 By using the MaxHold function record the separation of two adjacent channels.
- 10.5.4 Measure the frequency difference of these two adjacent channels by SA MARK function.
- 10.5.5 And then plot the result on SA screen.
- 10.5.6 Repeat above procedures until all frequencies measured were complete.

10.6 Test Result

Pass.

The final test data is shown on as following pages.


HOPPING CHANNEL SEPARATION

Ambient temperature : 25.9°C
 Relative humidity : 42%

Channel	Frequency (MHz)	Adjacent Hopping Channel Separation (kHz)	Max. Limit (kHz)
CH1-2	2402-2403	1002	25kHz or 2/3 bandwidth
CH39-40	2440-2441	996	25kHz or 2/3 bandwidth
CH79-80	2479-2480	996	25kHz or 2/3 bandwidth


Note: 1. The expanded uncertainty of the hopping channel separation tests is 2dB

Measurement waveform

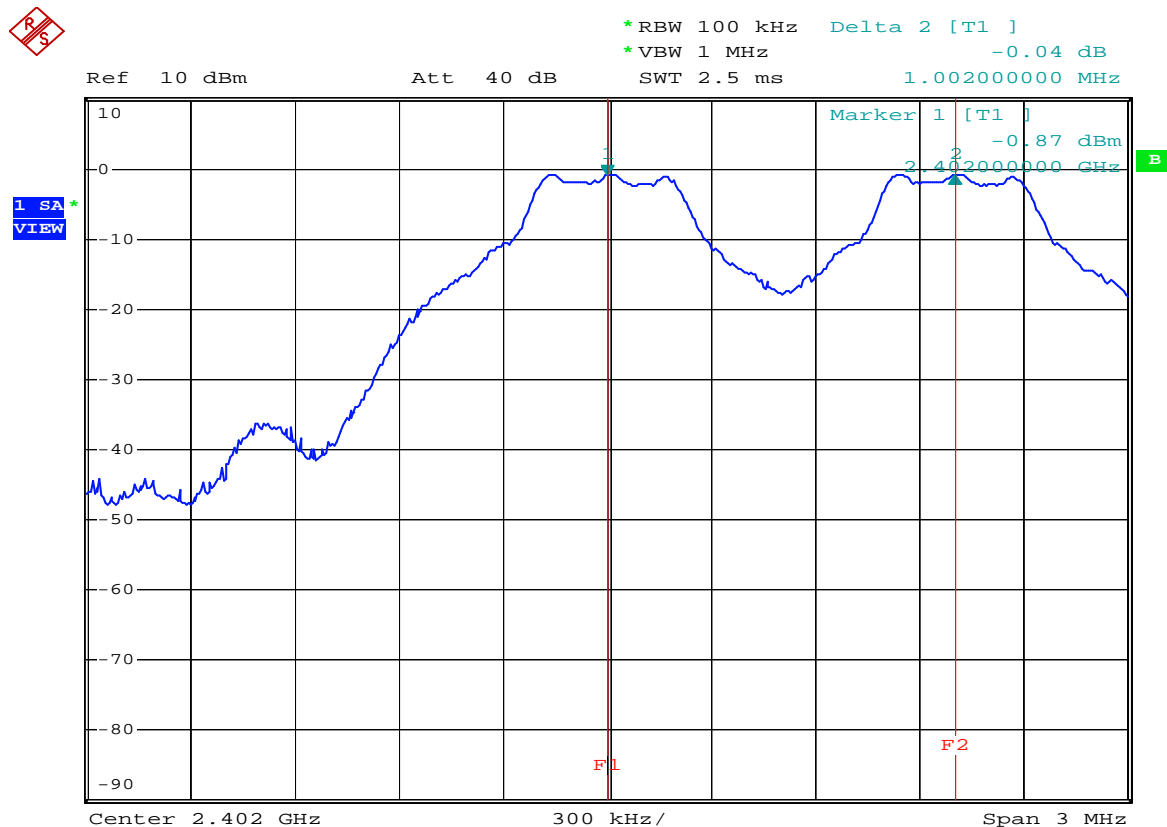


Date: 23.JUL.2007 19:26:40

CH1-2

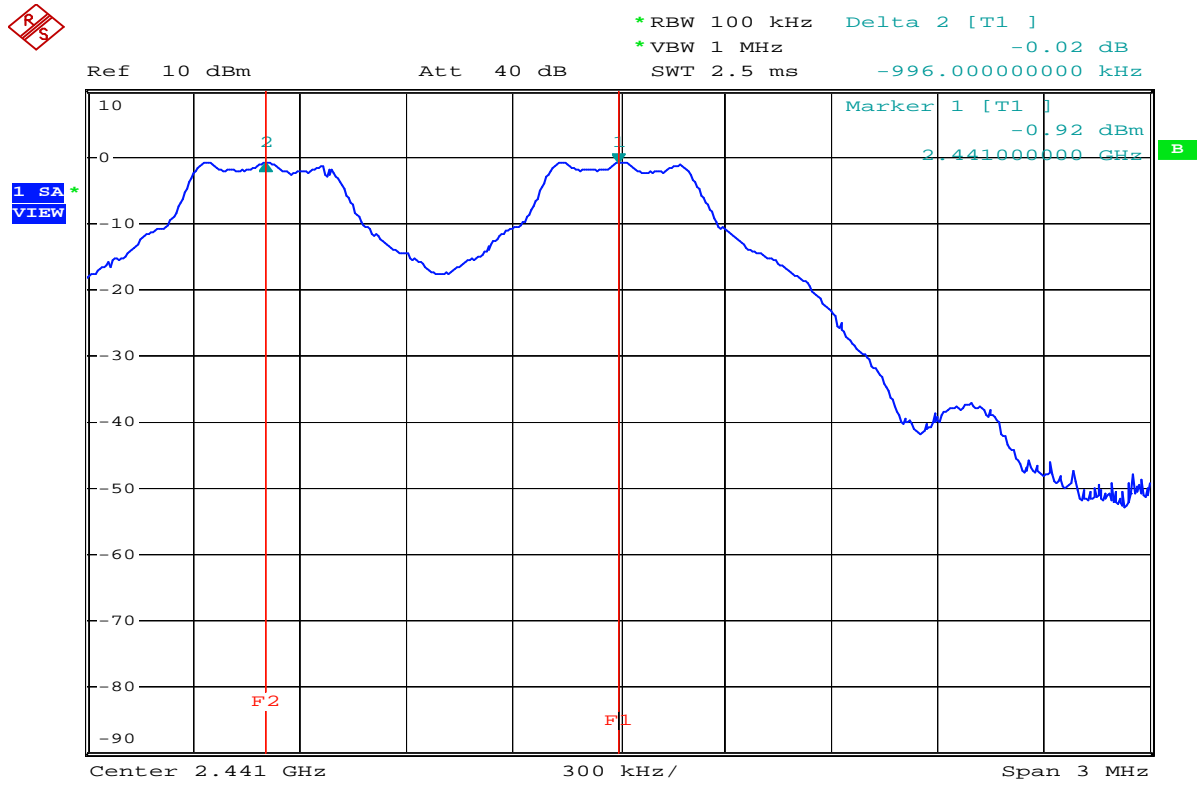

Date: 23.JUL.2007 19:23:53

CH39-40

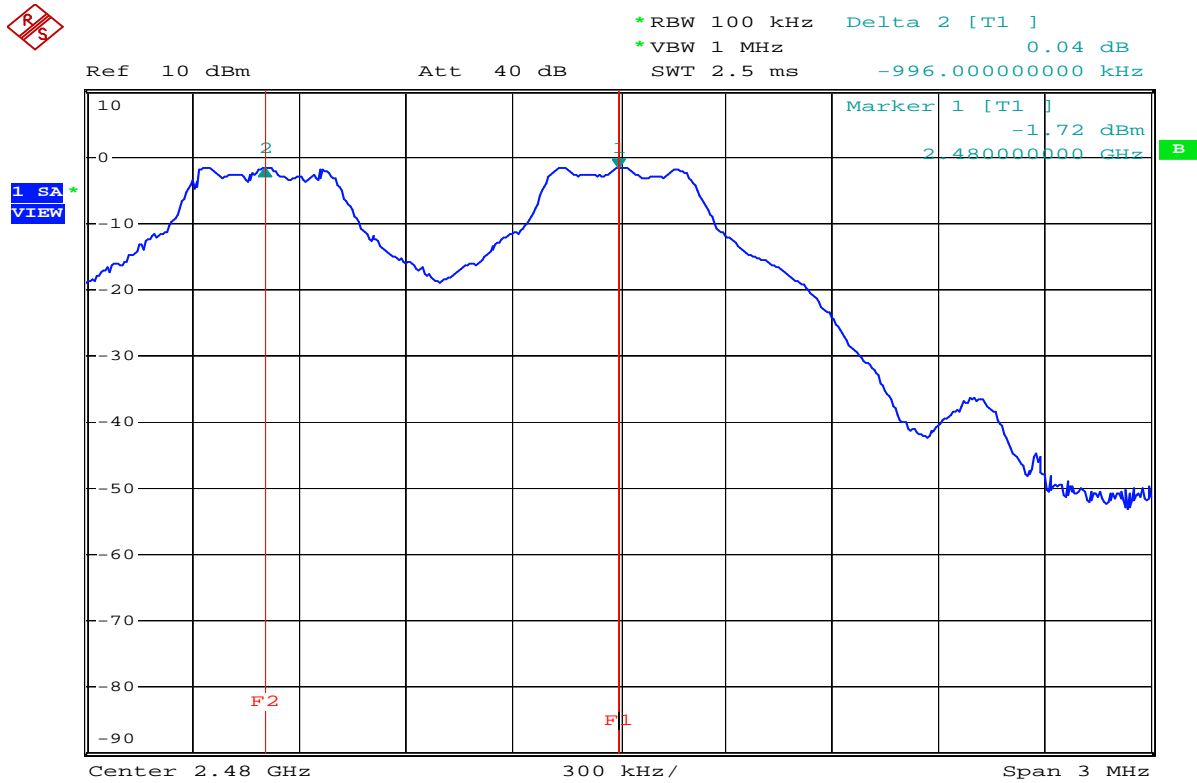

Date: 23.JUL.2007 19:21:33

CH78-79

11 NUMBER OF HOPPING FREQUENCY USED

11.1 Instrument


Instrument	Manufacturer	Model	Serial No.	Last Calibration
Spectrum Analyzer	Rohde & Schwarz	FSP30	100002	2006/11/14

Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

11.2 Standard Applicable and limit

According to §15.247(b)(1) (iii), for frequency hopping system operating in the 2400-2483.5 MHz bands shall use at least 75 non-overlapping hopping channels.

11.3 Block Diagram of Test Configuration

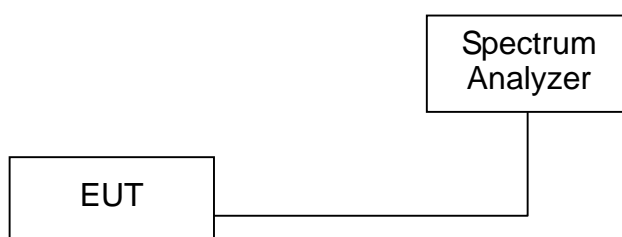

11.4 Measuring Instrument Setting

Spectrum Parameters	Setting
Attenuation	40dB
Span Frequency	> Operating Frequency Range
Resolution BW	100 KHz
Video BW	1MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

11.5 Configuration of Measurement

- 11.5.1 Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 11.5.2 Position the EUT as shown in section 11.3 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 11.5.3 Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 11.5.4 Set the SA on View mode and then plot the result on SA screen.
- 11.5.5 Repeat above procedures until all frequencies measured were complete.

11.6 Test Result

Pass

The final test data is shown on as following pages.

MEASUREMENT DATA

Ambient temperature : 25.4°C


Relative humidity : 42%

Modulation Type:

Channel	Frequency (GHz)	Hopping Channel (Channels)
CH1-CH79	2.402-2.480	79


Note: 1. The expanded uncertainty of number of hopping frequency used tests is 2dB.

Measurement waveform

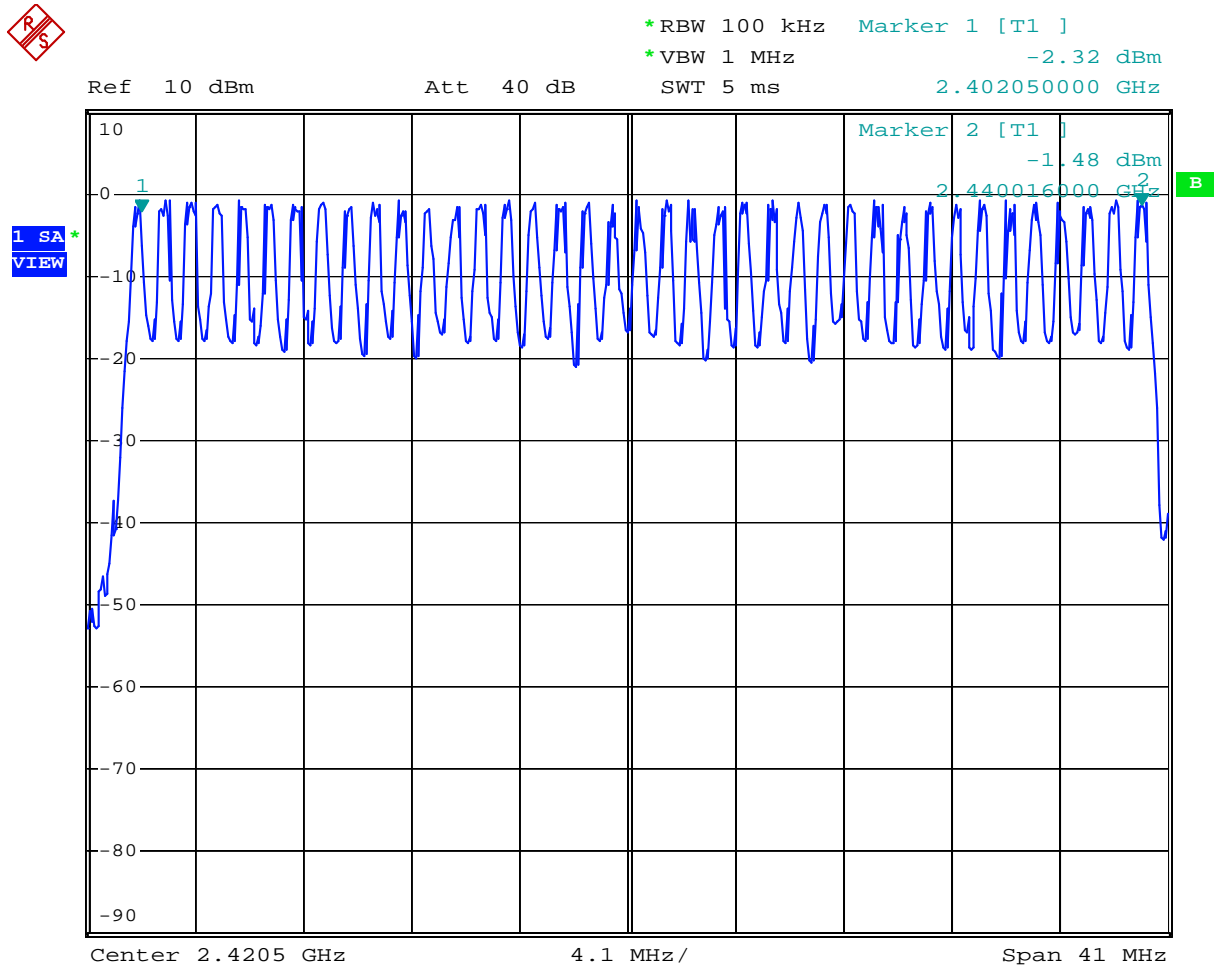

Date: 23.JUL.2007 19:31:39

CH1-39

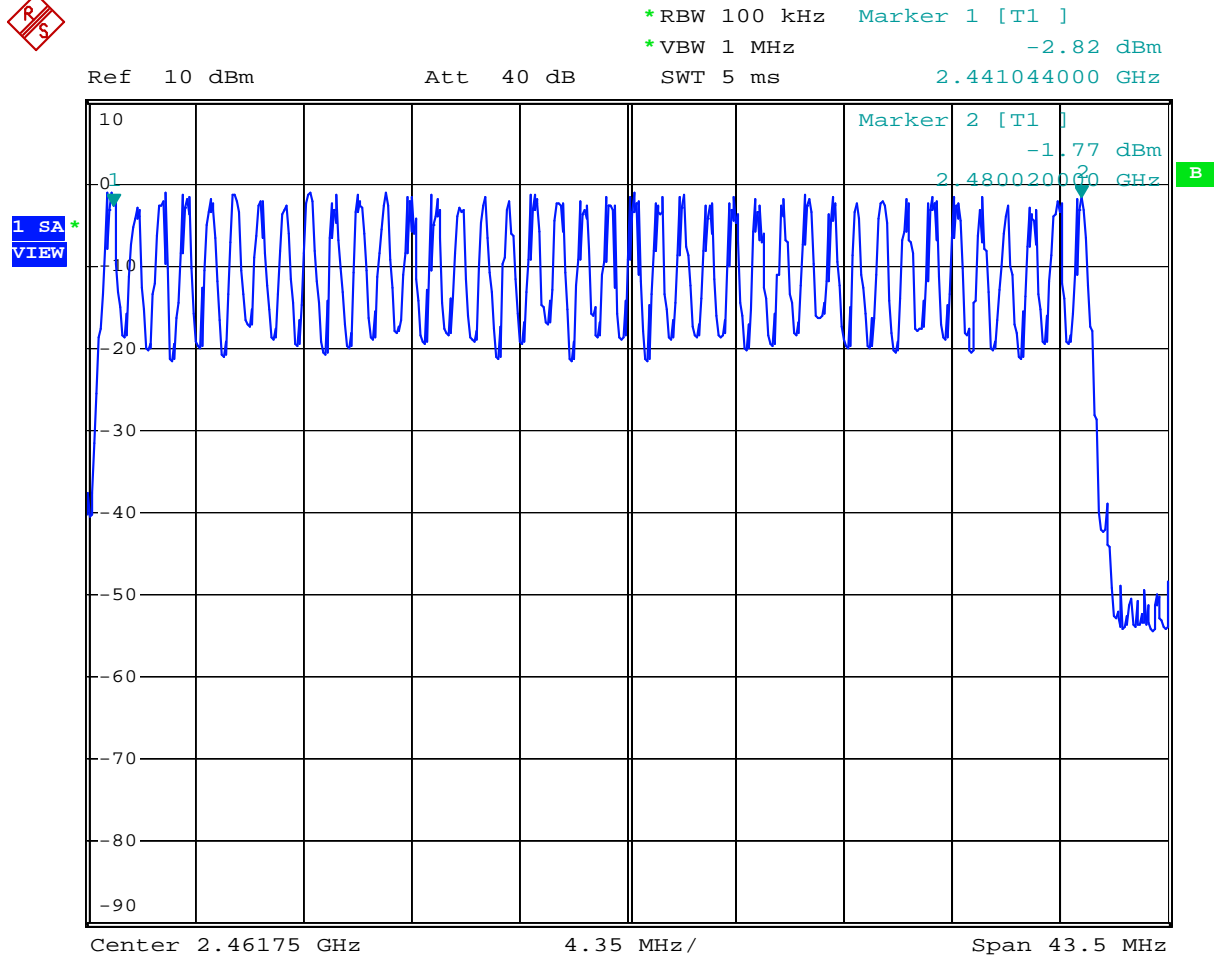

Date: 23.JUL.2007 19:38:55

CH40-79

12 DWELL TIME ON EACH CHANNEL

12.1 Instrument


Instrument	Manufacturer	Model	Serial No.	Last Calibration
Spectrum Analyzer	Rohde & Schwarz	FSP30	100002	2005/11/07

Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

12.2 Standard Applicable and limit

According to §15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any frequency shall not be greater than 0.4 second within a period of 0.4 seconds multiplied by the number of hopping channels employed

12.3 Block Diagram of Test Configuration

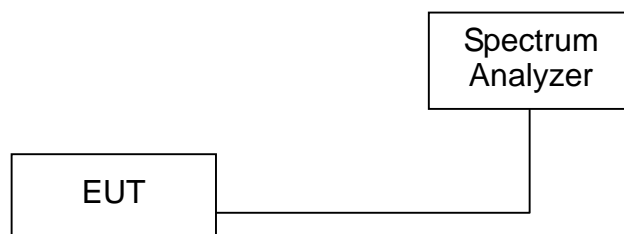

12.4 Measuring Instrument Setting

Spectrum Parameter	Setting
Attenuation	40dB
Span Frequency	0 MHz
Resolution BW	1MHz
Video BW	1MHz
Detector	Peak
Trace	View

12.5 Configuration of Measurement

- 12.5.1 Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 12.5.2 Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 12.5.3 Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set Resolution BW and Video BW of spectrum analyzer to proper value.
- 12.5.4 Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- 12.5.5 Repeat above procedures until all frequencies measured were complete.

12.6 Test Result

PASS.

The final test data is shown on as following pages.


DWELL TIME ON EACH CHANNEL MEASUREMENT DATA

Ambient temperature : 25.9°C
 Relative humidity : 59%
 The period is 0.4(Sec) * 80(channels) = 32 sec
 Hop rate=10/100(ms)=100/sec
 Time slot length=1.015(s)
 Dwell Time =1.015*100/80*32=0.0396

DATA PACKET	Frequency (MHz)	Pulse duration (ms)	Dwell time (s)	Limit (s)	Test Result
DH1	2402	0.45	0.144	<0.4	Complies
DH3	2402	0.46	0.074	<0.4	Complies
DH5	2402	3.04	0.324	<0.4	Complies
DH1	2441	0.46	0.147	<0.4	Complies
DH3	2441	0.47	0.075	<0.4	Complies
DH5	2441	3.10	0.330	<0.4	Complies
DH1	2480	0.44	0.141	<0.4	Complies
DH3	2480	0.46	0.074	<0.4	Complies
DH5	2480	3.01	0.330	<0.4	Complies


Note: 1. The expanded uncertainty of dwell time on each channel tests is 2dB.

Measurement waveform

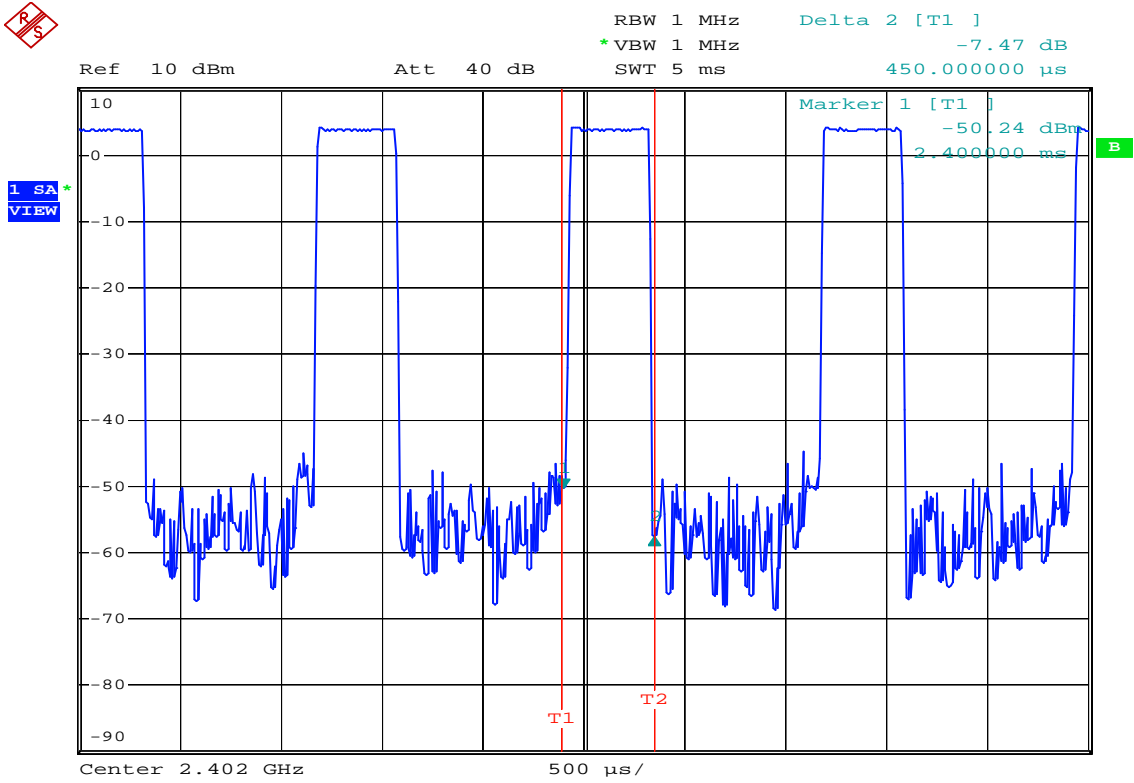


Date: 23.JUL.2007 20:48:06

CH1DH1

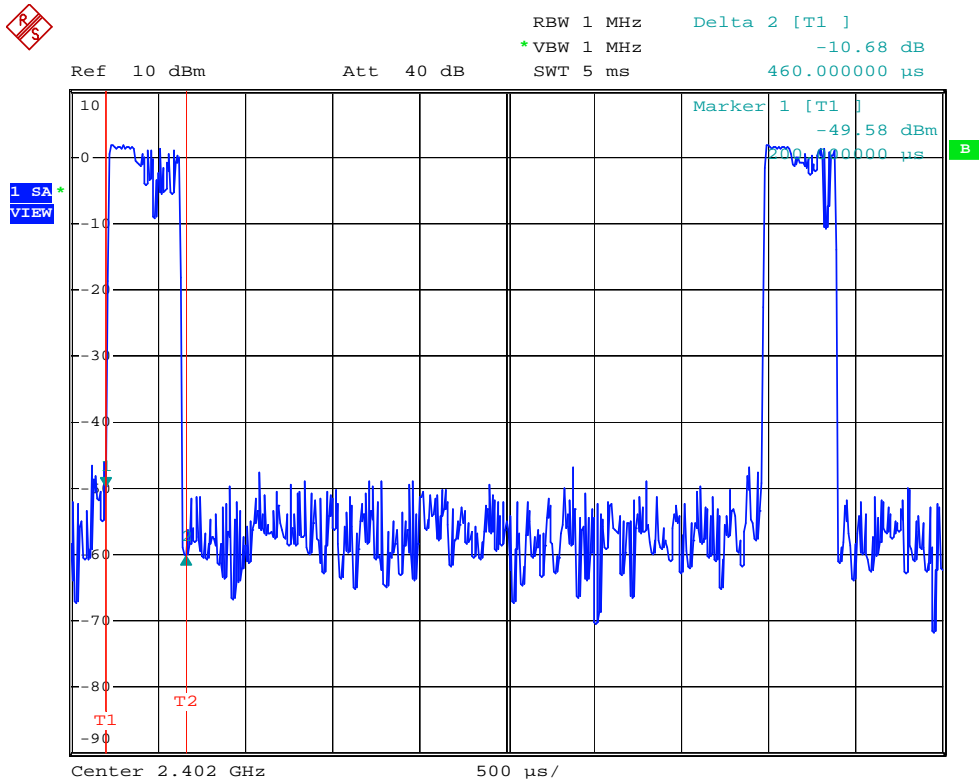


Date: 23.JUL.2007 21:07:48

CH1DH3

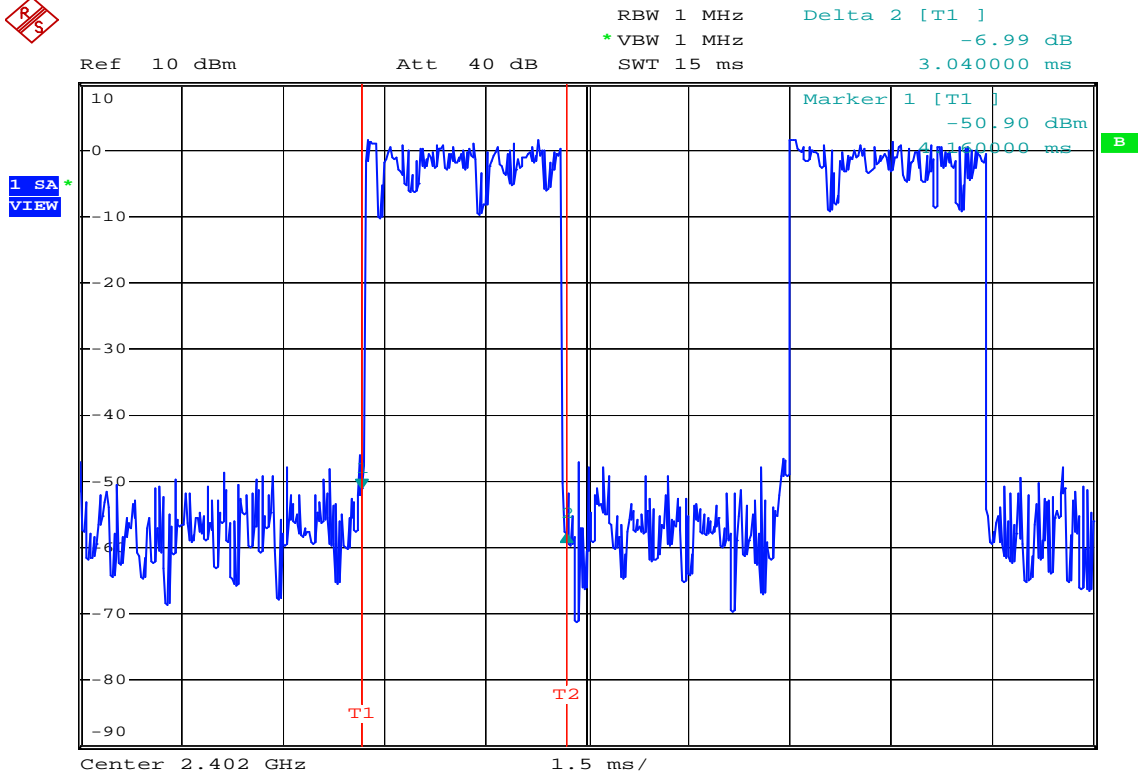


Date: 23.JUL.2007 21:09:53

CH1DH5

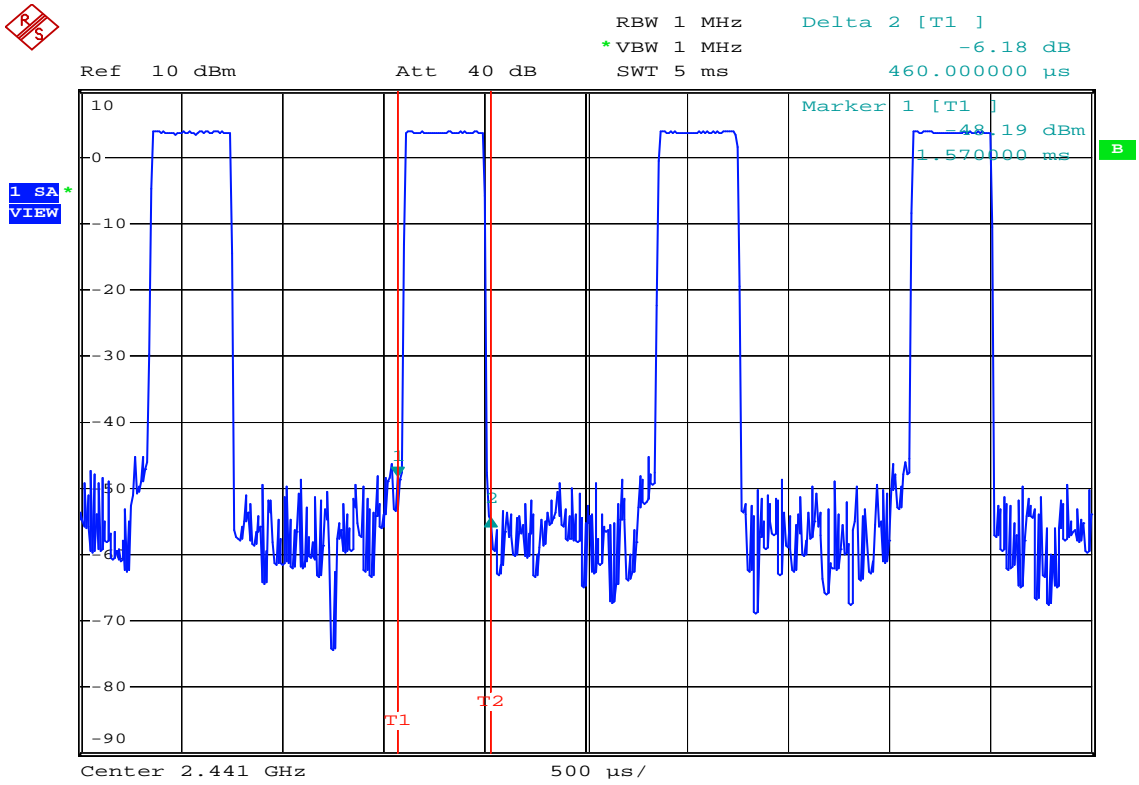


Date: 23.JUL.2007 20:50:01

CH40DH1

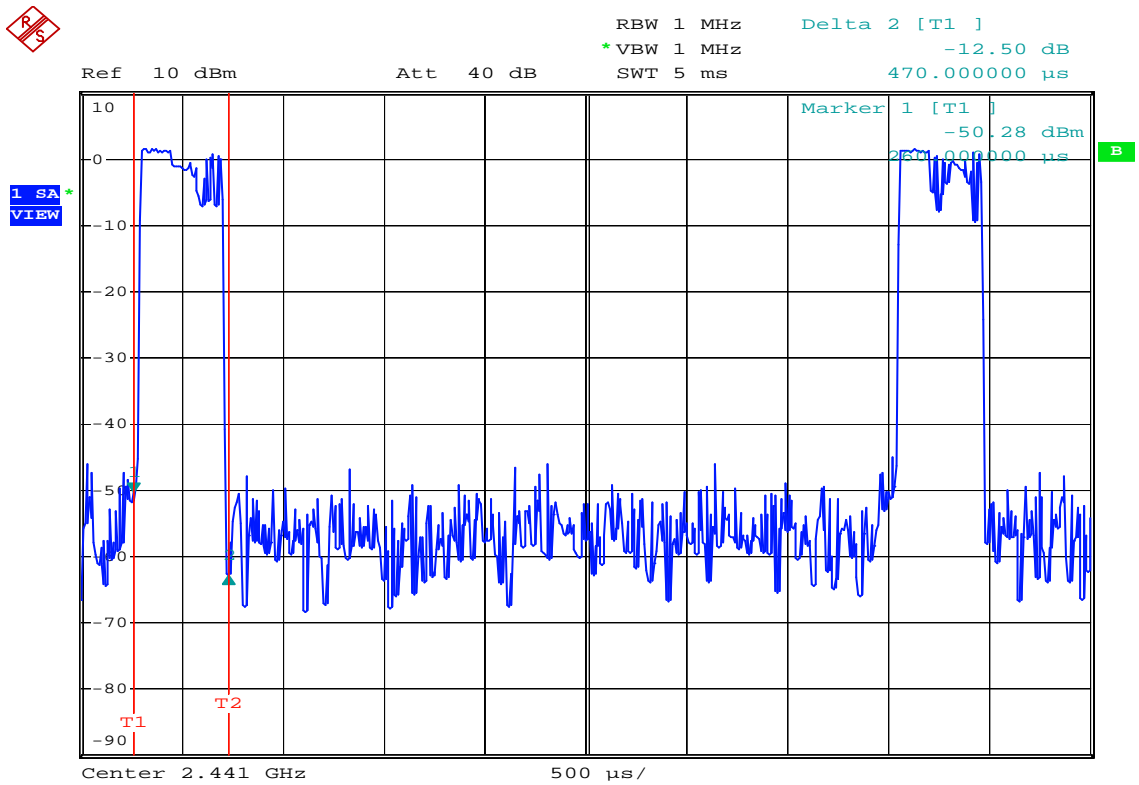


Date: 23.JUL.2007 21:05:18

CH40DH3

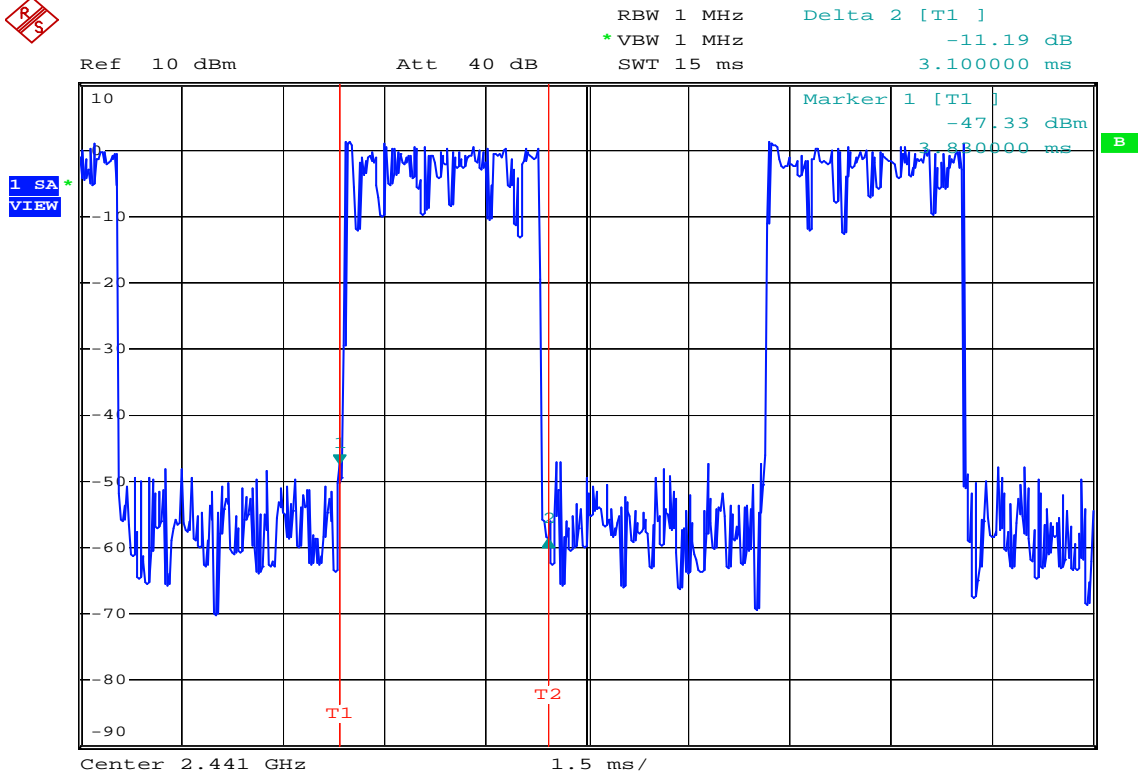


Date: 23.JUL.2007 21:11:06

CH40DH5

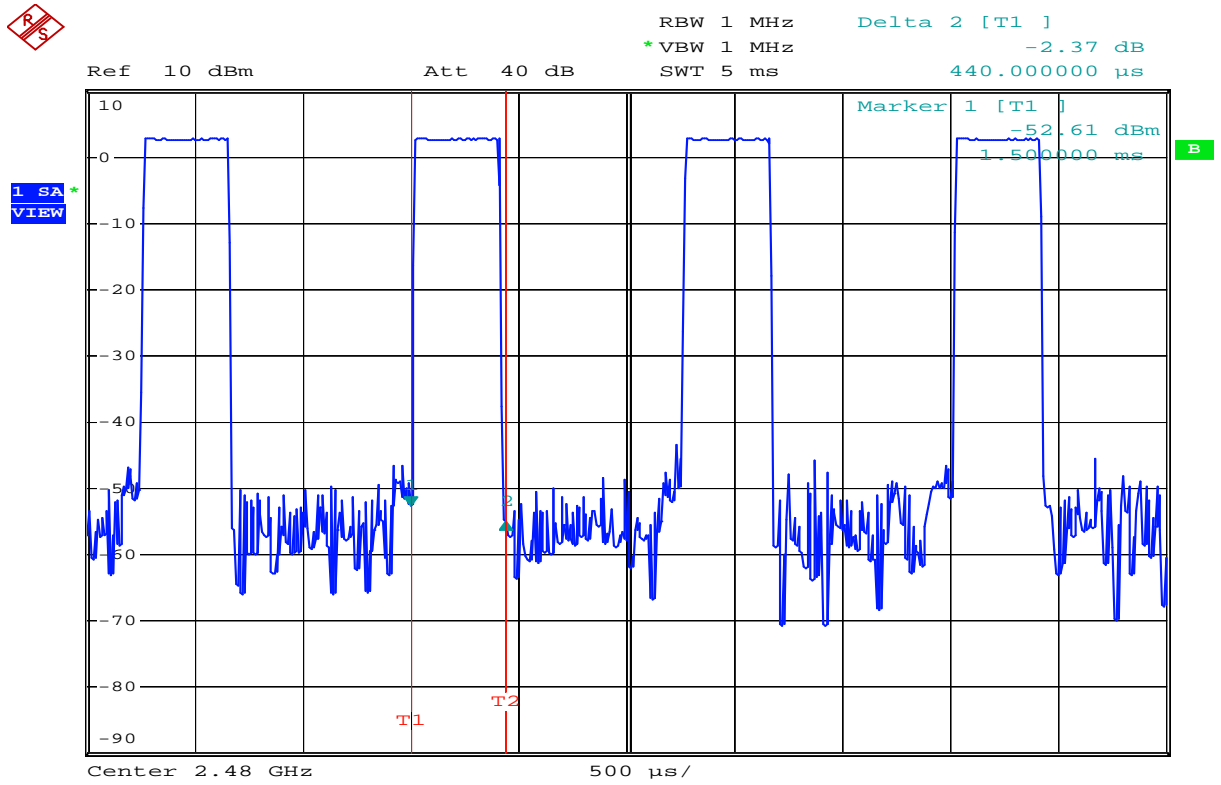


Date: 23.JUL.2007 20:50:50

CH79DH1

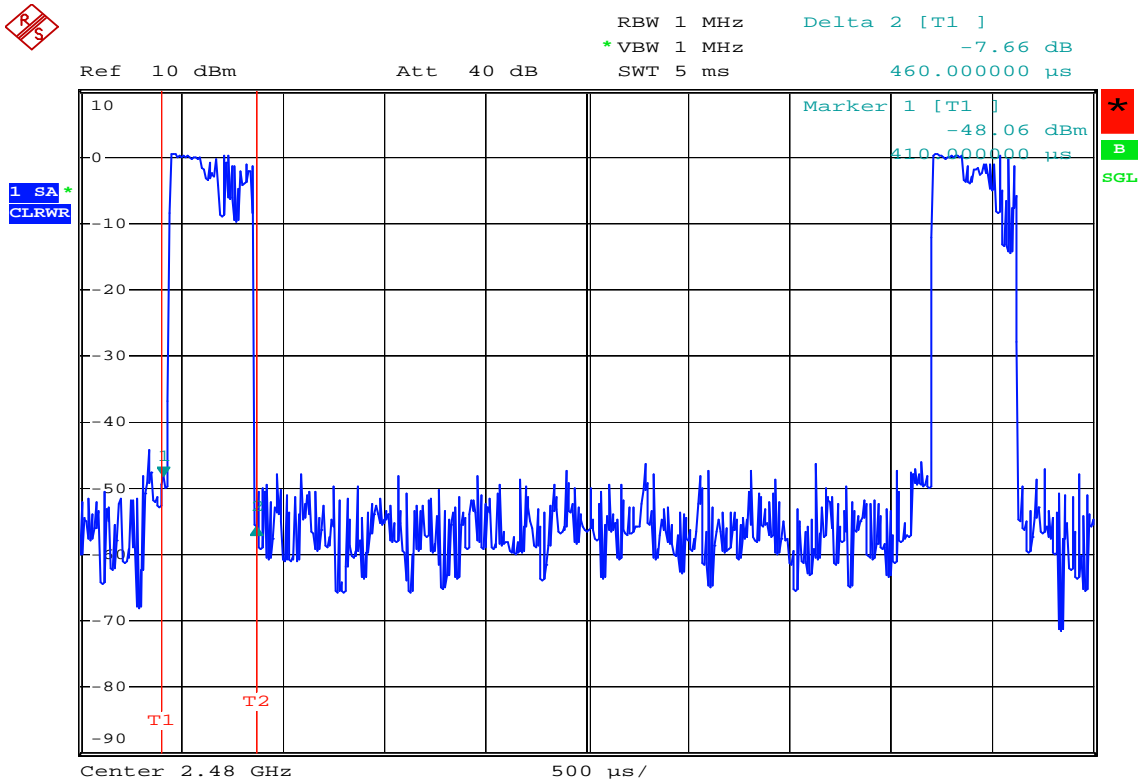

Date: 23.JUL.2007 20:59:41

CH79DH3

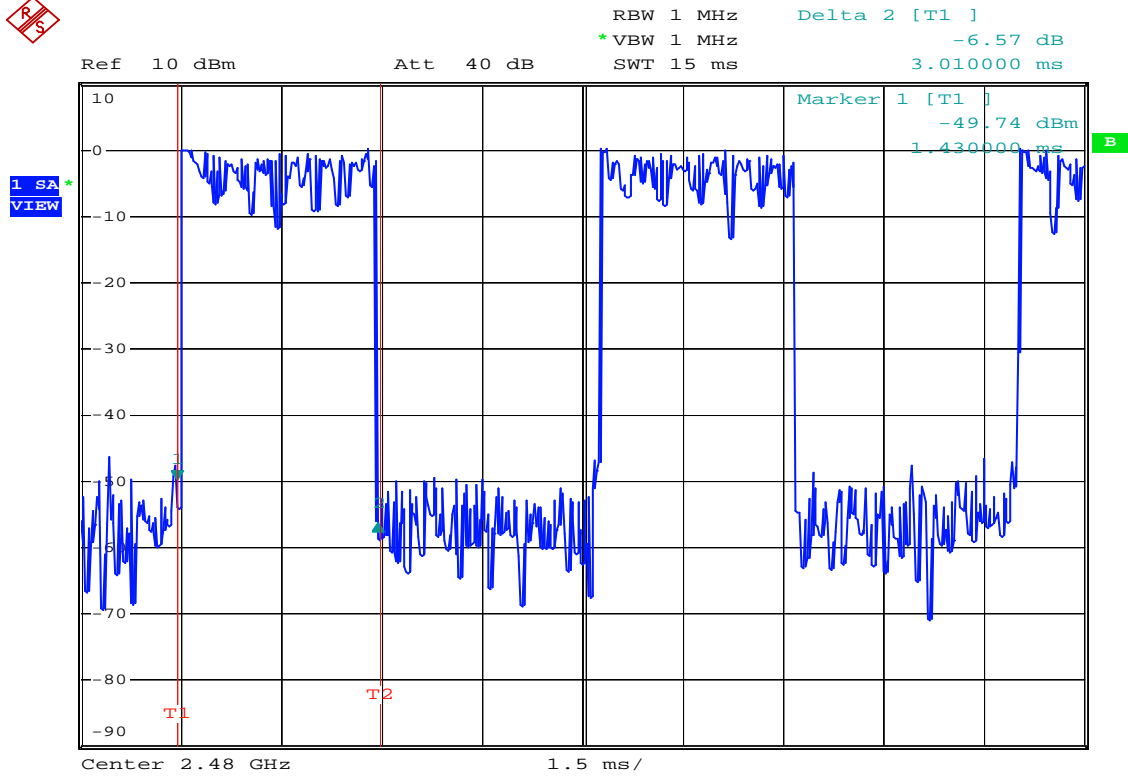

Date: 23.JUL.2007 21:13:34

CH79DH5

13 HOPPING SEQUENCE TEST

79 hopping sequence in data mode:

CH= (2402+N)-2402; N=0-78

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60, 39, 58, 69, 62, 71, 64, 25,
68, 27, 66, 57, 70, 59, 72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13, 47,
11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03, 55, 05, 04