

Wi-Fi_2.4GHz_Tablet Bottom

Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(7.6, 7.6, 7.6) @ 2412 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Main/Tablet Bottom/802.11b/Main Ant/ch1/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.08 W/kg

Main/Tablet Bottom/802.11b/Main Ant/ch1/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 2.99 W/kg


SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.410 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 33.9%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.93 W/kg

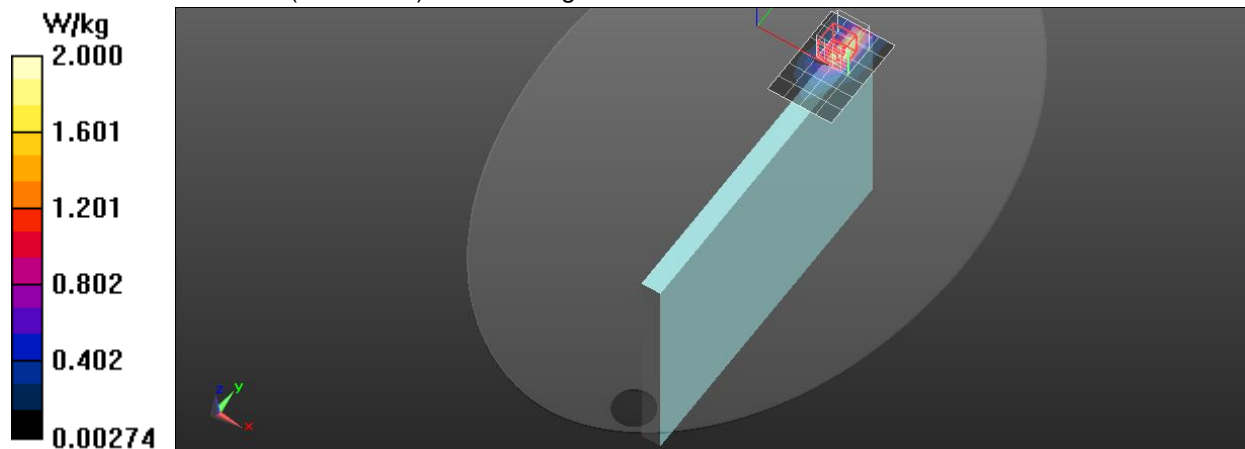

Wi-Fi_5GHz-Tablet Bottom

Frequency: 5250 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.706$ S/m; $\epsilon_r = 35.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(5.13, 5.13, 5.13) @ 5250 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Aux/Tablet Bottom/802.11ac160/Aux Ant/ch50/Area Scan (6x8x1):

Measurement grid: dx=10mm, dy=10mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.05 W/kg

Aux/Tablet Bottom/802.11ac160/Aux Ant/ch50/Zoom Scan (7x7x9)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 5.30 W/kg


SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 49%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.57 W/kg

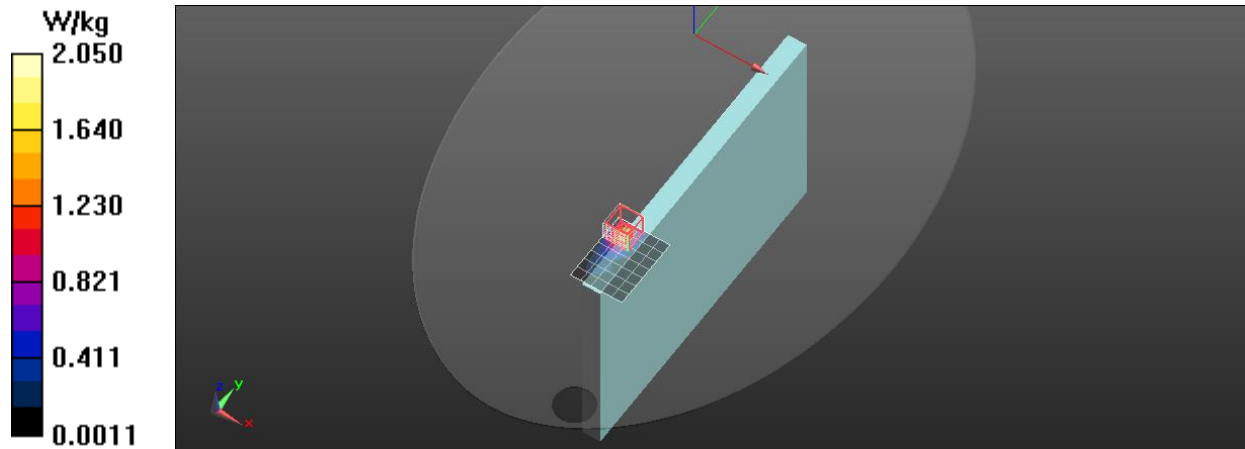

Wi-Fi_5GHz-Tablet Bottom

Frequency: 5570 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5570$ MHz; $\sigma = 5.034$ S/m; $\epsilon_r = 35.563$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(4.7, 4.7, 4.7) @ 5570 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Aux/Yoga Bottom/802.11ac160/Aux Ant/ch114/Area Scan (6x8x1):

Measurement grid: dx=10mm, dy=10mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.84 W/kg

Aux/Yoga Bottom/802.11ac160/Aux Ant/ch114/Zoom Scan (7x7x9)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.2770 V/m; Power Drift = 0.09dB

Peak SAR (extrapolated) = 8.42 W/kg


SAR(1 g) = 1.48 W/kg; SAR(10 g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.12 W/kg

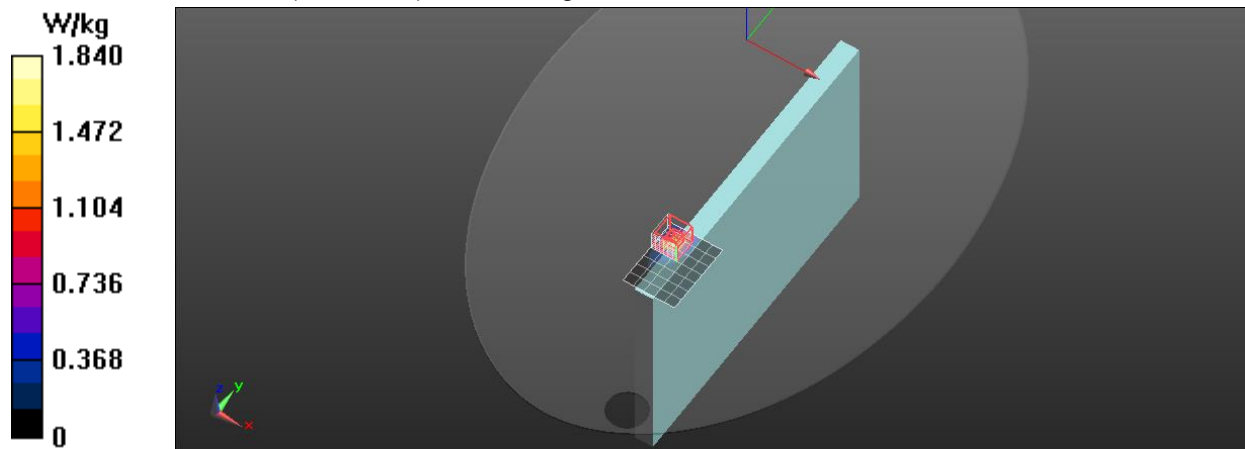

Wi-Fi_5GHz-Tablet Bottom

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.244$ S/m; $\epsilon_r = 35.329$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(4.68, 4.68, 4.68) @ 5775 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Aux/Tablet Bottom/802.11ac80/Aux Ant/ch155/Area Scan (6x8x1):

Measurement grid: dx=10mm, dy=10mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.52 W/kg

Aux/Tablet Bottom/802.11ac80/Aux Ant/ch155/Zoom Scan (9x9x9)/Cube

0: grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.213 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 5.22 W/kg


SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.07 W/kg

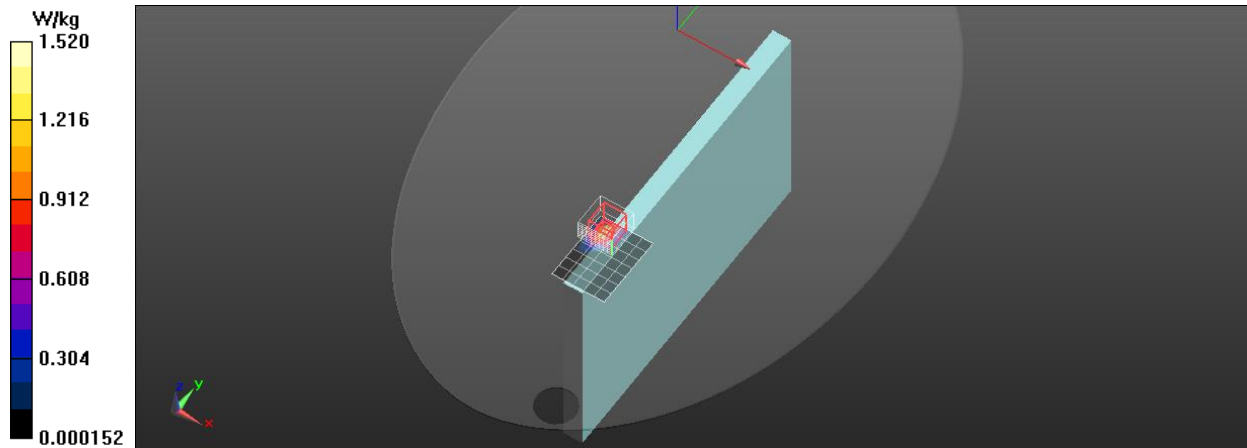

Test Laboratory: BTL
Inc.

Date: 2020/7/8

Wi-Fi_ Bluetooth_DH5_Tablet Bottom

Frequency: 2402 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid
Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.739$ S/m; $\epsilon_r = 39.276$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(7.6, 7.6, 7.6) @ 2402 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Aux/TB Bottom/Blueteen/Aux Ant/ch0/Area Scan (5x7x1): Measurement grid:

dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.166 W/kg

Aux/TB Bottom/Blueteen/Aux Ant/ch0/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.920 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 36.4%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.240 W/kg

