



HSUPA

Channel 4132 (826.4MHz)

Frequency Range : 9kHz ~ 1GHz

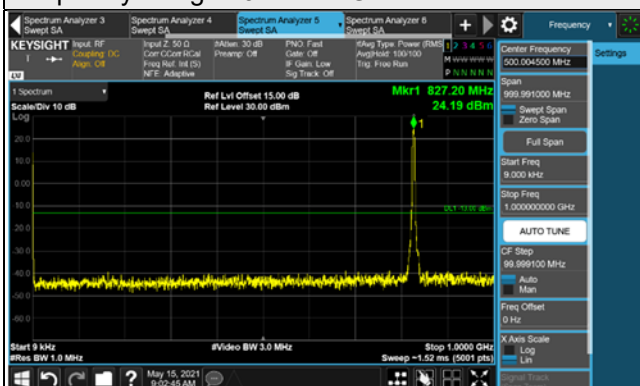


Frequency Range : 1GHz ~ 10GHz

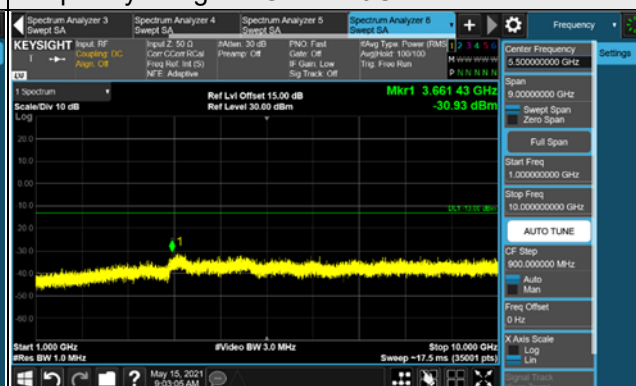

Channel 4182 (836.4MHz)

Frequency Range : 9kHz ~ 1GHz

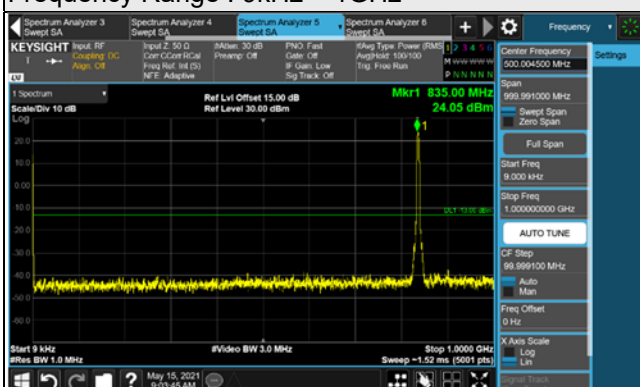


Frequency Range : 1GHz ~ 10GHz




Channel 4233 (846.6MHz)

Frequency Range : 9kHz ~ 1GHz

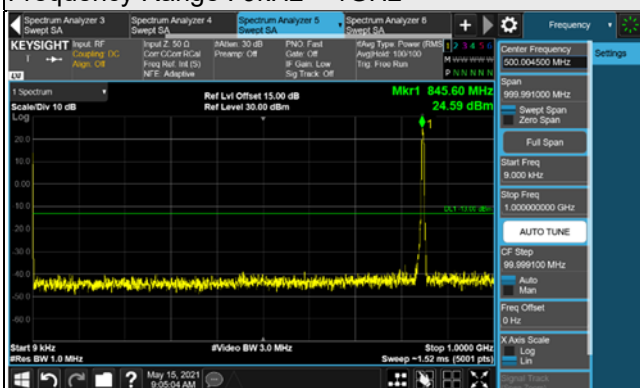

Frequency Range : 1GHz ~ 10GHz

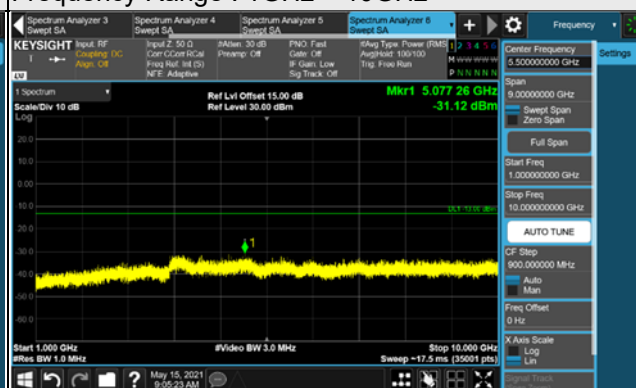


\*The 9kHz signal over the limit is from Spectrum.


LTE Band 5, Channel Bandwidth 1.4MHz

Channel 20407 (824.7MHz)

Frequency Range : 9kHz ~ 1GHz

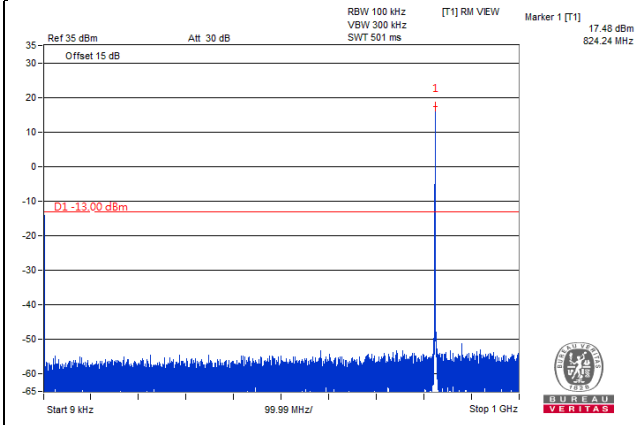


Frequency Range : 1GHz ~ 9GHz

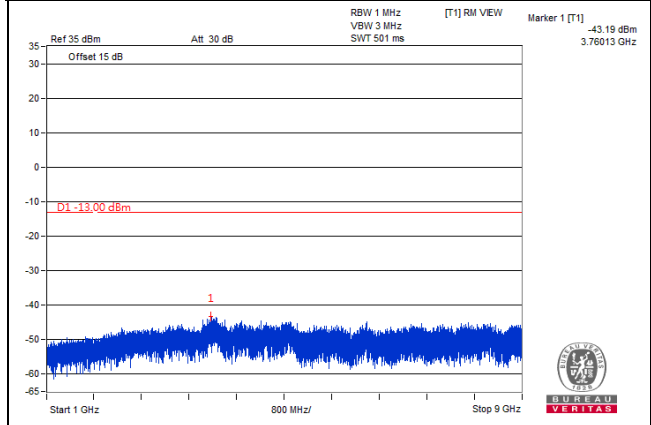


Channel 20525 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

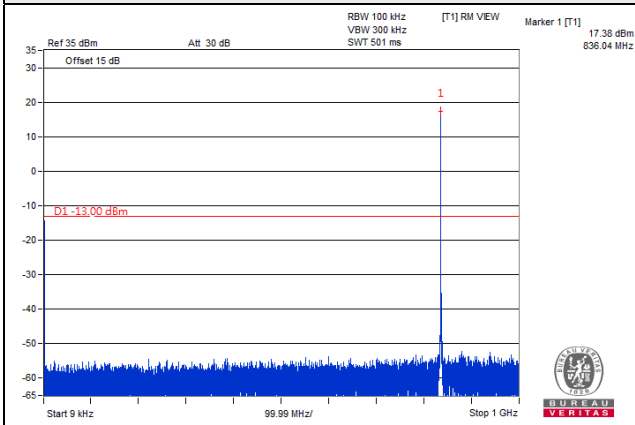


Frequency Range : 1GHz ~ 9GHz

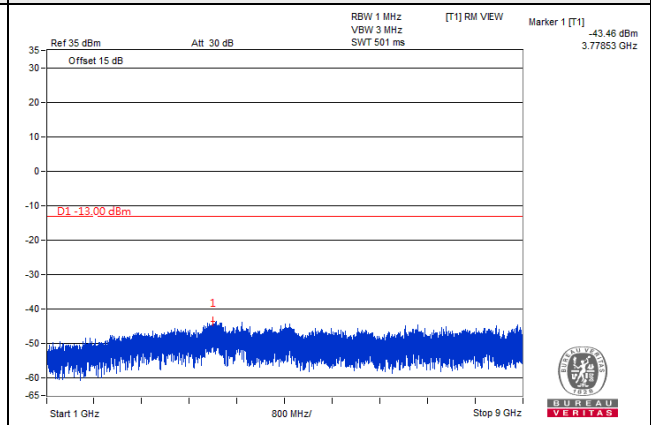


Channel 20643 (848.3MHz)

Frequency Range : 9kHz ~ 1GHz

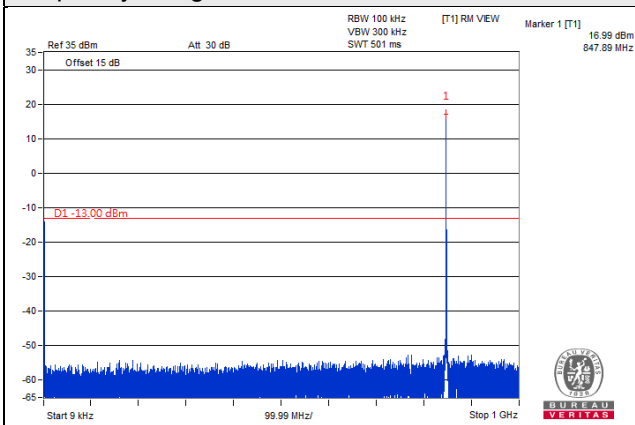

Frequency Range : 1GHz ~ 9GHz

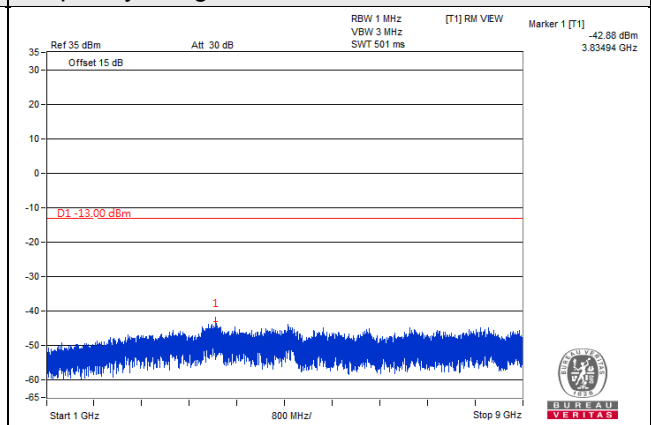


\*The 9kHz signal over the limit is from Spectrum.


LTE Band 5, Channel Bandwidth 3MHz

Channel 20415 (825.5MHz)

Frequency Range : 9kHz ~ 1GHz

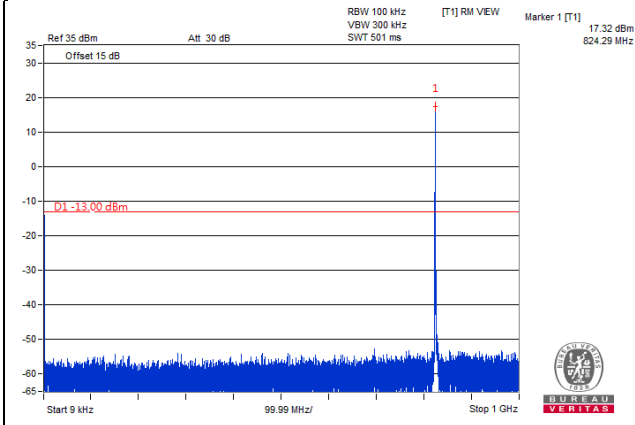


Frequency Range : 1GHz ~ 9GHz

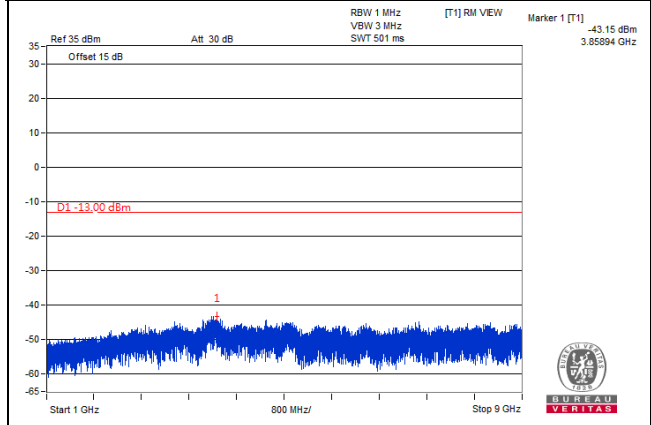


Channel 20525 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

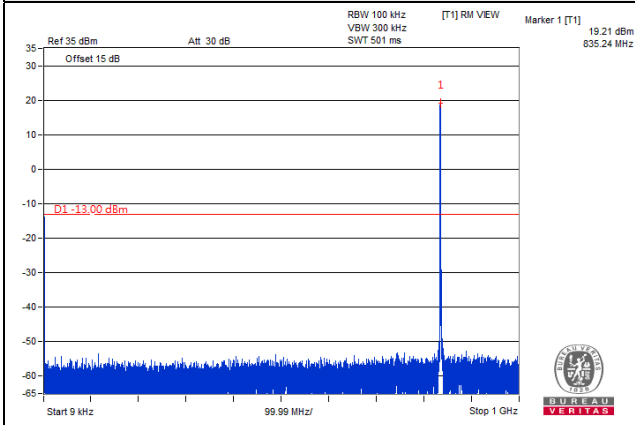


Frequency Range : 1GHz ~ 9GHz

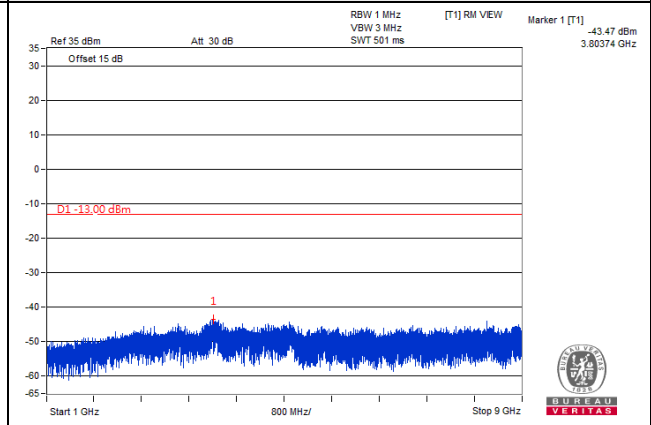


Channel 20635 (847.5MHz)

Frequency Range : 9kHz ~ 1GHz

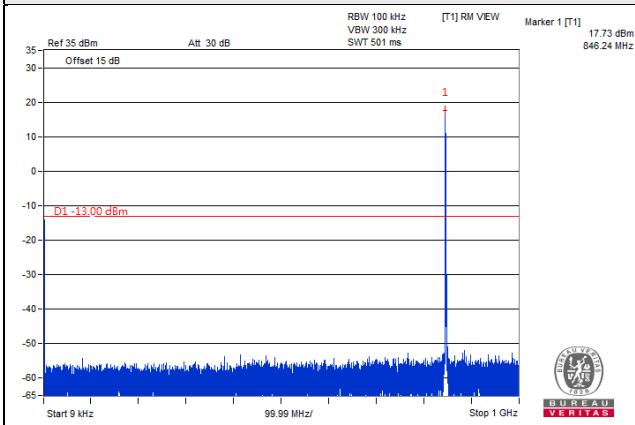

Frequency Range : 1GHz ~ 9GHz

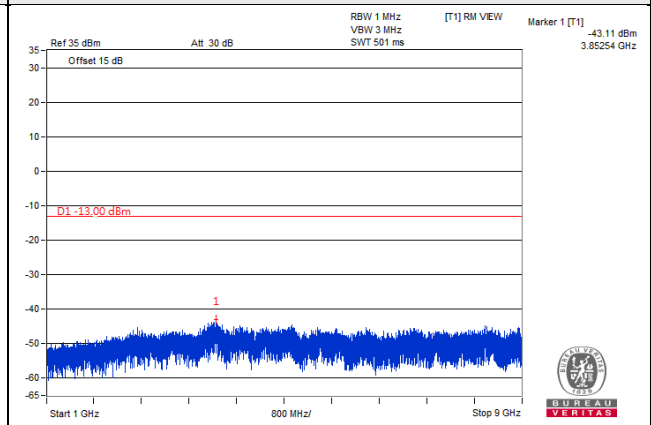


\*The 9kHz signal over the limit is from Spectrum.


LTE Band 5, Channel Bandwidth 5MHz

Channel 20425 (826.5MHz)

Frequency Range : 9kHz ~ 1GHz

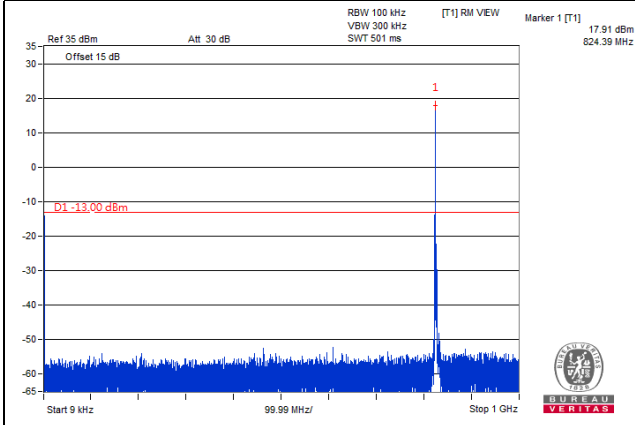


Frequency Range : 1GHz ~ 9GHz

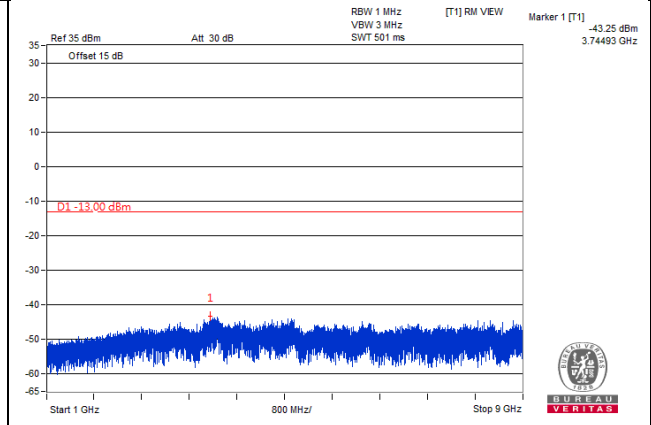


Channel 20525 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

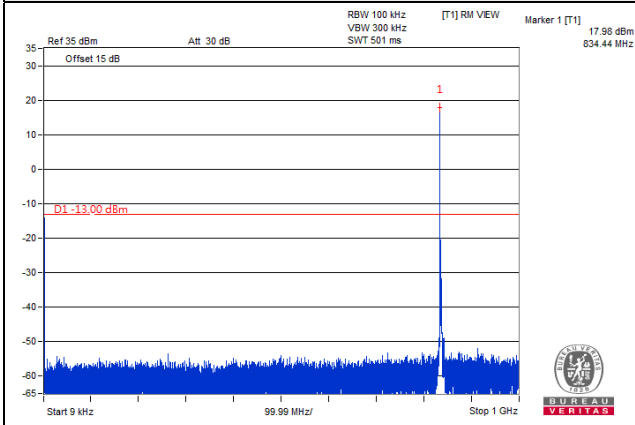


Frequency Range : 1GHz ~ 9GHz

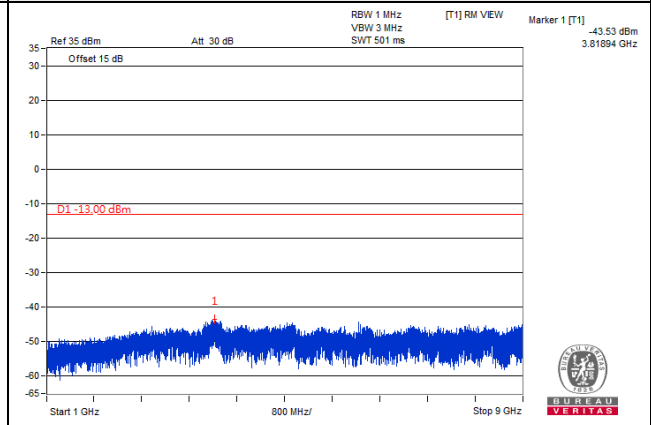


Channel 20625 (846.5MHz)

Frequency Range : 9kHz ~ 1GHz

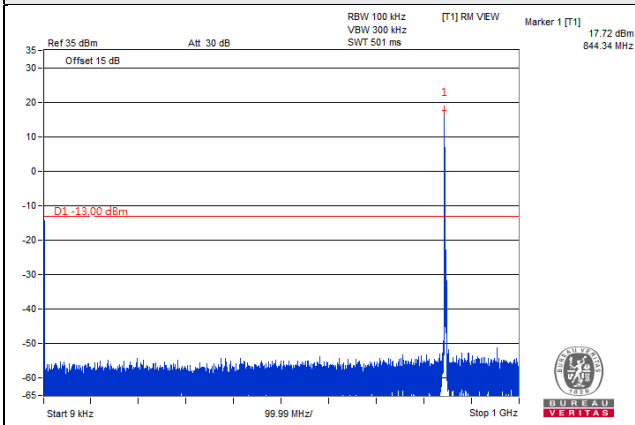

Frequency Range : 1GHz ~ 9GHz

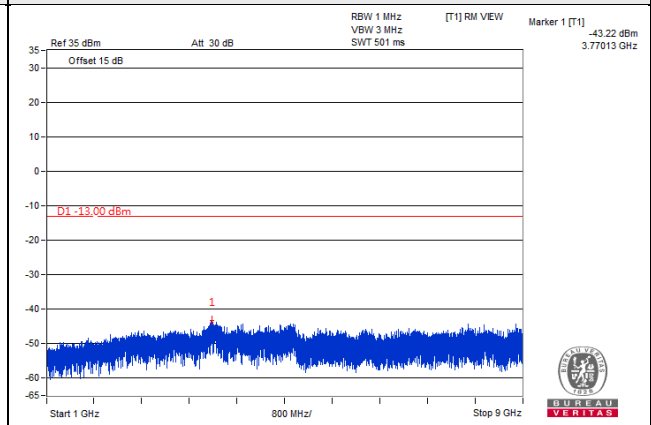


\*The 9kHz signal over the limit is from Spectrum.


LTE Band 5, Channel Bandwidth 10MHz

Channel 20450 (829.0MHz)

Frequency Range : 9kHz ~ 1GHz

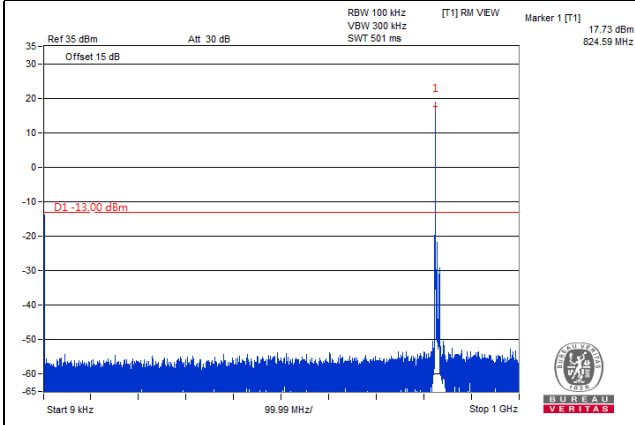


Frequency Range : 1GHz ~ 9GHz

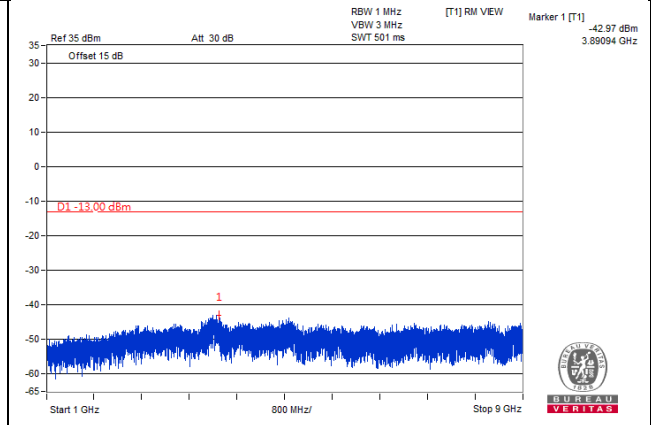


Channel 20525 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

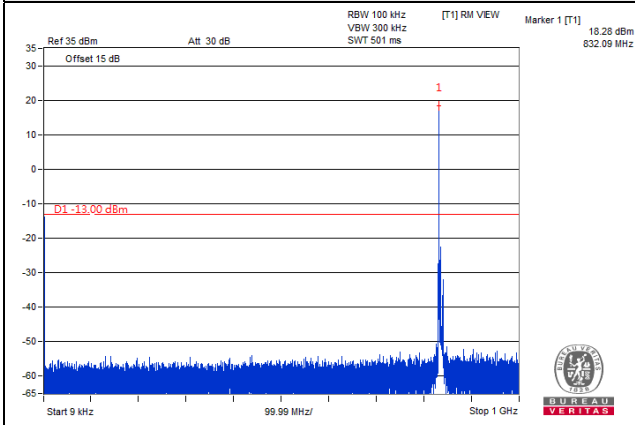


Frequency Range : 1GHz ~ 9GHz

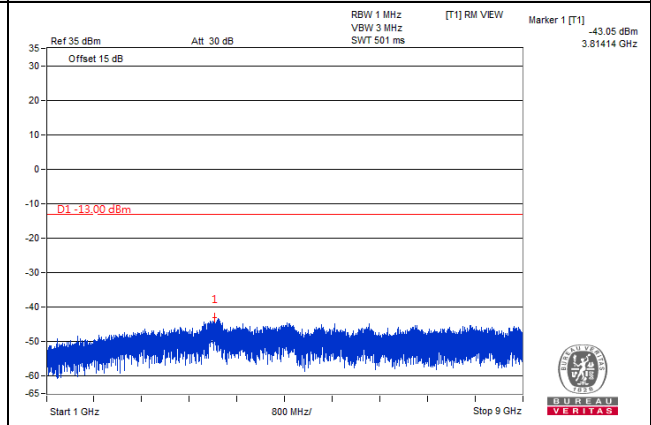


Channel 20600 (844.0MHz)

Frequency Range : 9kHz ~ 1GHz

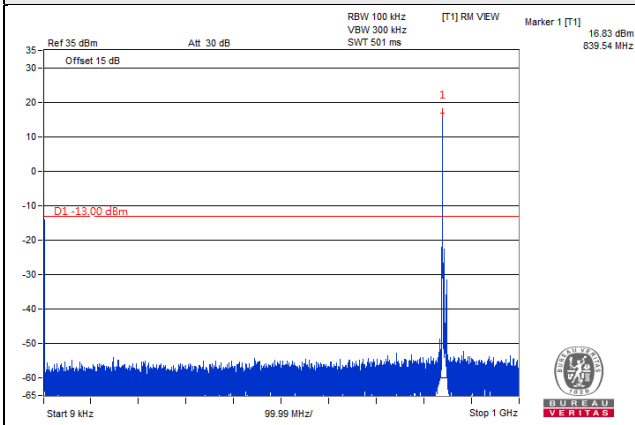

Frequency Range : 1GHz ~ 9GHz

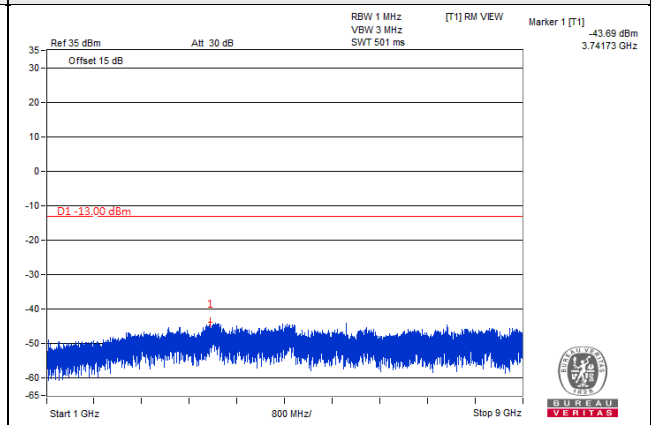


\*The 9kHz signal over the limit is from Spectrum.


LTE Band 26, Channel Bandwidth 1.4MHz

Channel 26797 (824.7MHz)

Frequency Range : 9kHz ~ 1GHz

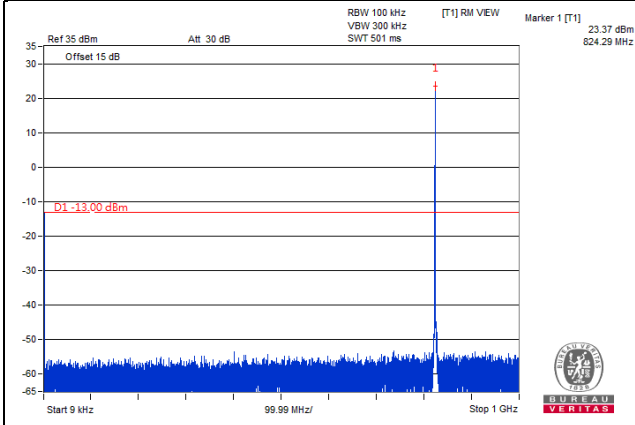


Frequency Range : 1GHz ~ 9GHz

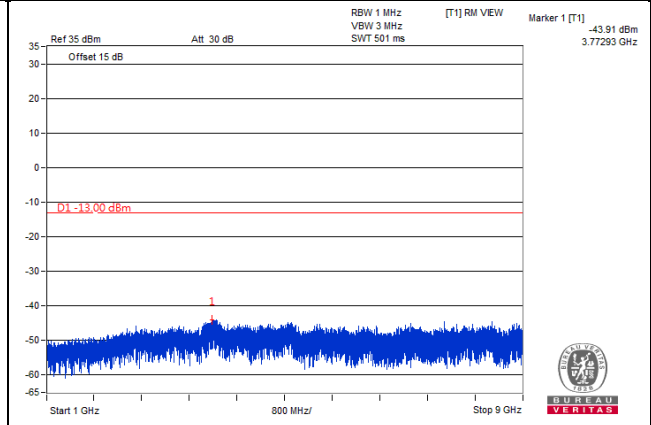


Channel 26915 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

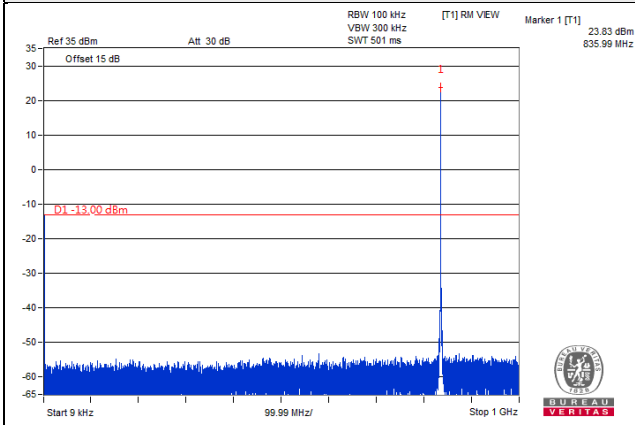


Frequency Range : 1GHz ~ 9GHz

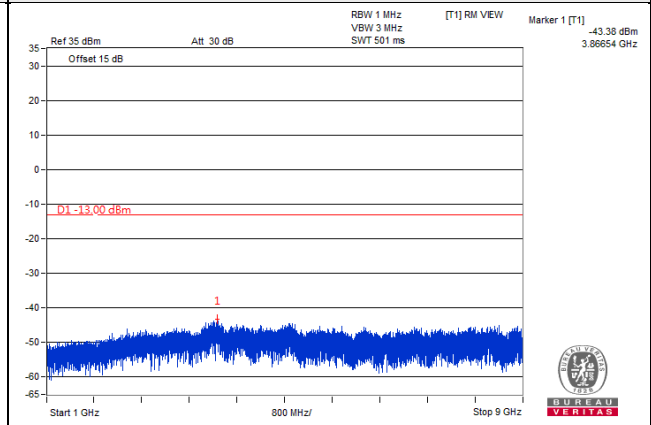


Channel 27033 (848.3MHz)

Frequency Range : 9kHz ~ 1GHz

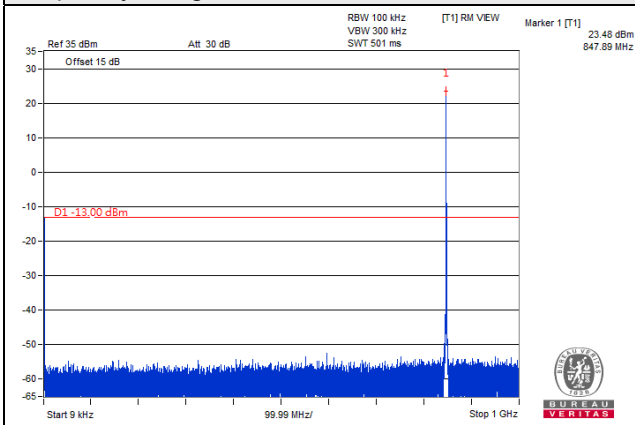

Frequency Range : 1GHz ~ 9GHz

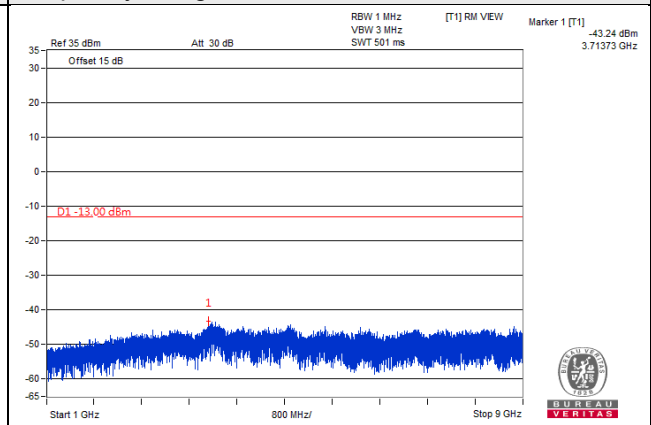


\*The 9kHz signal over the limit is from Spectrum.


LTE Band 26, Channel Bandwidth 3MHz

Channel 26805 (825.5MHz)

Frequency Range : 9kHz ~ 1GHz

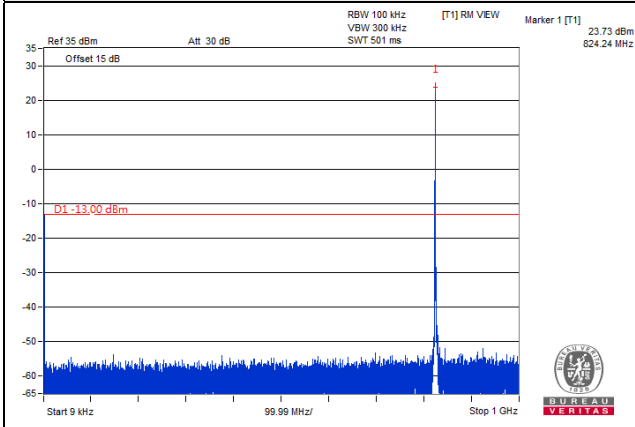


Frequency Range : 1GHz ~ 9GHz

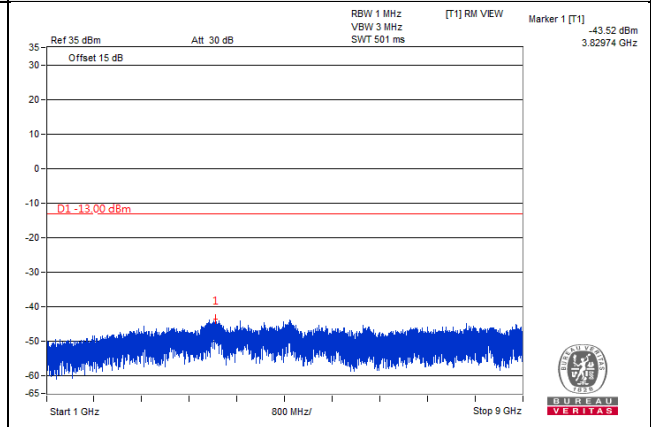


Channel 26915 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

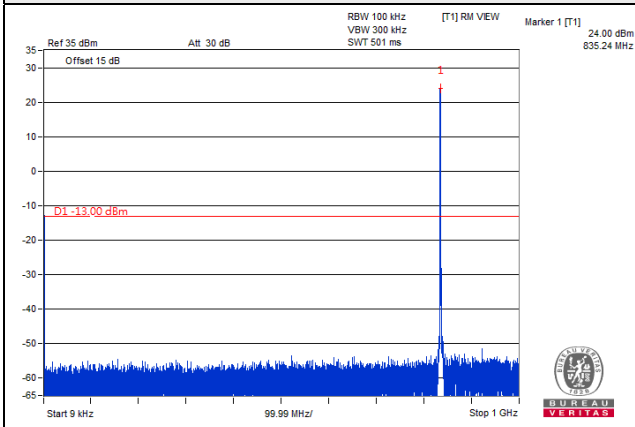


Frequency Range : 1GHz ~ 9GHz

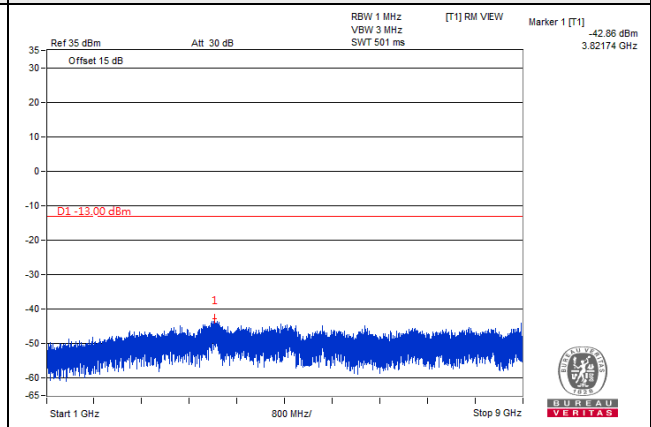


Channel 27025 (847.5MHz)

Frequency Range : 9kHz ~ 1GHz

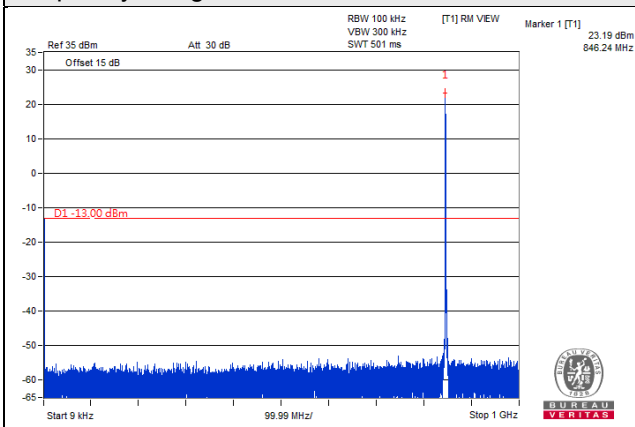

Frequency Range : 1GHz ~ 9GHz

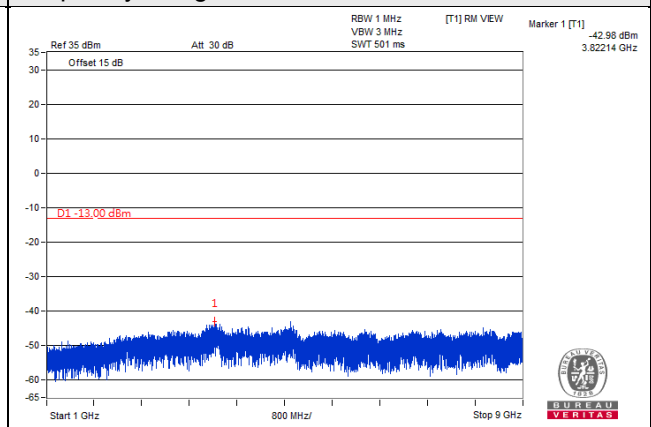


\*The 9kHz signal over the limit is from Spectrum.


LTE Band 26, Channel Bandwidth 5MHz

Channel 26815 (826.5MHz)

Frequency Range : 9kHz ~ 1GHz

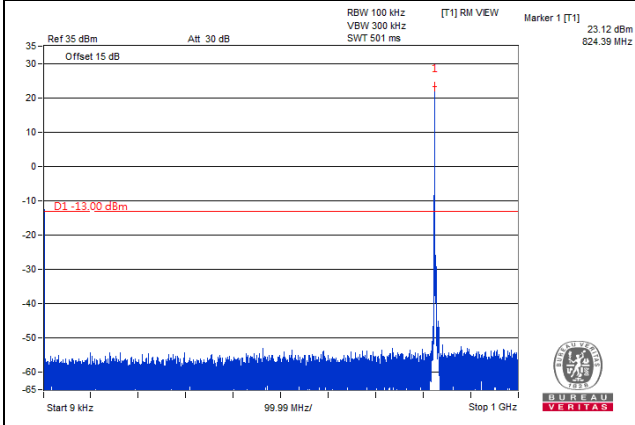


Frequency Range : 1GHz ~ 9GHz

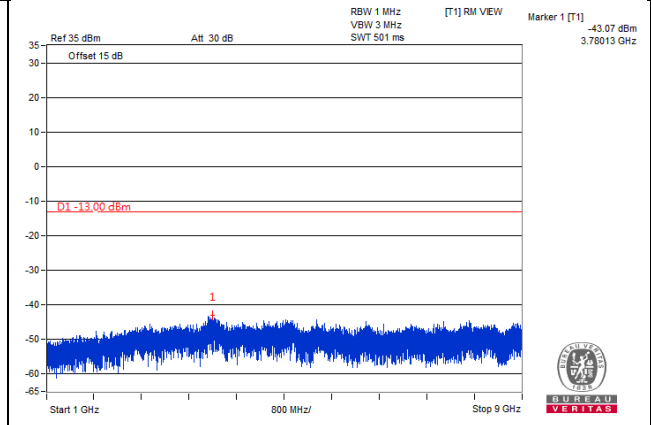


Channel 26915 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

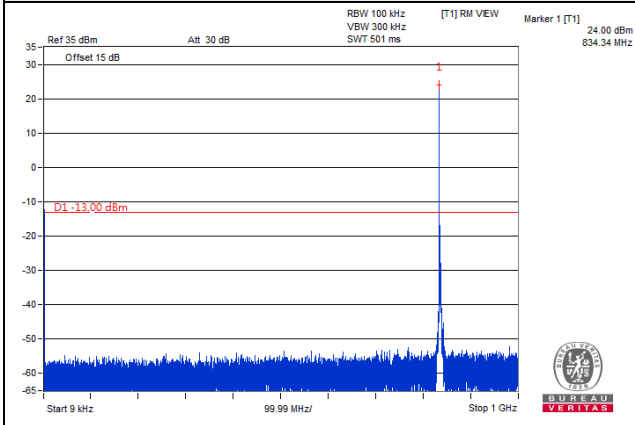


Frequency Range : 1GHz ~ 9GHz

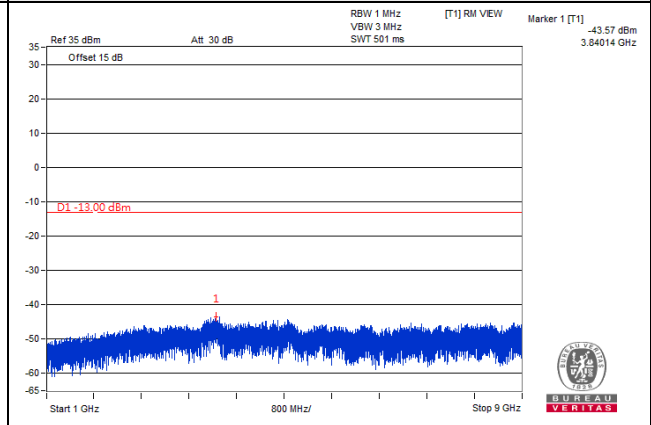


Channel 27015 (846.5MHz)

Frequency Range : 9kHz ~ 1GHz

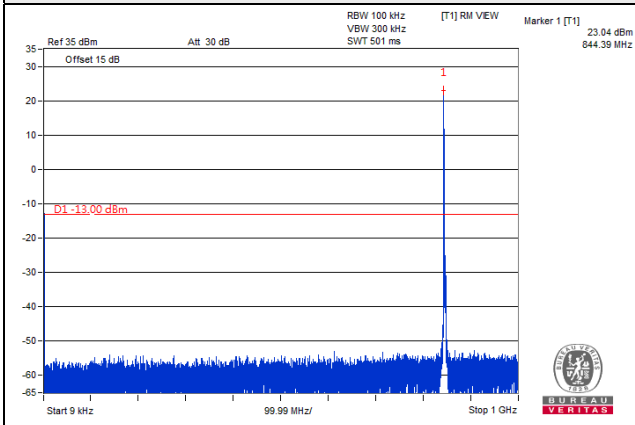

Frequency Range : 1GHz ~ 9GHz

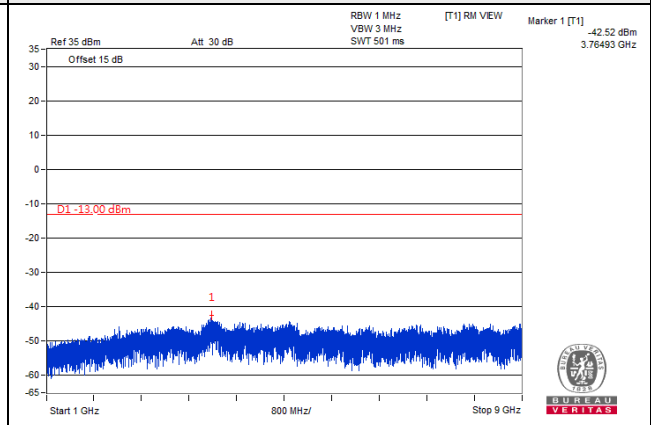


\*The 9kHz signal over the limit is from Spectrum.




LTE Band 26, Channel Bandwidth 10MHz

Channel 26840 (829.0MHz)

Frequency Range : 9kHz ~ 1GHz

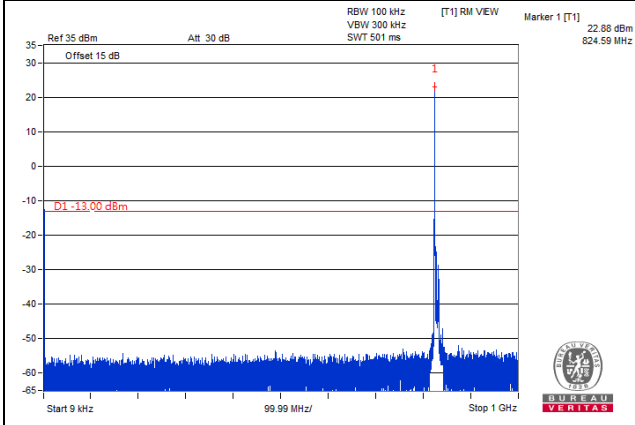


Frequency Range : 1GHz ~ 9GHz

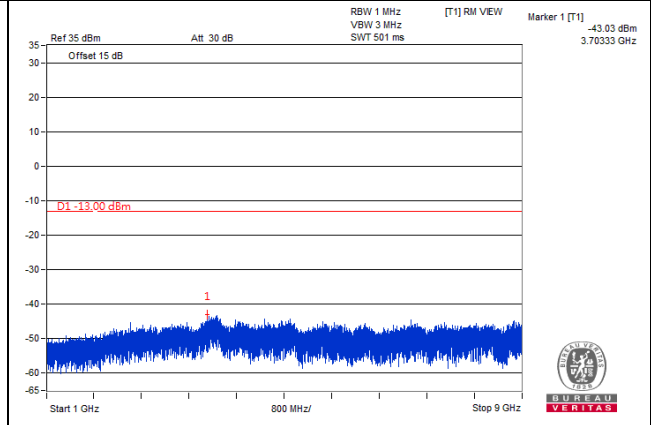


Channel 26915 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

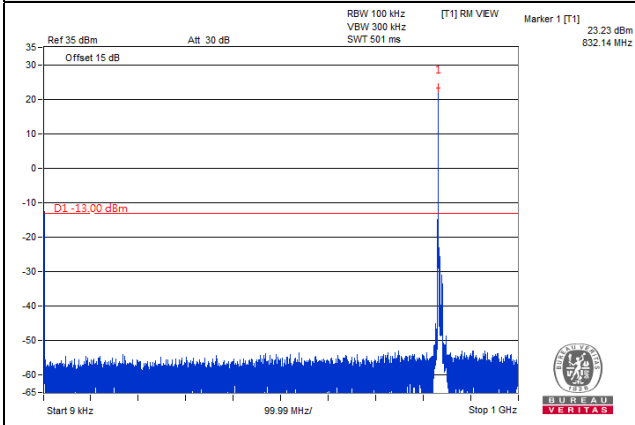


Frequency Range : 1GHz ~ 9GHz

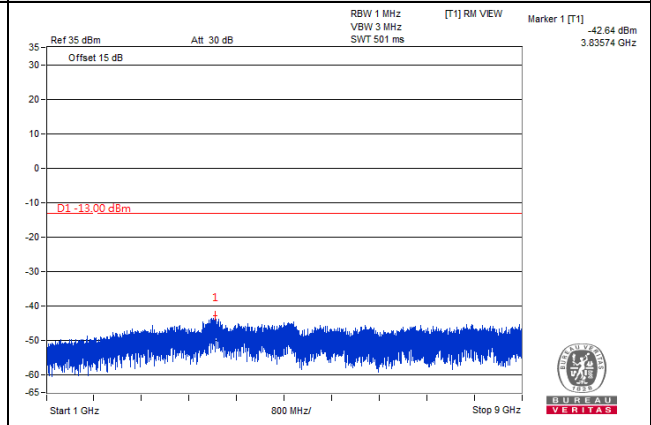


Channel 26990 (844.0MHz)

Frequency Range : 9kHz ~ 1GHz

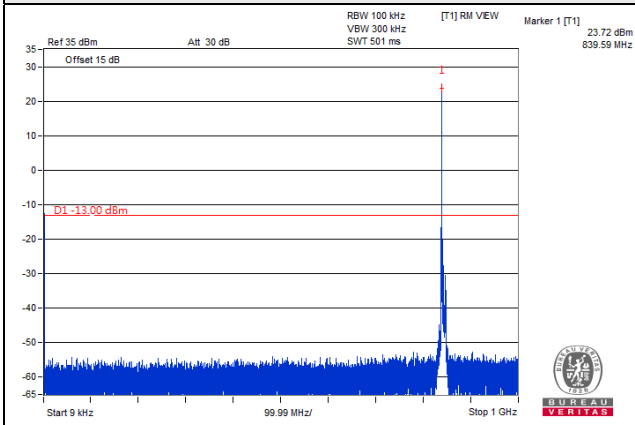

Frequency Range : 1GHz ~ 9GHz

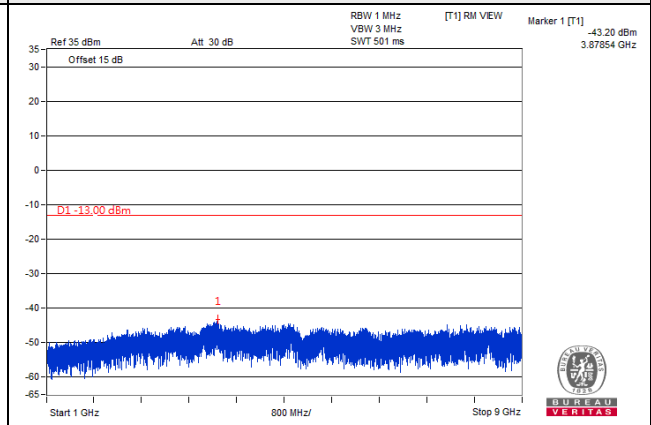


\*The 9kHz signal over the limit is from Spectrum.


LTE Band 26, Channel Bandwidth 15MHz

Channel 26865 (831.5MHz)

Frequency Range : 9kHz ~ 1GHz

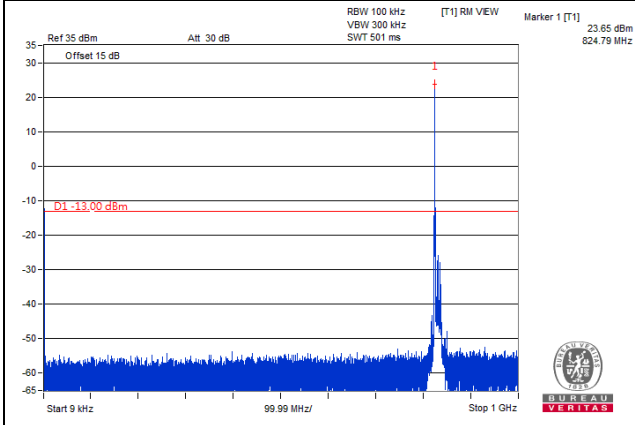


Frequency Range : 1GHz ~ 9GHz

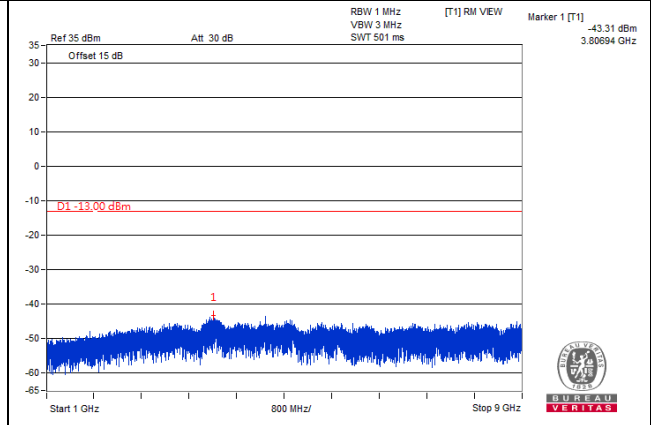


Channel 26915 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

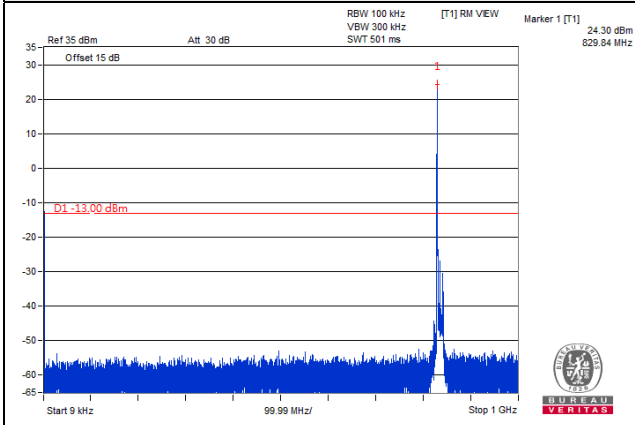


Frequency Range : 1GHz ~ 9GHz

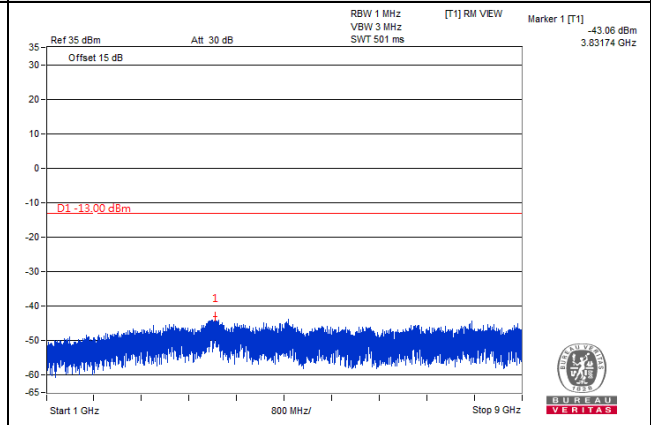


Channel 26965 (841.5MHz)

Frequency Range : 9kHz ~ 1GHz

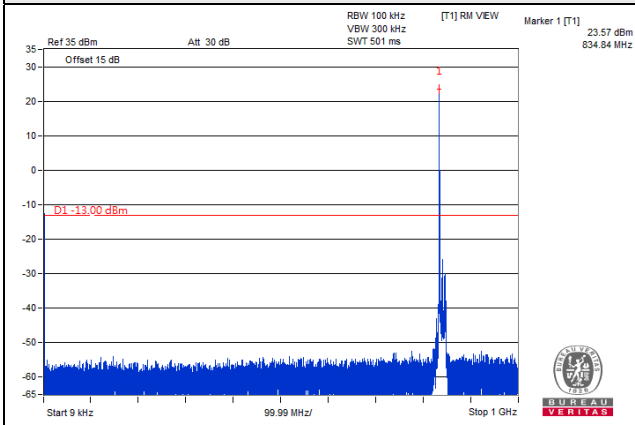

Frequency Range : 1GHz ~ 9GHz

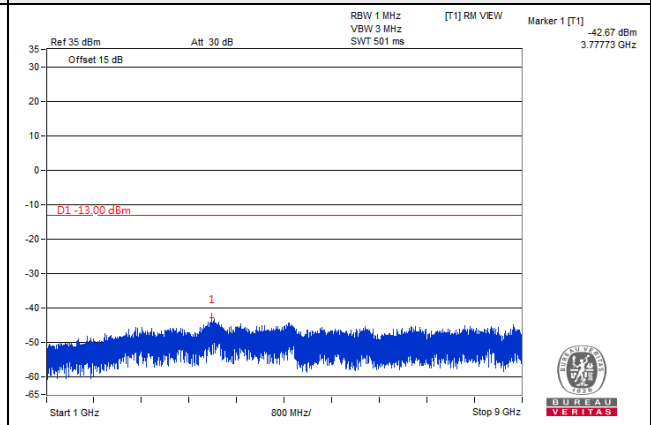

\*The 9kHz signal over the limit is from Spectrum.

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
  - $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.
  - $\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:  
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

### 4.8.3 Deviation from Test Standard


No deviation.

#### 4.8.4 Test Setup

For radiated emission 30MHz to 1GHz

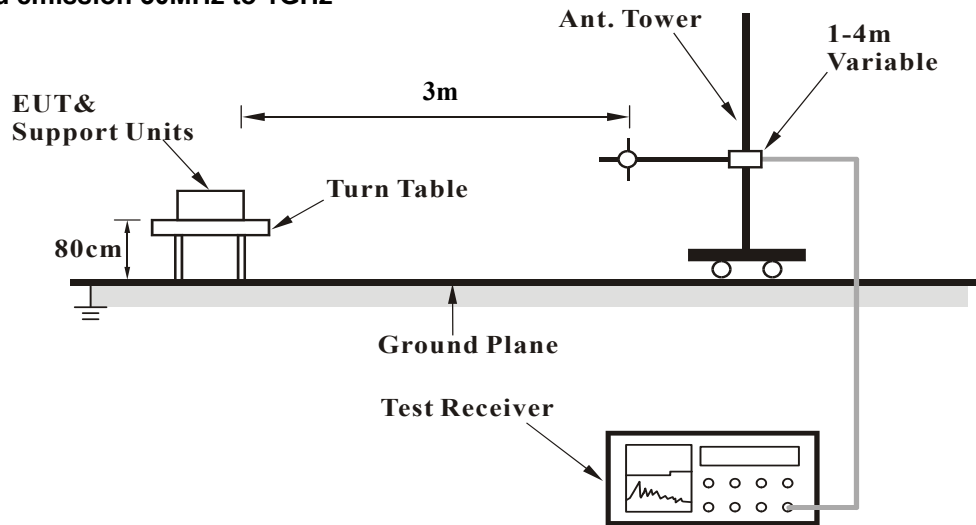

For radiated emission above 1GHz

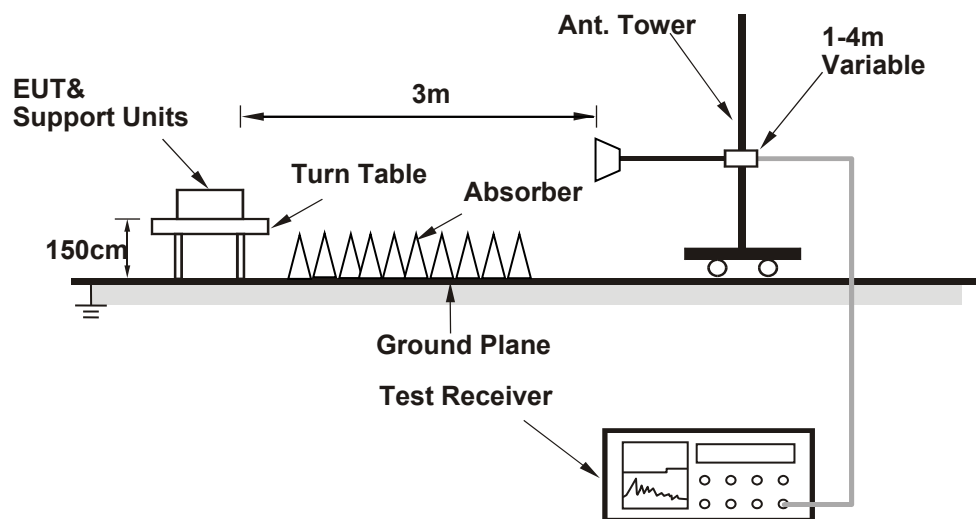

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.8.5 Test Results

Below 1GHz


WCDMA Band 5

Mode	TX channel 4182 (836.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	-66.40	-13.00	-53.40	1.50 H	124	42.00	-108.40
2	80.61	-67.10	-13.00	-54.10	1.00 H	159	43.90	-111.00
3	184.64	-67.60	-13.00	-54.60	1.00 H	222	40.20	-107.80
4	259.14	-64.80	-13.00	-51.80	1.50 H	23	40.80	-105.60
5	360.36	-71.50	-13.00	-58.50	1.00 H	159	31.30	-102.80
6	520.62	-72.20	-13.00	-59.20	1.50 H	143	27.10	-99.30

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

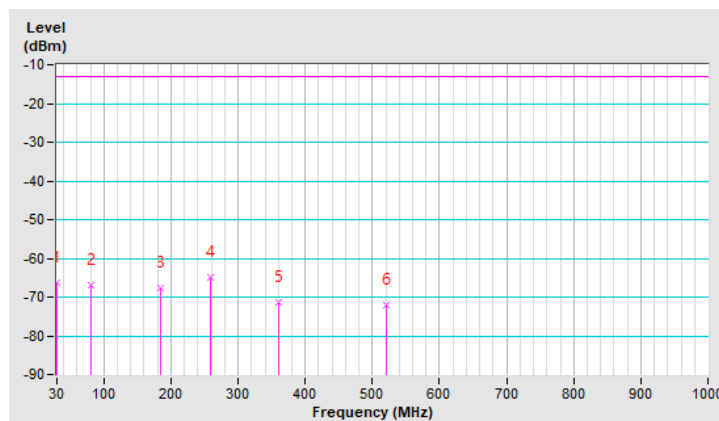


Mode	TX channel 4182 (836.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.09	-48.60	-13.00	-35.60	1.50 V	306	57.90	-106.50
2	80.61	-54.40	-13.00	-41.40	1.00 V	99	56.60	-111.00
3	136.84	-62.00	-13.00	-49.00	1.00 V	186	44.80	-106.80
4	238.06	-68.50	-13.00	-55.50	1.00 V	108	38.40	-106.90
5	363.17	-64.70	-13.00	-51.70	2.00 V	106	38.00	-102.80
6	572.64	-68.60	-13.00	-55.60	1.50 V	131	29.60	-98.20

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

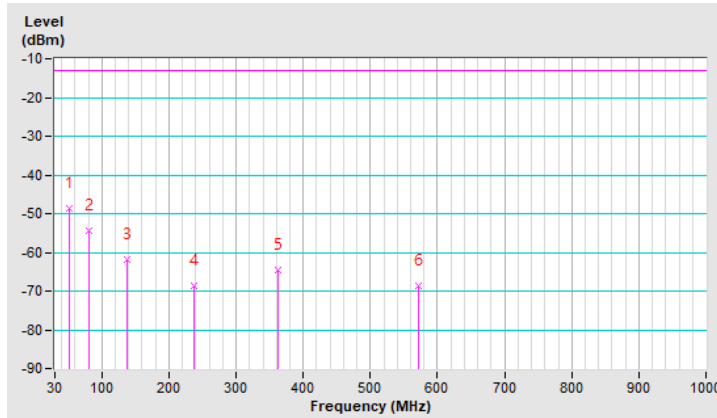


LTE Band 5, Channel Bandwidth 10MHz

Mode	TX channel 20600 (844.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-61.10	-13.00	-48.10	1.50 H	130	45.24	-106.34
2	88.20	-57.15	-13.00	-44.15	1.00 H	268	54.77	-111.92
3	202.66	-52.95	-13.00	-39.95	1.00 H	291	56.29	-109.24
4	324.88	-58.65	-13.00	-45.65	1.00 H	277	45.79	-104.44
<b>5</b>	<b>730.34</b>	<b>-40.39</b>	<b>-13.00</b>	<b>-27.39</b>	<b>1.00 H</b>	<b>346</b>	<b>55.06</b>	<b>-95.45</b>
6	935.98	-47.24	-13.00	-34.24	1.00 H	166	43.26	-90.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

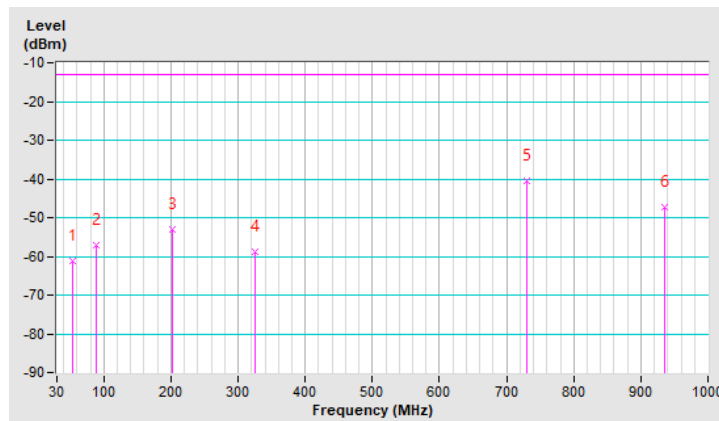


Mode	TX channel 20600 (844.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Noah Chang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-47.12	-13.00	-34.12	1.00 V	0	59.22	-106.34
2	138.64	-58.94	-13.00	-45.94	1.00 V	18	47.89	-106.83
3	235.64	-49.73	-13.00	-36.73	1.00 V	283	58.19	-107.92
4	392.78	-46.04	-13.00	-33.04	1.00 V	52	57.34	-103.38
5	730.34	-43.38	-13.00	-30.38	1.00 V	184	52.07	-95.45
6	935.98	-47.86	-13.00	-34.86	1.00 V	87	42.64	-90.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

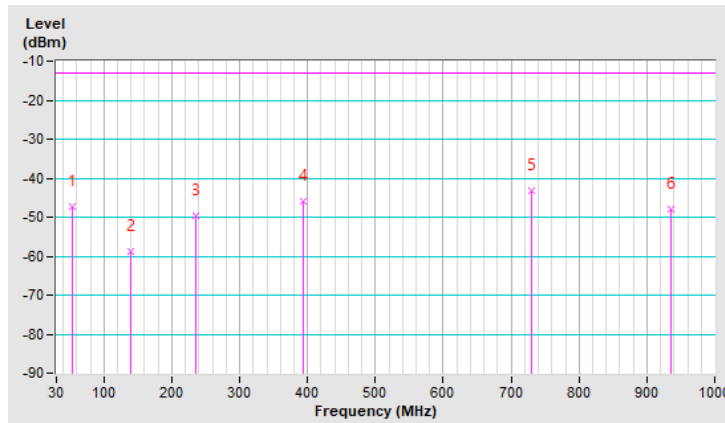




LTE Band 26, Channel Bandwidth 5MHz

Mode	TX channel 27015 (846.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	-66.50	-13.00	-53.50	2.00 H	66	40.00	-106.50
2	80.61	-67.20	-13.00	-54.20	1.49 H	294	43.80	-111.00
3	184.64	-67.00	-13.00	-54.00	1.49 H	227	40.80	-107.80
4	263.36	-65.60	-13.00	-52.60	1.49 H	12	39.70	-105.20
5	361.77	-71.60	-13.00	-58.60	1.00 H	141	31.30	-102.90
6	682.29	-69.80	-13.00	-56.80	1.00 H	332	25.80	-95.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

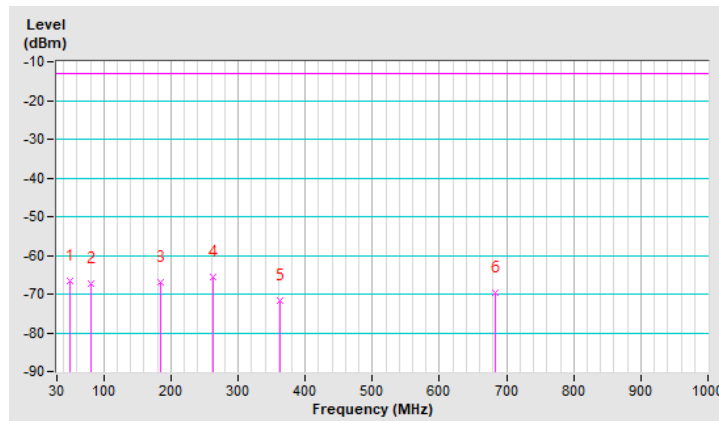


Mode	TX channel 27015 (846.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.09	-48.50	-13.00	-35.50	2.00 V	297	58.00	-106.50
2	80.61	-54.60	-13.00	-41.60	1.49 V	126	56.40	-111.00
3	129.81	-63.10	-13.00	-50.10	1.49 V	2	44.40	-107.50
4	238.06	-69.90	-13.00	-56.90	1.00 V	83	37.00	-106.90
5	363.17	-66.70	-13.00	-53.70	1.00 V	112	36.00	-102.80
6	429.25	-70.40	-13.00	-57.40	1.49 V	154	30.80	-101.20

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

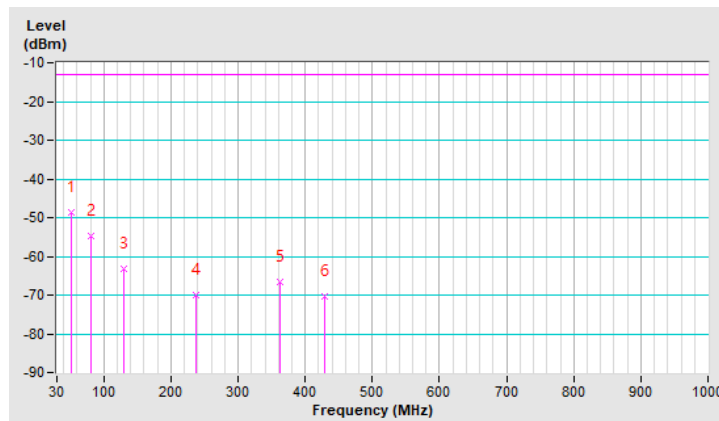

Above 1GHz  
WCDMA Band 5

Mode	TX channel 4132 (826.4MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.80	-52.60	-13.00	-39.60	1.46 H	333	49.90	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.80	-53.60	-13.00	-40.60	1.14 V	240	48.90	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 4182 (836.4MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-49.60	-13.00	-36.60	1.46 H	334	52.90	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-53.10	-13.00	-40.10	1.12 V	236	49.40	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 4233 (846.6MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.20	-53.80	-13.00	-40.80	1.50 H	341	48.60	-102.40
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.20	-54.40	-13.00	-41.40	1.08 V	231	48.00	-102.40

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

LTE Band 5, Channel Bandwidth 1.4MHz

Mode	TX channel 20407 (824.7MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-52.10	-13.00	-39.10	1.40 H	168	50.40	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-55.20	-13.00	-42.20	1.89 V	232	47.30	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-54.20	-13.00	-41.20	1.38 H	172	48.30	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-56.30	-13.00	-43.30	1.78 V	241	46.20	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20643 (848.3MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-53.00	-13.00	-40.00	1.37 H	170	49.40	-102.40
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-55.50	-13.00	-42.50	1.77 V	231	46.90	-102.40

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 5, Channel Bandwidth 5MHz

Mode	TX channel 20425 (826.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-51.30	-13.00	-38.30	1.38 H	172	51.20	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-52.30	-13.00	-39.30	1.85 V	237	50.20	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-54.10	-13.00	-41.10	1.40 H	172	48.40	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-56.00	-13.00	-43.00	1.92 V	221	46.50	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20625 (846.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-53.00	-13.00	-40.00	1.31 H	166	49.40	-102.40
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-54.10	-13.00	-41.10	1.99 V	238	48.30	-102.40

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



LTE Band 5, Channel Bandwidth 10MHz

Mode	TX channel 20450 (829.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-51.40	-13.00	-38.40	1.44 H	165	51.10	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-52.60	-13.00	-39.60	1.89 V	217	49.90	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-53.40	-13.00	-40.40	1.38 H	173	49.10	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-55.00	-13.00	-42.00	1.79 V	236	47.50	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20600 (844.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-43.80	-13.00	-30.80	1.37 H	175	58.60	-102.40
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-46.20	-13.00	-33.20	1.93 V	236	56.20	-102.40

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 26, Channel Bandwidth 1.4MHz

Mode	TX channel 26797 (824.7MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-54.40	-13.00	-41.40	1.94 H	355	48.10	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-52.20	-13.00	-39.20	1.44 V	90	50.30	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-54.30	-13.00	-41.30	1.94 H	344	48.20	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-52.20	-13.00	-39.20	1.47 V	87	50.30	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 27033 (848.3MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-53.80	-13.00	-40.80	1.99 H	341	48.60	-102.40
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-51.10	-13.00	-38.10	1.51 V	53	51.30	-102.40

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 26, Channel Bandwidth 5MHz

Mode	TX channel 26815 (826.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-55.30	-13.00	-42.30	1.80 H	346	47.20	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-52.60	-13.00	-39.60	1.63 V	93	49.90	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-55.60	-13.00	-42.60	1.85 H	352	46.90	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-52.80	-13.00	-39.80	1.45 V	87	49.80	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 27015 (846.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-52.80	-13.00	-39.80	1.89 H	333	49.60	-102.40
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-50.70	-13.00	-37.70	1.33 V	79	51.70	-102.40

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 26, Channel Bandwidth 15MHz

Mode	TX channel 26865 (831.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1663.00	-57.90	-13.00	-44.90	1.96 H	343	44.60	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1663.00	-57.00	-13.00	-44.00	1.45 V	95	45.50	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-57.40	-13.00	-44.40	2.01 H	346	45.10	-102.50
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-56.40	-13.00	-43.40	1.53 V	79	46.10	-102.50

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 26965 (841.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	25deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1683.00	-58.10	-13.00	-45.10	1.87 H	346	44.30	-102.40
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1683.00	-56.60	-13.00	-43.60	1.51 V	48	45.80	-102.40

Remarks:

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---