


4.7.4 Test Results


n71, Channel Bandwidth 5MHz

Channel 133100 (665.5MHz)

Frequency Range : 9kHz ~ 1GHz

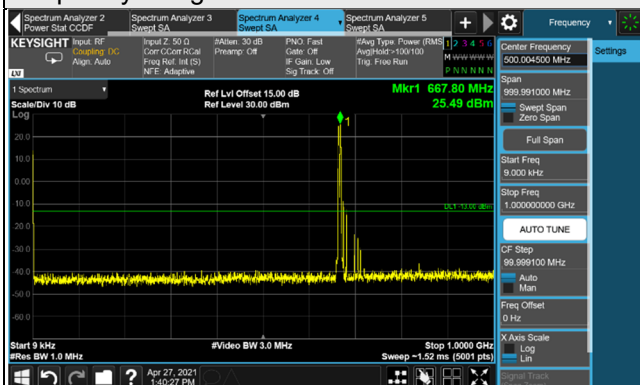


Frequency Range : 1GHz ~ 10GHz

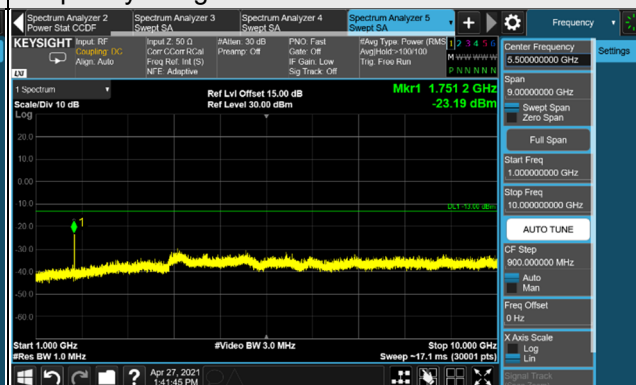


Channel 136100 (680.5MHz)

Frequency Range : 9kHz ~ 1GHz

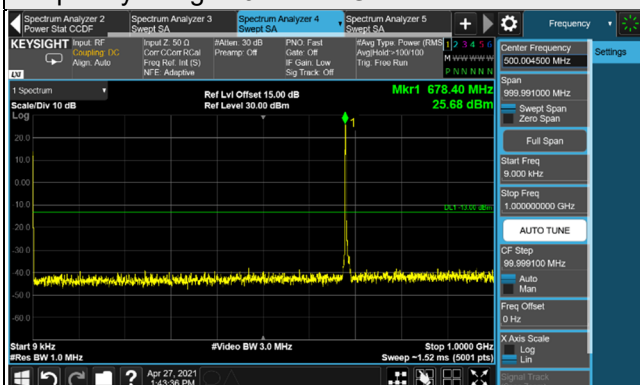


Frequency Range : 1GHz ~ 10GHz

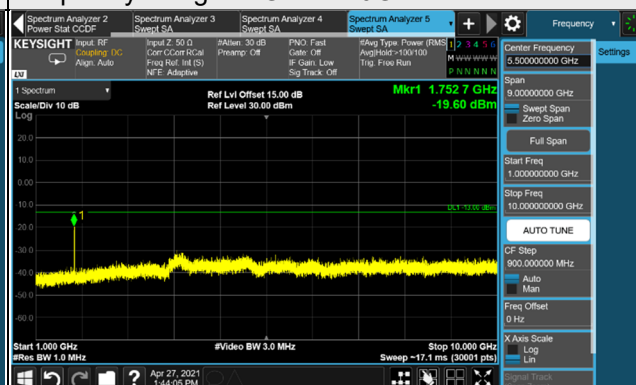


Channel 139100 (695.5MHz)

Frequency Range : 9kHz ~ 1GHz

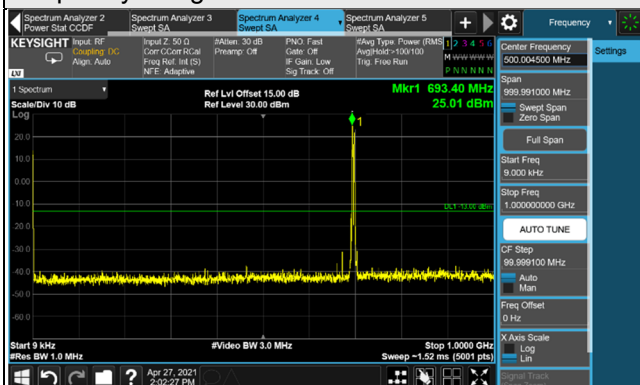

Frequency Range : 1GHz ~ 10GHz

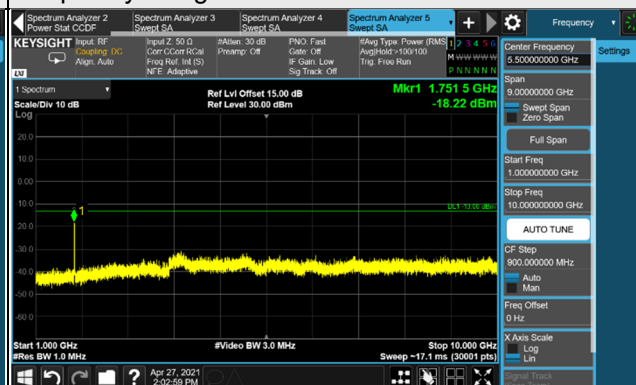


*The 9kHz signal over the limit is from Spectrum.


n71, Channel Bandwidth 10MHz

Channel 133600 (668.0MHz)

Frequency Range : 9kHz ~ 1GHz

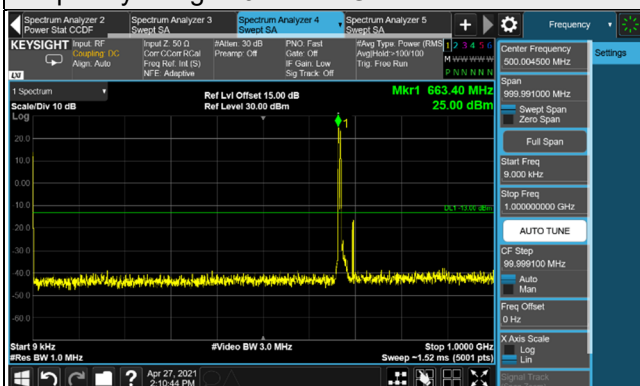


Frequency Range : 1GHz ~ 10GHz

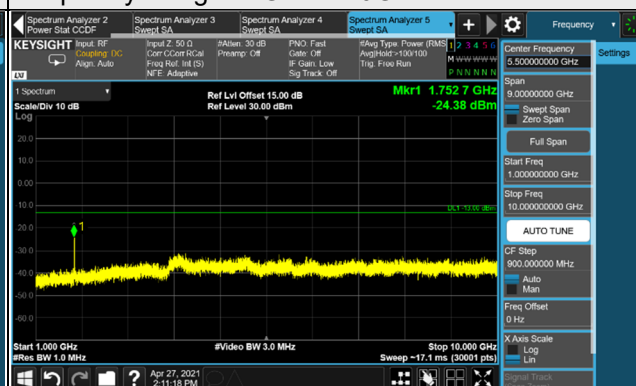


Channel 136100 (680.5MHz)

Frequency Range : 9kHz ~ 1GHz

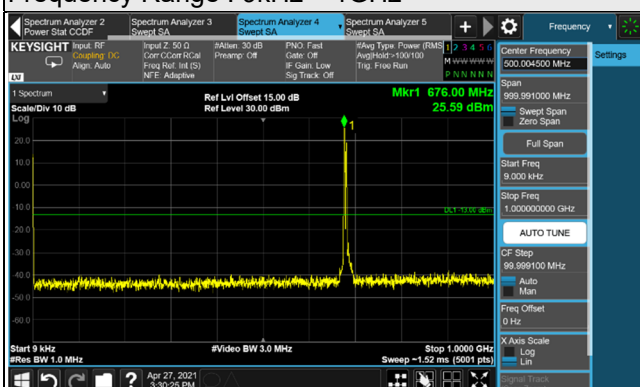


Frequency Range : 1GHz ~ 10GHz

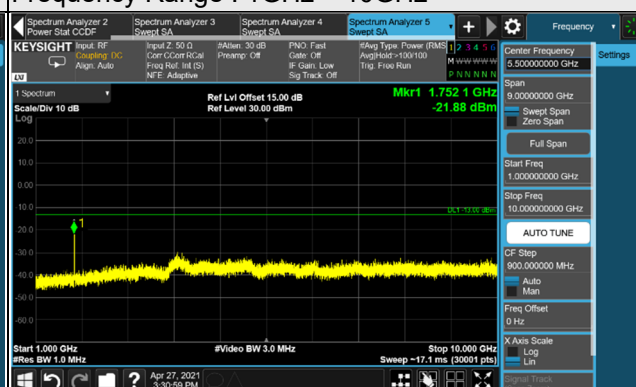


Channel 138600 (693.0MHz)

Frequency Range : 9kHz ~ 1GHz

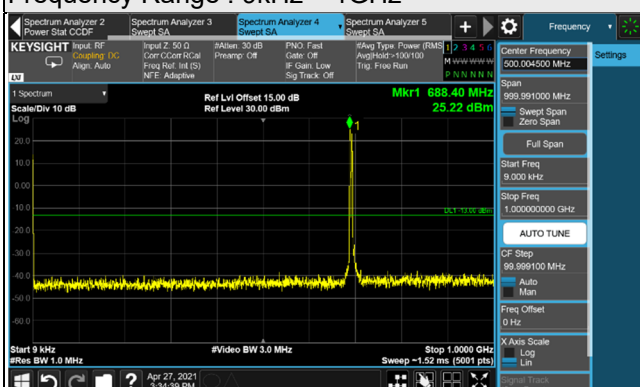

Frequency Range : 1GHz ~ 10GHz

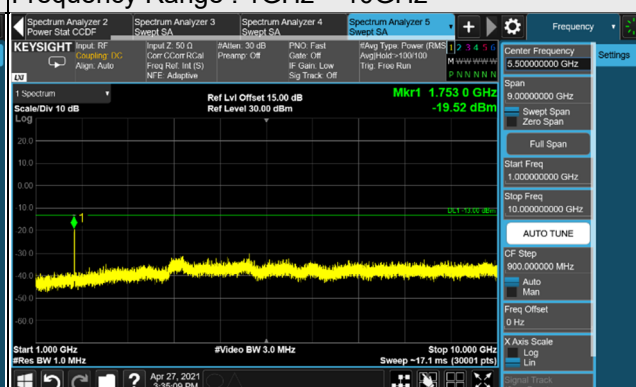


*The 9kHz signal over the limit is from Spectrum.


n71, Channel Bandwidth 15MHz

Channel 134100 (670.5MHz)

Frequency Range : 9kHz ~ 1GHz

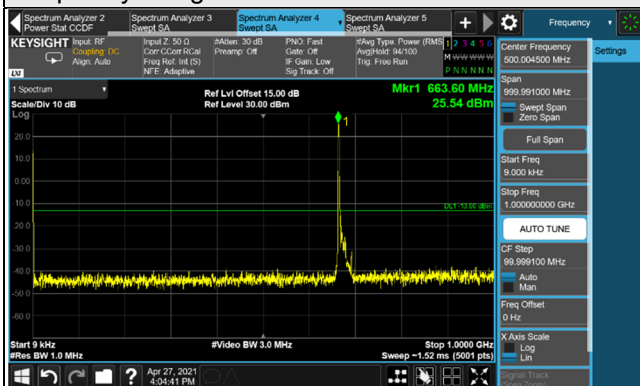


Frequency Range : 1GHz ~ 10GHz

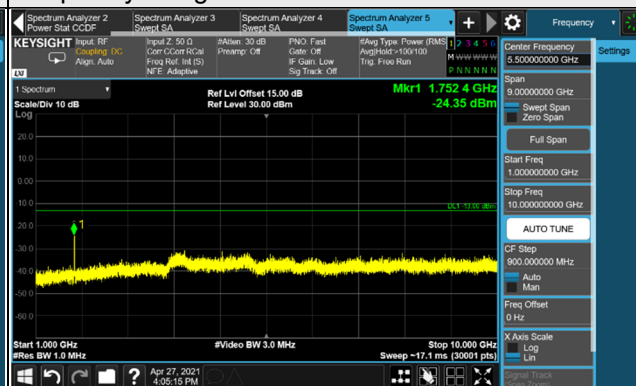


Channel 136100 (680.5MHz)

Frequency Range : 9kHz ~ 1GHz

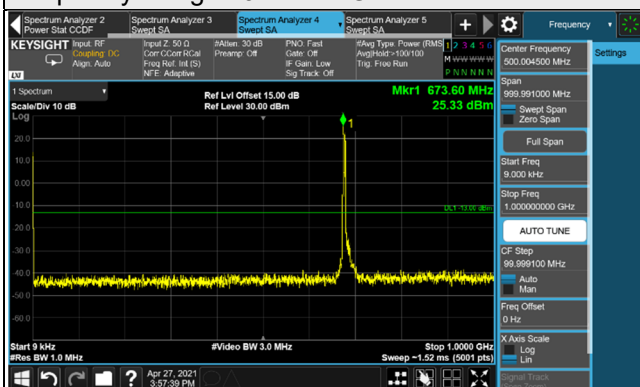


Frequency Range : 1GHz ~ 10GHz

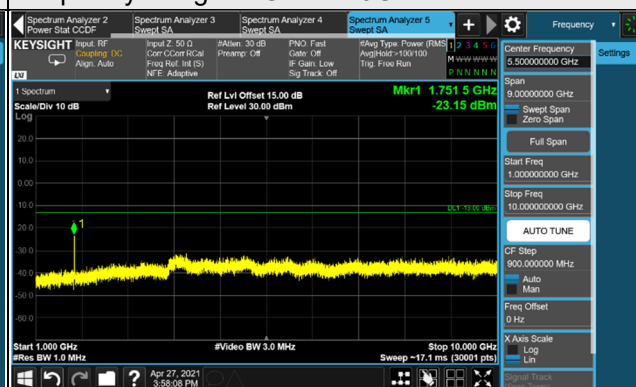


Channel 138100 (690.5MHz)

Frequency Range : 9kHz ~ 1GHz

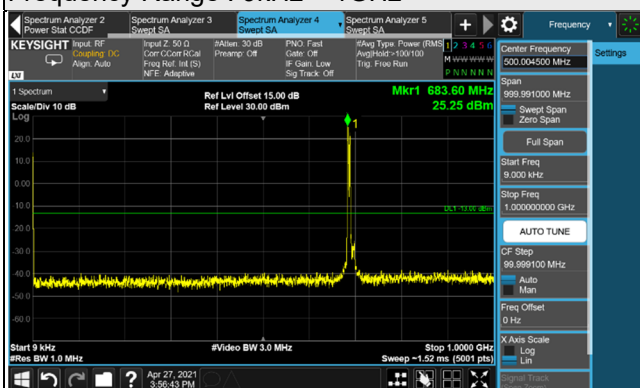

Frequency Range : 1GHz ~ 10GHz

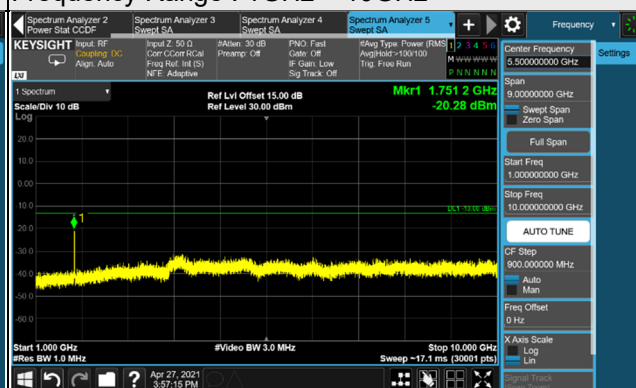


*The 9kHz signal over the limit is from Spectrum.


n71, Channel Bandwidth 20MHz

Channel 134600 (673.0MHz)

Frequency Range : 9kHz ~ 1GHz

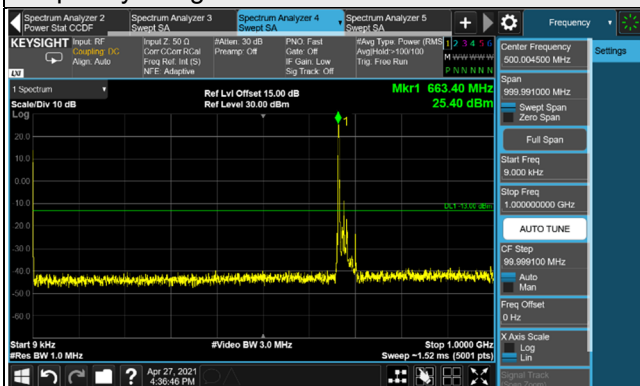


Frequency Range : 1GHz ~ 10GHz

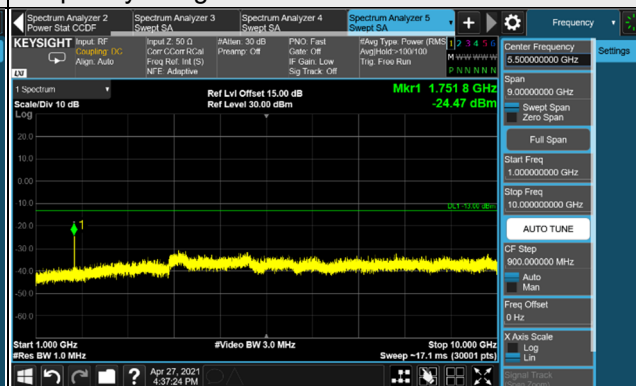


Channel 136100 (680.5MHz)

Frequency Range : 9kHz ~ 1GHz

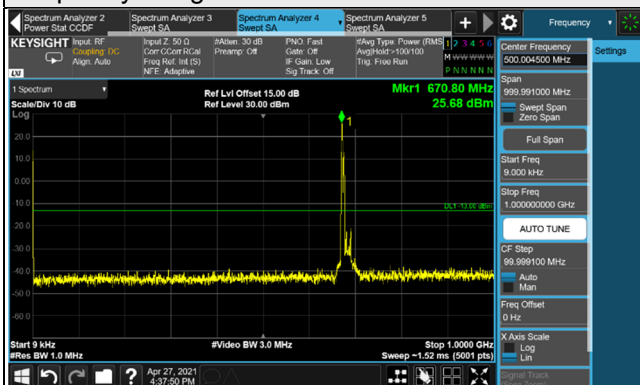


Frequency Range : 1GHz ~ 10GHz

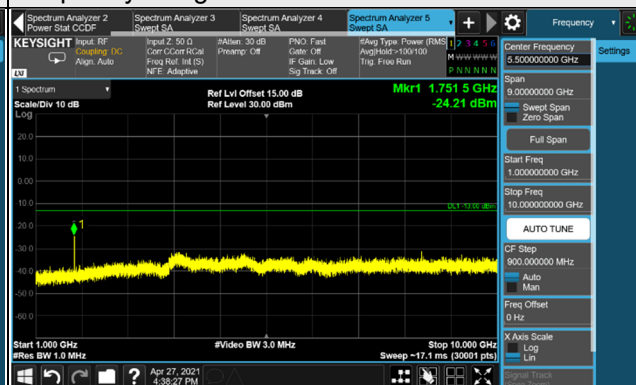


Channel 137600 (688.0MHz)

Frequency Range : 9kHz ~ 1GHz

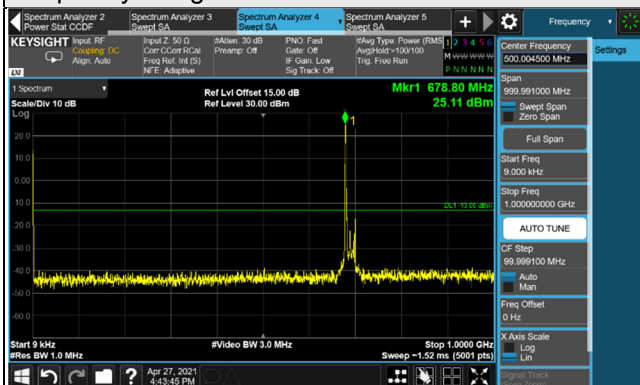

Frequency Range : 1GHz ~ 10GHz

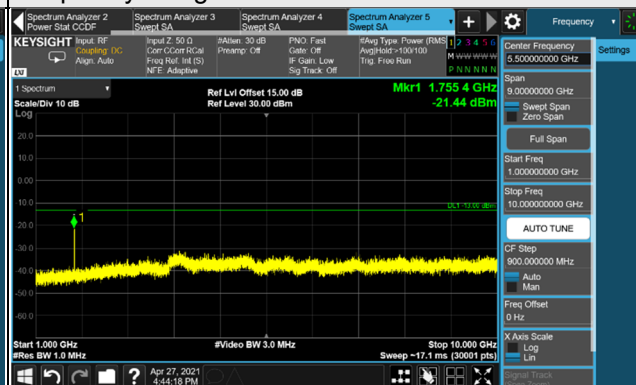

*The 9kHz signal over the limit is from Spectrum.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

For n71:

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

For LTE Band 2:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For LTE Band 66:

According to FCC 27.53(h) for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz, 1915-1920MHz, 1995-2000 MHz, 2000-2020MHz, 2110-2155MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 - $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 - $\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

For radiated emission 30MHz to 1GHz

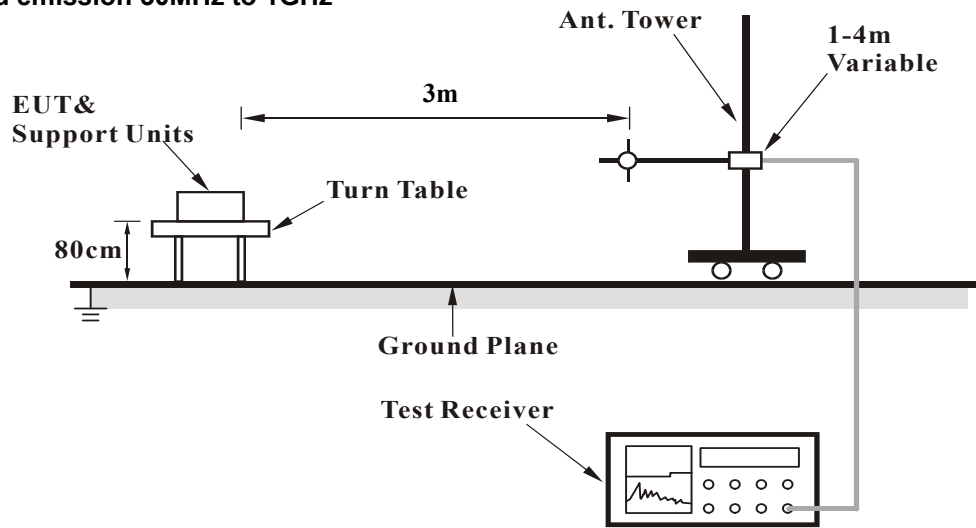

For radiated emission above 1GHz

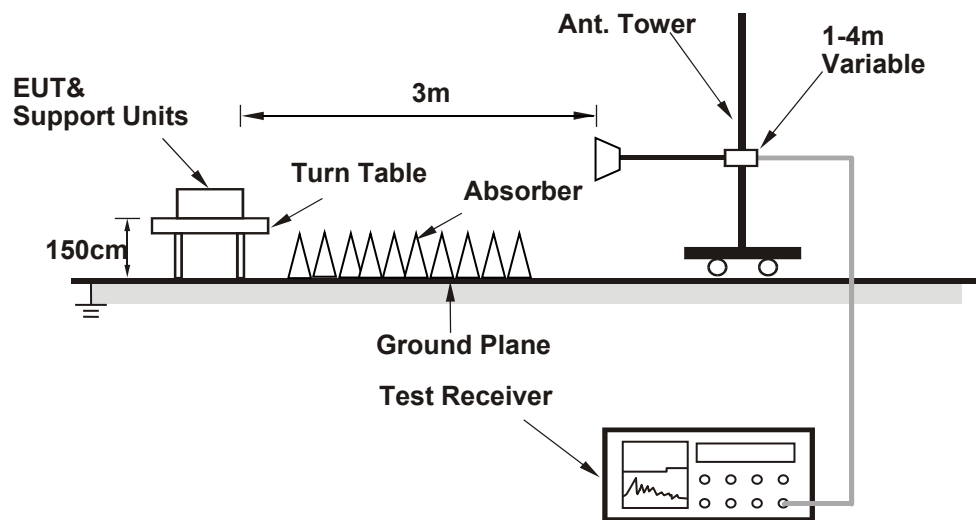

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz


n71, Channel Bandwidth 20MHz

Mode	TX channel 134600 (673.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	-58.15	-13.00	-45.15	1.00 H	165	59.00	-117.15
2	86.23	-59.05	-13.00	-46.05	1.50 H	172	62.90	-121.95
3	222.59	-58.91	-13.00	-45.91	1.00 H	254	60.04	-118.95
4	297.10	-53.52	-13.00	-40.52	1.50 H	175	61.62	-115.14
5	309.75	-54.51	-13.00	-41.51	1.00 H	159	60.26	-114.77
6	761.01	-56.70	-13.00	-43.70	1.00 H	50	48.66	-105.36

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

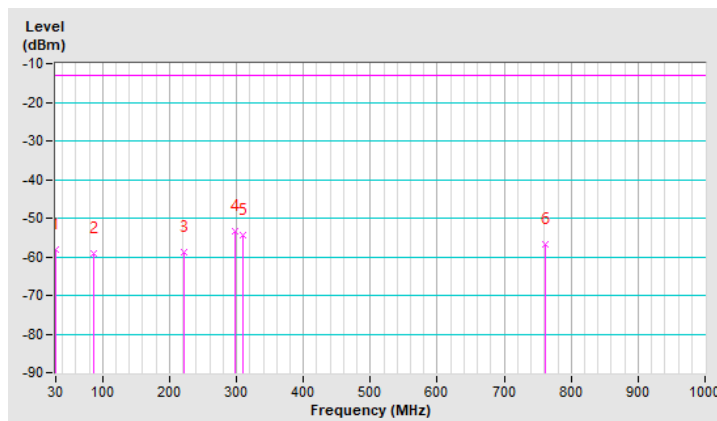


Mode	TX channel 134600 (673.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.41	-44.18	-13.00	-31.18	1.50 V	21	73.09	-117.27
2	66.55	-53.57	-13.00	-40.57	1.00 V	119	64.13	-117.70
3	138.25	-60.79	-13.00	-47.79	1.00 V	190	55.32	-116.11
4	222.59	-63.95	-13.00	-50.95	1.50 V	2	55.00	-118.95
5	309.75	-60.65	-13.00	-47.65	1.00 V	3	54.12	-114.77
6	384.26	-61.88	-13.00	-48.88	2.00 V	1	51.05	-112.93

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

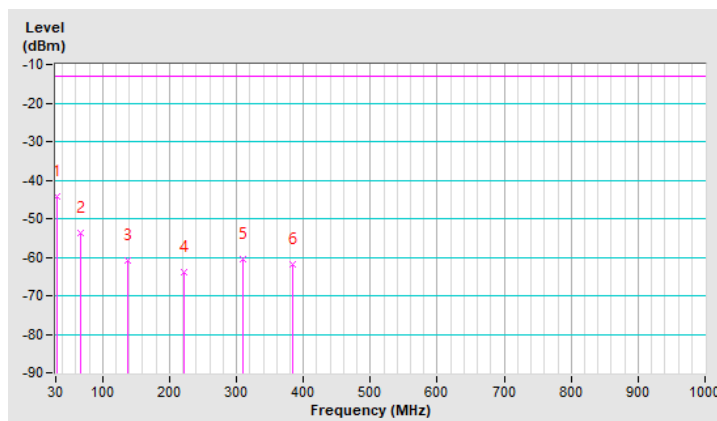


LTE Band 2, Channel Bandwidth 1.4MHz

Mode	TX channel 18607 (1850.7MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.62	-55.09	-13.00	-42.09	2.00 H	158	59.65	-114.74
2	86.23	-48.97	-13.00	-35.97	1.50 H	167	70.83	-119.80
3	135.43	-52.20	-13.00	-39.20	1.50 H	113	62.04	-114.24
4	186.04	-49.36	-13.00	-36.36	2.00 H	262	66.37	-115.73
5	294.29	-48.51	-13.00	-35.51	1.00 H	184	64.57	-113.08
6	312.57	-50.63	-13.00	-37.63	1.50 H	170	61.89	-112.52

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

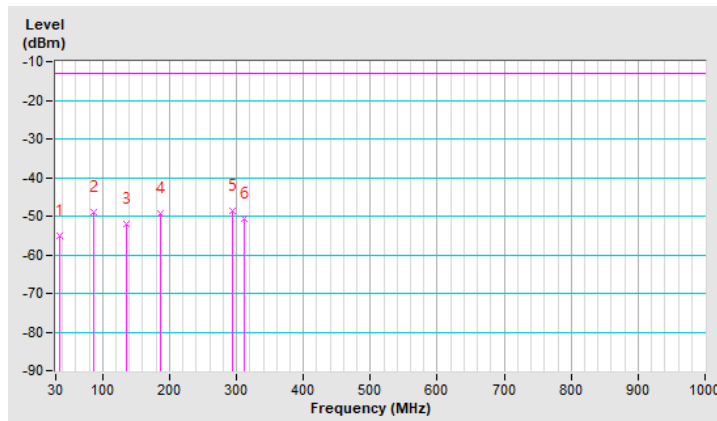


Mode	TX channel 18607 (1850.7MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.03	-42.67	-13.00	-29.67	1.00 V	170	71.79	-114.46
2	49.68	-45.04	-13.00	-32.04	1.50 V	139	68.76	-113.80
3	82.01	-46.90	-13.00	-33.90	1.50 V	294	72.33	-119.23
4	138.25	-50.90	-13.00	-37.90	2.00 V	195	63.07	-113.97
5	167.77	-51.63	-13.00	-38.63	1.50 V	11	62.07	-113.70
6	318.19	-52.10	-13.00	-39.10	1.00 V	215	60.25	-112.35

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

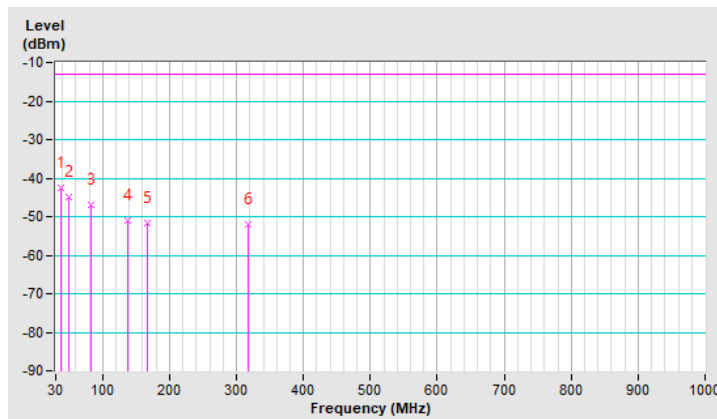


LTE Band 66, Channel Bandwidth 5MHz

Mode	TX channel 132647 (1777.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.41	-55.84	-13.00	-42.84	1.00 H	2	59.28	-115.12
2	84.83	-52.01	-13.00	-39.01	1.99 H	156	67.61	-119.62
3	141.06	-56.89	-13.00	-43.89	1.00 H	302	56.95	-113.84
4	188.86	-56.27	-13.00	-43.27	1.00 H	300	59.84	-116.11
5	294.29	-51.91	-13.00	-38.91	1.00 H	169	61.17	-113.08
6	316.78	-52.42	-13.00	-39.42	1.00 H	159	59.96	-112.38

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

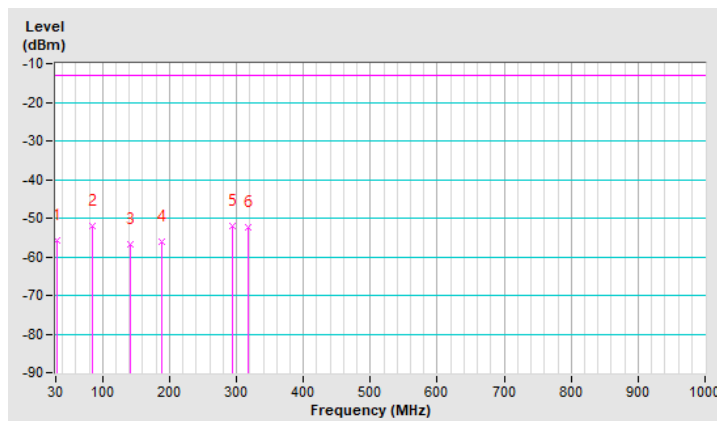


Mode	TX channel 132647 (1777.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 67%RH	Input Power	120Vac, 60Hz
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.62	-39.27	-13.00	-26.27	1.01 V	197	75.47	-114.74
2	49.68	-43.23	-13.00	-30.23	1.01 V	105	70.57	-113.80
3	84.83	-46.50	-13.00	-33.50	1.51 V	120	73.12	-119.62
4	143.87	-48.56	-13.00	-35.56	1.01 V	203	65.06	-113.62
5	167.77	-51.36	-13.00	-38.36	1.01 V	2	62.34	-113.70
6	321.00	-52.20	-13.00	-39.20	1.51 V	245	60.06	-112.26

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

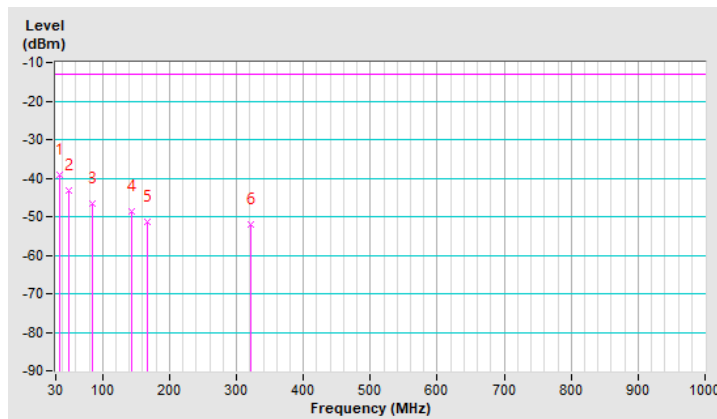

Above 1GHz

n71, Channel Bandwidth 5MHz

Mode	TX channel 133100 (665.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1331.00	-59.84	-13.00	-46.84	1.69 H	5	44.80	-104.64
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1331.00	-60.14	-13.00	-47.14	1.88 V	322	44.50	-104.64

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 136100 (680.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1361.00	-59.90	-13.00	-46.90	1.75 H	5	44.70	-104.60
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1361.00	-60.30	-13.00	-47.30	1.79 V	326	44.30	-104.60

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 139100 (695.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-59.56	-13.00	-46.56	1.58 H	8	45.00	-104.56
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-60.06	-13.00	-47.06	1.82 V	325	44.50	-104.56

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

n71, Channel Bandwidth 20MHz

Mode	TX channel 134600 (673.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-59.53	-13.00	-46.53	1.75 H	12	45.10	-104.63
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-60.13	-13.00	-47.13	1.89 V	315	44.50	-104.63

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 136100 (680.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-59.80	-13.00	-46.80	1.59 H	8	44.80	-104.60
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-60.30	-13.00	-47.30	1.79 V	319	44.30	-104.60

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 137600 (688.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-59.79	-13.00	-46.79	1.55 H	12	44.80	-104.59
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-60.19	-13.00	-47.19	1.66 V	335	44.40	-104.59

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 2, Channel Bandwidth 1.4MHz

Mode	TX channel 18607 (1850.7MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-51.25	-13.00	-38.25	1.58 H	58	44.90	-96.15
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-53.95	-13.00	-40.95	1.18 V	75	42.20	-96.15

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 18900 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-53.57	-13.00	-40.57	1.88 H	92	42.30	-95.87
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-54.97	-13.00	-41.97	1.65 V	75	40.90	-95.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 19193 (1909.3MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-55.47	-13.00	-42.47	1.69 H	82	40.20	-95.67
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-56.17	-13.00	-43.17	1.88 V	256	39.50	-95.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2, Channel Bandwidth 5MHz

Mode	TX channel 18625 (1852.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-51.43	-13.00	-38.43	1.16 H	58	44.70	-96.13
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-52.93	-13.00	-39.93	1.32 V	308	43.20	-96.13

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 18900 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-53.67	-13.00	-40.67	1.38 H	66	42.20	-95.87
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-54.67	-13.00	-41.67	1.58 V	295	41.20	-95.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 19175 (1907.5MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-54.88	-13.00	-41.88	1.25 H	28	40.80	-95.68
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-55.48	-13.00	-42.48	1.25 V	28	40.20	-95.68

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2, Channel Bandwidth 20MHz

Mode	TX channel 18700 (1860.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-55.87	-13.00	-42.87	1.19 H	41	40.20	-96.07
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-56.87	-13.00	-43.87	1.68 V	205	39.20	-96.07

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 18900 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-55.57	-13.00	-42.57	1.18 H	65	40.30	-95.87
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-56.67	-13.00	-43.67	1.59 V	202	39.20	-95.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 19100 (1900.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-55.18	-13.00	-42.18	1.28 H	35	40.50	-95.68
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-56.38	-13.00	-43.38	1.59 V	211	39.30	-95.68

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 66, Channel Bandwidth 1.4MHz

Mode	TX channel 131979 (1710.7MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-50.67	-13.00	-37.67	1.55 H	52	46.50	-97.17
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-51.47	-13.00	-38.47	2.58 V	146	45.70	-97.17

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-50.41	-13.00	-37.41	1.35 H	55	46.50	-96.91
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-50.81	-13.00	-37.81	2.77 V	159	46.10	-96.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132665 (1779.3MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-50.40	-13.00	-37.40	1.52 H	38	46.30	-96.70
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-51.00	-13.00	-38.00	2.45 V	144	45.70	-96.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 66, Channel Bandwidth 5MHz

Mode	TX channel 131997 (1712.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-49.94	-13.00	-36.94	1.58 H	75	47.20	-97.14
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-50.64	-13.00	-37.64	2.35 V	182	46.50	-97.14

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-50.01	-13.00	-37.01	1.44 H	51	46.90	-96.91
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-50.81	-13.00	-37.81	2.38 V	185	46.10	-96.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132647 (1777.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-49.91	-13.00	-36.91	1.49 H	78	46.80	-96.71
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-50.91	-13.00	-37.91	2.58 V	172	45.80	-96.71

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 66, Channel Bandwidth 20MHz

Mode	TX channel 132072 (1720.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-50.20	-13.00	-37.20	1.58 H	43	46.90	-97.10
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-50.90	-13.00	-37.90	2.53 V	159	46.20	-97.10

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-50.11	-13.00	-37.11	1.56 H	52	46.80	-96.91
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-50.81	-13.00	-37.81	2.69 V	182	46.10	-96.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132572 (1770.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Titan Hsu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-50.30	-13.00	-37.30	1.69 H	35	46.46	-96.76
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3450.00	-51.20	-13.00	-38.20	2.64 V	183	45.86	-97.06

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---