


Channel 78



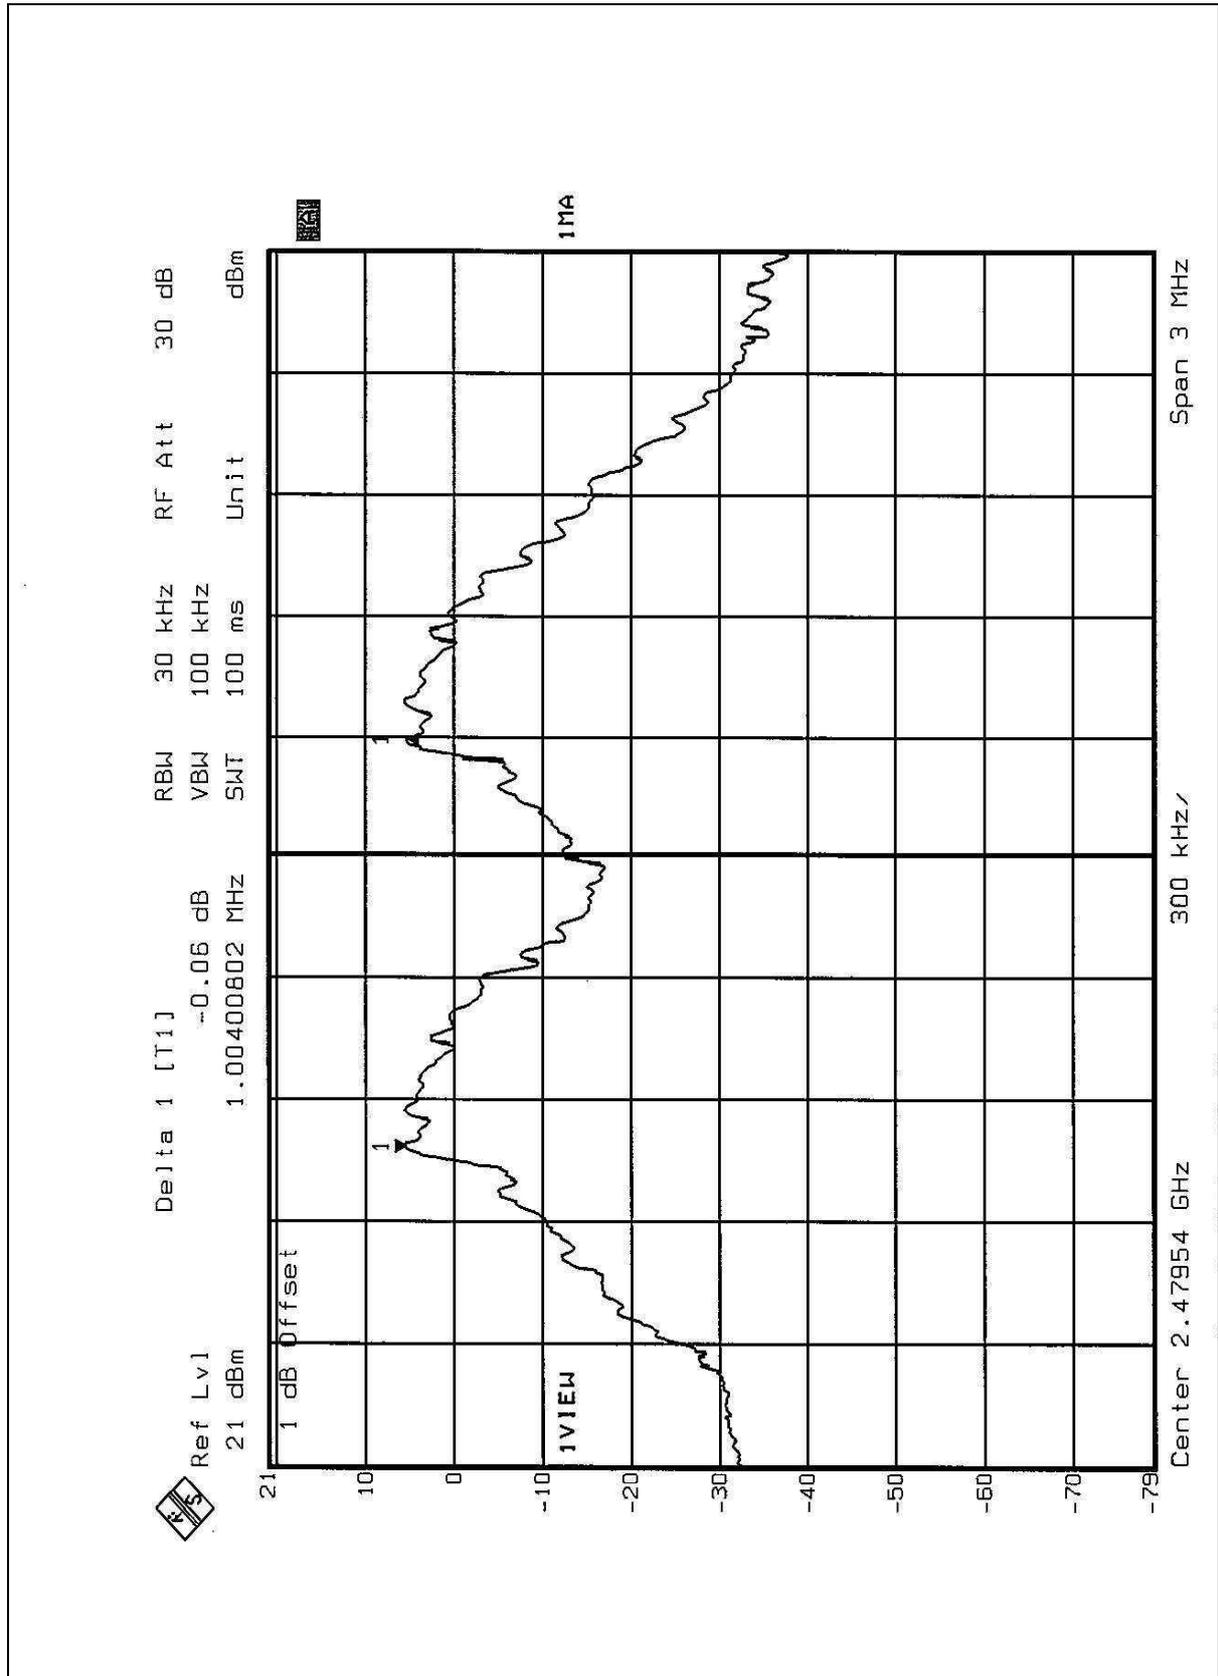

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Limit of Maximum Peak Output Power Measurement is 30dBm.

4.6.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTES:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 2 MHz RBW and 3 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.6.6 TEST RESULTS (A)

Output Power Into Antenna:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	9.50	30	PASS
39	2441	9.45	30	PASS
78	2480	9.10	30	PASS




Channel 0

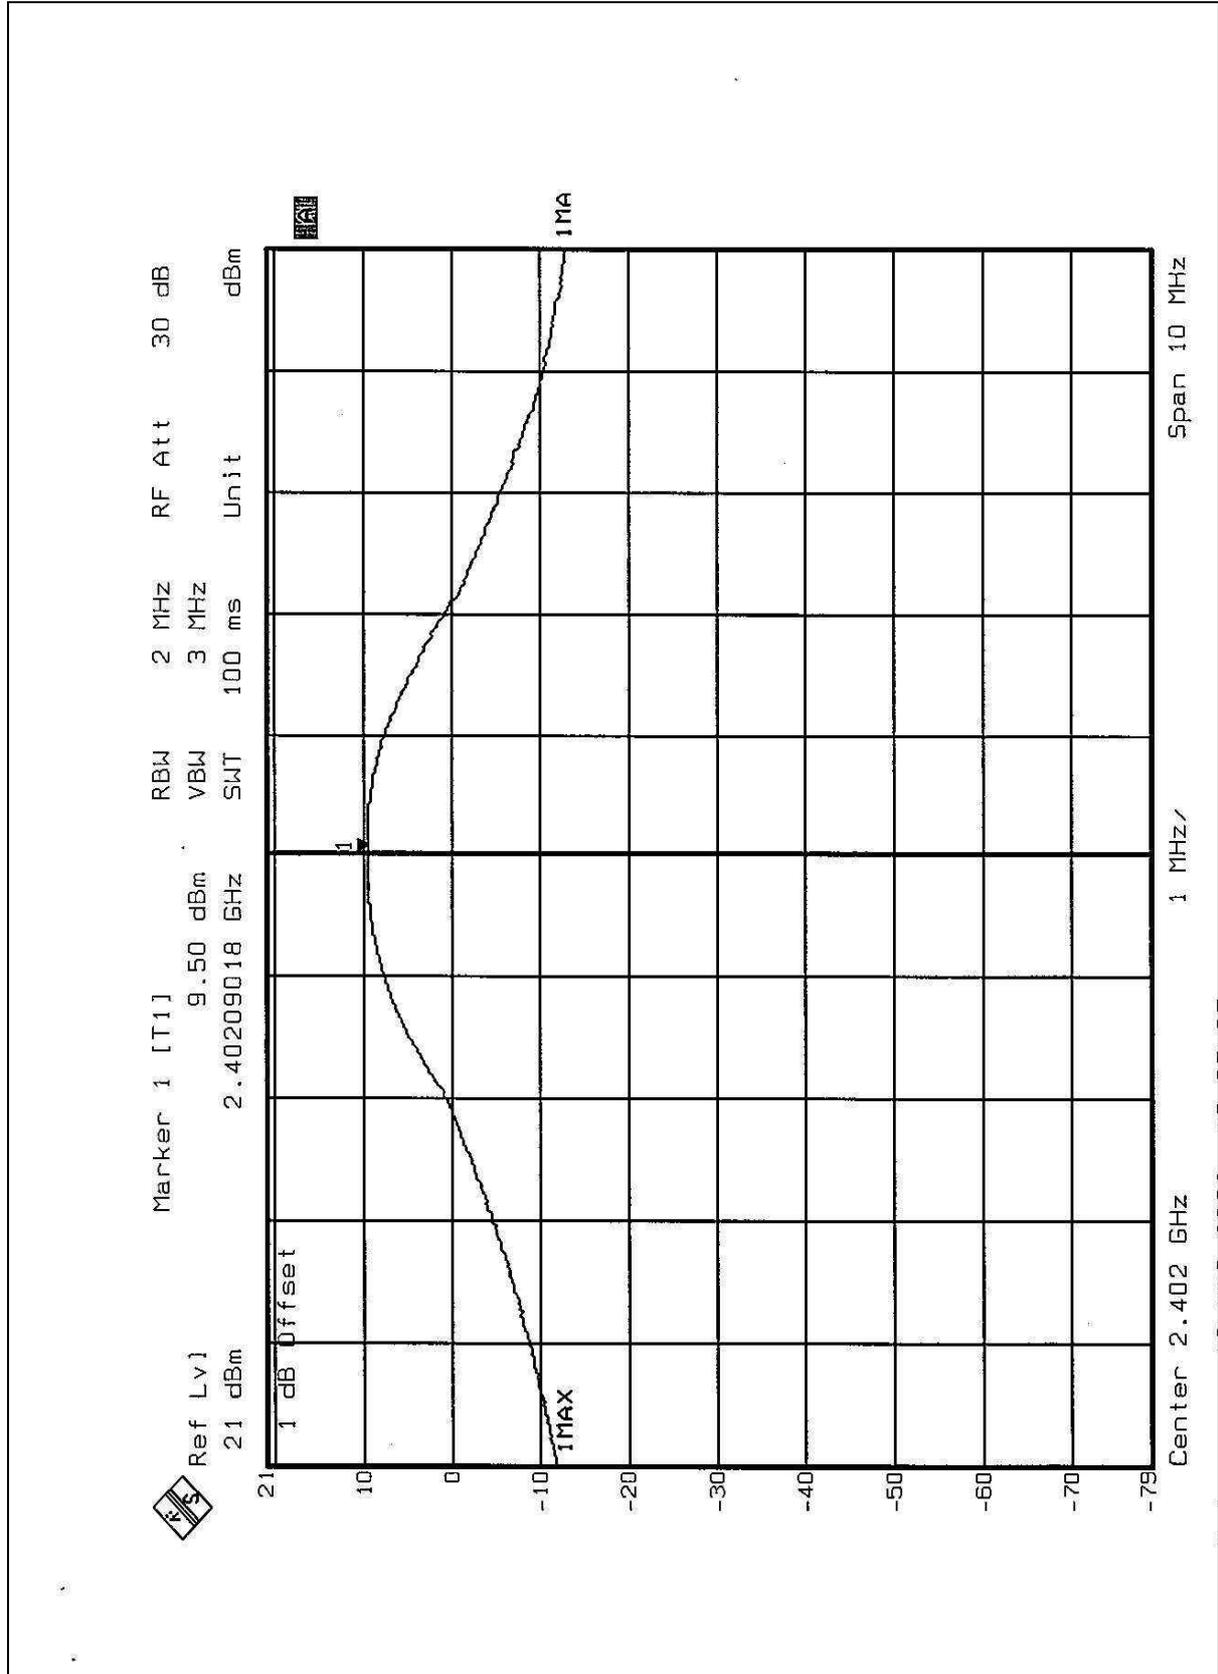

Channel 39

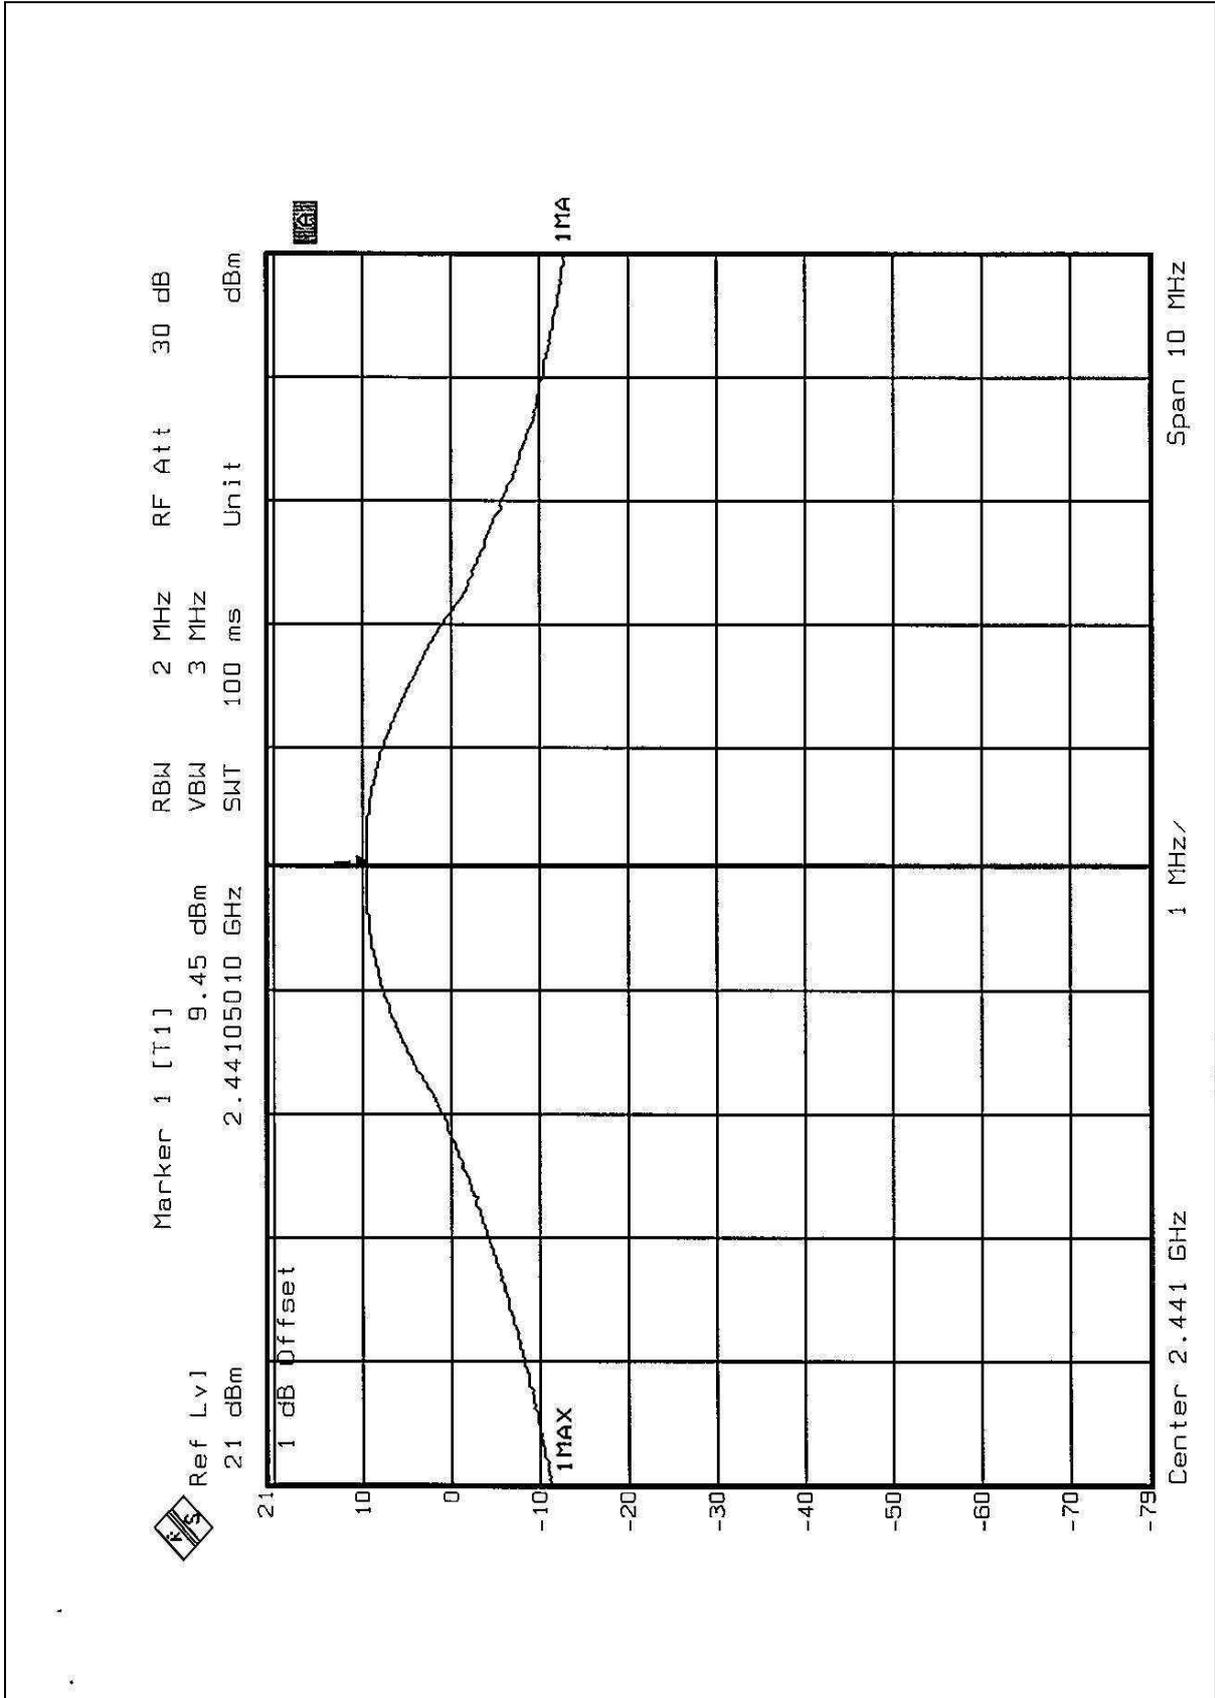

Channel 78

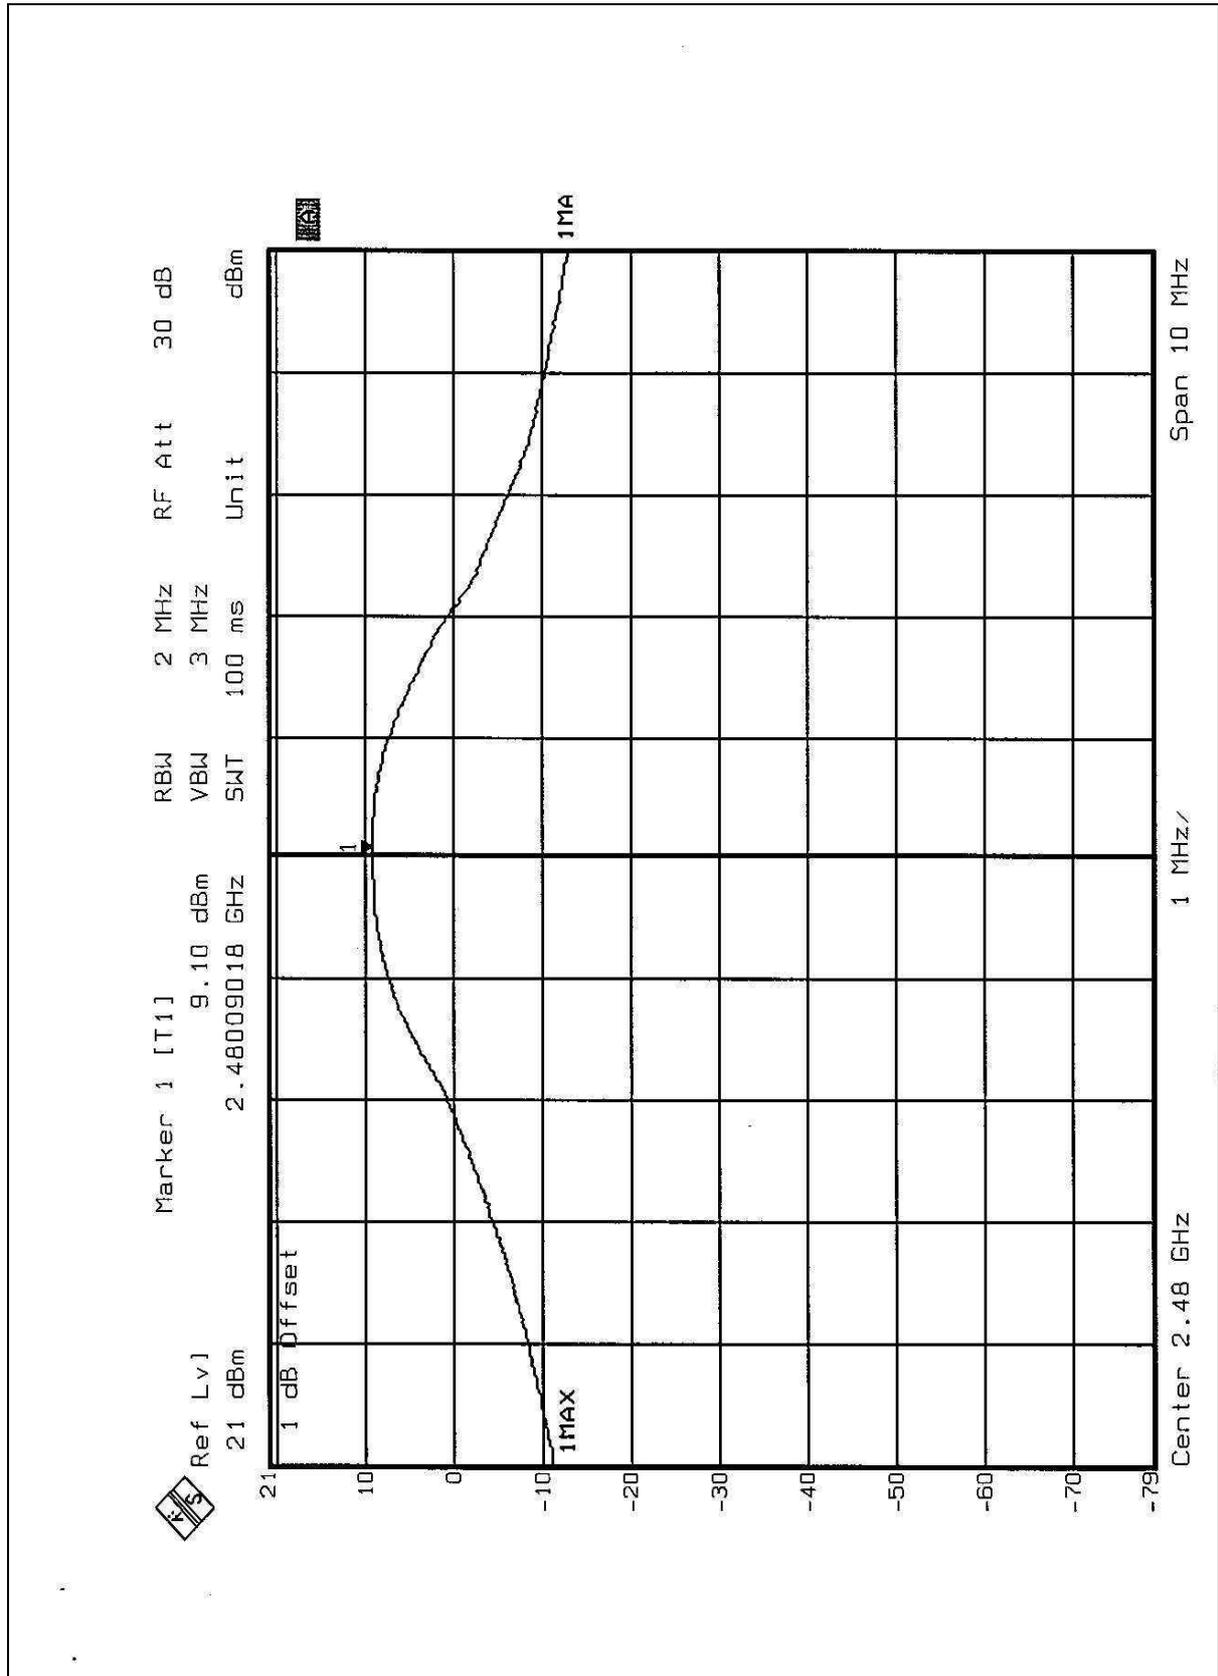


4.6.7 TEST RESULTS (B)


Output Power Into Antenna:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	7.68	30	PASS
39	2441	7.70	30	PASS
78	2480	6.26	30	PASS


Channel 0

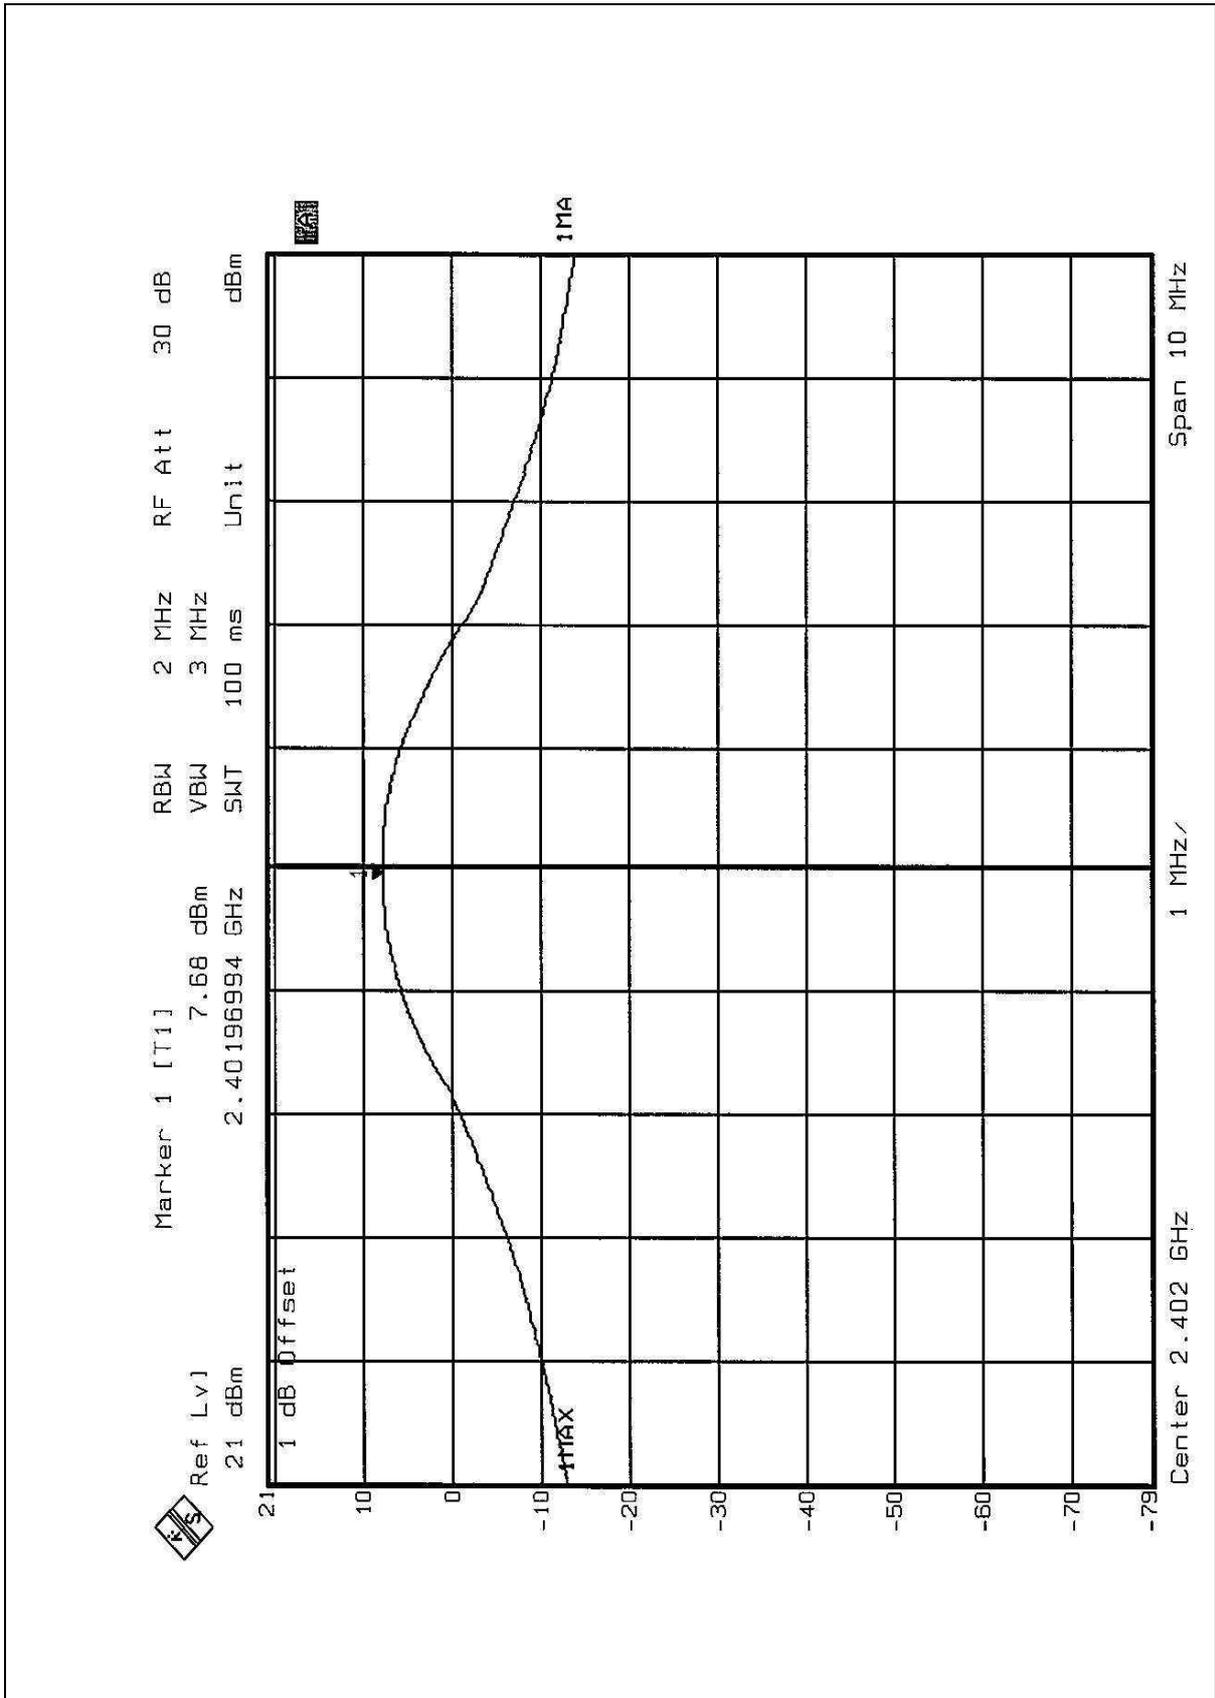

Channel 39

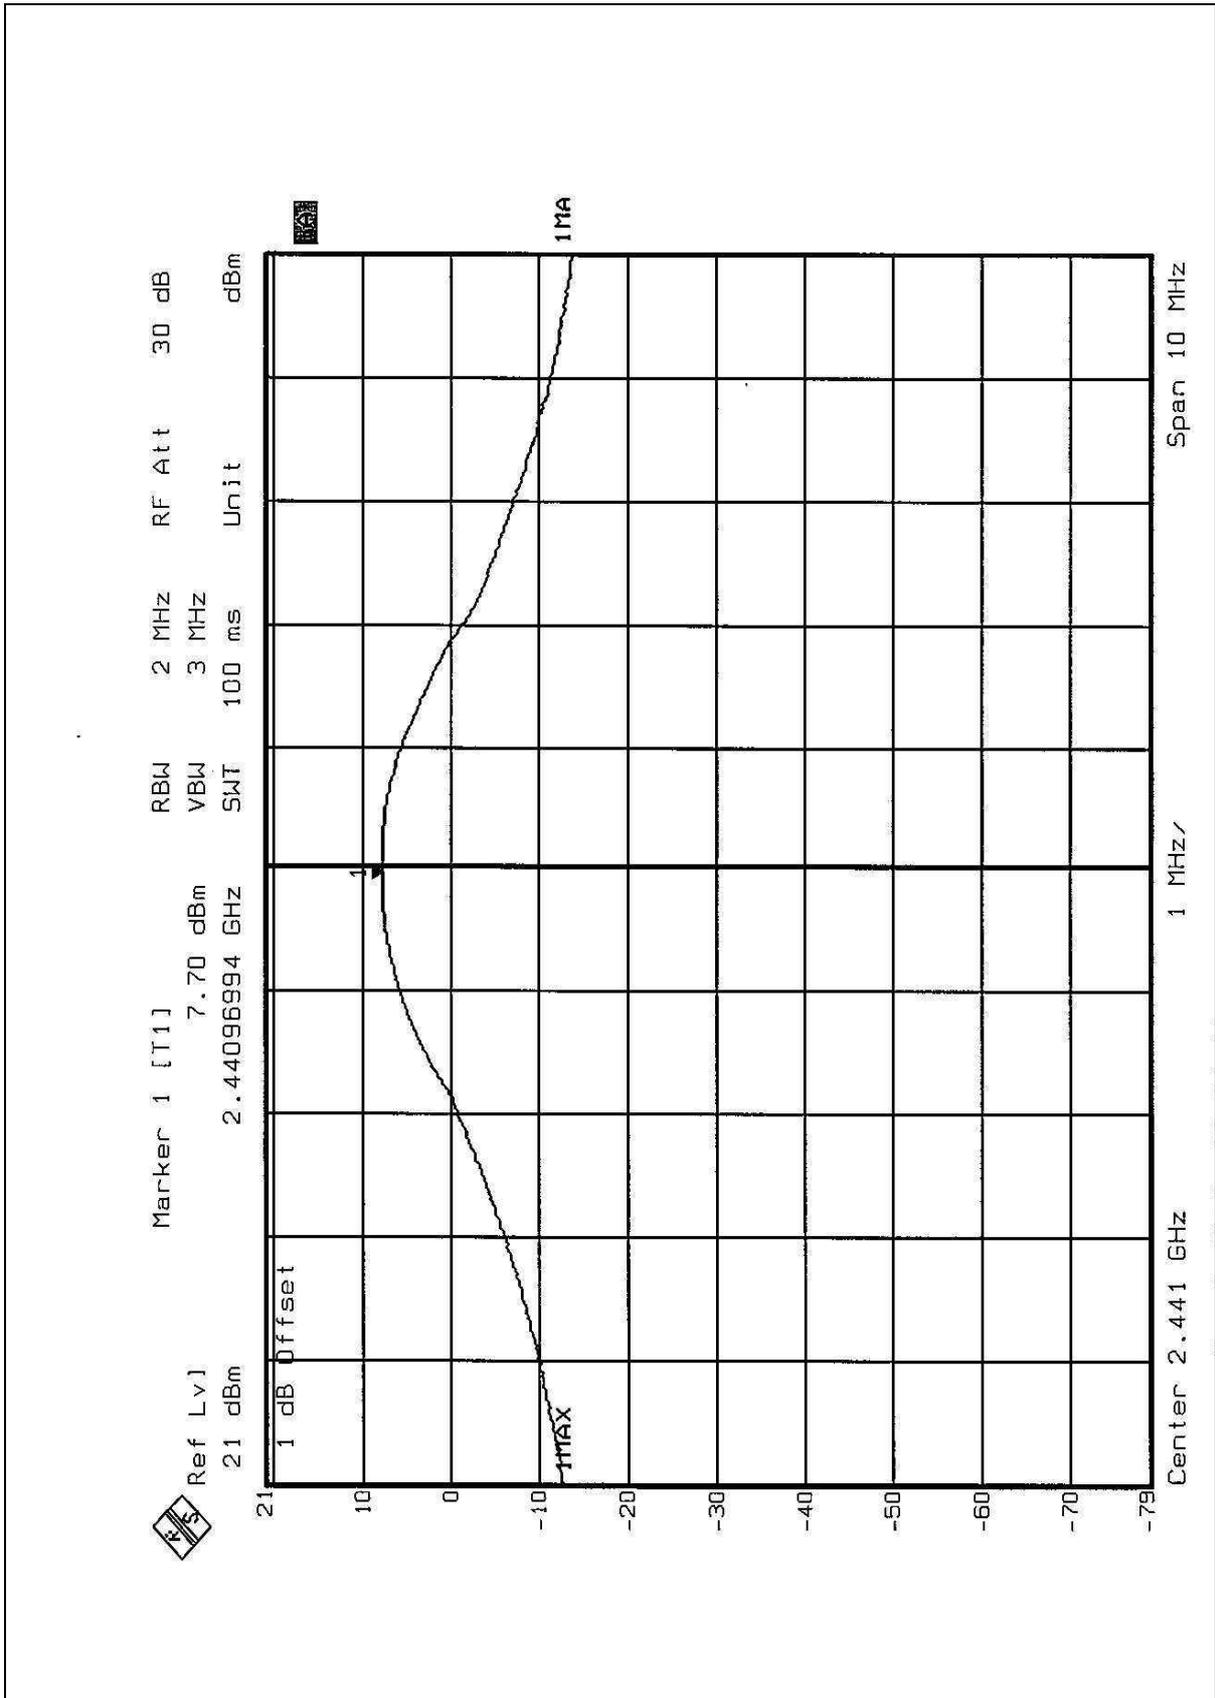

Channel 78

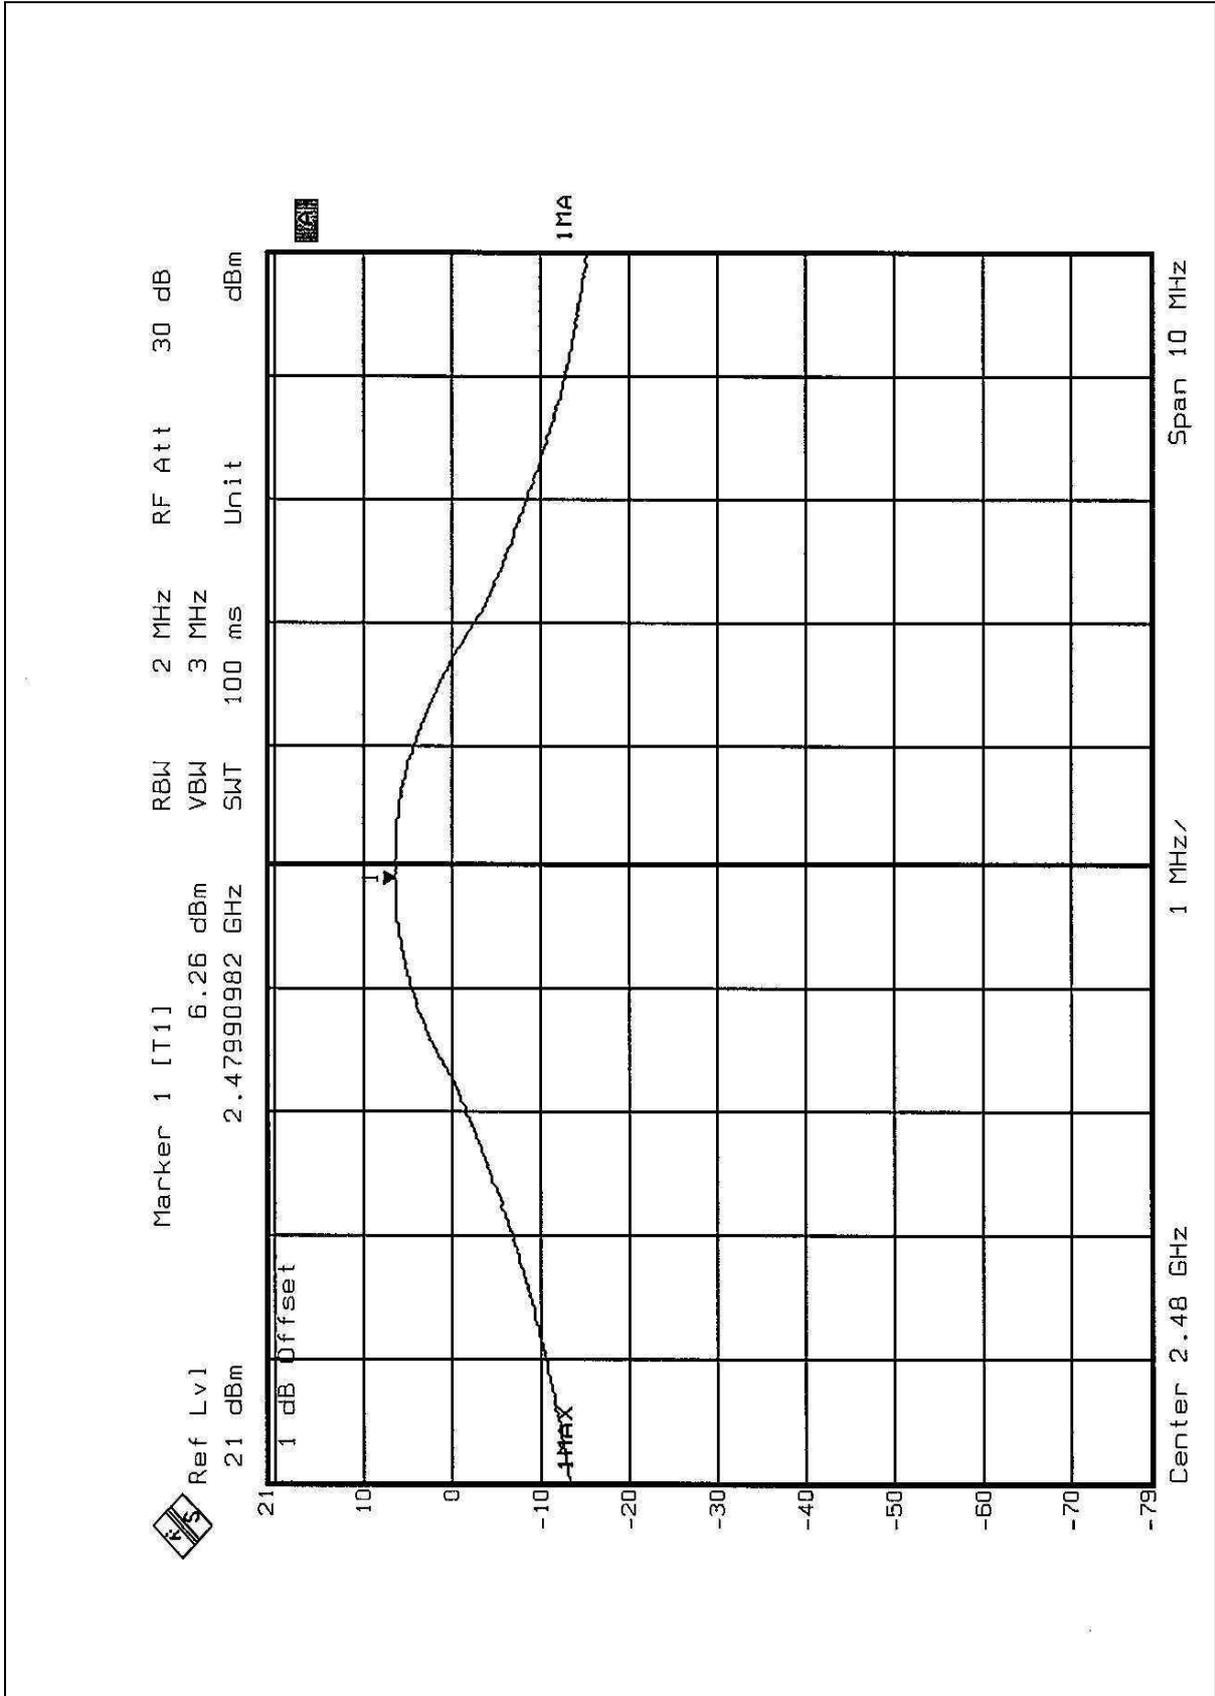

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
* HP Preamplifier	8447D	2944A08485	May 7, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 15, 2002
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI : R-1039		

NOTE:

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. "*" = These equipment are used for the final measurement.


4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 TEST SETUP

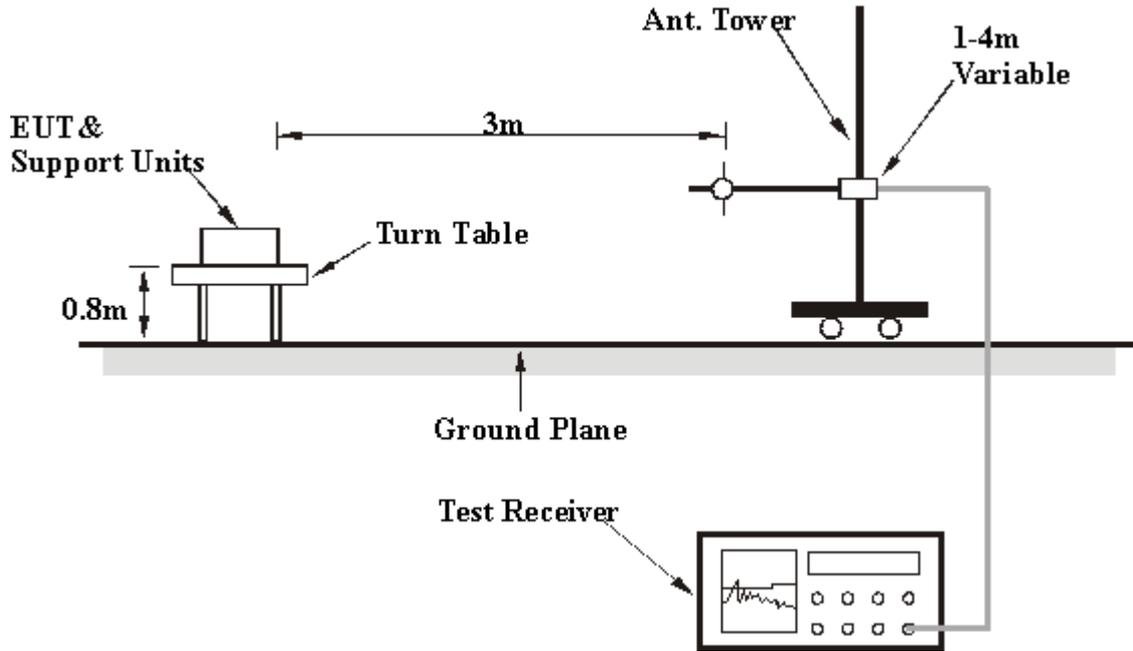

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.5 TEST RESULTS (A)

Digital Portion:

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 78	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	121.00	33.7 QP	43.50	-9.80	1.18H	359	21.00	11.58	1.09	0.00	-12.67
2	137.40	32.1 QP	43.50	-11.40	1.15H	5	20.00	10.95	1.15	0.00	-12.11
3	166.00	31.1 QP	43.50	-12.40	1.03H	325	20.40	9.44	1.29	0.00	-10.73
4	174.00	29.5 QP	43.50	-14.00	1.06H	325	19.00	9.17	1.32	0.00	-10.49
5	202.50	29.5 QP	43.50	-14.00	1.26H	355	19.00	9.11	1.43	0.00	-10.54
6	223.50	32.9 QP	46.00	-13.10	1.13H	191	21.00	10.41	1.54	0.00	-11.94
7	243.00	36.2 QP	46.00	-9.80	1.08H	267	23.00	11.56	1.63	0.00	-13.19
8	324.10	34.0 QP	46.00	-12.00	1.33H	314	18.40	13.67	1.95	0.00	-15.63
9	364.00	34.4 QP	46.00	-11.60	1.03H	47	17.50	14.76	2.10	0.00	-16.86
10	405.70	33.8 QP	46.00	-12.20	1.31H	324	15.40	16.13	2.26	0.00	-18.39
11	445.94	35.2 QP	46.00	-10.80	1.08H	37	16.40	16.35	2.40	0.00	-18.76
12	510.40	35.9 QP	46.00	-10.10	1.67H	25	16.00	17.39	2.54	0.00	-19.94
13	567.00	35.1 QP	46.00	-10.90	1.98H	251	14.20	18.15	2.73	0.00	-20.88
14	594.80	36.6 QP	46.00	-9.40	1.48H	63	15.20	18.54	2.82	0.00	-21.37
15	687.20	36.6 QP	46.00	-9.40	1.00H	178	14.20	19.29	3.12	0.00	-22.42

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 78	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	70.35	25.5 QP	40.00	-14.50	1.05V	355	18.20	6.45	0.82	0.00	-7.27
2	140.00	30.0 QP	43.50	-13.50	1.08V	29	18.00	10.85	1.16	0.00	-12.00
3	169.00	27.6 QP	43.50	-15.90	1.01V	351	17.00	9.35	1.30	0.00	-10.65
4	177.20	30.3 QP	43.50	-13.20	1.05V	334	20.00	8.99	1.34	0.00	-10.33
5	197.00	28.8 QP	43.50	-14.70	1.05V	70	18.40	8.97	1.41	0.00	-10.38
6	220.00	32.6 QP	46.00	-13.40	1.16V	348	21.00	10.12	1.51	0.00	-11.63
7	243.00	35.6 QP	46.00	-10.40	1.07V	96	22.40	11.56	1.63	0.00	-13.19
8	250.00	35.7 QP	46.00	-10.30	1.00V	24	22.00	12.02	1.66	0.00	-13.69
9	324.70	33.7 QP	46.00	-12.30	1.50V	243	18.00	13.72	1.96	0.00	-15.68
10	405.00	35.2 QP	46.00	-10.80	1.08V	357	16.80	16.13	2.26	0.00	-18.39
11	422.00	36.0 QP	46.00	-10.00	1.33V	5	17.50	16.22	2.32	0.00	-18.54
12	455.00	35.9 QP	46.00	-10.10	1.28V	4	17.00	16.45	2.42	0.00	-18.86
13	567.40	40.9 QP	46.00	-5.10	1.02V	358	20.00	18.19	2.74	0.00	-20.93
14	595.00	38.4 QP	46.00	-7.60	1.15V	191	17.00	18.54	2.82	0.00	-21.37
15	741.00	36.3 QP	46.00	-9.70	1.10V	226	13.00	20.02	3.24	0.00	-23.26
16	858.00	36.0 QP	46.00	-10.00	1.17V	80	12.00	20.52	3.51	0.00	-24.05

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
5. The other emission levels were very low against the limit.

4.7.6 TEST RESULTS (B)

Digital Portion:

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 78	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	131.92	17.9 QP	43.50	-25.60	1.20H	217	32.59	11.16	1.13	27.00	14.71
2	197.24	17.9 QP	43.50	-25.60	1.15H	70	34.48	8.97	1.41	27.00	16.63
3	265.00	28.8 QP	46.00	-17.20	1.15H	315	41.33	12.75	1.70	27.00	12.55
4	324.50	26.3 QP	46.00	-19.70	1.30H	181	37.63	13.67	1.95	27.00	11.37
5	531.30	23.7 QP	46.00	-22.30	1.59H	305	30.41	17.69	2.62	27.00	6.70
6	895.00	30.0 QP	46.00	-16.00	1.49H	98	32.69	20.77	3.57	27.00	2.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	131.46	20.8 QP	43.50	-22.70	1.25V	15	35.48	11.16	1.13	27.00	14.71
2	220.95	15.9 QP	46.00	-30.10	1.34V	3	31.11	10.26	1.52	27.00	15.21
3	249.32	19.8 QP	46.00	-26.20	1.25V	283	33.31	11.85	1.65	27.00	13.50
4	322.50	28.5 QP	46.00	-17.50	1.47V	311	39.84	13.67	1.95	27.00	11.37
5	351.70	22.7 QP	46.00	-23.30	1.30V	203	33.33	14.31	2.05	27.00	10.64
6	567.50	29.7 QP	46.00	-16.30	1.40V	28	35.74	18.19	2.74	27.00	6.09

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

4.7.7 TEST RESULTS (A)

RF Portion :

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 0	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.00	99.6 PK	-	-	1.21H	354	67.40	27.11	5.10	0.00	-32.21
2	*2402.00	85.2 AV	-	-	1.21H	354	53.00	27.11	5.10	0.00	-32.21
3	4804.00	48.0 PK	74.00	-26.00	1.19H	341	44.00	31.43	7.23	34.63	-4.02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.00	100.7 PK	-	-	1.06V	329	68.50	27.11	5.10	0.00	-32.21
2	*2402.00	86.2 AV	-	-	1.06V	329	54.00	27.11	5.10	0.00	-32.21
3	4804.00	47.0 PK	74.00	-27.00	1.11V	306	43.00	31.43	7.23	34.63	-4.02

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 39	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.00	100.9 PK	-	-	1.10H	241	68.50	27.33	5.08	0.00	-32.40
2	*2441.00	87.4 AV	-	-	1.10H	241	55.00	27.33	5.08	0.00	-32.40
3	4882.00	46.1 PK	74.00	-27.90	1.07H	162	42.00	31.47	7.21	34.63	-4.05

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.00	100.5 PK	-	-	1.10V	168	68.10	27.33	5.08	0.00	-32.40
2	*2441.00	86.4 AV	-	-	1.10V	168	54.00	27.33	5.08	0.00	-32.40
3	4882.00	49.1 PK	74.00	-24.90	1.15V	145	45.00	31.47	7.21	34.63	-4.05

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. “ * “ : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 78	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.00	95.0 PK	-	-	1.12H	222	62.40	27.54	5.06	0.00	-32.59
2	*2480.00	81.6 AV	-	-	1.12H	222	49.00	27.54	5.06	0.00	-32.59
3	2486.00	45.9 PK	74.00	-28.10	1.09H	210	48.20	27.54	5.06	34.90	2.31
4	4960.00	49.4 PK	74.00	-24.60	1.06H	197	45.20	31.55	7.26	34.61	-4.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.00	97.8 PK	-	-	1.02V	176	65.20	27.54	5.06	0.00	-32.59
2	*2480.00	83.6 AV	-	-	1.02V	176	51.00	27.54	5.06	0.00	-32.59
3	2485.00	46.7 PK	74.00	-27.30	1.05V	208	49.00	27.54	5.06	34.90	2.31
4	4960.00	50.7 PK	74.00	-23.30	1.00V	181	46.50	31.55	7.26	34.61	-4.21

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

4.7.8 TEST RESULTS (B)

RF Portion :

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 0	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.00	101.6 PK	-	-	1.81H	20	69.50	28.31	3.80	0.00	-32.11
2	*2402.00	82.9 AV	-	-	1.81H	243	50.80	28.31	3.80	0.00	-32.11
3	2498.00	47.0 PK	74.00	-27.00	1.49H	2	50.00	28.48	3.90	35.40	3.03
4	4804.00	55.5 PK	74.00	-18.50	1.35H	354	51.50	32.99	5.80	34.77	-4.02
5	4804.00	44.2 AV	54.00	-9.80	1.35H	2	40.20	32.99	5.80	34.77	-4.02
6	7206.00	57.0 PK	74.00	-17.00	1.37H	12	48.30	35.95	7.52	34.74	-8.73
7	7206.00	46.5 AV	54.00	-7.50	1.37H	20	37.80	35.95	7.52	34.74	-8.73
8	9068.00	57.8 PK	74.00	-16.20	1.32H	346	46.30	37.96	8.67	35.15	-11.49
9	9068.00	46.5 AV	54.00	-7.50	1.32H	270	35.00	37.96	8.67	35.15	-11.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.00	99.6 PK	-	-	1.30V	2	67.50	28.31	3.80	0.00	-32.11
2	*2402.00	82.0 AV	-	-	1.30V	19	49.90	28.31	3.80	0.00	-32.11
3	2497.00	45.6 PK	74.00	-28.40	1.30V	15	48.60	28.48	3.90	35.40	3.03
4	4803.00	56.8 PK	74.00	-17.20	1.92V	2	52.90	32.91	5.78	34.79	-3.90
5	4803.00	45.8 AV	54.00	-8.20	1.92V	19	41.90	32.91	5.78	34.79	-3.90
6	7205.00	61.6 PK	74.00	-12.40	1.29V	19	52.90	35.95	7.52	34.74	-8.73
7	7205.00	50.4 AV	54.00	-3.60	1.29V	3	41.70	35.95	7.52	34.74	-8.73
8	9607.00	58.5 PK	74.00	-15.50	1.24V	282	47.30	37.73	8.86	35.43	-11.16
9	9607.00	47.3 AV	54.00	-6.70	1.24V	2	36.10	37.73	8.86	35.43	-11.16

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. “ * “ : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 39	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.00	103.8 PK	-	-	1.17H	7	71.60	28.39	3.85	0.00	-32.24
2	*2441.00	85.5 AV	-	-	1.17H	2	53.30	28.39	3.85	0.00	-32.24
3	4882.00	52.5 PK	74.00	-21.50	1.70H	2	48.40	33.06	5.81	34.75	-4.12
4	4882.00	43.0 AV	54.00	-11.00	1.70H	335	38.90	33.06	5.81	34.75	-4.12
5	7324.00	55.8 PK	74.00	-18.20	1.51H	328	46.80	36.23	7.55	34.77	-9.01
6	7324.00	44.9 AV	54.00	-9.10	1.51H	3	35.90	36.23	7.55	34.77	-9.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.00	99.9 PK	-	-	1.27V	1	67.70	28.39	3.85	0.00	-32.24
2	*2441.00	82.6 AV	-	-	1.27V	3	50.40	28.39	3.85	0.00	-32.24
3	4882.00	58.5 PK	74.00	-15.50	1.47V	11	54.40	33.06	5.81	34.75	-4.12
4	4882.00	47.7 AV	54.00	-6.30	1.47V	299	43.60	33.06	5.81	34.75	-4.12
5	7322.00	57.0 PK	74.00	-17.00	1.27V	343	48.00	36.23	7.55	34.77	-9.01
6	7322.00	49.2 AV	54.00	-4.80	1.27V	338	40.20	36.23	7.55	34.77	-9.01

NOTE:

- Emission level = Raw value - Correction Factor
- Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
- Margin value = Emission level - Limit value
- " * " : Fundamental frequency
- The other emission levels were very low against the limit.

EUT	Notebook PC	MODEL	WF2H
MODE	Channel 78	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.00	99.3 PK	-	-	1.00H	357	66.90	28.48	3.90	0.00	-32.37
2	*2480.00	82.3 AV	-	-	1.00H	3	49.90	28.48	3.90	0.00	-32.37
3	2497.00	54.5 PK	74.00	-19.50	1.49H	358	57.50	28.48	3.90	35.40	3.03
4	2497.00	30.5 AV	54.00	-23.50	1.78H	296	33.50	28.48	3.90	35.40	3.03
5	4960.00	45.7 PK	74.00	-28.30	1.39H	18	41.40	33.21	5.83	34.72	-4.32
6	4960.00	39.9 AV	54.00	-14.10	1.39H	358	35.60	33.21	5.83	34.72	-4.32

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.00	95.2 PK	-	-	1.50V	3	62.80	28.48	3.90	0.00	-32.37
2	*2480.00	80.0 AV	-	-	1.50V	359	47.60	28.48	3.90	0.00	-32.37
3	2498.00	52.4 PK	74.00	-21.60	1.50V	0	55.40	28.48	3.90	35.40	3.03
4	2498.00	30.5 AV	54.00	-23.50	1.50V	353	33.50	28.48	3.90	35.40	3.03
5	4960.00	55.2 PK	74.00	-18.80	1.52V	5	50.90	33.21	5.83	34.72	-4.32
6	4960.00	44.0 AV	54.00	-10.00	1.52V	0	39.70	33.21	5.83	34.72	-4.32
7	7440.00	52.3 PK	74.00	-21.70	1.47V	3	43.00	36.51	7.61	34.79	-9.33

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RB).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

Notes:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.


4.8.4 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.5 TEST RESULTS (A)

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 47.24dB delta between carrier maximum power and local maximum emission in restrict band (2.5119 GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.7 (Page 71) is 83.6dBuV/m, so the maximum field strength in restrict band is $83.6 - 47.24 = 36.36$ dBuV/m which is under 54 dBuV/m limit.

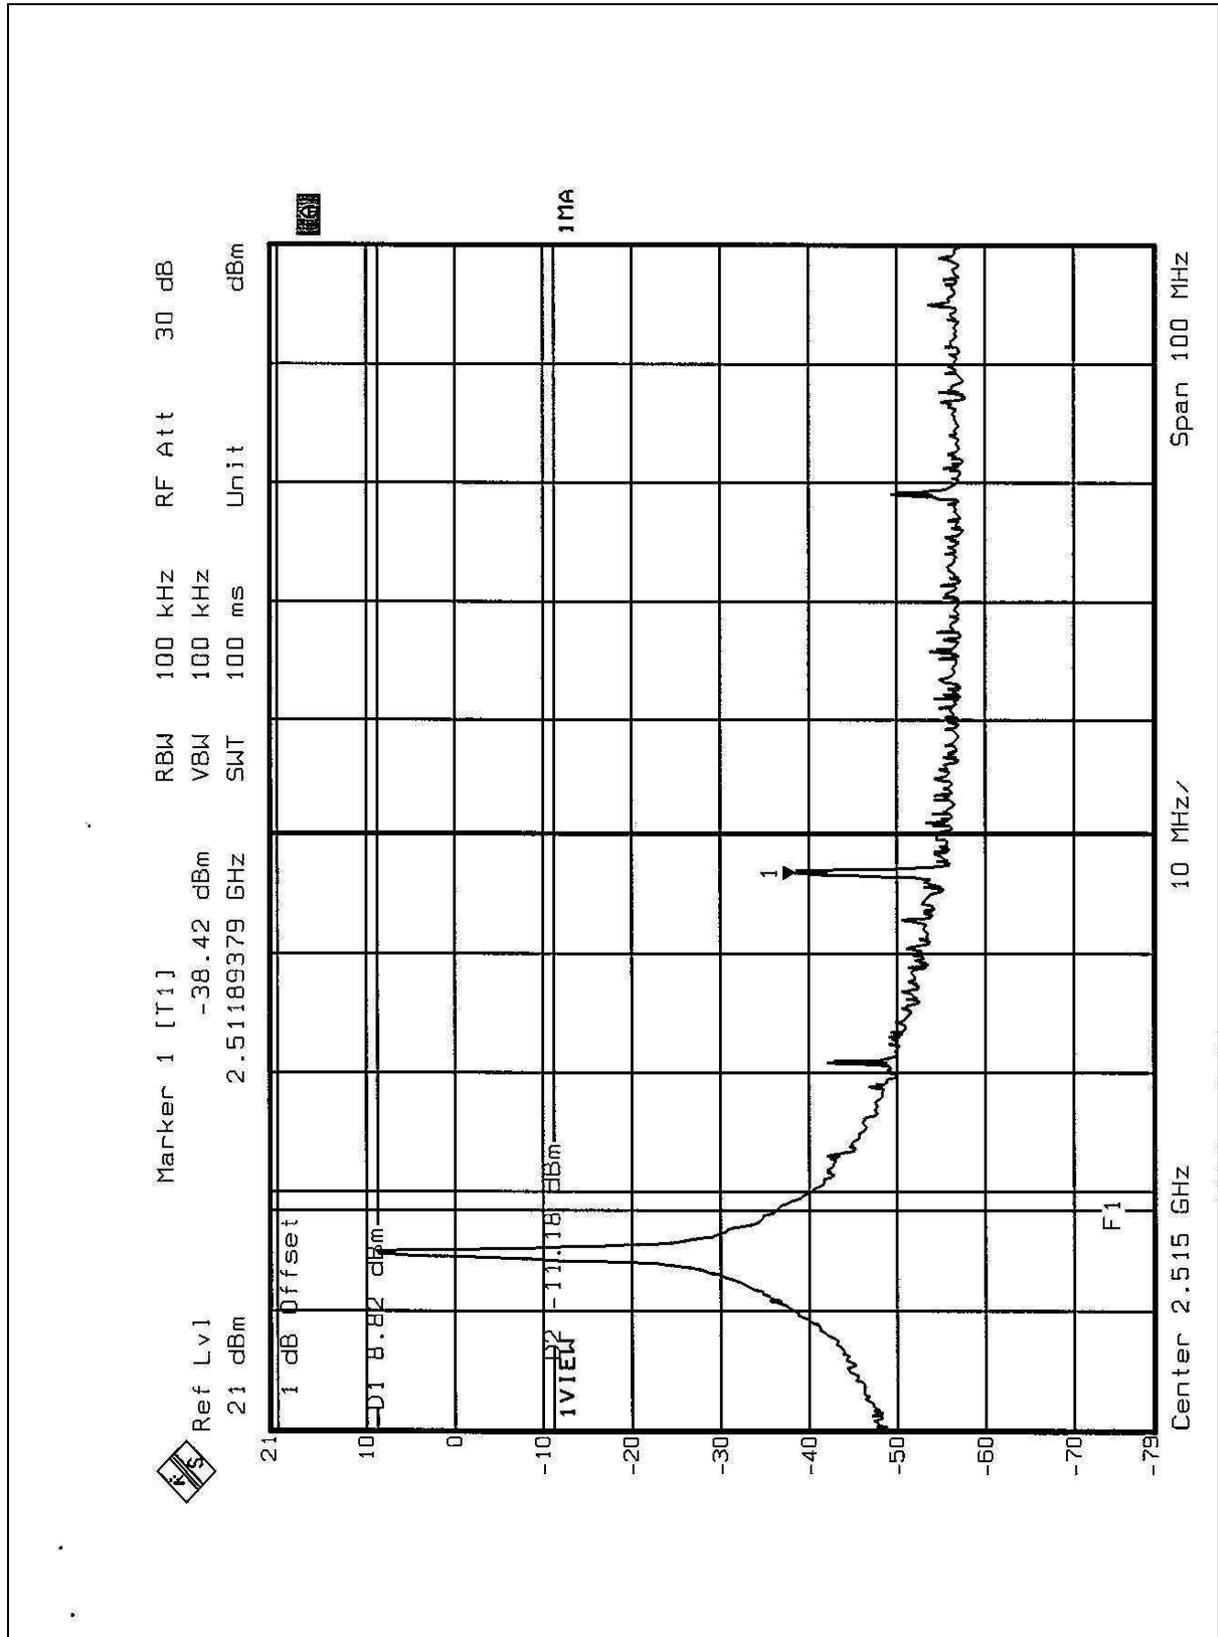


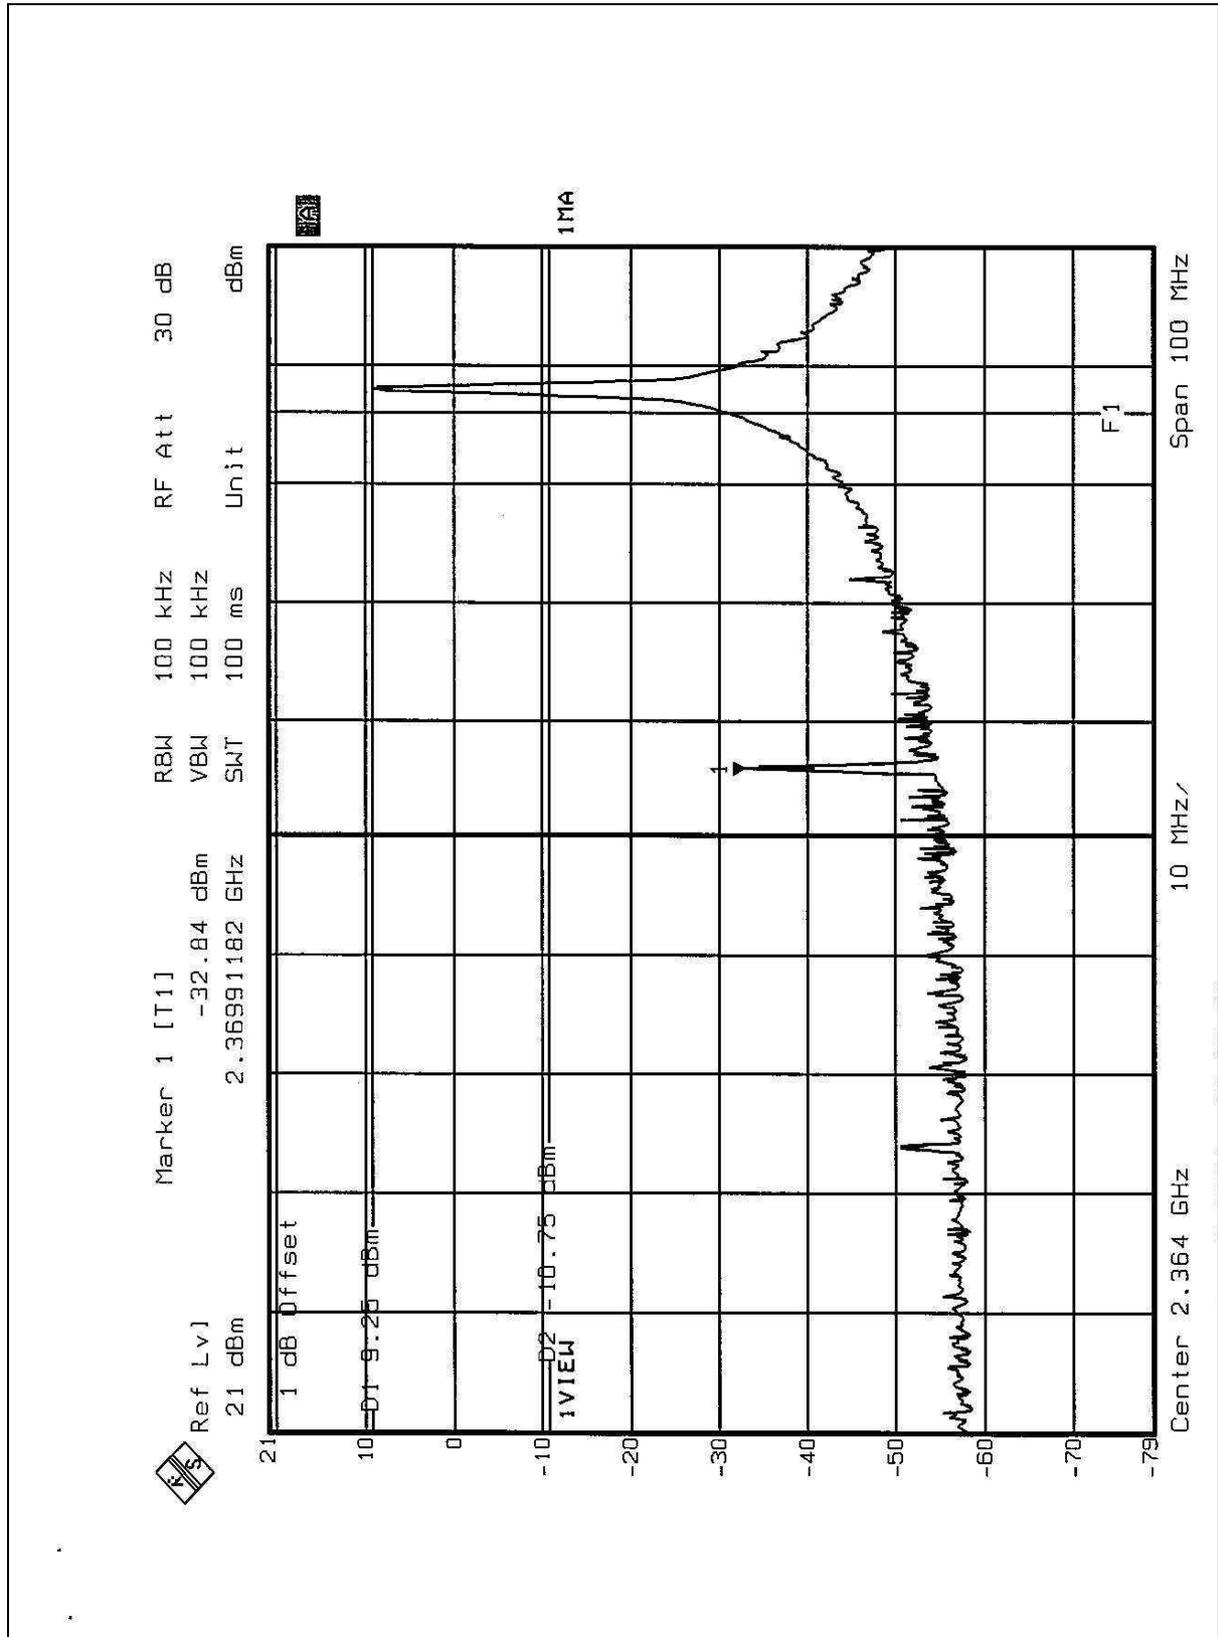


4.8.6 TEST RESULTS (B)

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 47.53dB delta between carrier maximum power and local maximum emission in restrict band (2.5119 GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.8 (Page 74) is 82.3dBuV/m, so the maximum field strength in restrict band is $82.3 - 47.53 = 34.79$ dBuV/m which is under 54 dBuV/m limit.

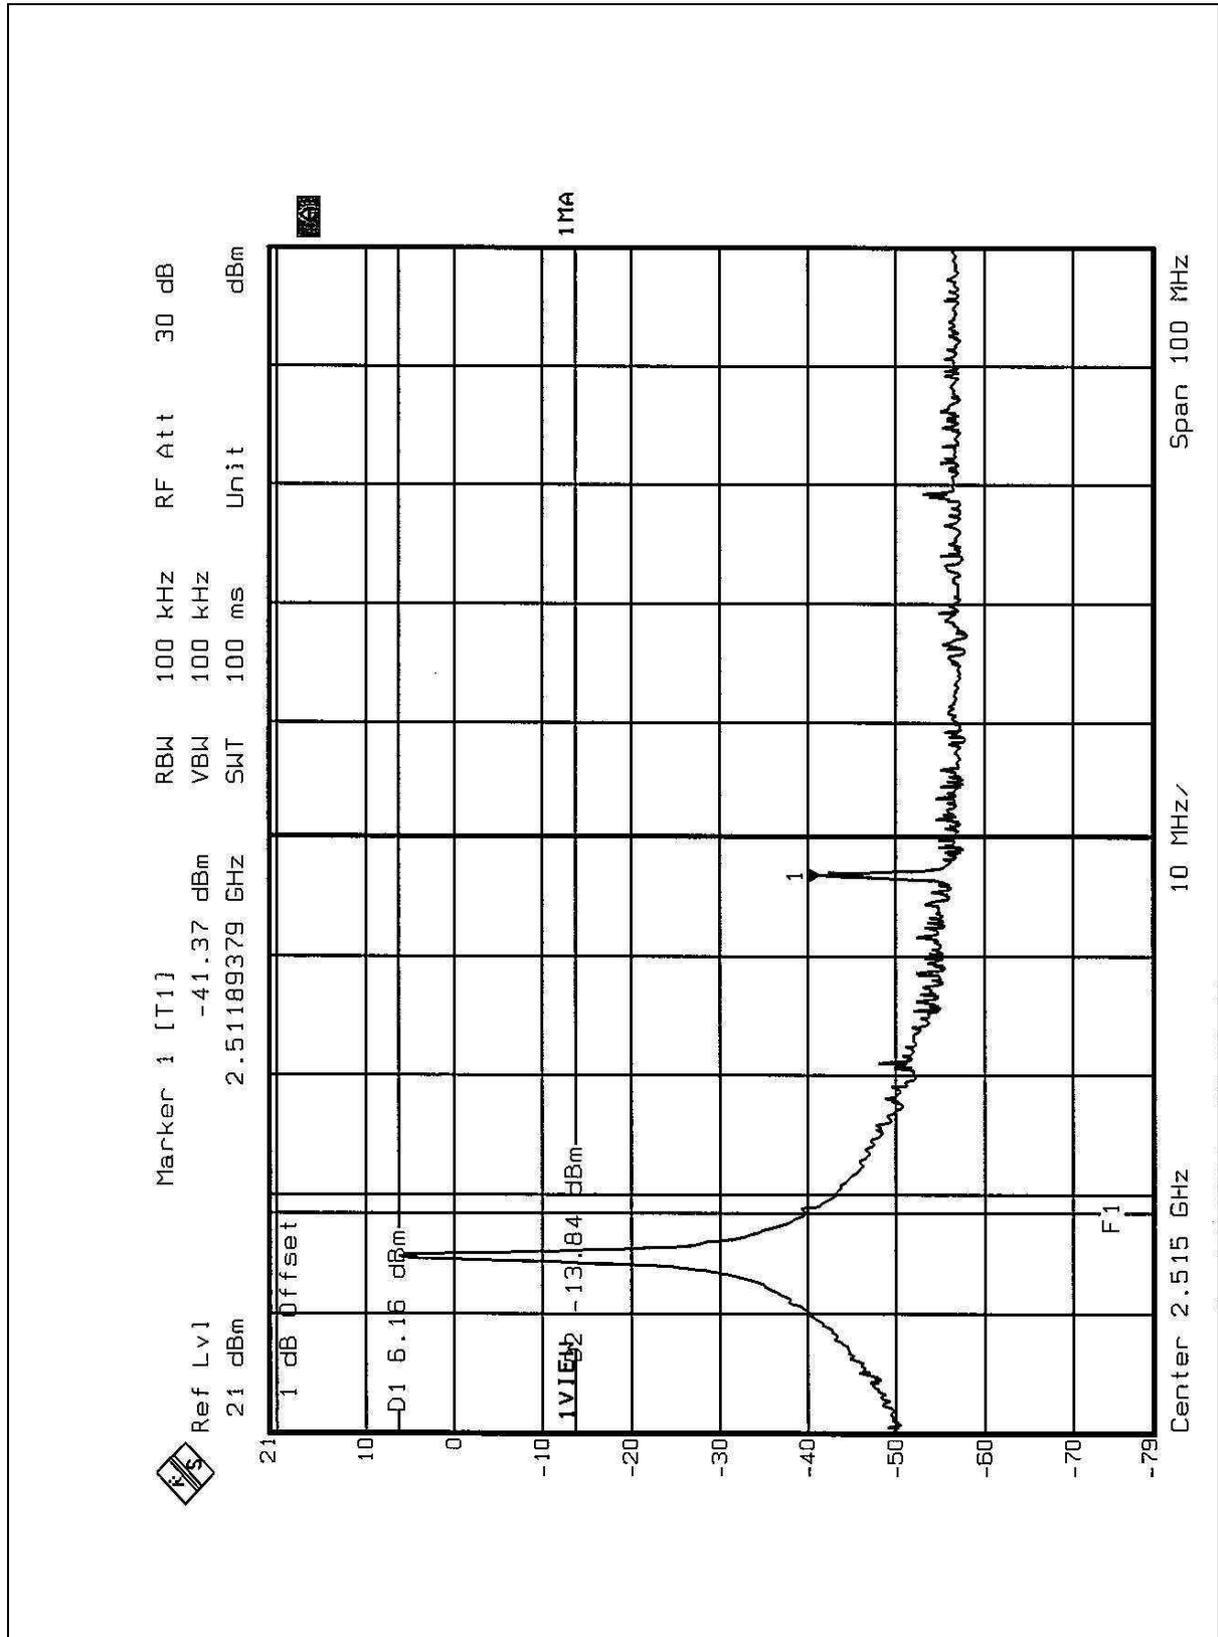

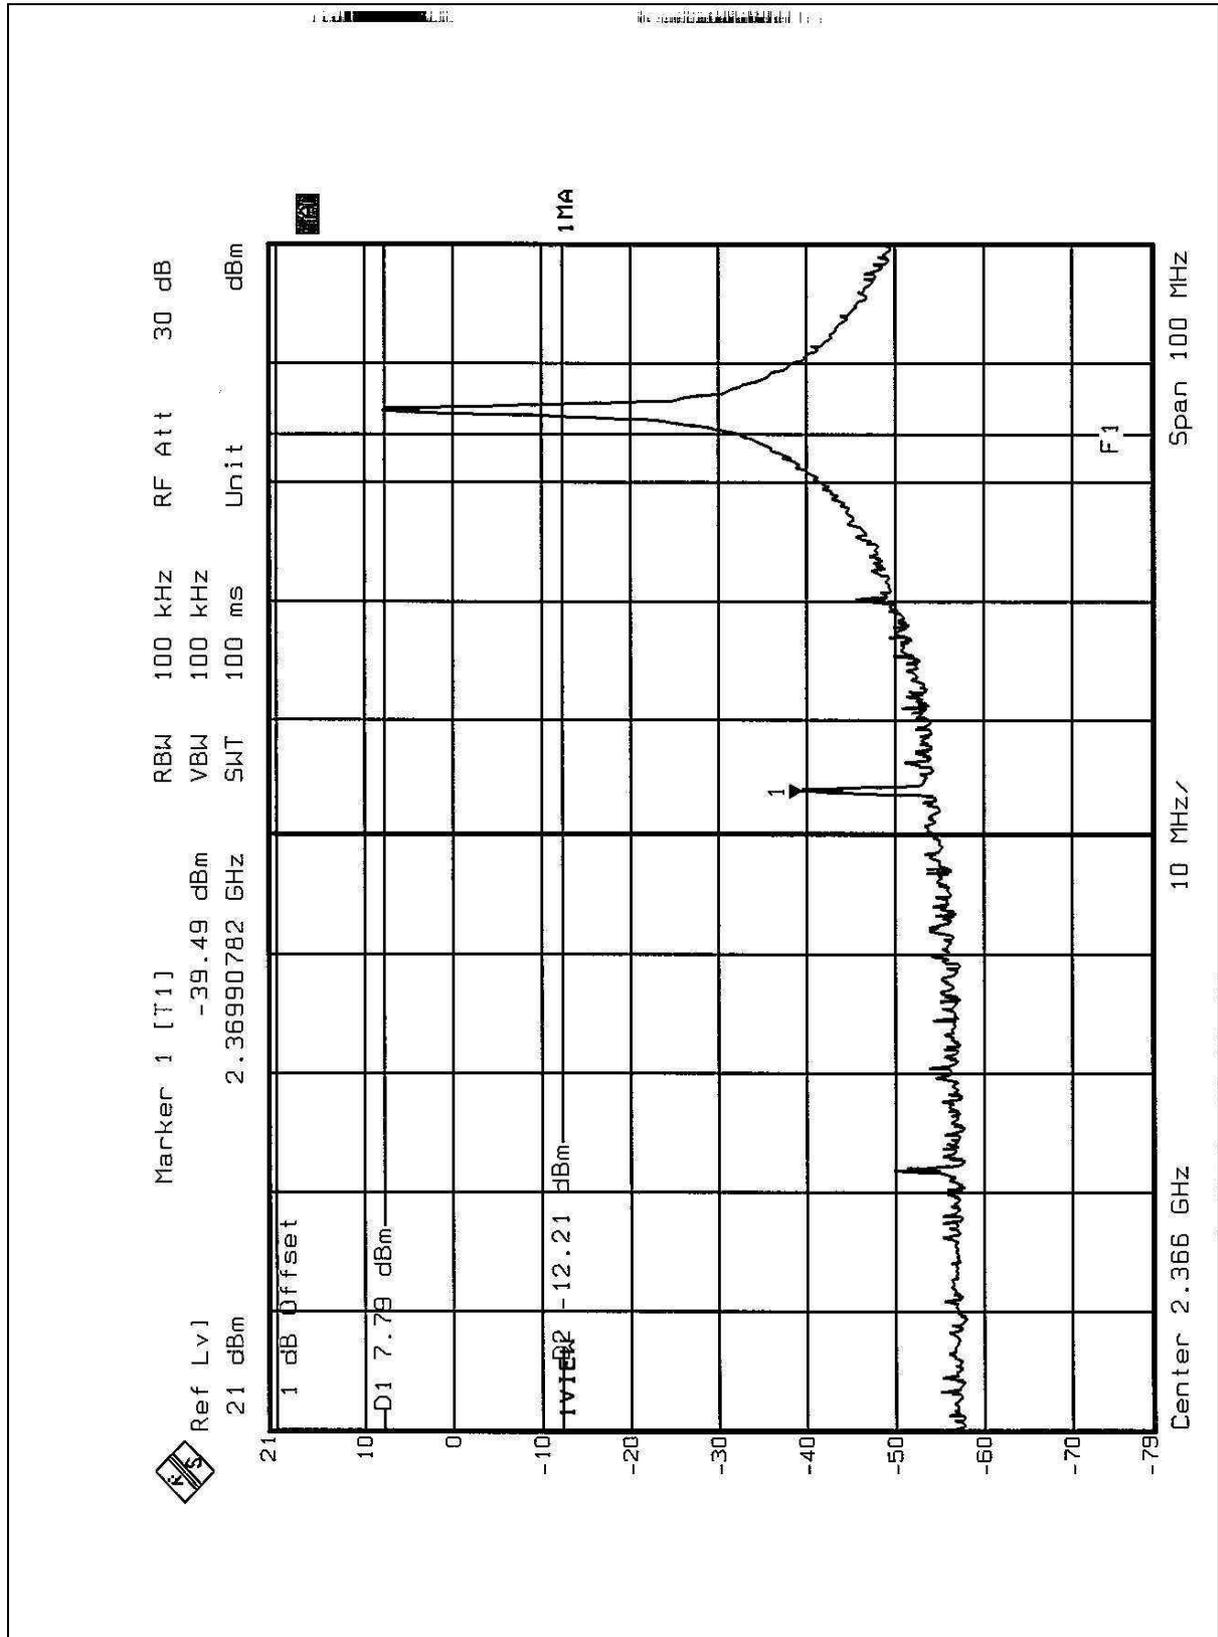



4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION


The antenna used in this product is Micro strip antenna. There is no antenna connector. The maximum Gain of this antenna is only -2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

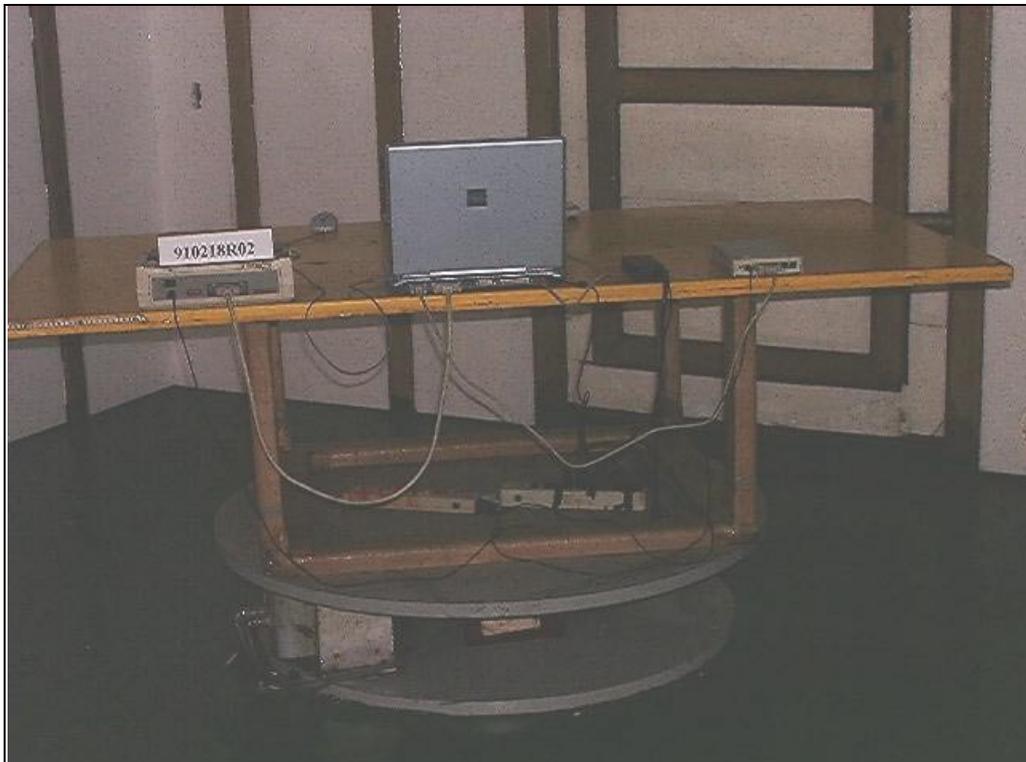



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.