



## **Appendix 7 : Processing Gain Tested Data Sheets**


### Processing Gain Channel 1 (fc=2412Mhz) @ 11Mbps

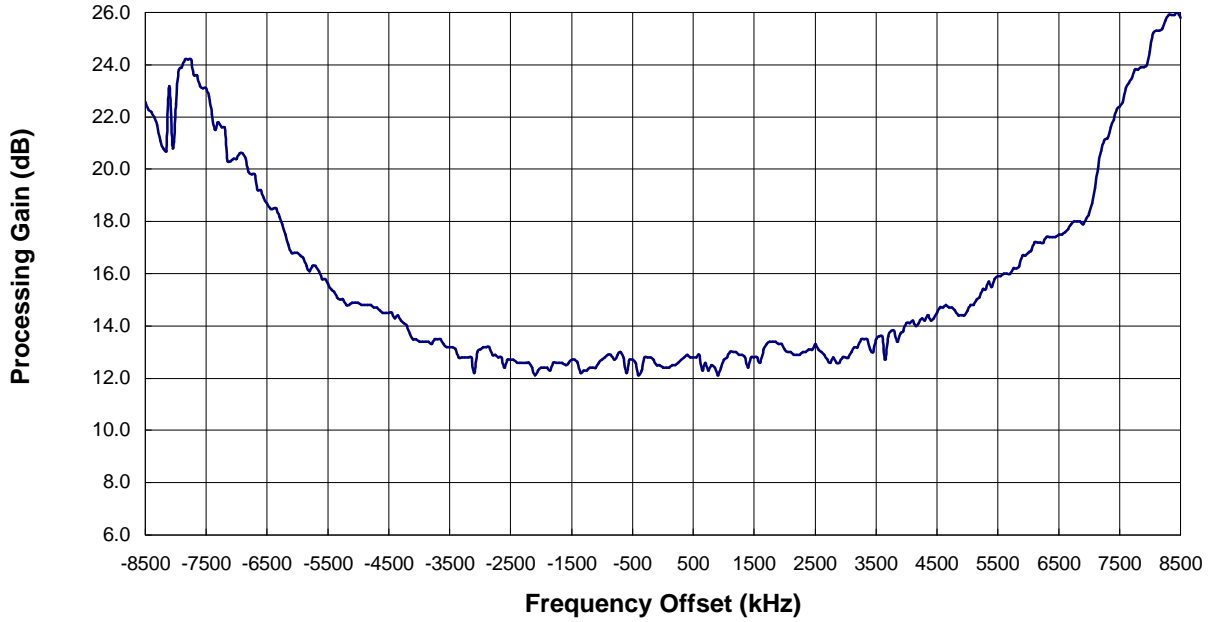

### Processing Gain Channel 6 (fc=2437MHz) @ 11Mbps

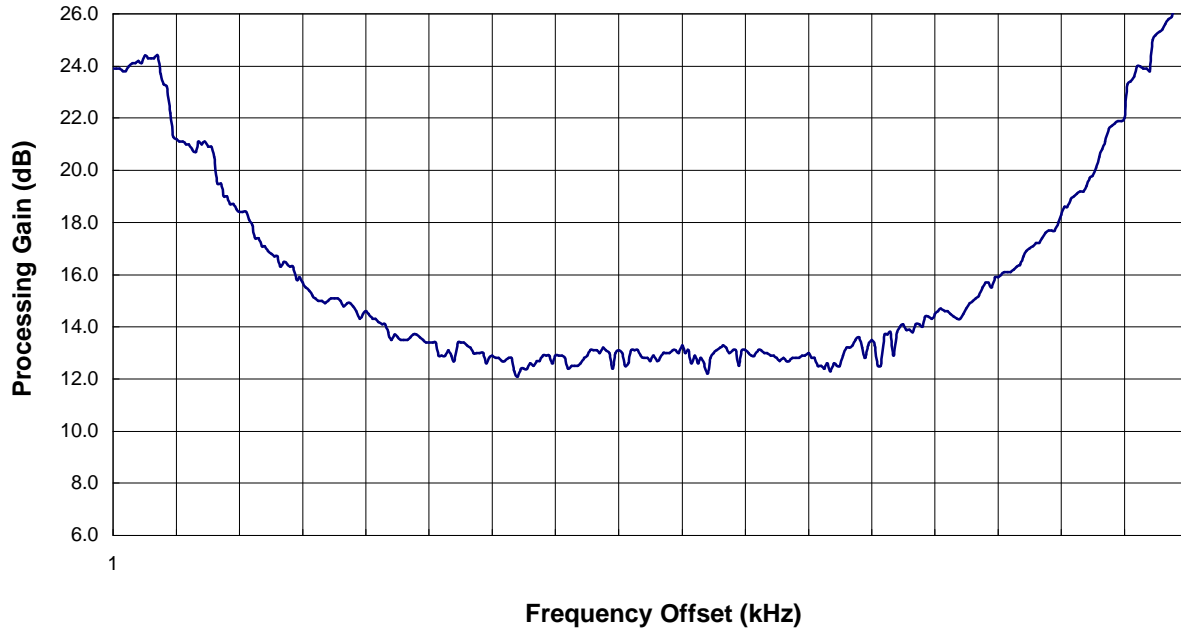

### Processing Gain Channel 11 (fc=2462MHz) @ 11Mbps

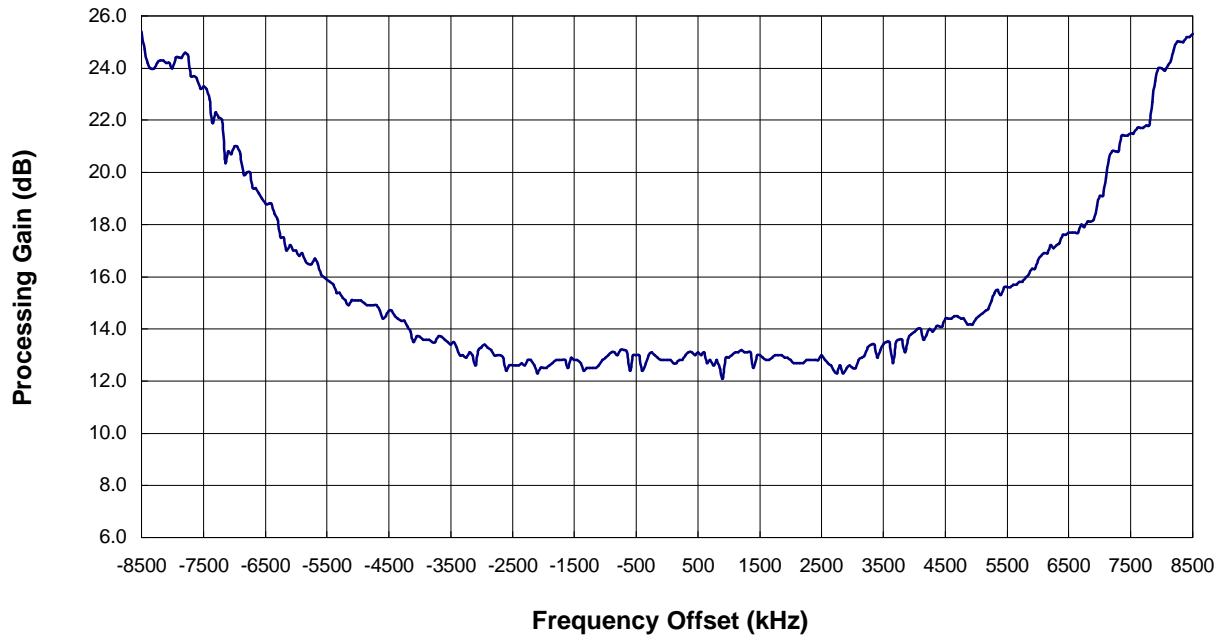

11Mbps CHANNEL 1 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2403.50	22.6	16.4	4.2	2.0	-58.7	<=8.0
2403.55	22.3	16.4	3.9	2.0	-59.0	<=8.0
2403.60	22.2	16.4	3.8	2.0	-59.1	<=8.0
2403.65	22.0	16.4	3.6	2.0	-59.3	<=8.0
2403.70	21.7	16.4	3.3	2.0	-59.6	<=8.0
2403.75	21.1	16.4	2.7	2.0	-60.2	<=8.0
2403.80	20.8	16.4	2.4	2.0	-60.5	<=8.0
2403.85	20.7	16.4	2.3	2.0	-60.6	<=8.0
2403.90	23.2	16.4	4.8	2.0	-58.1	<=8.0
2403.95	20.8	16.4	2.4	2.0	-60.5	<=8.0
2404.00	22.5	16.4	4.1	2.0	-58.8	<=8.0
2404.05	23.8	16.4	5.4	2.0	-57.5	<=8.0
2404.10	23.9	16.4	5.5	2.0	-57.4	<=8.0
2404.15	24.2	16.4	5.8	2.0	-57.1	<=8.0
2404.20	24.2	16.4	5.8	2.0	-57.1	<=8.0
2404.25	24.2	16.4	5.8	2.0	-57.1	<=8.0
2404.30	23.6	16.4	5.2	2.0	-57.7	<=8.0
2404.35	23.6	16.4	5.2	2.0	-57.7	<=8.0
2404.40	23.2	16.4	4.8	2.0	-58.1	<=8.0
2404.45	23.1	16.4	4.7	2.0	-58.2	<=8.0
2404.50	23.1	16.4	4.7	2.0	-58.2	<=8.0
2404.55	22.8	16.4	4.4	2.0	-58.5	<=8.0
2404.60	22.1	16.4	3.7	2.0	-59.2	<=8.0
2404.65	21.5	16.4	3.1	2.0	-59.8	<=8.0
2404.70	21.8	16.4	3.4	2.0	-59.5	<=8.0
2404.75	21.6	16.4	3.2	2.0	-59.7	<=8.0
2404.80	21.6	16.4	3.2	2.0	-59.7	<=8.0
2404.85	20.3	16.4	1.9	2.0	-61.0	<=8.0
2404.90	20.3	16.4	1.9	2.0	-61.0	<=8.0
2404.95	20.4	16.4	2.0	2.0	-60.9	<=8.0
2405.00	20.4	16.4	2.0	2.0	-60.9	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2405.05	20.6	16.4	2.2	2.0	-60.7	<=8.0
2405.10	20.6	16.4	2.2	2.0	-60.7	<=8.0
2405.15	20.4	16.4	2.0	2.0	-60.9	<=8.0
2405.20	19.9	16.4	1.5	2.0	-61.4	<=8.0
2405.25	19.8	16.4	1.4	2.0	-61.5	<=8.0
2405.30	19.8	16.4	1.4	2.0	-61.5	<=8.0
2405.35	19.2	16.4	0.8	2.0	-62.1	<=8.0
2405.40	19.2	16.4	0.8	2.0	-62.1	<=8.0
2405.45	18.9	16.4	0.5	2.0	-62.4	<=8.0
2405.50	18.7	16.4	0.3	2.0	-62.6	<=8.0
2405.55	18.5	16.4	0.1	2.0	-62.8	<=8.0
2405.60	18.5	16.4	0.1	2.0	-62.8	<=8.0
2405.65	18.5	16.4	0.1	2.0	-62.8	<=8.0
2405.70	18.2	16.4	-0.2	2.0	-63.1	<=8.0
2405.75	17.9	16.4	-0.5	2.0	-63.4	<=8.0
2405.80	17.5	16.4	-0.9	2.0	-63.8	<=8.0
2405.85	17.1	16.4	-1.3	2.0	-64.2	<=8.0
2405.90	16.8	16.4	-1.6	2.0	-64.5	<=8.0
2405.95	16.8	16.4	-1.6	2.0	-64.5	<=8.0
2406.00	16.8	16.4	-1.6	2.0	-64.5	<=8.0
2406.05	16.7	16.4	-1.7	2.0	-64.6	<=8.0
2406.10	16.6	16.4	-1.8	2.0	-64.7	<=8.0
2406.15	16.3	16.4	-2.1	2.0	-65.0	<=8.0
2406.20	16.1	16.4	-2.3	2.0	-65.2	<=8.0
2406.25	16.3	16.4	-2.1	2.0	-65.0	<=8.0
2406.30	16.3	16.4	-2.1	2.0	-65.0	<=8.0
2406.35	16.1	16.4	-2.3	2.0	-65.2	<=8.0
2406.40	15.8	16.4	-2.6	2.0	-65.5	<=8.0
2406.45	15.8	16.4	-2.6	2.0	-65.5	<=8.0
2406.50	15.6	16.4	-2.8	2.0	-65.7	<=8.0
2406.55	15.4	16.4	-3.0	2.0	-65.9	<=8.0
2406.60	15.3	16.4	-3.1	2.0	-66.0	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2406.65	15.1	16.4	-3.3	2.0	-66.2	<=8.0
2406.70	15.0	16.4	-3.4	2.0	-66.3	<=8.0
2406.75	15.0	16.4	-3.4	2.0	-66.3	<=8.0
2406.80	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2406.85	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2406.90	14.9	16.4	-3.5	2.0	-66.4	<=8.0
2406.95	14.9	16.4	-3.5	2.0	-66.4	<=8.0
2407.00	14.9	16.4	-3.5	2.0	-66.4	<=8.0
2407.05	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2407.10	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2407.15	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2407.20	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2407.25	14.7	16.4	-3.7	2.0	-66.6	<=8.0
2407.30	14.7	16.4	-3.7	2.0	-66.6	<=8.0
2407.35	14.6	16.4	-3.8	2.0	-66.7	<=8.0
2407.40	14.5	16.4	-3.9	2.0	-66.8	<=8.0
2407.45	14.5	16.4	-3.9	2.0	-66.8	<=8.0
2407.50	14.5	16.4	-3.9	2.0	-66.8	<=8.0
2407.55	14.5	16.4	-3.9	2.0	-66.8	<=8.0
2407.60	14.3	16.4	-4.1	2.0	-67.0	<=8.0
2407.65	14.4	16.4	-4.0	2.0	-66.9	<=8.0
2407.70	14.2	16.4	-4.2	2.0	-67.1	<=8.0
2407.75	14.1	16.4	-4.3	2.0	-67.2	<=8.0
2407.80	14.0	16.4	-4.4	2.0	-67.3	<=8.0
2407.85	13.7	16.4	-4.7	2.0	-67.6	<=8.0
2407.90	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2407.95	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2408.00	13.4	16.4	-5.0	2.0	-67.9	<=8.0
2408.05	13.4	16.4	-5.0	2.0	-67.9	<=8.0
2408.10	13.4	16.4	-5.0	2.0	-67.9	<=8.0
2408.15	13.4	16.4	-5.0	2.0	-67.9	<=8.0
2408.20	13.3	16.4	-5.1	2.0	-68.0	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2408.25	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2408.30	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2408.35	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2408.40	13.3	16.4	-5.1	2.0	-68.0	<=8.0
2408.45	13.2	16.4	-5.2	2.0	-68.1	<=8.0
2408.50	13.2	16.4	-5.2	2.0	-68.1	<=8.0
2408.55	13.2	16.4	-5.2	2.0	-68.1	<=8.0
2408.60	13.1	16.4	-5.3	2.0	-68.2	<=8.0
2408.65	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2408.70	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2408.75	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2408.80	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2408.85	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2408.90	12.2	16.4	-6.2	2.0	-69.1	<=8.0
2408.95	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2409.00	13.1	16.4	-5.3	2.0	-68.2	<=8.0
2409.05	13.2	16.4	-5.2	2.0	-68.1	<=8.0
2409.10	13.2	16.4	-5.2	2.0	-68.1	<=8.0
2409.15	13.2	16.4	-5.2	2.0	-68.1	<=8.0
2409.20	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2409.25	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2409.30	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2409.35	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2409.40	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2409.45	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2409.50	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2409.55	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2409.60	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2409.65	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2409.70	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2409.75	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2409.80	12.6	16.4	-5.8	2.0	-68.7	<=8.0



11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2409.85	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2409.90	12.1	16.4	-6.3	2.0	-69.2	<=8.0
2409.95	12.3	16.4	-6.1	2.0	-69.0	<=8.0
2410.00	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2410.05	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2410.10	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2410.15	12.3	16.4	-6.1	2.0	-69.0	<=8.0
2410.20	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2410.25	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2410.30	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2410.35	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2410.40	12.5	16.4	-5.9	2.0	-68.8	<=8.0
2410.45	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2410.50	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2410.55	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2410.60	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2410.65	12.2	16.4	-6.2	2.0	-69.1	<=8.0
2410.70	12.3	16.4	-6.1	2.0	-69.0	<=8.0
2410.75	12.3	16.4	-6.1	2.0	-69.0	<=8.0
2410.80	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2410.85	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2410.90	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2410.95	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2411.00	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2411.05	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2411.10	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2411.15	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2411.20	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2411.25	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2411.30	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2411.35	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2411.40	12.2	16.4	-6.2	2.0	-69.1	<=8.0
2411.45	12.7	16.4	-5.7	2.0	-68.6	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2411.50	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2411.55	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2411.60	12.1	16.4	-6.3	2.0	-69.2	<=8.0
2411.65	12.3	16.4	-6.1	2.0	-69.0	<=8.0
2411.70	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2411.75	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2411.80	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2411.85	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2411.90	12.5	16.4	-5.9	2.0	-68.8	<=8.0
2411.95	12.5	16.4	-5.9	2.0	-68.8	<=8.0
2412.00	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2412.05	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2412.10	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2412.15	12.5	16.4	-5.9	2.0	-68.8	<=8.0
2412.20	12.5	16.4	-5.9	2.0	-68.8	<=8.0
2412.25	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2412.30	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2412.35	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2412.40	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2412.45	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2412.50	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2412.55	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2412.60	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2412.65	12.3	16.4	-6.1	2.0	-69.0	<=8.0
2412.70	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2412.75	12.3	16.4	-6.1	2.0	-69.0	<=8.0
2412.80	12.5	16.4	-5.9	2.0	-68.8	<=8.0
2412.85	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2412.90	12.1	16.4	-6.3	2.0	-69.2	<=8.0
2412.95	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2413.00	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2413.05	12.8	16.4	-5.6	2.0	-68.5	<=8.0

11Mbps CHANNEL 1 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2413.10	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2413.15	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2413.20	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2413.25	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2413.30	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2413.35	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2413.40	12.4	16.4	-6.0	2.0	-68.9	<=8.0
2413.45	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2413.50	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2413.55	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2413.60	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2413.65	13.1	16.4	-5.3	2.0	-68.2	<=8.0
2413.70	13.3	16.4	-5.1	2.0	-68.0	<=8.0
2413.75	13.4	16.4	-5.0	2.0	-67.9	<=8.0
2413.80	13.4	16.4	-5.0	2.0	-67.9	<=8.0
2413.85	13.4	16.4	-5.0	2.0	-67.9	<=8.0
2413.90	13.3	16.4	-5.1	2.0	-68.0	<=8.0
2413.95	13.3	16.4	-5.1	2.0	-68.0	<=8.0
2414.00	13.1	16.4	-5.3	2.0	-68.2	<=8.0
2414.05	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2414.10	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2414.15	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2414.20	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2414.25	12.9	16.4	-5.5	2.0	-68.4	<=8.0
2414.30	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2414.35	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2414.40	13.1	16.4	-5.3	2.0	-68.2	<=8.0
2414.45	13.1	16.4	-5.3	2.0	-68.2	<=8.0
2414.50	13.3	16.4	-5.1	2.0	-68.0	<=8.0
2414.55	13.1	16.4	-5.3	2.0	-68.2	<=8.0
2414.60	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2414.65	12.9	16.4	-5.5	2.0	-68.4	<=8.0

11Mbps CHANNEL 1 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2414.70	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2414.75	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2414.80	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2414.85	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2414.90	12.6	16.4	-5.8	2.0	-68.7	<=8.0
2414.95	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2415.00	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2415.05	12.8	16.4	-5.6	2.0	-68.5	<=8.0
2415.10	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2415.15	13.2	16.4	-5.2	2.0	-68.1	<=8.0
2415.20	13.2	16.4	-5.2	2.0	-68.1	<=8.0
2415.25	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2415.30	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2415.35	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2415.40	13.1	16.4	-5.3	2.0	-68.2	<=8.0
2415.45	13.0	16.4	-5.4	2.0	-68.3	<=8.0
2415.50	13.5	16.4	-4.9	2.0	-67.8	<=8.0
2415.55	13.6	16.4	-4.8	2.0	-67.7	<=8.0
2415.60	13.6	16.4	-4.8	2.0	-67.7	<=8.0
2415.65	12.7	16.4	-5.7	2.0	-68.6	<=8.0
2415.70	13.6	16.4	-4.8	2.0	-67.7	<=8.0
2415.75	13.8	16.4	-4.6	2.0	-67.5	<=8.0
2415.80	13.8	16.4	-4.6	2.0	-67.5	<=8.0
2415.85	13.4	16.4	-5.0	2.0	-67.9	<=8.0
2415.90	13.7	16.4	-4.7	2.0	-67.6	<=8.0
2415.95	13.8	16.4	-4.6	2.0	-67.5	<=8.0
2416.00	14.1	16.4	-4.3	2.0	-67.2	<=8.0
2416.05	14.1	16.4	-4.3	2.0	-67.2	<=8.0
2416.10	14.2	16.4	-4.2	2.0	-67.1	<=8.0
2416.15	14.0	16.4	-4.4	2.0	-67.3	<=8.0
2416.20	14.1	16.4	-4.3	2.0	-67.2	<=8.0
2416.25	14.3	16.4	-4.1	2.0	-67.0	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2416.30	14.2	16.4	-4.2	2.0	-67.1	<=8.0
2416.35	14.4	16.4	-4.0	2.0	-66.9	<=8.0
2416.40	14.2	16.4	-4.2	2.0	-67.1	<=8.0
2416.45	14.3	16.4	-4.1	2.0	-67.0	<=8.0
2416.50	14.5	16.4	-3.9	2.0	-66.8	<=8.0
2416.55	14.7	16.4	-3.7	2.0	-66.6	<=8.0
2416.60	14.7	16.4	-3.7	2.0	-66.6	<=8.0
2416.65	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2416.70	14.7	16.4	-3.7	2.0	-66.6	<=8.0
2416.75	14.7	16.4	-3.7	2.0	-66.6	<=8.0
2416.80	14.6	16.4	-3.8	2.0	-66.7	<=8.0
2416.85	14.4	16.4	-4.0	2.0	-66.9	<=8.0
2416.90	14.4	16.4	-4.0	2.0	-66.9	<=8.0
2416.95	14.4	16.4	-4.0	2.0	-66.9	<=8.0
2417.00	14.6	16.4	-3.8	2.0	-66.7	<=8.0
2417.05	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2417.10	14.8	16.4	-3.6	2.0	-66.5	<=8.0
2417.15	15.0	16.4	-3.4	2.0	-66.3	<=8.0
2417.20	15.1	16.4	-3.3	2.0	-66.2	<=8.0
2417.25	15.4	16.4	-3.0	2.0	-65.9	<=8.0
2417.30	15.4	16.4	-3.0	2.0	-65.9	<=8.0
2417.35	15.7	16.4	-2.7	2.0	-65.6	<=8.0
2417.40	15.5	16.4	-2.9	2.0	-65.8	<=8.0
2417.45	15.8	16.4	-2.6	2.0	-65.5	<=8.0
2417.50	15.9	16.4	-2.5	2.0	-65.4	<=8.0
2417.55	15.9	16.4	-2.5	2.0	-65.4	<=8.0
2417.60	16.0	16.4	-2.4	2.0	-65.3	<=8.0
2417.65	16.0	16.4	-2.4	2.0	-65.3	<=8.0
2417.70	16.0	16.4	-2.4	2.0	-65.3	<=8.0
2417.75	16.2	16.4	-2.2	2.0	-65.1	<=8.0
2417.80	16.2	16.4	-2.2	2.0	-65.1	<=8.0
2417.85	16.3	16.4	-2.1	2.0	-65.0	<=8.0

11Mbps CHANNEL 1 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2417.90	16.7	16.4	-1.7	2.0	-64.6	<=8.0
2417.95	16.7	16.4	-1.7	2.0	-64.6	<=8.0
2418.00	16.8	16.4	-1.6	2.0	-64.5	<=8.0
2418.05	16.9	16.4	-1.5	2.0	-64.4	<=8.0
2418.10	17.2	16.4	-1.2	2.0	-64.1	<=8.0
2418.15	17.2	16.4	-1.2	2.0	-64.1	<=8.0
2418.20	17.2	16.4	-1.2	2.0	-64.1	<=8.0
2418.25	17.2	16.4	-1.2	2.0	-64.1	<=8.0
2418.30	17.4	16.4	-1.0	2.0	-63.9	<=8.0
2418.35	17.4	16.4	-1.0	2.0	-63.9	<=8.0
2418.40	17.4	16.4	-1.0	2.0	-63.9	<=8.0
2418.45	17.4	16.4	-1.0	2.0	-63.9	<=8.0
2418.50	17.5	16.4	-0.9	2.0	-63.8	<=8.0
2418.55	17.5	16.4	-0.9	2.0	-63.8	<=8.0
2418.60	17.6	16.4	-0.8	2.0	-63.7	<=8.0
2418.65	17.7	16.4	-0.7	2.0	-63.6	<=8.0
2418.70	17.9	16.4	-0.5	2.0	-63.4	<=8.0
2418.75	18.0	16.4	-0.4	2.0	-63.3	<=8.0
2418.80	18.0	16.4	-0.4	2.0	-63.3	<=8.0
2418.85	18.0	16.4	-0.4	2.0	-63.3	<=8.0
2418.90	17.9	16.4	-0.5	2.0	-63.4	<=8.0
2418.95	18.1	16.4	-0.3	2.0	-63.2	<=8.0
2419.00	18.3	16.4	-0.1	2.0	-63.0	<=8.0
2419.05	18.7	16.4	0.3	2.0	-62.6	<=8.0
2419.10	19.3	16.4	0.9	2.0	-62.0	<=8.0
2419.15	20.1	16.4	1.7	2.0	-61.2	<=8.0
2419.20	20.7	16.4	2.3	2.0	-60.6	<=8.0
2419.25	21.1	16.4	2.7	2.0	-60.2	<=8.0
2419.30	21.2	16.4	2.8	2.0	-60.1	<=8.0
2419.35	21.6	16.4	3.2	2.0	-59.7	<=8.0
2419.40	21.9	16.4	3.5	2.0	-59.4	<=8.0
2419.45	22.3	16.4	3.9	2.0	-59.0	<=8.0

11Mbps CHANNEL 1 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2419.50	22.4	16.4	4.0	2.0	-58.9	<=8.0
2419.55	22.6	16.4	4.2	2.0	-58.7	<=8.0
2419.60	23.1	16.4	4.7	2.0	-58.2	<=8.0
2419.65	23.3	16.4	4.9	2.0	-58.0	<=8.0
2419.70	23.5	16.4	5.1	2.0	-57.8	<=8.0
2419.75	23.8	16.4	5.4	2.0	-57.5	<=8.0
2419.80	23.8	16.4	5.4	2.0	-57.5	<=8.0
2419.85	23.9	16.4	5.5	2.0	-57.4	<=8.0
2419.90	23.9	16.4	5.5	2.0	-57.4	<=8.0
2419.95	24.0	16.4	5.6	2.0	-57.3	<=8.0
2420.00	24.5	16.4	6.1	2.0	-56.8	<=8.0
2420.05	25.2	16.4	6.8	2.0	-56.1	<=8.0
2420.10	25.3	16.4	6.9	2.0	-56.0	<=8.0
2420.15	25.3	16.4	6.9	2.0	-56.0	<=8.0
2420.20	25.4	16.4	7.0	2.0	-55.9	<=8.0
2420.25	25.7	16.4	7.3	2.0	-55.6	<=8.0
2420.30	25.9	16.4	7.5	2.0	-55.4	<=8.0
2420.35	25.9	16.4	7.5	2.0	-55.4	<=8.0
2420.40	25.9	16.4	7.5	2.0	-55.4	<=8.0
2420.45	26.0	16.4	7.6	2.0	-55.3	<=8.0
2420.50	25.8	16.4	7.4	2.0	-55.5	<=8.0

11Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	Gp	(S/N) <sub>o</sub>	M <sub>j</sub> =J/S	L <sub>sys</sub>	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2428.50	23.9	16.4	5.5	2.0	-57.2	<=8.0
2428.55	23.9	16.4	5.5	2.0	-57.2	<=8.0
2428.60	23.9	16.4	5.5	2.0	-57.2	<=8.0
2428.65	23.8	16.4	5.4	2.0	-57.3	<=8.0
2428.70	23.8	16.4	5.4	2.0	-57.3	<=8.0
2428.75	24.0	16.4	5.6	2.0	-57.1	<=8.0
2428.80	24.1	16.4	5.7	2.0	-57.0	<=8.0
2428.85	24.1	16.4	5.7	2.0	-57.0	<=8.0
2428.90	24.2	16.4	5.8	2.0	-56.9	<=8.0
2428.95	24.1	16.4	5.7	2.0	-57.0	<=8.0
2429.00	24.4	16.4	6.0	2.0	-56.7	<=8.0
2429.05	24.3	16.4	5.9	2.0	-56.8	<=8.0
2429.10	24.3	16.4	5.9	2.0	-56.8	<=8.0
2429.15	24.3	16.4	5.9	2.0	-56.8	<=8.0
2429.20	24.4	16.4	6.0	2.0	-56.7	<=8.0
2429.25	23.8	16.4	5.4	2.0	-57.3	<=8.0
2429.30	23.3	16.4	4.9	2.0	-57.8	<=8.0
2429.35	23.2	16.4	4.8	2.0	-57.9	<=8.0
2429.40	22.2	16.4	3.8	2.0	-58.9	<=8.0
2429.45	21.3	16.4	2.9	2.0	-59.8	<=8.0
2429.50	21.2	16.4	2.8	2.0	-59.9	<=8.0
2429.55	21.1	16.4	2.7	2.0	-60.0	<=8.0
2429.60	21.1	16.4	2.7	2.0	-60.0	<=8.0
2429.65	21.0	16.4	2.6	2.0	-60.1	<=8.0
2429.70	21.0	16.4	2.6	2.0	-60.1	<=8.0
2429.75	20.8	16.4	2.4	2.0	-60.3	<=8.0
2429.80	20.7	16.4	2.3	2.0	-60.4	<=8.0
2429.85	21.1	16.4	2.7	2.0	-60.0	<=8.0
2429.90	21.1	16.4	2.7	2.0	-60.0	<=8.0
2429.95	21.1	16.4	2.7	2.0	-60.0	<=8.0
2430.00	20.9	16.4	2.5	2.0	-60.2	<=8.0
2430.05	20.9	16.4	2.5	2.0	-60.2	<=8.0



11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2430.10	20.5	16.4	2.1	2.0	-60.6	<=8.0
2430.15	19.5	16.4	1.1	2.0	-61.6	<=8.0
2430.20	19.5	16.4	1.1	2.0	-61.6	<=8.0
2430.25	19.0	16.4	0.6	2.0	-62.1	<=8.0
2430.30	19.0	16.4	0.6	2.0	-62.1	<=8.0
2430.35	18.7	16.4	0.3	2.0	-62.4	<=8.0
2430.40	18.7	16.4	0.3	2.0	-62.4	<=8.0
2430.45	18.5	16.4	0.1	2.0	-62.6	<=8.0
2430.50	18.4	16.4	0.0	2.0	-62.7	<=8.0
2430.55	18.4	16.4	0.0	2.0	-62.7	<=8.0
2430.60	18.4	16.4	0.0	2.0	-62.7	<=8.0
2430.65	18.1	16.4	-0.3	2.0	-63.0	<=8.0
2430.70	17.9	16.4	-0.5	2.0	-63.2	<=8.0
2430.75	17.4	16.4	-1.0	2.0	-63.7	<=8.0
2430.80	17.4	16.4	-1.0	2.0	-63.7	<=8.0
2430.85	17.1	16.4	-1.3	2.0	-64.0	<=8.0
2430.90	17.1	16.4	-1.3	2.0	-64.0	<=8.0
2430.95	16.9	16.4	-1.5	2.0	-64.2	<=8.0
2431.00	16.8	16.4	-1.6	2.0	-64.3	<=8.0
2431.05	16.7	16.4	-1.7	2.0	-64.4	<=8.0
2431.10	16.7	16.4	-1.7	2.0	-64.4	<=8.0
2431.15	16.3	16.4	-2.1	2.0	-64.8	<=8.0
2431.20	16.5	16.4	-1.9	2.0	-64.6	<=8.0
2431.25	16.4	16.4	-2.0	2.0	-64.7	<=8.0
2431.30	16.3	16.4	-2.1	2.0	-64.8	<=8.0
2431.35	16.3	16.4	-2.1	2.0	-64.8	<=8.0
2431.40	15.9	16.4	-2.5	2.0	-65.2	<=8.0
2431.45	15.9	16.4	-2.5	2.0	-65.2	<=8.0
2431.50	15.7	16.4	-2.7	2.0	-65.4	<=8.0
2431.55	15.5	16.4	-2.9	2.0	-65.6	<=8.0
2431.60	15.4	16.4	-3.0	2.0	-65.7	<=8.0
2431.65	15.2	16.4	-3.2	2.0	-65.9	<=8.0

11Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2431.70	15.1	16.4	-3.3	2.0	-66.0	<=8.0
2431.75	15.0	16.4	-3.4	2.0	-66.1	<=8.0
2431.80	15.0	16.4	-3.4	2.0	-66.1	<=8.0
2431.85	14.9	16.4	-3.5	2.0	-66.2	<=8.0
2431.90	15.0	16.4	-3.4	2.0	-66.1	<=8.0
2431.95	15.1	16.4	-3.3	2.0	-66.0	<=8.0
2432.00	15.1	16.4	-3.3	2.0	-66.0	<=8.0
2432.05	15.1	16.4	-3.3	2.0	-66.0	<=8.0
2432.10	15.0	16.4	-3.4	2.0	-66.1	<=8.0
2432.15	14.8	16.4	-3.6	2.0	-66.3	<=8.0
2432.20	14.9	16.4	-3.5	2.0	-66.2	<=8.0
2432.25	14.9	16.4	-3.5	2.0	-66.2	<=8.0
2432.30	14.8	16.4	-3.6	2.0	-66.3	<=8.0
2432.35	14.6	16.4	-3.8	2.0	-66.5	<=8.0
2432.40	14.3	16.4	-4.1	2.0	-66.8	<=8.0
2432.45	14.5	16.4	-3.9	2.0	-66.6	<=8.0
2432.50	14.6	16.4	-3.8	2.0	-66.5	<=8.0
2432.55	14.5	16.4	-3.9	2.0	-66.6	<=8.0
2432.60	14.3	16.4	-4.1	2.0	-66.8	<=8.0
2432.65	14.3	16.4	-4.1	2.0	-66.8	<=8.0
2432.70	14.2	16.4	-4.2	2.0	-66.9	<=8.0
2432.75	14.1	16.4	-4.3	2.0	-67.0	<=8.0
2432.80	14.1	16.4	-4.3	2.0	-67.0	<=8.0
2432.85	13.8	16.4	-4.6	2.0	-67.3	<=8.0
2432.90	13.5	16.4	-4.9	2.0	-67.6	<=8.0
2432.95	13.7	16.4	-4.7	2.0	-67.4	<=8.0
2433.00	13.6	16.4	-4.8	2.0	-67.5	<=8.0
2433.05	13.5	16.4	-4.9	2.0	-67.6	<=8.0
2433.10	13.5	16.4	-4.9	2.0	-67.6	<=8.0
2433.15	13.5	16.4	-4.9	2.0	-67.6	<=8.0
2433.20	13.6	16.4	-4.8	2.0	-67.5	<=8.0
2433.25	13.7	16.4	-4.7	2.0	-67.4	<=8.0

11Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2433.30	13.7	16.4	-4.7	2.0	-67.4	<=8.0
2433.35	13.6	16.4	-4.8	2.0	-67.5	<=8.0
2433.40	13.5	16.4	-4.9	2.0	-67.6	<=8.0
2433.45	13.4	16.4	-5.0	2.0	-67.7	<=8.0
2433.50	13.4	16.4	-5.0	2.0	-67.7	<=8.0
2433.55	13.4	16.4	-5.0	2.0	-67.7	<=8.0
2433.60	13.4	16.4	-5.0	2.0	-67.7	<=8.0
2433.65	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2433.70	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2433.75	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2433.80	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2433.85	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2433.90	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2433.95	13.4	16.4	-5.0	2.0	-67.7	<=8.0
2434.00	13.4	16.4	-5.0	2.0	-67.7	<=8.0
2434.05	13.4	16.4	-5.0	2.0	-67.7	<=8.0
2434.10	13.3	16.4	-5.1	2.0	-67.8	<=8.0
2434.15	13.2	16.4	-5.2	2.0	-67.9	<=8.0
2434.20	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2434.25	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2434.30	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2434.35	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2434.40	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2434.45	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2434.50	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2434.55	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2434.60	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2434.65	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2434.70	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2434.75	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2434.80	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2434.85	12.3	16.4	-6.1	2.0	-68.8	<=8.0

11Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2434.90	12.1	16.4	-6.3	2.0	-69.0	<=8.0
2434.95	12.4	16.4	-6.0	2.0	-68.7	<=8.0
2435.00	12.4	16.4	-6.0	2.0	-68.7	<=8.0
2435.05	12.4	16.4	-6.0	2.0	-68.7	<=8.0
2435.10	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2435.15	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2435.20	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2435.25	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2435.30	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2435.35	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2435.40	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2435.45	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2435.50	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2435.55	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2435.60	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2435.65	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2435.70	12.4	16.4	-6.0	2.0	-68.7	<=8.0
2435.75	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2435.80	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2435.85	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2435.90	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2435.95	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2436.00	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2436.05	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2436.10	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2436.15	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2436.20	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2436.25	13.2	16.4	-5.2	2.0	-67.9	<=8.0
2436.30	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2436.35	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2436.40	12.4	16.4	-6.0	2.0	-68.7	<=8.0
2436.45	13.0	16.4	-5.4	2.0	-68.1	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2436.50	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2436.55	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2436.60	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2436.65	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2436.70	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2436.75	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2436.80	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2436.85	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2436.90	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2436.95	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2437.00	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2437.05	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2437.10	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2437.15	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2437.20	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2437.25	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2437.30	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2437.35	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2437.40	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2437.45	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2437.50	13.3	16.4	-5.1	2.0	-67.8	<=8.0
2437.55	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2437.60	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2437.65	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2437.70	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2437.75	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2437.80	12.8	16.3	-5.5	2.0	-68.2	<=8.0
2437.85	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2437.90	12.2	16.4	-6.2	2.0	-68.9	<=8.0
2437.95	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2438.00	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2438.05	13.1	16.4	-5.3	2.0	-68.0	<=8.0

11Mbps CHANNEL 6 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2438.10	13.2	16.4	-5.2	2.0	-67.9	<=8.0
2438.15	13.3	16.4	-5.1	2.0	-67.8	<=8.0
2438.20	13.2	16.4	-5.2	2.0	-67.9	<=8.0
2438.25	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2438.30	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2438.35	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2438.40	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2438.45	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2438.50	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2438.55	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2438.60	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2438.65	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2438.70	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2438.75	13.1	16.4	-5.3	2.0	-68.0	<=8.0
2438.80	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2438.85	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2438.90	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2438.95	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2439.00	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2439.05	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2439.10	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2439.15	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2439.20	12.7	16.4	-5.7	2.0	-68.4	<=8.0
2439.25	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2439.30	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2439.35	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2439.40	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2439.45	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2439.50	13.0	16.4	-5.4	2.0	-68.1	<=8.0
2439.55	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2439.60	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2439.65	12.5	16.4	-5.9	2.0	-68.6	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2439.70	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2439.75	12.4	16.4	-6.0	2.0	-68.7	<=8.0
2439.80	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2439.85	12.3	16.4	-6.1	2.0	-68.8	<=8.0
2439.90	12.6	16.4	-5.8	2.0	-68.5	<=8.0
2439.95	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2440.00	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2440.05	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2440.10	13.2	16.4	-5.2	2.0	-67.9	<=8.0
2440.15	13.2	16.4	-5.2	2.0	-67.9	<=8.0
2440.20	13.3	16.4	-5.1	2.0	-67.8	<=8.0
2440.25	13.5	16.4	-4.9	2.0	-67.6	<=8.0
2440.30	13.6	16.4	-4.8	2.0	-67.5	<=8.0
2440.35	13.2	16.4	-5.2	2.0	-67.9	<=8.0
2440.40	12.8	16.4	-5.6	2.0	-68.3	<=8.0
2440.45	13.3	16.4	-5.1	2.0	-67.8	<=8.0
2440.50	13.5	16.4	-4.9	2.0	-67.6	<=8.0
2440.55	13.3	16.4	-5.1	2.0	-67.8	<=8.0
2440.60	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2440.65	12.5	16.4	-5.9	2.0	-68.6	<=8.0
2440.70	13.7	16.4	-4.7	2.0	-67.4	<=8.0
2440.75	13.7	16.4	-4.7	2.0	-67.4	<=8.0
2440.80	13.8	16.4	-4.6	2.0	-67.3	<=8.0
2440.85	12.9	16.4	-5.5	2.0	-68.2	<=8.0
2440.90	13.8	16.4	-4.6	2.0	-67.3	<=8.0
2440.95	14.0	16.4	-4.4	2.0	-67.1	<=8.0
2441.00	14.1	16.4	-4.3	2.0	-67.0	<=8.0
2441.05	13.9	16.4	-4.5	2.0	-67.2	<=8.0
2441.10	13.9	16.4	-4.5	2.0	-67.2	<=8.0
2441.15	13.8	16.4	-4.6	2.0	-67.3	<=8.0
2441.20	14.1	16.4	-4.3	2.0	-67.0	<=8.0
2441.25	14.1	16.4	-4.3	2.0	-67.0	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2441.30	14.0	16.4	-4.4	2.0	-67.1	<=8.0
2441.35	14.4	16.4	-4.0	2.0	-66.7	<=8.0
2441.40	14.4	16.4	-4.0	2.0	-66.7	<=8.0
2441.45	14.3	16.4	-4.1	2.0	-66.8	<=8.0
2441.50	14.5	16.4	-3.9	2.0	-66.6	<=8.0
2441.55	14.6	16.4	-3.8	2.0	-66.5	<=8.0
2441.60	14.7	16.4	-3.7	2.0	-66.4	<=8.0
2441.65	14.6	16.4	-3.8	2.0	-66.5	<=8.0
2441.70	14.6	16.4	-3.8	2.0	-66.5	<=8.0
2441.75	14.5	16.4	-3.9	2.0	-66.6	<=8.0
2441.80	14.4	16.4	-4.0	2.0	-66.7	<=8.0
2441.85	14.3	16.4	-4.1	2.0	-66.8	<=8.0
2441.90	14.3	16.4	-4.1	2.0	-66.8	<=8.0
2441.95	14.5	16.4	-3.9	2.0	-66.6	<=8.0
2442.00	14.7	16.4	-3.7	2.0	-66.4	<=8.0
2442.05	14.9	16.4	-3.5	2.0	-66.2	<=8.0
2442.10	15.0	16.4	-3.4	2.0	-66.1	<=8.0
2442.15	15.1	16.4	-3.3	2.0	-66.0	<=8.0
2442.20	15.2	16.4	-3.2	2.0	-65.9	<=8.0
2442.25	15.5	16.4	-2.9	2.0	-65.6	<=8.0
2442.30	15.7	16.4	-2.7	2.0	-65.4	<=8.0
2442.35	15.7	16.4	-2.7	2.0	-65.4	<=8.0
2442.40	15.5	16.4	-2.9	2.0	-65.6	<=8.0
2442.45	15.9	16.4	-2.5	2.0	-65.2	<=8.0
2442.50	15.9	16.4	-2.5	2.0	-65.2	<=8.0
2442.55	16.0	16.4	-2.4	2.0	-65.1	<=8.0
2442.60	16.1	16.4	-2.3	2.0	-65.0	<=8.0
2442.65	16.1	16.4	-2.3	2.0	-65.0	<=8.0
2442.70	16.1	16.4	-2.3	2.0	-65.0	<=8.0
2442.75	16.2	16.4	-2.2	2.0	-64.9	<=8.0
2442.80	16.3	16.4	-2.1	2.0	-64.8	<=8.0
2442.85	16.4	16.4	-2.0	2.0	-64.7	<=8.0



11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2442.90	16.7	16.4	-1.7	2.0	-64.4	<=8.0
2442.95	16.9	16.4	-1.5	2.0	-64.2	<=8.0
2443.00	17.0	16.4	-1.4	2.0	-64.1	<=8.0
2443.05	17.1	16.4	-1.3	2.0	-64.0	<=8.0
2443.10	17.2	16.4	-1.2	2.0	-63.9	<=8.0
2443.15	17.2	16.4	-1.2	2.0	-63.9	<=8.0
2443.20	17.4	16.4	-1.0	2.0	-63.7	<=8.0
2443.25	17.6	16.4	-0.8	2.0	-63.5	<=8.0
2443.30	17.7	16.4	-0.7	2.0	-63.4	<=8.0
2443.35	17.7	16.4	-0.7	2.0	-63.4	<=8.0
2443.40	17.7	16.4	-0.7	2.0	-63.4	<=8.0
2443.45	18.0	16.4	-0.4	2.0	-63.1	<=8.0
2443.50	18.3	16.4	-0.1	2.0	-62.8	<=8.0
2443.55	18.6	16.4	0.2	2.0	-62.5	<=8.0
2443.60	18.6	16.4	0.2	2.0	-62.5	<=8.0
2443.65	18.9	16.4	0.5	2.0	-62.2	<=8.0
2443.70	19.0	16.4	0.6	2.0	-62.1	<=8.0
2443.75	19.1	16.4	0.7	2.0	-62.0	<=8.0
2443.80	19.2	16.4	0.8	2.0	-61.9	<=8.0
2443.85	19.2	16.4	0.8	2.0	-61.9	<=8.0
2443.90	19.4	16.4	1.0	2.0	-61.7	<=8.0
2443.95	19.7	16.4	1.3	2.0	-61.4	<=8.0
2444.00	19.8	16.4	1.4	2.0	-61.3	<=8.0
2444.05	20.1	16.4	1.7	2.0	-61.0	<=8.0
2444.10	20.5	16.4	2.1	2.0	-60.6	<=8.0
2444.15	20.8	16.4	2.4	2.0	-60.3	<=8.0
2444.20	21.1	16.4	2.7	2.0	-60.0	<=8.0
2444.25	21.6	16.4	3.2	2.0	-59.5	<=8.0
2444.30	21.7	16.4	3.3	2.0	-59.4	<=8.0
2444.35	21.8	16.4	3.4	2.0	-59.3	<=8.0
2444.40	21.9	16.4	3.5	2.0	-59.2	<=8.0
2444.45	21.9	16.4	3.5	2.0	-59.2	<=8.0

11Mbps CHANNEL 6 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2444.50	22.0	16.4	3.6	2.0	-59.1	<=8.0
2444.55	23.3	16.4	4.9	2.0	-57.8	<=8.0
2444.60	23.4	16.4	5.0	2.0	-57.7	<=8.0
2444.65	23.6	16.4	5.2	2.0	-57.5	<=8.0
2444.70	24.0	16.4	5.6	2.0	-57.1	<=8.0
2444.75	24.0	16.4	5.6	2.0	-57.1	<=8.0
2444.80	23.9	16.4	5.5	2.0	-57.2	<=8.0
2444.85	23.9	16.4	5.5	2.0	-57.2	<=8.0
2444.90	23.8	16.4	5.4	2.0	-57.3	<=8.0
2444.95	25.0	16.4	6.6	2.0	-56.1	<=8.0
2445.00	25.2	16.4	6.8	2.0	-55.9	<=8.0
2445.05	25.3	16.4	6.9	2.0	-55.8	<=8.0
2445.10	25.4	16.4	7.0	2.0	-55.7	<=8.0
2445.15	25.6	16.4	7.2	2.0	-55.5	<=8.0
2445.20	25.8	16.4	7.4	2.0	-55.3	<=8.0
2445.25	25.9	16.4	7.5	2.0	-55.2	<=8.0
2445.30	26.3	16.4	7.9	2.0	-54.8	<=8.0
2445.35	26.5	16.4	8.1	2.0	-54.6	<=8.0
2445.40	26.6	16.4	8.2	2.0	-54.5	<=8.0
2445.45	26.5	16.4	8.1	2.0	-54.6	<=8.0
2445.50	26.3	16.4	7.9	2.0	-54.8	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2453.50	25.4	16.4	7.0	2.0	-55.2	<=8.0
2453.55	24.7	16.4	6.3	2.0	-55.9	<=8.0
2453.60	24.2	16.4	5.8	2.0	-56.4	<=8.0
2453.65	24.0	16.4	5.6	2.0	-56.6	<=8.0
2453.70	24.0	16.4	5.6	2.0	-56.6	<=8.0
2453.75	24.2	16.4	5.8	2.0	-56.4	<=8.0
2453.80	24.3	16.4	5.9	2.0	-56.3	<=8.0
2453.85	24.3	16.4	5.9	2.0	-56.3	<=8.0
2453.90	24.2	16.4	5.8	2.0	-56.4	<=8.0
2453.95	24.2	16.4	5.8	2.0	-56.4	<=8.0
2454.00	24.0	16.4	5.6	2.0	-56.6	<=8.0
2454.05	24.4	16.4	6.0	2.0	-56.2	<=8.0
2454.10	24.4	16.4	6.0	2.0	-56.2	<=8.0
2454.15	24.4	16.4	6.0	2.0	-56.2	<=8.0
2454.20	24.6	16.4	6.2	2.0	-56.0	<=8.0
2454.25	24.5	16.4	6.1	2.0	-56.1	<=8.0
2454.30	23.7	16.4	5.3	2.0	-56.9	<=8.0
2454.35	23.7	16.4	5.3	2.0	-56.9	<=8.0
2454.40	23.6	16.4	5.2	2.0	-57.0	<=8.0
2454.45	23.2	16.4	4.8	2.0	-57.4	<=8.0
2454.50	23.3	16.4	4.9	2.0	-57.3	<=8.0
2454.55	23.2	16.4	4.8	2.0	-57.4	<=8.0
2454.60	22.8	16.4	4.4	2.0	-57.8	<=8.0
2454.65	21.9	16.4	3.5	2.0	-58.7	<=8.0
2454.70	22.3	16.4	3.9	2.0	-58.3	<=8.0
2454.75	22.1	16.4	3.7	2.0	-58.5	<=8.0
2454.80	22.0	16.4	3.6	2.0	-58.6	<=8.0
2454.85	20.4	16.4	2.0	2.0	-60.2	<=8.0
2454.90	20.8	16.4	2.4	2.0	-59.8	<=8.0
2454.95	20.7	16.4	2.3	2.0	-59.9	<=8.0
2455.00	21.0	16.4	2.6	2.0	-59.6	<=8.0
2455.05	21.0	16.4	2.6	2.0	-59.6	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2455.10	20.7	16.4	2.3	2.0	-59.9	<=8.0
2455.15	19.9	16.4	1.5	2.0	-60.7	<=8.0
2455.20	20.0	16.4	1.6	2.0	-60.6	<=8.0
2455.25	20.0	16.4	1.6	2.0	-60.6	<=8.0
2455.30	19.4	16.4	1.0	2.0	-61.2	<=8.0
2455.35	19.4	16.4	1.0	2.0	-61.2	<=8.0
2455.40	19.2	16.4	0.8	2.0	-61.4	<=8.0
2455.45	19.0	16.4	0.6	2.0	-61.6	<=8.0
2455.50	18.8	16.4	0.4	2.0	-61.8	<=8.0
2455.55	18.8	16.4	0.4	2.0	-61.8	<=8.0
2455.60	18.8	16.4	0.4	2.0	-61.8	<=8.0
2455.65	18.4	16.4	0.0	2.0	-62.2	<=8.0
2455.70	18.2	16.4	-0.2	2.0	-62.4	<=8.0
2455.75	17.5	16.4	-0.9	2.0	-63.1	<=8.0
2455.80	17.5	16.4	-0.9	2.0	-63.1	<=8.0
2455.85	17.0	16.4	-1.4	2.0	-63.6	<=8.0
2455.90	17.2	16.4	-1.2	2.0	-63.4	<=8.0
2455.95	17.0	16.4	-1.4	2.0	-63.6	<=8.0
2456.00	17.0	16.4	-1.4	2.0	-63.6	<=8.0
2456.05	16.8	16.4	-1.6	2.0	-63.8	<=8.0
2456.10	16.9	16.4	-1.5	2.0	-63.7	<=8.0
2456.15	16.6	16.4	-1.8	2.0	-64.0	<=8.0
2456.20	16.5	16.4	-1.9	2.0	-64.1	<=8.0
2456.25	16.5	16.4	-1.9	2.0	-64.1	<=8.0
2456.30	16.7	16.4	-1.7	2.0	-63.9	<=8.0
2456.35	16.5	16.4	-1.9	2.0	-64.1	<=8.0
2456.40	16.1	16.4	-2.3	2.0	-64.5	<=8.0
2456.45	16.0	16.4	-2.4	2.0	-64.6	<=8.0
2456.50	15.9	16.4	-2.5	2.0	-64.7	<=8.0
2456.55	15.8	16.4	-2.6	2.0	-64.8	<=8.0
2456.60	15.7	16.4	-2.7	2.0	-64.9	<=8.0
2456.65	15.4	16.4	-3.0	2.0	-65.2	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2456.70	15.4	16.4	-3.0	2.0	-65.2	<=8.0
2456.75	15.2	16.4	-3.2	2.0	-65.4	<=8.0
2456.80	15.1	16.4	-3.3	2.0	-65.5	<=8.0
2456.85	14.9	16.4	-3.5	2.0	-65.7	<=8.0
2456.90	15.1	16.4	-3.3	2.0	-65.5	<=8.0
2456.95	15.1	16.4	-3.3	2.0	-65.5	<=8.0
2457.00	15.1	16.4	-3.3	2.0	-65.5	<=8.0
2457.05	15.1	16.4	-3.3	2.0	-65.5	<=8.0
2457.10	15.0	16.4	-3.4	2.0	-65.6	<=8.0
2457.15	14.9	16.4	-3.5	2.0	-65.7	<=8.0
2457.20	14.9	16.4	-3.5	2.0	-65.7	<=8.0
2457.25	14.9	16.4	-3.5	2.0	-65.7	<=8.0
2457.30	14.9	16.4	-3.5	2.0	-65.7	<=8.0
2457.35	14.7	16.4	-3.7	2.0	-65.9	<=8.0
2457.40	14.4	16.4	-4.0	2.0	-66.2	<=8.0
2457.45	14.5	16.4	-3.9	2.0	-66.1	<=8.0
2457.50	14.7	16.4	-3.7	2.0	-65.9	<=8.0
2457.55	14.7	16.4	-3.7	2.0	-65.9	<=8.0
2457.60	14.5	16.4	-3.9	2.0	-66.1	<=8.0
2457.65	14.4	16.4	-4.0	2.0	-66.2	<=8.0
2457.70	14.3	16.4	-4.1	2.0	-66.3	<=8.0
2457.75	14.3	16.4	-4.1	2.0	-66.3	<=8.0
2457.80	14.1	16.4	-4.3	2.0	-66.5	<=8.0
2457.85	13.9	16.4	-4.5	2.0	-66.7	<=8.0
2457.90	13.5	16.4	-4.9	2.0	-67.1	<=8.0
2457.95	13.7	16.4	-4.7	2.0	-66.9	<=8.0
2458.00	13.7	16.4	-4.7	2.0	-66.9	<=8.0
2458.05	13.6	16.4	-4.8	2.0	-67.0	<=8.0
2458.10	13.6	16.4	-4.8	2.0	-67.0	<=8.0
2458.15	13.6	16.4	-4.8	2.0	-67.0	<=8.0
2458.20	13.5	16.4	-4.9	2.0	-67.1	<=8.0
2458.25	13.5	16.4	-4.9	2.0	-67.1	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2458.30	13.7	16.4	-4.7	2.0	-66.9	<=8.0
2458.35	13.7	16.4	-4.7	2.0	-66.9	<=8.0
2458.40	13.6	16.4	-4.8	2.0	-67.0	<=8.0
2458.45	13.5	16.4	-4.9	2.0	-67.1	<=8.0
2458.50	13.4	16.4	-5.0	2.0	-67.2	<=8.0
2458.55	13.5	16.4	-4.9	2.0	-67.1	<=8.0
2458.60	13.3	16.4	-5.1	2.0	-67.3	<=8.0
2458.65	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2458.70	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2458.75	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2458.80	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2458.85	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2458.90	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2458.95	13.2	16.4	-5.2	2.0	-67.4	<=8.0
2459.00	13.3	16.4	-5.1	2.0	-67.3	<=8.0
2459.05	13.4	16.4	-5.0	2.0	-67.2	<=8.0
2459.10	13.3	16.4	-5.1	2.0	-67.3	<=8.0
2459.15	13.2	16.4	-5.2	2.0	-67.4	<=8.0
2459.20	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2459.25	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2459.30	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2459.35	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2459.40	12.4	16.4	-6.0	2.0	-68.2	<=8.0
2459.45	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2459.50	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2459.55	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2459.60	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2459.65	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2459.70	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2459.75	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2459.80	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2459.85	12.6	16.4	-5.8	2.0	-68.0	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2459.90	12.3	16.4	-6.1	2.0	-68.3	<=8.0
2459.95	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2460.00	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2460.05	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2460.10	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2460.15	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2460.20	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2460.25	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2460.30	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2460.35	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2460.40	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2460.45	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2460.50	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2460.55	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2460.60	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2460.65	12.4	16.4	-6.0	2.0	-68.2	<=8.0
2460.70	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2460.75	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2460.80	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2460.85	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2460.90	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2460.95	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2461.00	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2461.05	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2461.10	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2461.15	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2461.20	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2461.25	13.2	16.4	-5.2	2.0	-67.4	<=8.0
2461.30	13.2	16.4	-5.2	2.0	-67.4	<=8.0
2461.35	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2461.40	12.4	16.4	-6.0	2.0	-68.2	<=8.0
2461.45	13.0	16.4	-5.4	2.0	-67.6	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2461.50	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2461.55	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2461.60	12.4	16.4	-6.0	2.0	-68.2	<=8.0
2461.65	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2461.70	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2461.75	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2461.80	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2461.85	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2461.90	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2461.95	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2462.00	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2462.05	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2462.10	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2462.15	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2462.20	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2462.25	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2462.30	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2462.35	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2462.40	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2462.45	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2462.50	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2462.55	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2462.60	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2462.65	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2462.70	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2462.75	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2462.80	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2462.85	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2462.90	12.1	16.4	-6.3	2.0	-68.5	<=8.0
2462.95	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2463.00	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2463.05	13.0	16.4	-5.4	2.0	-67.6	<=8.0



11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2463.10	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2463.15	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2463.20	13.2	16.4	-5.2	2.0	-67.4	<=8.0
2463.25	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2463.30	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2463.35	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2463.40	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2463.45	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2463.50	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2463.55	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2463.60	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2463.65	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2463.70	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2463.75	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2463.80	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2463.85	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2463.90	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2463.95	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2464.00	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2464.05	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2464.10	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2464.15	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2464.20	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2464.25	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2464.30	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2464.35	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2464.40	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2464.45	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2464.50	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2464.55	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2464.60	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2464.65	12.6	16.4	-5.8	2.0	-68.0	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2464.70	12.4	16.4	-6.0	2.0	-68.2	<=8.0
2464.75	12.3	16.4	-6.1	2.0	-68.3	<=8.0
2464.80	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2464.85	12.3	16.4	-6.1	2.0	-68.3	<=8.0
2464.90	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2464.95	12.6	16.4	-5.8	2.0	-68.0	<=8.0
2465.00	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2465.05	12.5	16.4	-5.9	2.0	-68.1	<=8.0
2465.10	12.8	16.4	-5.6	2.0	-67.8	<=8.0
2465.15	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2465.20	13.0	16.4	-5.4	2.0	-67.6	<=8.0
2465.25	13.3	16.4	-5.1	2.0	-67.3	<=8.0
2465.30	13.4	16.4	-5.0	2.0	-67.2	<=8.0
2465.35	13.4	16.4	-5.0	2.0	-67.2	<=8.0
2465.40	12.9	16.4	-5.5	2.0	-67.7	<=8.0
2465.45	13.2	16.4	-5.2	2.0	-67.4	<=8.0
2465.50	13.4	16.4	-5.0	2.0	-67.2	<=8.0
2465.55	13.5	16.4	-4.9	2.0	-67.1	<=8.0
2465.60	13.5	16.4	-4.9	2.0	-67.1	<=8.0
2465.65	12.7	16.4	-5.7	2.0	-67.9	<=8.0
2465.70	13.5	16.4	-4.9	2.0	-67.1	<=8.0
2465.75	13.6	16.4	-4.8	2.0	-67.0	<=8.0
2465.80	13.6	16.4	-4.8	2.0	-67.0	<=8.0
2465.85	13.1	16.4	-5.3	2.0	-67.5	<=8.0
2465.90	13.6	16.4	-4.8	2.0	-67.0	<=8.0
2465.95	13.8	16.4	-4.6	2.0	-66.8	<=8.0
2466.00	13.9	16.4	-4.5	2.0	-66.7	<=8.0
2466.05	14.0	16.4	-4.4	2.0	-66.6	<=8.0
2466.10	14.0	16.4	-4.4	2.0	-66.6	<=8.0
2466.15	13.6	16.4	-4.8	2.0	-67.0	<=8.0
2466.20	13.8	16.4	-4.6	2.0	-66.8	<=8.0
2466.25	14.0	16.4	-4.4	2.0	-66.6	<=8.0

11Mbps CHANNEL 11 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2466.30	13.9	16.4	-4.5	2.0	-66.7	$\leq 8.0$
2466.35	14.1	16.4	-4.3	2.0	-66.5	$\leq 8.0$
2466.40	14.1	16.4	-4.3	2.0	-66.5	$\leq 8.0$
2466.45	14.1	16.4	-4.3	2.0	-66.5	$\leq 8.0$
2466.50	14.4	16.4	-4.0	2.0	-66.2	$\leq 8.0$
2466.55	14.4	16.4	-4.0	2.0	-66.2	$\leq 8.0$
2466.60	14.4	16.4	-4.0	2.0	-66.2	$\leq 8.0$
2466.65	14.5	16.4	-3.9	2.0	-66.1	$\leq 8.0$
2466.70	14.5	16.4	-3.9	2.0	-66.1	$\leq 8.0$
2466.75	14.4	16.4	-4.0	2.0	-66.2	$\leq 8.0$
2466.80	14.4	16.4	-4.0	2.0	-66.2	$\leq 8.0$
2466.85	14.2	16.4	-4.2	2.0	-66.4	$\leq 8.0$
2466.90	14.2	16.4	-4.2	2.0	-66.4	$\leq 8.0$
2466.95	14.2	16.4	-4.2	2.0	-66.4	$\leq 8.0$
2467.00	14.4	16.4	-4.0	2.0	-66.2	$\leq 8.0$
2467.05	14.5	16.4	-3.9	2.0	-66.1	$\leq 8.0$
2467.10	14.6	16.4	-3.8	2.0	-66.0	$\leq 8.0$
2467.15	14.7	16.4	-3.7	2.0	-65.9	$\leq 8.0$
2467.20	14.8	16.4	-3.6	2.0	-65.8	$\leq 8.0$
2467.25	15.1	16.4	-3.3	2.0	-65.5	$\leq 8.0$
2467.30	15.4	16.4	-3.0	2.0	-65.2	$\leq 8.0$
2467.35	15.5	16.4	-2.9	2.0	-65.1	$\leq 8.0$
2467.40	15.3	16.4	-3.1	2.0	-65.3	$\leq 8.0$
2467.45	15.6	16.4	-2.8	2.0	-65.0	$\leq 8.0$
2467.50	15.6	16.4	-2.8	2.0	-65.0	$\leq 8.0$
2467.55	15.6	16.4	-2.8	2.0	-65.0	$\leq 8.0$
2467.60	15.7	16.4	-2.7	2.0	-64.9	$\leq 8.0$
2467.65	15.7	16.4	-2.7	2.0	-64.9	$\leq 8.0$
2467.70	15.8	16.4	-2.6	2.0	-64.8	$\leq 8.0$
2467.75	15.8	16.4	-2.6	2.0	-64.8	$\leq 8.0$
2467.80	16.0	16.4	-2.4	2.0	-64.6	$\leq 8.0$
2467.85	16.1	16.4	-2.3	2.0	-64.5	$\leq 8.0$

11Mbps CHANNEL 11 Processing Gain						
$G_p = (S/N)_o + M_j + L_{sys}$						
Freq.	$G_p$	$(S/N)_o$	$M_j=J/S$	$L_{sys}$	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2467.90	16.3	16.4	-2.1	2.0	-64.3	<=8.0
2467.95	16.3	16.4	-2.1	2.0	-64.3	<=8.0
2468.00	16.6	16.4	-1.8	2.0	-64.0	<=8.0
2468.05	16.8	16.4	-1.6	2.0	-63.8	<=8.0
2468.10	16.9	16.4	-1.5	2.0	-63.7	<=8.0
2468.15	16.9	16.4	-1.5	2.0	-63.7	<=8.0
2468.20	17.2	16.4	-1.2	2.0	-63.4	<=8.0
2468.25	17.1	16.4	-1.3	2.0	-63.5	<=8.0
2468.30	17.2	16.4	-1.2	2.0	-63.4	<=8.0
2468.35	17.3	16.4	-1.1	2.0	-63.3	<=8.0
2468.40	17.6	16.4	-0.8	2.0	-63.0	<=8.0
2468.45	17.6	16.4	-0.8	2.0	-63.0	<=8.0
2468.50	17.7	16.4	-0.7	2.0	-62.9	<=8.0
2468.55	17.7	16.4	-0.7	2.0	-62.9	<=8.0
2468.60	17.7	16.4	-0.7	2.0	-62.9	<=8.0
2468.65	17.7	16.4	-0.7	2.0	-62.9	<=8.0
2468.70	18.0	16.4	-0.4	2.0	-62.6	<=8.0
2468.75	17.9	16.4	-0.5	2.0	-62.7	<=8.0
2468.80	18.1	16.4	-0.3	2.0	-62.5	<=8.0
2468.85	18.1	16.4	-0.3	2.0	-62.5	<=8.0
2468.90	18.2	16.4	-0.2	2.0	-62.4	<=8.0
2468.95	18.7	16.4	0.3	2.0	-61.9	<=8.0
2469.00	19.1	16.4	0.7	2.0	-61.5	<=8.0
2469.05	19.1	16.4	0.7	2.0	-61.5	<=8.0
2469.10	19.8	16.4	1.4	2.0	-60.8	<=8.0
2469.15	20.5	16.4	2.1	2.0	-60.1	<=8.0
2469.20	20.8	16.4	2.4	2.0	-59.8	<=8.0
2469.25	20.8	16.4	2.4	2.0	-59.8	<=8.0
2469.30	20.8	16.4	2.4	2.0	-59.8	<=8.0
2469.35	21.4	16.4	3.0	2.0	-59.2	<=8.0
2469.40	21.4	16.4	3.0	2.0	-59.2	<=8.0
2469.45	21.4	16.4	3.0	2.0	-59.2	<=8.0

11Mbps CHANNEL 11 Processing Gain						
Gp = (S/N)o + Mj + Lsys						
Freq.	Gp	(S/N)o	Mj=J/S	Lsys	Jammer	PER
(MHz)	(dB)	(dB)	(dB)	(dB)	(dBm)	(%)
2469.50	21.5	16.4	3.1	2.0	-59.1	<=8.0
2469.55	21.5	16.4	3.1	2.0	-59.1	<=8.0
2469.60	21.7	16.4	3.3	2.0	-58.9	<=8.0
2469.65	21.7	16.4	3.3	2.0	-58.9	<=8.0
2469.70	21.7	16.4	3.3	2.0	-58.9	<=8.0
2469.75	21.8	16.4	3.4	2.0	-58.8	<=8.0
2469.80	21.8	16.4	3.4	2.0	-58.8	<=8.0
2469.85	22.7	16.4	4.3	2.0	-57.9	<=8.0
2469.90	23.5	16.4	5.1	2.0	-57.1	<=8.0
2469.95	24.0	16.4	5.6	2.0	-56.6	<=8.0
2470.00	24.0	16.4	5.6	2.0	-56.6	<=8.0
2470.05	23.9	16.4	5.5	2.0	-56.7	<=8.0
2470.10	24.1	16.4	5.7	2.0	-56.5	<=8.0
2470.15	24.3	16.4	5.9	2.0	-56.3	<=8.0
2470.20	24.7	16.4	6.3	2.0	-55.9	<=8.0
2470.25	25.0	16.4	6.6	2.0	-55.6	<=8.0
2470.30	25.0	16.4	6.6	2.0	-55.6	<=8.0
2470.35	25.0	16.4	6.6	2.0	-55.6	<=8.0
2470.40	25.2	16.4	6.8	2.0	-55.4	<=8.0
2470.45	25.2	16.4	6.8	2.0	-55.4	<=8.0
2470.50	25.3	16.4	6.9	2.0	-55.3	<=8.0