

FCC Part 15C Measurement and Test Report

For

SEENDA TECHNOLOGY CO., LTD

906-908, DongMing building, Minzhi Avenue, Longhua, Shenzhen, China.

518131

FCC ID: HGO-IBT-04

FCC Rules:	<u>FCC Part 15.247</u>
Product Description:	<u>Bluetooth Speaking Mouse</u>
Tested Model:	<u>IBT-04</u>
Report No.:	<u>STR13068101I</u>
Tested Date:	<u>2013-06-08 to 2013-07-10</u>
Issued Date:	<u>2013-07-11</u>
Tested By:	<u>Daniel Liu / Engineer</u>
Reviewed By:	<u>Lahm Peng / EMC Manager</u>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>
Prepared By:	

SEM.Test Compliance Service Co., Ltd

3/F, Jinbao Commerce Building, Xin'an Fanshen Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION	9
5. FREQUENCY HOPPING SYSTEM REQUIREMENTS	10
5.1 STANDARD APPLICABLE.....	10
5.2 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	10
5.3 FREQUENCY HOPPING SYSTEM.....	11
6. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION	12
6.1 STANDARD APPLICABLE.....	12
6.2 TEST EQUIPMENT LIST AND DETAILS	12
6.3 TEST PROCEDURE.....	12
6.4 ENVIRONMENTAL CONDITIONS	12
6.5 SUMMARY OF TEST RESULTS/PLOTS	13
7. DWELL TIME OF HOPPING CHANNEL.....	20
7.1 STANDARD APPLICABLE.....	20
7.2 TEST EQUIPMENT LIST AND DETAILS	20
7.3 TEST PROCEDURE.....	20
7.4 ENVIRONMENTAL CONDITIONS	20
7.5 SUMMARY OF TEST RESULTS/PLOTS	21
8. 20DB BANDWIDTH.....	41
8.1 STANDARD APPLICABLE.....	41
8.2 TEST EQUIPMENT LIST AND DETAILS	41
8.3 TEST PROCEDURE.....	41
8.4 ENVIRONMENTAL CONDITIONS	41
8.5 SUMMARY OF TEST RESULTS/PLOTS	41
9. RF OUTPUT POWER	49
9.1 STANDARD APPLICABLE.....	49
9.2 TEST EQUIPMENT LIST AND DETAILS	49
9.3 TEST PROCEDURE.....	49
9.4 ENVIRONMENTAL CONDITIONS	49
9.5 SUMMARY OF TEST RESULTS/PLOTS	50
10. FIELD STRENGTH OF SPURIOUS EMISSIONS	52
10.1 MEASUREMENT UNCERTAINTY	52
10.2 STANDARD APPLICABLE.....	52
10.3 TEST EQUIPMENT LIST AND DETAILS	52
10.4 TEST PROCEDURE.....	53
10.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	53
10.6 ENVIRONMENTAL CONDITIONS	53
10.7 SUMMARY OF TEST RESULTS/PLOTS	54
11. OUT OF BAND EMISSIONS.....	71
11.1 STANDARD APPLICABLE.....	71
11.2 TEST EQUIPMENT LIST AND DETAILS	71
11.3 TEST PROCEDURE.....	71

11.4 ENVIRONMENTAL CONDITIONS72

11.5 SUMMARY OF TEST RESULTS/PLOTS72

12. CONDUCTED EMISSIONS80

12.1 MEASUREMENT UNCERTAINTY80

12.2 TEST EQUIPMENT LIST AND DETAILS80

12.3 TEST PROCEDURE.....80

12.4 BASIC TEST SETUP BLOCK DIAGRAM.....80

12.5 ENVIRONMENTAL CONDITIONS81

12.6 TEST RECEIVER SETUP81

12.7 SUMMARY OF TEST RESULTS/PLOTS81

12.8 CONDUCTED EMISSIONS TEST DATA.....81

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SEENDA TECHNOLOGY CO., LTD
Address of applicant: 906-908, DongMing building, Minzhi Avenue, Longhua, Shenzhen, China. 518131
Manufacturer: SEENDA TECHNOLOGY CO.,LTD
Address of manufacturer: 906-908, DongMing building, Minzhi Avenue, Longhua, Shenzhen, China. 518131

General Description of EUT

Product Name:	Bluetooth Speaking Mouse
Trade Name:	/
Model No.:	IBT-04
Rated Voltage:	Charging: DC 5V, Battery: 3.7V

Note: The test data is gathered from a production sample, provided by the manufacturer.

Technical Characteristics of EUT

Support Standards:	Bluetooth 3.0
Frequency Range:	2402-2480MHz
RF Output Power:	-1.35 dBm (Conducted) for Mouse 0.83 dBm (Conducted) for Audio
Data Rate:	GFSK, Pi/4 DQPSK, 8DPSK
Modulation:	1Mbps, 2Mbps, 3Mbps
Quantity of Channels:	79
Channel Separation:	1MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi
Lowest Internal Frequency of EUT:	16 MHz
Device Category:	Portable Device

1.2 Test Standards

The following report is prepared on behalf of the SEENDA TECHNOLOGY CO., LTD in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The public notice DA 00-705 for frequency hopping spread spectrum systems shall be performed also.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2480MHz
TM4	Hopping	2402-2480MHz

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
Pi/4 DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	379
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021

Note: The bluetooth has been tested on the modulation of GFSK, (Pi/4)DQPSK and 8DPSK, compliance test and record the worst case.

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Core

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E23	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)	Channel Separation	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§ 15.247(a)	20dB Bandwidth	Compliant
§ 15.247(b)(1)	Power Output	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§ 15.247(a)(1)	Frequency Hopping Sequence	Compliant
§ 15.247(g), (h)	Frequency Hopping System	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

According to the KDB-447498 D01 V05, the following RF exposure evaluation shall to demonstrate RF exposure compliance.

3.2 Test Result

This product complied with the requirement of the RF exposure.

Bluetooth

Tx frequency range: 2402~2480MHz

Device category: Portable device (Distance: 5mm)

Maximum Conducted Output Power: -1.35 dBm (Mouse) 0.83 dBm (Audio)

Maximum Antenna Gain: 0 dBi

Maximum EIRP Output Power: 0.73 mW(Mouse), 1.21 mW(Audio)

Limit: 10mW

Source-based time-averaged Max EIRP output power is 1.21 mW < 10 mW

So the transmitter complies with the RF exposure requirements and the SAR is not required.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

5. Frequency Hopping System Requirements

5.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


5.2 EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.


Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

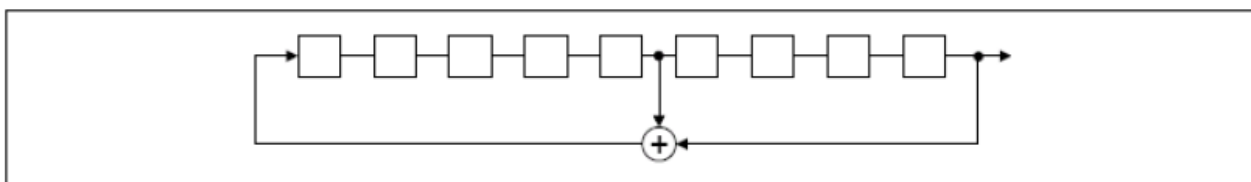

Linear Feedback Shift Register for Generation of the PRBS sequence

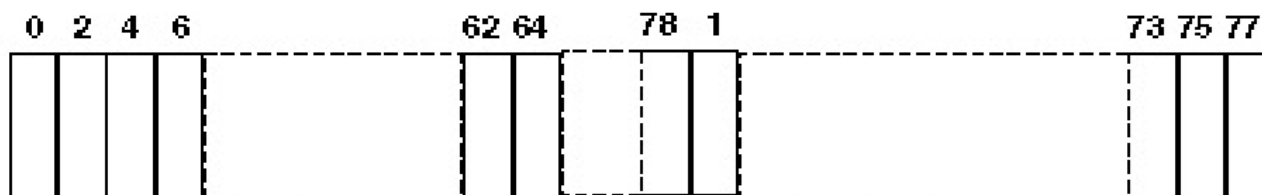

Each frequency used equally on the average by each transmitter.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

5.3 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

6. Quantity of Hopping Channels and Channel Separation

6.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

6.3 Test Procedure

According to the DA 00-705, the number of hopping frequencies test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = the frequency band of operation (2400MHz to 2483.5MHz)

RBW = 100kHz, VBW = 100kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize, observed the band of 2400MHz to 2483.5MHz, than count it out the number of channels for comparing with the FCC rules.

The channel spacing test method as follows:

Set span = wide enough to capture the peaks of two adjacent channels

Other setting as above

Allow the trace to stabilize, Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

6.4 Environmental Conditions


Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

6.5 Summary of Test Results/Plots


Test mode: GFSK DH1

No. of Channel = 79


For Mouse

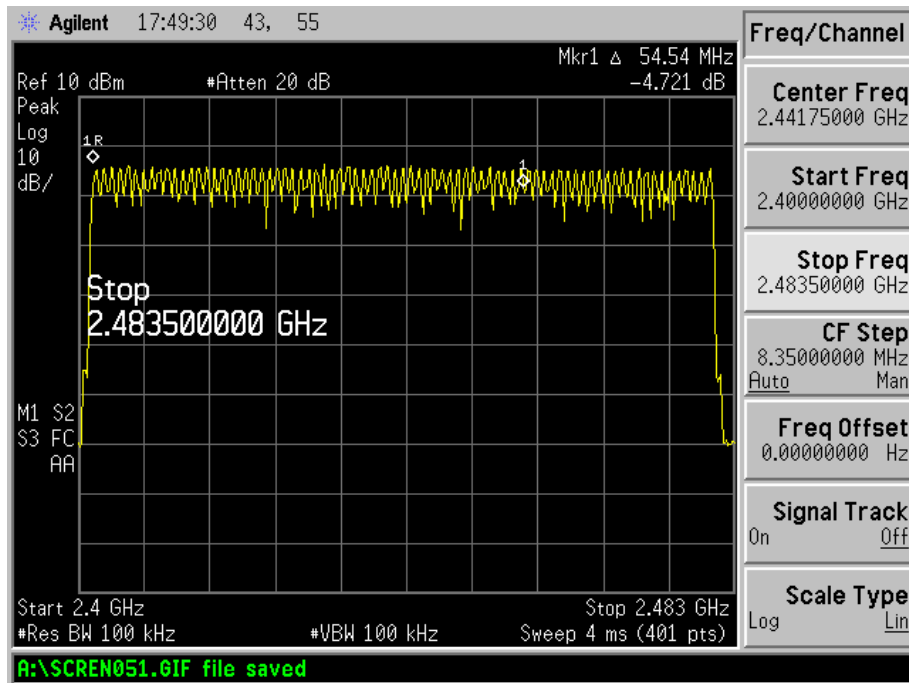


For Audio

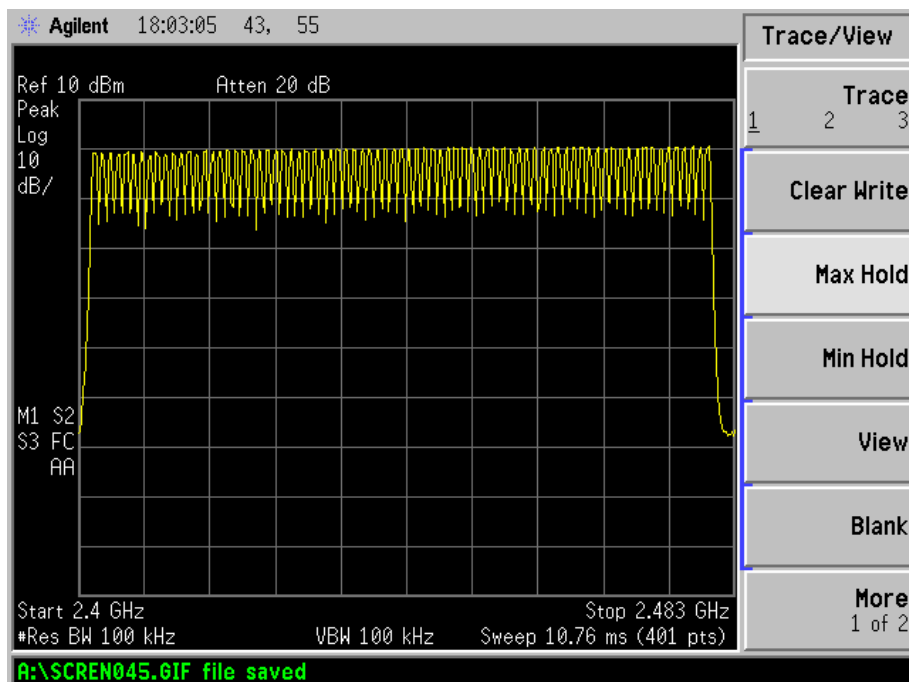

For GFSK
Channel Spacing (Low CH=1MHz)
For Mouse

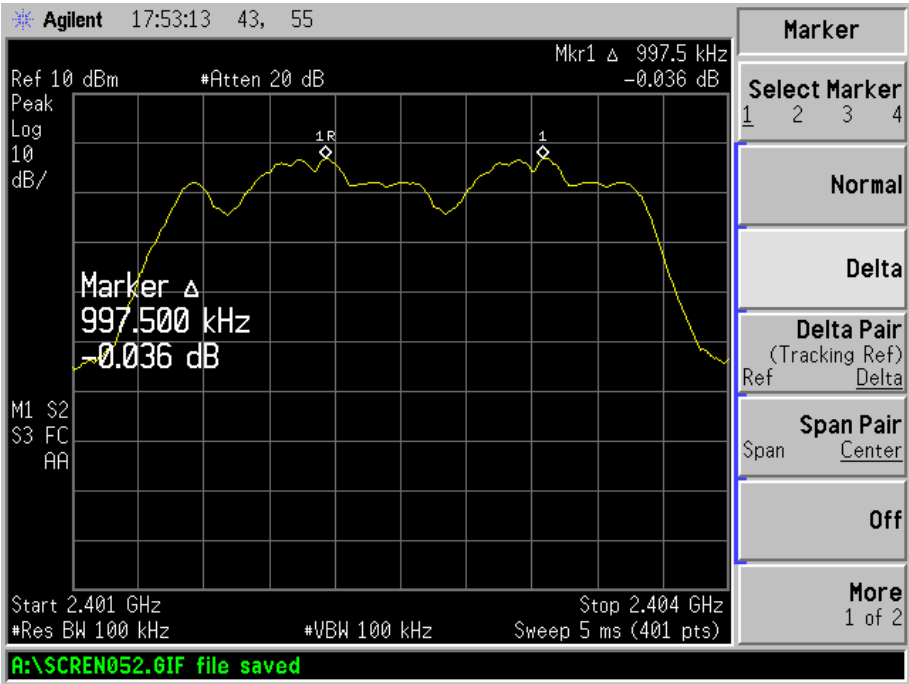


For Audio

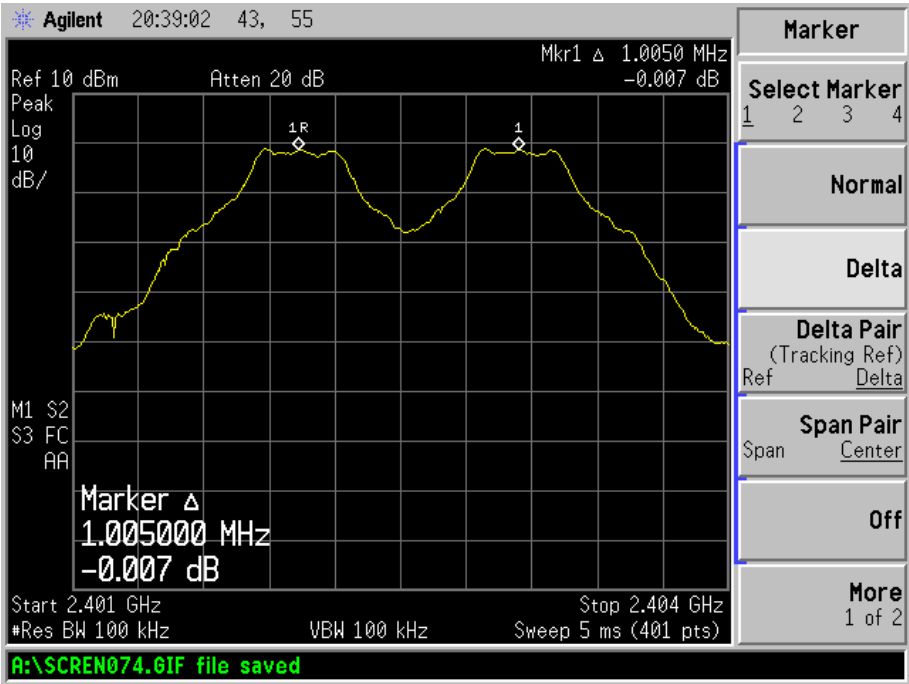


Channel Spacing (Middle CH=1MHz)

For Mouse

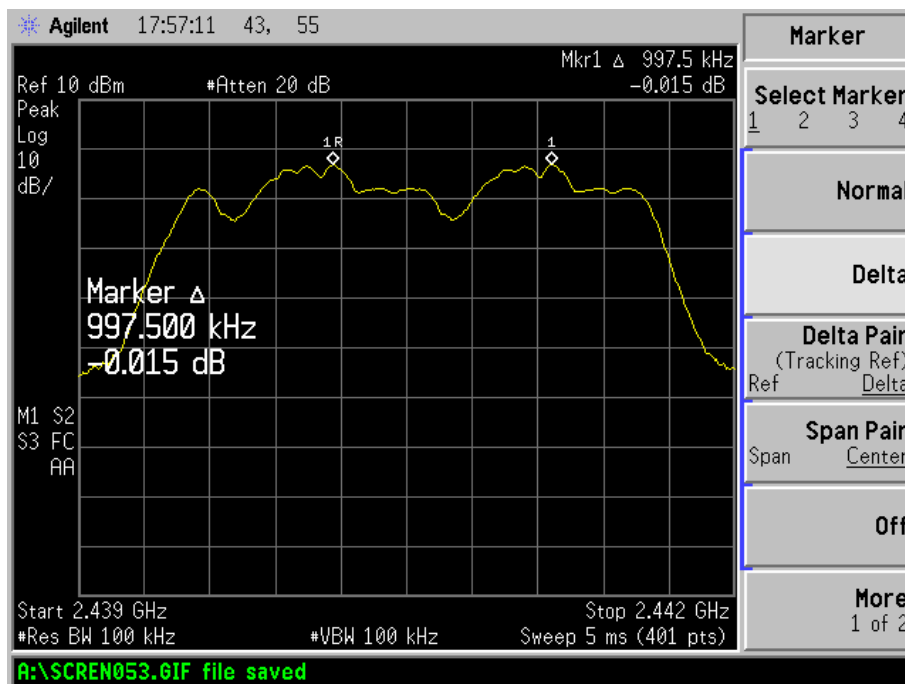


For Audio

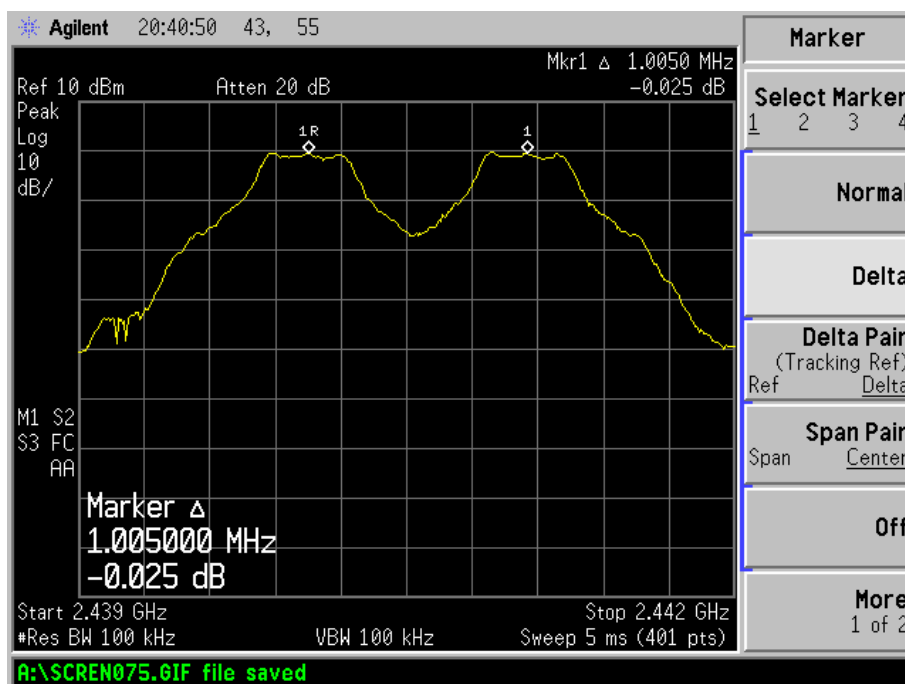


Channel Spacing (High CH=1MHz)


For Mouse

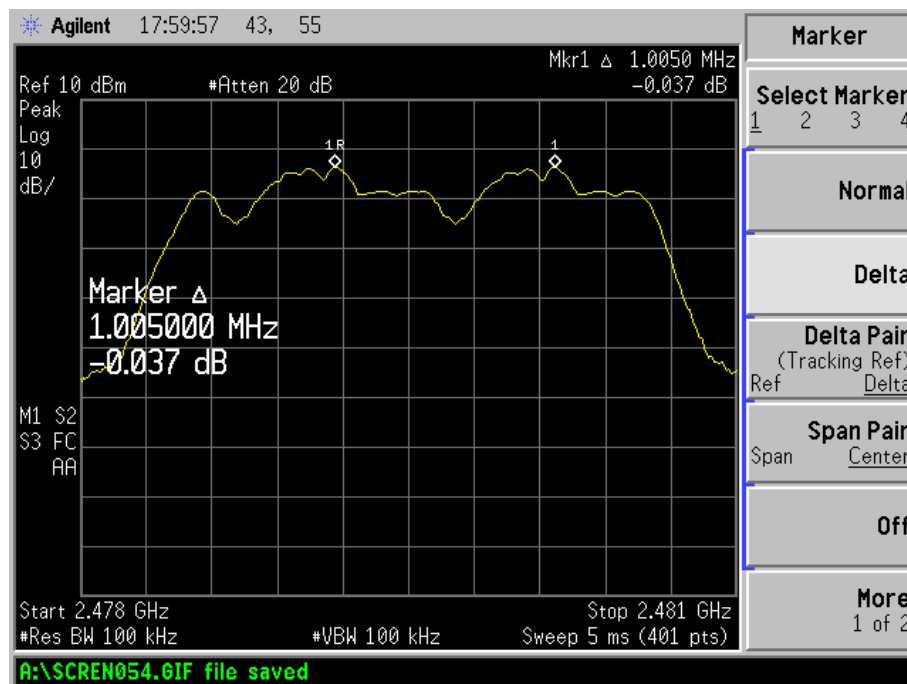


For Audio

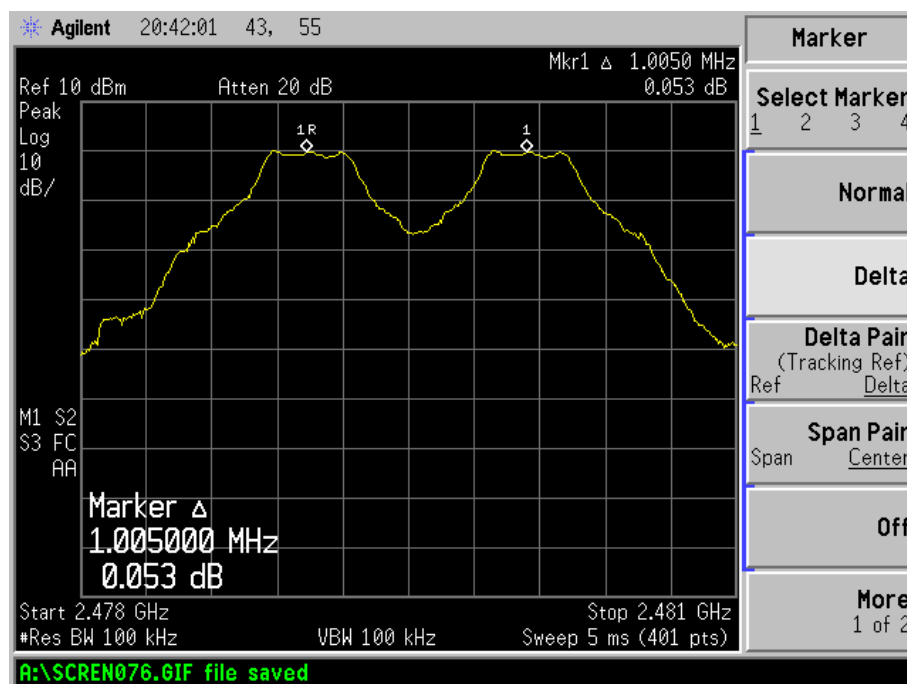


For 8DPSK
Channel Spacing (Low CH=1MHz)
For Mouse

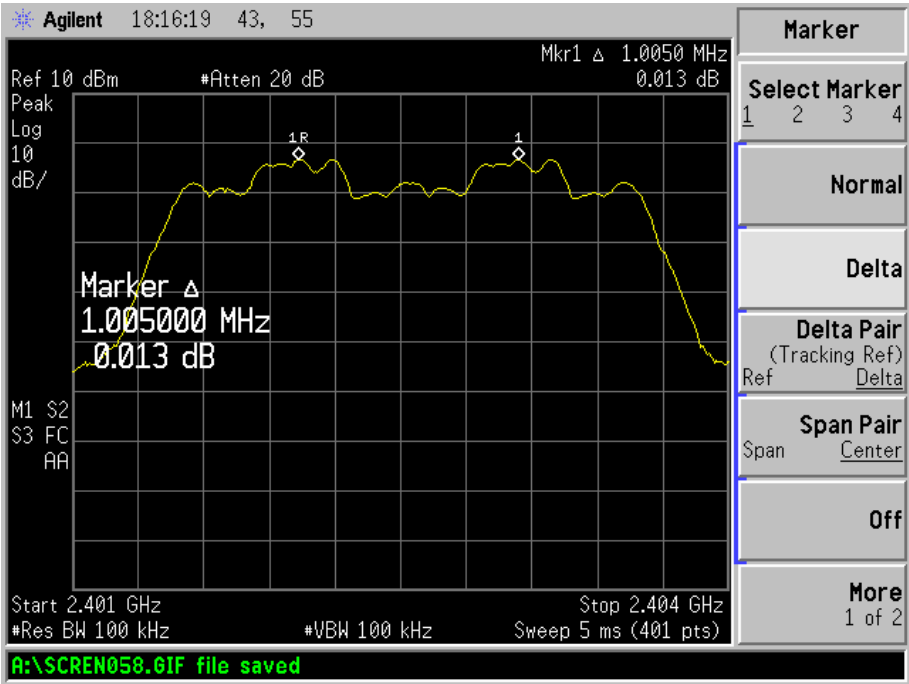


For Audio

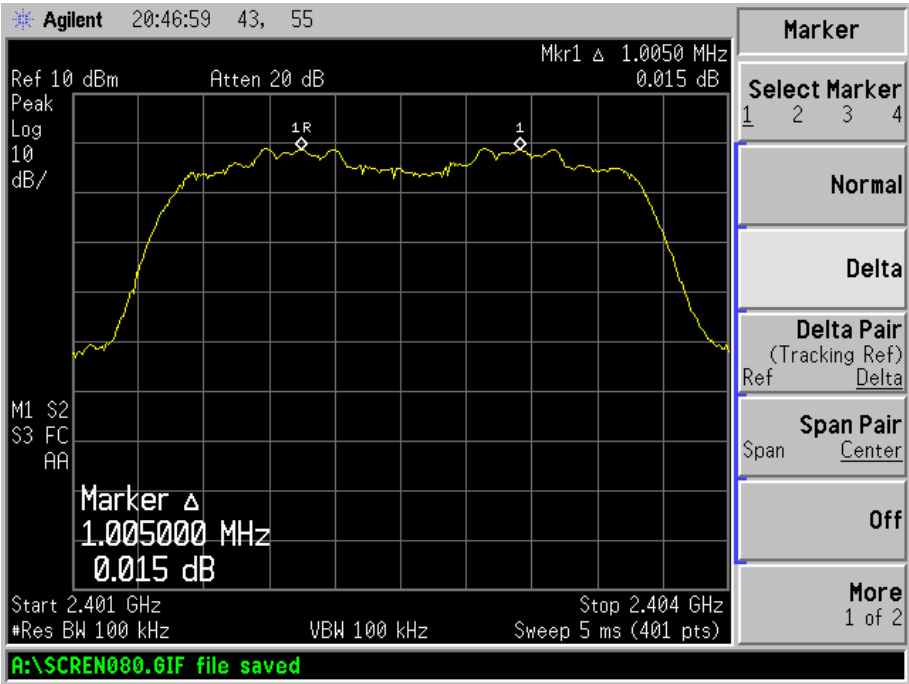

Channel Spacing (Middle CH=1MHz)
For Mouse

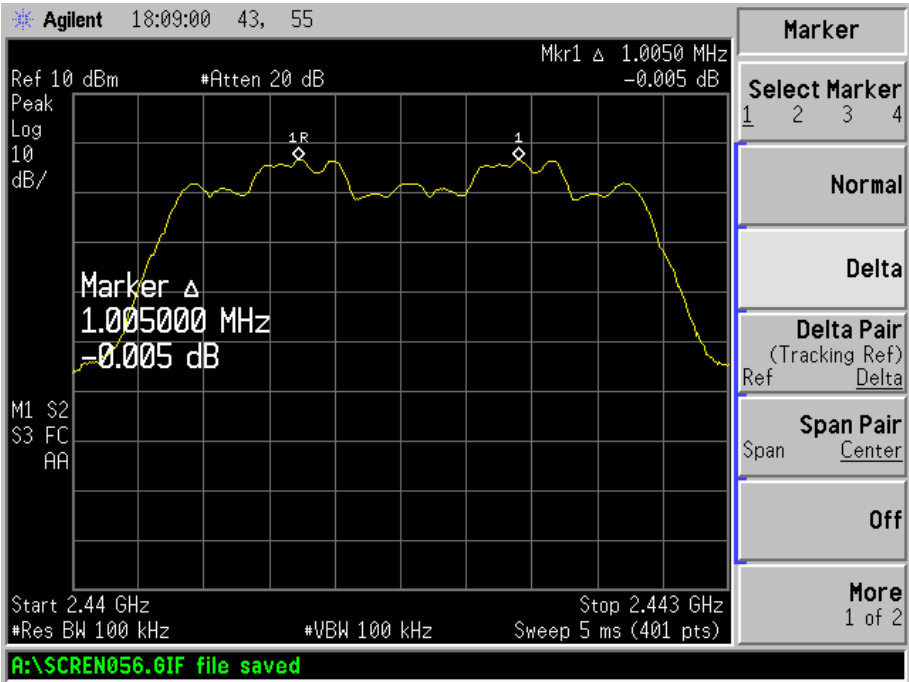


For Audio

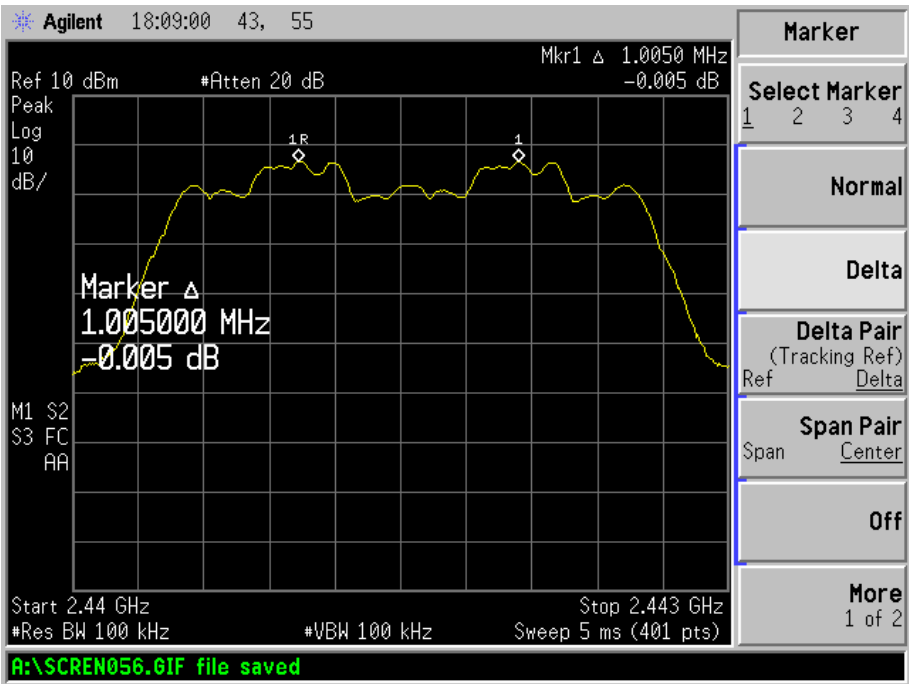


Channel Spacing (High CH=1MHz)

For Mouse

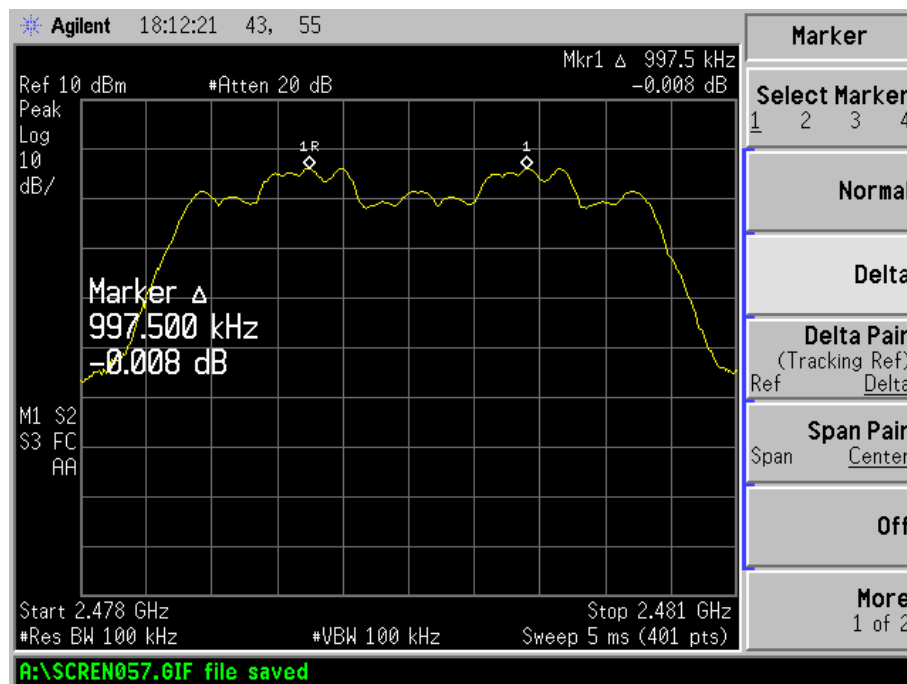

For Audio

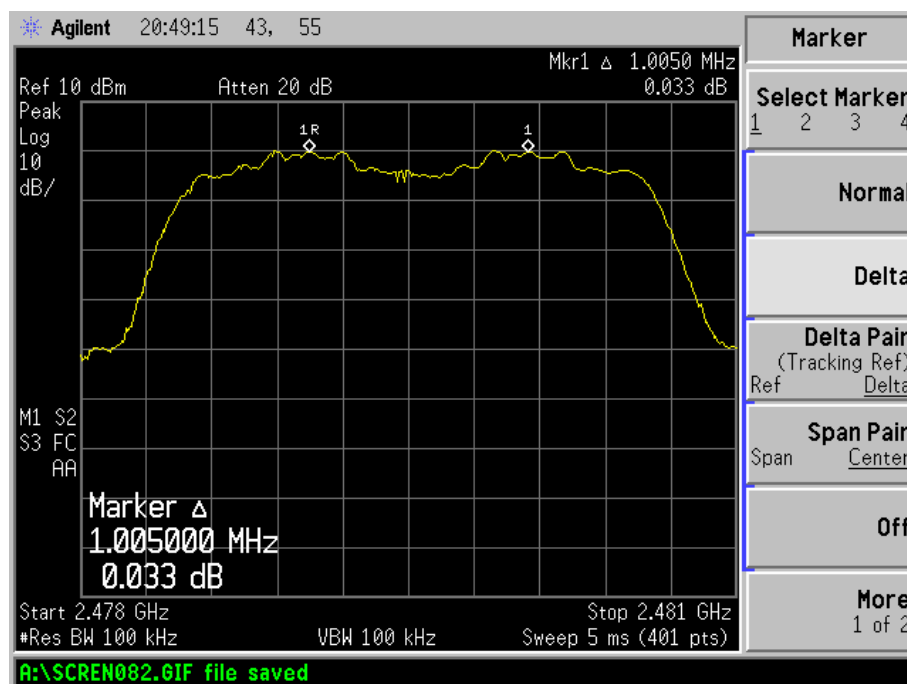

7. Dwell Time of Hopping Channel

7.1 Standard Applicable

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

7.3 Test Procedure

According to the DA 00-705, the dwell time of a hopping channel test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = zero span, centered on a hopping channel

RBW = 1MHz, VBW = 1MHz

Sweep = auto

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the dwell time

7.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

7.5 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length).

Test data is corrected with the worse case, which the packet length is DH1, DH3, and DH5.

The test period: $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$

Dwell time = time slot length * (Hopping rate / Number of hopping channels) * Period

For Mouse

Modulation	Test Channel	Packet	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	2402MHz	DH1	0.39	124.8	400
		DH3	1.64	262.4	400
		DH5	2.88	307.2	400
	2441MHz	DH1	0.39	124.8	400
		DH3	1.63	260.8	400
		DH5	2.89	308.3	400
	2480MHz	DH1	0.38	121.6	400
		DH3	1.63	260.8	400
		DH5	2.89	308.3	400
8DPSK	2402MHz	3DH1	0.39	124.8	400
		3DH3	1.63	260.8	400
		3DH5	2.89	308.3	400
	2441MHz	3DH1	0.39	124.8	400
		3DH3	1.63	260.8	400
		3DH5	2.89	308.3	400
	2480MHz	3DH1	0.38	121.6	400
		3DH3	1.64	262.4	400
		3DH5	2.89	308.3	400



For Audio


Modulation	Test Channel	Packet	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	2402MHz	DH1	0.380	121.6	400
		DH3	1.640	262.4	400
		DH5	2.880	307.2	400
	2441MHz	DH1	0.380	121.6	400
		DH3	1.640	262.4	400
		DH5	2.890	308.3	400
	2480MHz	DH1	0.380	121.6	400
		DH3	1.630	260.8	400
		DH5	2.890	308.3	400
8DPSK	2402MHz	3DH1	0.390	124.8	400
		3DH3	1.630	260.8	400
		3DH5	2.880	307.2	400
	2441MHz	3DH1	0.390	124.8	400
		3DH3	1.630	260.8	400
		3DH5	2.890	308.3	400
	2480MHz	3DH1	0.390	124.8	400
		3DH3	1.630	260.8	400
		3DH5	2.890	308.3	400

Please refer to the test plots as below:


DH1 time slot (Low, Middle, High Channels)



For Mouse

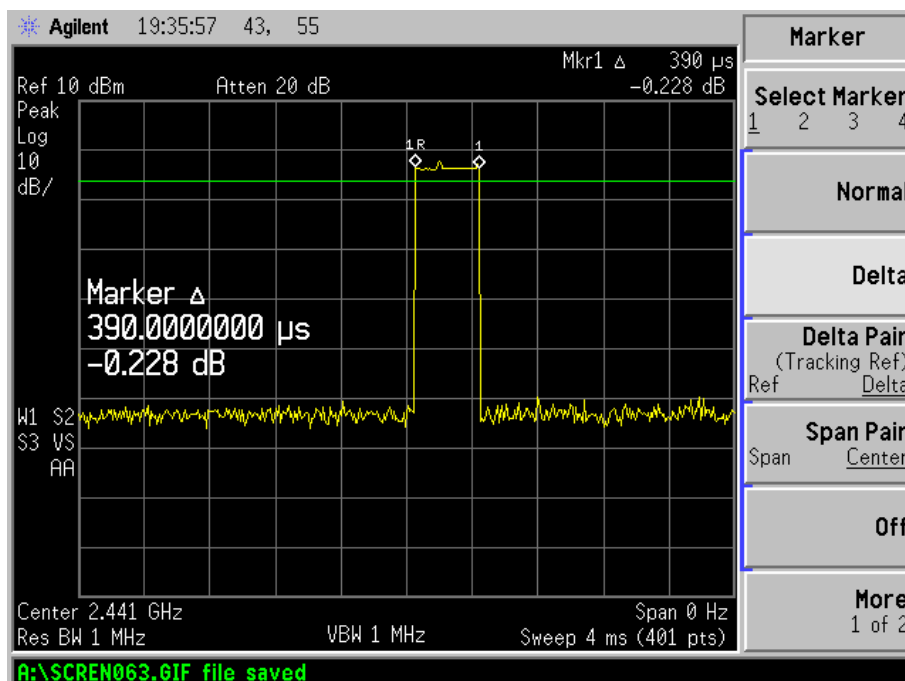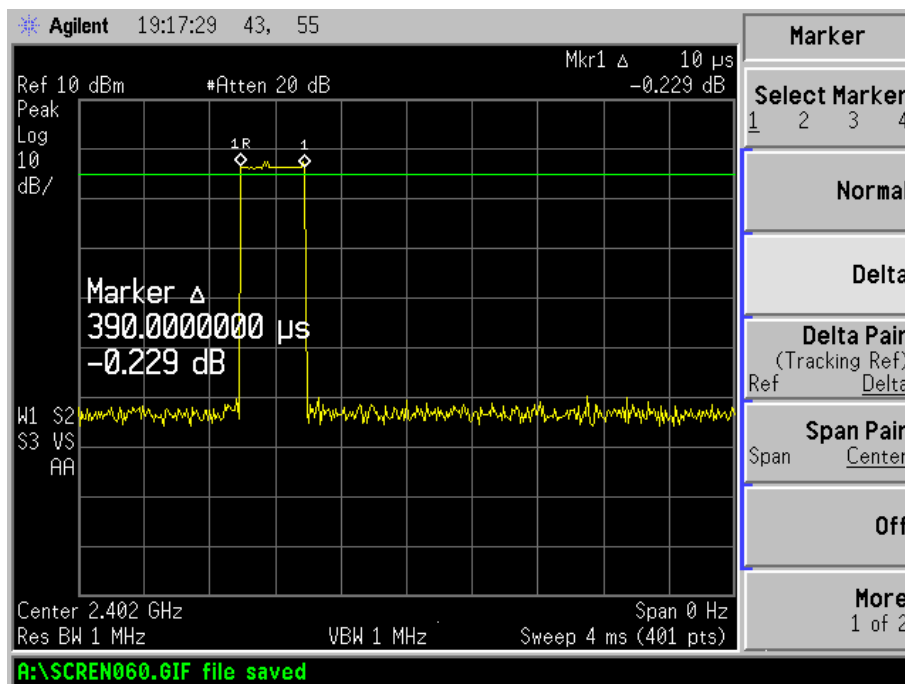

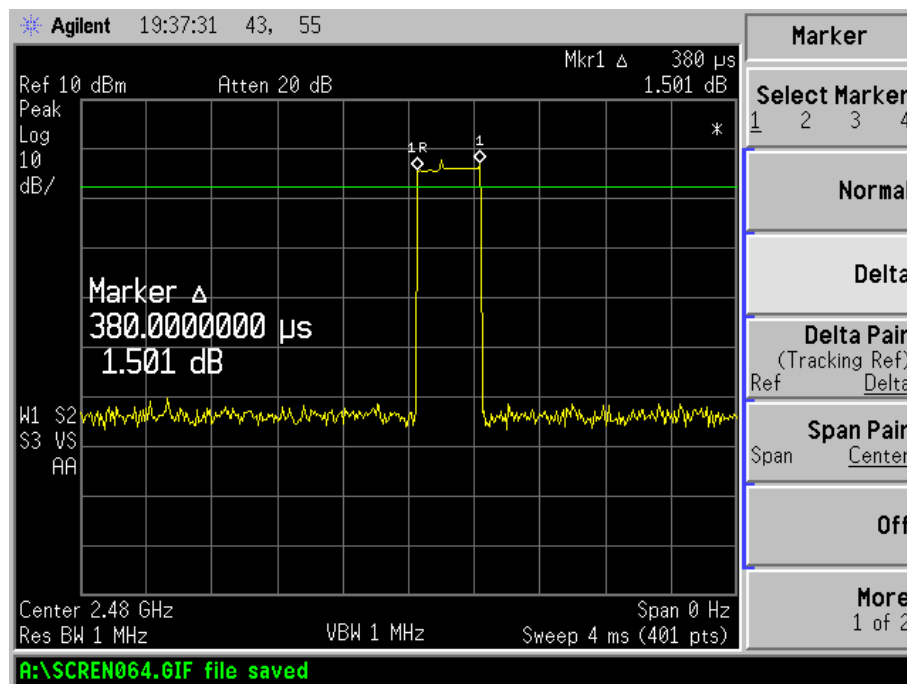



For Audio

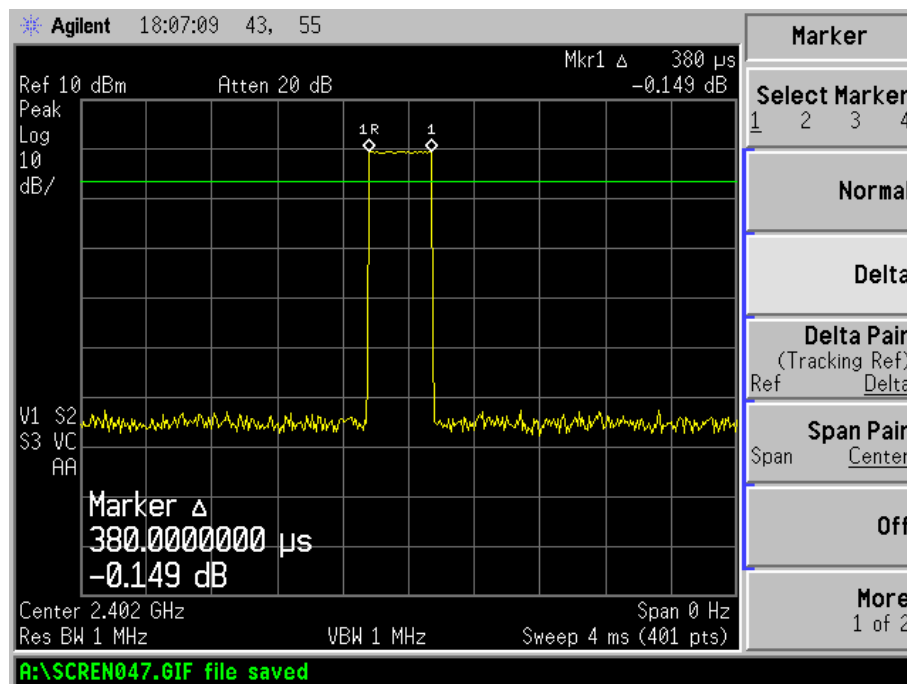


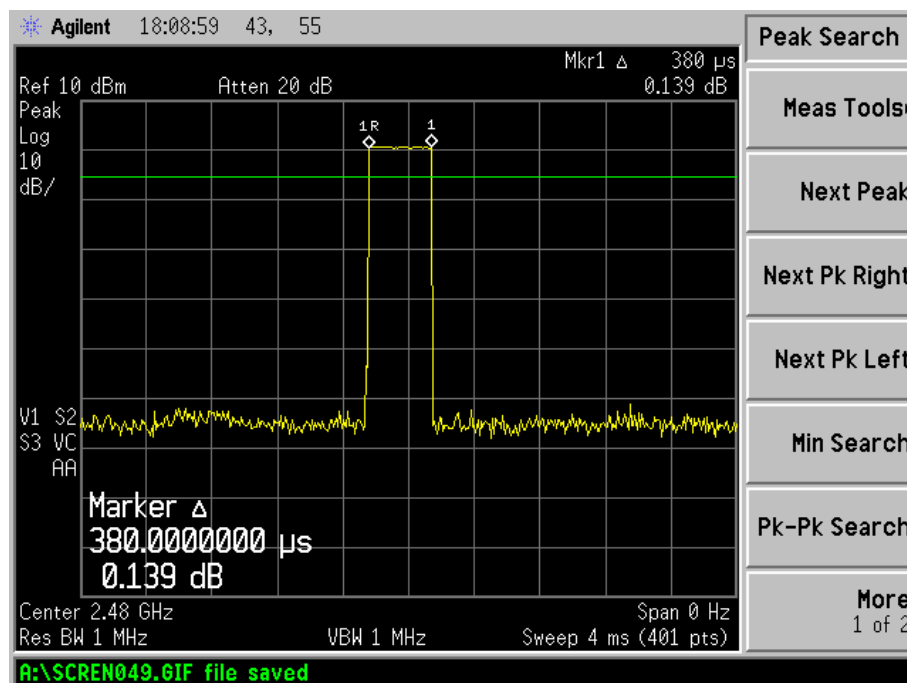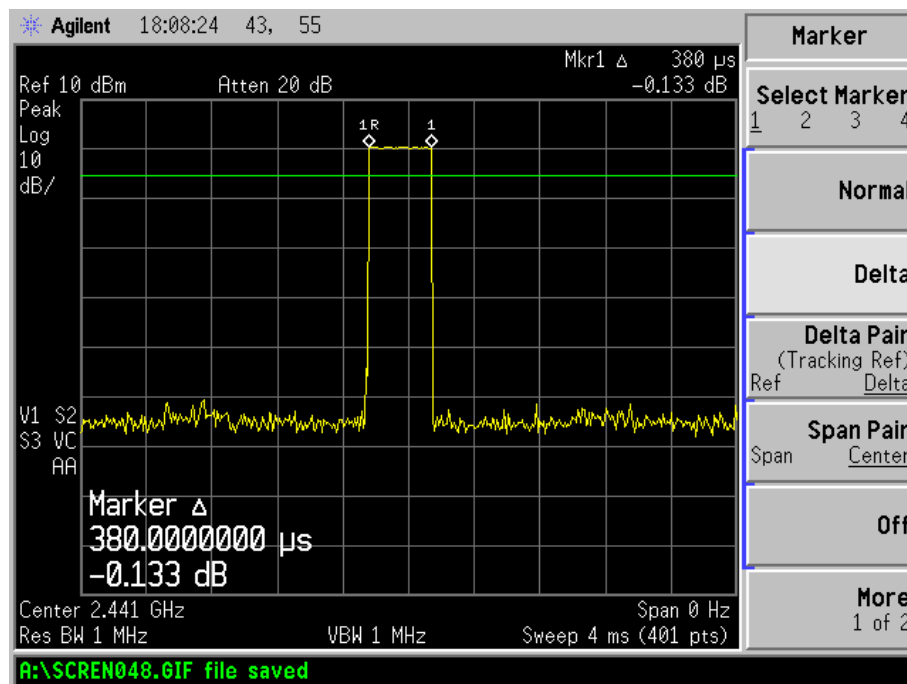


DH3 time slot (Low, Middle, High Channels)



For Mouse

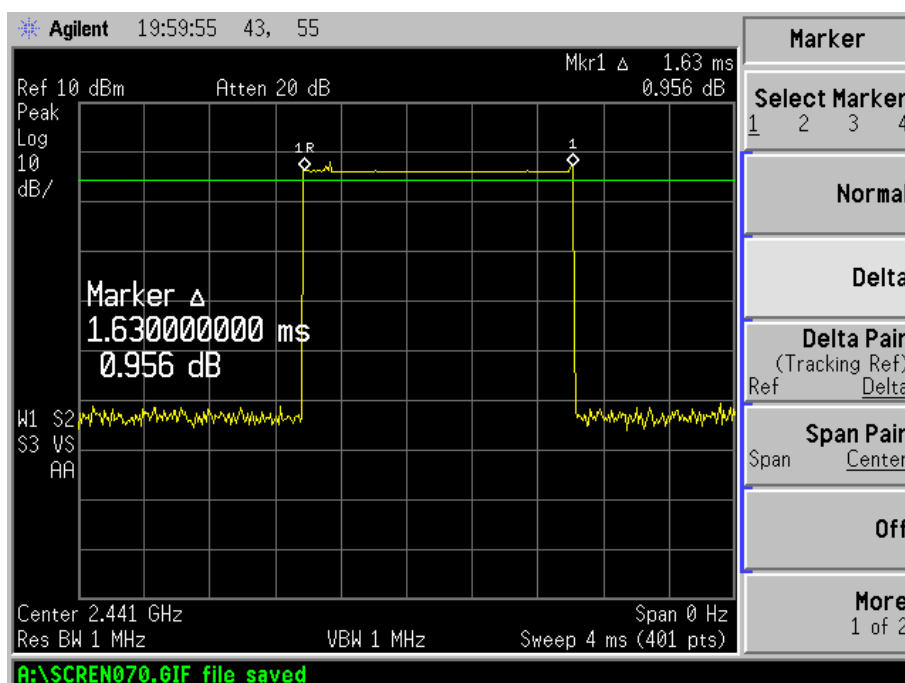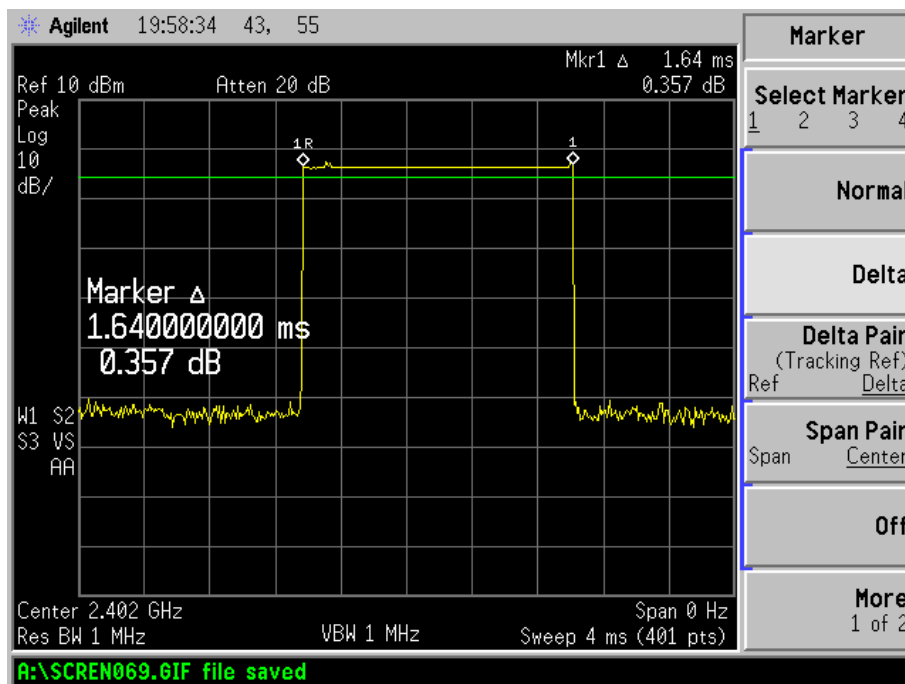

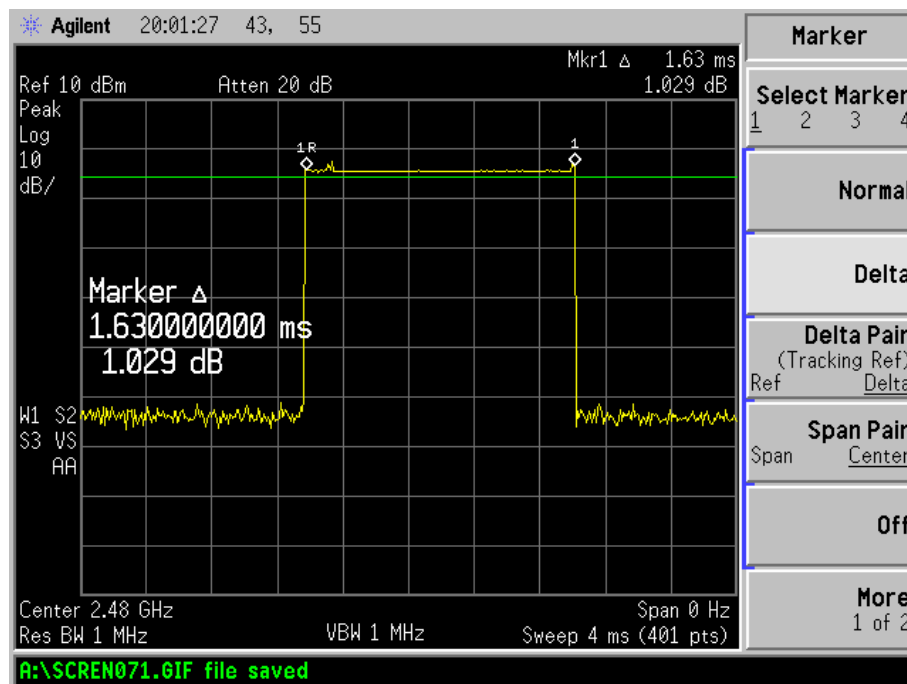



For Audio

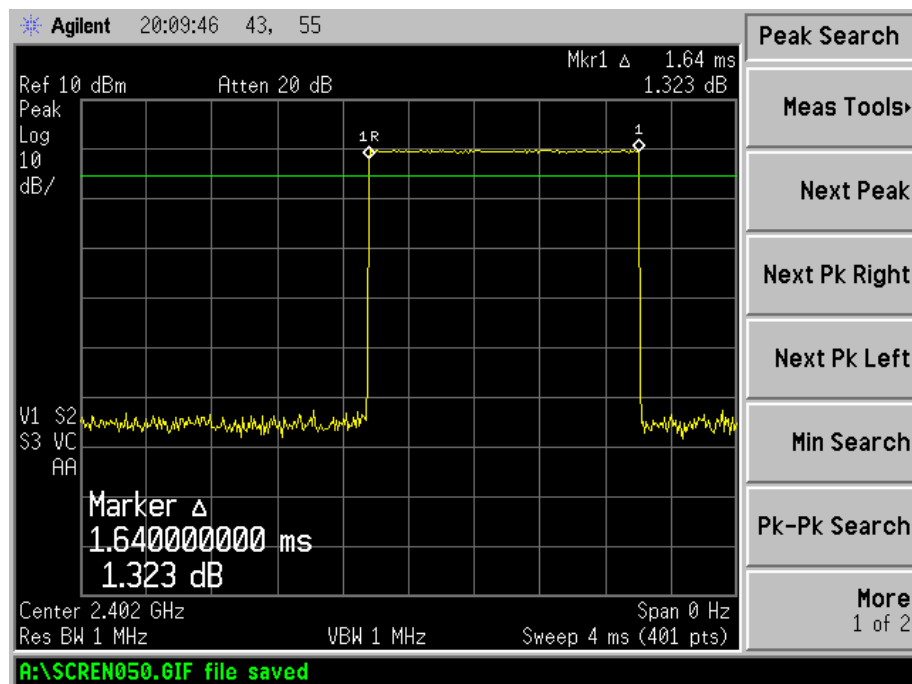


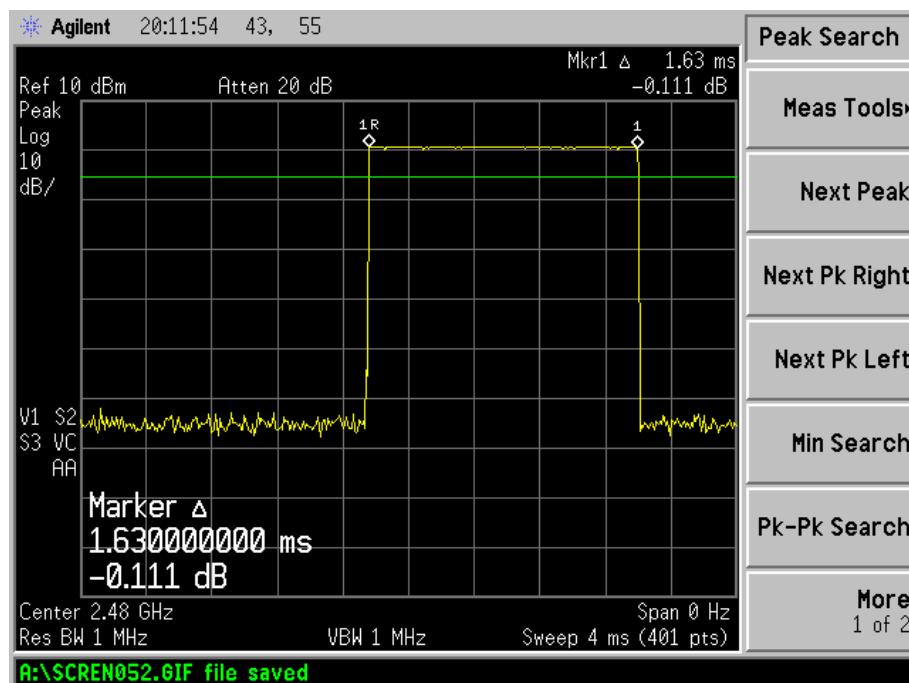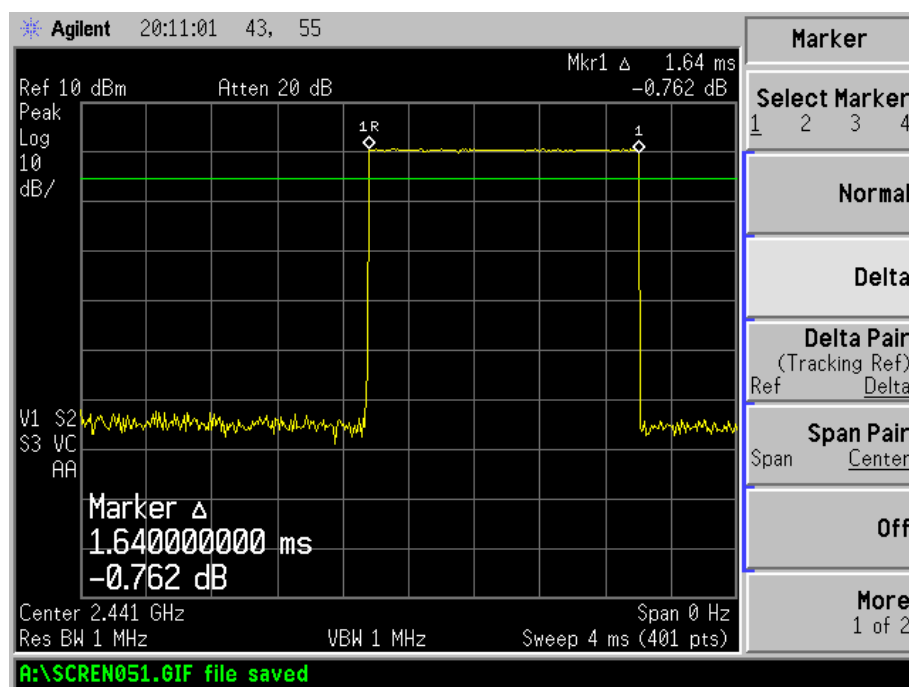


DH5 time slot (Low, Middle, High Channels)



For Mouse

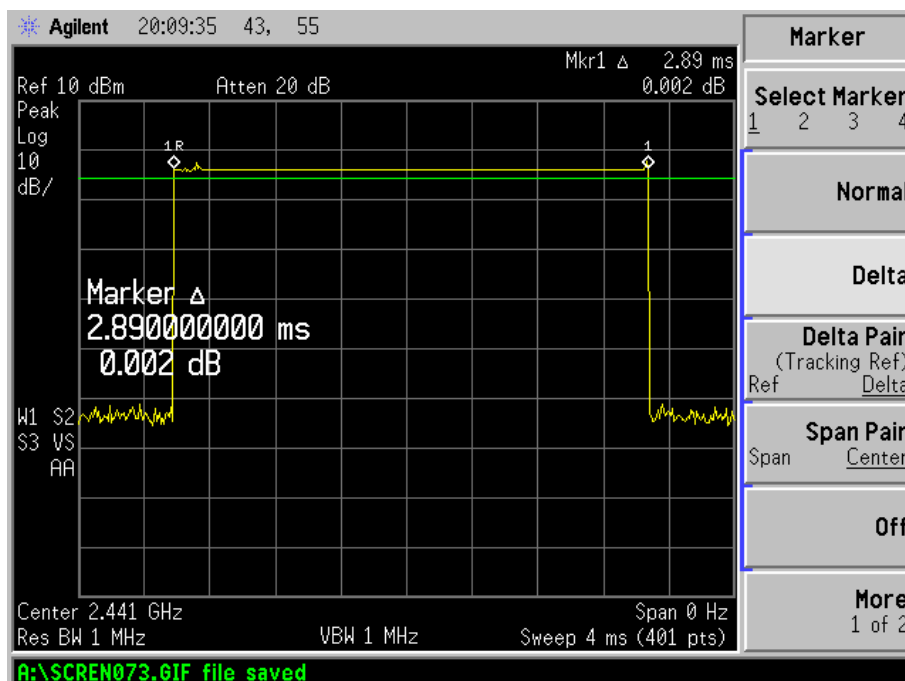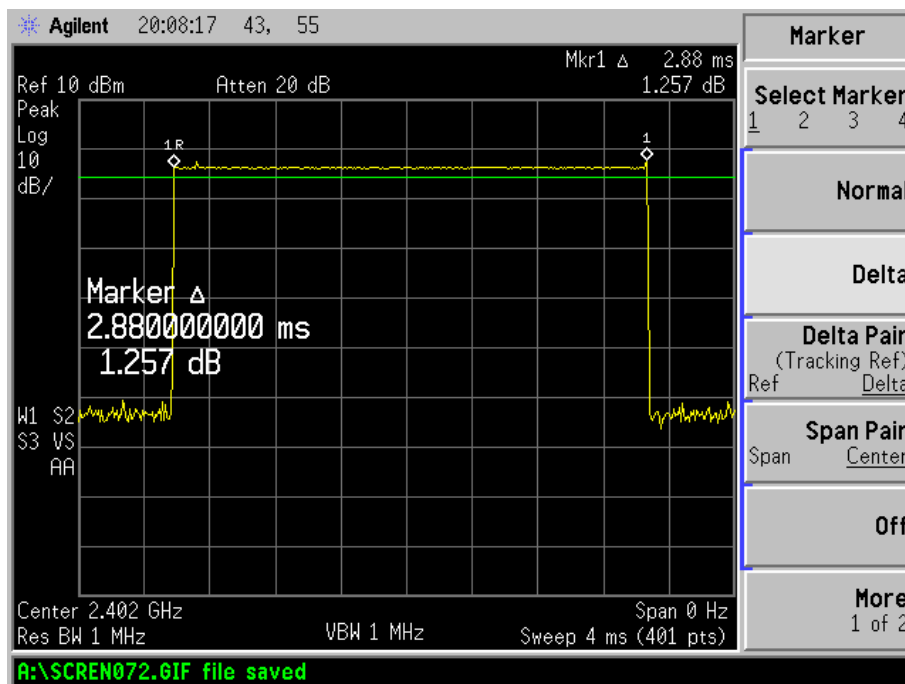

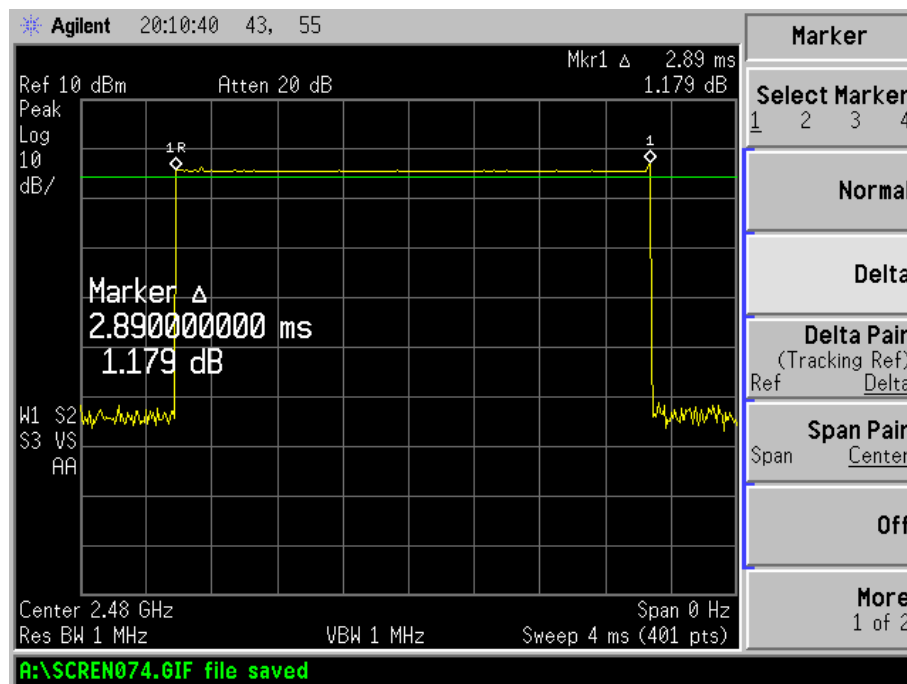



For Audio

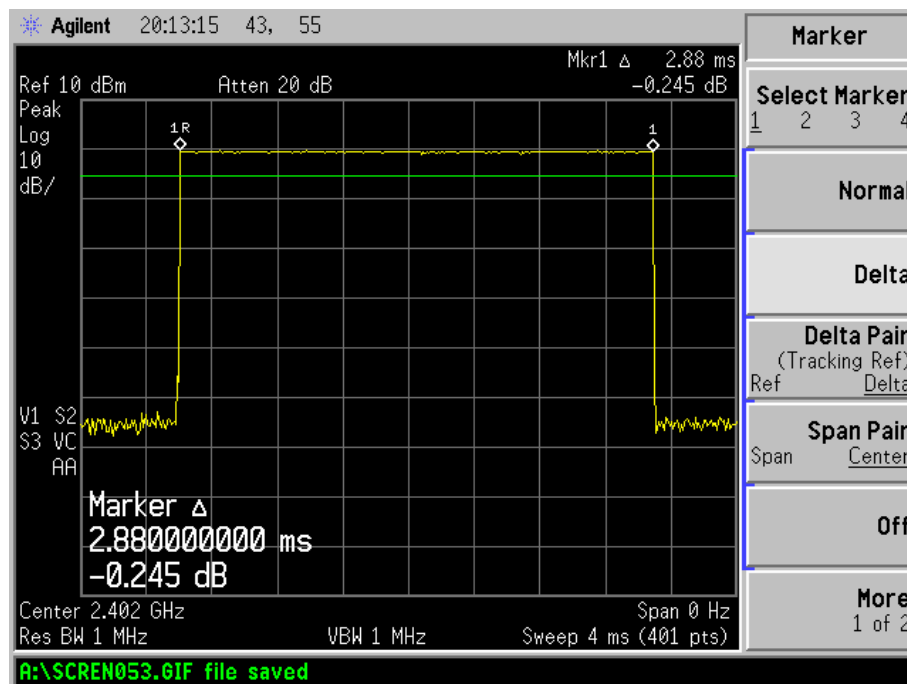


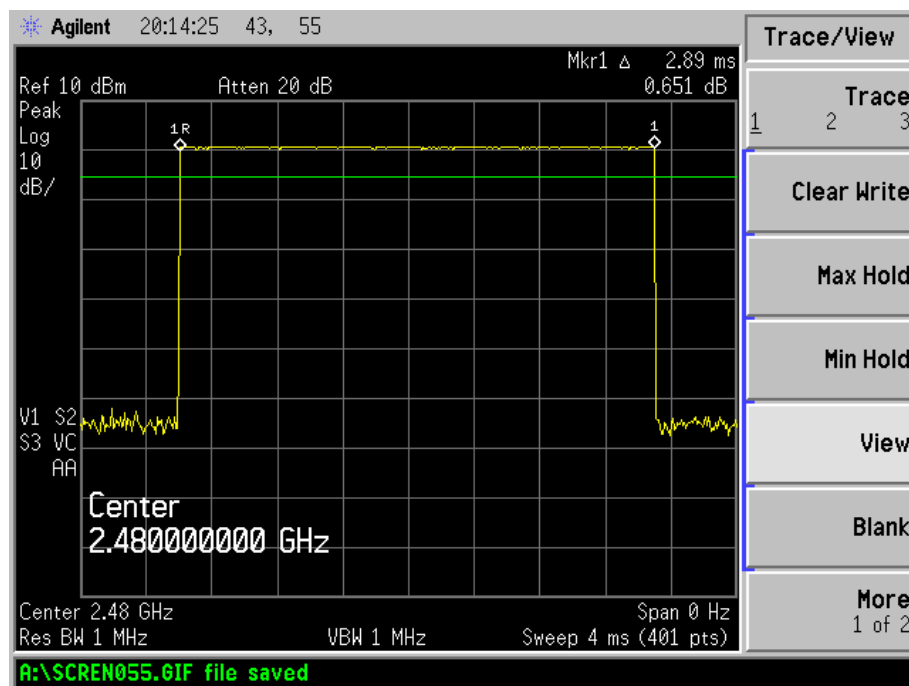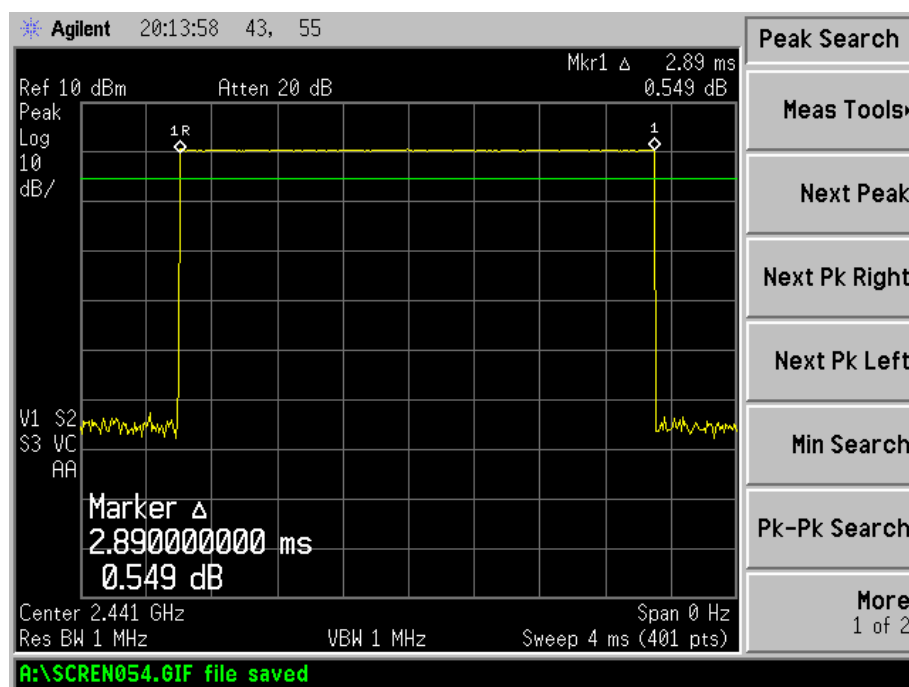


3DH1 time slot (Low, Middle, High Channels)



For Mouse

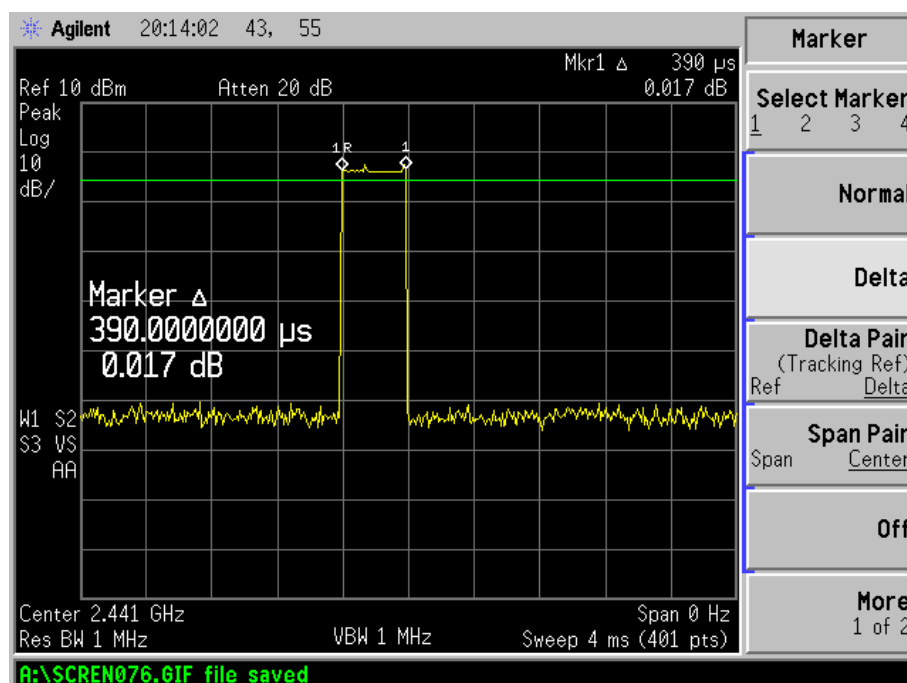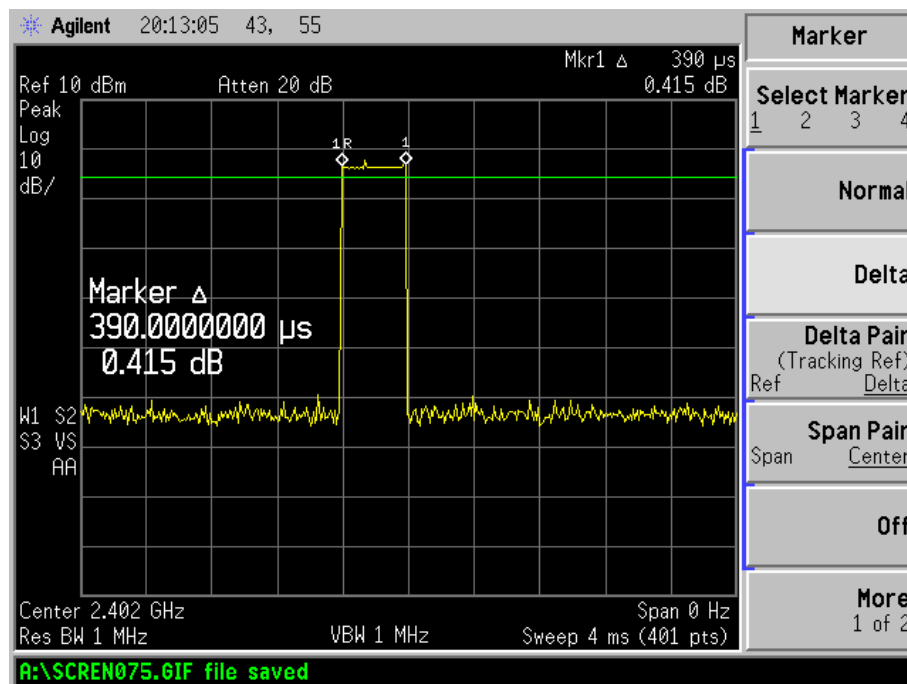

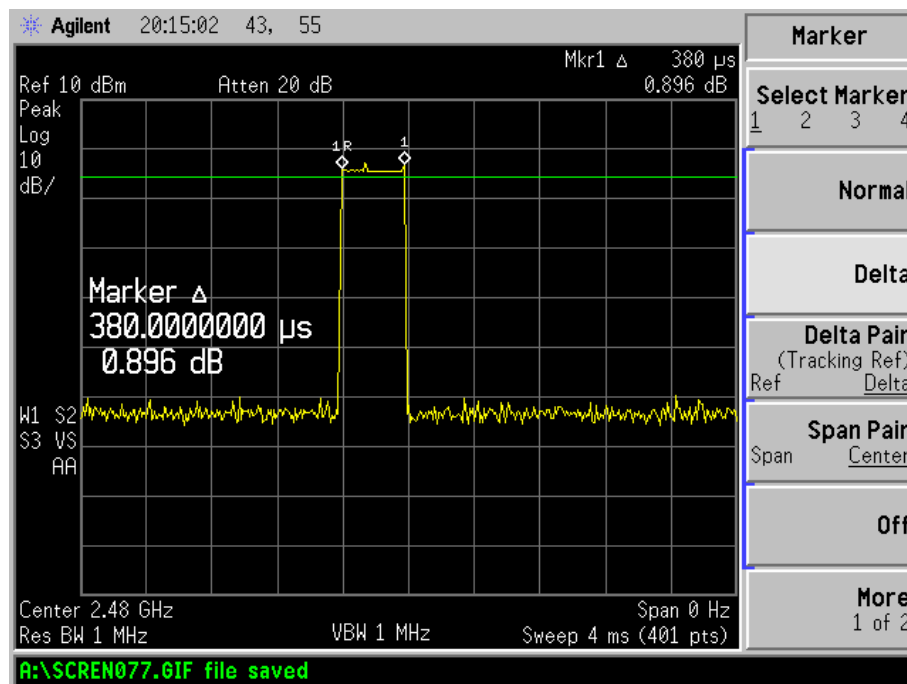



For Audio

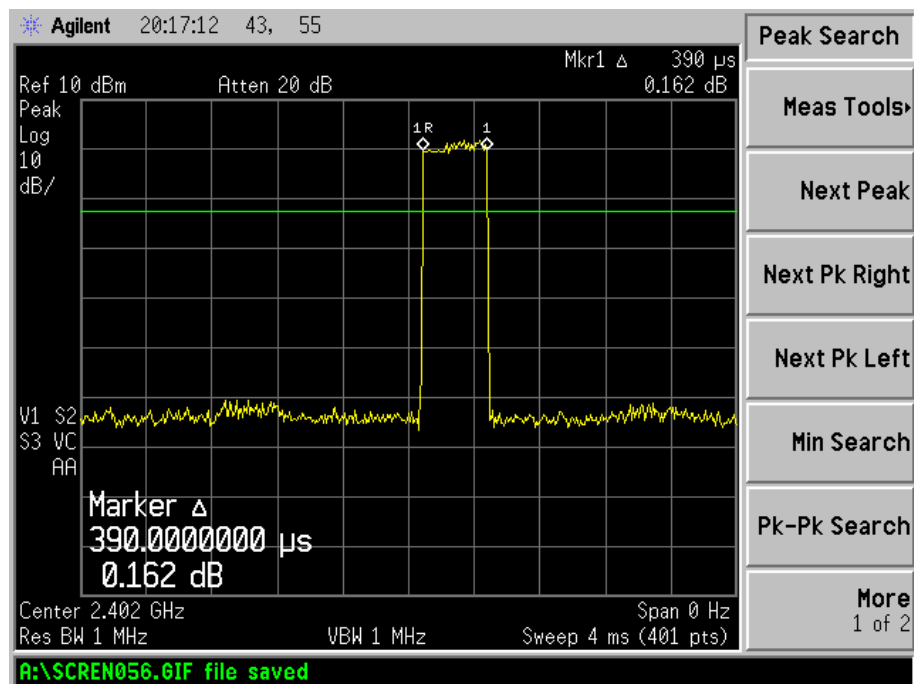


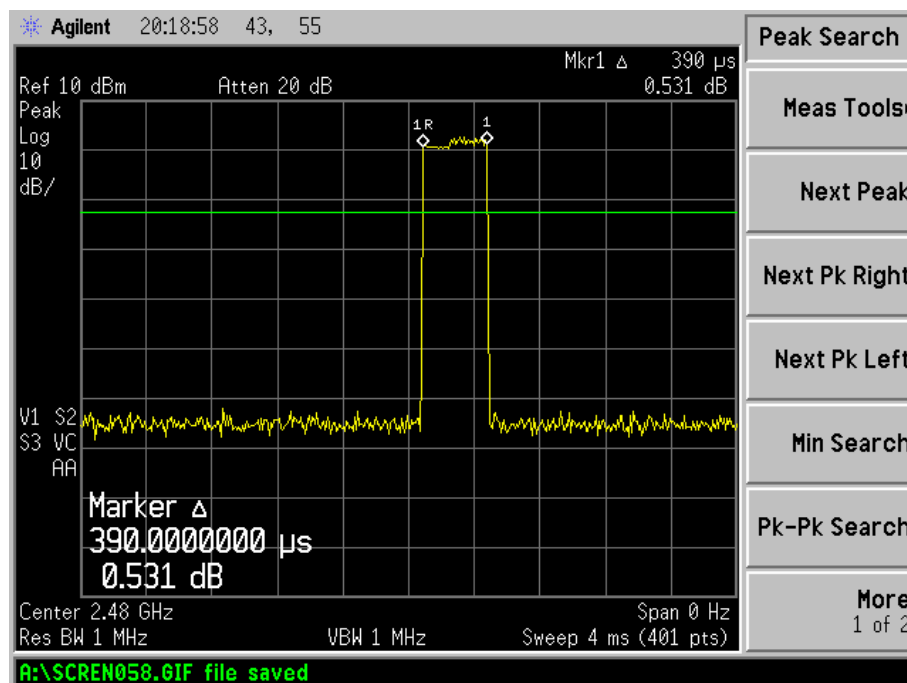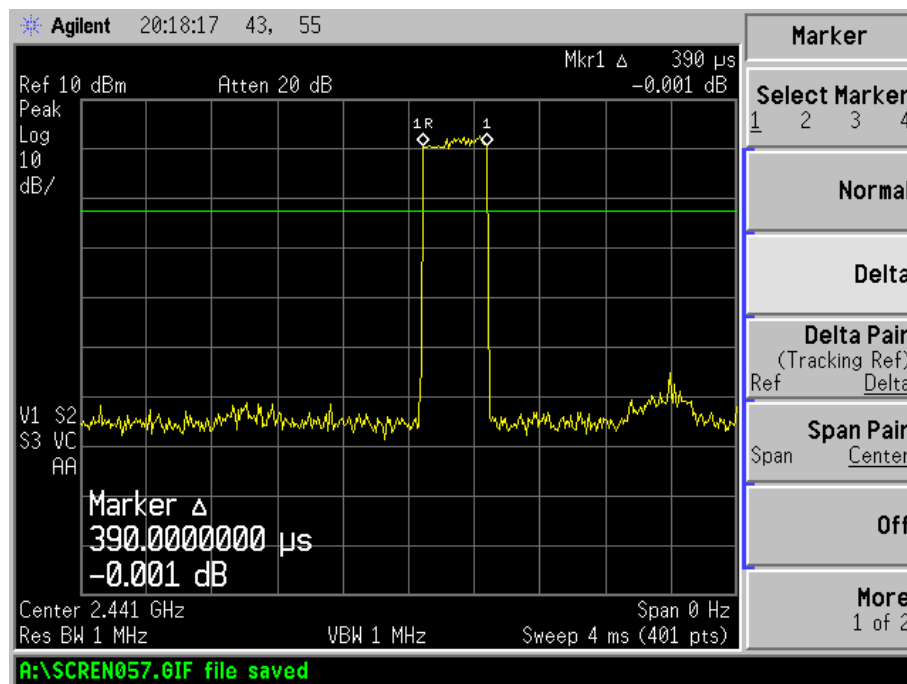


3DH3 time slot (Low, Middle, High Channels)



For Mouse

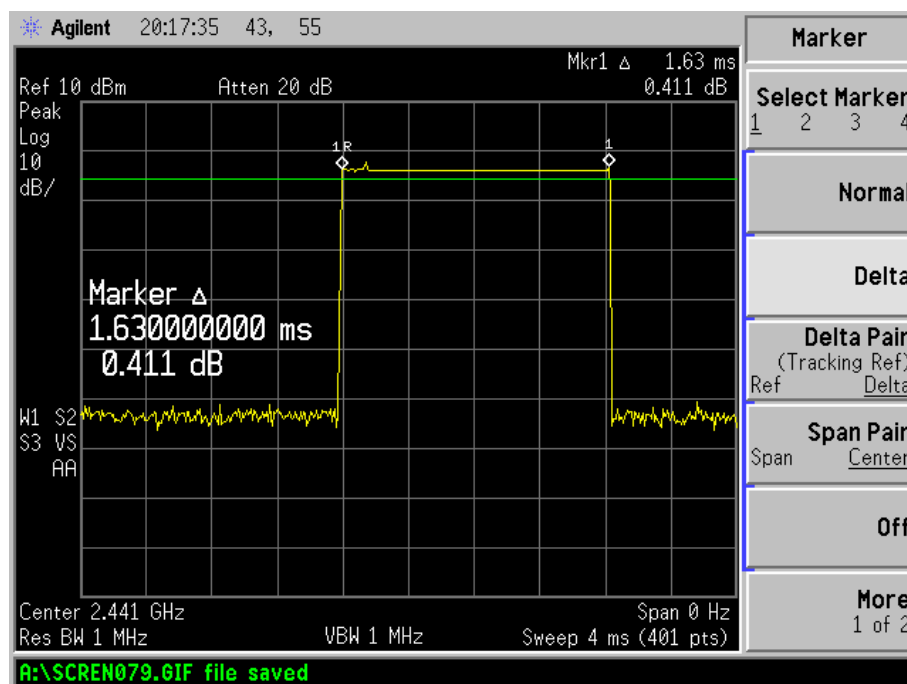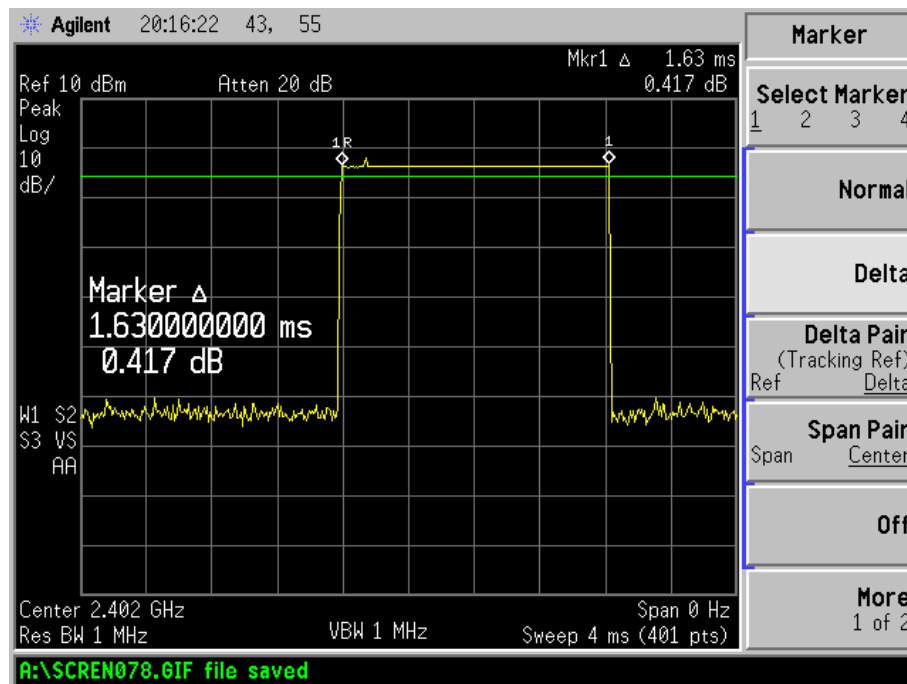

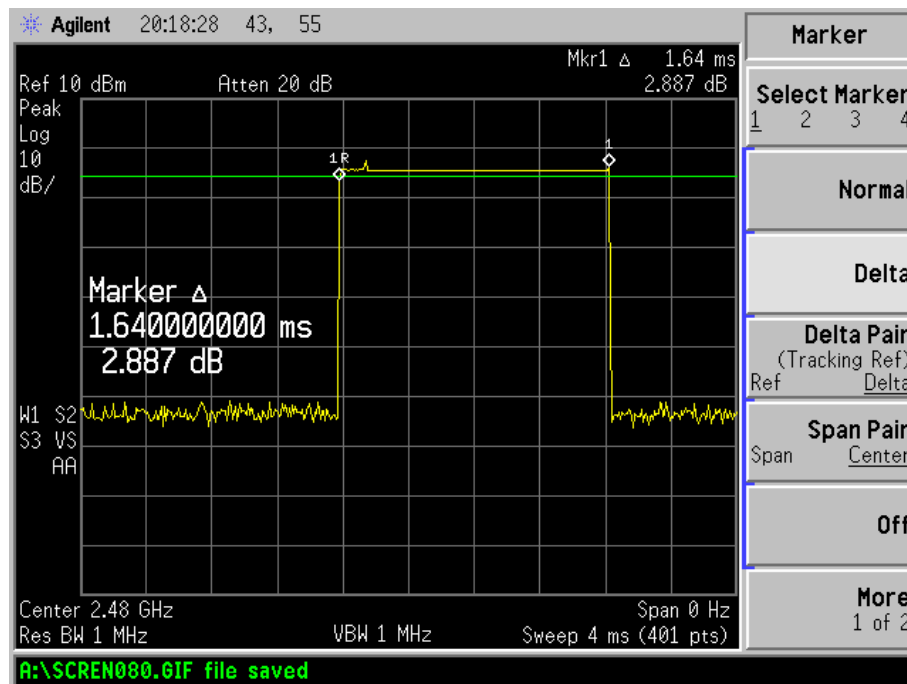



For Audio

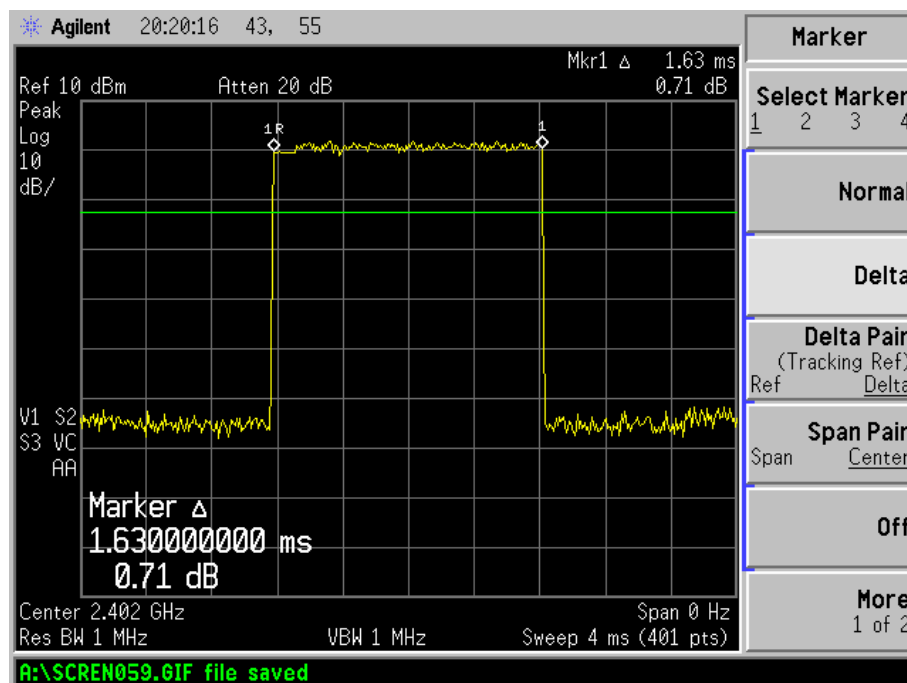


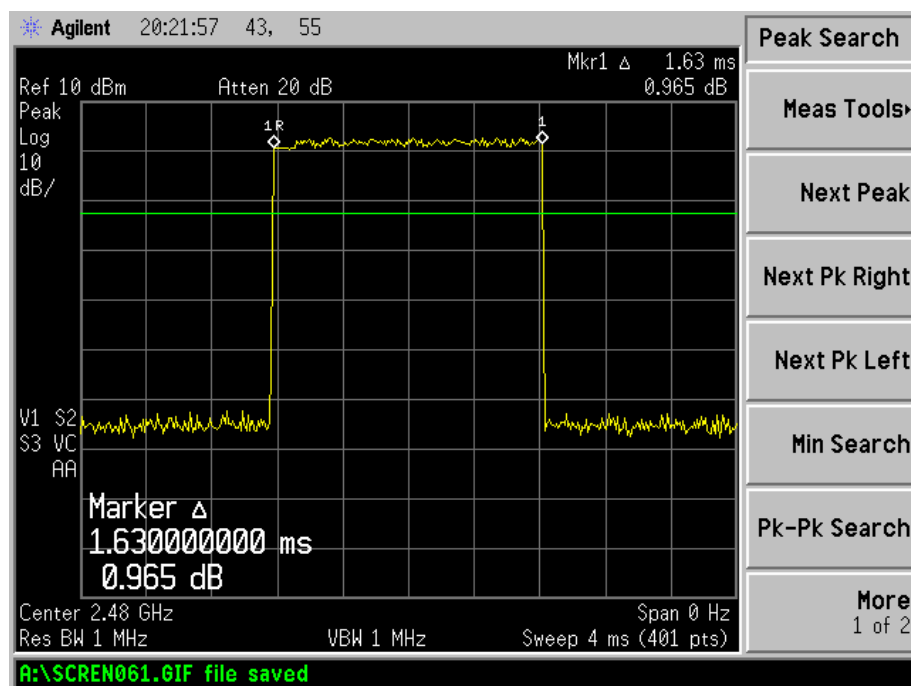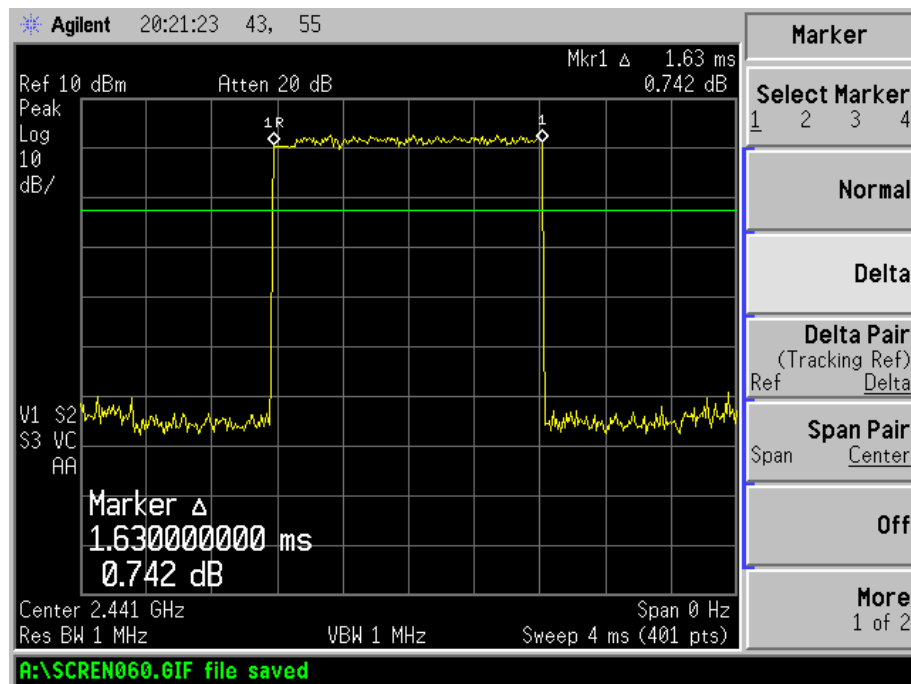


3DH5 time slot (Low, Middle, High Channels)



For Mouse

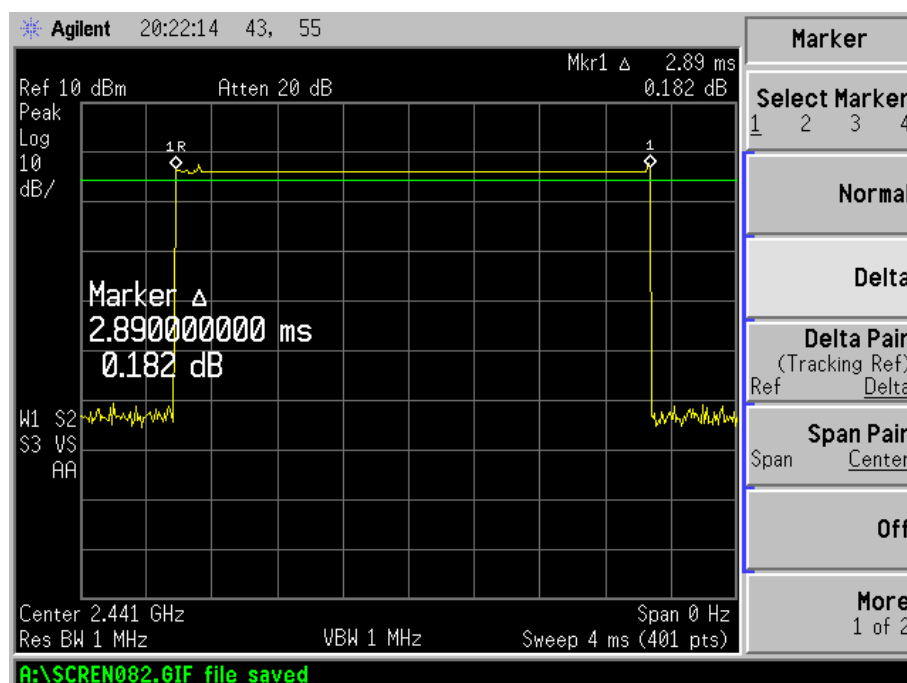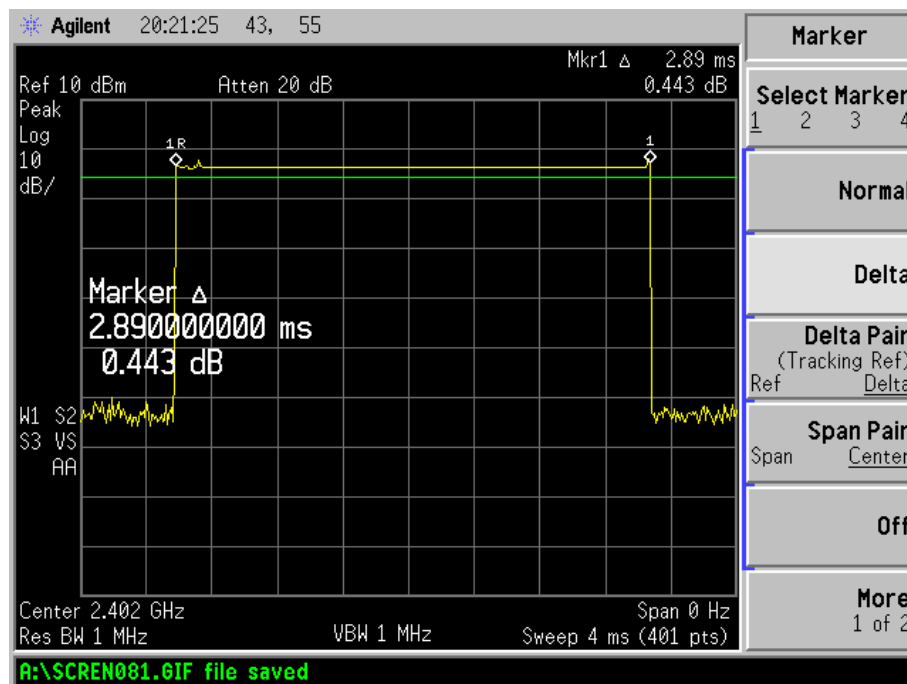

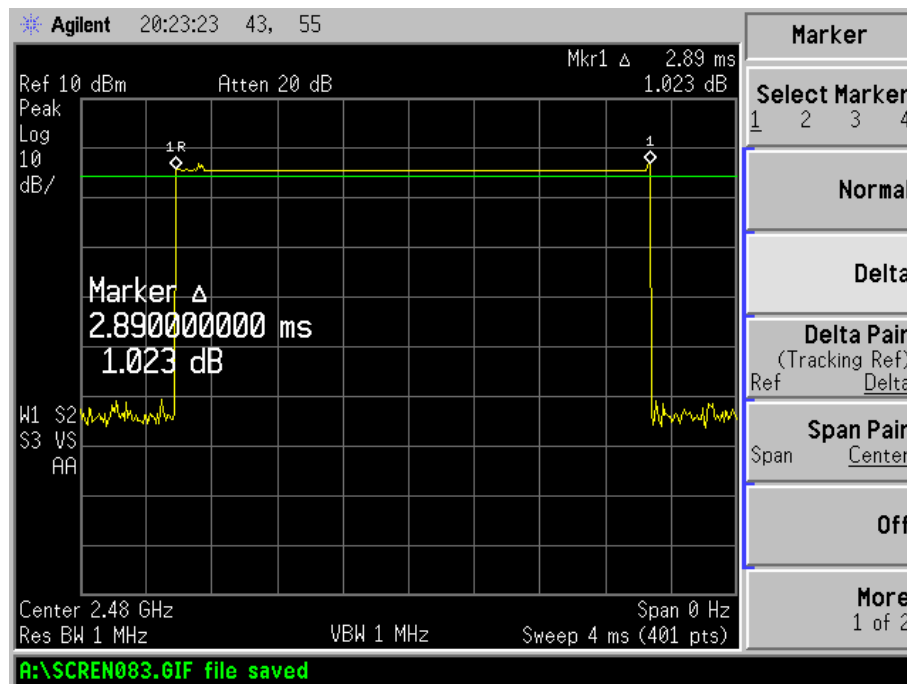

For Audio

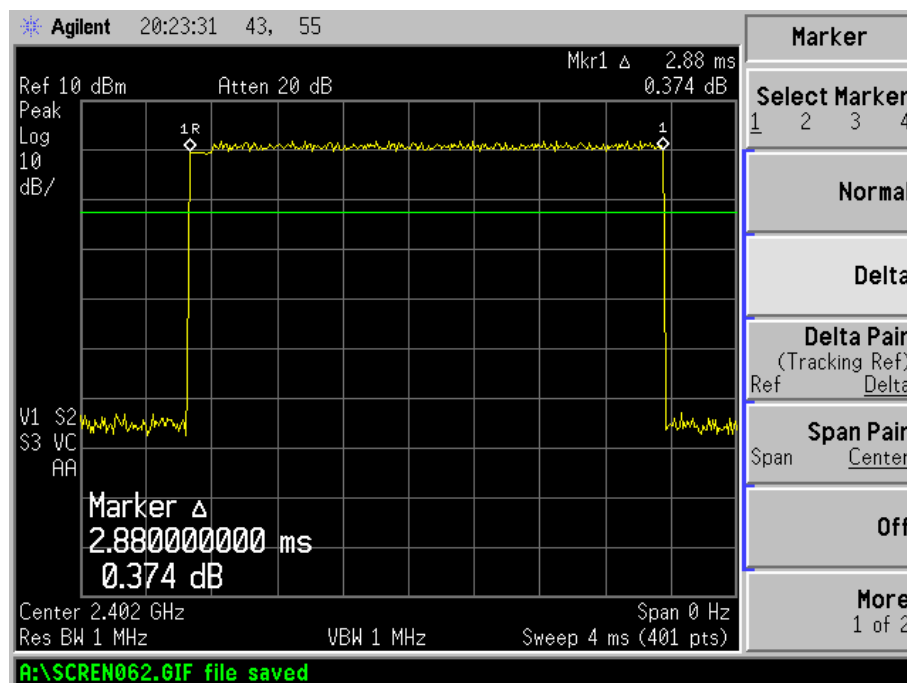

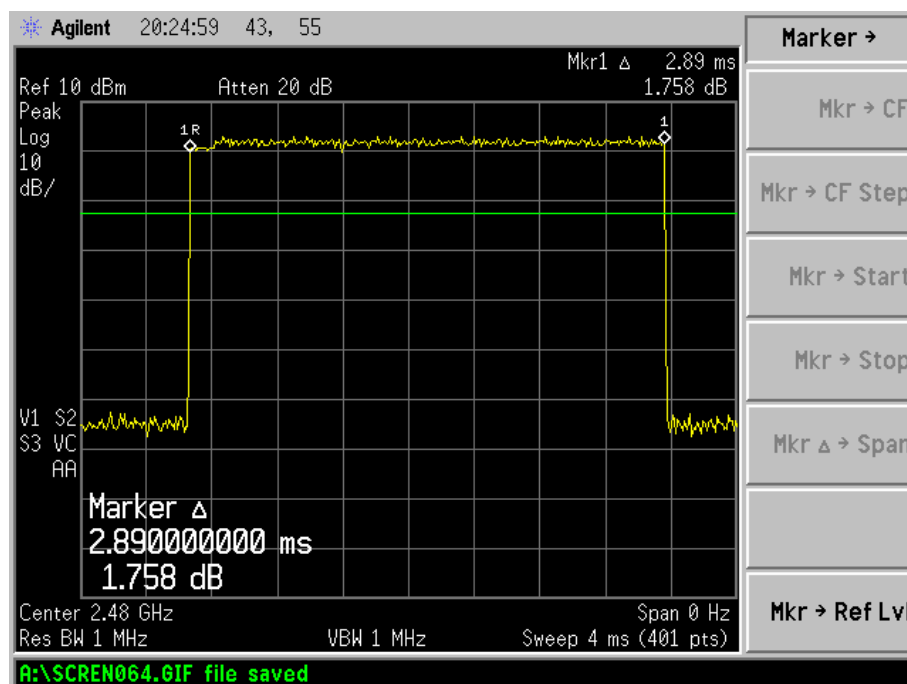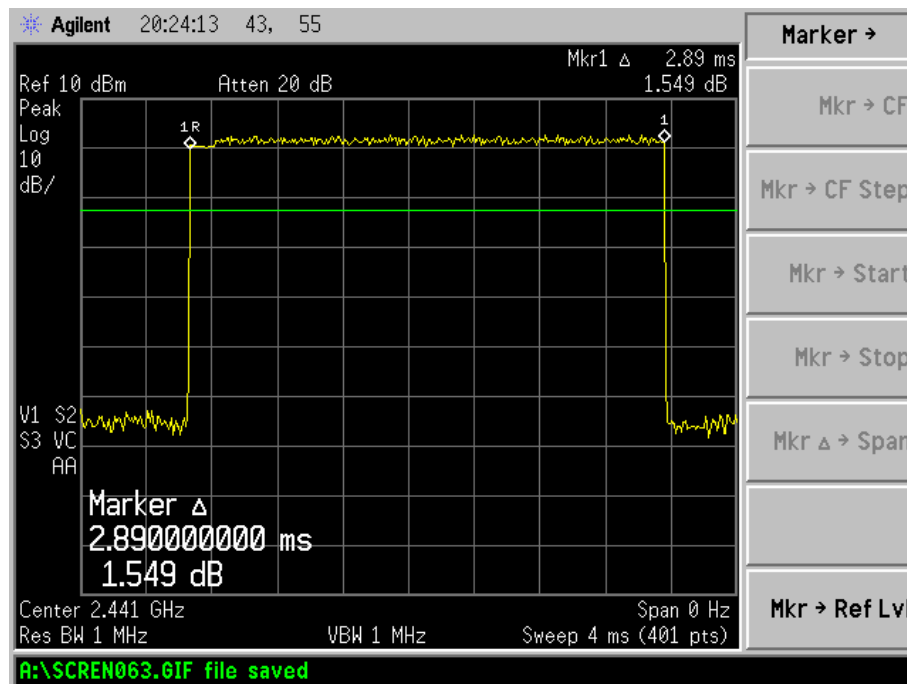

8. 20dB Bandwidth

8.1 Standard Applicable

According to 15.247(a)(1)(iii). For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

8.3 Test Procedure

According to the DA 00-705, the 20dB bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 2MHz, centered on a hopping channel

RBW $\geq$ 1% 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

8.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

8.5 Summary of Test Results/Plots

For Mouse

Channel	Frequency MHz	20dB Bandwidth (GFSK) kHz	20dB Bandwidth (8DPSK) kHz
Low Channel	2402	1175	1199
Middle Channel	2441	1169	1198
High Channel	2480	1173	1196


For Audioer

Channel	Frequency MHz	20dB Bandwidth (GFSK) kHz	20dB Bandwidth (8DPSK) kHz
Low Channel	2402	1012	1276
Middle Channel	2441	1030	1269
High Channel	2480	1035	1266


For GFSK

Low Channel:

For Mouse

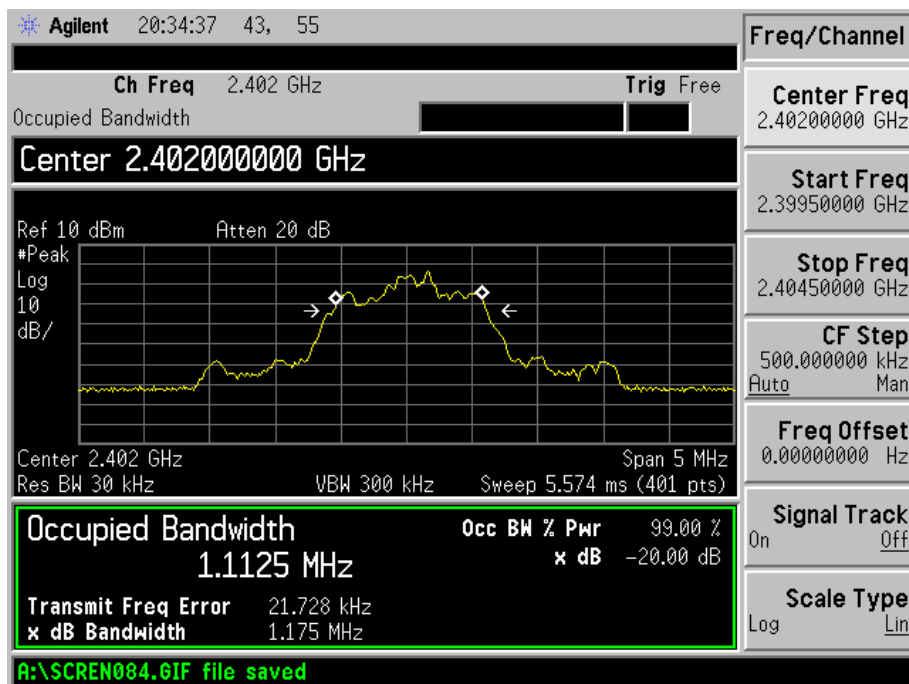


For Audio

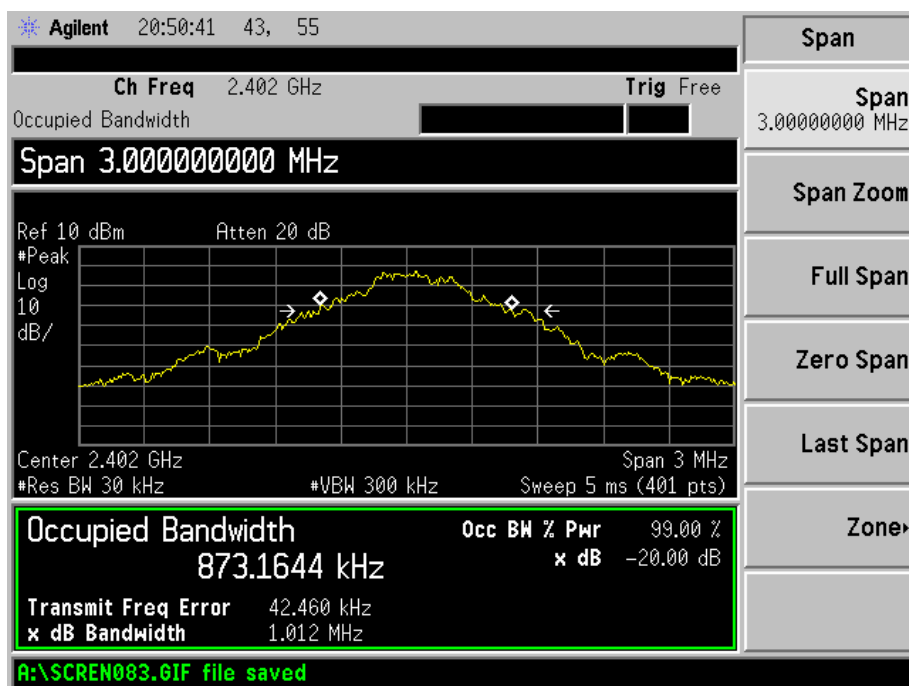


Middle Channel:


For Mouse

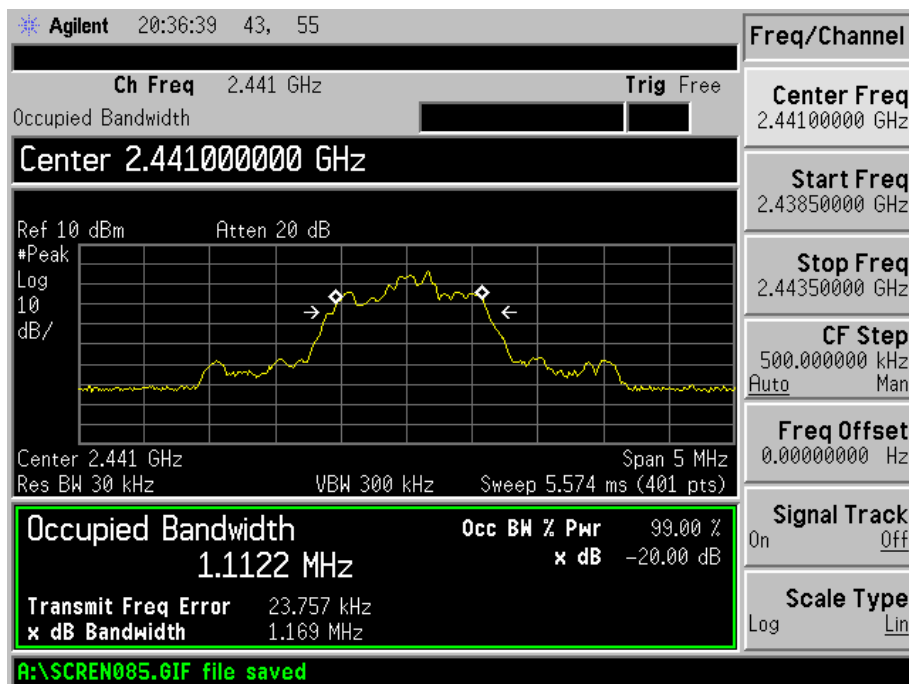


For Audio

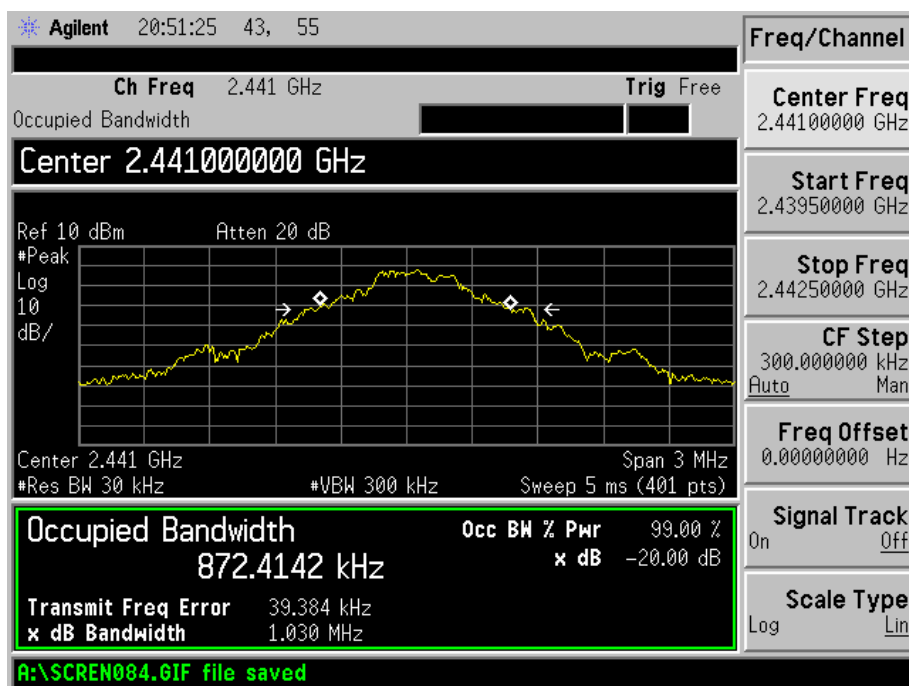

High Channel:
For Mouse

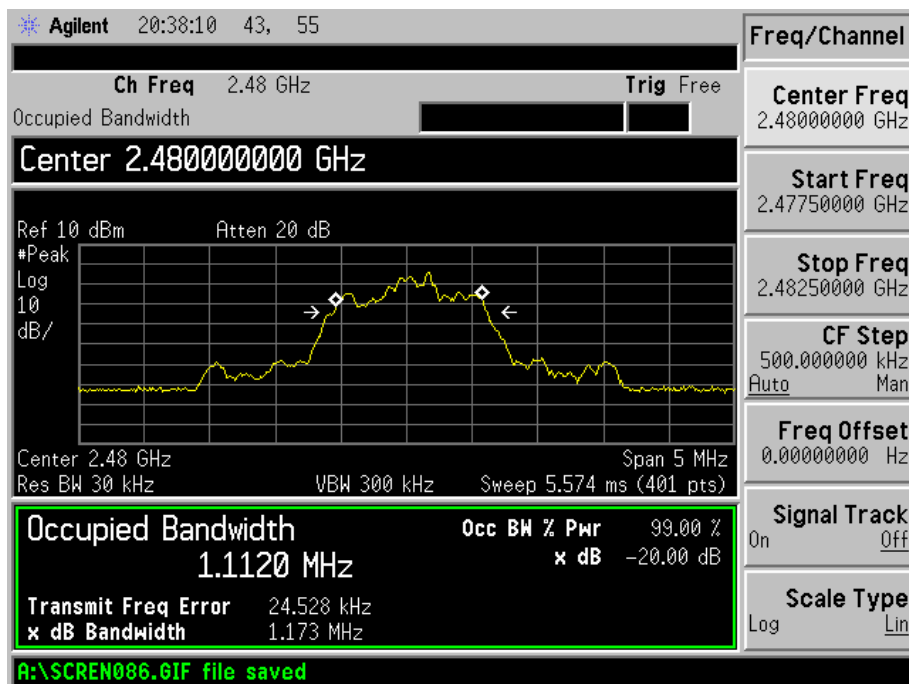


For Audio

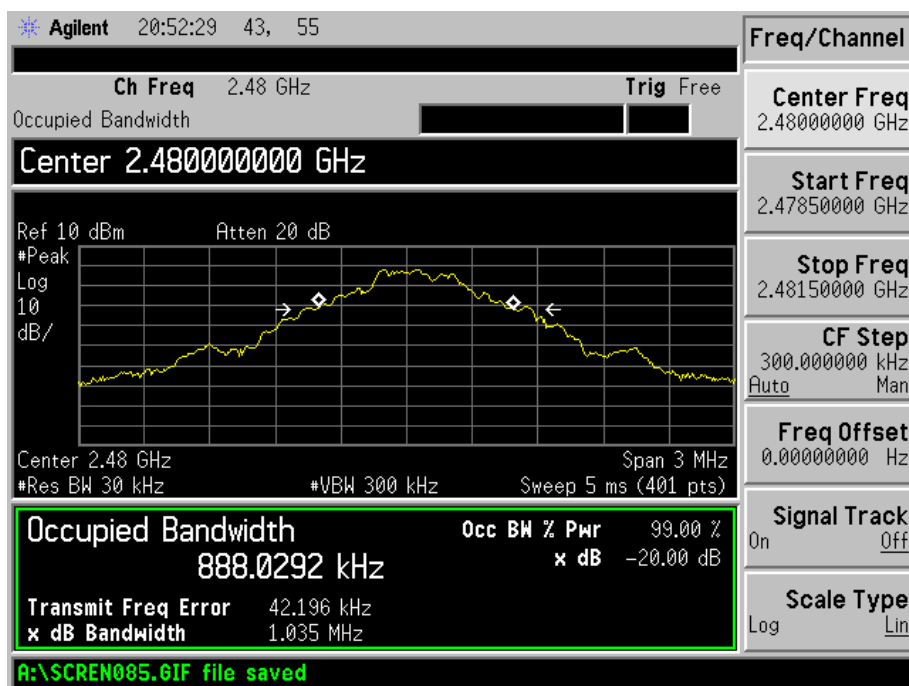

For 8DPSK

Low Channel:

For Mouse

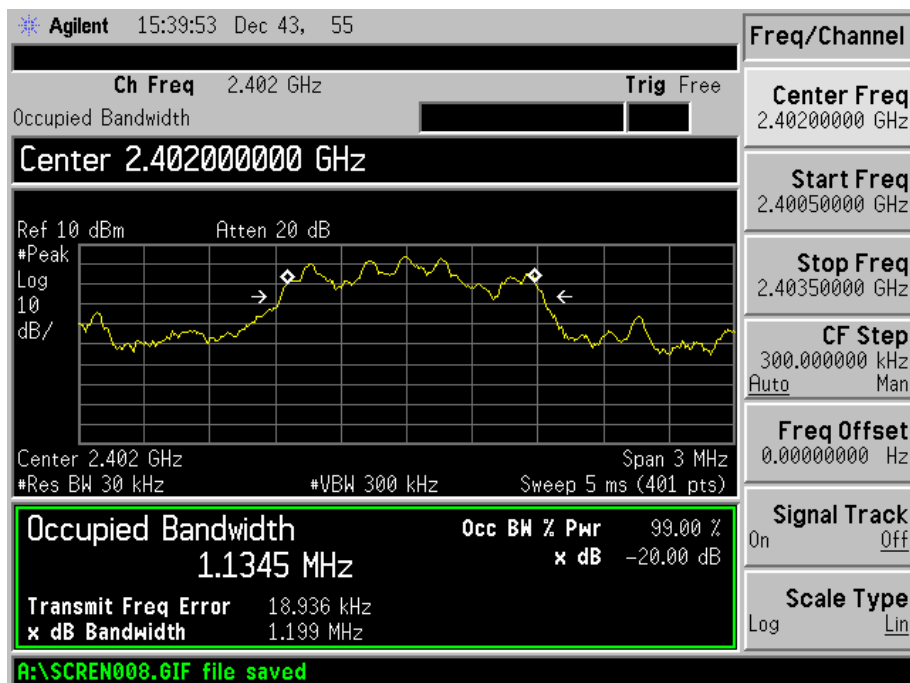


For Audio




Middle Channel:


For Mouse

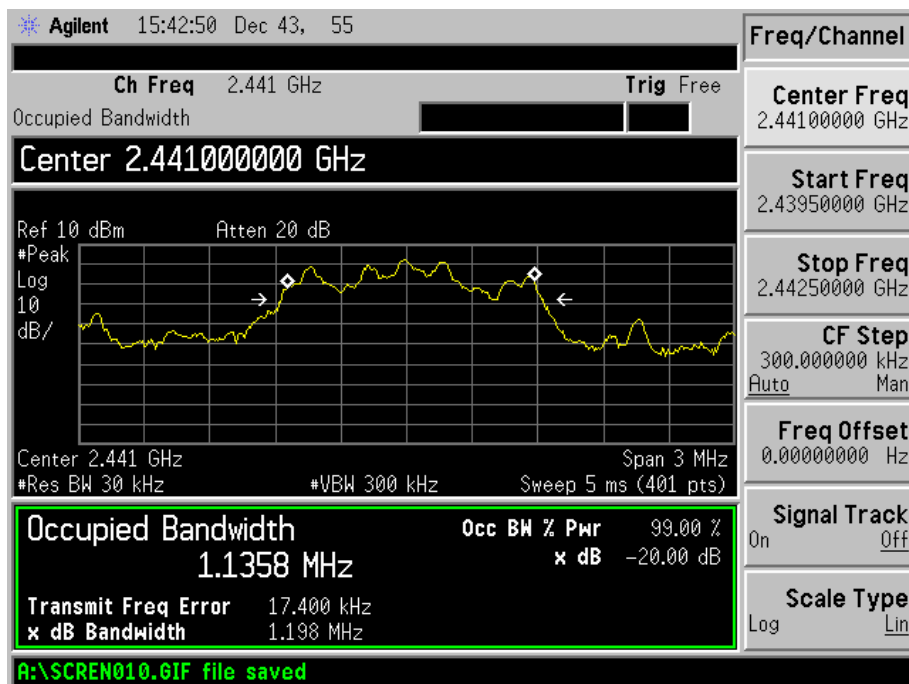


For Audio

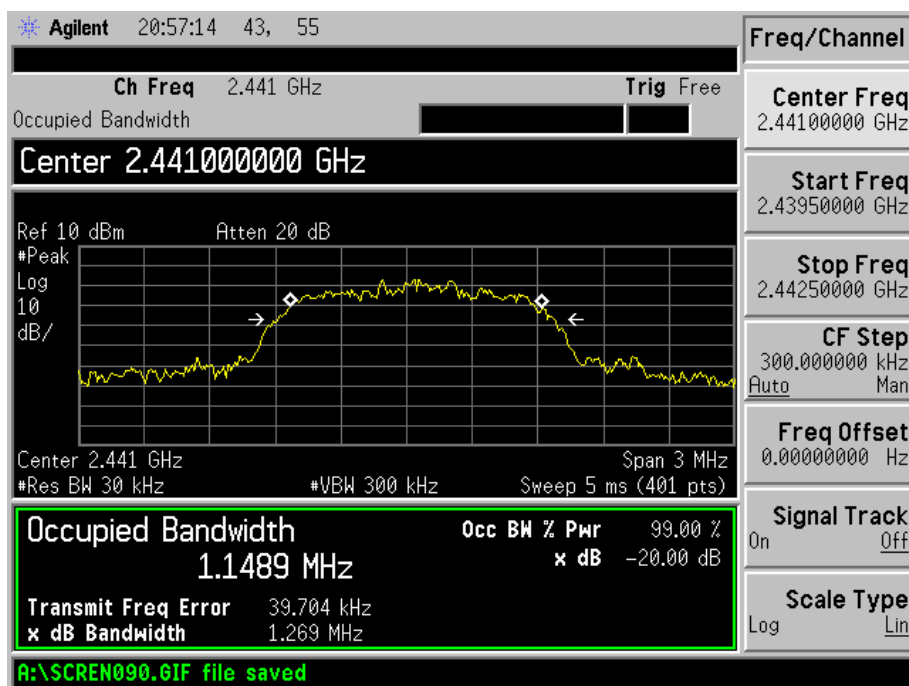

High Channel:
For Mouse

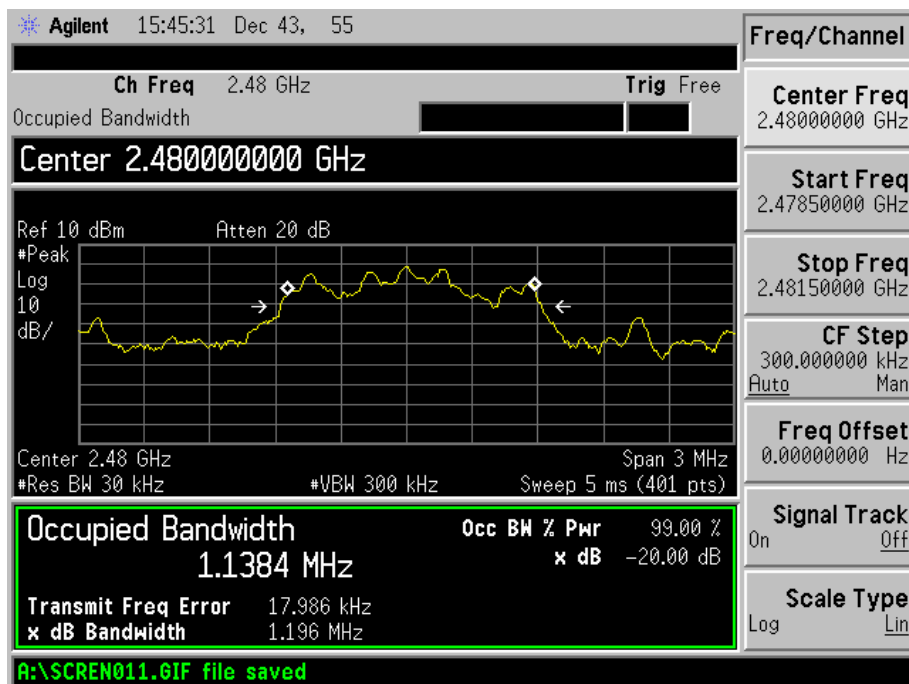

For Audio

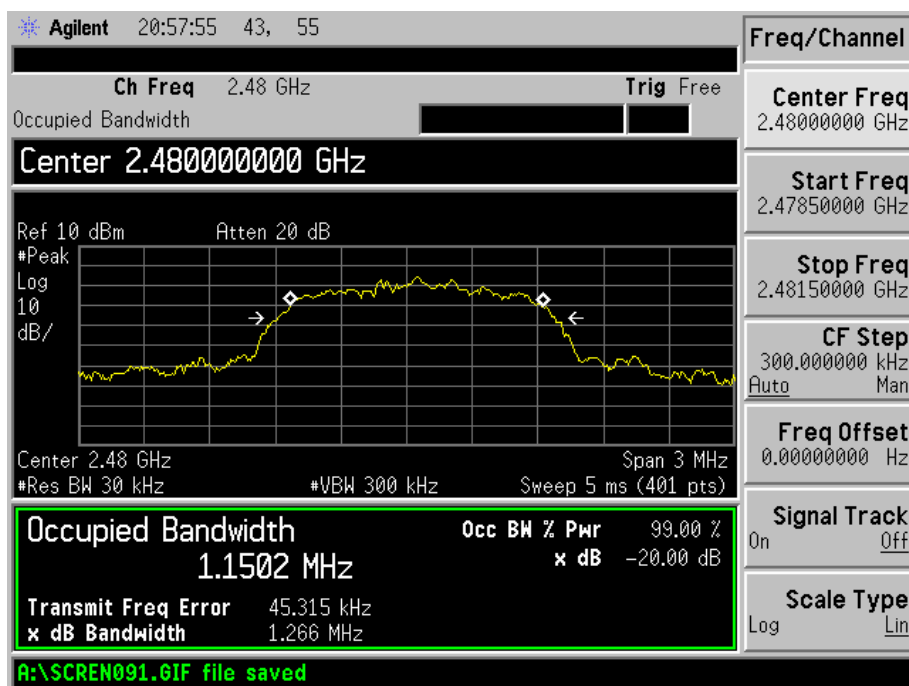

9. RF Output Power

9.1 Standard Applicable

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

9.3 Test Procedure

According to the DA 00-705, the peak output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 5MHz, centered on a hopping channel

RBW = 1/3MHz, VBW = 1/3MHz

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, the indicated level is the peak output power (the external attenuation and cable loss shall be considered).

8.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

9.5 Summary of Test Results/Plots

For Mouse

GFSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-1.350	0.7328	1000
Middle Channel	2441	-1.388	0.7264	1000
High Channel	2480	-1.797	0.6611	1000

Pi/4 DQPS

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-1.338	0.7349	1000
Middle Channel	2441	-1.418	0.7214	1000
High Channel	2480	-1.800	0.6607	1000

8DPSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-1.463	0.7140	1000
Middle Channel	2441	-1.533	0.7026	1000
High Channel	2480	-1.954	0.6377	1000

For Audio

GFSK:

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-0.295	0.9343	1000
Middle Channel	2441	0.598	1.1476	1000
High Channel	2480	0.830	1.2106	1000

Pi/4 QDPSK:

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-1.866	0.6507	1000
Middle Channel	2441	-0.999	0.7945	1000
High Channel	2480	-0.757	0.8400	1000

8DPSK:

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-1.650	0.6839	1000
Middle Channel	2441	-0.728	0.8457	1000
High Channel	2480	-0.496	0.8921	1000

Note: the antenna gain of 0dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

10. Field Strength of Spurious Emissions

10.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

10.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

10.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19
Horn Antenna	ETS	3116B	00088203	2013-04-20	2014-04-19
Loop Antenna	SCHWARZECK	FMZB1516	113	2013-04-20	2014-04-19

10.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

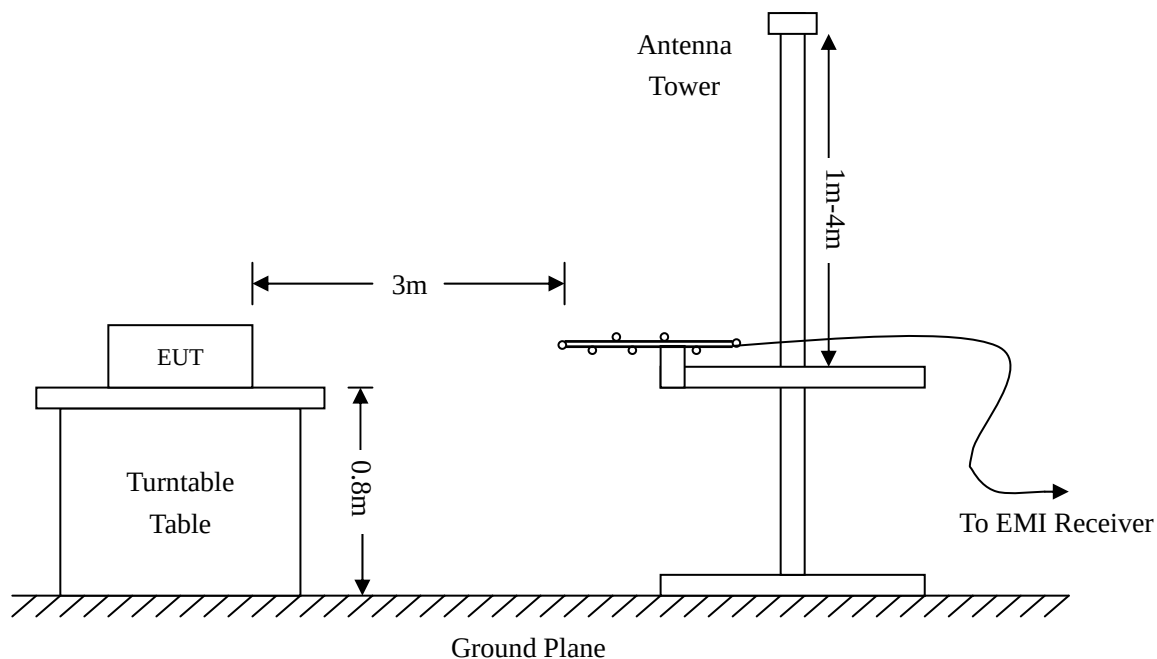

10.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

10.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

-6.81 dB at 200.6880 MHz in the Horizontal polarization for Charging Mode, 9 kHz to 1 GHz, 3 Meters


**-5.47 dB at 361.7139 MHz in the Horizontal polarization for Middle Channel Transmitting Mode for Mouse,
9kHz to 25 GHz, 3 Meters**

**-6.49 dB at 30.4238 MHz in the Vertical polarization for High Channel Transmitting Mode for Audio, 9kHz to
25 GHz, 3 Meters**

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


Plot of Radiated Emissions Test Data (30MHz to 1GHz)EUT: *Bluetooth Speaking Mouse*Tested Model: *IBT-04*Operating Condition: *Charging*

Comment:

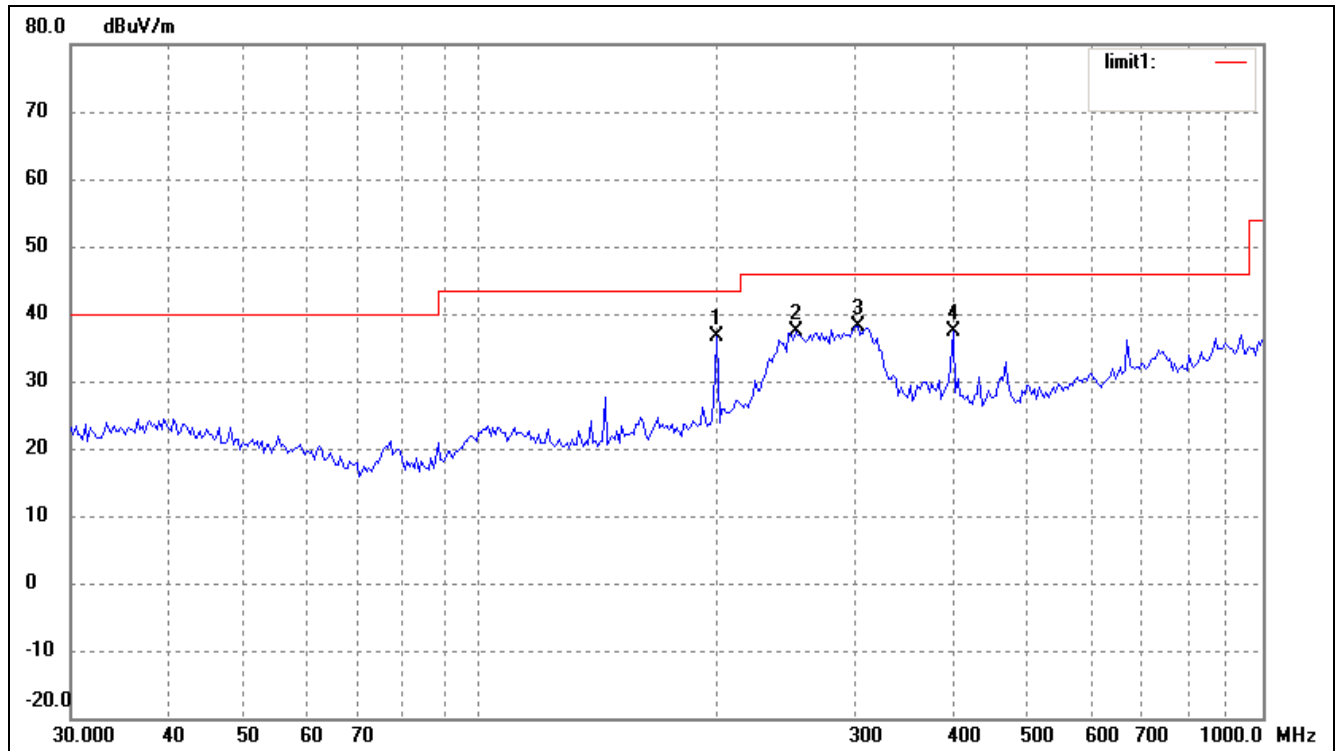Test Specification: *Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	200.6880	32.00	4.69	36.69	43.50	-6.81	245	100	peak
2	252.9482	29.98	7.41	37.39	46.00	-8.61	15	100	peak
3	303.5437	27.93	10.24	38.17	46.00	-7.83	288	100	peak
4	401.8385	25.85	11.47	37.32	46.00	-8.68	360	100	peak

Test Specification: Vertical

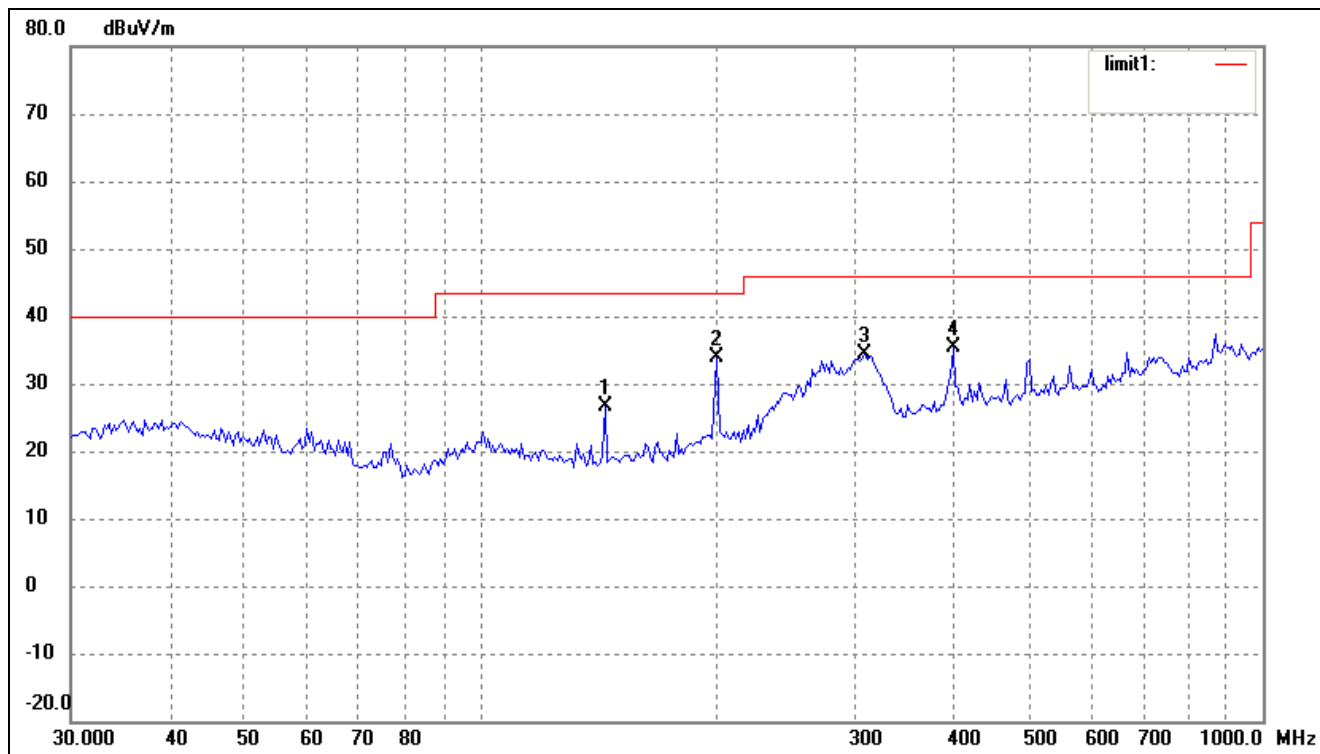


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	144.3348	23.05	3.46	26.51	43.50	-16.99	240	100	peak
2	200.6881	29.21	4.69	33.90	43.50	-9.60	187	100	peak
3	309.9977	24.12	10.33	34.45	46.00	-11.55	220	100	peak
4	401.8385	23.96	11.47	35.43	46.00	-10.57	162	100	peak

Operating Condition: Transmitting Low Channel (2402MHz) for Mouse


Comment: DC 3.7V battery

Test Specification: Horizontal

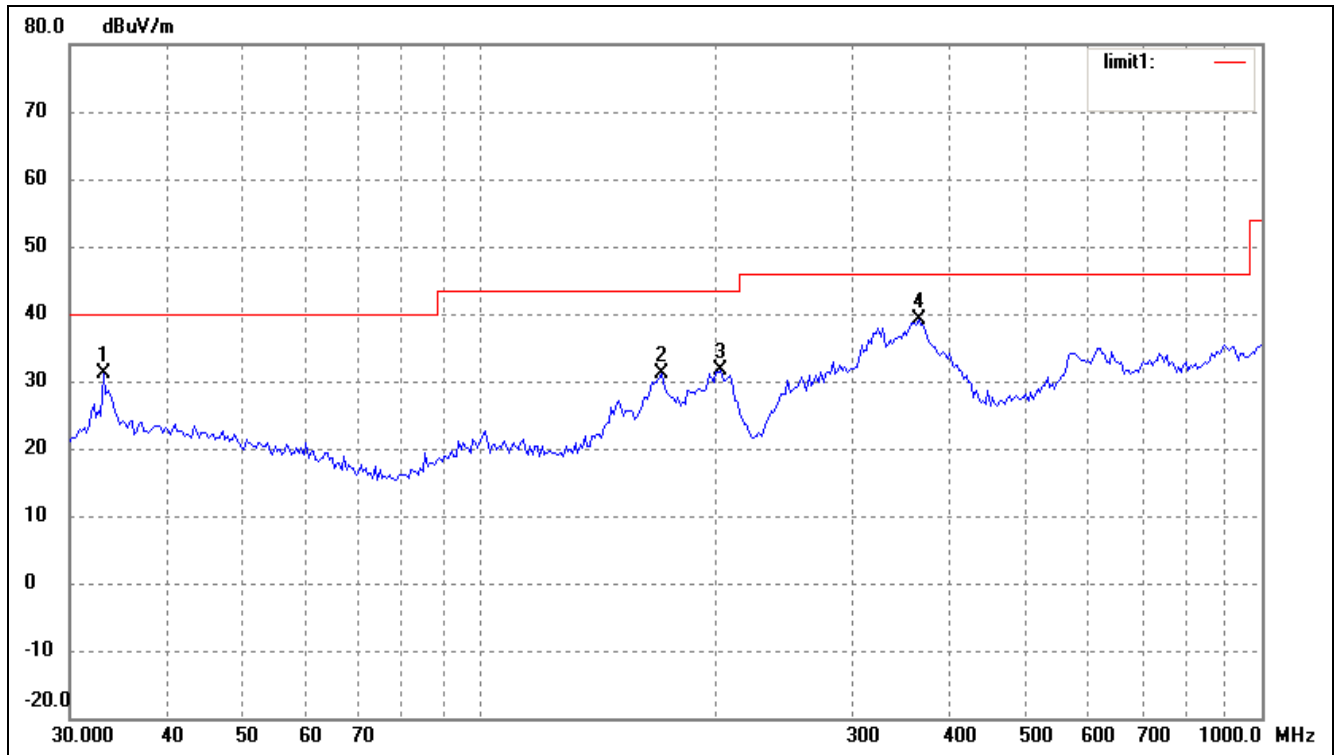

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	33.0950	22.56	8.56	31.12	40.00	-8.88	162	100	peak
2	170.7926	27.54	3.70	31.24	43.50	-12.26	200	100	peak
3	203.5228	26.77	4.87	31.64	43.50	-11.86	200	100	peak
4	364.2595	28.39	10.68	39.07	46.00	-6.93	200	100	peak

Test Specification: Vertical

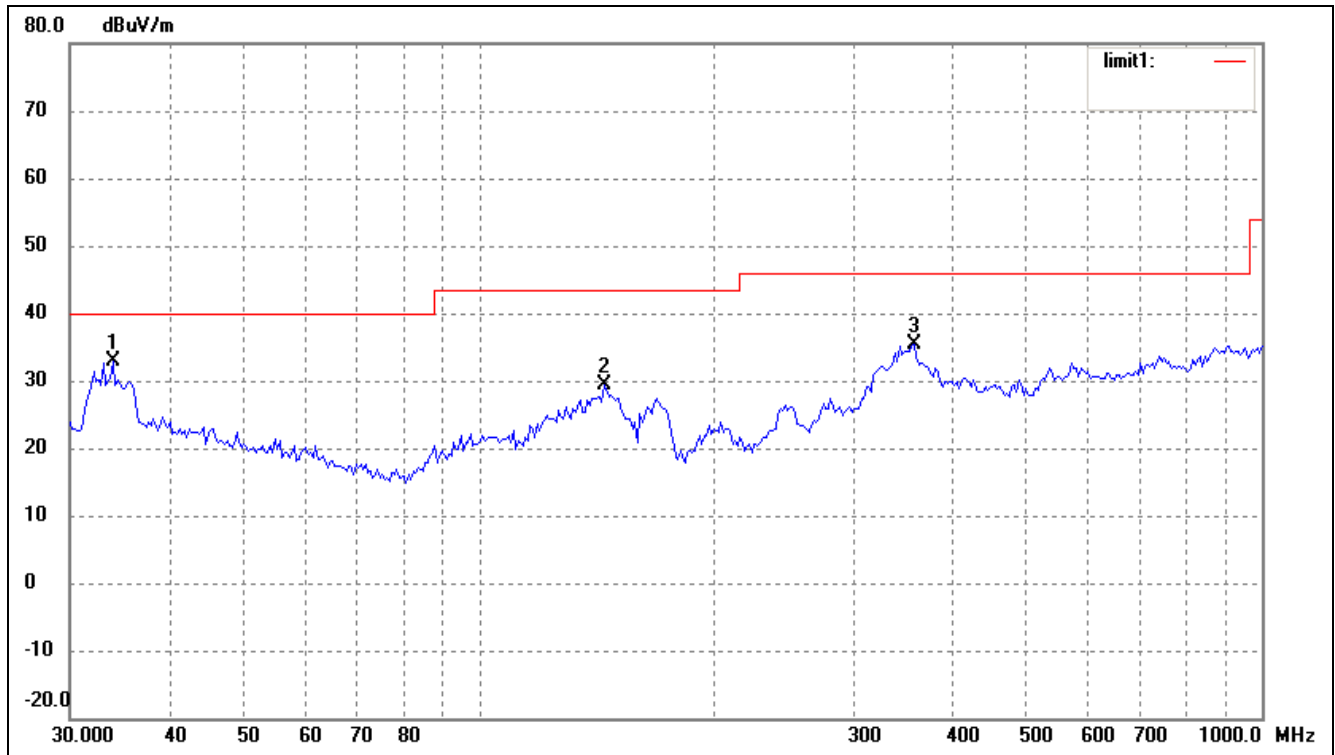


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	34.0365	24.04	8.72	32.76	40.00	-7.24	240	100	peak
2	144.3348	25.89	3.46	29.35	43.50	-14.15	187	100	peak
3	359.1860	24.59	10.68	35.27	46.00	-10.73	220	100	peak

Operating Condition: Transmitting Middle Channel (2441MHz) for Mouse


Comment: DC 3.7V battery

Test Specification: Horizontal

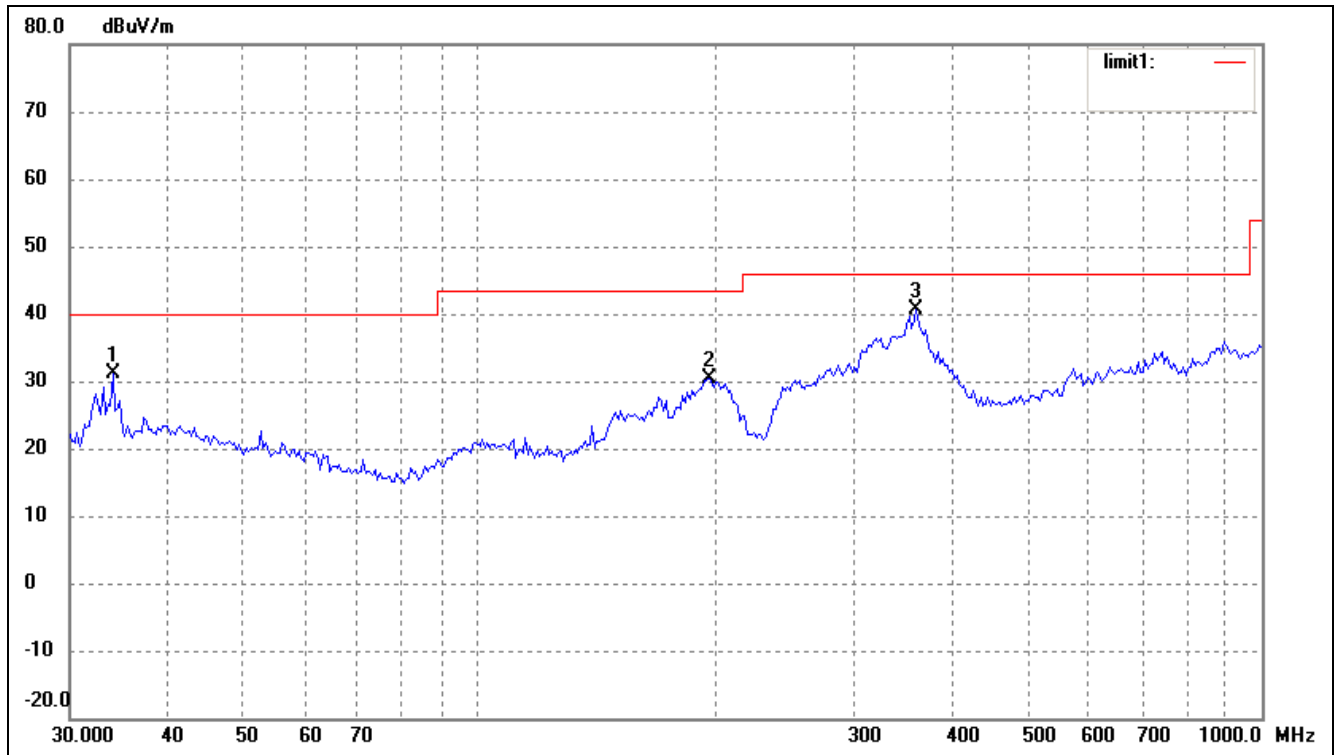

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	34.0365	22.51	8.72	31.23	40.00	-8.77	162	100	peak
2	196.5098	25.98	4.49	30.47	43.50	-13.03	200	100	peak
3	361.7139	29.84	10.69	40.53	46.00	-5.47	200	100	peak

Test Specification: Vertical

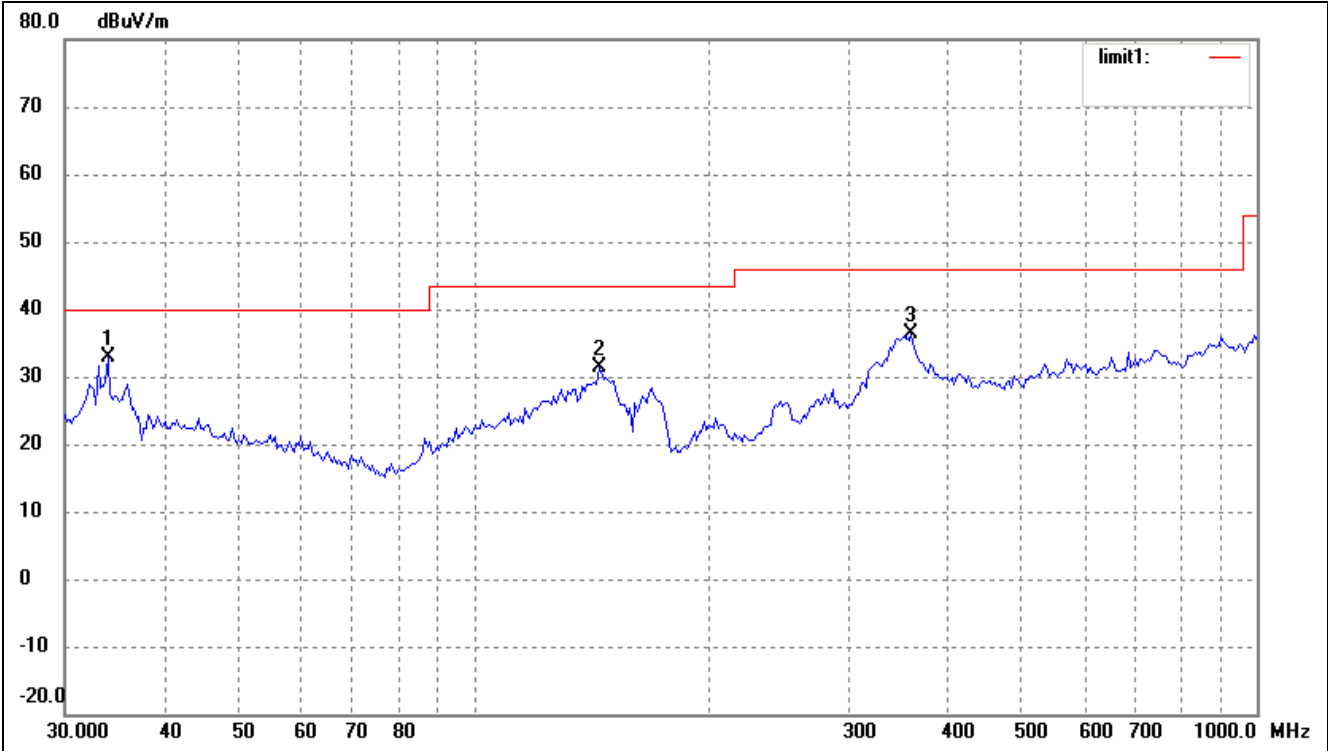


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	34.0365	24.04	8.72	32.76	40.00	-7.24	240	100	peak
2	144.3348	27.89	3.46	31.35	43.50	-12.15	187	100	peak
3	361.7139	25.62	10.69	36.31	46.00	-9.69	220	100	peak

Operating Condition: Transmitting High Channel (2480MHz) for Mouse


Comment: DC 3.7V battery

Test Specification: Horizontal

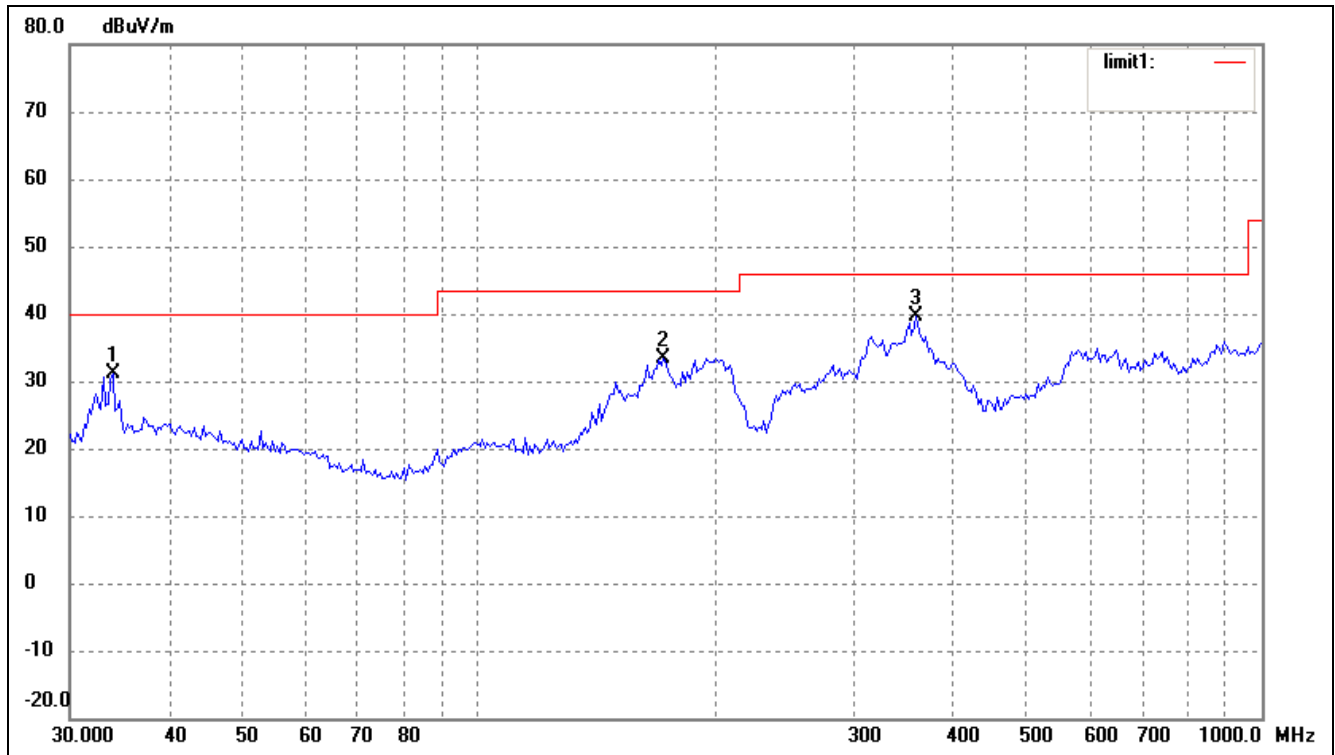

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.0365	22.51	8.72	31.23	40.00	-8.77	162	100	peak
2	171.9946	29.64	3.71	33.35	43.50	-10.15	200	100	peak
3	361.7139	28.84	10.69	39.53	46.00	-6.47	200	100	peak

Test Specification: Vertical

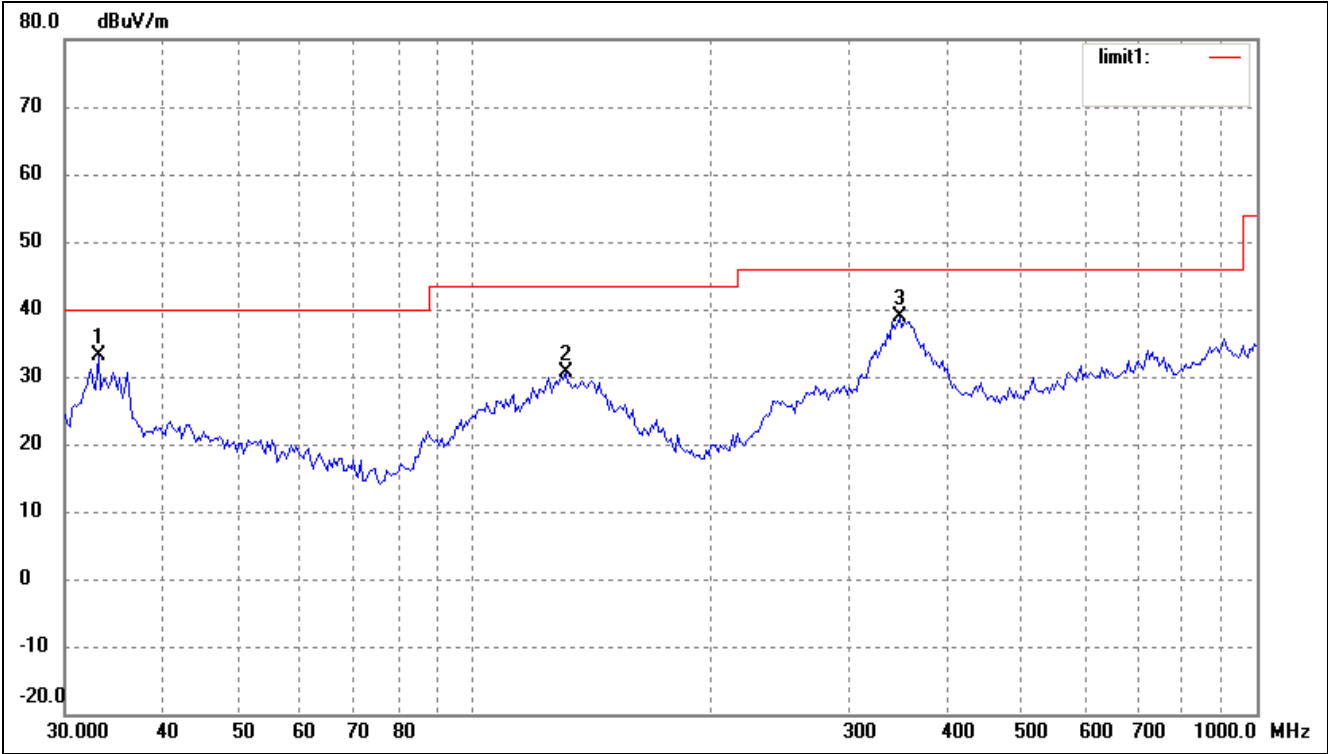


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	33.0950	24.56	8.56	33.12	40.00	-6.88	240	100	peak
2	130.8369	26.63	4.07	30.70	43.50	-12.80	187	100	peak
3	349.2500	28.42	10.40	38.82	46.00	-7.18	220	100	peak

Operating Condition: Transmitting Low Channel (2402MHz) for Audio


Comment: DC 3.7V battery

Test Specification: Horizontal

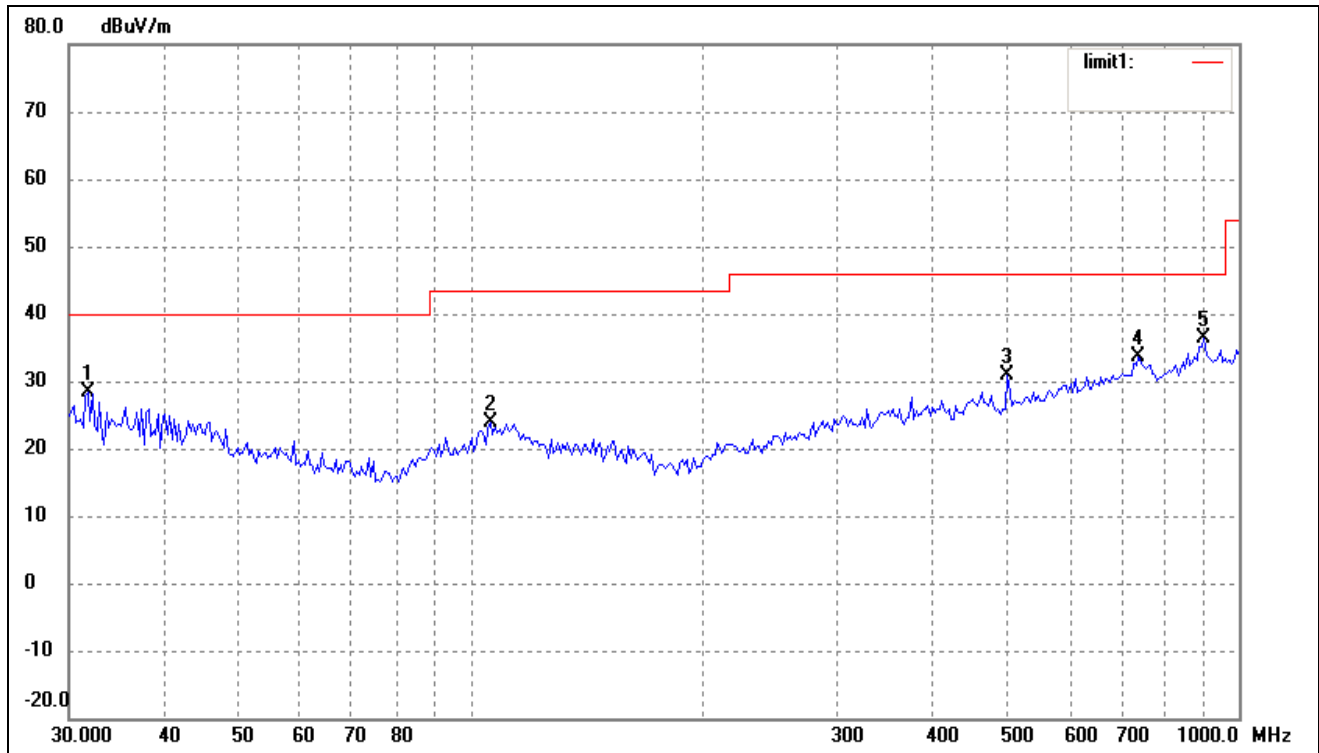

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.7313	20.06	8.33	28.39	40.00	-11.61	360	100	peak
2	106.0126	17.60	6.24	23.84	43.50	-19.66	360	100	peak
3	499.4247	18.71	12.18	30.89	46.00	-15.11	360	100	peak
4	739.6605	15.64	18.07	33.71	46.00	-12.29	360	100	peak
5	900.1474	16.96	19.38	36.34	46.00	-9.66	360	100	peak

Test Specification: Vertical

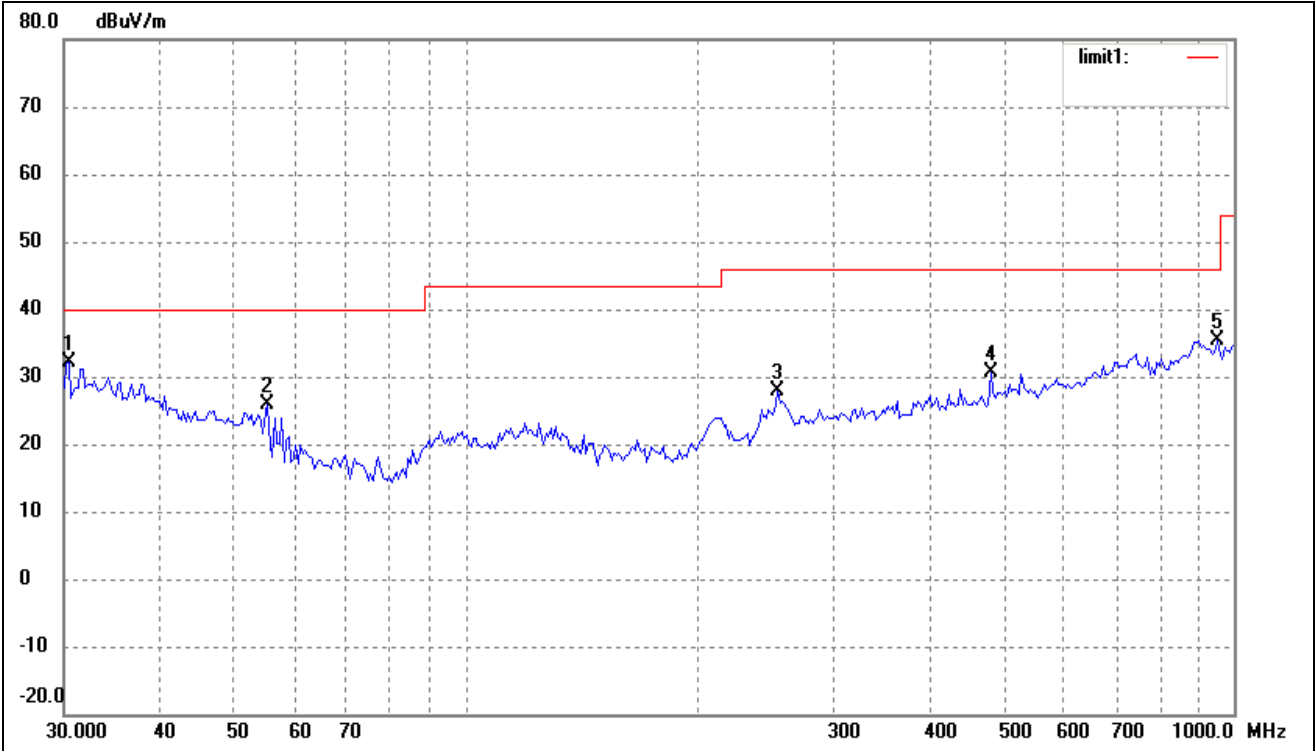


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.4238	24.08	8.11	32.19	40.00	-7.81	334	100	peak
2	55.2207	19.74	6.14	25.88	40.00	-14.12	334	100	peak
3	254.7284	20.30	7.48	27.78	46.00	-18.22	334	100	peak
4	482.2156	19.17	11.49	30.66	46.00	-15.34	334	100	peak
5	952.0937	17.44	18.01	35.45	46.00	-10.55	334	100	peak

Operating Condition: Transmitting Middle Channel (2441MHz) for Audio


Comment: DC 3.7V battery

Test Specification: Horizontal

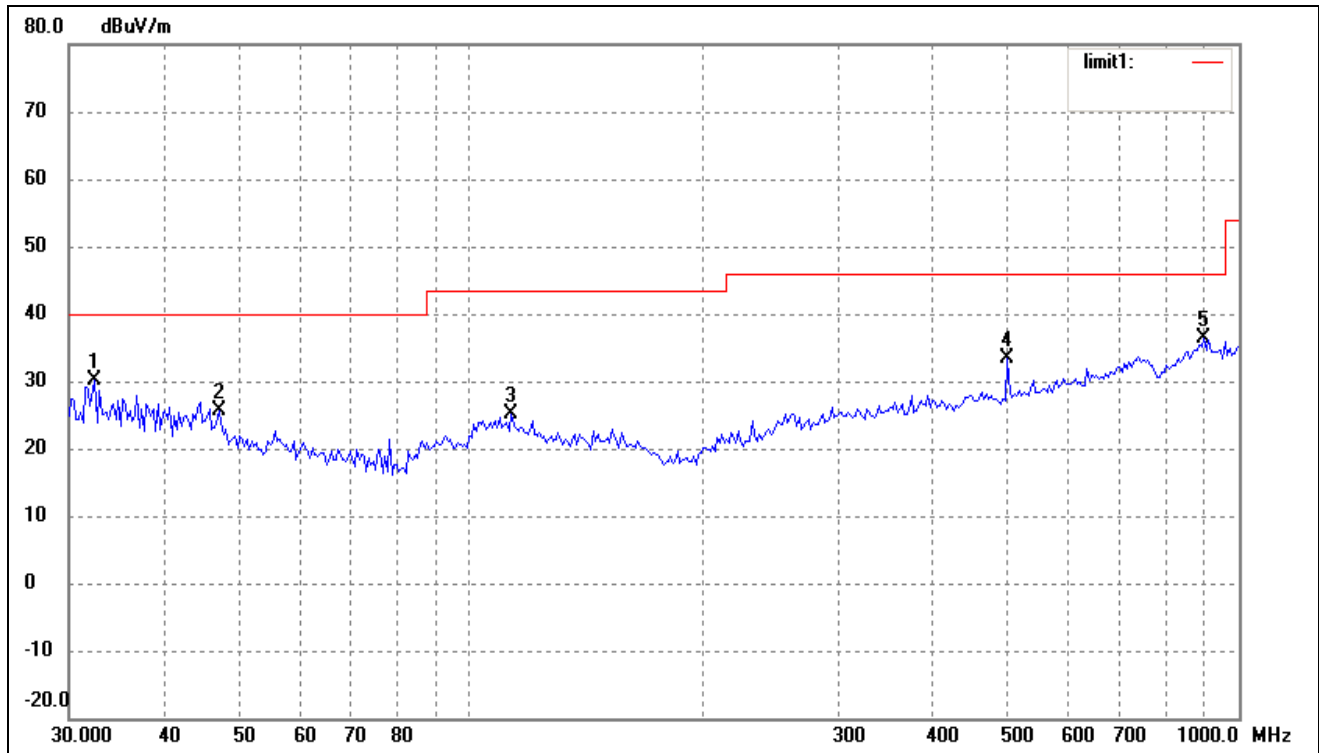

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	32.4059	21.66	8.44	30.10	40.00	-9.90	360	100	peak
2	46.9948	18.02	7.54	25.56	40.00	-14.44	360	100	peak
3	112.9196	19.67	5.56	25.23	43.50	-18.27	360	100	peak
4	499.4247	21.30	12.18	33.48	46.00	-12.52	360	100	peak
5	900.1474	17.01	19.38	36.39	46.00	-9.61	360	100	peak

Test Specification: Vertical

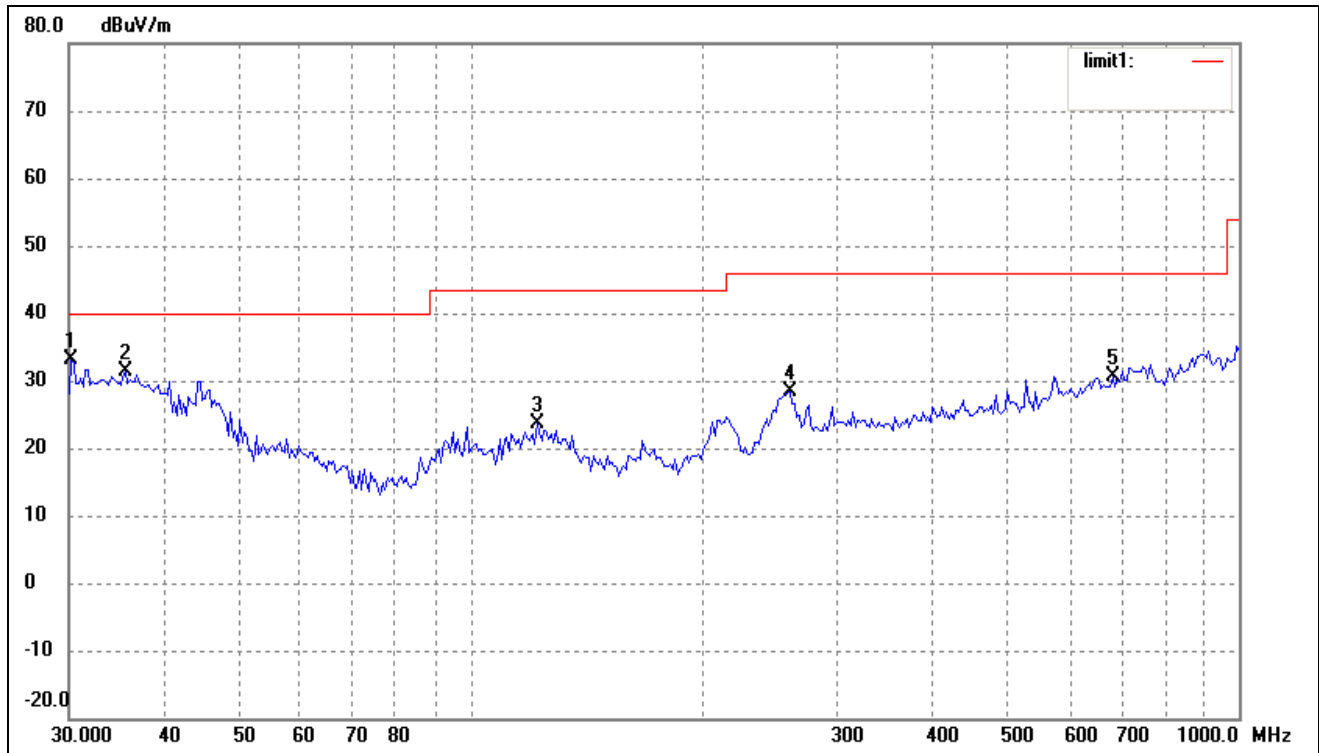


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.2111	24.99	8.07	33.06	40.00	-6.94	227	100	peak
2	35.4993	22.45	8.95	31.40	40.00	-8.60	227	100	peak
3	121.9755	18.84	4.71	23.55	43.50	-19.95	227	100	peak
4	260.1444	20.69	7.72	28.41	46.00	-17.59	227	100	peak
5	684.7454	15.09	15.60	30.69	46.00	-15.31	227	100	peak

Operating Condition: Transmitting High Channel (2480MHz) for Audio


Comment: DC 3.7V battery

Test Specification: Horizontal

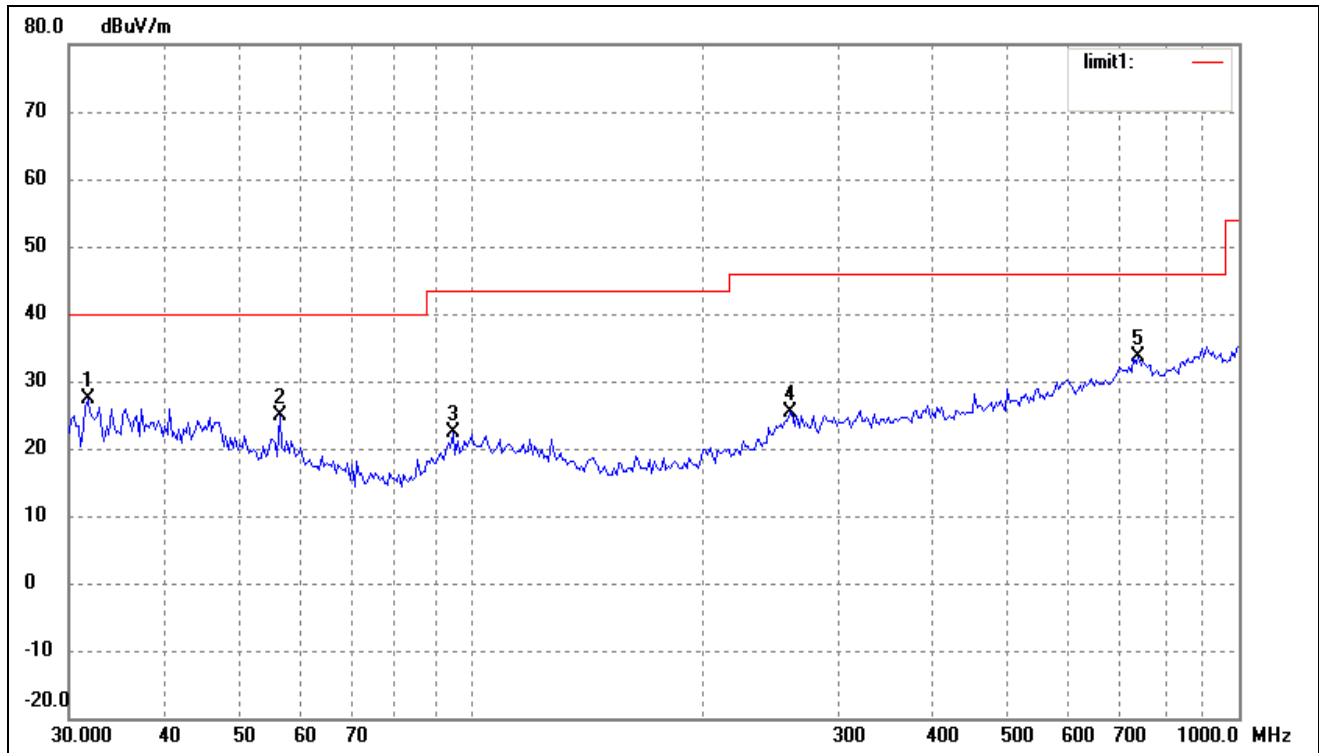

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	31.7313	18.94	8.33	27.27	40.00	-12.73	360	100	peak
2	56.3948	18.78	6.02	24.80	40.00	-15.20	360	100	peak
3	94.7601	16.75	5.54	22.29	43.50	-21.21	360	100	peak
4	260.1444	17.63	7.72	25.35	46.00	-20.65	360	100	peak
5	739.6605	15.48	18.07	33.55	46.00	-12.45	360	100	peak

Test Specification: Vertical

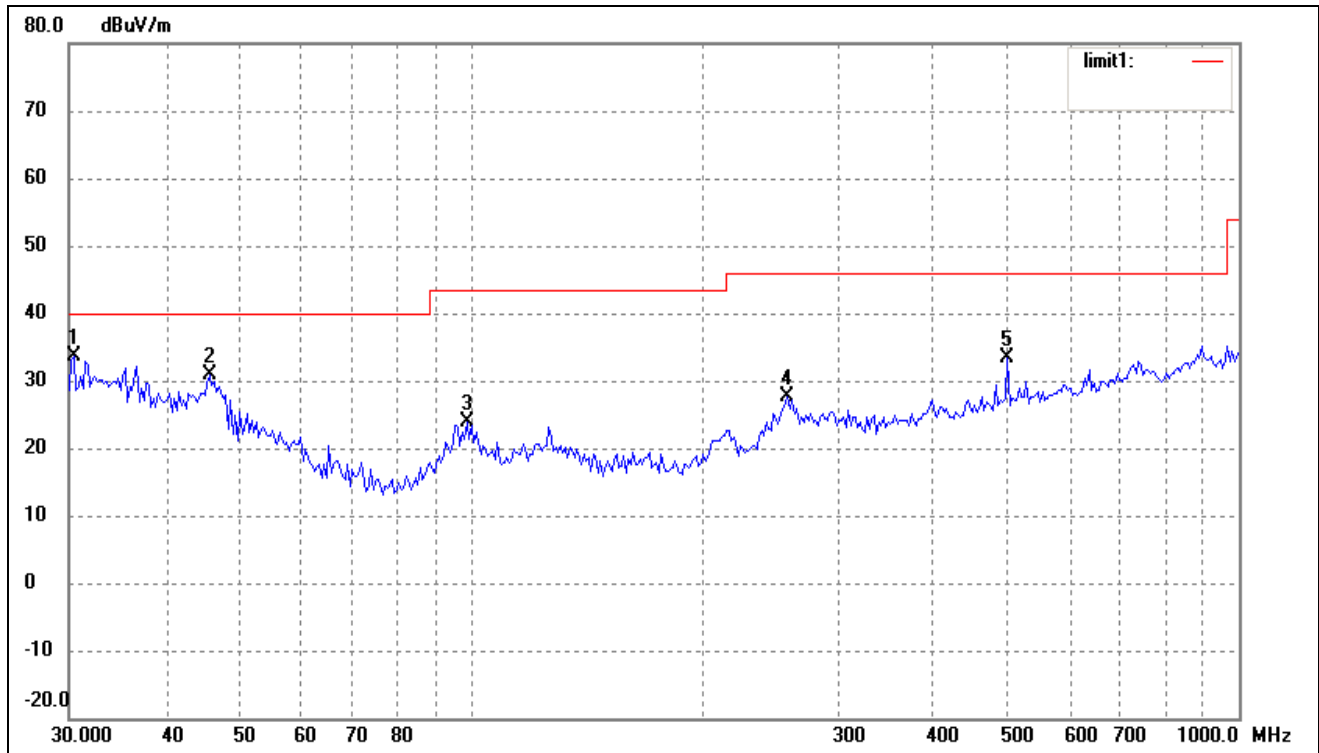

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.4238	25.40	8.11	33.51	40.00	-6.49	360	100	peak
2	45.6948	22.90	7.94	30.84	40.00	-9.16	360	100	peak
3	98.8326	17.35	6.55	23.90	43.50	-19.60	360	100	peak
4	258.3264	20.06	7.64	27.70	46.00	-18.30	360	100	peak
5	499.4247	21.11	12.18	33.29	46.00	-12.71	360	100	peak

Spurious Emissions Above 1GHz

For Mouse

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804*	57.24	-3.92	53.32	74.00	-20.68	H	PK
4804*	39.73	-3.92	35.81	54.00	-18.19	H	AV
7206	54.42	1.00	55.42	74.00	-18.58	H	PK
7206	38.02	1.00	39.02	54.00	-14.98	H	AV
4804*	62.93	-3.92	59.01	74.00	-14.99	V	PK
4804*	43.53	-3.92	39.61	54.00	-14.39	V	AV
7206	55.97	1.00	56.97	74.00	-17.03	V	PK
7206	39.17	1.00	40.17	54.00	-13.83	V	AV
Middle Channel-2441MHz							
4882*	51.15	-3.74	47.41	74.00	-26.59	H	PK
4882*	36.59	-3.74	32.85	54.00	-21.15	H	AV
7323*	51.98	1.58	53.56	74.00	-20.44	H	PK
7323*	37.26	1.58	38.84	54.00	-15.16	H	AV
4882*	68.47	-3.74	64.73	74.00	-9.27	V	PK
4882*	47.72	-3.74	43.98	54.00	-10.02	V	AV
7323*	54.61	1.58	56.19	74.00	-17.81	V	PK
7323*	38.03	1.58	39.61	54.00	-14.39	V	AV
High Channel-2480MHz							
4960*	53.87	-3.48	50.39	74.00	-23.61	H	PK
4960*	38.09	-3.48	34.61	54.00	-19.39	H	AV
7440*	51.69	2.06	53.75	74.00	-20.25	H	PK
7440*	37.35	2.06	39.41	54.00	-14.59	H	AV
4960*	65.59	-3.48	62.11	74.00	-11.89	V	PK
4960*	45.69	-3.48	42.21	54.00	-11.79	V	AV
7440*	51.31	2.06	53.37	74.00	-20.63	V	PK
7440*	37.02	2.06	39.08	54.00	-14.92	V	AV

For Audio

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804*	61.46	-3.92	57.54	74.00	-16.46	H	PK
4804*	49.36	-3.92	45.44	54.00	-8.56	H	AV
7206	60.19	1.00	61.19	74.00	-12.81	H	PK
7206	43.12	1.00	44.12	54.00	-9.88	H	AV
4804*	60.87	-3.92	56.95	74.00	-17.05	V	PK
4804*	47.61	-3.92	43.69	54.00	-10.31	V	AV
7206	61.36	1.00	62.36	74.00	-11.64	V	PK
7206	43.21	1.00	44.21	54.00	-9.79	V	AV
Middle Channel-2441MHz							
4882*	58.35	-3.74	54.61	74.00	-19.39	H	PK
4882*	47.67	-3.74	43.93	54.00	-10.07	H	AV
7323*	53.14	1.47	54.61	74.00	-19.39	H	PK
7323*	40.67	1.47	42.14	54.00	-11.86	H	AV
4882*	62.42	-3.74	58.68	74.00	-15.32	V	PK
4882*	50.73	-3.74	46.99	54.00	-7.01	V	AV
7323*	56.07	1.47	57.54	74.00	-16.46	V	PK
7323*	44.49	1.47	45.96	54.00	-8.04	V	AV
High Channel-2480MHz							
4960*	66.40	-3.48	62.92	74.00	-11.08	H	PK
4960*	50.64	-3.48	47.16	54.00	-6.84	H	AV
7440*	54.36	1.79	56.15	74.00	-17.85	H	PK
7440*	40.66	1.79	42.45	54.00	-11.55	H	AV
4960*	58.48	-3.48	55.00	74.00	-19.00	V	PK
4960*	44.49	-3.48	41.01	54.00	-12.99	V	AV
7440*	54.03	1.79	55.82	74.00	-18.18	V	PK
7440*	43.96	1.79	45.75	54.00	-8.25	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9 kHz to 30MHz.

Note “*” means the frequency fall into the section 15.205 restricted bands of operation

11. Out of Band Emissions

11.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

11.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

11.3 Test Procedure

According to the DA 00-705, the band-edge radiated test method as follows.

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the DA 00-705, the band-edge conducted test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2380MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 100kHz, VBW = 300kHz

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the limit specified in this section (at least 20dB attenuation).

11.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

11.5 Summary of Test Results/Plots


Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.247(d) requirements.

Please refer to the test plots as below.


Bandedge (Radiated)

Lowest Bandedge for Mouse

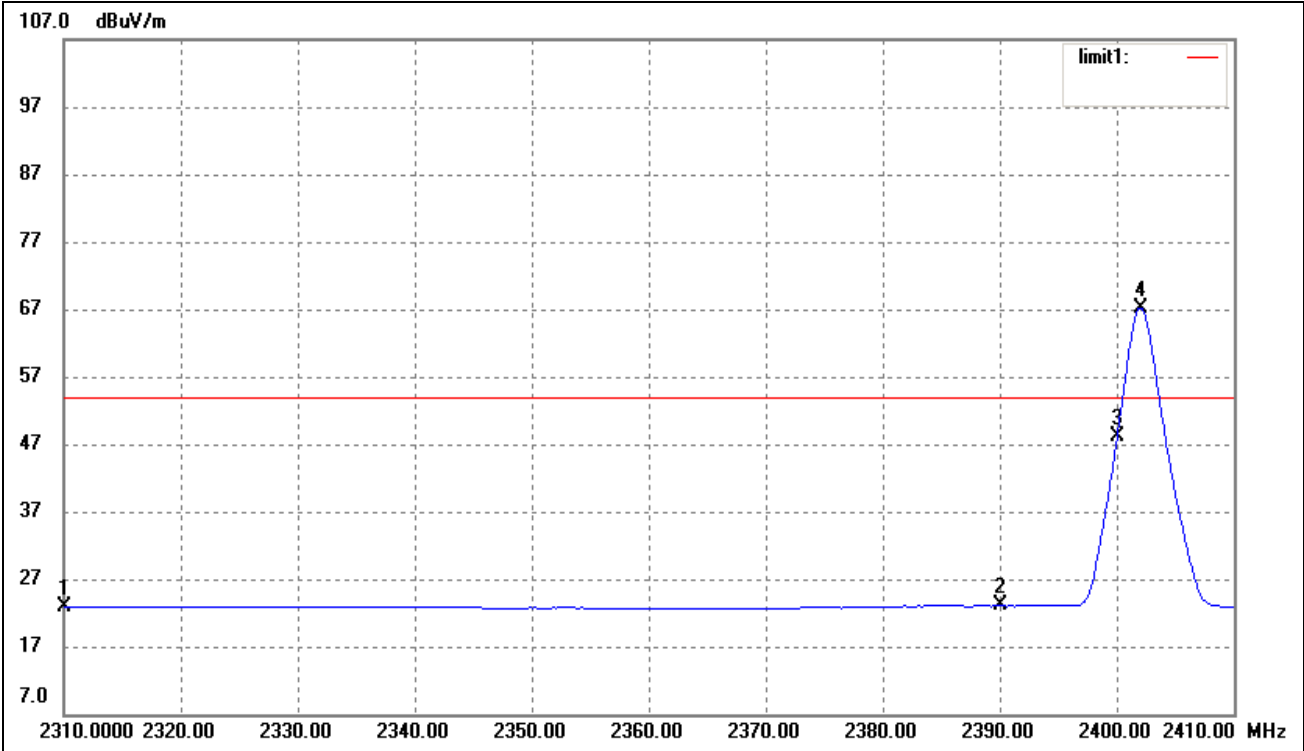


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	34.67	-11.72	22.95	54.00	-31.05	Average Detector
	2310.000	47.18	-11.72	35.46	74.00	-38.54	Peak Detector
2	2390.000	34.77	-11.75	23.02	54.00	-30.98	Average Detector
	2390.000	47.94	-11.75	36.19	74.00	-37.81	Peak Detector
3	2400.000	59.77	-11.75	48.02	54.00	-5.98	Average Detector
	2400.000	70.08	-11.75	58.33	74.00	-15.67	Peak Detector
4	2402.000	78.91	-11.75	67.16	/		Average Detector

Highest Bandedge for Mouse

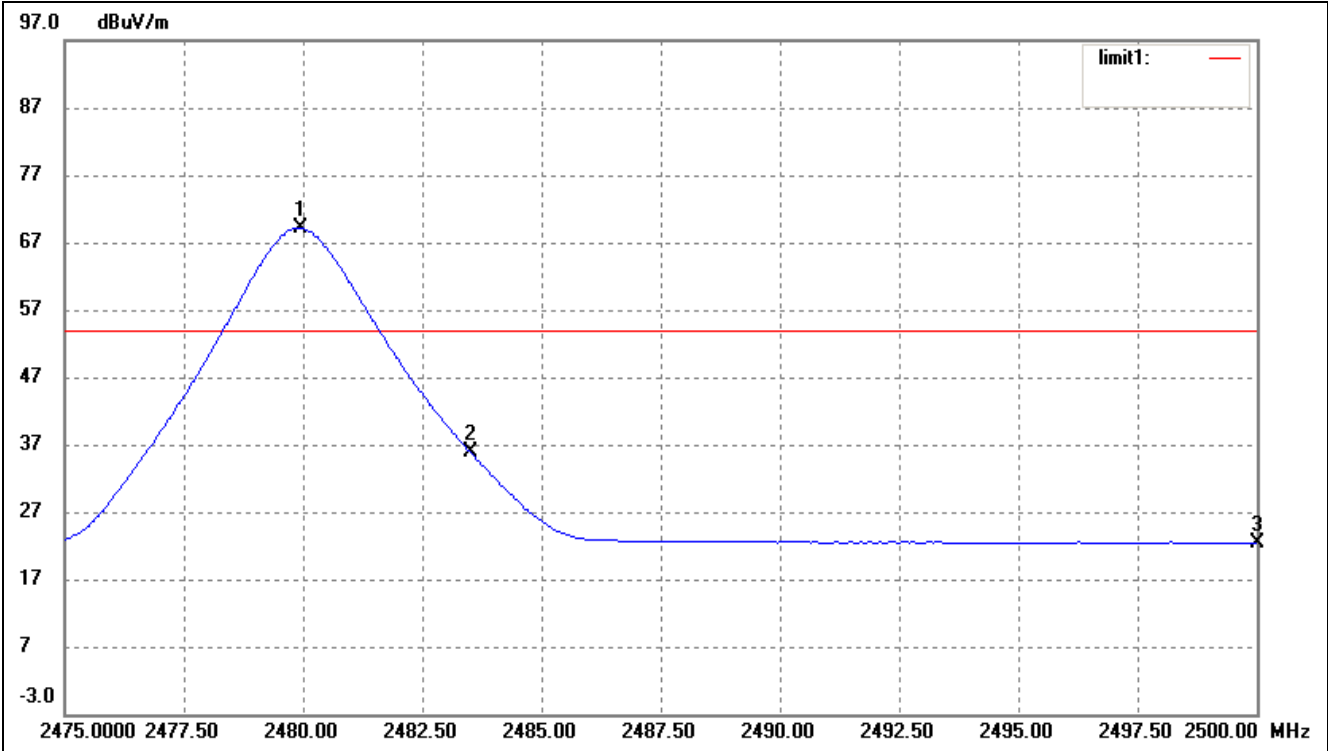


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.950	80.89	-11.77	69.12	/	/	Average Detector
	2479.950	94.80	-11.77	83.03	/	/	Peak Detector
2	2483.500	Delta = 38.57 dBc		30.55	54.00	-23.45	Average Detector
	2483.500			44.46	74.00	-29.54	Peak Detector
3	2500.000	34.15	-11.78	22.37	54.00	-31.63	Average Detector
	2500.000	47.99	-11.78	36.21	74.00	-37.79	Peak Detector

Lowest Bandedge for Audio

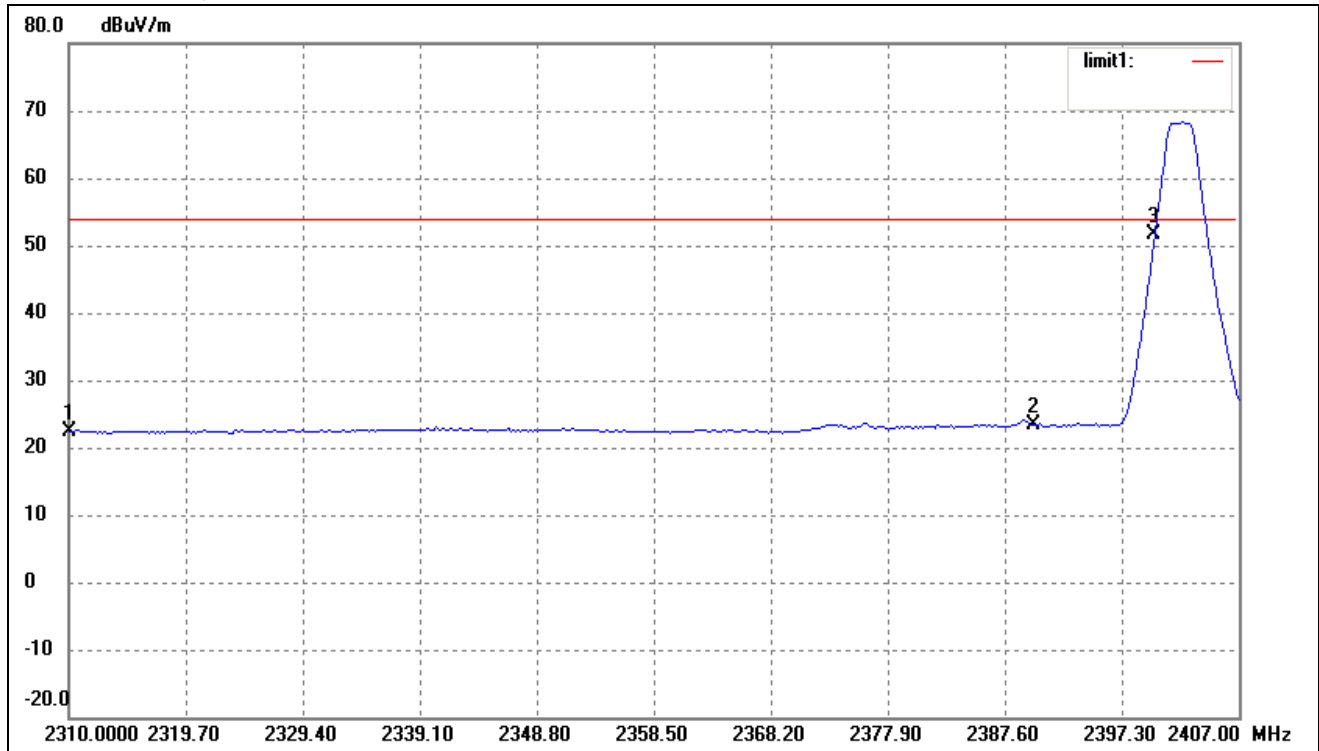

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.19	-11.72	22.47	54.00	-31.53	Average Detector
	2310.000	46.57	-11.72	34.85	74.00	-39.15	Peak Detector
2	2390.000	35.06	-11.75	23.31	54.00	-30.69	Average Detector
	2390.000	47.82	-11.75	36.07	74.00	-37.93	Peak Detector
3	2400.000	63.29	-11.75	51.54	54.00	-2.46	Average Detector
	2400.000	68.76	-11.75	57.01	74.00	-16.99	Peak Detector


Highest Bandedge for Audio

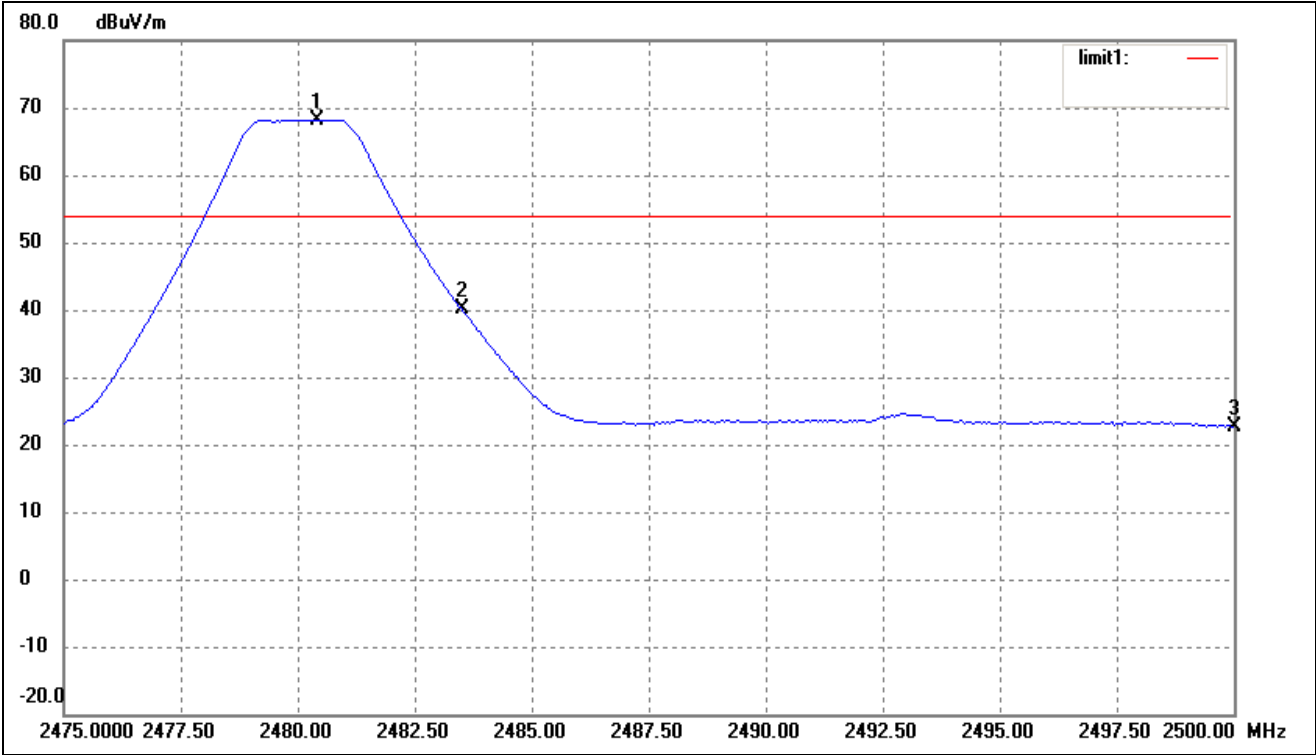

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.400	79.96	-11.77	68.19	/	/	Average Detector
	2480.400	110.60	-11.77	88.83	/	/	Peak Detector
2	2483.500	Delta = 30.64 dBc		37.55	54.00	-16.45	Average Detector
	2483.500			58.19	74.00	-15.81	Peak Detector
3	2500.000	34.33	-11.78	22.55	54.00	-31.45	Average Detector
	2500.000	46.82	-11.78	35.04	74.00	-38.96	Peak Detector


Conducted Spurious Emissions

Low Channel for Mouse:

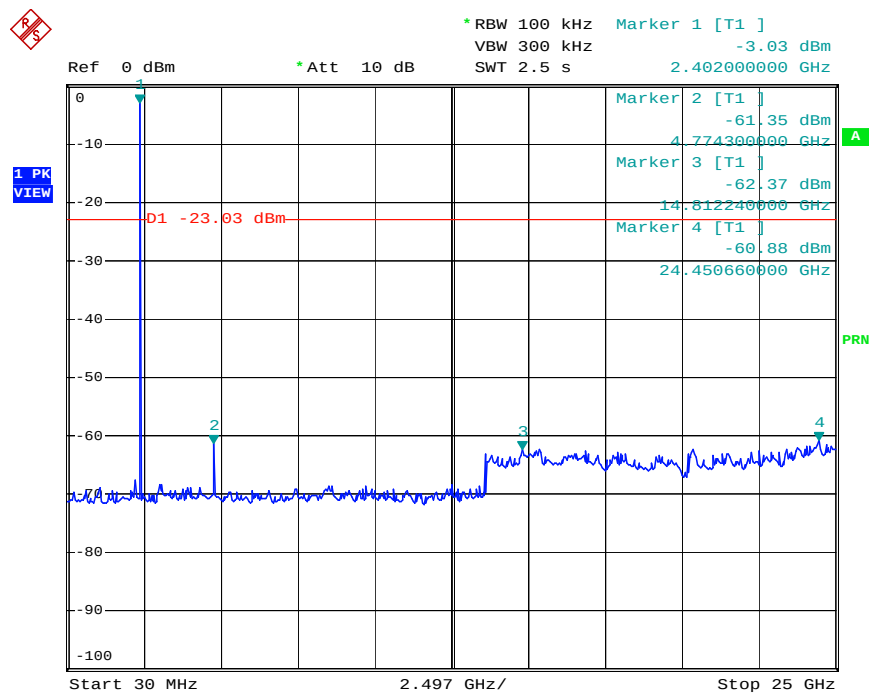


Date: 22.MAR.2013 16:59:36

Middle Channel for Mouse:

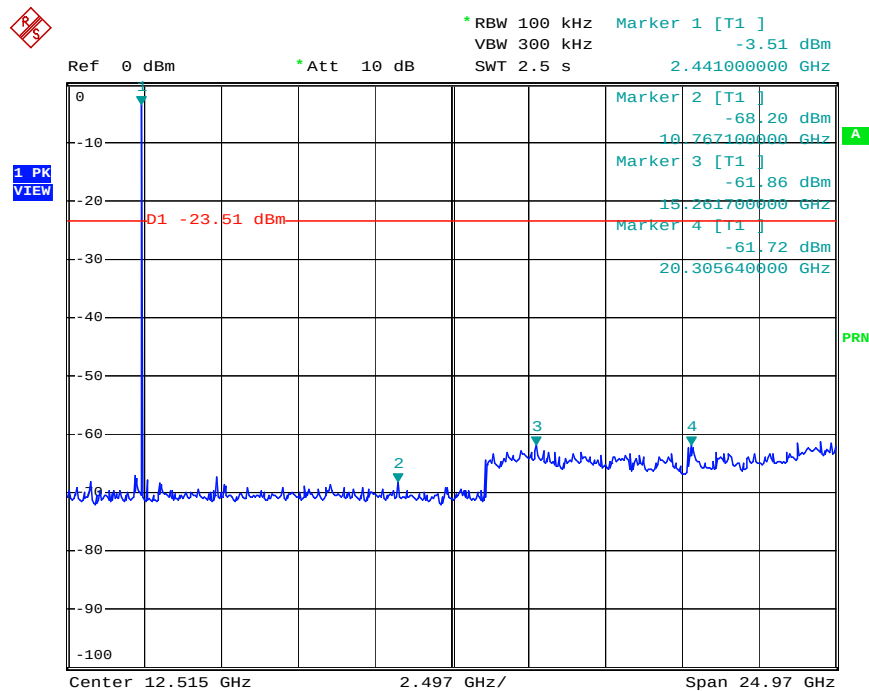


Date: 22.MAR.2013 17:06:21

High Channel for Mouse:

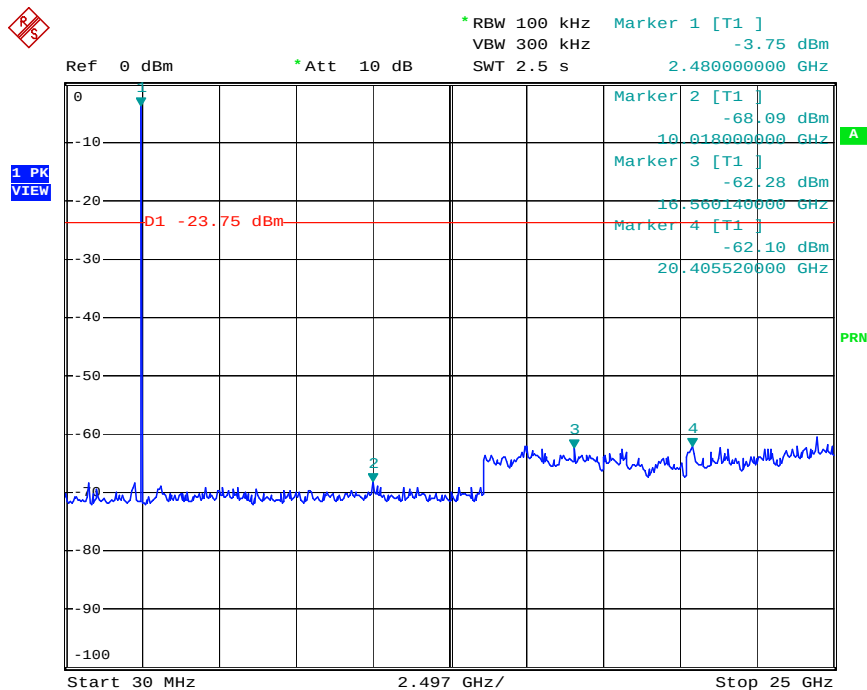


Date: 22.MAR.2013 17:04:02


Low Channel for Audio:

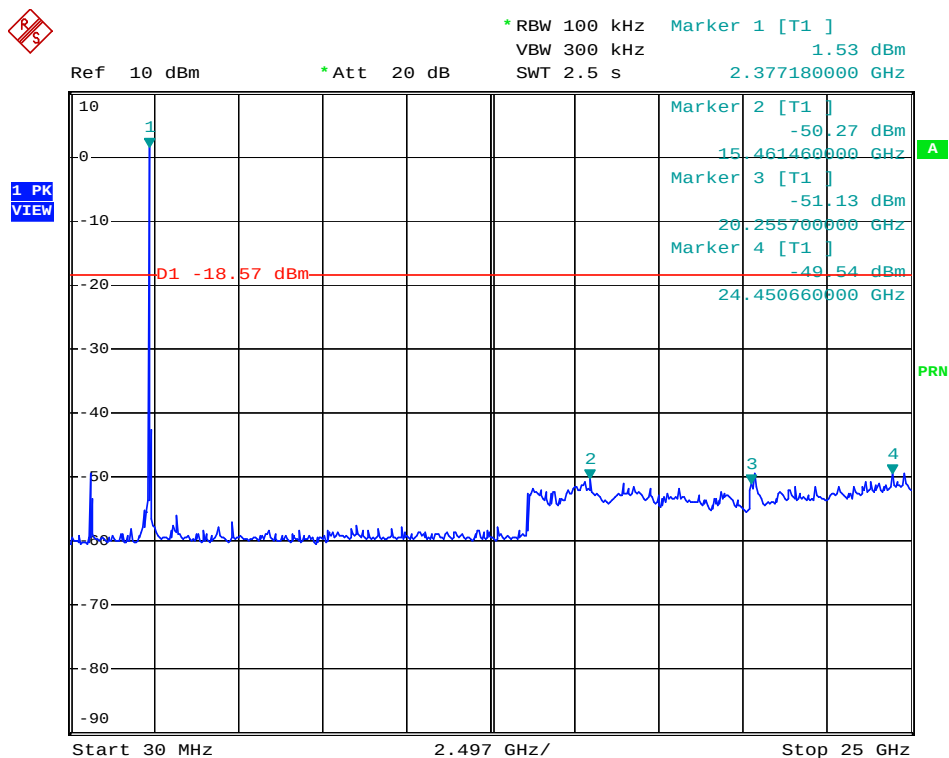

Middle Channel for Audio:

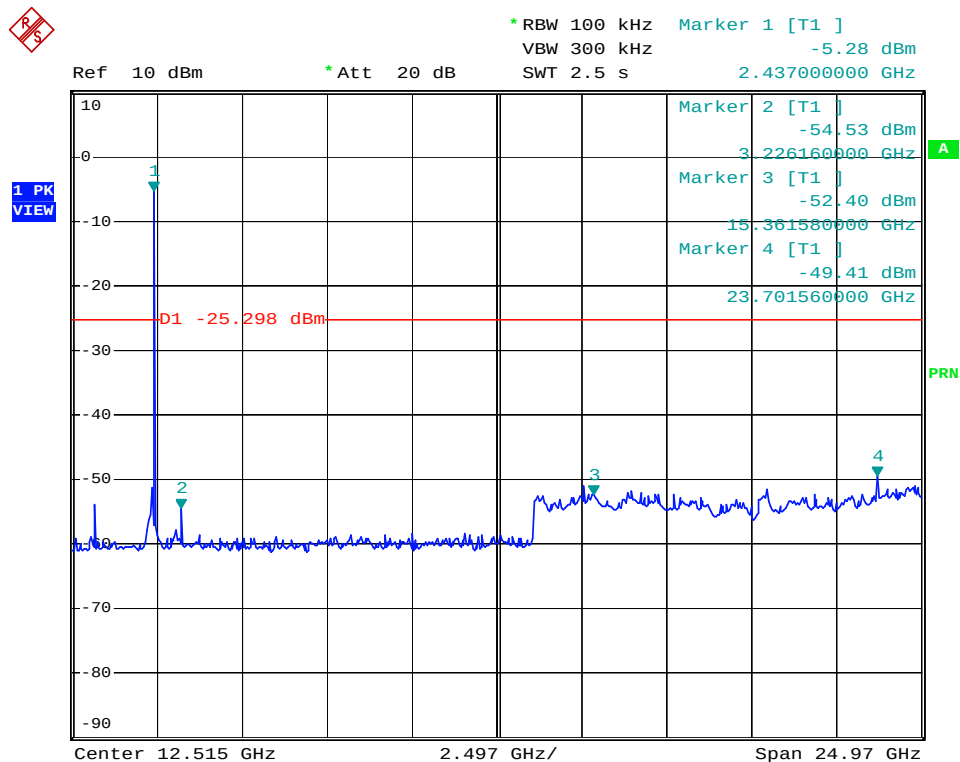

High Channel for Audio:

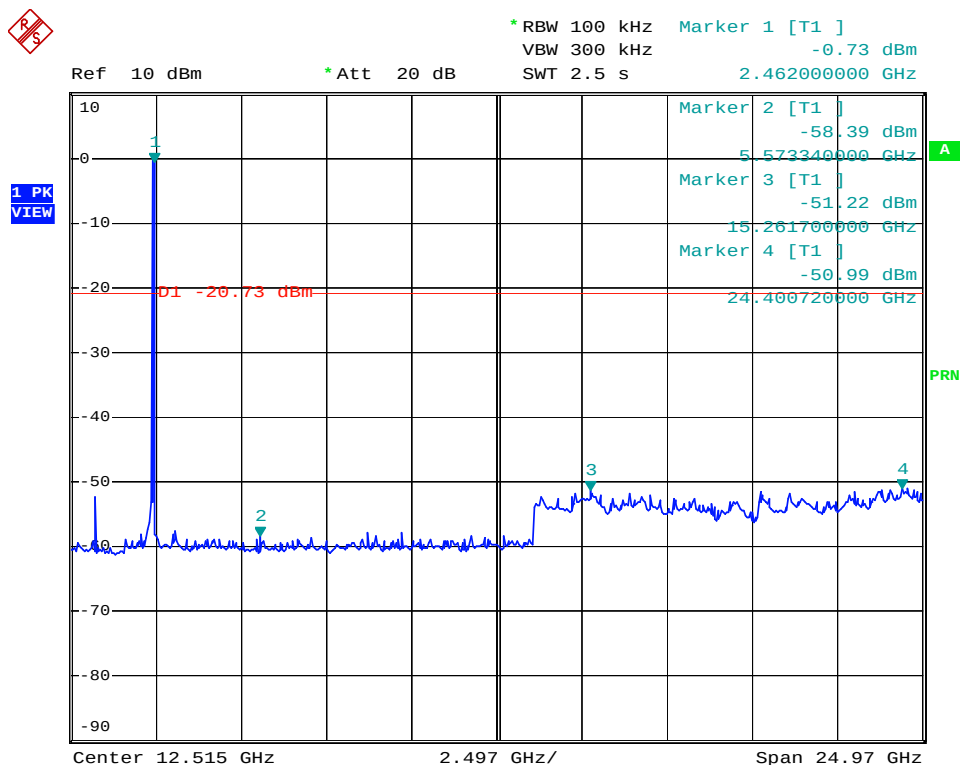

12. Conducted Emissions

12.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

12.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2013-05-07	2014-05-06
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2013-05-07	2014-05-06
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2013-05-07	2014-05-06


12.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

12.4 Basic Test Setup Block Diagram

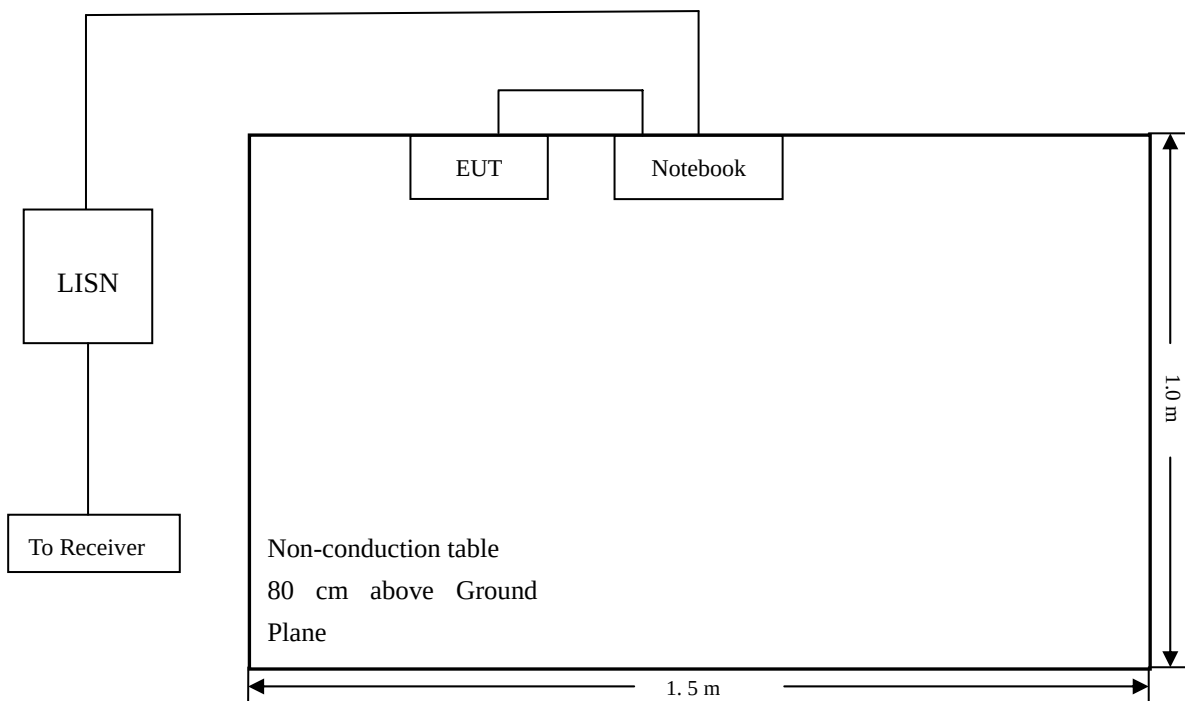

12.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

12.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

12.7 Summary of Test Results/Plots

According to the data in section 12.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


-7.07 dB at 2.922 MHz in the Neutral mode, Peak detector, 0.15-30MHz

12.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: Bluetooth Speaking Mouse
Tested Model: IBT-04
Operating Condition: Charging & Transmitting
Comment: Connected to PC

Test Specification: Neutral

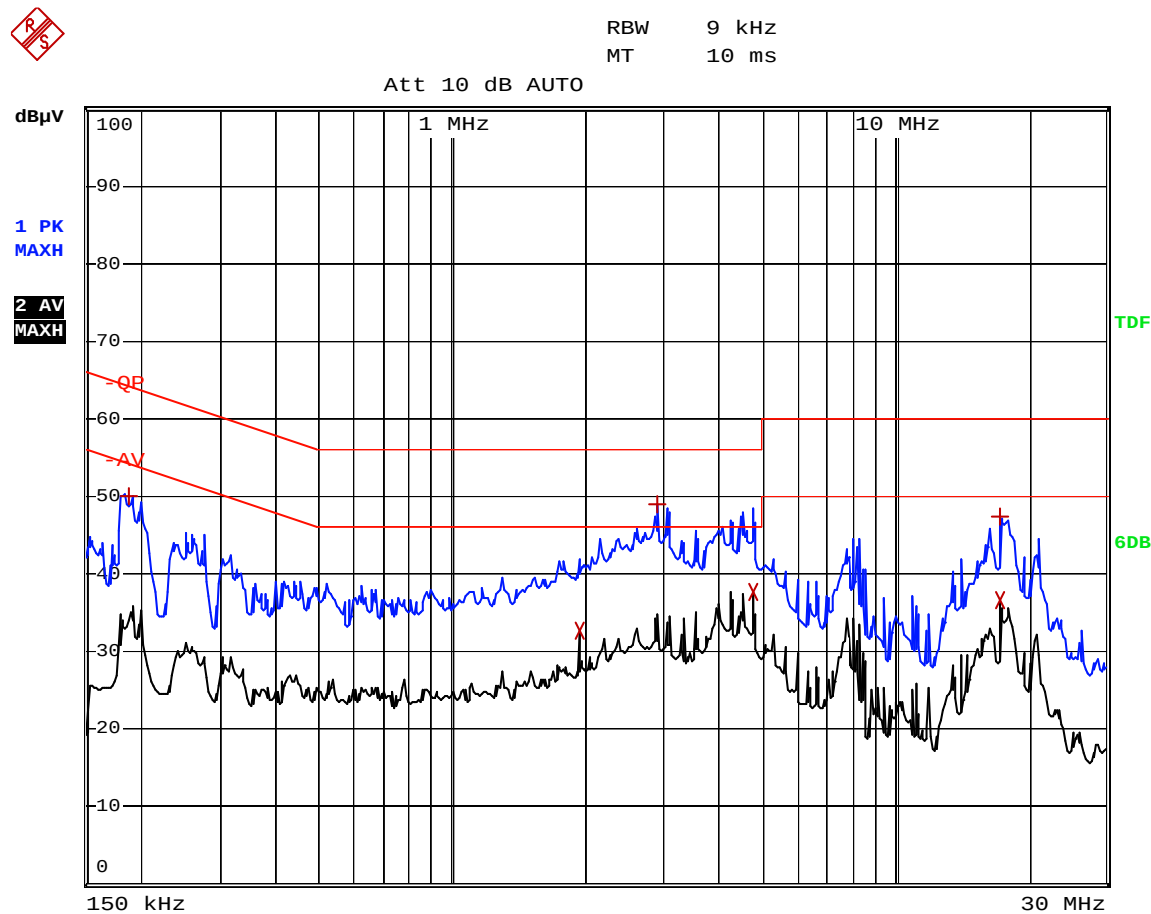

EDIT PEAK LIST (Prescan Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Max Peak	190 kHz	50.12	-13.91
2 Average	1.95 MHz	32.60	-13.40
1 Max Peak	2.922 MHz	48.92	-7.07
2 Average	4.806 MHz	37.73	-8.26
1 Max Peak	17.254 MHz	47.48	-12.51
2 Average	17.266 MHz	36.50	-13.49

Test Specification: Line

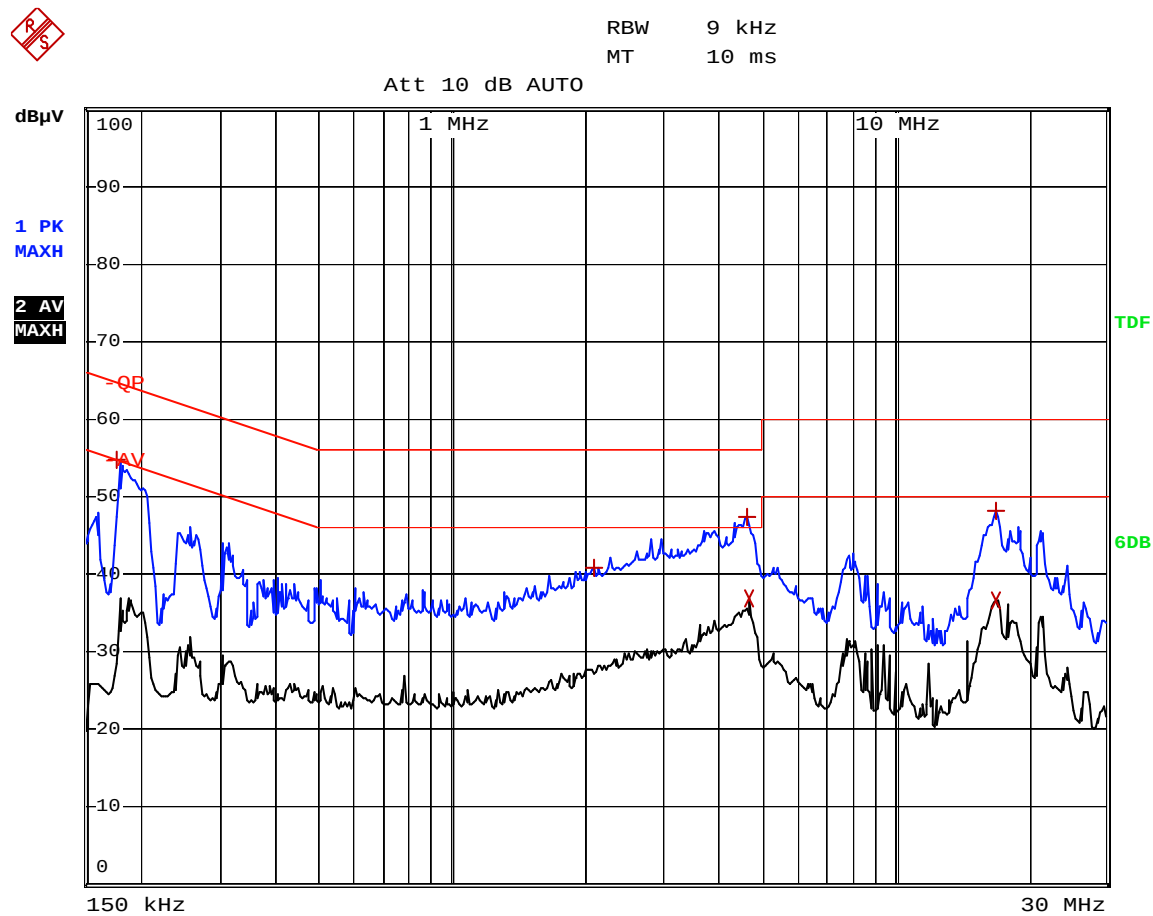

EDIT PEAK LIST (Prescan Results)				
Trace1:		-QP		
Trace2:		-AV		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Max Peak	178 kHz	54.66	-9.91
1	Max Peak	2.102 MHz	40.88	-15.12
1	Max Peak	4.63 MHz	47.29	-8.70
2	Average	4.674 MHz	36.85	-9.14
1	Max Peak	16.994 MHz	48.12	-11.87
2	Average	16.994 MHz	36.66	-13.34

***** END OF REPORT *****