




FCC RADIO TEST REPORT

FCC ID: HHOJYR-N490S

Product : 300Mbps Intelligent Wireless Router

Trade Name :  JCG

Model Name : JYR-N490S

Serial Model : JYR-N490P, JYR-N490I

Report No. : NTEK-2014NT0603822F

Prepared for

Shenzhen Yichen Technology Development Co.,LTD.
3F、 4F、 5F, NO.1, ZhongGuan Honghualing 2ND Industrial Zone, NO.142,
ZhuGuang North Road, Nanshan District, Shenzhen,China 518000

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China
Tel.: +86-0755-61156588 Fax.: +86-0755-61156599
Website:www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name Shenzhen Yichen Technoloy Development Co.,LTD.
Address 3F 、 4F 、 5F, NO.1, ZhongGuan Honghualing 2ND Industrial Zone,
NO.142 ,ZhuGuang North Road, Nanshan District, Shenzhen,China
518000

Manufacture's Name... Shenzhen Yichen Technoloy Development Co.,LTD.
Address 3F 、 4F 、 5F, NO.1, ZhongGuan Honghualing 2ND Industrial Zone,
NO.142 ,ZhuGuang North Road, Nanshan District, Shenzhen,China
518000

Product description

Product name 300Mbps Intelligent Wireless Router

Model and/or type JYR-N490S
reference

Serial Model JYR-N490P,JYR-N490I

Standards FCC Part15.247

Test procedure ANSI C63.4-2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 03 Jun. 2014 ~12 Jun. 2014

Date of Issue..... 12 Jun. 2014

Test Result..... **Pass**

Testing Engineer : 
_____ **Denny Huang**

Technical Manager : 
_____ **(Brown Lu)**

Authorized Signatory : 
_____ **(Bill Yao)**

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.1.2 TEST PROCEDURE	15
3.1.3 DEVIATION FROM TEST STANDARD	15
3.1.4 TEST SETUP	15
3.1.5 EUT OPERATING CONDITIONS	15
3.1.6 TEST RESULTS	16
3.2 RADIATED EMISSION MEASUREMENT	18
3.2.1 RADIATED EMISSION LIMITS	18
3.2.2 TEST PROCEDURE	19
3.2.3 DEVIATION FROM TEST STANDARD	19
3.2.4 TEST SETUP	20
3.2.5 EUT OPERATING CONDITIONS	21
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	22
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	23
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
4 . POWER SPECTRAL DENSITY TEST	37
4.1 APPLIED PROCEDURES / LIMIT	37
4.1.1 TEST PROCEDURE	37
4.1.2 DEVIATION FROM STANDARD	37
4.1.3 TEST SETUP	37
4.1.4 EUT OPERATION CONDITIONS	37
4.1.5 TEST RESULTS	38
5 . BANDWIDTH TEST	46
5.1 APPLIED PROCEDURES / LIMIT	46
5.1.1 TEST PROCEDURE	46

Table of Contents

	Page
5.1.2 EUT OPERATION CONDITIONS	46
5.1.3 TEST RESULTS	47
6 . PEAK OUTPUT POWER TEST	55
6.1 APPLIED PROCEDURES / LIMIT	55
6.1.1 TEST PROCEDURE	55
6.1.2 DEVIATION FROM STANDARD	55
6.1.3 TEST SETUP	55
6.1.4 EUT OPERATION CONDITIONS	55
6.1.5 TEST RESULTS	56
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	57
7.1 DEVIATION FROM STANDARD	57
7.2 TEST SETUP	57
7.3 EUT OPERATION CONDITIONS	57
7.4 TEST RESULTS	58
8 . ANTENNA REQUIREMENT	64
8.1 STANDARD REQUIREMENT	64
8.2 EUT ANTENNA	64
9 . EUT TEST PHOTO	65
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516


1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	300Mbps Intelligent Wireless Router	
Trade Name		
Model Name	JYR-N490S	
Serial Model	JYR-N490P,JYR-N490I	
Model Difference	All the model are the same circuit and RF module, except the model name and colour.	
Product Description	The EUT is a 300Mbps Intelligent Wireless Router	
	Operation Frequency:	802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz
	Modulation Type:	CCK/OFDM/DBPSK/DAPSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5Mbps 802.11n(40MHz):300/270/240/180/150/120/108/90/54 Mbps
	Number Of Channel	802.11b/g/n20MHz:11CH 802.11n40MHz:7CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	802.11b: 16.96 dBm (Max.) 802.11g: 14.69 dBm (Max.) 802.11n(20M): 13.44 dBm (Max.) 802.11n(40M): 12.91 dBm (Max.)
	Antenna Gain (dBi)	Ant. A:5.0dBi Ant. B: 5.0dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
	Channel List	Please refer to the Note 2.
Ratings	DC 5.0V	
Adapter	Model:S050-100-US Input: 100-240V~,50/60Hz,0.2A Output: 5.0V---, 1.0A	
Battery	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		


Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	external antenna	Reserve SMA-type	5.0	Wifi Antenna
B	N/A	N/A	external antenna	Reserve SMA-type	5.0	Wifi Antenna

Antenna gain:

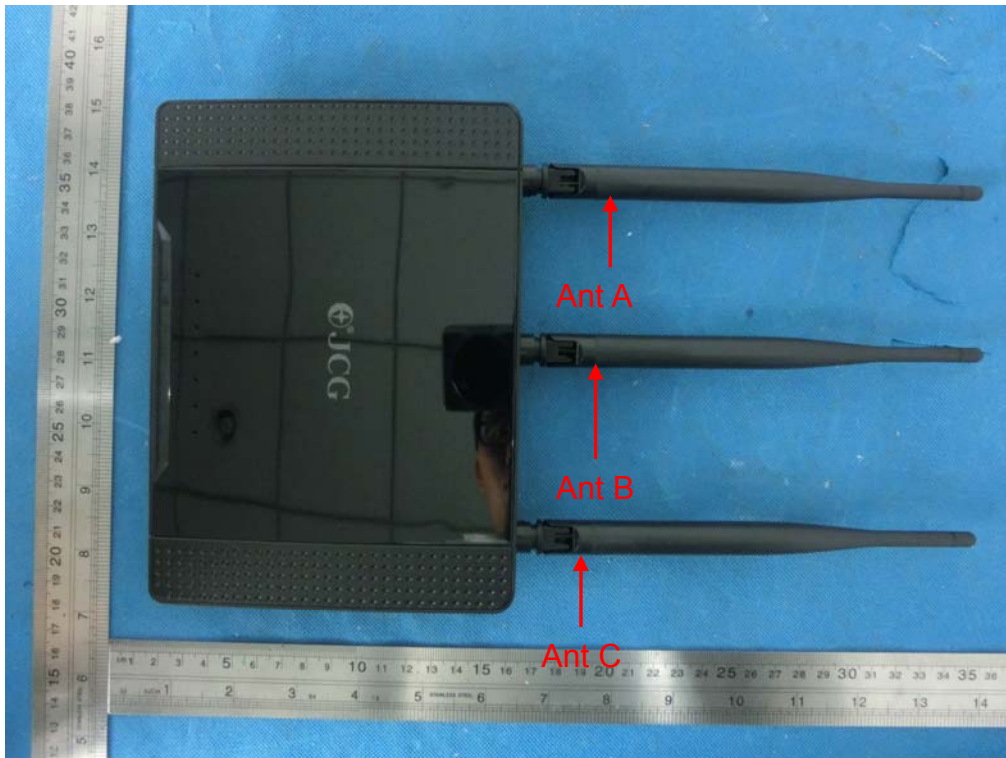

The Control software (MP_TEST.exe) can control antenna A B, Antenna A and B are transmitting, antenna C were closed(no use during normal operating), two antennas simultaneously transmit.

For MIMO mode, Directional gain= $G_{ANT} + 10\log(N)$ dBi = 8dBi

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n/20MHz CH1/ CH6/ CH11
Mode 4	802.11n/40MHz CH3/ CH6/ CH9
Mode 5	Link Mode


For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n/20MHz CH1/ CH6/ CH11
Mode 4	802.11n/40MHz CH3/ CH6/ CH9

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

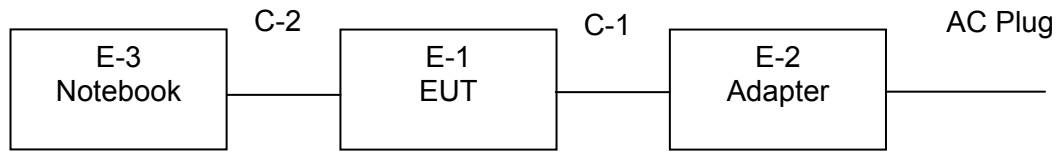

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	300Mbps Intelligent Wireless Router	 JCG	JYR-N490S	N/A	EUT
E-2	Adapter	N/A	S050-100-US	N/A	
E-3	Notebook	Lenove	Thinkpad Edge E430	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.8m	
C-2	NO	NO	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.07	2015.06.06	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.06.07	2015.06.06	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.07	2015.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.07	2015.06.06	1 year

1	Attenuation	MCE	24-10-34	BN9258	2014.06.07	2015.06.06	1 year
---	-------------	-----	----------	--------	------------	------------	--------

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

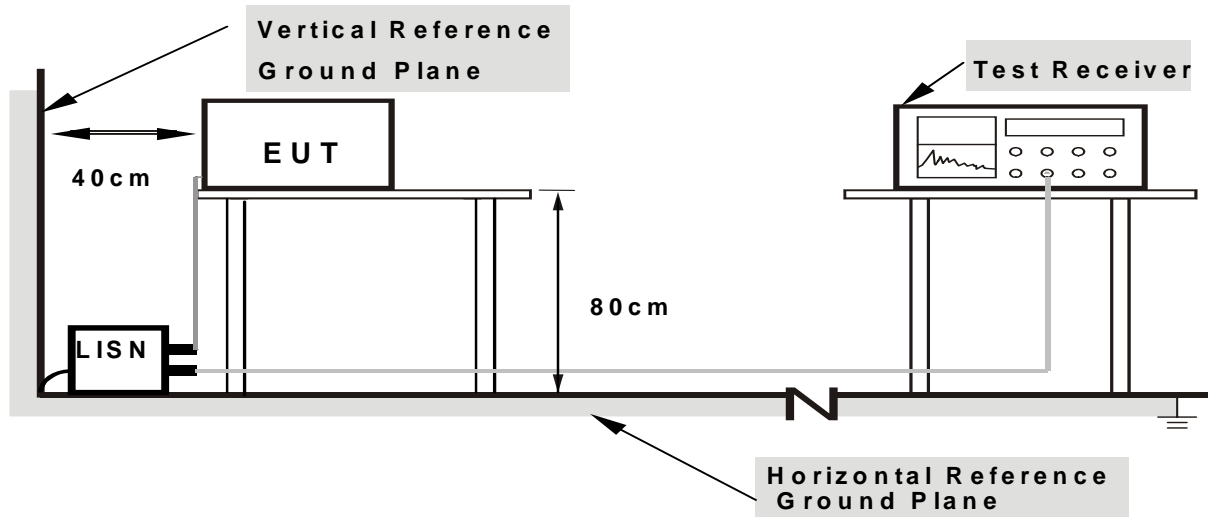

- Note:**
- 1. Support units were connected to second LISN.
 - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	300Mbps Intelligent Wireless Router	Model Name. :	JYR-N490S
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V form Adapter AC 120V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1700	40.42	9.57	49.99	64.96	-14.97	QP
0.1700	22.69	9.57	32.26	54.96	-22.70	AVG
0.3780	30.94	9.50	40.44	58.32	-17.88	QP
0.3780	22.50	9.50	32.00	48.32	-16.32	AVG
0.7780	39.57	9.53	49.10	56.00	-6.90	QP
0.7780	29.69	9.53	39.22	46.00	-6.78	AVG
1.7740	22.83	9.55	32.38	56.00	-23.62	QP
1.7740	10.58	9.55	20.13	46.00	-25.87	AVG
3.7500	25.14	9.58	34.72	56.00	-21.28	QP
3.7500	13.59	9.58	23.17	46.00	-22.83	AVG
18.2419	33.22	10.14	43.36	60.00	-16.64	QP
18.2419	24.44	10.14	34.58	50.00	-15.42	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

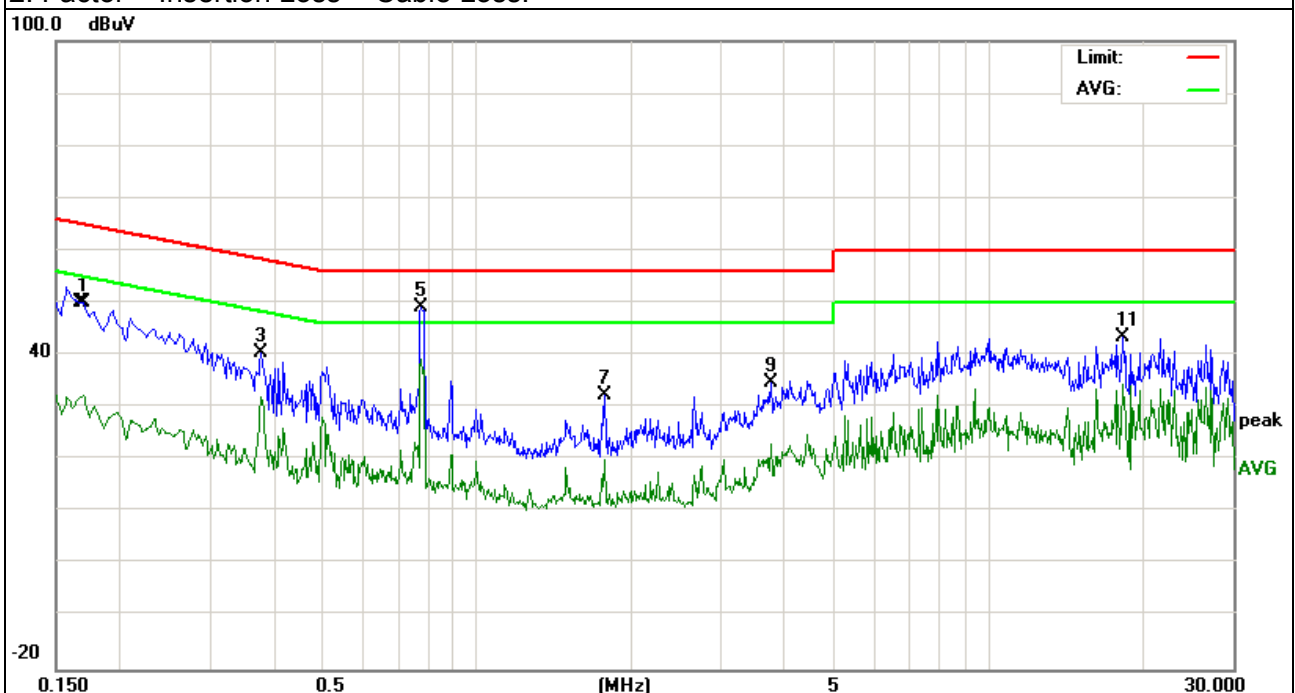


EUT :	300Mbps Intelligent Wireless Router	Model Name. :	JYR-N490S
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V form Adapter AC 120V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Detector Type
0.1499	40.25	9.66	49.91	66.00	-16.09	QP
0.1499	24.33	9.66	33.99	56.00	-22.01	AVG
0.4220	25.96	9.52	35.48	57.41	-21.93	QP
0.4220	18.94	9.52	28.46	47.41	-18.95	AVG
0.7580	36.00	9.54	45.54	56.00	-10.46	QP
0.7580	22.92	9.54	32.46	46.00	-13.54	AVG
7.9219	29.11	9.70	38.81	60.00	-21.19	QP
7.9219	14.82	9.70	24.52	50.00	-25.48	AVG
18.2419	30.17	10.05	40.22	60.00	-19.78	QP
18.2419	17.95	10.05	28.00	50.00	-22.00	AVG
26.4860	28.56	10.28	38.84	60.00	-21.16	QP
26.4860	17.73	10.28	28.01	50.00	-21.99	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

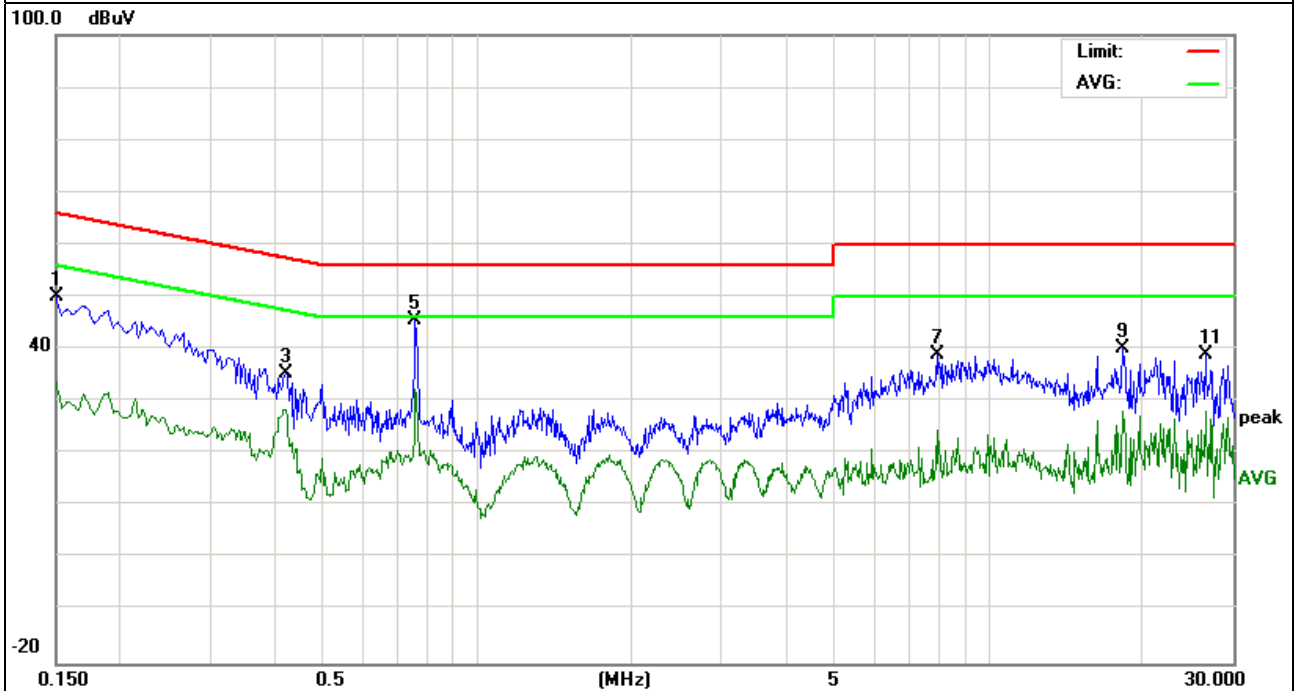

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

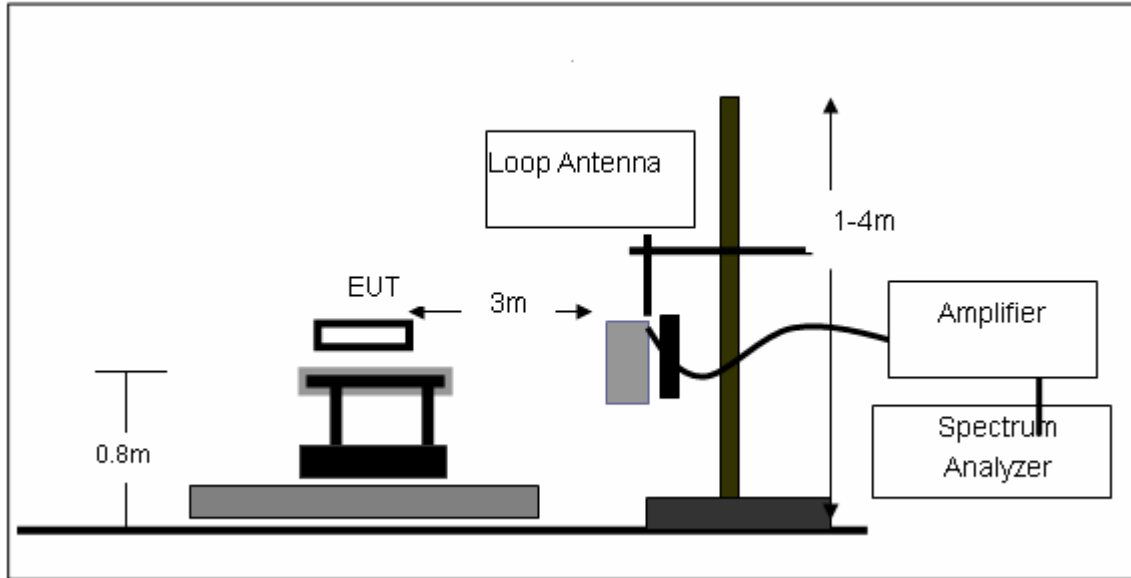

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

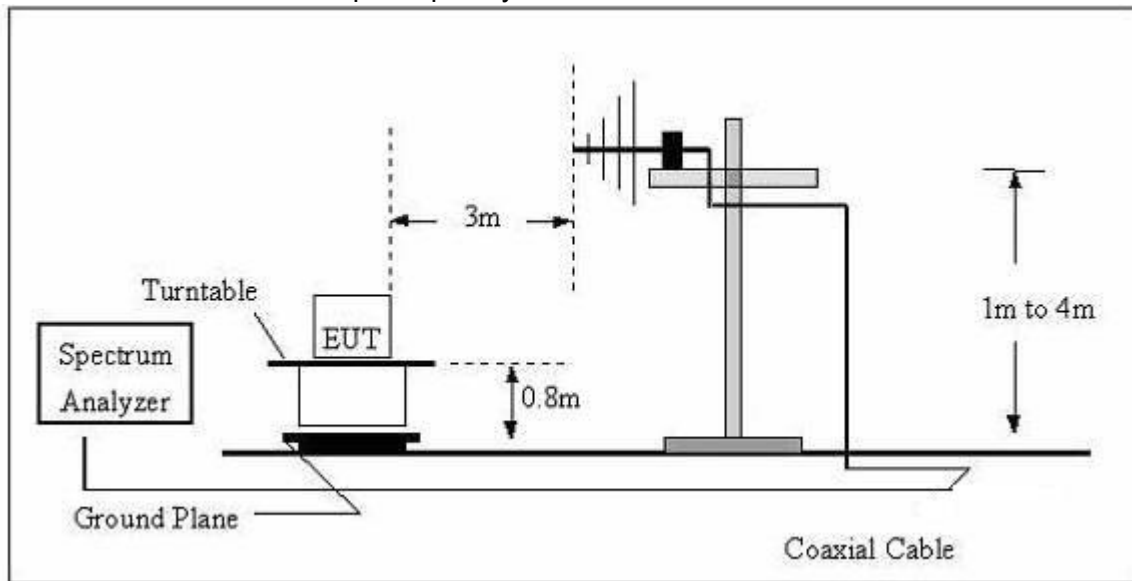

(C) Radiated Emission Test-Up Frequency Above 1GHz

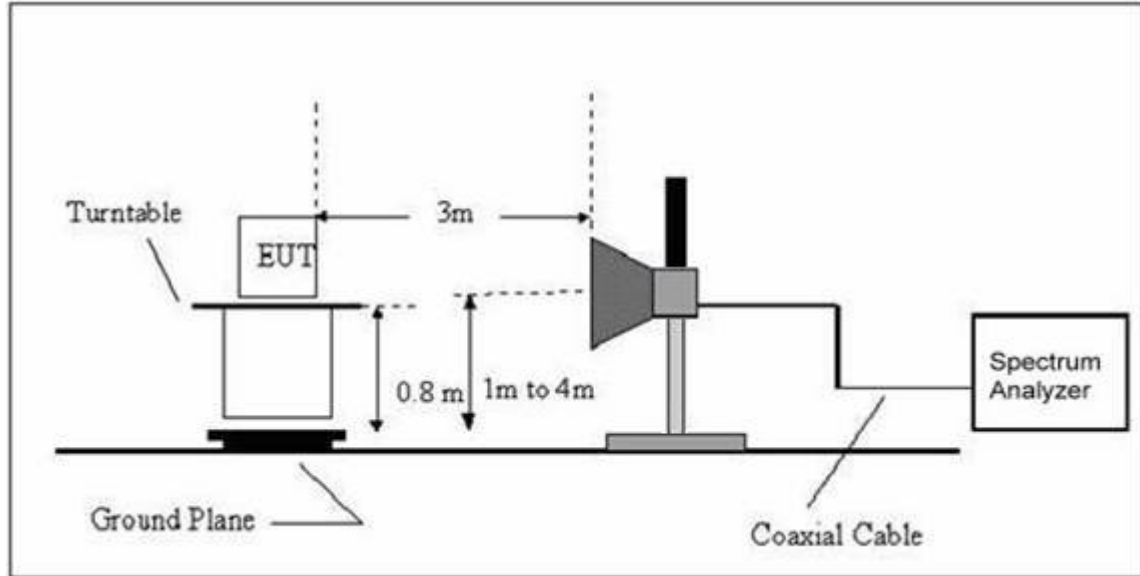

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	300Mbps Intelligent Wireless Router	Model Name. :	JYR-N490S
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	104.5361	25.46	9.42	34.88	43.50	-8.62	QP
V	125.0066	27.71	11.99	39.70	43.50	-3.80	QP
V	235.8163	28.71	13.21	41.92	46.00	-4.08	QP
V	308.9125	27.57	14.53	42.10	46.00	-3.90	QP
V	504.7062	21.81	20.39	42.20	46.00	-3.80	QP
V	900.1473	15.09	27.01	42.10	46.00	-3.90	QP
H	38.0782	18.85	14.75	33.60	40.00	-6.40	QP
H	49.7068	23.02	10.77	33.79	40.00	-6.21	QP
H	125.8863	25.63	11.97	37.60	43.50	-5.90	QP
H	314.3765	27.65	14.75	42.40	46.00	-3.60	QP
H	501.1788	20.28	20.32	40.60	46.00	-5.40	QP
H	622.8899	16.90	22.87	39.77	46.00	-6.23	QP

Remark:



Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)



Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector (PK/QP/AV)	Polar (H/V)
Low Channel (2412 MHz)-Above 1G							
2494.118	60.62	-11.53	49.09	74	-24.91	Pk	Vertical
2499.618	57.66	-12.37	45.29	74	-28.71	Pk	Vertical
4824.225	57.72	-3.26	54.46	74	-19.54	Pk	Vertical
4825.097	58.41	-9.12	49.29	74	-24.71	Pk	Vertical
1488.179	61.76	-16.42	45.34	74	-28.66	Pk	Vertical
1641.021	60.96	-15.89	45.07	74	-28.93	Pk	Horizontal
2097.298	59.82	-11.66	48.16	74	-25.84	Pk	Horizontal
1079.642	61.72	-19.25	42.47	74	-31.53	Pk	Horizontal
1489.919	60.54	-16.87	43.67	74	-30.33	Pk	Horizontal
1898.158	57.81	-14.02	43.79	74	-30.21	Pk	Horizontal
Mid Channel (2437 MHz)-Above 1G							
2472.436	54.92	-11.77	43.15	74	-30.85	Pk	Vertical
2472.773	55.47	-9.73	45.74	74	-28.26	Pk	Vertical
4816.084	54.89	-6.49	48.40	74	-25.60	Pk	Vertical
4815.632	54.20	-6.94	47.26	74	-26.74	Pk	Vertical
1431.194	61.54	-17.80	43.74	74	-30.26	Pk	Vertical
1632.548	59.36	-16.23	43.13	74	-30.87	Pk	Horizontal
2282.796	53.05	-13.05	40.00	74	-34.00	Pk	Horizontal
1275.174	58.54	-18.26	40.28	74	-33.72	Pk	Horizontal
1630.043	57.54	-16.28	41.26	74	-32.74	Pk	Horizontal
1890.112	57.41	-14.51	42.90	74	-31.10	Pk	Horizontal
High Channel (2462 MHz)- Above 1G							
2456.224	55.67	-13.03	42.64	74	-31.36	Pk	Vertical
2455.210	55.53	-11.95	43.58	74	-30.42	Pk	Vertical
4928.666	52.08	-9.56	42.52	74	-31.48	Pk	Vertical
4930.031	51.39	-3.75	47.64	74	-26.36	Pk	Vertical
1190.029	56.26	-18.95	37.31	74	-36.69	Pk	Vertical
1641.021	55.56	-16.23	39.33	74	-34.67	Pk	Horizontal
2086.063	53.10	-12.21	40.89	74	-33.11	Pk	Horizontal
1539.881	55.59	-17.38	38.21	74	-35.79	Pk	Horizontal
1793.726	55.47	-15.26	40.21	74	-33.79	Pk	Horizontal
1894.764	55.10	-14.51	40.59	74	-33.41	Pk	Horizontal

Note: Scan with 802.11b, 802.11g, 802.11n(20M/40M), the worst case is 802.11b.
 When PK value is lower than the Average value limit, average didn't record.



Conducted Spurious Emissions at Antenna Port:
802.11b Low Channel

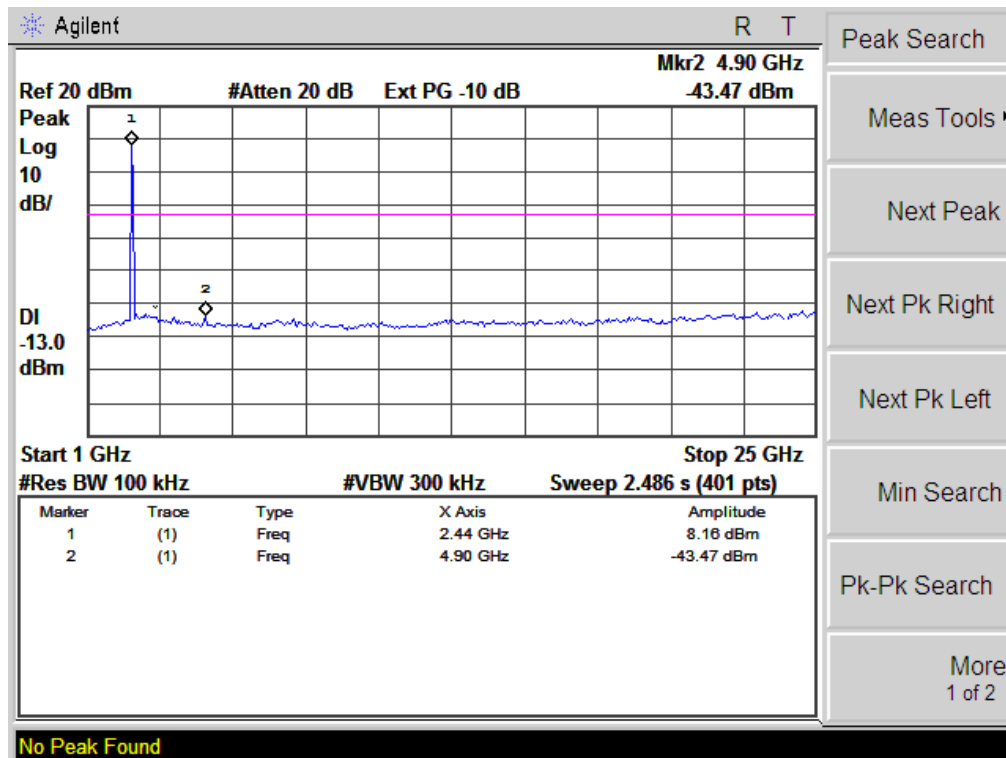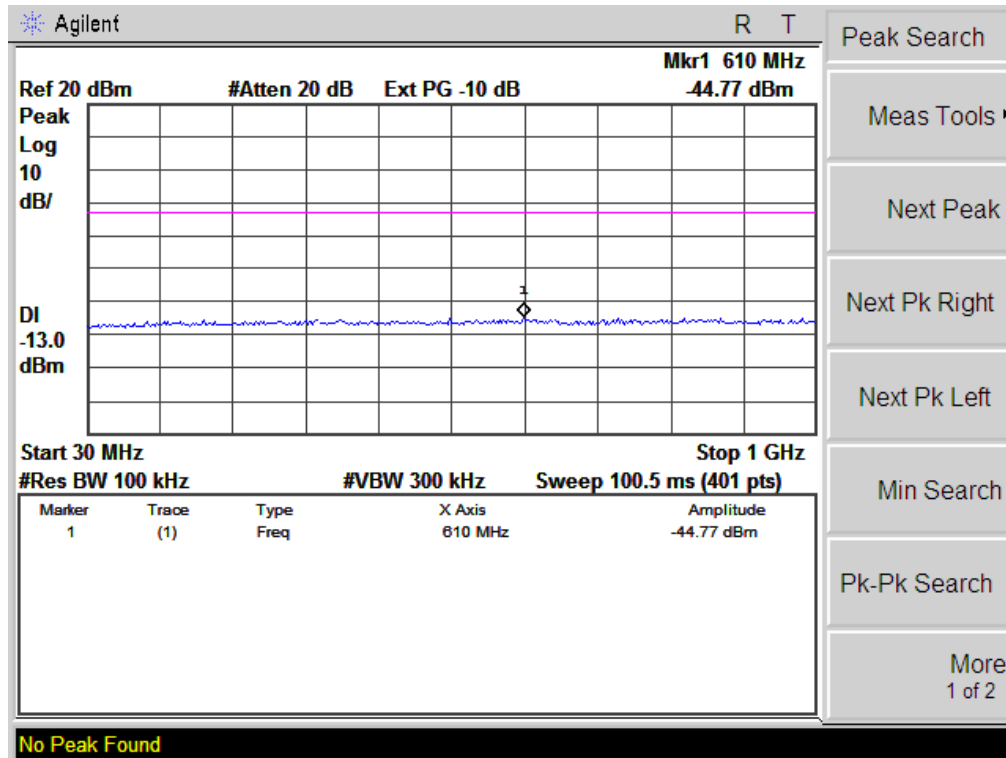



802.11b Middle Channel

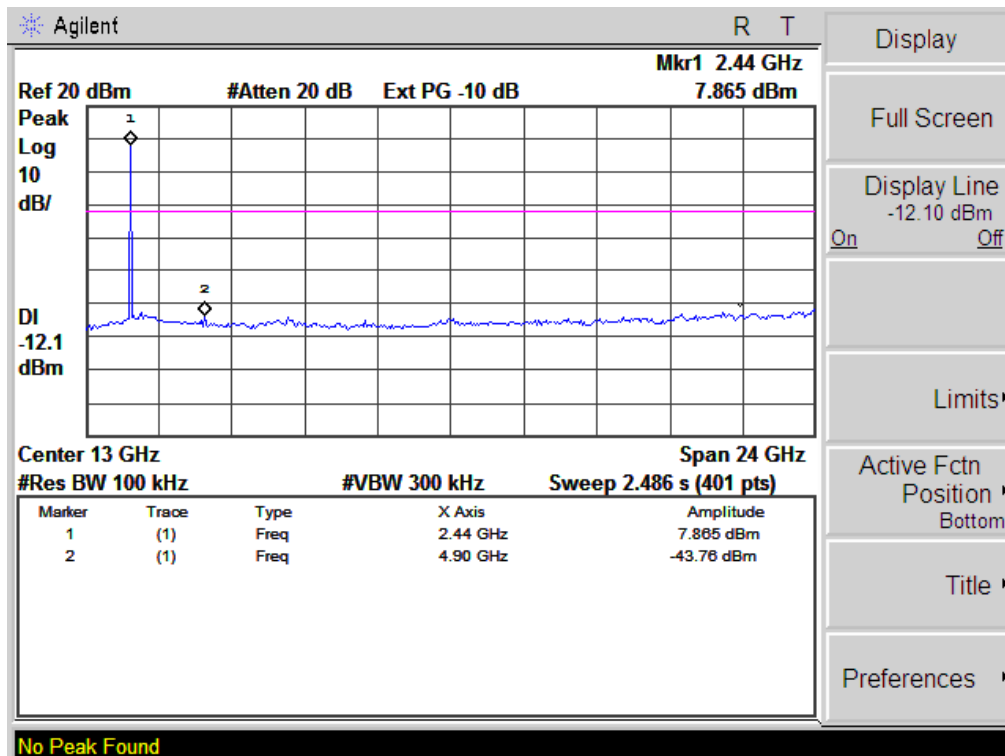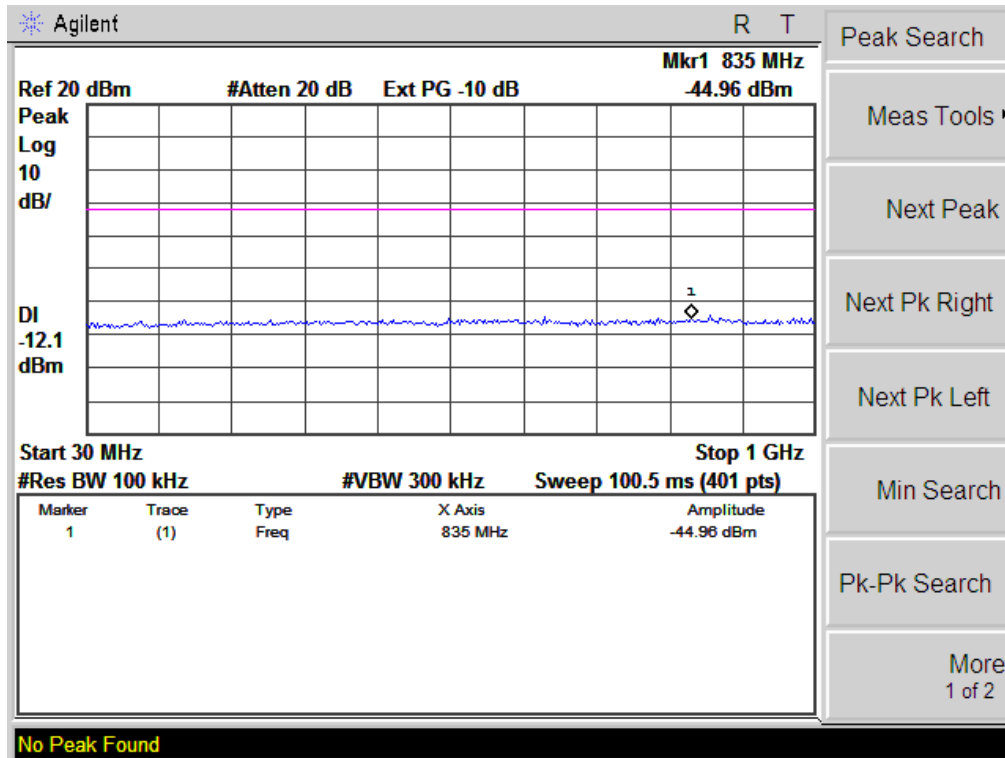



802.11b High Channel

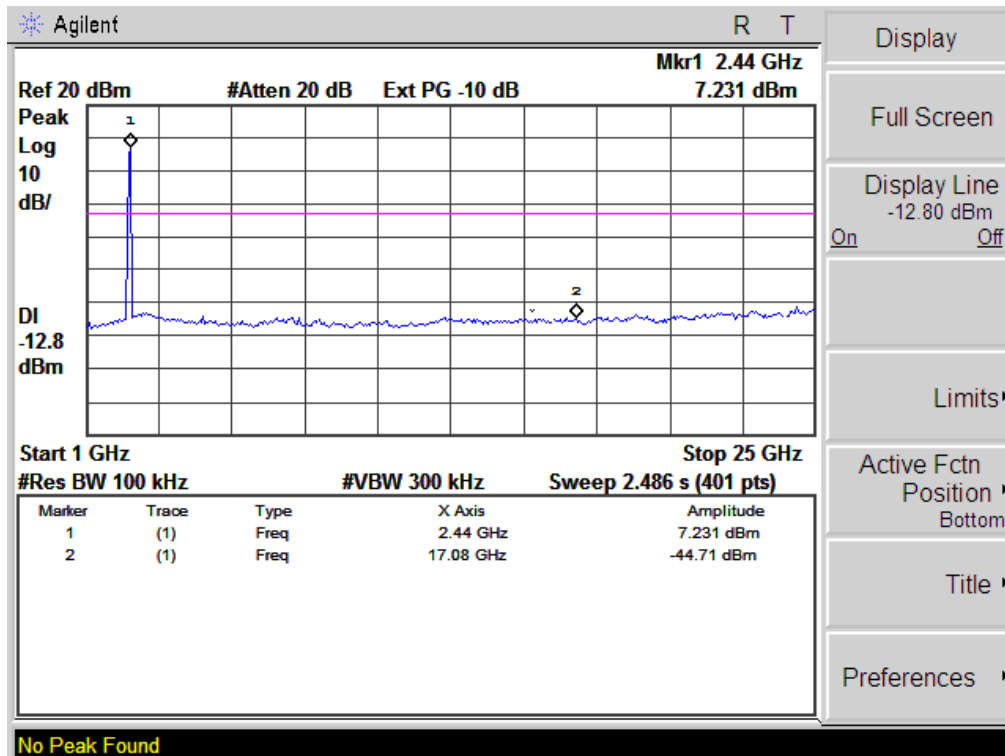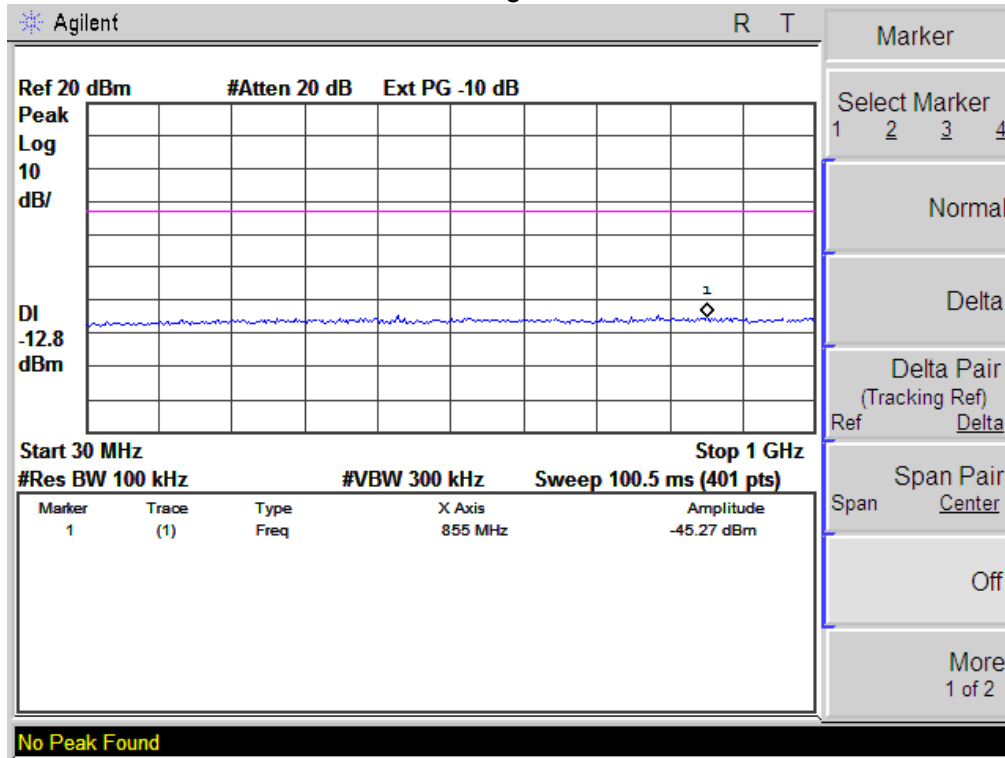


802.11g Low Channel

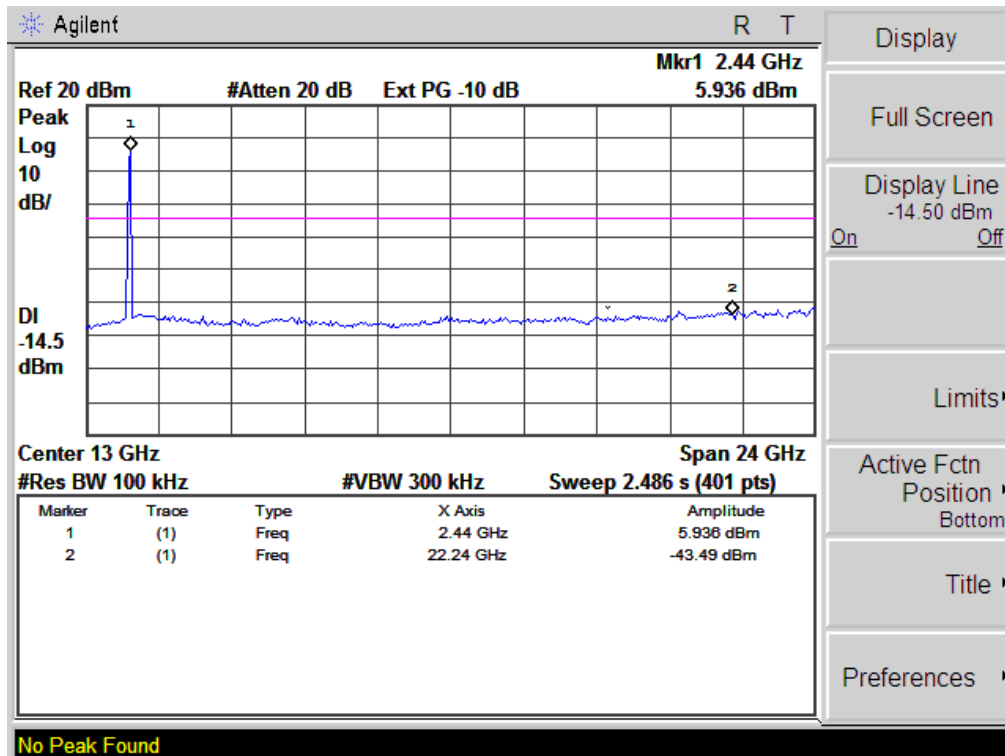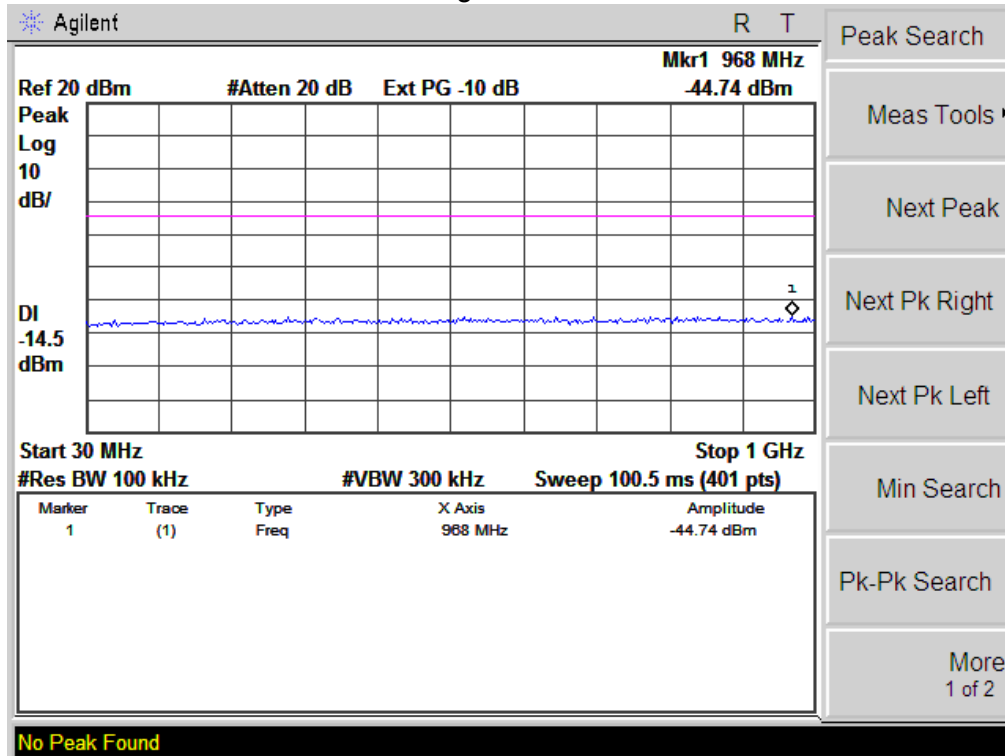


802.11g Middle Channel

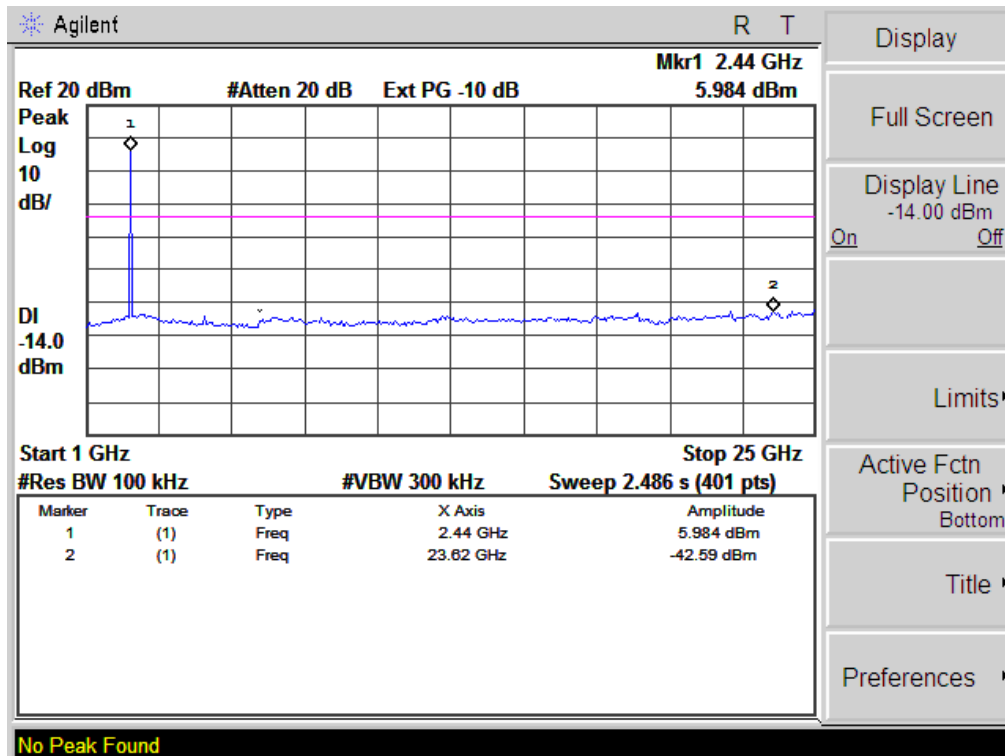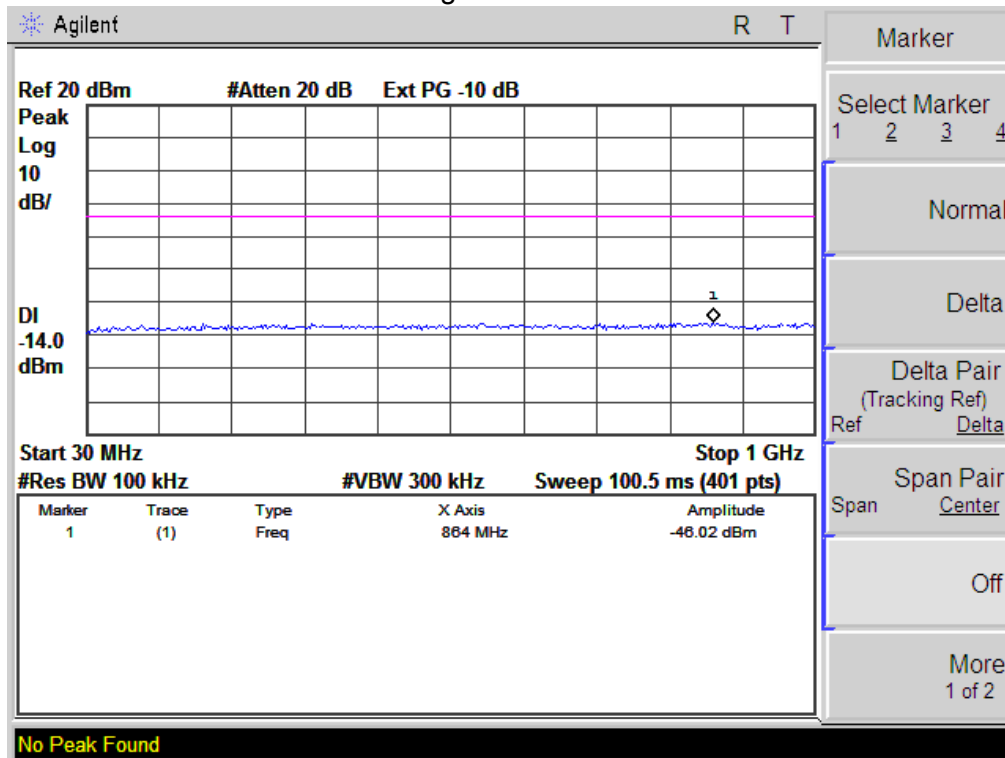



802.11g High Channel

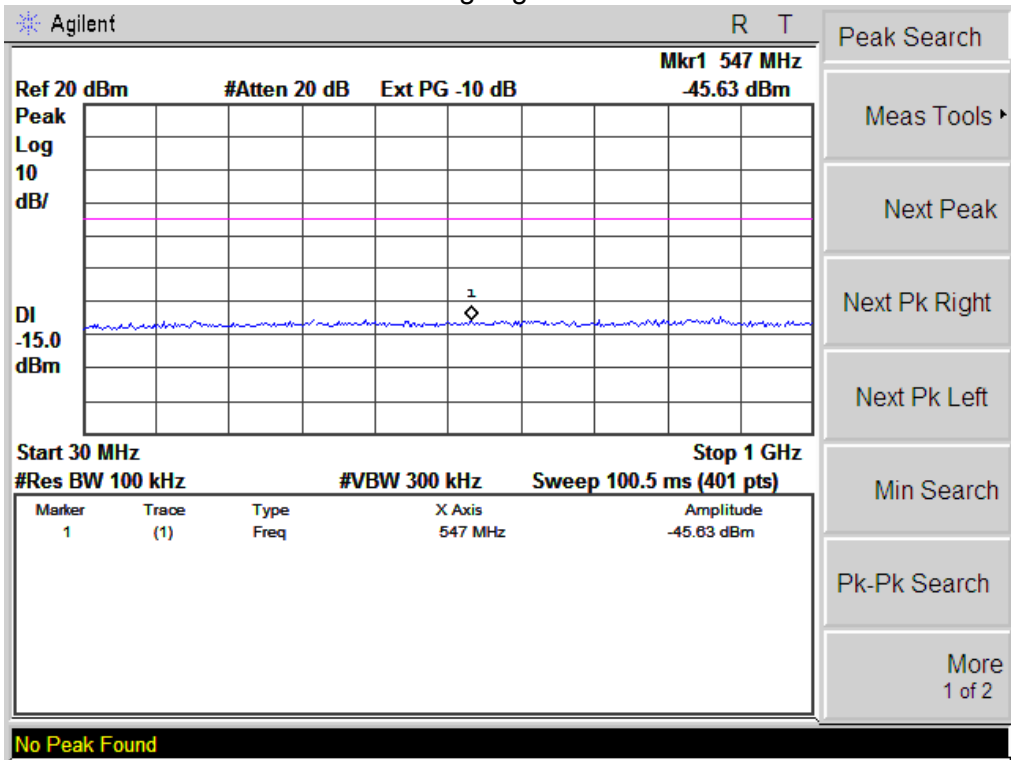



2

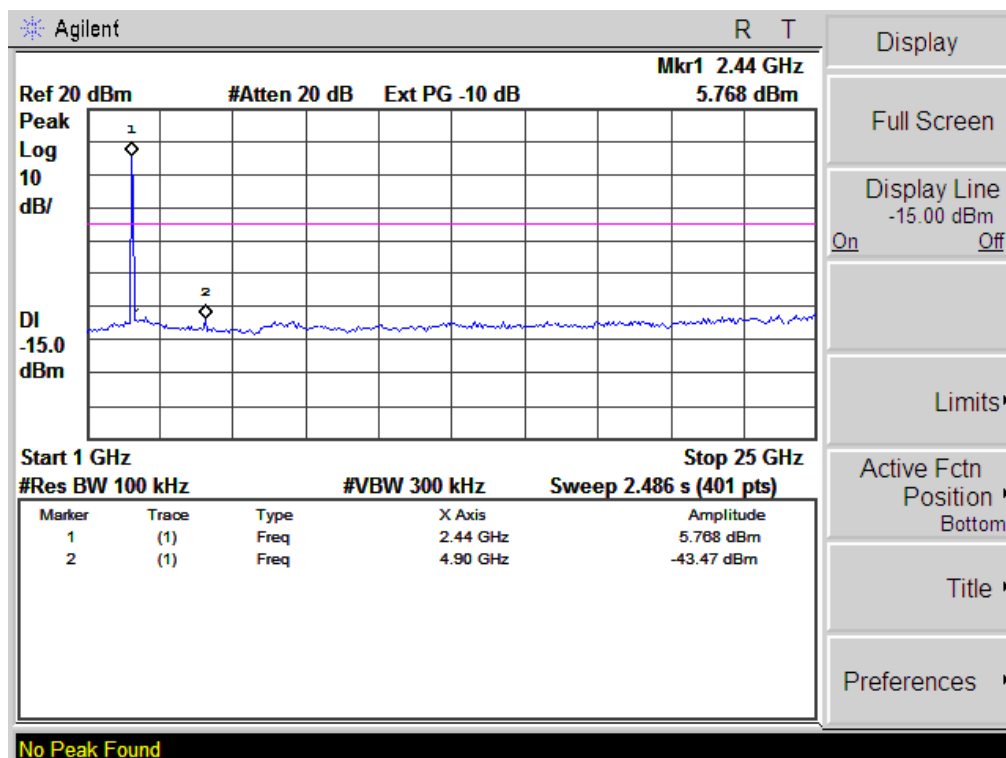



802.11n-HT20 Low Channel

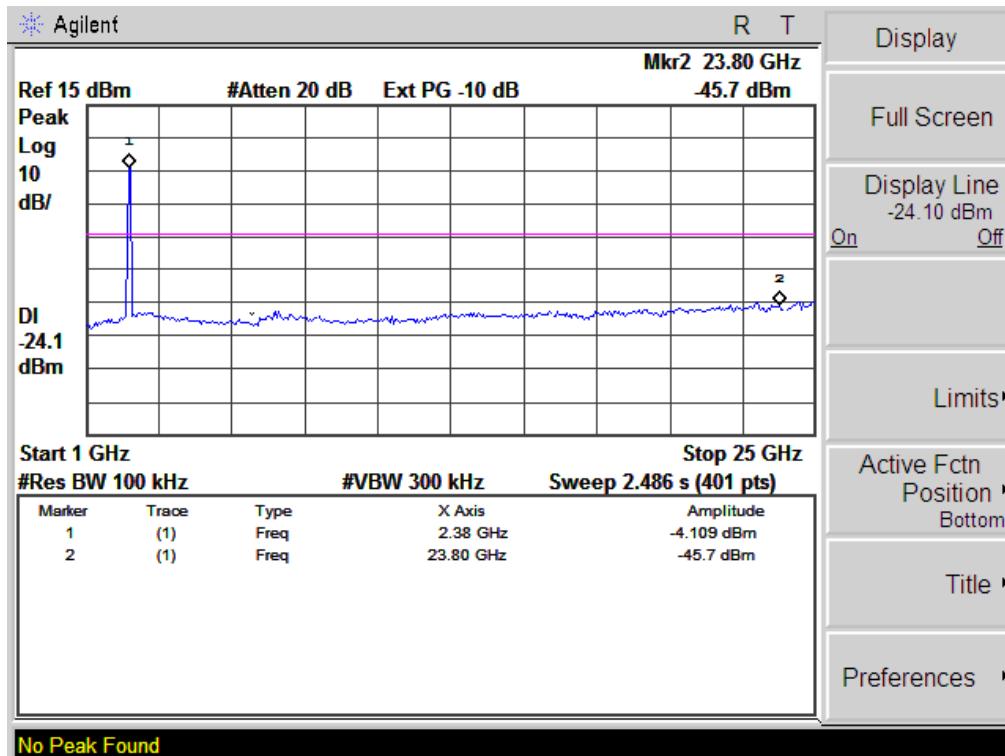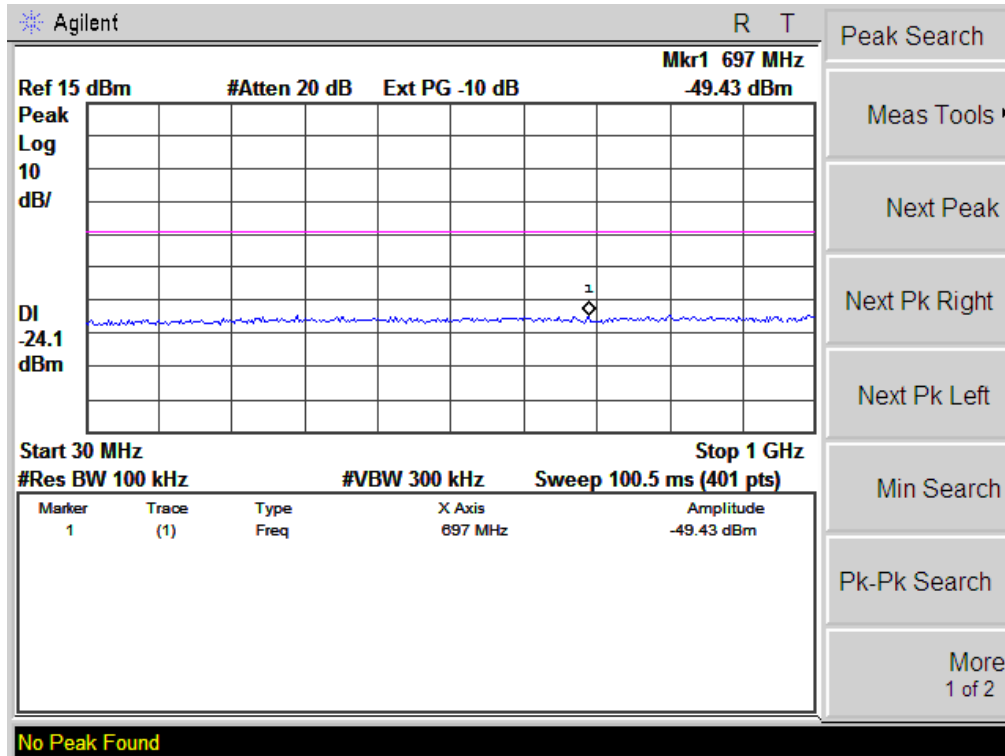



802.11n-HT20 Middle Channel

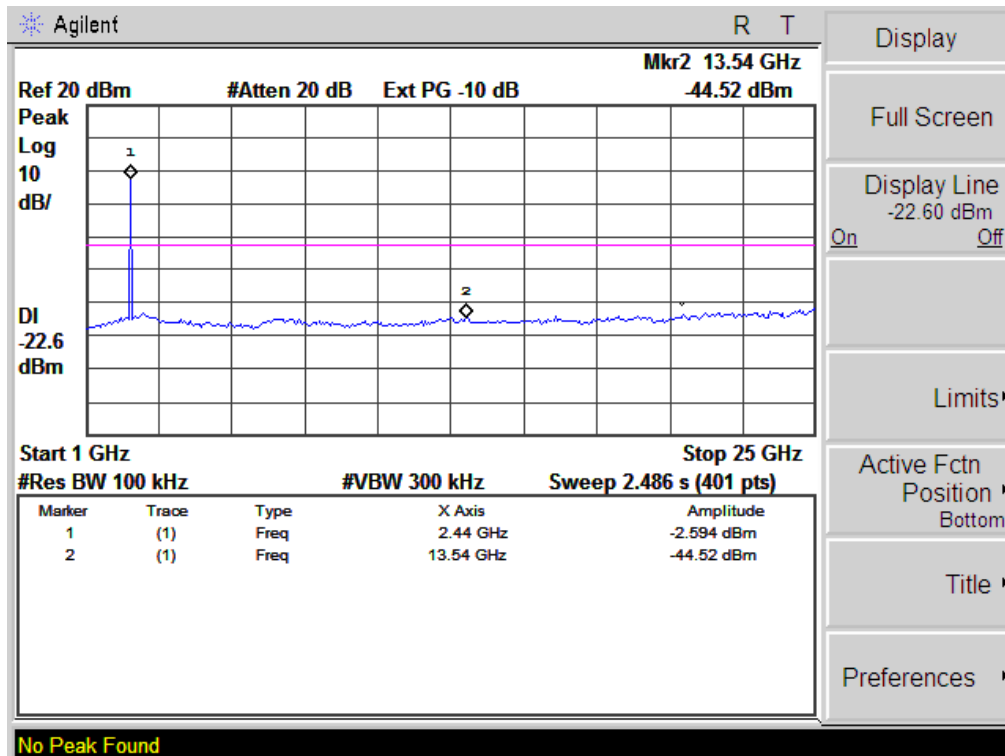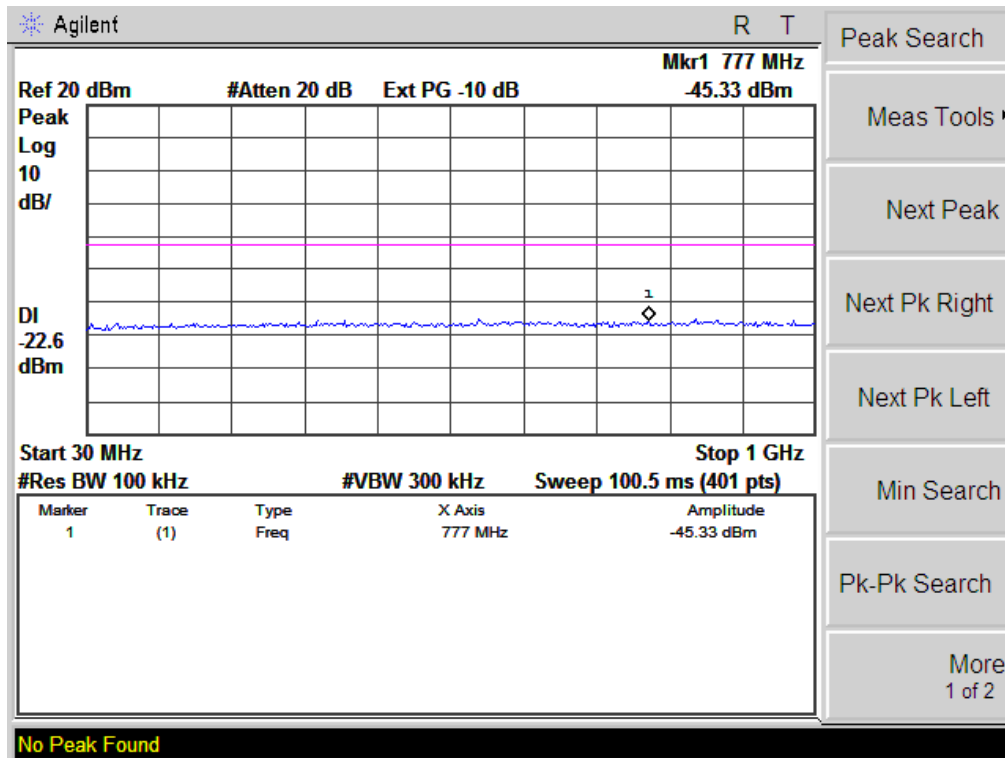



802.11n-HT20 High Channel

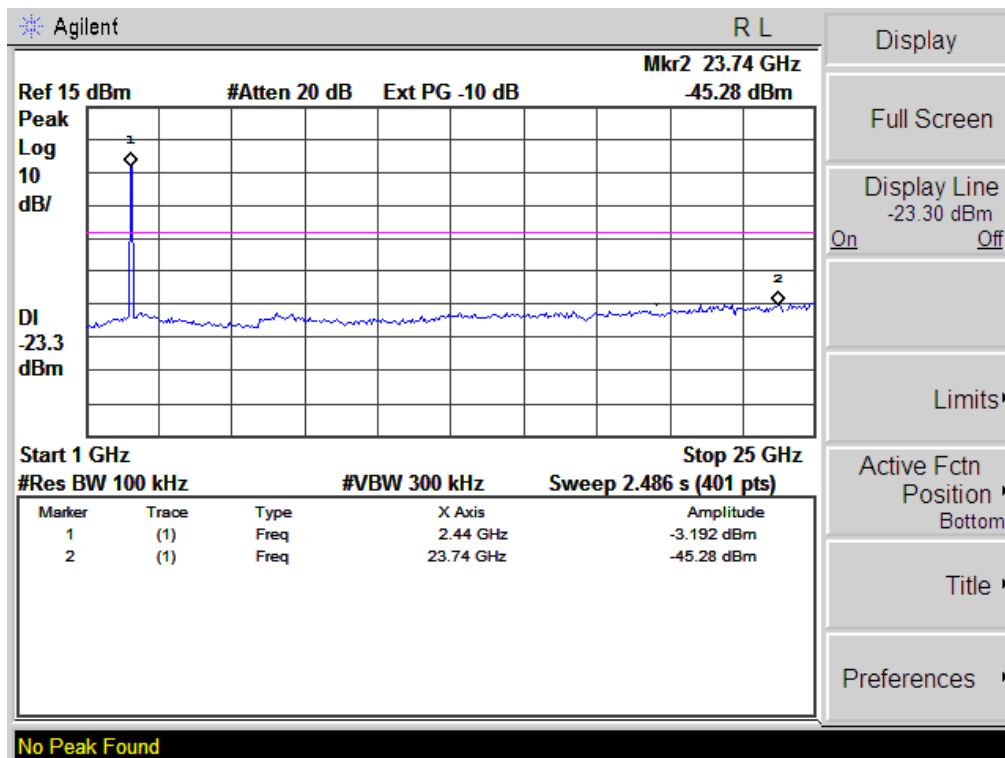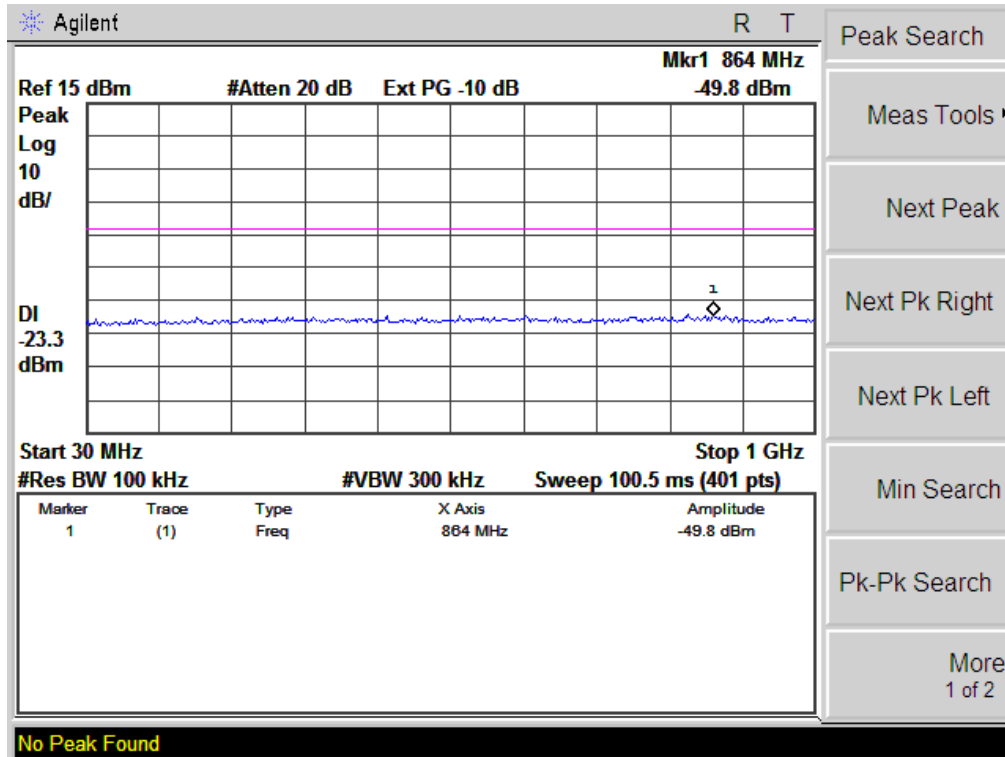


802.11n-HT40 Low Channel

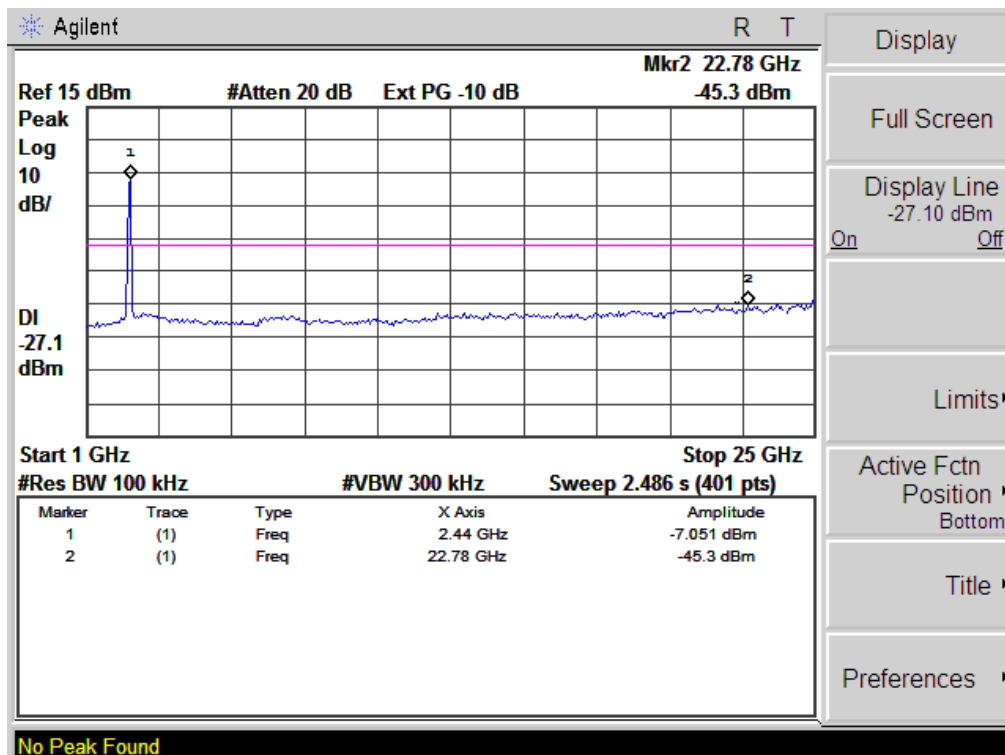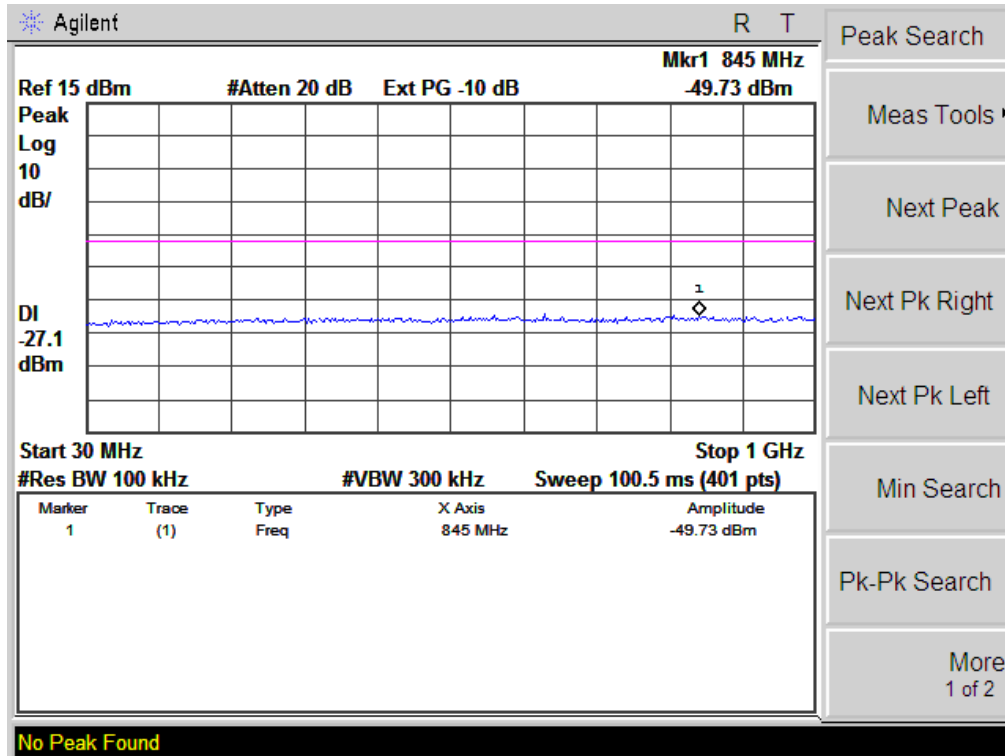


802.11n-HT40 Middle Channel

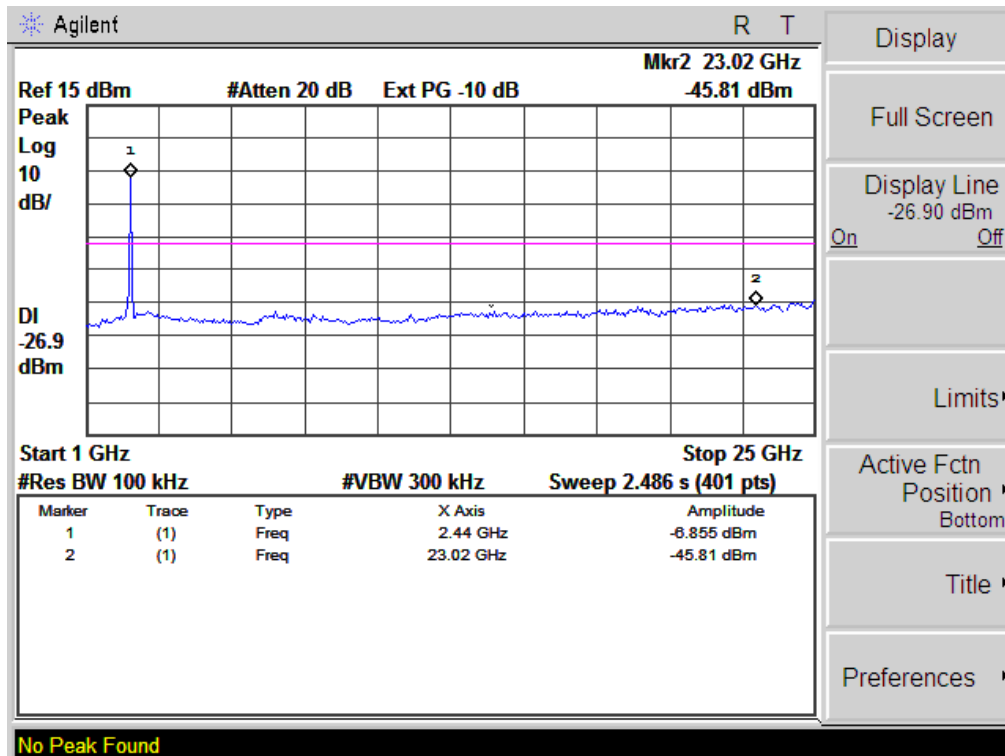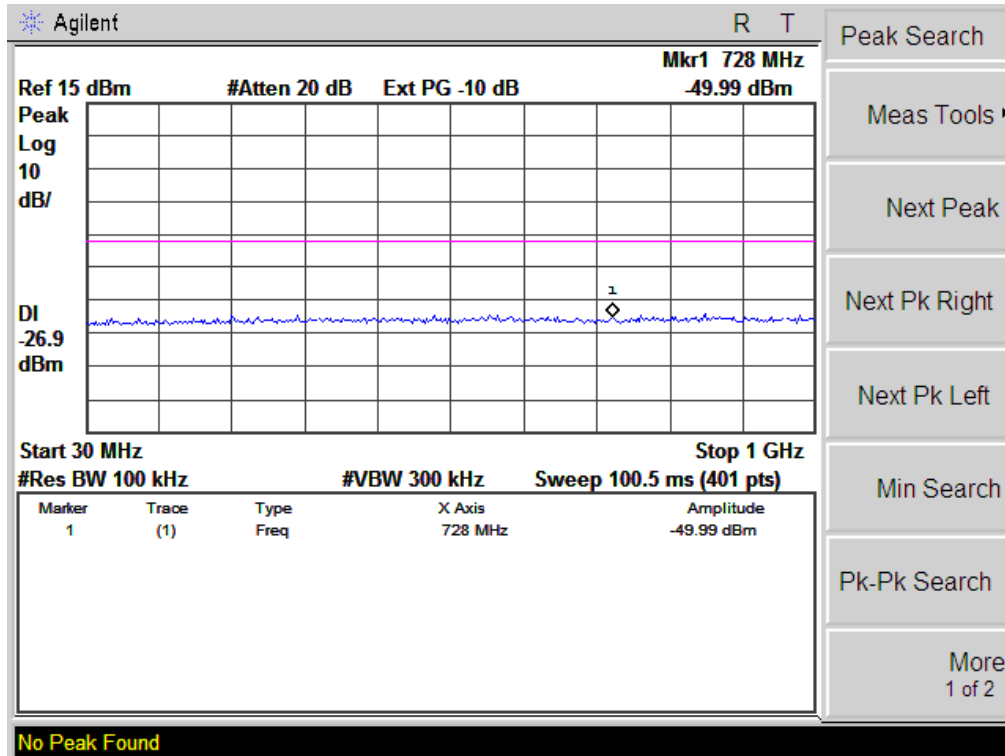

802.11n-HT40 High Channel

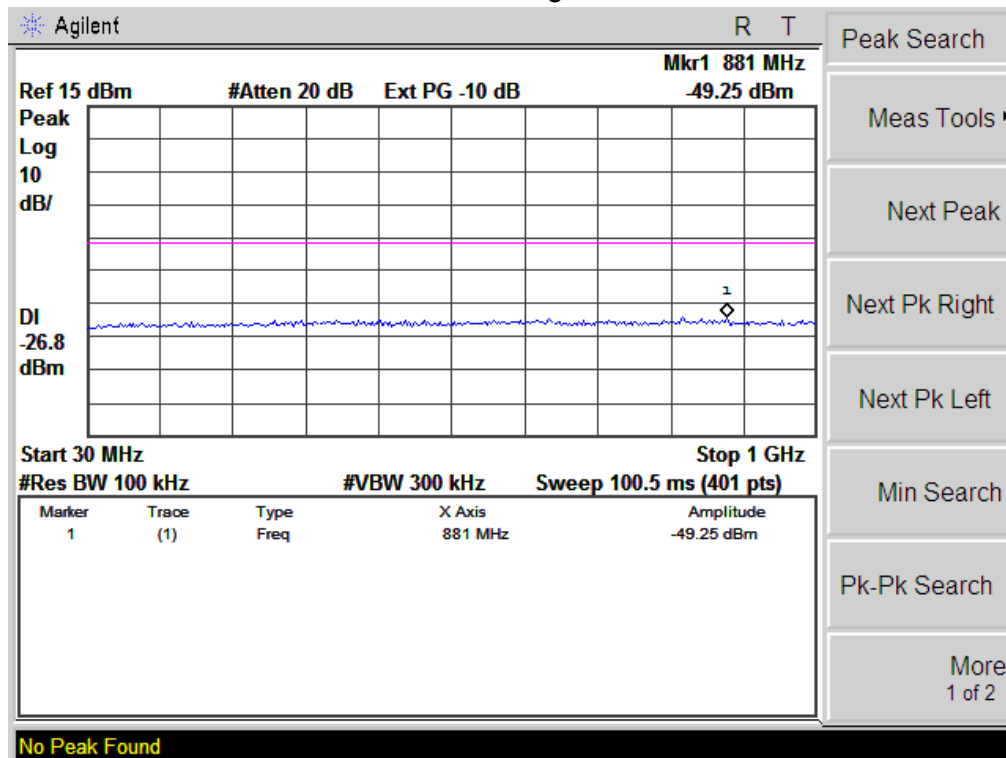

- Peak Search
- Meas Tools ▾
- Next Peak
- Next Pk Right
- Next Pk Left
- Min Search
- Pk-Pk Search
- More 1 of 2

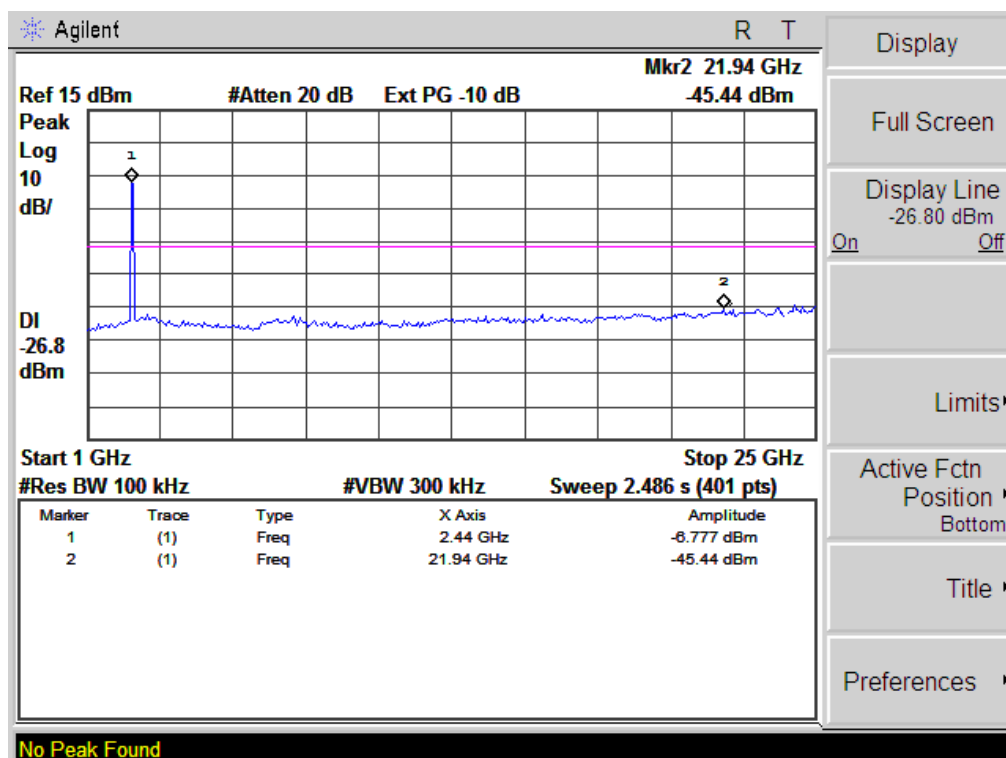

- Display
- Full Screen
- Display Line -26.80 dBm On Off
- Limits ▾
- Active Fctn Position ▾ Bottom
- Title ▾
- Preferences ▾

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. 3 kHz ≤Set the RBW≤100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

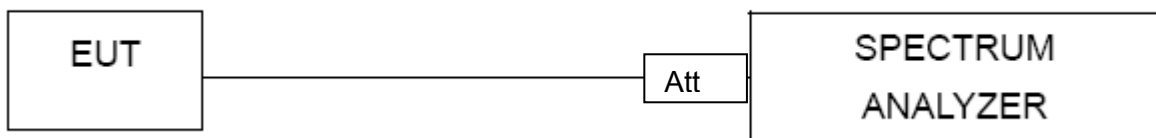

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.


4.1.5 TEST RESULTS



EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
2412 MHz	-10.92	-11.42	-8.15	6	PASS
2437 MHz	-10.66	-11.65	-8.12	6	PASS
2462 MHz	-10.35	-12.35	-8.23	6	PASS

NOTE: A(B) Represent the value of antenna A and B,The worst data is A Antenna a ,only shown Antenna A Plot.

Limit =8-8+6=6 dBm for output power.

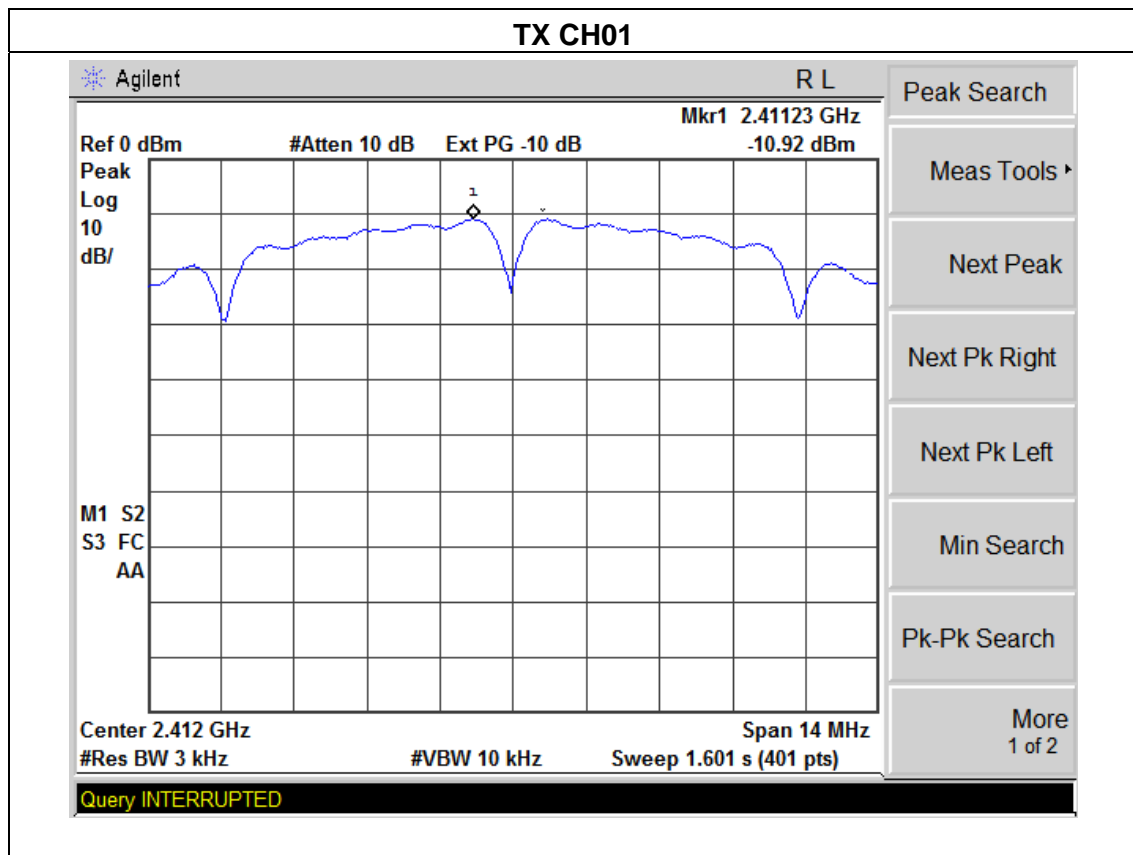


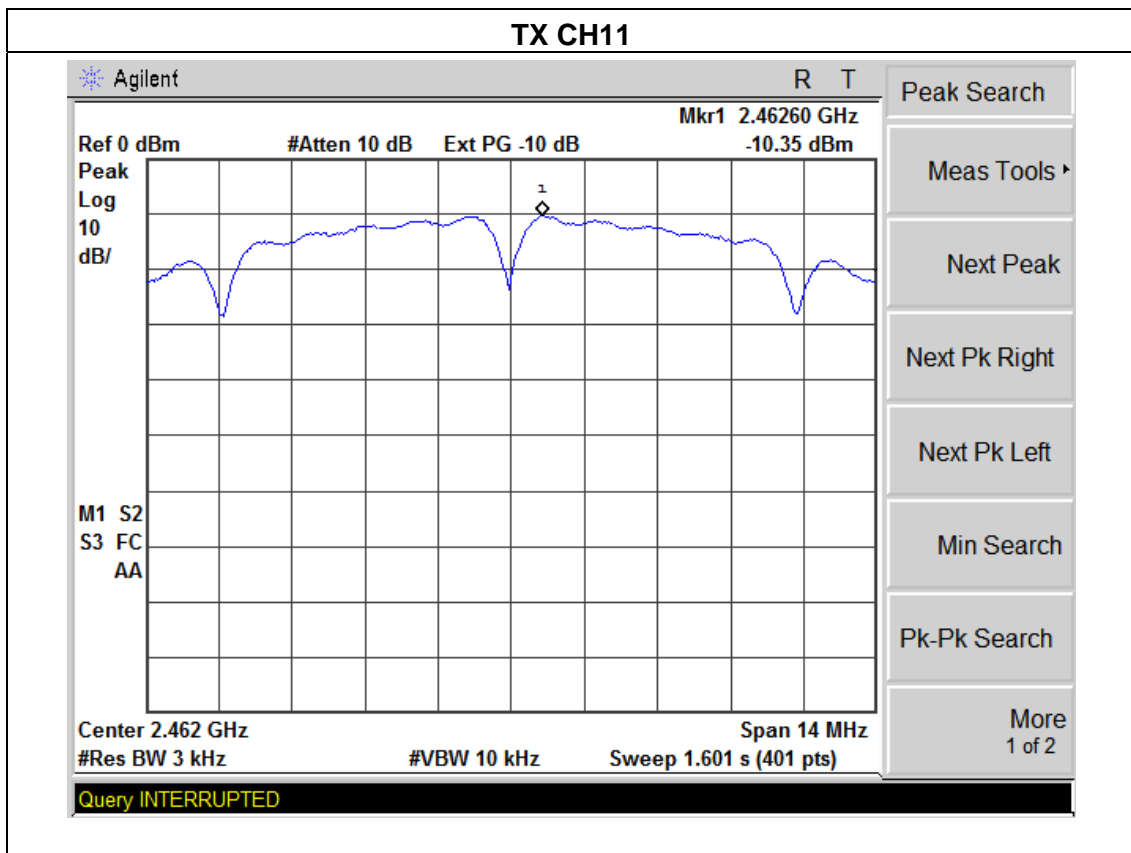
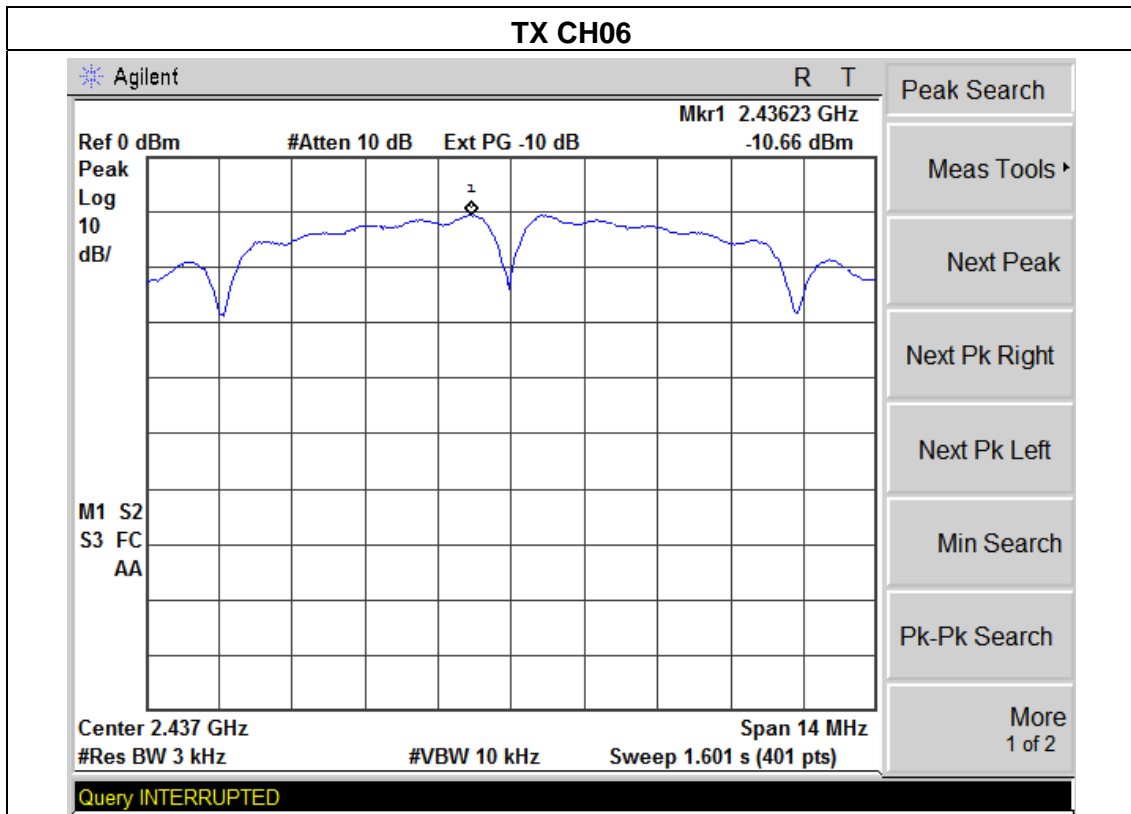


EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
2412 MHz	-14.19	-15.52	-11.79	6	PASS
2437 MHz	-13.92	-15.23	-11.52	6	PASS
2462 MHz	-14.03	-15.74	-11.79	6	PASS

NOTE: A(B) Represent the value of antenna A and B,The worst data is A Antenna a ,only shown Antenna A Plot.

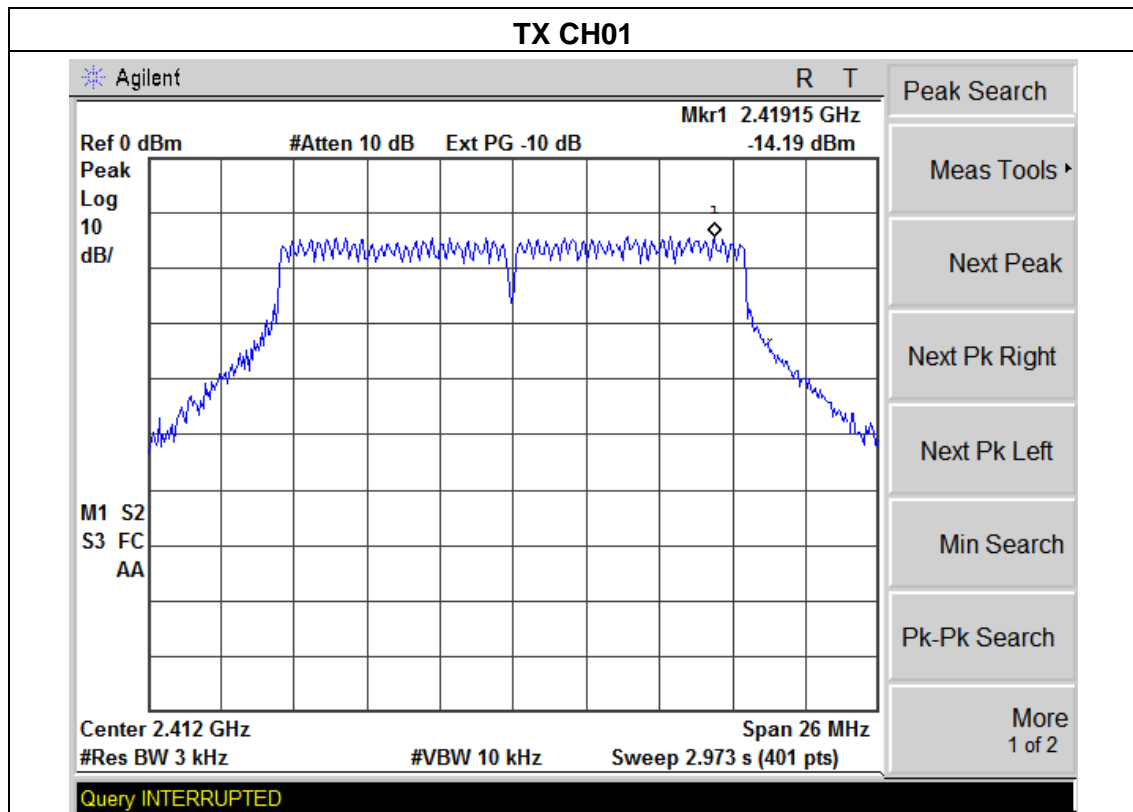


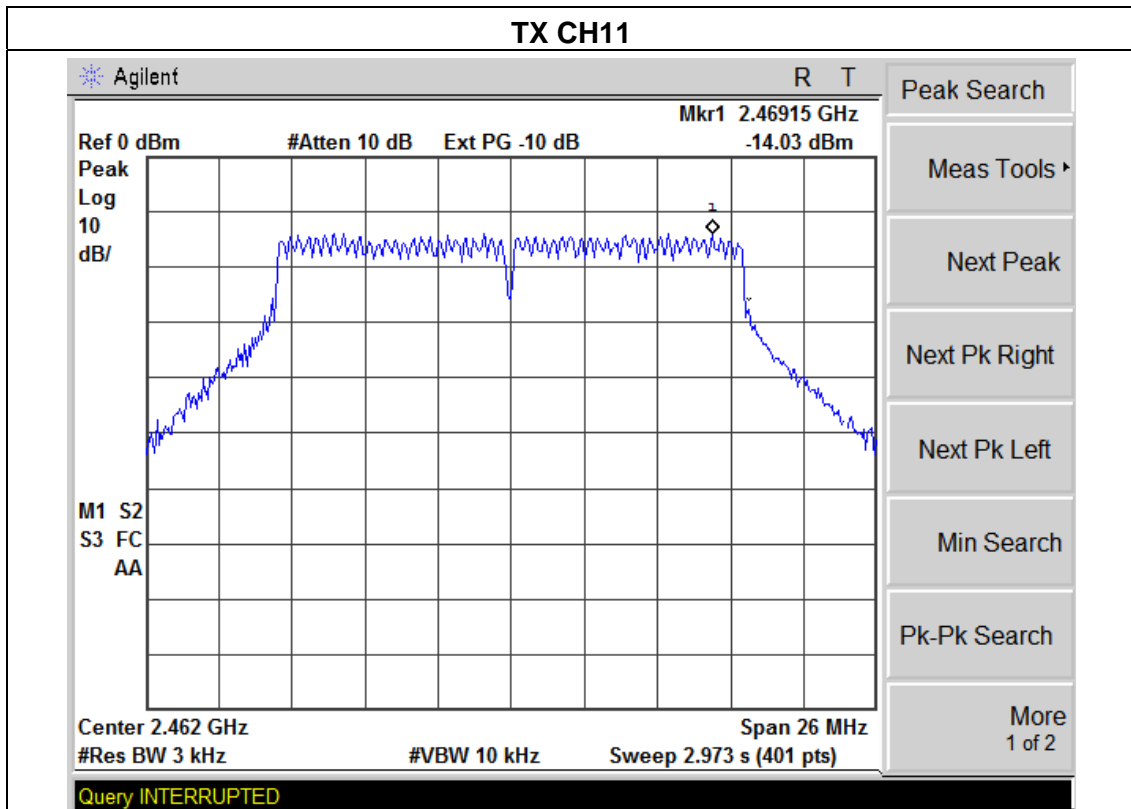
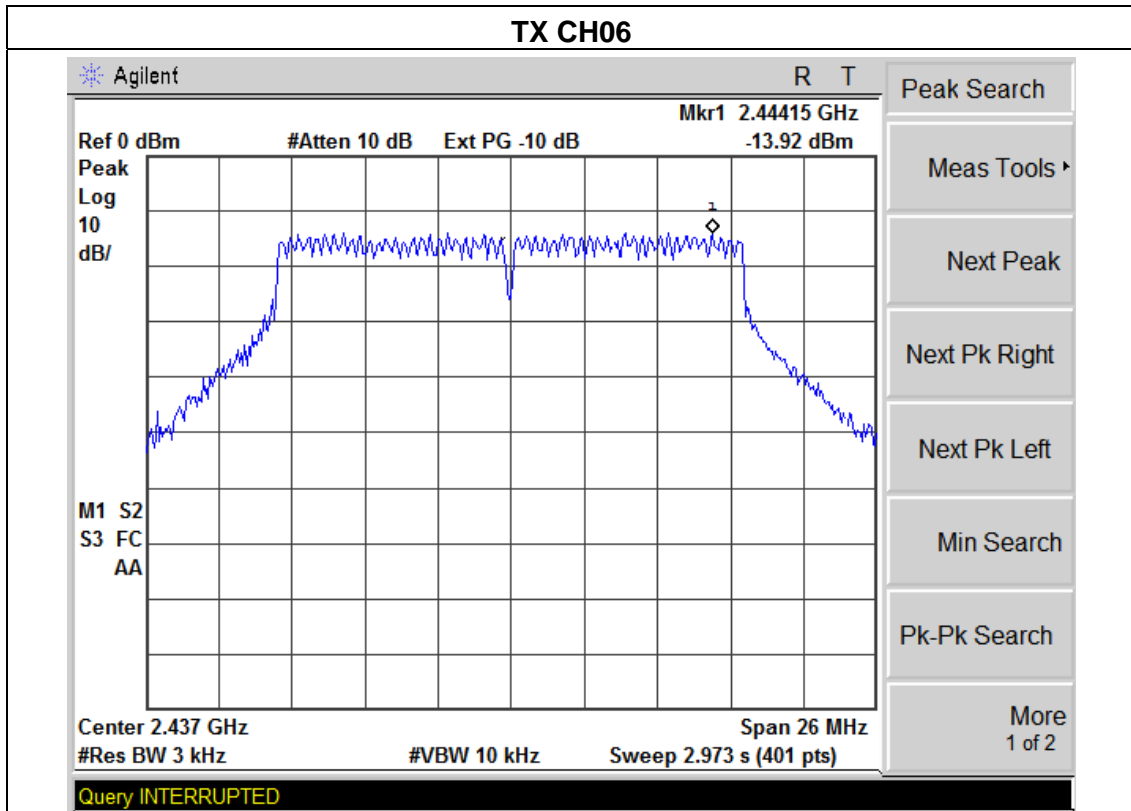


EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
2412 MHz	-14.65	-16.32	-12.39	6	PASS
2437 MHz	-13.70	-15.11	-11.34	6	PASS
2462 MHz	-14.78	-15.98	-12.33	6	PASS

NOTE: A(B) Represent the value of antenna A and B,The worst data is A Antenna a ,only shown Antenna A Plot.

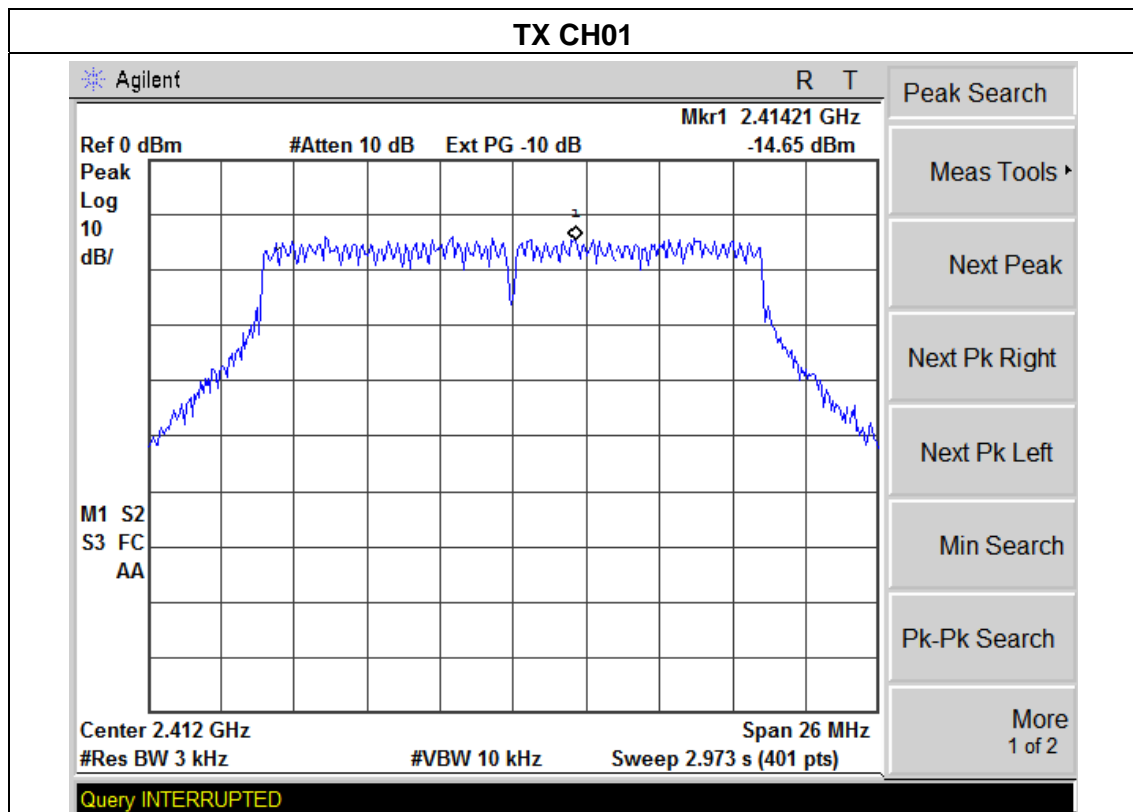


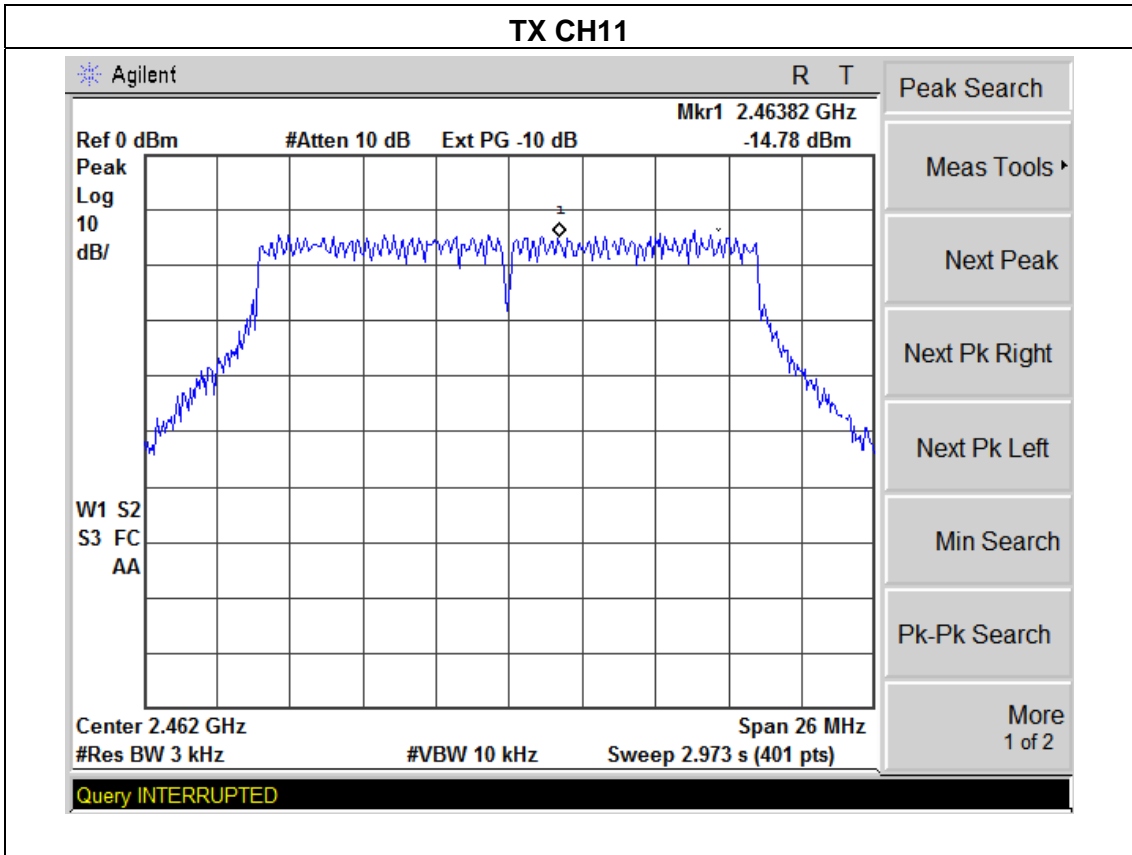
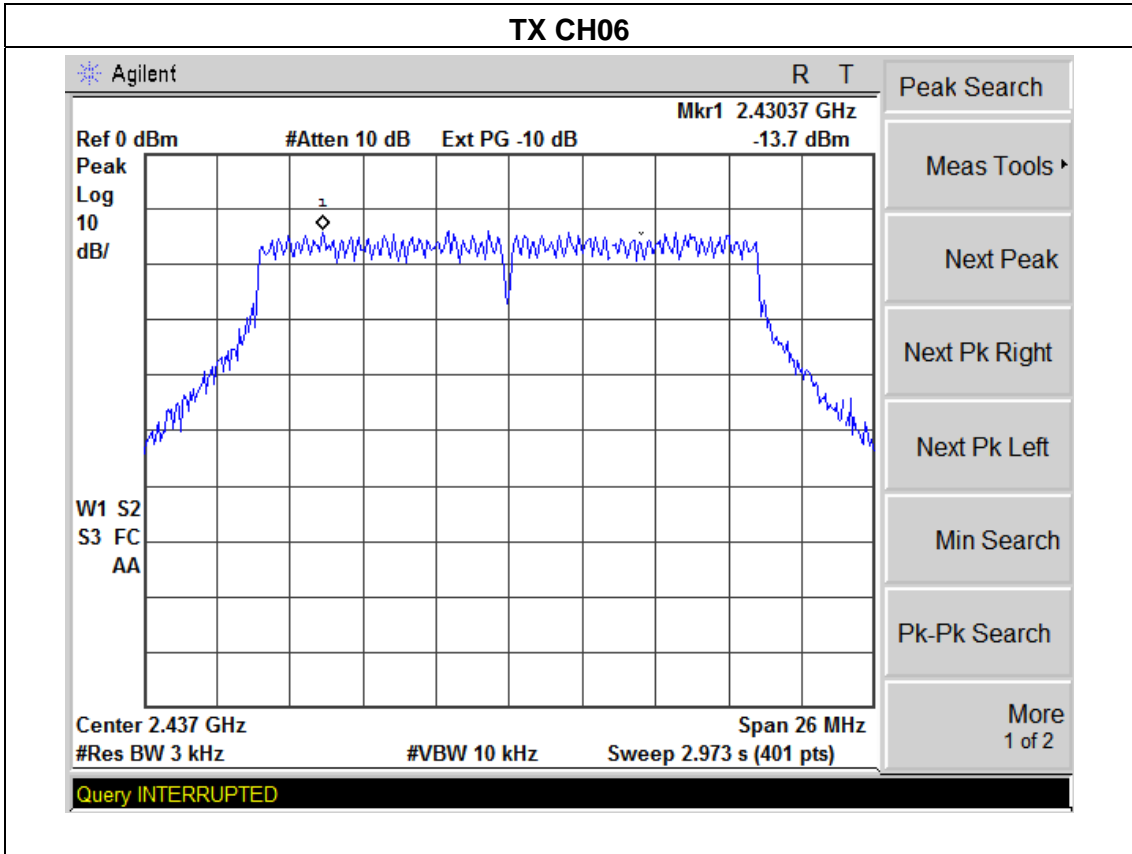


EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
2422 MHz	-15.93	-17.97	-13.82	6	PASS
2437 MHz	-14.81	-16.53	-12.58	6	PASS
2452 MHz	-16.32	-17.67	-13.93	6	PASS

NOTE: A(B) Represent the value of antenna A and B,The worst data is A Antenna a ,only shown Antenna A Plot.

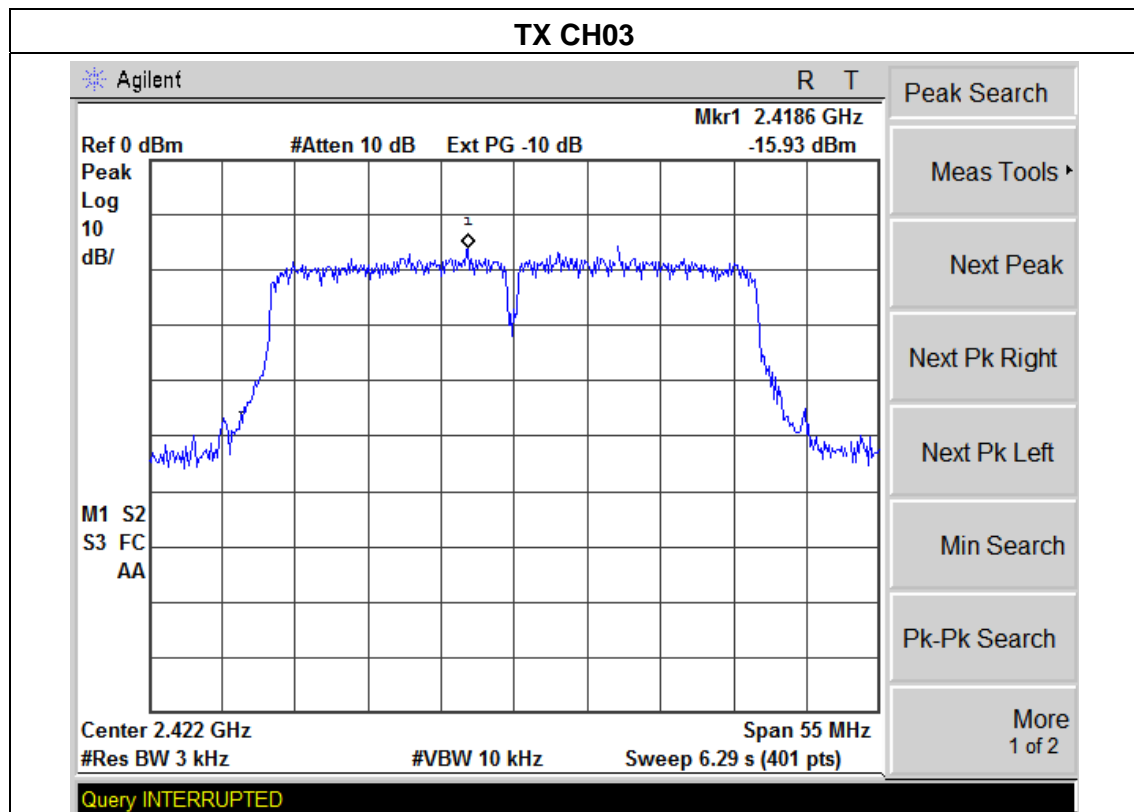

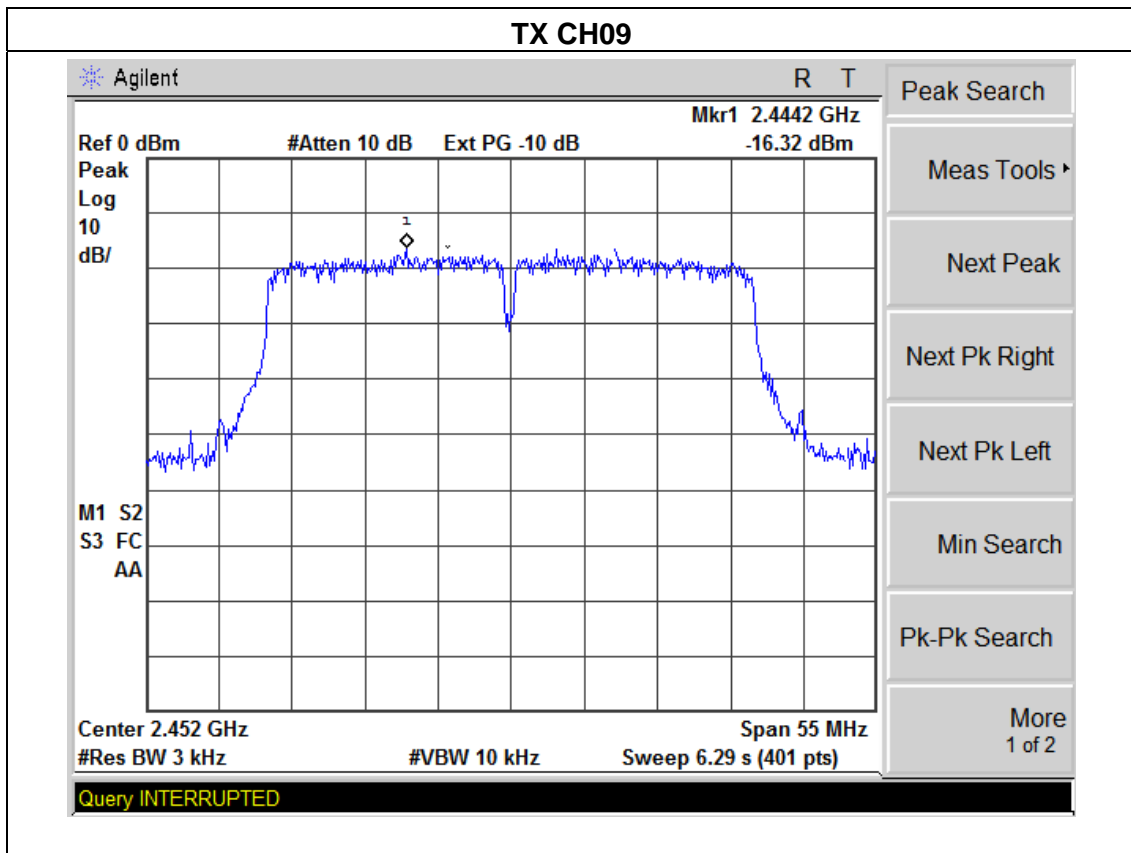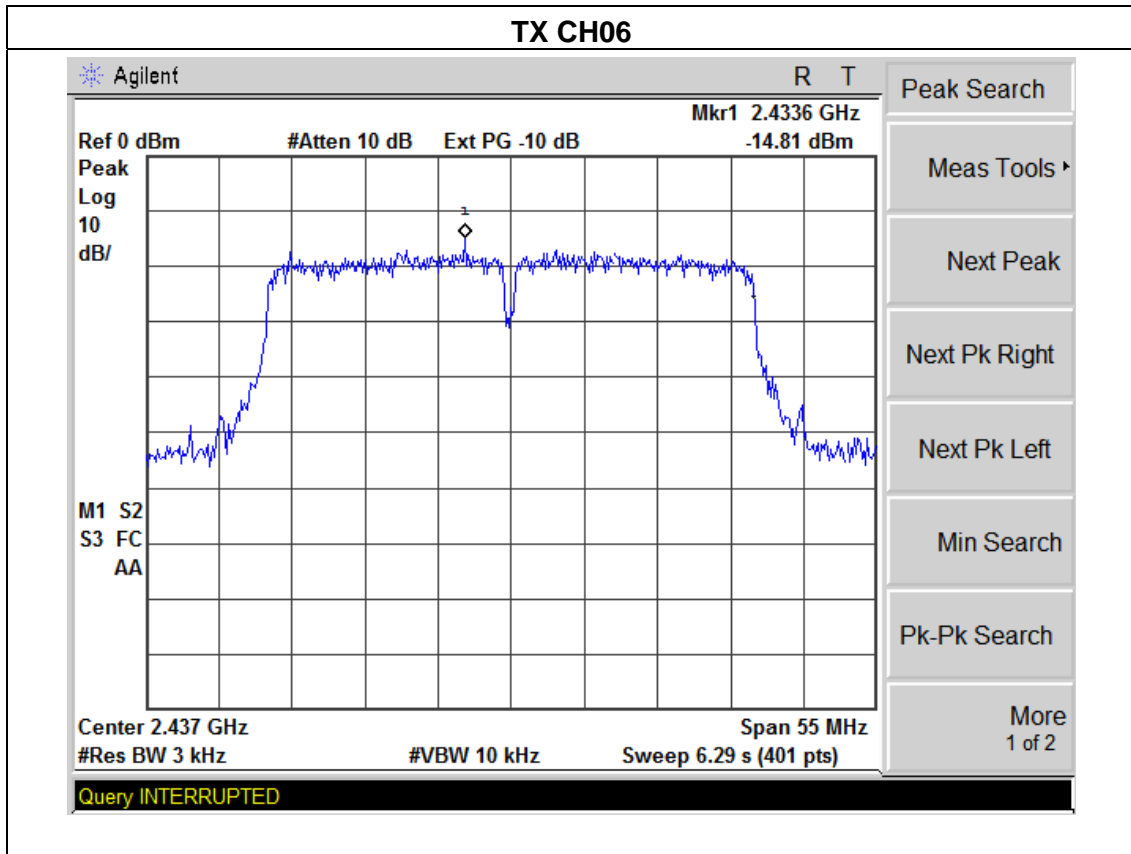

5. BANDWIDTH TEST


5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

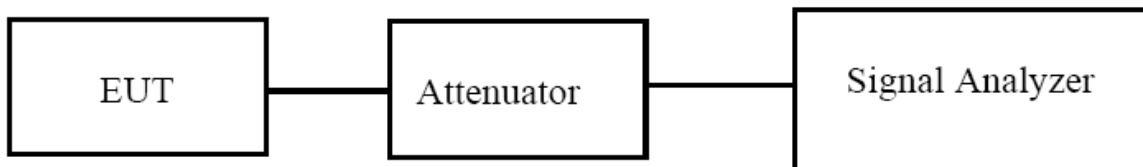


5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.3 TEST RESULTS

EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.092	500	Pass
Middle	2437	10.067	500	Pass
High	2462	10.111	500	Pass

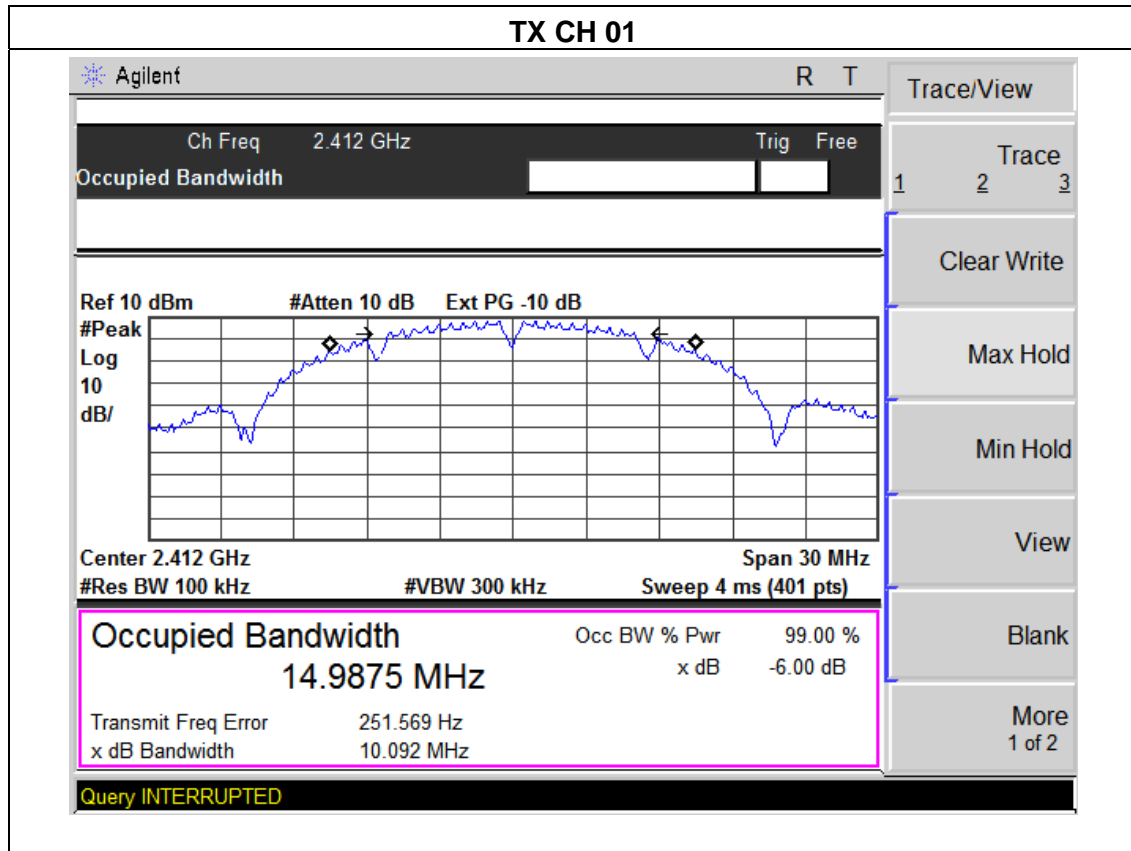

TX CH 06


Agilent		R	T
Ch Freq 2.437 GHz		Trig	Free
Occupied Bandwidth			
Center 2.437 GHz		Span 30 MHz	
#Res BW 100 kHz		#VBW 300 kHz	Sweep 4 ms (401 pts)
Occupied Bandwidth 14.9834 MHz		Occ BW % Pwr	99.00 %
		x dB	-6.00 dB
Transmit Freq Error		-18.081 kHz	
x dB Bandwidth		10.067 MHz	
Query INTERRUPTED			
Freq/Channel		Center Freq 2.43700000 GHz	
		Start Freq 2.42200000 GHz	
		Stop Freq 2.45200000 GHz	
		CF Step 3.00000000 MHz	
		Auto Man	
		Freq Offset 0.00000000 Hz	
Signal Track		On Off	
Scale Type		Log Lin	

TX CH 11

Agilent		R	T
Ch Freq 2.462 GHz		Trig	Free
Occupied Bandwidth			
Center 2.462 GHz		Span 30 MHz	
#Res BW 100 kHz		#VBW 300 kHz	Sweep 4 ms (401 pts)
Occupied Bandwidth 14.9987 MHz		Occ BW % Pwr	99.00 %
		x dB	-6.00 dB
Transmit Freq Error		-22.435 kHz	
x dB Bandwidth		10.111 MHz	
Query INTERRUPTED			
Freq/Channel		Center Freq 2.46200000 GHz	
		Start Freq 2.44700000 GHz	
		Stop Freq 2.47700000 GHz	
		CF Step 3.00000000 MHz	
		Auto Man	
		Freq Offset 0.00000000 Hz	
Signal Track		On Off	
Scale Type		Log Lin	

EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.585	500	Pass
Middle	2437	16.598	500	Pass
High	2462	16.607	500	Pass

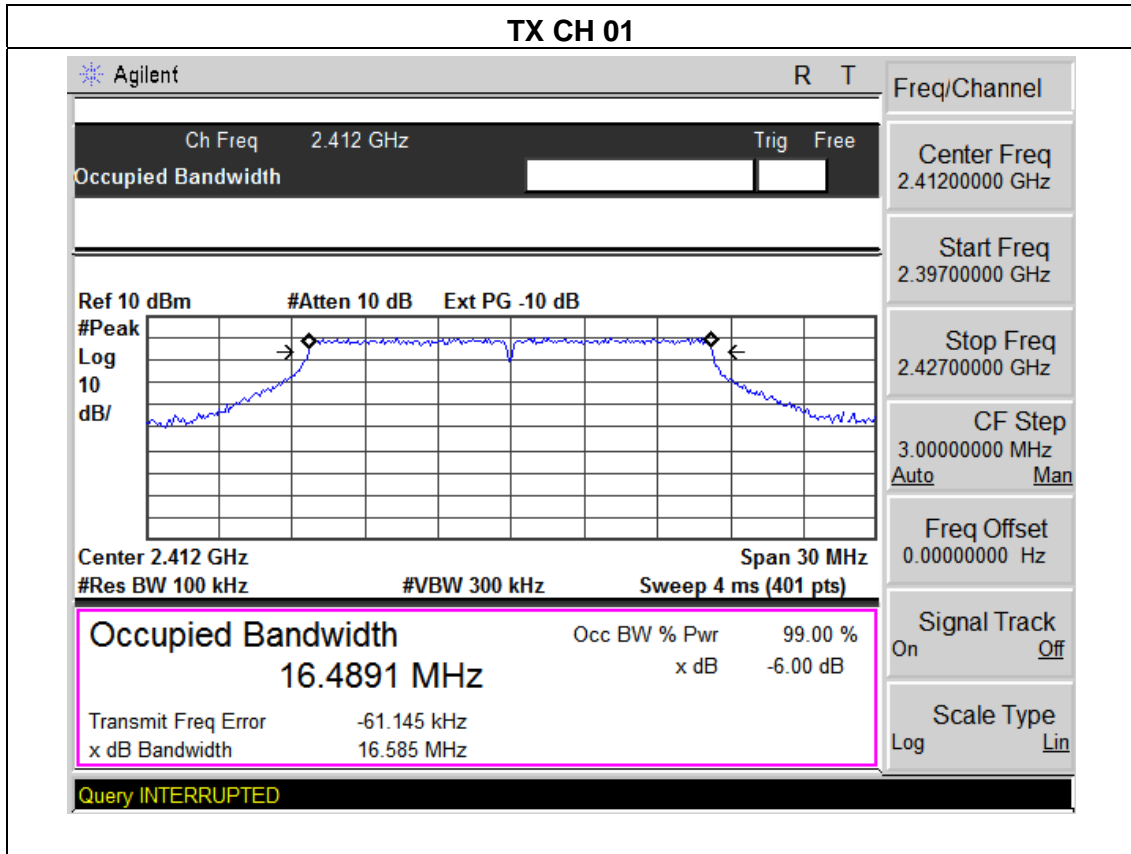

TX CH 06

Agilent
R T

Ch Freq 2.437 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 10 dB
Ext PG -10 dB

#Peak
Log
10
dB/

Center 2.437 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 4 ms (401 pts)

Span 30 MHz

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4873 MHz	x dB	-6.00 dB
Transmit Freq Error	-63.438 kHz	
x dB Bandwidth	16.598 MHz	

Query INTERRUPTED

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.42200000 GHz

Stop Freq 2.45200000 GHz

CF Step 3.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

TX CH 11

Agilent
R T

Ch Freq 2.462 GHz
Trig Free

Occupied Bandwidth

Ref 10 dBm
#Atten 10 dB
Ext PG -10 dB

#Peak
Log
10
dB/

Center 2.462 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 4 ms (401 pts)

Span 30 MHz

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4958 MHz	x dB	-6.00 dB
Transmit Freq Error	-74.804 kHz	
x dB Bandwidth	16.607 MHz	

Query INTERRUPTED

Trace/View

Trace 1 2 3

Clear Write

Max Hold

Min Hold


View

Blank

More 1 of 2

EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.821	500	Pass
Middle	2437	17.852	500	Pass
High	2462	17.827	500	Pass

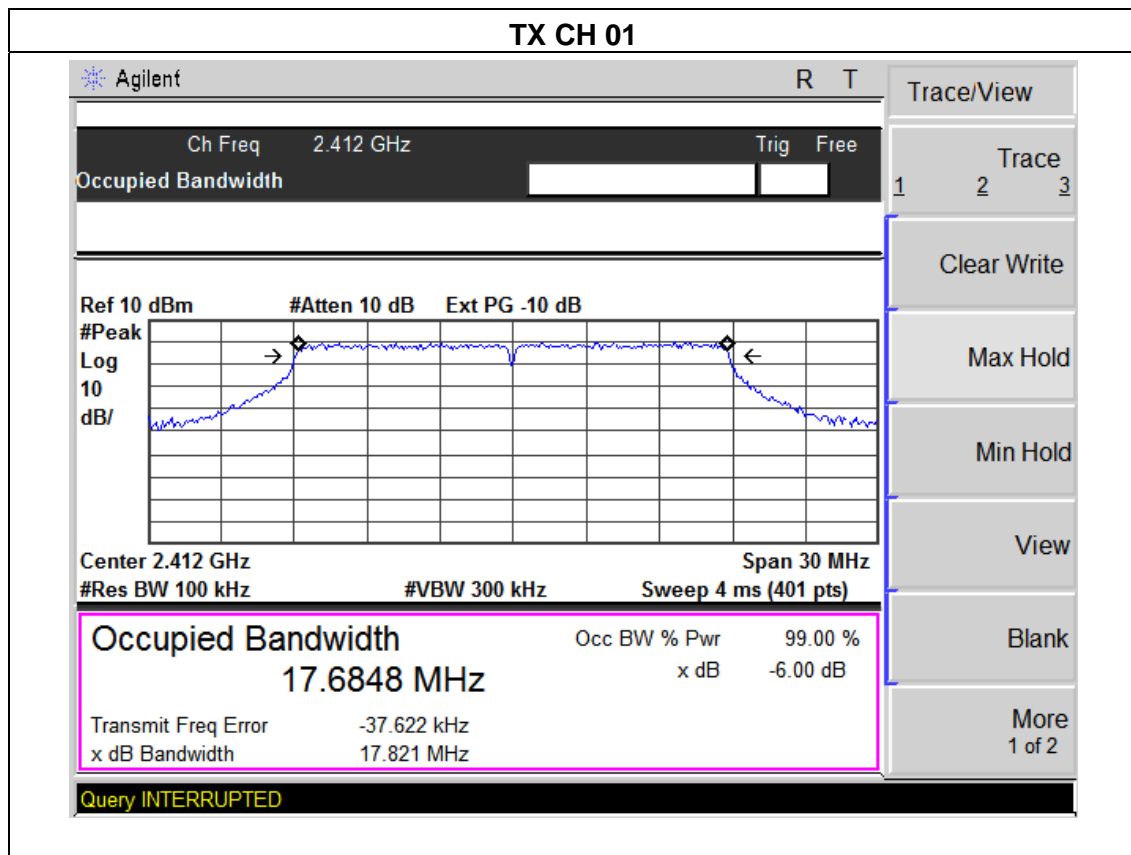

TX CH 06

Agilent R T

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth [] []

Ref 10 dBm #Atten 10 dB Ext PG -10 dB

Center 2.437 GHz Span 30 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

17.7002 MHz

x dB -6.00 dB

Transmit Freq Error -49.957 kHz

x dB Bandwidth 17.852 MHz

Query INTERRUPTED

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.42200000 GHz

Stop Freq 2.45200000 GHz

CF Step 3.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

TX CH 11

Agilent R T

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth [] []

Ref 10 dBm #Atten 10 dB Ext PG -10 dB

Center 2.462 GHz Span 30 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

17.6832 MHz

x dB -6.00 dB

Transmit Freq Error -49.204 kHz

x dB Bandwidth 17.827 MHz

Query INTERRUPTED

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44700000 GHz

Stop Freq 2.47700000 GHz

CF Step 3.00000000 MHz
Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.486	500	Pass
Middle	2437	36.486	500	Pass
High	2452	36.466	500	Pass

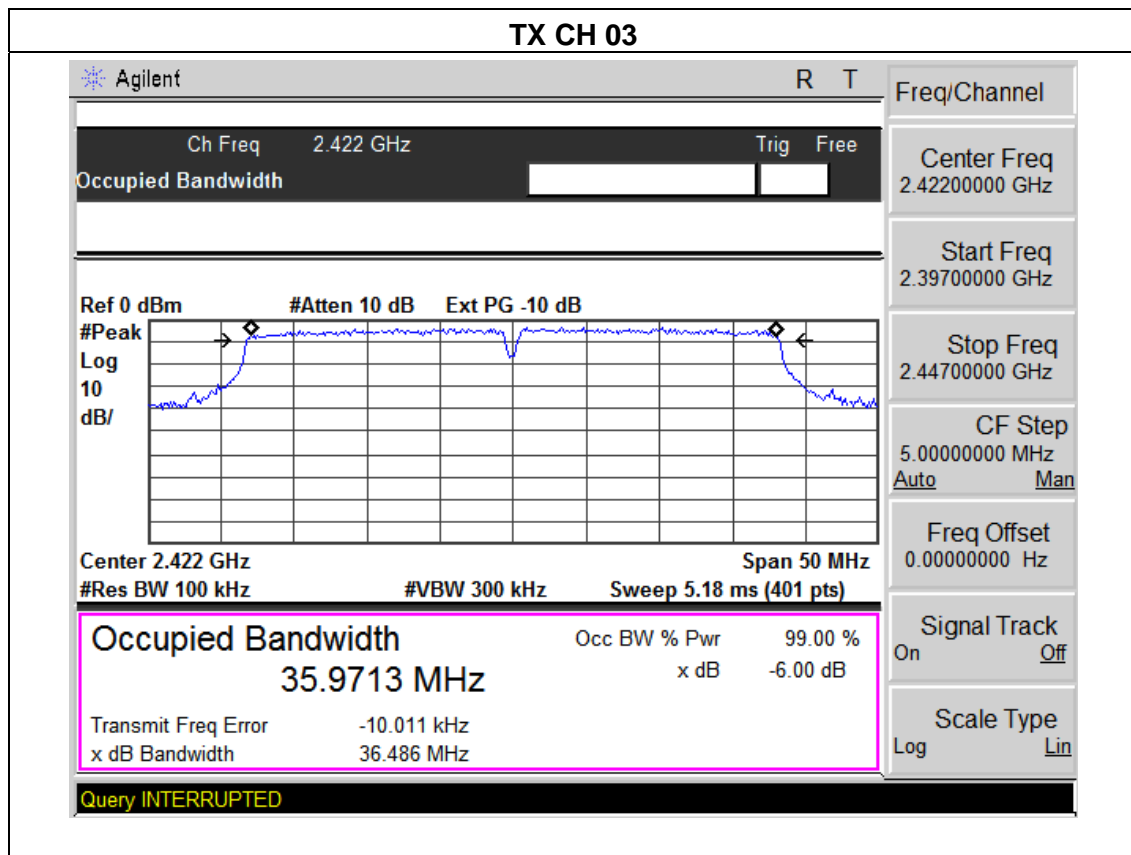

TX CH 06

Agilent R T

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth [] []

Ref 0 dBm #Atten 10 dB Ext PG -10 dB

Center 2.437 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

35.9536 MHz

x dB -6.00 dB

Transmit Freq Error -27.524 kHz

x dB Bandwidth 36.486 MHz

Query INTERRUPTED

Meas Setup

Avg Number 10 Off

Avg Mode Repeat

Max Hold Off

Occ BW % Pwr 99.00 %

OBW Spar 50.0000000 MHz

x dB -6.00 dB

Optimize Ref Level

TX CH 09

Agilent R T

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth [] []

Ref 0 dBm #Atten 10 dB Ext PG -10 dB

Center 2.452 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

35.9337 MHz

x dB -6.00 dB

Transmit Freq Error -31.447 kHz

x dB Bandwidth 36.466 MHz

Query INTERRUPTED

Freq/Channel

Center Freq 2.45200000 GHz

Start Freq 2.42700000 GHz

Stop Freq 2.47700000 GHz

CF Step 5.00000000 MHz Auto Man

Freq Offset 0.00000000 Hz

Signal Track Off

Scale Type Log Lin

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz
Test Mode :	TX b/g/n Mode		

Test Channe	Frequency (MHz)	Peak output power. Antenna A(B) port		Total Power dBm	LIMIT dBm
		A	B		
		(dBm)			
TX 802.11b Mode					
CH01	2412	13.85	13.88	16.88	28
CH06	2437	13.93	13.85	16.86	28
CH11	2462	13.98	13.91	16.96	28
TX 802.11g Mode					
CH01	2412	11.63	11.72	14.69	28
CH06	2437	11.61	11.71	14.68	28
CH11	2462	11.56	11.66	14.62	28
TX 802.11n/20M Mode					
CH01	2412	10.23	10.62	13.44	28
CH06	2437	10.26	10.55	13.40	28
CH11	2462	10.21	10.57	13.40	28
TX 802.11n/40M Mode					
CH03	2422	9.82	9.97	12.91	28
CH06	2437	9.85	9.93	12.89	28
CH09	2452	9.81	9.95	12.89	28

Limit =30- (8-6) =28dBm for output power.

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

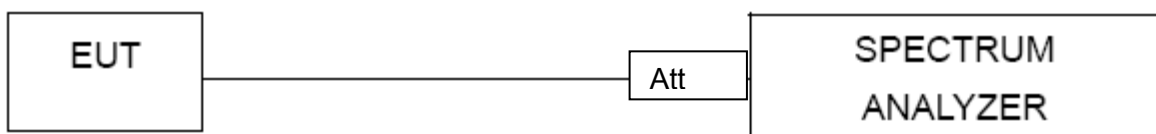

7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS

EUT :	300Mbps Intelligent Wireless Router	Model Name :	JYR-N490S
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V form Adapter AC 120V/60Hz


Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
Left-band	37.58	20	Pass
Right-band	55.38	20	Pass
802.11g mode			
Left-band	32.22	20	Pass
Right-band	46.17	20	Pass
802.11n20 mode			
Left-band	30.64	20	Pass
Right-band	43.34	20	Pass
802.11n40 mode			
Left-band	28.21	20	Pass
Right-band	34.83	20	Pass

Radiated band edge:


Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type	Comment
802.11b							
2390	62.59	-13.06	49.53	74	-24.47	peak	Vertical
2390	63.43	-13.06	50.37	74	-23.63	peak	Horizontal
2483.5	63.43	-12.78	50.65	74	-23.35	peak	Vertical
2483.5	59.97	-12.78	47.19	74	-26.81	peak	Horizontal
802.11g							
2390	62.64	-13.06	49.58	74	-24.42	peak	Vertical
2390	59.52	-13.06	46.46	74	-27.54	peak	Horizontal
2483.5	63.74	-12.78	50.96	74	-23.04	peak	Vertical
2483.5	63.42	-12.78	50.64	74	-23.36	peak	Horizontal
802.11n20							
2390	61.17	-13.06	48.11	74	-25.89	peak	Vertical
2390	62.25	-13.06	49.19	74	-24.81	peak	Horizontal
2483.5	62.44	-12.78	49.66	74	-24.34	peak	Vertical
2483.5	59.74	-12.78	46.96	74	-27.04	peak	Horizontal
802.11n40							
2390	61.17	-13.06	48.11	74	-25.89	peak	Vertical
2390	62.25	-13.06	49.19	74	-24.81	peak	Horizontal
2483.5	62.44	-12.78	49.66	74	-24.34	peak	Vertical
2483.5	59.74	-12.78	46.96	74	-27.04	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.


802.11b: Band Edge, Left Side

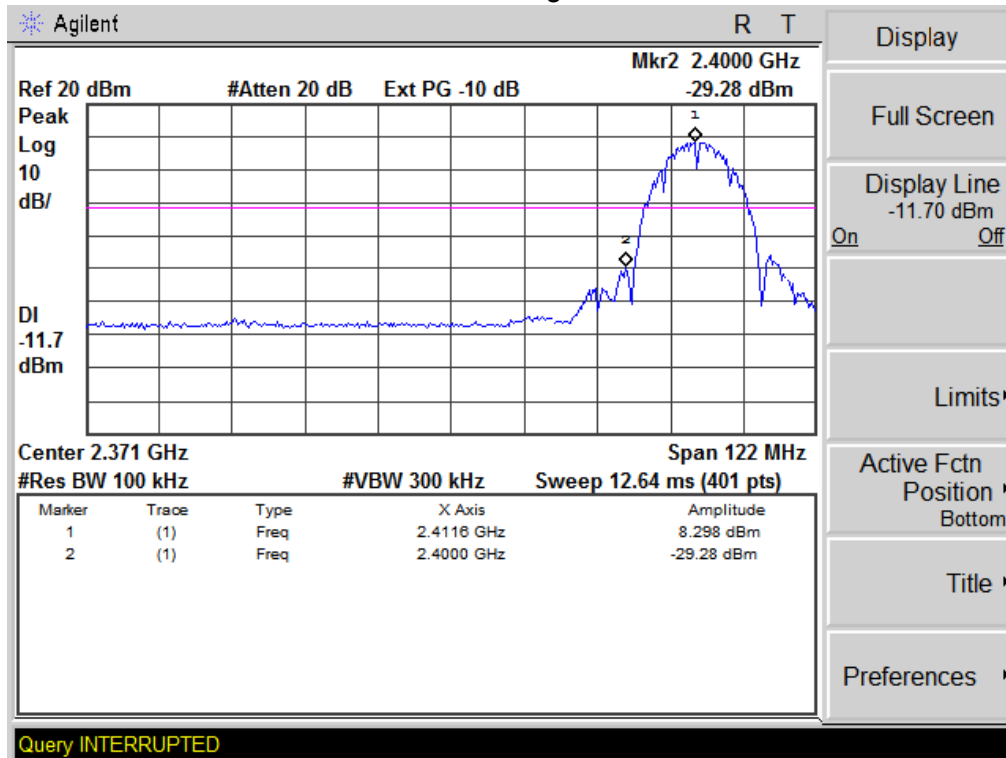


802.11b: Band Edge, Right Side

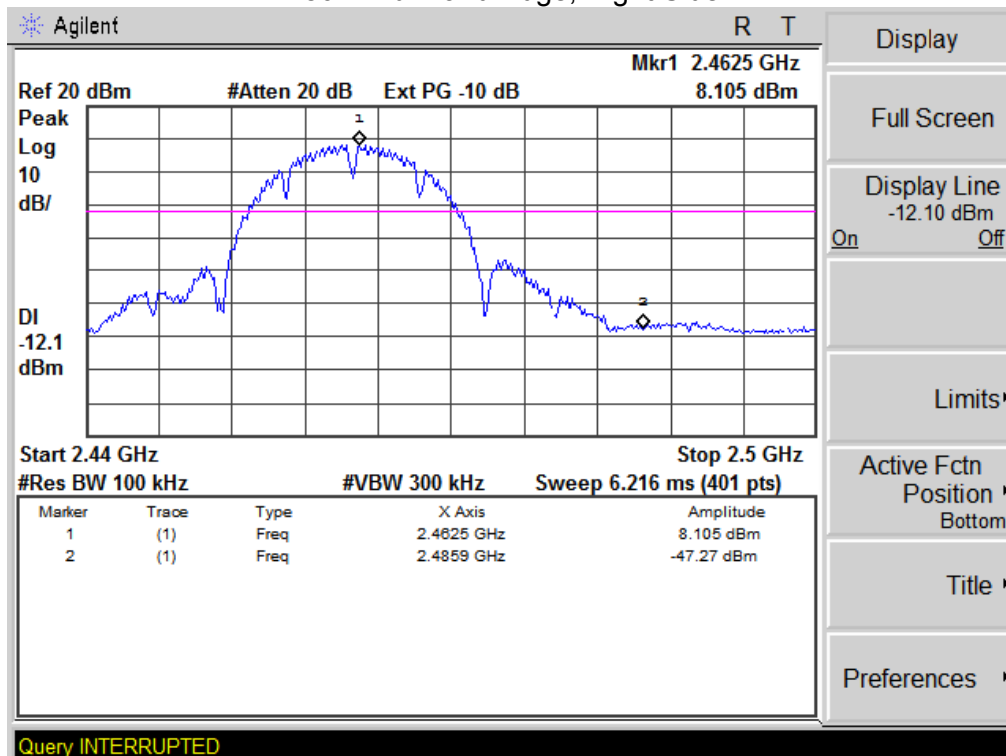


802.11g: Band Edge, Left Side

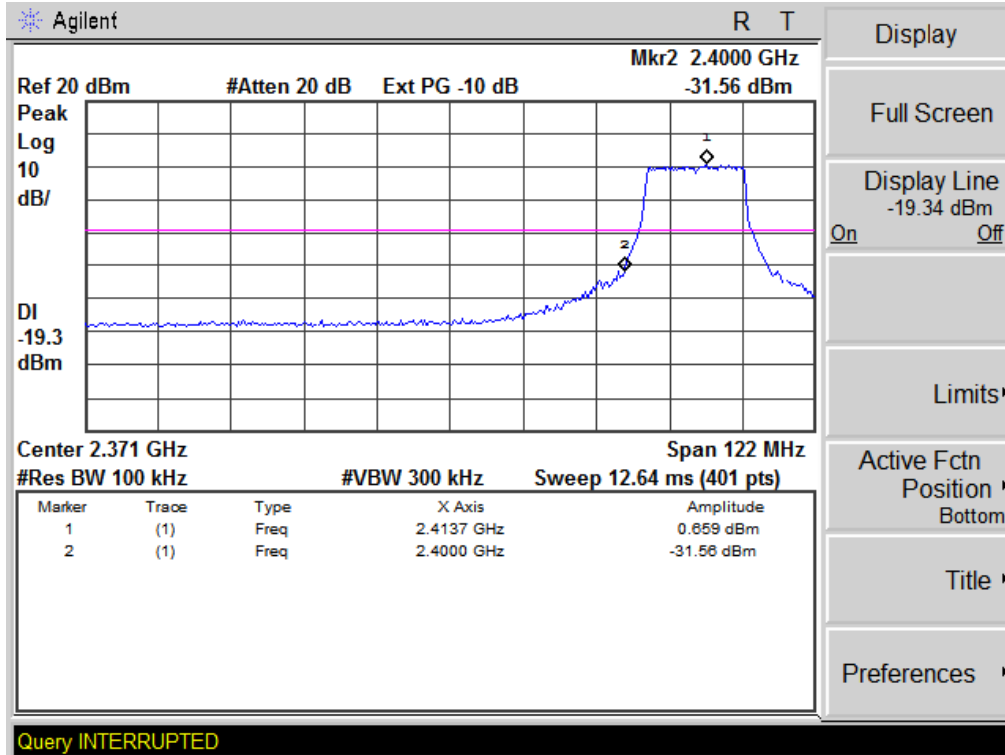


802.11g: Band Edge, Right Side

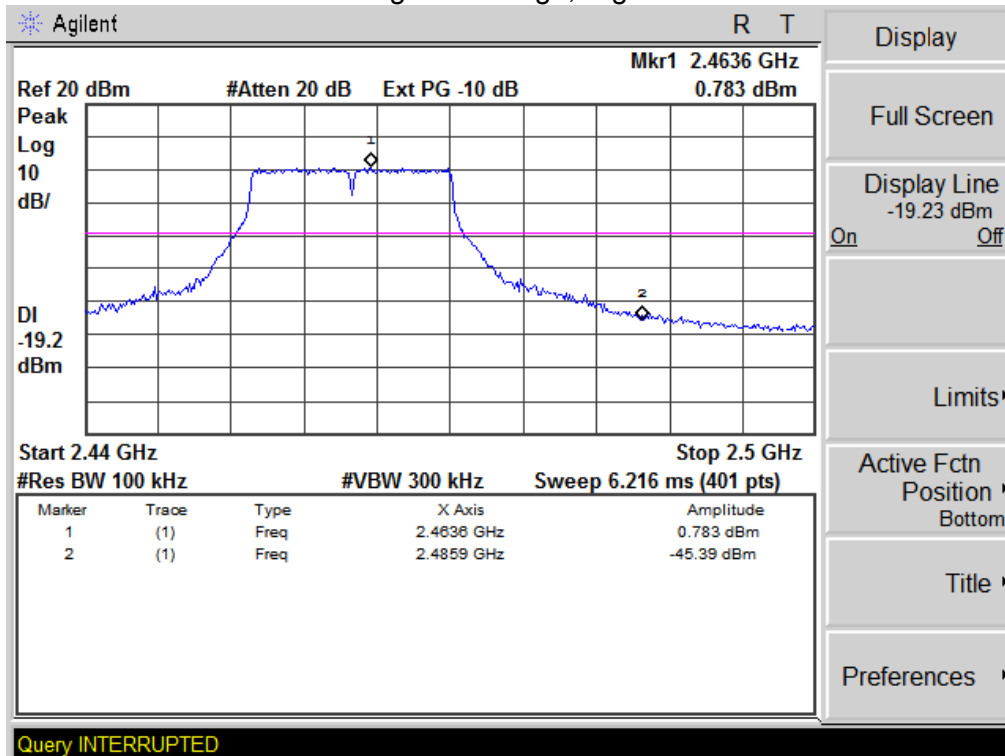


802.11n-HT20: Band Edge, Left Side

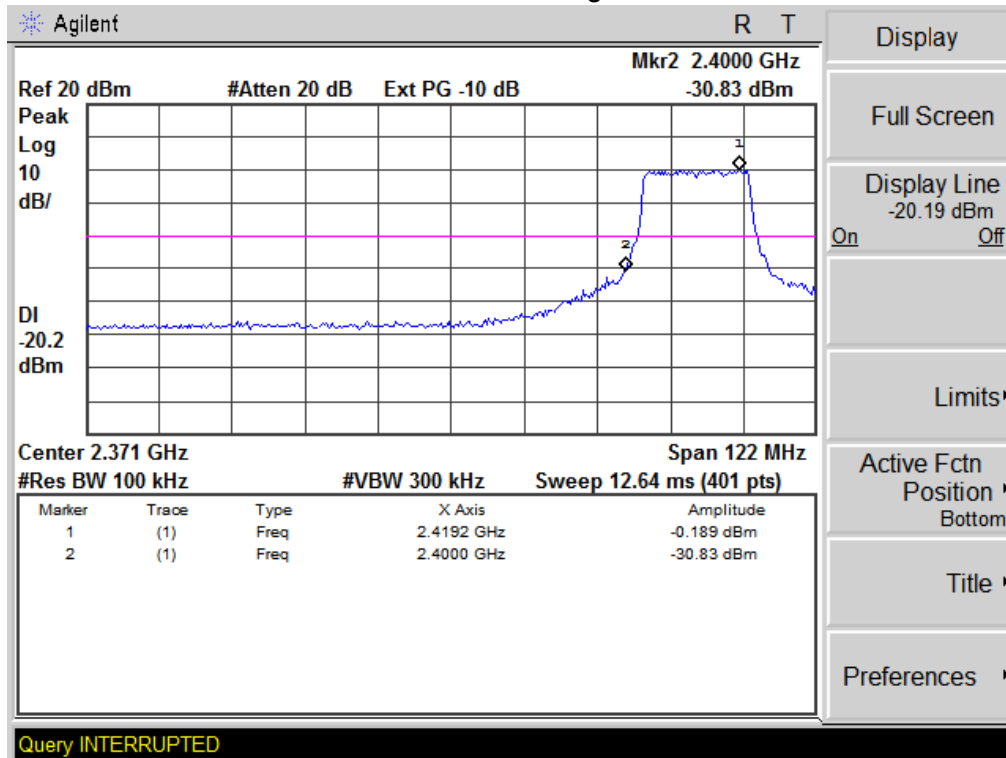


802.11n-HT20: Band Edge, Right Side

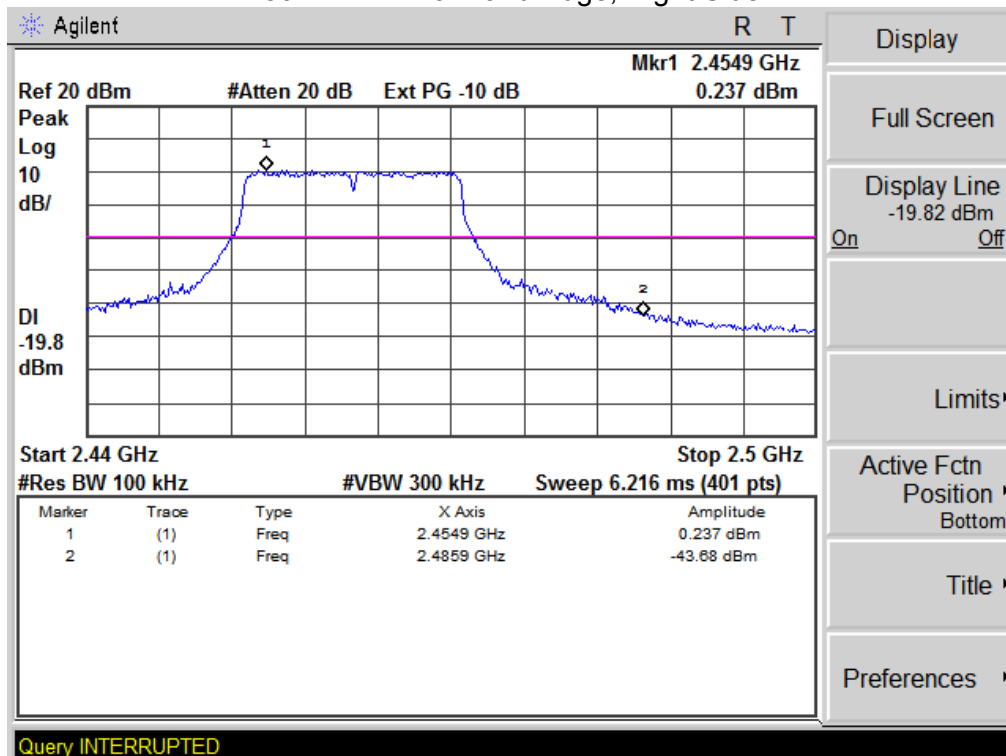

802.11n-HT40: Band Edge, Left Side

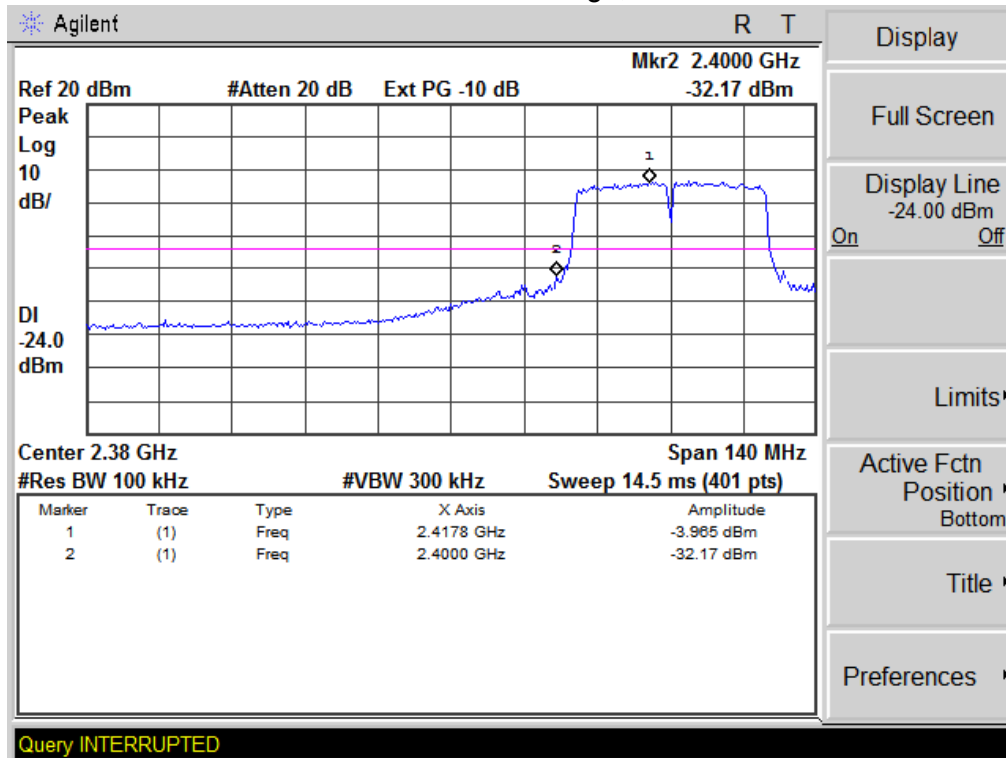

802.11n-HT40: Band Edge, Right Side

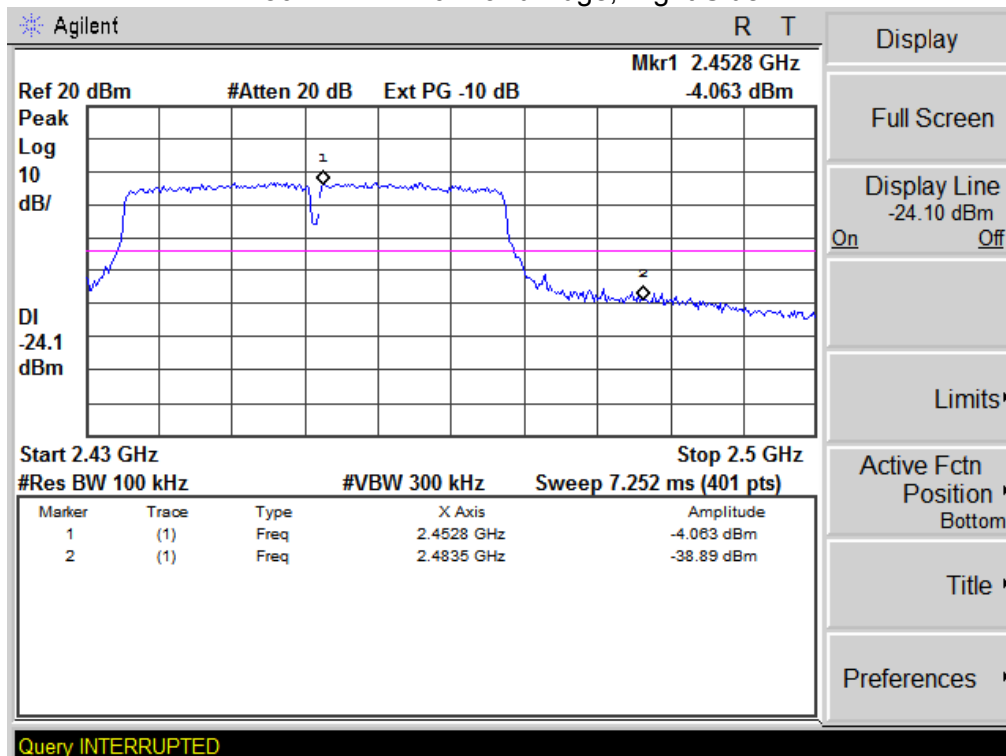

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is external antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

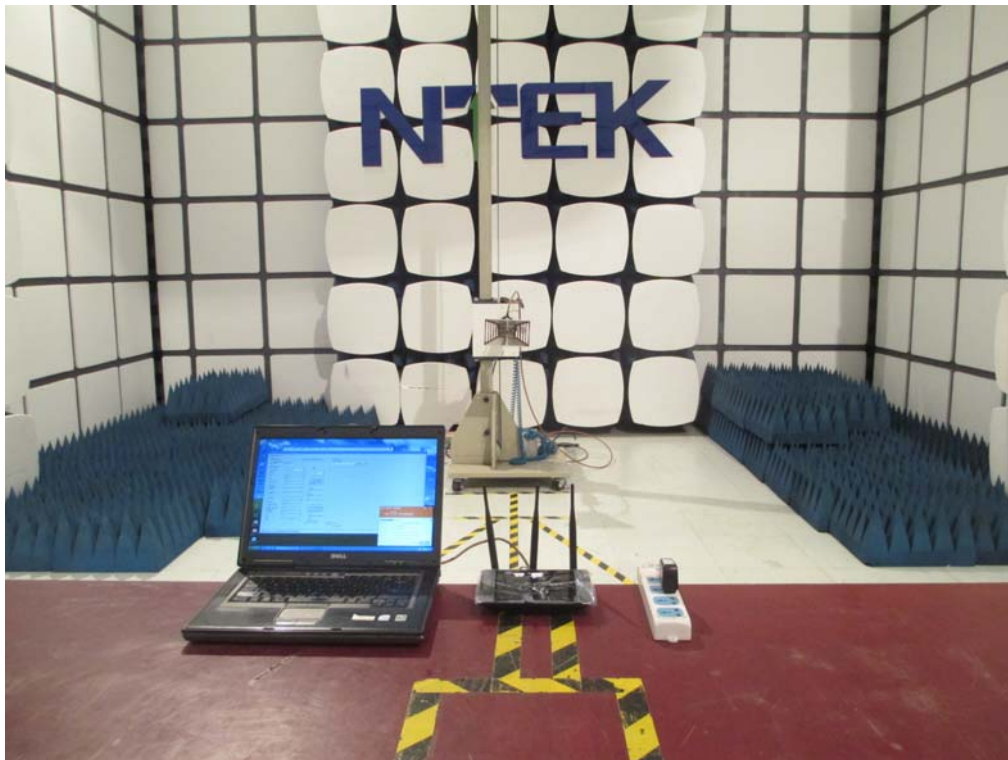

Conducted Measurement Photos

