

MEASUREMENT REPORT

FCC PART 15 Subpart E- WLAN 802.11a/n

FCC ID: HLEHT1BTN

APPLICANT: unitech Electronics Co., LTD.

Application Type: Certification

Product: Handheld terminal

Model No.: HT1


Brand Name: 

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v01r03,
KDB 662911 D01v02r01, KDB 644545 D03v01

Test Date: October 12 ~ 23, 2017

Tested By : 
(Peter Syu)
Reviewed By : 
(Paddy Chen)
Approved By : 
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v01r03. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1708TW2602-U4	1.0	Original report	2017-10-30	

CONTENTS

Description	Page
§2.1033 General Information.....	6
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION.....	8
2.1. Equipment Description	8
2.2. Operation Frequencies and Channel List.....	9
2.3. Test Mode	10
2.4. Test Software.....	10
2.5. Device Capabilities.....	11
2.6. Test Configuration	11
2.7. EMI Suppression Device(s)/Modifications	11
2.8. Labeling Requirements	11
3. DESCRIPTION OF TEST	12
3.1. Evaluation Procedure	12
3.2. AC Line Conducted Emissions.....	12
3.3. Radiated Emissions	13
4. ANTENNA REQUIREMENTS	14
5. TEST EQUIPMENT CALIBRATION DATE	15
6. MEASUREMENT UNCERTAINTY	16
7. TEST RESULT	17
7.1. Summary.....	17
7.2. 26dB Bandwidth Measurement	18
7.2.1. Test Limit	18
7.2.2. Test Procedure used	18
7.2.3. Test Setting	18
7.2.4. Test Setup	18
7.2.5. Test Result	19
7.3. 6dB Bandwidth Measurement	29
7.3.1. Test Limit	29
7.3.2. Test Procedure used	29
7.3.3. Test Setting	29

7.3.4. Test Setup	29
7.3.5. Test Result	30
7.4. Operation Frequency Range of 26dBc Bandwidth Measurement	33
7.4.1. Test Limit	33
7.4.2. Test Procedure used	33
7.4.3. Test Setting	33
7.4.4. Test Setup	33
7.4.5. Test Result	34
7.5. Output Power Measurement	35
7.5.1. Test Limit	35
7.5.2. Test Procedure Used.....	36
7.5.3. Test Setting	37
7.5.4. Test Setup	37
7.5.5. Test Result	38
7.6. Transmit Power Control.....	43
7.6.1. Test Limit	43
7.6.2. Test Procedure Used.....	43
7.6.3. Test Setting	43
7.6.4. Test Setup	43
7.6.5. Test Result	44
7.7. Power Spectral Density Measurement	45
7.7.1. Test Limit	45
7.7.2. Test Procedure Used.....	45
7.7.3. Test Setting	46
7.7.4. Test Setup	46
7.7.5. Test Result	47
7.8. Radiated Spurious Emission Measurement	59
7.8.1. Test Limit	59
7.8.2. Test Procedure Used.....	59
7.8.3. Test Setting	59
7.8.4. Test Setup	61
7.8.5. Test Result	63
7.9. Radiated Restricted Band Edge Measurement.....	143
7.9.1. Test Limit	143
7.9.2. Test Result	146
7.10. AC Conducted Emissions Measurement.....	206
7.10.1. Test Limit	206
7.10.2. Test Procedure	206

7.10.3. Test Setup	207
7.10.4. Test Result	208
8. CONCLUSION	210

§2.1033 General Information

Applicant	unitech Electronics Co., LTD.
Applicant Address	5F, No. 136, Lane 235, Baoqiao Road, Xindian District, New Taipei City 231, Taiwan (R.O.C.)
Manufacturer	unitech Electronics Co., LTD.
Manufacturer Address	5F, No. 136, Lane 235, Baoqiao Road, Xindian District, New Taipei City 231, Taiwan (R.O.C.)
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15 Subpart E (Section 15.407)
Model No.	HT1
Test Device Serial No.	N/A ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification	Unlicensed National Information Infrastructure (UNII)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

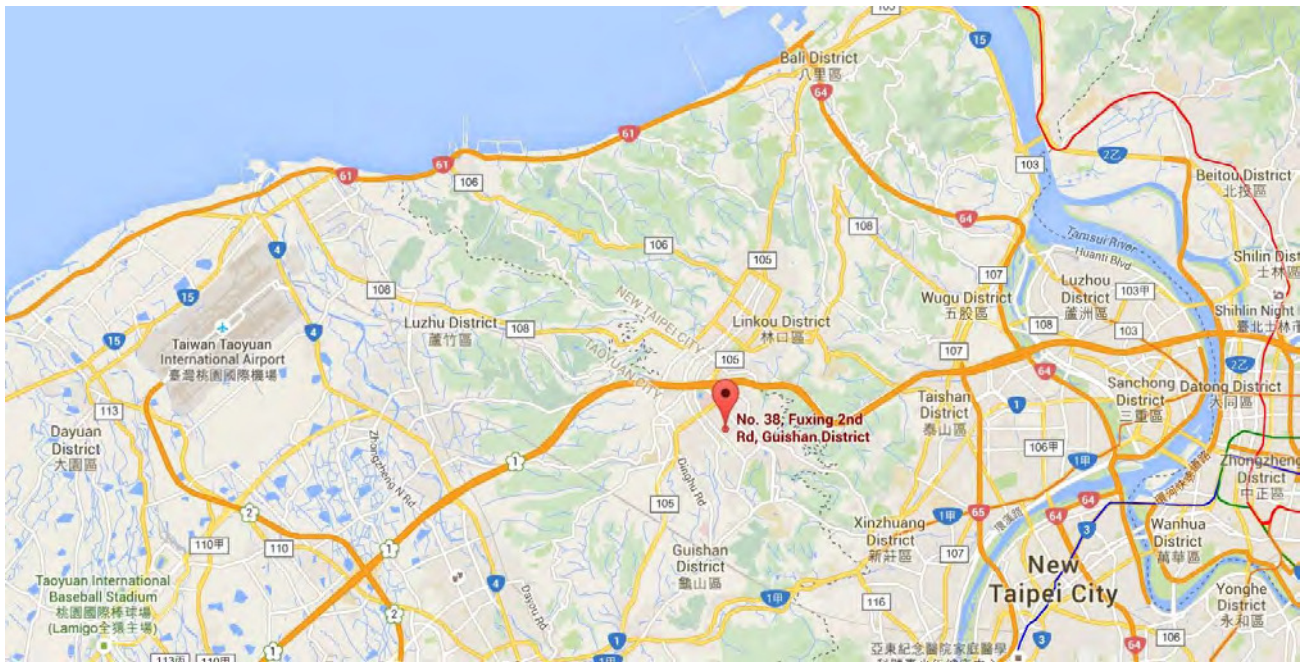

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Handheld terminal
Model No.	HT1
Brand Name	unitech
Supports Radios Spec.	WLAN : 2.4G : 802.11b/g/n-20/n-40; 5G : 802.11a/n-20/n-40 Bluetooth Dual Mode: V3.0+EDR/ V4.0 LE
Wi-Fi Specification	802.11a/b/g/n
Frequency Range	<u>2.4GHz:</u> For 802.11b/g/n-HT20: 2412 ~ 2462 MHz For 802.11n-HT40: 2422 ~ 2452 MHz <u>5GHz:</u> For 802.11a/n-HT20: 5180~5825MHz For 802.11n-HT40: 5190~5795MHz
Maximum Output Power	802.11a: 10.48dBm 802.11n-HT20: 9.92dBm, 802.11n-HT40: 11.31dBm,
Modulation Type	802.11a/n-20/n-40: OFDM (BPSK, QPSK, 16QAM,64QAM,256QAM)
Docking Adapter	MFR : ENG Model No: 6A-181WP05 Input: AC 100-240V~0.6A, 50-60Hz Output: DC 5V, 3.0A with Core*1
Battery	MFR: WELL Tech Energy Inc. Model No: 1400-900044G Rating: DC 3.7V, 1150mA, 4.255Wh
	MFR: WELL Tech Energy Inc. Model No: 1400-900045G Rating: DC 3.6V, 4540mA, 16.344Wh

:

2.2. Operation Frequencies and Channel List

802.11 n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11 n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
151	5755 MHz	159	5795 MHz	--	--

2.3. Test Mode

Test Mode	Mode 1: Transmit by 802.11a
	Mode 2: Transmit by 802.11n-HT20
	Mode 3: Transmit by 802.11n-HT40

2.4. Test Software

The test utility software used during testing was “adb tool”.

2.5. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS) and 5GHz WLAN (NII).

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average per the guidance of Section B)2)b) of KDB 789033 D02v01r03. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11a	96%
802.11n-HT20	96%
802.11n-HT40	91%

2.6. Test Configuration

This device was tested per the guidance of KDB 789033 D02v01r03. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 were used in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.10.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Handheld terminal**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Auden Techno Corp.	205592G	PCB	3.39dBi for 5150 ~ 5250MHz 3.02dBi for 5250 ~ 5350MHz 3.36dBi for 5470 ~ 5725MHz 3.42dBi for 5725 ~ 5850MHz

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2018.03.15
Cable	Rosnol	N1C50-RG400-B 1C50-500CM	MRTTWE00013	1 year	2018.05.19
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2018.03.16

Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2018.05.14
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2018.03.16
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2018.04.13
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2018.04.17
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2018.04.24
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2018.04.24
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2018.04.19
Cable	HUBERSUHNER	SF106	MRTTWA00010	1 year	2018.05.19
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWA00012	1 year	2018.05.19

Conducted Test Equipment – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2018.07.24
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2018.03.19

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement – SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 2.42dB
Conducted Measurement– SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.3dB
Radiated Emission Measurement – AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 4.22dB

7. TEST RESULT

7.1. Summary

Company Name: Handheld terminal
Model No.: HT1
Data Rate(s) Tested: 6Mbps ~ 54Mbps (a);
6.5/7.2Mbps ~ 65/72.2Mbps (n-HT20);
13.5/15.0Mbps ~ 135/150Mbps (n-HT40);

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(i), (2), (3)	Maximum Conducted Output Power	Refer to Section 7.5		Pass	Section 7.5
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		N/A	Section 7.6
15.407(a)(1)(i), (2), (3), (5)	Power Spectral Density	Refer to Section 7.7		Pass	Section 7.7
15.407(b)(1), (4)	Undesirable Emissions	$\leq -27\text{dBm/MHz EIRP}$ $\leq -17\text{dBm/MHz EIRP}$	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v01r03 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

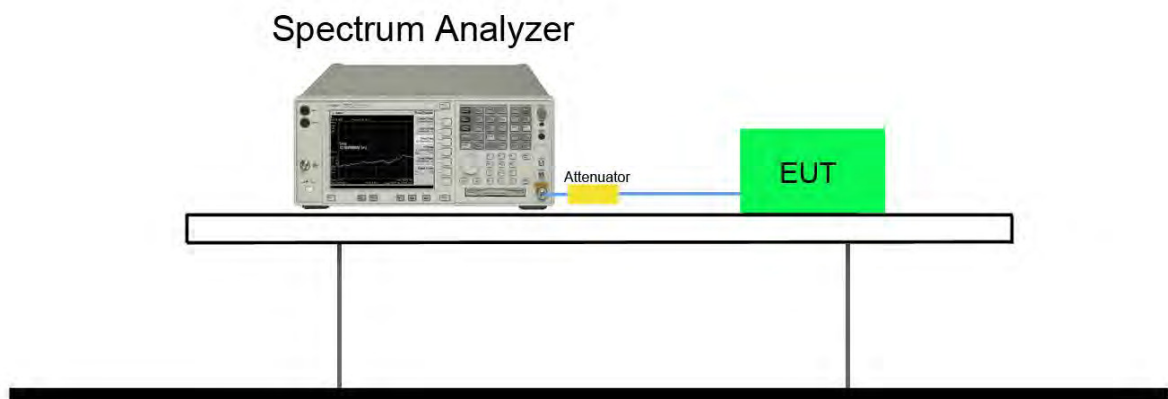

7.2.5. Test Result

Product	Handheld terminal	Test Engineer	Peter
Test Site	SR2	Test Date	2017/10/17
Test Item	26dB Bandwidth		

Test Mode	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	36	5180	21.26	16.429
802.11a	44	5220	20.4	16.348
802.11a	48	5240	20.4	16.35
802.11a	52	5260	25.73	16.554
802.11a	60	5300	25.91	16.487
802.11a	64	5320	24.08	16.44
802.11a	100	5500	19.86	16.333
802.11a	116	5580	21.01	16.377
802.11a	120	5600	20.55	16.39
802.11a	140	5700	19.83	16.31
802.11a	144	5720	21.48	16.417
802.11a	149	5745	20.23	16.344
802.11a	157	5785	20.44	16.356
802.11a	165	5825	20.72	16.365
802.11n-HT20	36	5180	20.17	17.477
802.11n-HT20	44	5220	20.64	17.493
802.11n-HT20	48	5240	21.4	17.493
802.11n-HT20	52	5260	22.99	17.545
802.11n-HT20	60	5300	27.01	17.807
802.11n-HT20	64	5320	27.36	17.825
802.11n-HT20	100	5500	22.86	17.585
802.11n-HT20	116	5580	21.55	17.527
802.11n-HT20	120	5600	23.92	17.677
802.11n-HT20	140	5700	22.99	17.62
802.11n-HT20	144	5720	25.26	17.595
802.11n-HT20	149	5745	22.7	17.574
802.11n-HT20	157	5785	23.44	17.573
802.11n-HT20	165	5825	21.97	17.599

Test Mode	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11n-HT40	38	5190	54.62	35.987
802.11n-HT40	46	5230	55.46	36.032
802.11n-HT40	54	5270	64.62	38.678
802.11n-HT40	62	5310	63.41	36.292
802.11n-HT40	102	5510	43.06	35.971
802.11n-HT40	110	5550	62.97	35.975
802.11n-HT40	118	5590	62.79	36.289
802.11n-HT40	134	5670	49.06	35.887
802.11n-HT40	151	5755	53.2	35.856
802.11n-HT40	159	5795	52.77	36..076

802.11a 26dB Bandwidth & 99% Bandwidth

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)



Channel 116 (5580MHz)



Channel 120 (5600MHz)



Channel 140 (5700MHz)




Channel 144 (5720MHz)



Channel 149 (5745MHz)



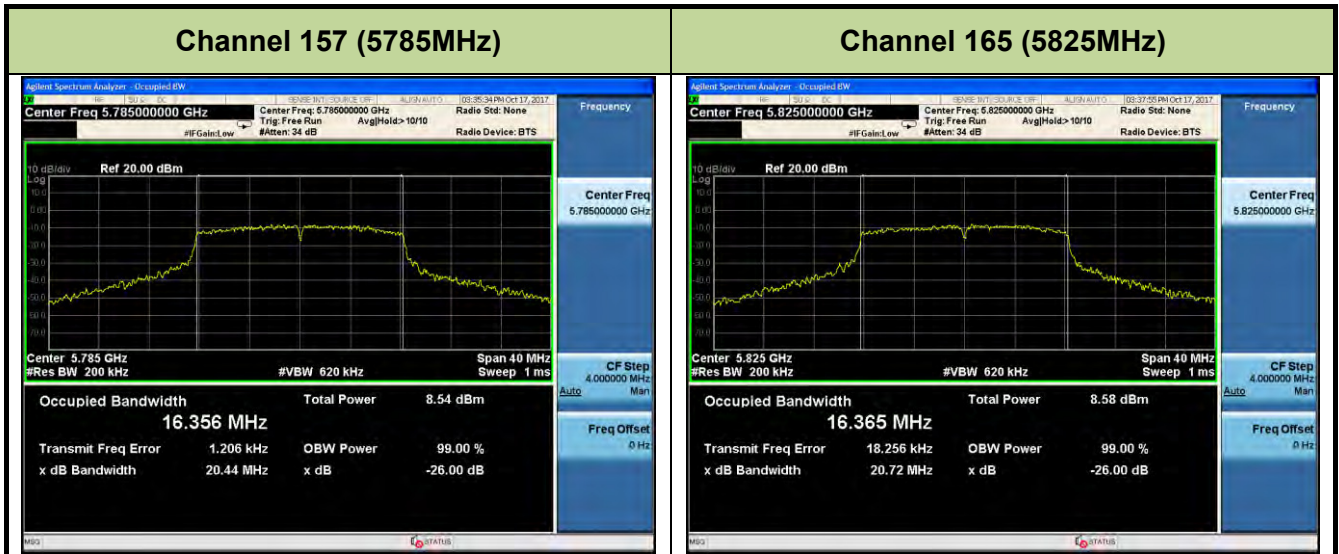

802.11n-HT20 26dB Bandwidth & 99% Bandwidth

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)




Channel 116 (5580MHz)



Channel 120 (5600MHz)



Channel 140 (5700MHz)

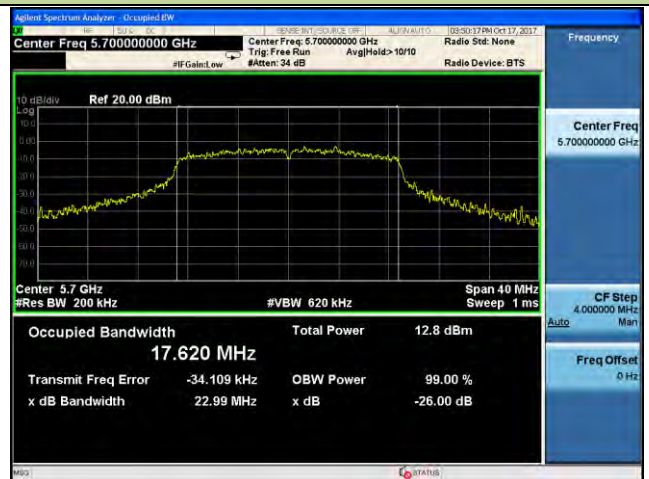


Channel 144 (5720MHz)



Channel 149 (5745MHz)



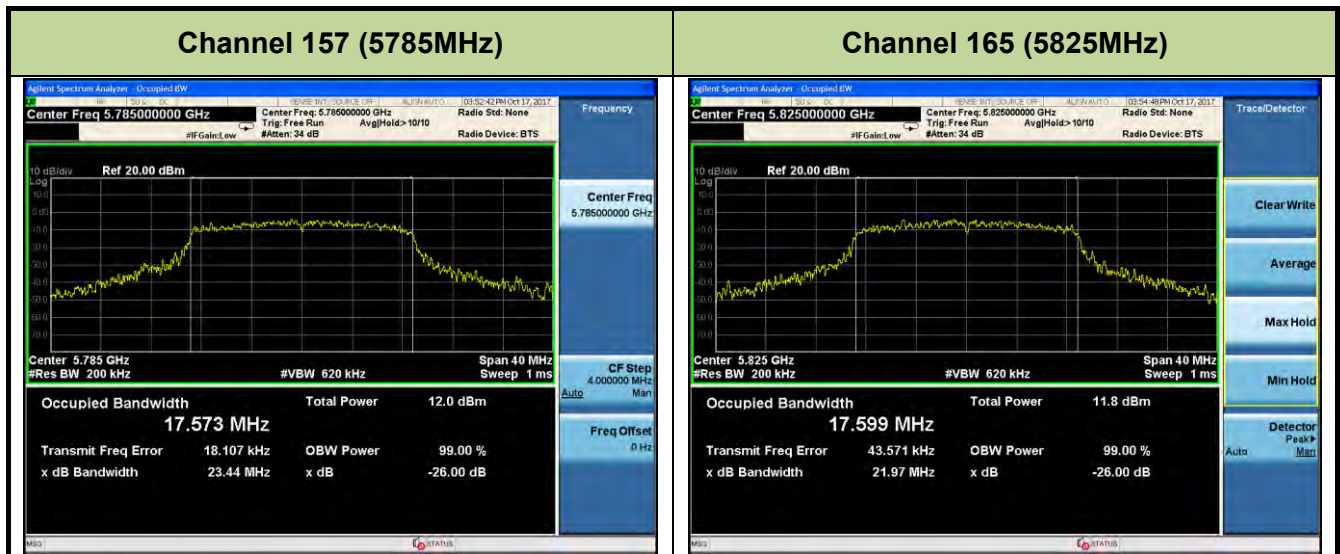

802.11n-HT40 26dB Bandwidth & 99% Bandwidth

Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 54 (5270MHz)



Channel 62 (5310MHz)



Channel 102 (5510MHz)



Channel 110 (5550MHz)



Channel 118 (5590MHz)



Channel 134 (5670MHz)



Channel 142 (5710MHz)



Channel 151 (5755MHz)



Channel 159 (5795MHz)



7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v01r03 - Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

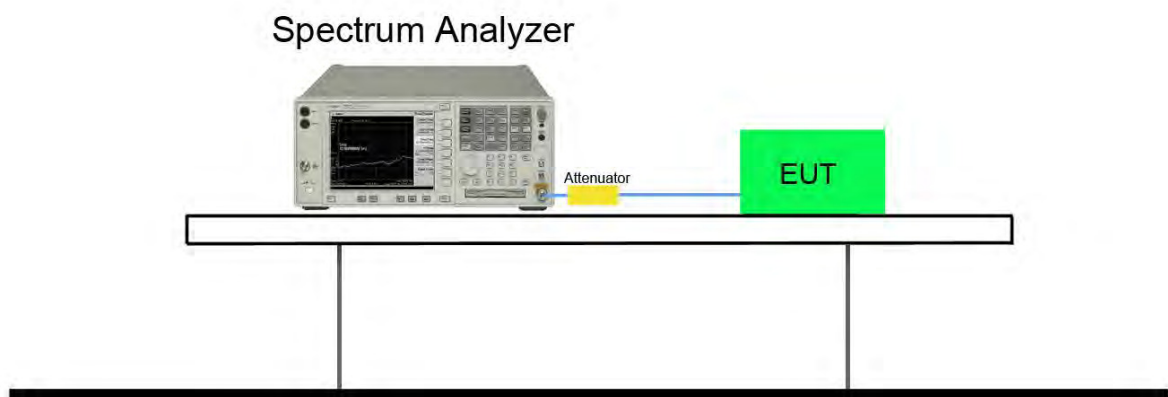

7.3.5. Test Result

Product	Handheld terminal	Test Engineer	Peter
Test Site	SR2	Test Date	2017/10/17
Test Item	6dB Bandwidth		

Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	149	5745	13.51	≥ 0.5	Pass
802.11a	157	5785	15.14	≥ 0.5	Pass
802.11a	165	5825	12.87	≥ 0.5	Pass
802.11n-HT20	149	5745	13.33	≥ 0.5	Pass
802.11n-HT20	157	5785	13.49	≥ 0.5	Pass
802.11n-HT20	165	5825	16.06	≥ 0.5	Pass
802.11n-HT40	151	5755	26.11	≥ 0.5	Pass
802.11n-HT40	159	5795	30.15	≥ 0.5	Pass

802.11a 6dB Bandwidth

Channel 149 (5745MHz)



Channel 157 (5785MHz)



Channel 165 (5825MHz)




802.11n-HT20 6dB Bandwidth

Channel 149 (5745MHz)



Channel 157 (5785MHz)

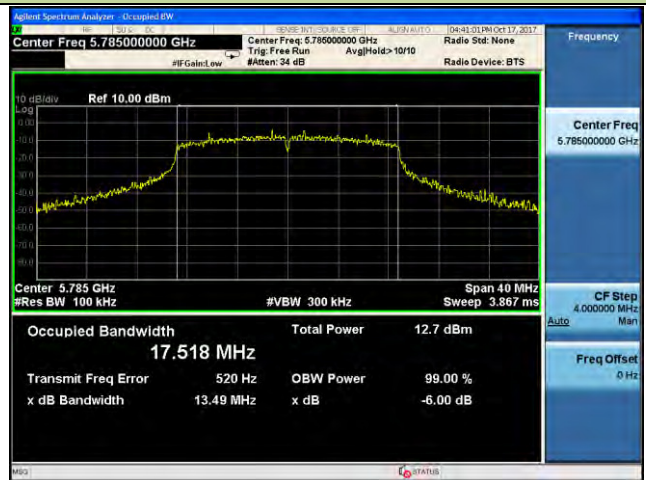

Channel 165 (5825MHz)



802.11n-HT40 6dB Bandwidth - Ant 0

Channel 151 (5755MHz)



Channel 159 (5795MHz)



7.4. Operation Frequency Range of 26dBc Bandwidth Measurement

7.4.1. Test Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz.


7.4.2. Test Procedure used

N/A

7.4.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. Span = 1.5 times to 5.0 times the OBW.
3. RBW = 1 % to 5 % of the OBW.
4. VBW $\geq 3 \times$ RBW.
5. Detector = Peak.
6. Trace mode = max hold.
7. Allow the trace to stabilize and set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
8. Determine the “-26 dB down amplitude” using [(reference value) - 26].
9. Using the marker function of the instrument to show 5250MHz frequency level.


7.4.4. Test Setup

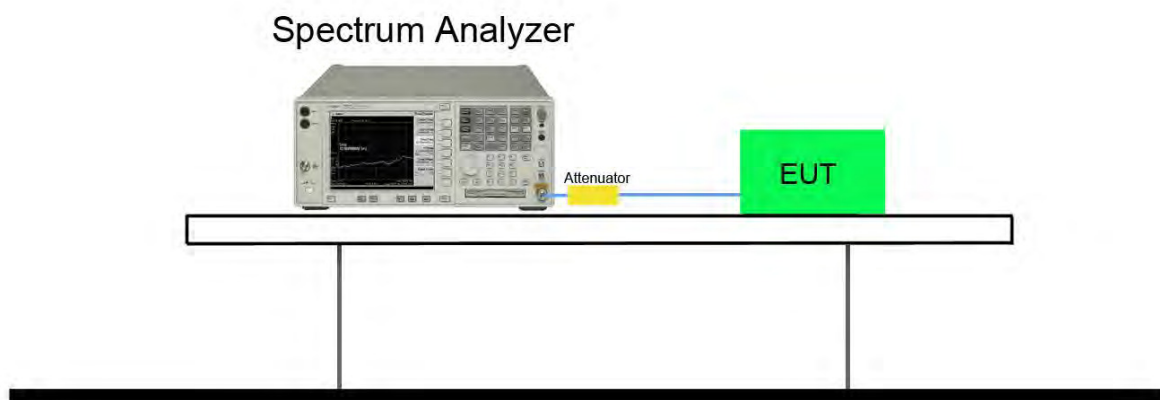

7.4.5. Test Result

Product	Handheld terminal	Test Engineer	Peter
Test Site	SR2	Test Date	2017/04/17
Test Item	Operation Frequency Range of 26dBc Bandwidth Measurement		

Test Mode	Channel No.	Frequency (MHz)	Result
802.11a	48	5240	Pass
802.11n-HT20	48	5240	Pass
802.11n-HT40	46	5230	Pass

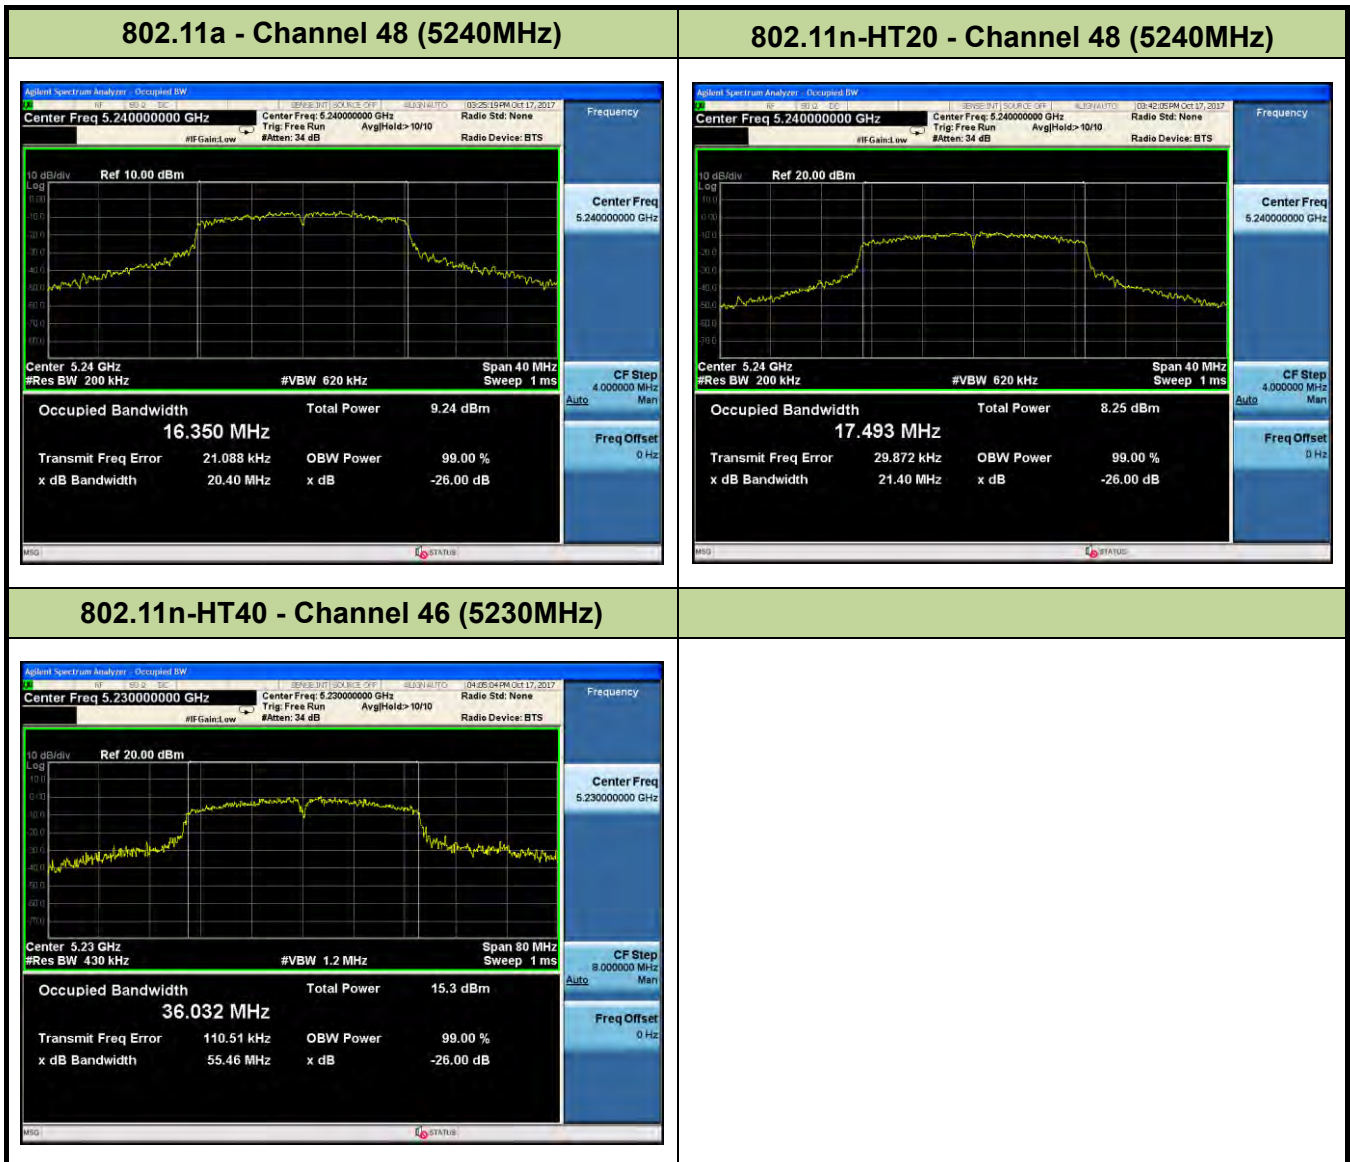

7.5. Output Power Measurement

7.5.1. Test Limit

For FCC Power Measurement Limit

For client operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 250mW.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (23.98dBm) or $11\text{dBm} + 10 \log(26\text{dB BW})$.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For IC Power Measurement Limit

For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW (23.01dBm) or $10 + 10 \cdot \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power shall not exceed 250 mW (23.98dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W (30dBm) or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.725-5.85 GHz band, the maximum conducted output power shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

EIRP Limit Calculation as below:

For 5150-5250MHz

$$802.11a: 10 + 10 \log_{10} (16.81\text{MHz}) = 22.26\text{dBm} < 23.01\text{dBm};$$

$$802.11n\text{-HT20}: 10 + 10 \log_{10} (17.92\text{MHz}) = 22.53\text{dBm} < 23.01\text{dBm};$$

$$802.11n\text{-HT40}/ac\text{-VHT80}: 10 + 10 \log_{10} B > 23.01\text{dBm};$$

For 5250-5350MHz, 5470-5725MHz

$$802.11a: 17 + 10 \log_{10} (16.79\text{MHz}) = 29.27\text{dBm} < 30\text{dBm};$$

$$802.11n\text{-HT20}: 17 + 10 \log_{10} (17.93\text{MHz}) = 29.54\text{dBm} < 30\text{dBm};$$

$$802.11n\text{-HT40}/ac\text{-VHT80}: 10 + 10 \log_{10} B > 30\text{dBm};$$

Max Conducted Output Power Limit Calculation as below:

For 5250-5350MHz, 5470-5725MHz

$$802.11a: 11 + 10 \log_{10} (16.79\text{MHz}) = 23.26\text{dBm} < 23.98\text{dBm};$$

$$802.11n\text{-HT20}: 11 + 10 \log_{10} (17.93\text{MHz}) = 23.53\text{dBm} < 23.98\text{dBm};$$

$$802.11n\text{-HT40}/ac\text{-VHT80}: 11 + 10 \log_{10} B > 23.98\text{dBm};$$


7.5.2. Test Procedure Used

KDB 789033 D02v01r03 - Section E) 3) b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

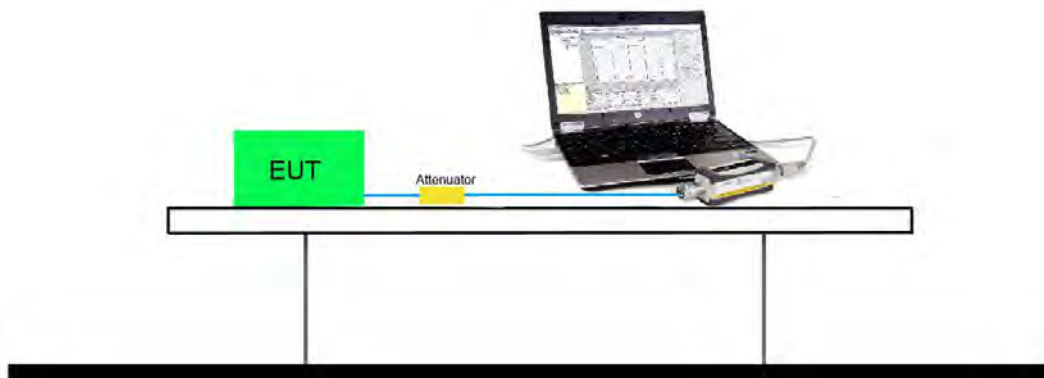

7.5.5. Test Result

Product	Handheld terminal	Test Engineer	Peter
Test Site	SR2	Test Date	2017/10/17
Test Item	Output Power		

802.11a										
Channel No.	Frequency (MHz)	Average Power								Required Limit (dBm)
		For different Data Rate (Mbps)								
		6	9	12	18	24	36	48	54	
36	5180	7.26	--	--	--	--	--	--	--	≤ 23.98
44	5220	7.68	7.2	7.05	6.99	6.95	6.2	5.75	4.6	≤ 23.98
48	5240	7.67	--	--	--	--	--	--	--	≤ 23.98
52	5260	9.46	--	--	--	--	--	--	--	≤ 23.98
60	5300	10.01	9.92	9.84	9.33	9.01	8.77	8.54	6.93	≤ 23.98
64	5320	9.34	--	--	--	--	--	--	--	≤ 23.98
100	5500	9.27	--	--	--	--	--	--	--	≤ 23.98
116	5580	10.48	10.2	9.98	9.66	9.54	9.21	8.54	7.48	≤ 23.98
120	5600	10.21	10.01	9.76	9.54	9.28	8.9	8.5	7.23	≤ 23.98
140	5700	7.23	--	--	--	--	--	--	--	≤ 23.98
144	5720	6.62	--	--	--	--	--	--	--	≤ 23.98
149	5745	7.27	--	--	--	--	--	--	--	≤ 30
157	5785	7.45	7.3	7.11	6.69	6.39	6.22	5.88	4.57	≤ 30
165	5825	7.46	--	--	--	--	--	--	--	≤ 30

802.11n-20M										
Channel No.	Frequency (MHz)	Average Power								Required Limit (dBm)
		For different Data Rate (Mbps)								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	
36	5180	6.47	--	--	--	--	--	--	--	≤ 23.98
44	5220	6.84	6.4	5.99	5.86	5.44	5.02	4.8	3.6	≤ 23.98
48	5240	6.87	--	--	--	--	--	--	--	≤ 23.98
52	5260	8.55	--	--	--	--	--	--	--	≤ 23.98
60	5300	9.21	8.88	8.2	8.01	7.8	7.1	6.54	5.97	≤ 23.98
64	5320	7.88	--	--	--	--	--	--	--	≤ 23.98
100	5500	8.1	--	--	--	--	--	--	--	≤ 23.98
116	5580	9.92	9.5	9.22	8.78	8.37	8.11	7.86	6.55	≤ 23.98
120	5600	9.43	9.12	8.99	8.52	8.03	7.66	7	6.33	≤ 23.98
140	5700	6.14	--	--	--	--	--	--	--	≤ 23.98
144	5720	5.89	--	--	--	--	--	--	--	≤ 23.98
149	5745	6.55	--	--	--	--	--	--	--	≤ 30
157	5785	6.62	6.12	5.89	5.44	5.11	4.99	4.02	3.63	≤ 30
165	5825	6.16	--	--	--	--	--	--	--	≤ 30

802.11n-40M

Channel No.	Frequency (MHz)	Average Power								Required Limit (dBm)
		For different Data Rate (Mbps)								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	
38	5190	8.24	--	--	--	--	--	--	--	≤ 23.98
46	5230	8.48	8	7.82	7.33	6.11	4.32	2.89	1.82	≤ 23.98
54	5270	10.31	--	--	--	--	--	--	--	≤ 23.98
62	5310	7.82	7.43	7	6.5	5.83	5.2	4.66	3.87	≤ 23.98
102	5510	8.19	--	--	--	--	--	--	--	≤ 23.98
110	5550	11.27	10.99	10.43	9.99	9.18	8.72	6.55	4.94	≤ 23.98
118	5590	11.31	10.87	10.12	9.45	8.95	8.62	7.11	5.1	≤ 23.98
134	5670	8.17	--	--	--	--	--	--	--	≤ 23.98
142	5710	7.76	--	--	--	--	--	--	--	≤ 23.98
151	5755	8.12	--	--	--	--	--	--	--	≤ 30
159	5795	8.18	7.88	7.21	6.54	5.93	5.01	3.32	1.55	≤ 30

For FCC Bands (UNII-2A & UNII-2C & UNII-3) & IC Bands (UNII-1 & UNII-2A & UNII-2C & UNII-3)

Test Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Duty Cycles (%)	Total Average Power (dBm)	Average Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
11a	36	5180	7.26	86	7.915	≤ 23.01		≤ 22.26	Pass
11a	44	5220	7.68	86	8.335	≤ 23.01		≤ 22.26	Pass
11a	48	5240	7.67	86	8.325	≤ 23.01		≤ 22.26	Pass
11a	52	5260	9.46	86	10.115	≤ 23.98		≤ 29.27	Pass
11a	60	5300	10.01	86	10.665	≤ 23.98		≤ 29.27	Pass
11a	64	5320	9.34	86	9.995	≤ 23.98		≤ 29.27	Pass
11a	100	5500	9.27	86	9.925	≤ 23.98		≤ 29.27	Pass
11a	116	5580	10.48	86	11.135	≤ 23.98		≤ 29.27	Pass
11a	120	5600	10.21	86	10.865	≤ 23.98		≤ 29.27	Pass
11a	140	5700	7.23	86	7.885	≤ 23.98		≤ 29.27	Pass
11a	144	5720	6.62	86	7.275	≤ 23.98		≤ 29.27	Pass
11a	149	5745	7.27	86	7.925	≤ 30		≤ 36.00	Pass
11a	157	5785	7.45	86	8.105	≤ 30		≤ 36.00	Pass
11a	165	5825	7.46	86	8.115	≤ 30		≤ 36.00	Pass
11n-HT20	36	5180	6.47	86	7.125	≤ 23.01		≤ 22.53	Pass
11n-HT20	44	5220	6.84	86	7.495	≤ 23.01		≤ 22.53	Pass
11n-HT20	48	5240	6.87	86	7.525	≤ 23.01		≤ 22.53	Pass
11n-HT20	52	5260	8.55	86	9.205	≤ 23.98		≤ 29.54	Pass
11n-HT20	60	5300	9.21	86	9.865	≤ 23.98		≤ 29.54	Pass
11n-HT20	64	5320	7.88	86	8.535	≤ 23.98		≤ 29.54	Pass
11n-HT20	100	5500	8.1	86	8.755	≤ 23.98		≤ 29.54	Pass
11n-HT20	116	5580	9.92	86	10.575	≤ 23.98		≤ 29.54	Pass
11n-HT20	120	5600	9.43	86	10.085	≤ 23.98		≤ 29.54	Pass
11n-HT20	140	5700	6.14	86	6.795	≤ 23.98		≤ 29.54	Pass
11n-HT20	144	5720	5.89	86	6.545	≤ 23.98		≤ 29.54	Pass
11n-HT20	149	5745	6.55	86	7.205	≤ 30		≤ 36.00	Pass
11n-HT20	157	5785	6.62	86	7.275	≤ 30		≤ 36.00	Pass
11n-HT20	165	5825	6.16	86	6.815	≤ 30		≤ 36.00	Pass

Test Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Duty Cycles (%)	Total Average Power (dBm)	Average Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
11n-HT40	38	5190	8.24	74	9.548	≤ 24		≤ 23.01	Pass
11n-HT40	46	5230	8.48	74	9.788	≤ 24		≤ 23.01	Pass
11n-HT40	54	5270	10.31	74	11.618	≤ 24		≤ 23.01	Pass
11n-HT40	62	5310	7.82	74	9.128	≤ 24		≤ 23.01	Pass
11n-HT40	102	5510	8.19	74	9.498	≤ 24		≤ 30.00	Pass
11n-HT40	110	5550	11.27	74	12.578	≤ 24		≤ 30.00	Pass
11n-HT40	118	5590	11.31	74	12.618	≤ 24		≤ 30.00	Pass
11n-HT40	134	5670	8.17	74	9.478	≤ 24		≤ 23.01	Pass
11n-HT40	142	5710	7.76	74	9.068	≤ 24		≤ 23.01	Pass
11n-HT40	151	5755	8.12	74	9.428	≤ 30		≤ 36.00	Pass
11n-HT40	159	5795	8.18	74	9.488	≤ 30		≤ 36.00	Pass

Note 1: When EUT duty cycle < 98%, the Total Average Power (dBm) = Average Power (dBm) + 10*log(1/duty cycle),

Note 2: EIRP PSD (dBm) = Total Average Power (dBm) + Antenna Gain (dBi)

7.6. Transmit Power Control

7.6.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.6.2. Test Procedure Used

KDB 789033 D02v01r03 - Section E) 3) b) Method PM-G

7.6.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.6.4. Test Setup

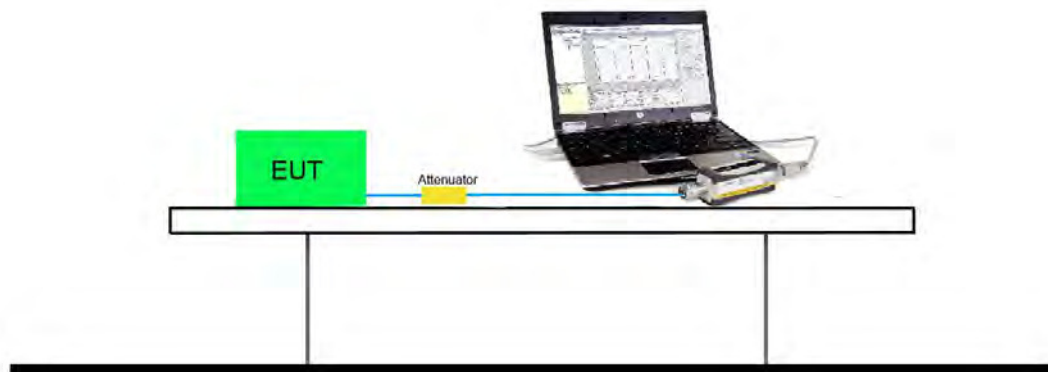

7.6.5. Test Result

A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

7.7. Power Spectral Density Measurement

7.7.1. Test Limit

For FCC Power Spectral Density Limit

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For IC Power Spectral Density Limit

For the band 5.15-5.25 GHz, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the 5.725-5.85 GHz band, the power spectral density shall not exceed 30 dBm in any 500 kHz band.


7.7.2. Test Procedure Used

KDB 789033 D02v01r03 - Section F

7.7.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
4. RBW = 100 kHz
5. VBW = 3MHz
6. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
7. Detector = power averaging (Average)
8. Sweep time = auto
9. Trigger = free run
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
12. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 7$ dB to the measured result

7.7.4. Test Setup

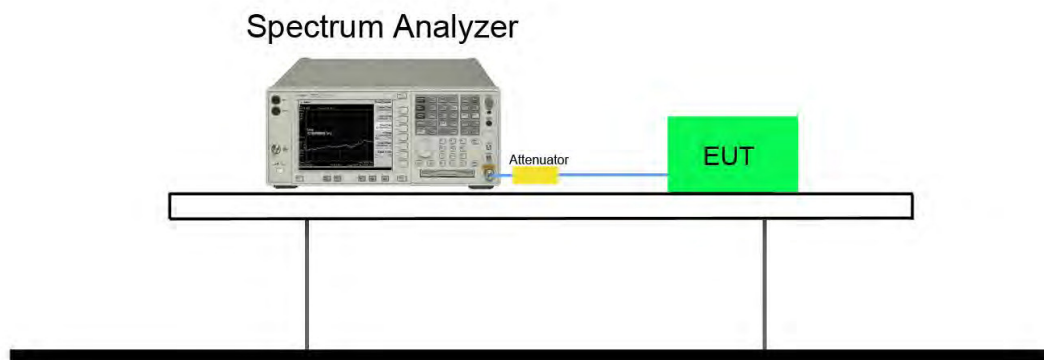

7.7.5. Test Result

Product	Handheld terminal	Test Engineer	Peter
Test Site	SR2	Test Date	2017/10/17
Test Item	Power Spectral Density		

For FCC bands (UNII-2A & UNII-2C) & IC bands (UNII-1 & UNII-2A & UNII-2C)

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Result
11a	6	36	5180	-2.725	86	-2.070	--		≤ 10	Pass
11a	6	44	5220	-2.78	86	-2.125	--		≤ 10	Pass
11a	6	48	5240	-2.713	86	-2.058	--		≤ 10	Pass
11a	6	52	5260	-0.349	86	0.306	≤ 11		--	Pass
11a	6	60	5300	-0.205	86	0.450	≤ 11		--	Pass
11a	6	64	5320	-0.988	86	-0.333	≤ 11		--	Pass
11a	6	100	5500	-1.713	86	-1.058	≤ 11		--	Pass
11a	6	116	5580	0.649	86	1.304	≤ 11		--	Pass
11a	6	120	5600	0.519	86	1.174	≤ 11		--	Pass
11a	6	140	5700	-3.298	86	-2.643	≤ 11		--	Pass
11a	6	144	5720	-3.443	86	-2.788	≤ 11		--	Pass
11n-HT20	6.5	36	5180	-13.456	86	-3.640	--		≤ 10	Pass
11n-HT20	6.5	44	5220	-12.297	86	-2.629	--		≤ 10	Pass
11n-HT20	6.5	48	5240	-12.133	86	-2.468	--		≤ 10	Pass
11n-HT20	6.5	52	5260	-4.295	86	-1.918	≤ 11		--	Pass
11n-HT20	6.5	60	5300	-3.284	86	-0.592	≤ 11		--	Pass
11n-HT20	6.5	64	5320	-3.123	86	-1.854	≤ 11		--	Pass
11n-HT20	6.5	100	5500	-2.573	86	-1.552	≤ 11		--	Pass
11n-HT20	6.5	116	5580	-1.247	86	-0.227	≤ 11		--	Pass
11n-HT20	6.5	120	5600	-2.509	86	-0.106	≤ 11		--	Pass
11n-HT20	6.5	140	5700	-2.207	86	-3.011	≤ 11		--	Pass
11n-HT20	6.5	144	5720	-0.882	86	-3.706	≤ 11		--	Pass

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Result
11n-HT40	13.5	38	5190	-5.131	74	-3.823	--		≤ 10	Pass
11n-HT40	13.5	46	5230	-5.086	74	-3.778	--		≤ 10	Pass
11n-HT40	13.5	54	5270	-3.67	74	-2.362	≤ 11		--	Pass
11n-HT40	13.5	62	5310	-4.351	74	-3.043	≤ 11		--	Pass
11n-HT40	13.5	102	5510	-5.345	74	-4.037	≤ 11		--	Pass
11n-HT40	13.5	110	5550	-2.392	74	-1.084	≤ 11		--	Pass
11n-HT40	13.5	118	5590	-2.54	74	-1.232	≤ 11		--	Pass
11n-HT40	13.5	134	5670	-3.905	74	-2.597	≤ 11		--	Pass
11n-HT40	13.5	142	5710	-6.292	74	-4.984	≤ 11		--	Pass

Note 1: When EUT duty cycle < 98%, the total PSD = Ant PSD (dBm/MHz) + 10*log(1/duty cycle),

Note 2: EIRP PSD (dBm/MHz) = Total PSD (dBm/MHz) + Antenna Gain (dBi)

For FCC bands (UNII-1)

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6	36	5180	-2.725	86	-2.070	≤ 17	Pass
11a	6	44	5220	-2.78	86	-2.125	≤ 17	Pass
11a	6	48	5240	-2.713	86	-2.058	≤ 17	Pass
11n-HT20	6.5	36	5180	-4.295	86	-3.640	≤ 17	Pass
11n-HT20	6.5	44	5220	-3.284	86	-2.629	≤ 17	Pass
11n-HT20	6.5	48	5240	-3.123	86	-2.468	≤ 17	Pass
11n-HT40	13.5	38	5190	-5.131	74	-3.823	≤ 17	Pass
11n-HT40	13.5	46	5230	-5.086	74	-3.778	≤ 17	Pass

Note: Total PSD (dBm/MHz) = Ant PSD (dBm/MHz) + 10*log(1/duty cycle)


For FCC bands (UNII-4)

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/100kHz)	Duty Cycle (%)	Constant Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
11a	6	149	5745	-13.456	86			≤ 30	Pass
11a	6	157	5785	-12.297	86			≤ 30	Pass
11a	6	165	5825	-12.133	86			≤ 30	Pass
11n-HT20	6.5	149	5745	-13.113	86			≤ 30	Pass
11n-HT20	6.5	157	5785	-12.733	86			≤ 30	Pass
11n-HT20	6.5	165	5825	-12.354	86			≤ 30	Pass
11n-HT40	13.5	151	5755	-15.462	74			≤ 30	Pass
11n-HT40	13.5	159	5795	-15.246	74			≤ 30	Pass


Note: Total PSD (dBm/500kHz) = Ant PSD (dBm/100kHz) + 10*log(1/duty cycle) + Constant Factor.

802.11a Power Spectral Density

Channel 36 (5180MHz)

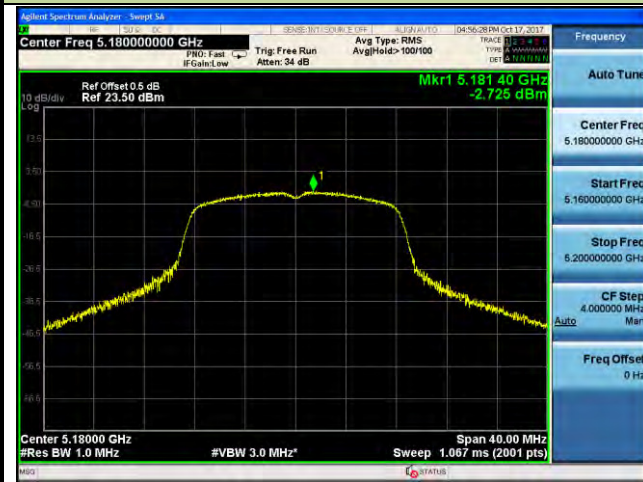

Channel 44 (5220MHz)

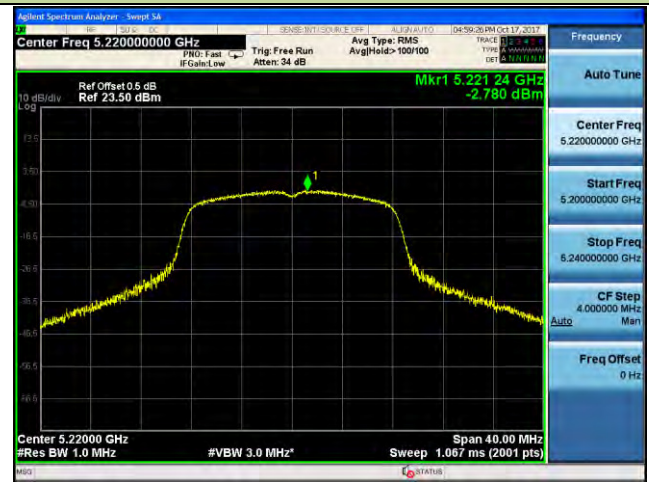

Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)




Channel 116 (5580MHz)



Channel 120 (5600MHz)



Channel 140 (5700MHz)

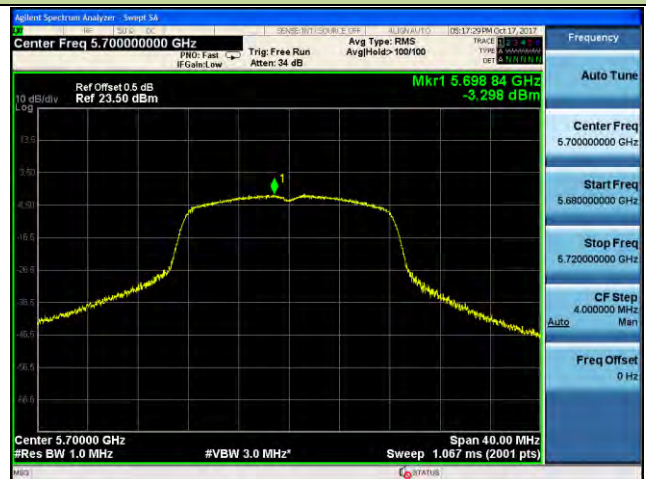


Channel 144 (5720MHz)



Channel 149 (5745MHz)



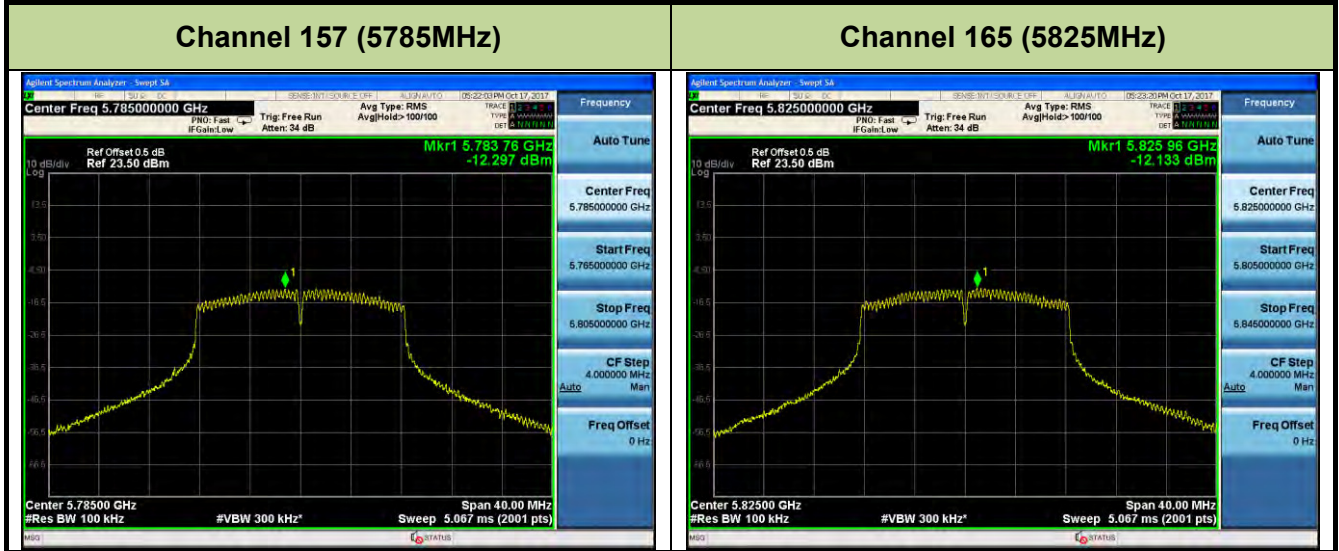

802.11n-HT20 Power Spectral Density

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)




Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)

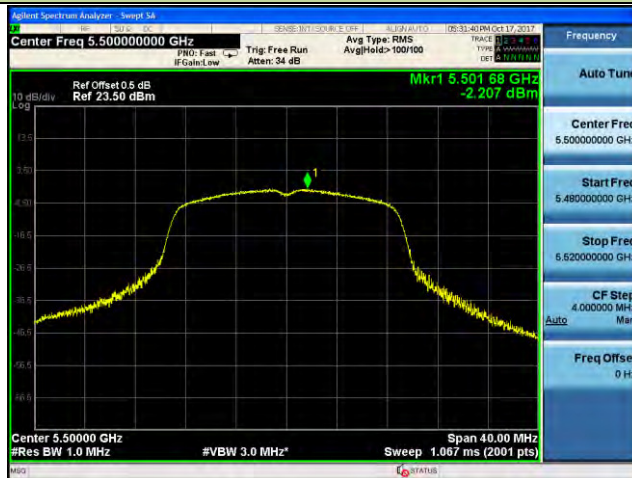

Channel 116 (5580MHz)



Channel 120 (5600MHz)



Channel 140 (5700MHz)




Channel 144 (5720MHz)



Channel 149 (5745MHz)



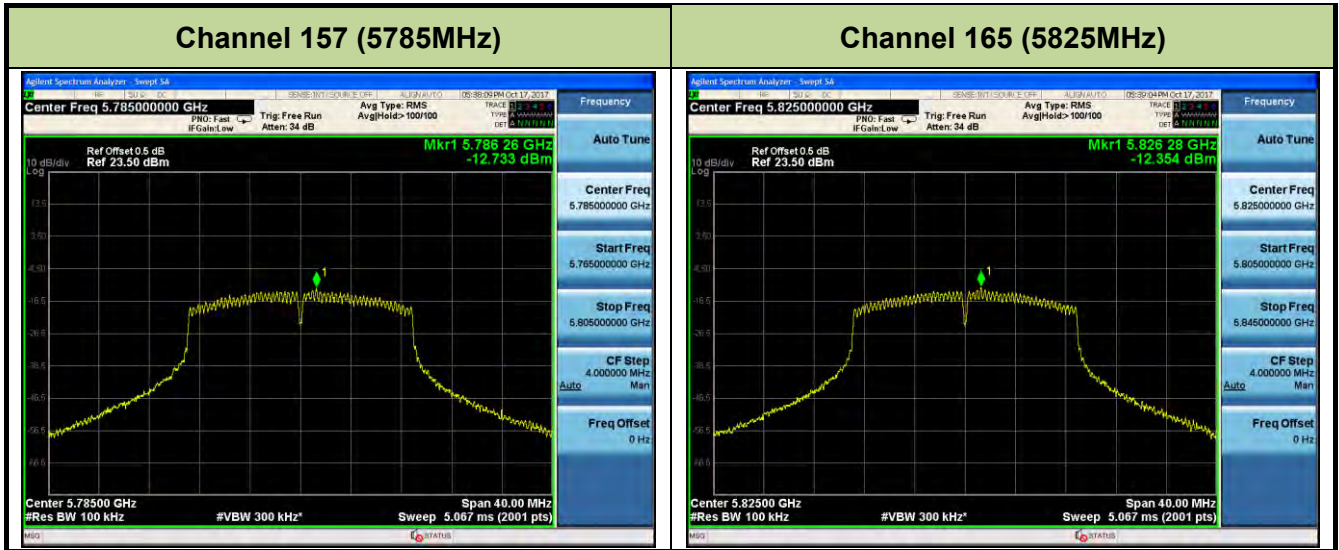

802.11n-HT40 Power Spectral Density

Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 54 (5270MHz)



Channel 62 (5310MHz)



Channel 102 (5510MHz)



Channel 110 (5550MHz)



Channel 118 (5590MHz)




Channel 134 (5670MHz)



Channel 142 (5710MHz)



Channel 151 (5755MHz)

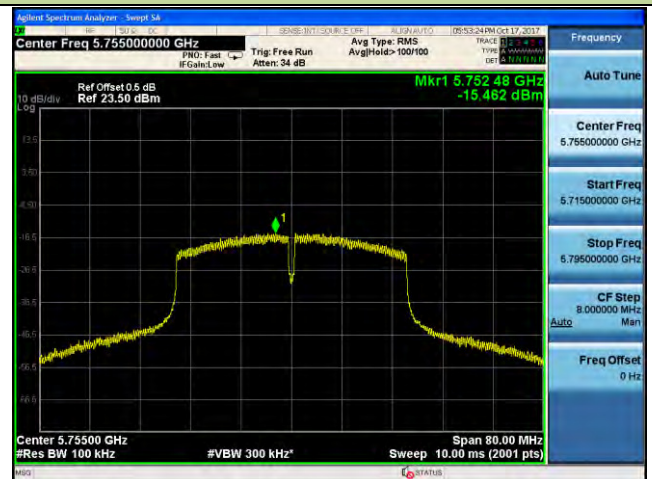

Channel 159 (5795MHz)



7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v01r03 – Section G

7.8.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120 kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Average Measurements above 1GHz (Method AD)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (Average)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace was averaged over at 100 sweeps

Quasi-Peak & Average Measurements below 30MHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 200Hz for 9kHz to 150kHz frequency; RBW = 9kHz for 0.15MHz to 30MHz frequency
4. Detector = CISPR quasi-peak or power average (Average)
5. Sweep time = auto couple
6. Trace was allowed to stabilize

7.8.4. Test Setup


9kHz ~ 30MHz Test Setup:

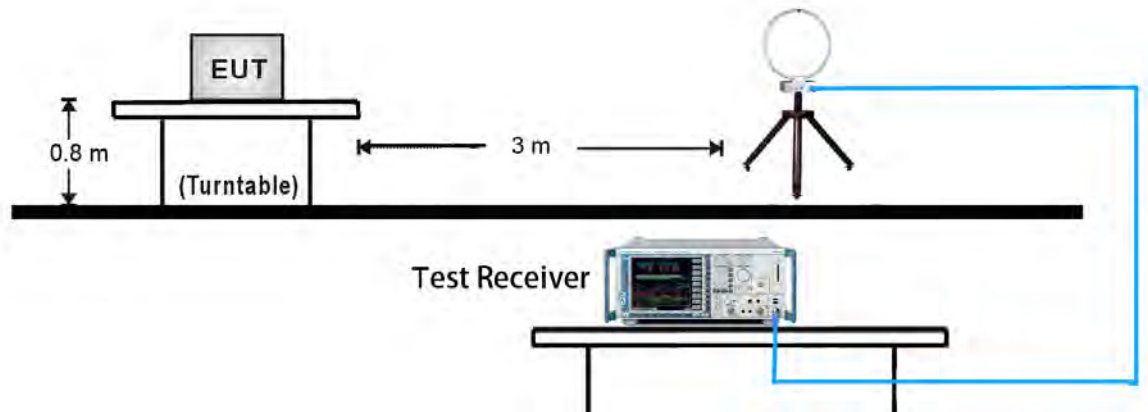


30MHz ~ 1GHz Test Setup:

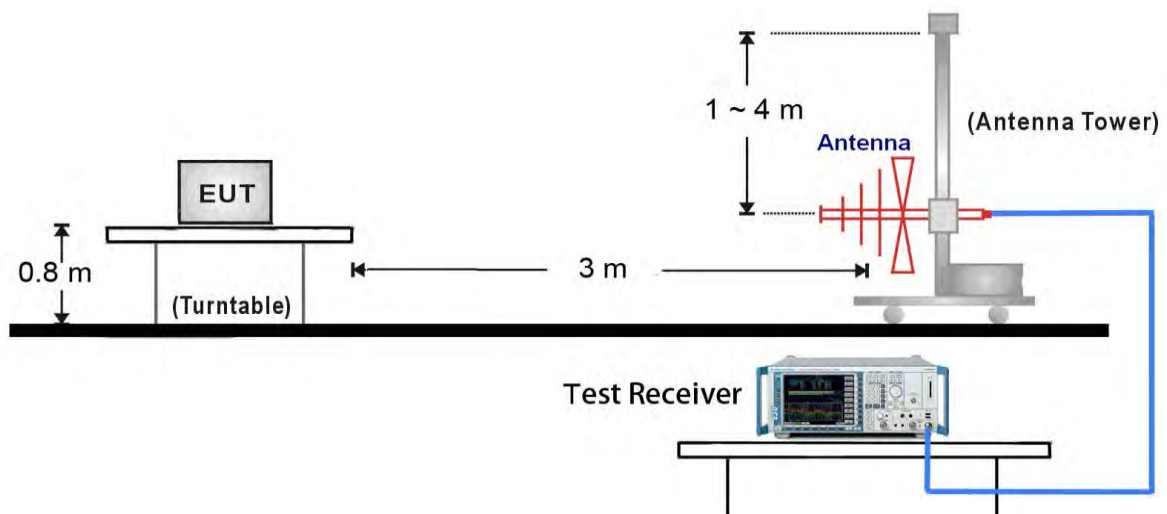

1GHz ~18GHz Test Setup:

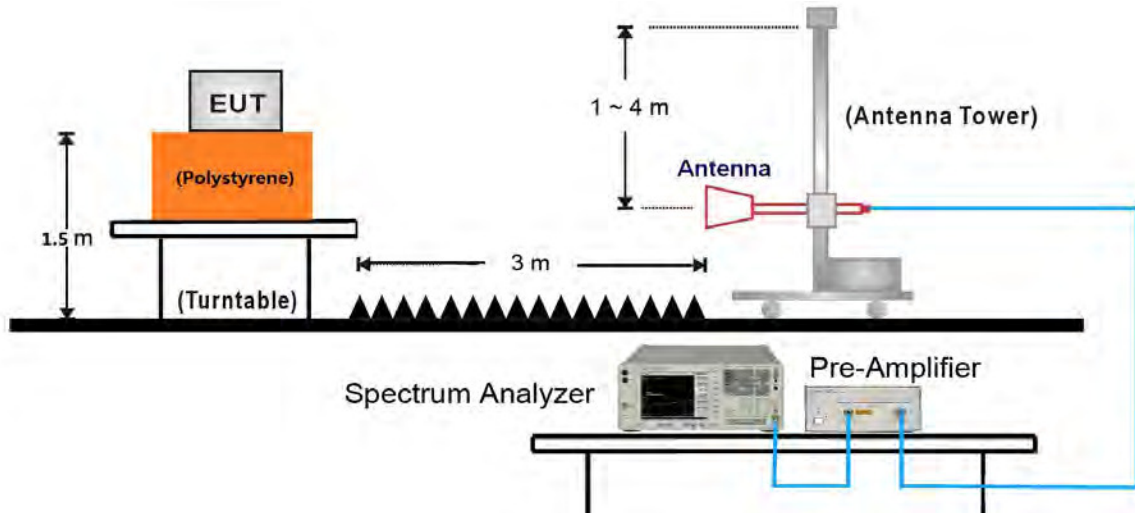


18GHz ~40GHz Test Setup:

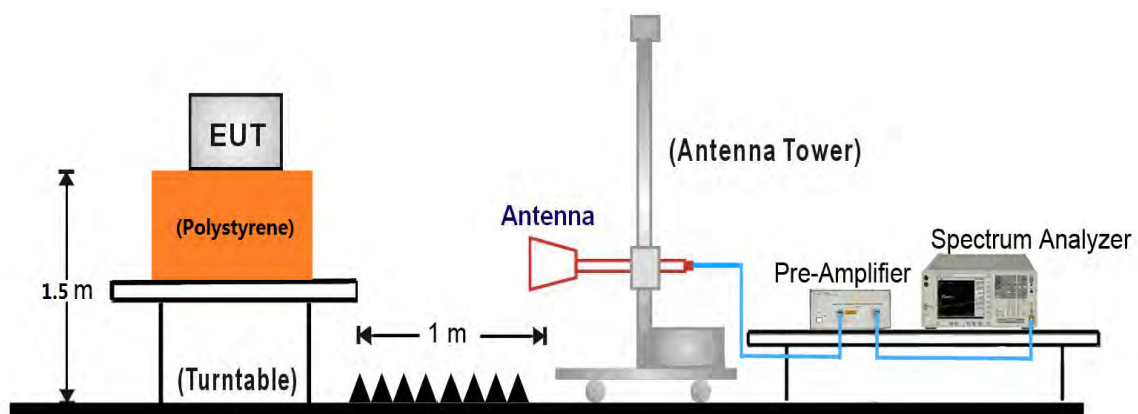

7.8.5. Test Result

EUT	Handheld terminal	Test Date	2017/10/16
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2_CH44	Test Voltage	AC 120V/60Hz

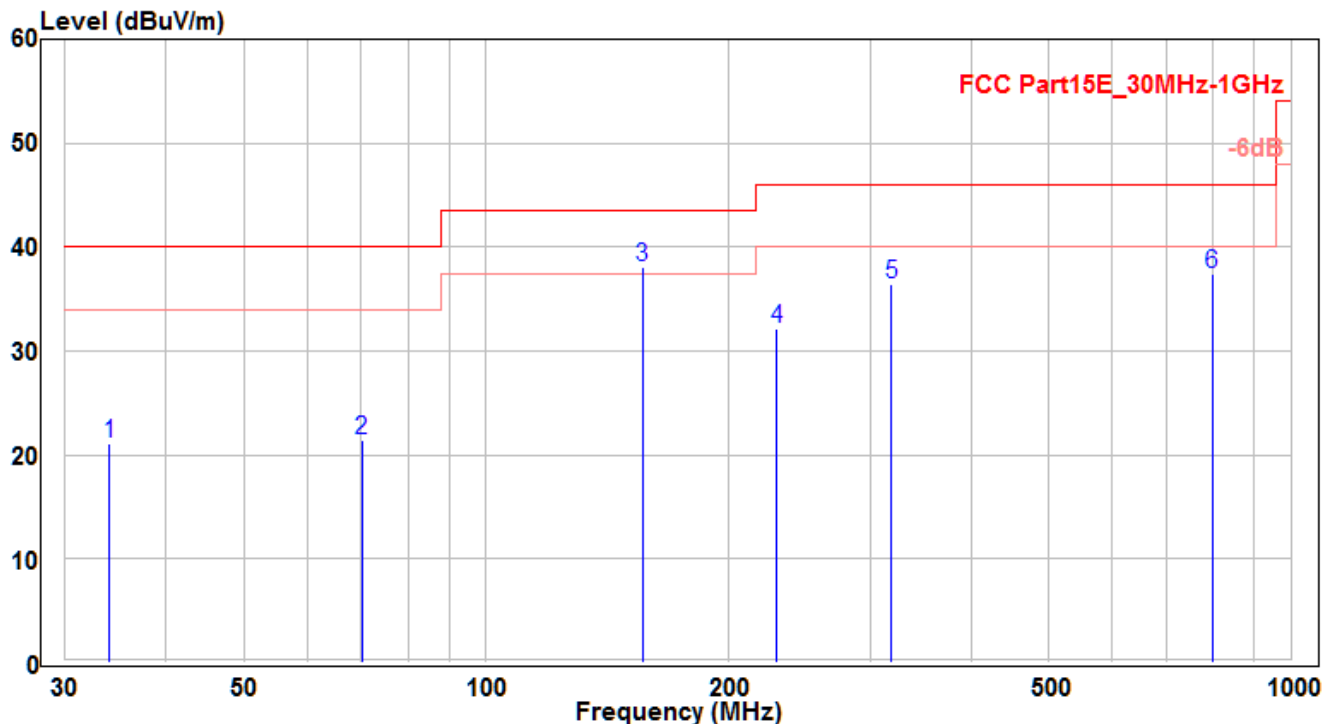


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	34.062	2.4	18.73	21.13	-18.87	40	150	300	QP
2	70.164	5.06	16.43	21.49	-18.51	40	160	45	QP
3	* 156.403	22.03	16.09	38.12	-5.38	43.5	115	20	QP
4	229.487	12.53	19.63	32.16	-13.84	46	170	-40	QP
5	318.666	14.17	22.2	36.37	-9.63	46	195	70	QP
6	799.271	6.87	30.6	37.47	-8.53	46	100	400	QP

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °
5. Other channel/mode was also verified. The test results shown represent the worst case emissions °
6. No emission found between lowest internal used/generated frequency to 30MHz °

EUT	Handheld terminal	Test Date	2017/10/16
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2_CH44	Test Voltage	AC 120V/60Hz

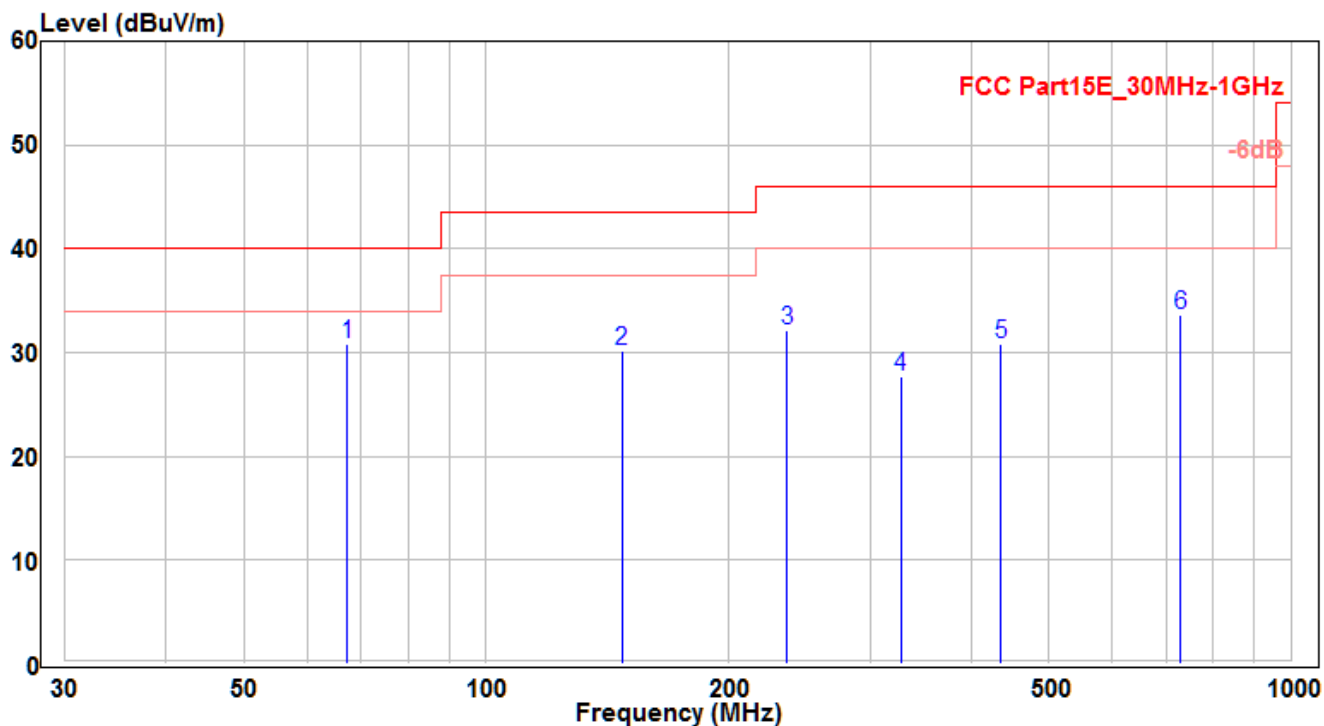


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	67.193	13.5	17.4	30.9	-9.1	40	100	400	QP
2		147.613	14.27	15.91	30.18	-13.32	43.5	190	360	QP
3		236.762	12.07	20.03	32.1	-13.9	46	130	250	QP
4		327.426	5.21	22.57	27.78	-18.22	46	175	140	QP
5		436.218	6.08	24.83	30.91	-15.09	46	195	380	QP
6		730.037	3.69	29.95	33.64	-12.36	46	145	-40	QP

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °
- Other channel/mode was also verified. The test results shown represent the worst case emissions °
- No emission found between lowest internal used/generated frequency to 30MHz °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH36	Test Voltage	AC 120V/60Hz

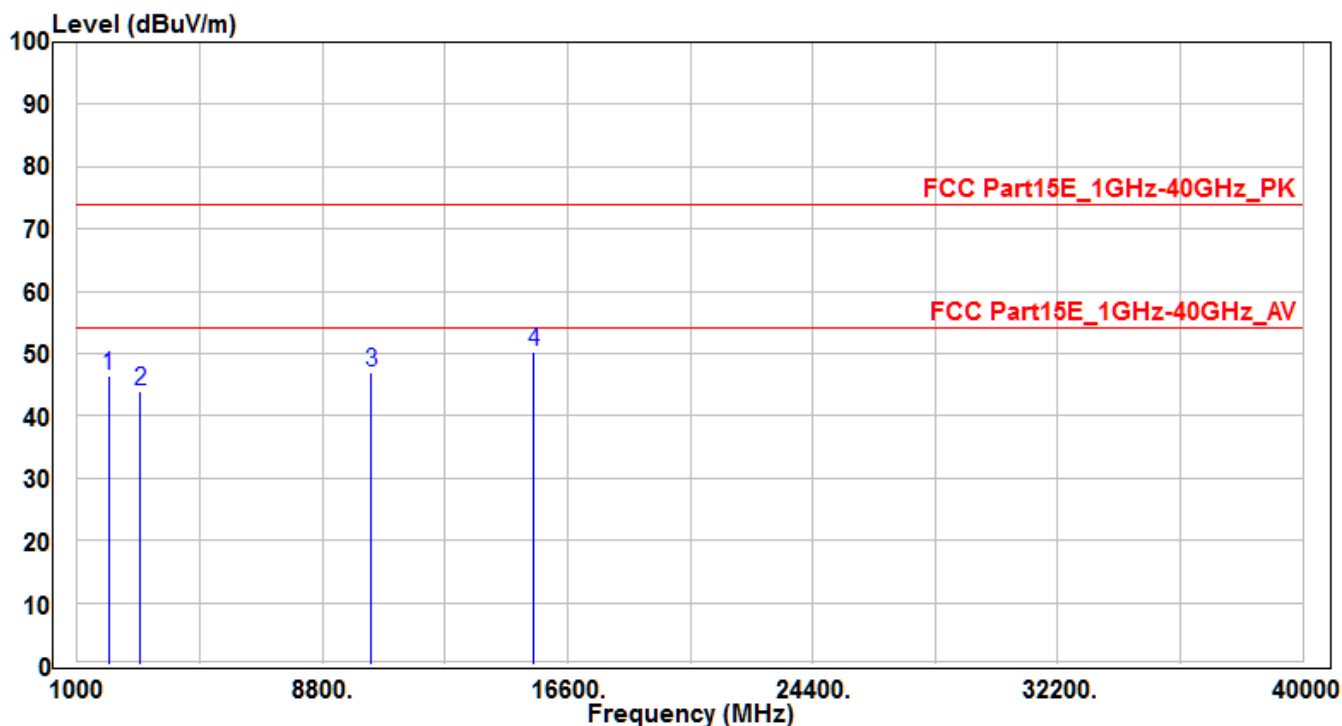


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1993.95	51	-4.64	46.36	-27.64	74	150	400	Peak
2	2999.23	46.94	-2.93	44.01	-29.99	74	150	400	Peak
3	10360	30.26	16.73	46.99	-27.01	74	150	400	Peak
4	* 15540	29.31	21.01	50.32	-23.68	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH36	Test Voltage	AC 120V/60Hz

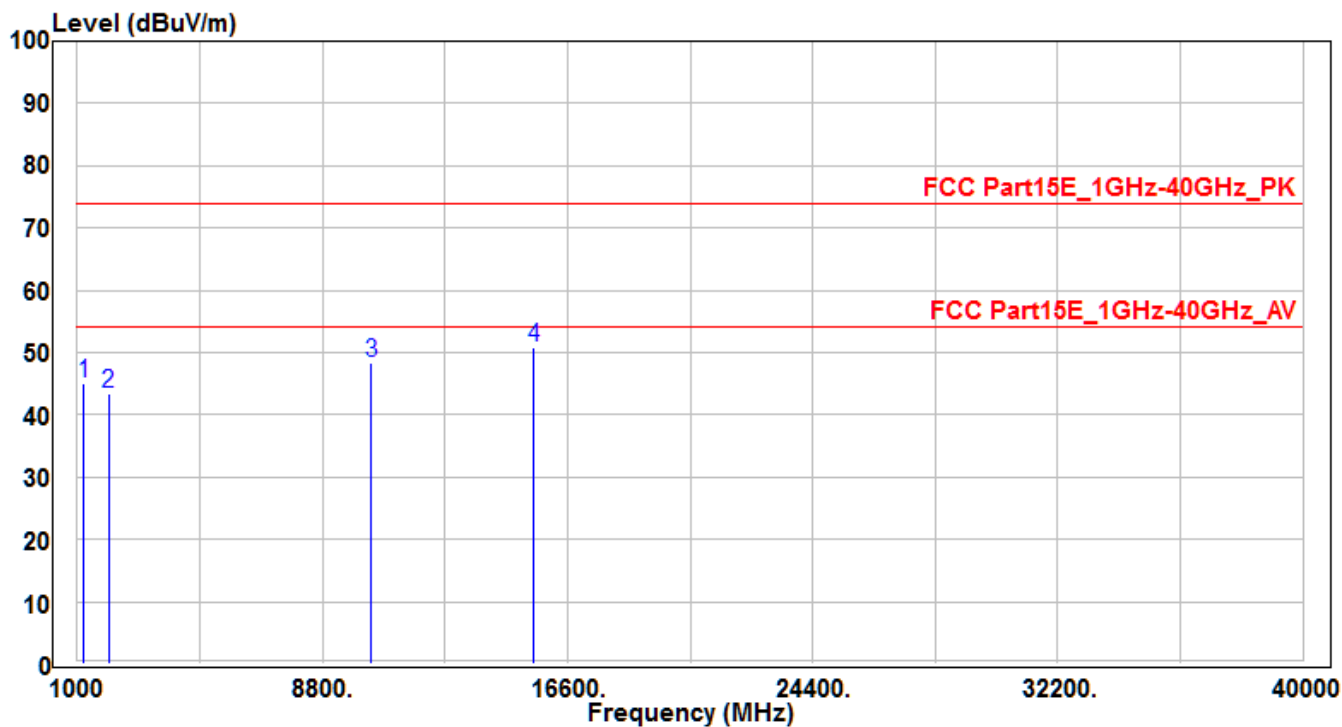


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1198.98	52.26	-7.06	45.2	-28.8	74	150	400	Peak
2	1993.95	47.98	-4.64	43.34	-30.66	74	150	400	Peak
3	10360	31.54	16.73	48.27	-25.73	74	150	400	Peak
4	15540	29.94	21.01	50.95	-23.05	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH44	Test Voltage	AC 120V/60Hz

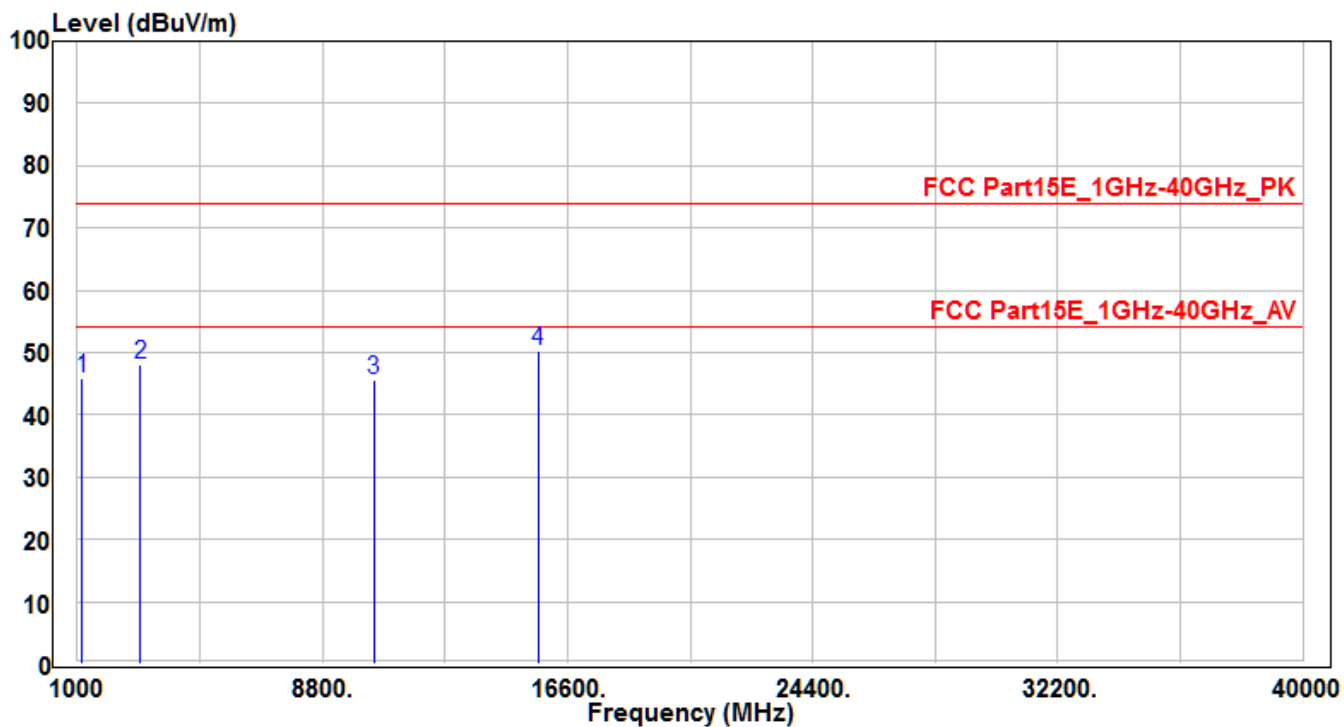


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1152.156	53.12	-7.18	45.94	-28.06	74	150	400	Peak
2		2996.165	51.1	-2.92	48.18	-25.82	74	150	400	Peak
3		10440	28.58	17.04	45.62	-28.38	74	150	400	Peak
4	*	15660	29.55	20.84	50.39	-23.61	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH44	Test Voltage	AC 120V/60Hz

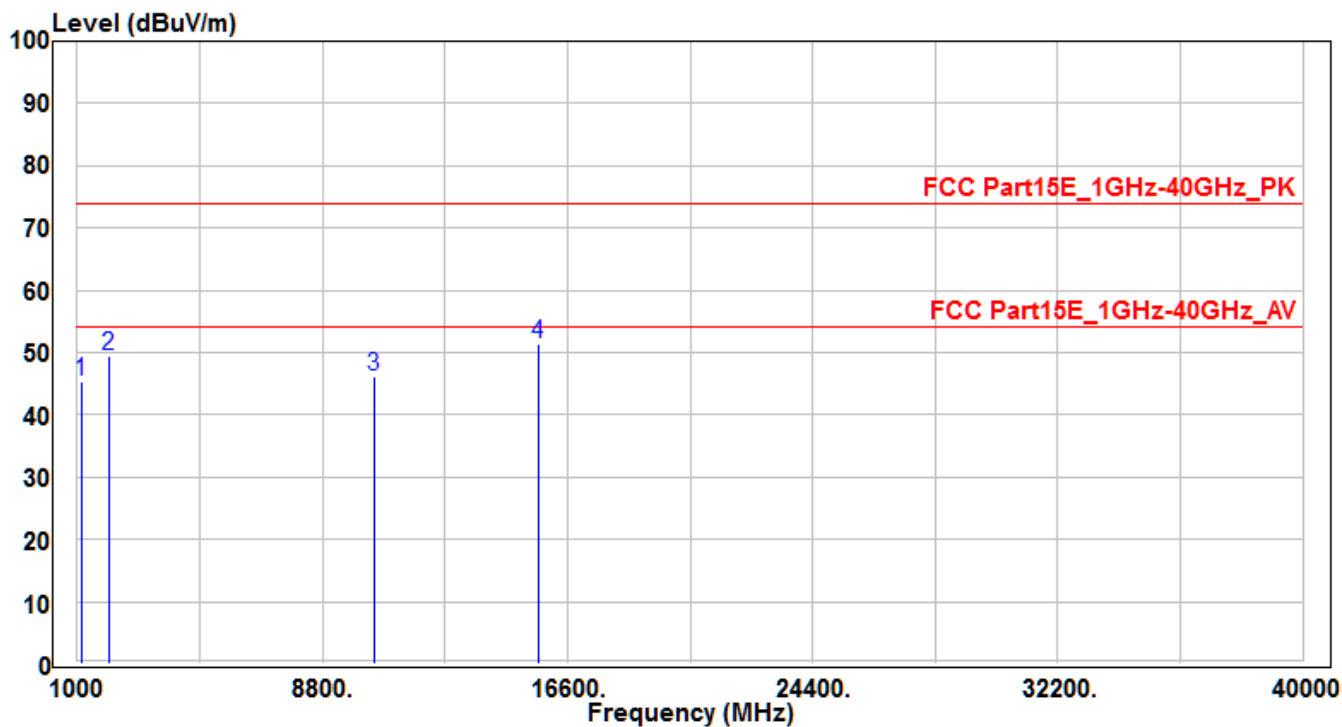


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1134.516	52.52	-7.23	45.29	-28.71	74	150	400	Peak
2	1995.156	54	-4.64	49.36	-24.64	74	150	400	Peak
3	10440	29.18	17.04	46.22	-27.78	74	150	400	Peak
4	*	30.64	20.84	51.48	-22.52	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dB μ V/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH48	Test Voltage	AC 120V/60Hz

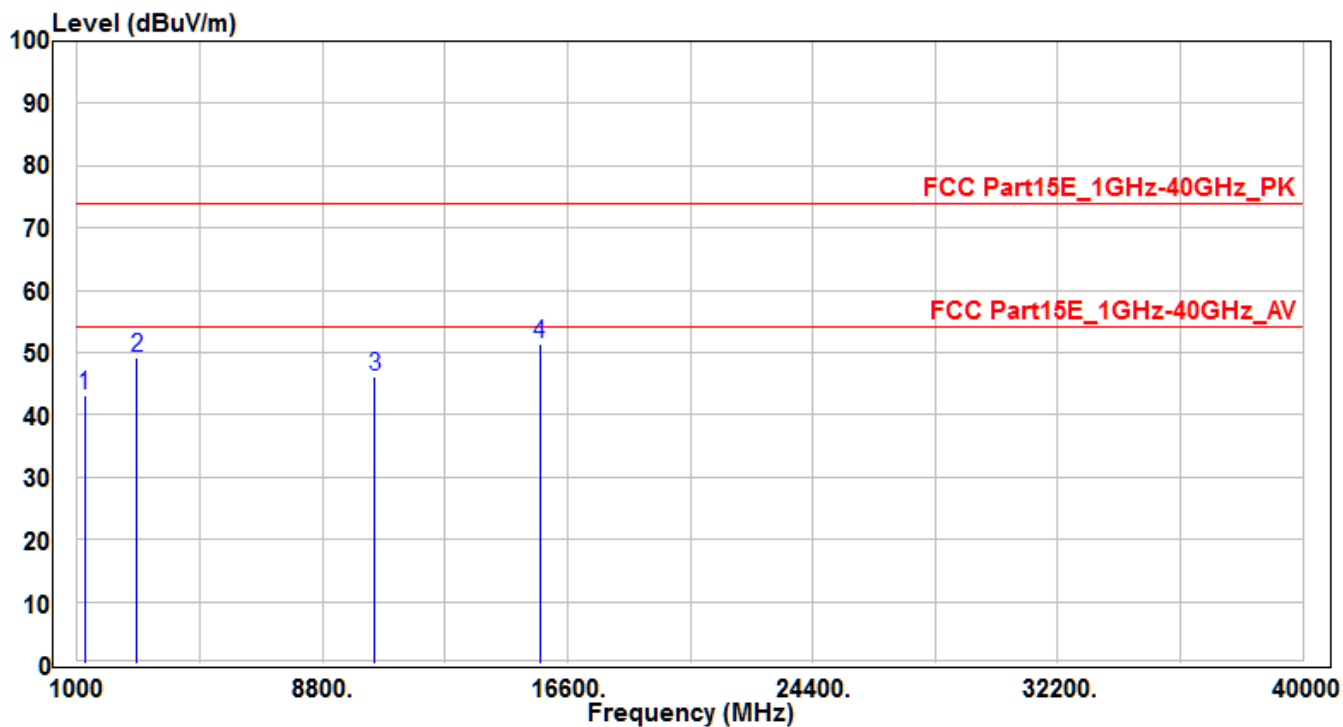


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1234.15	50.24	-6.98	43.26	-30.74	74	150	400	Peak
2	2885.132	52	-2.72	49.28	-24.72	74	150	400	Peak
3	10480	28.96	17.2	46.16	-27.84	74	150	400	Peak
4	*	30.6	20.77	51.37	-22.63	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH48	Test Voltage	AC 120V/60Hz

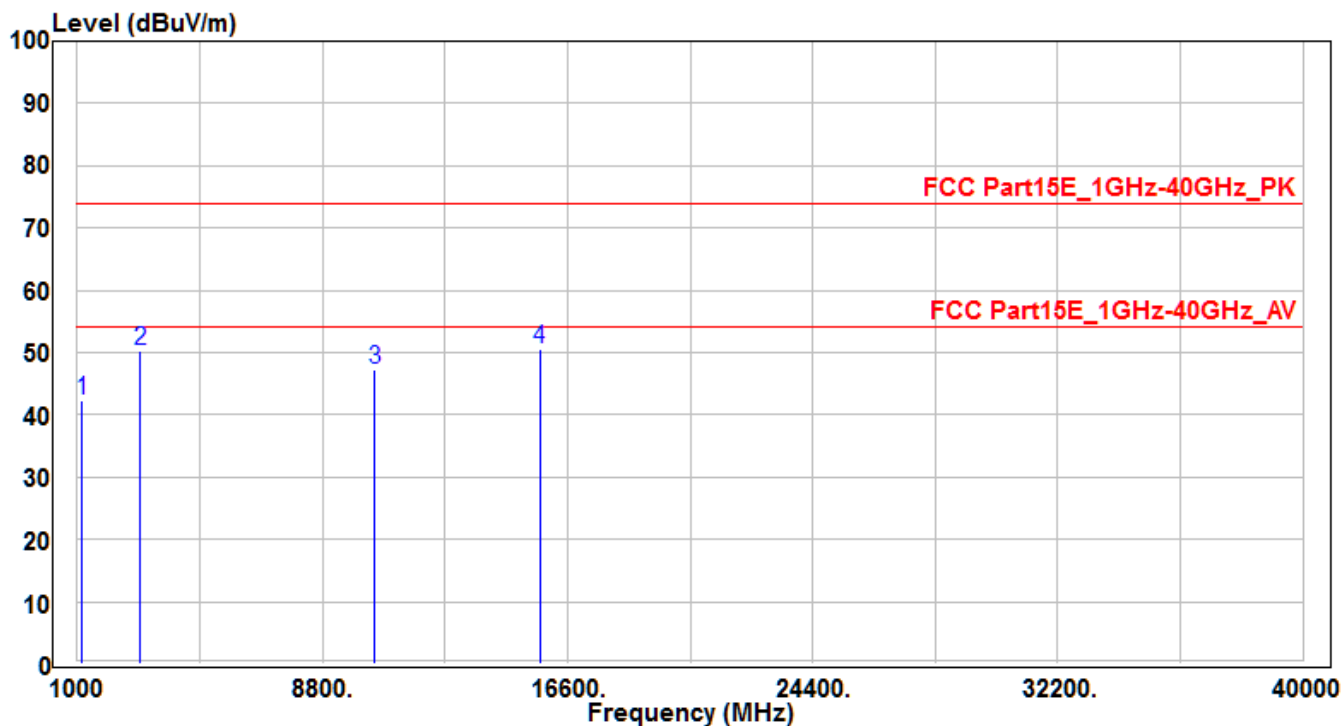


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1145	49.62	-7.19	42.43	-31.57	74	150	400	Peak
2		2996.54	53.2	-2.92	50.28	-23.72	74	150	400	Peak
3		10480	29.96	17.2	47.16	-26.84	74	150	400	Peak
4	*	15720	29.9	20.77	50.67	-23.33	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH52	Test Voltage	AC 120V/60Hz

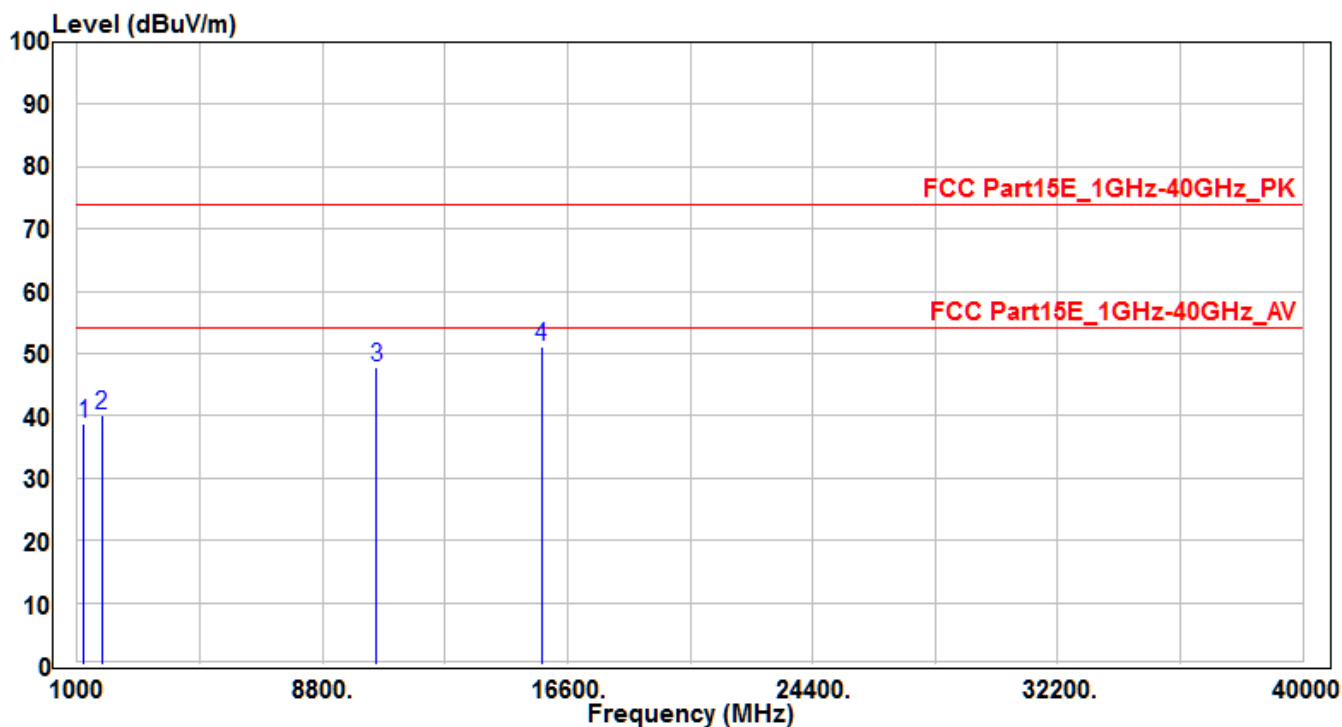


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1196.95	45.7	-7.07	38.63	-35.37	74	150	400	Peak
2	1791.13	45.58	-5.33	40.25	-33.75	74	150	400	Peak
3	10520	30.61	17.32	47.93	-26.07	74	150	400	Peak
4	* 15780	30.38	20.69	51.07	-22.93	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH52	Test Voltage	AC 120V/60Hz

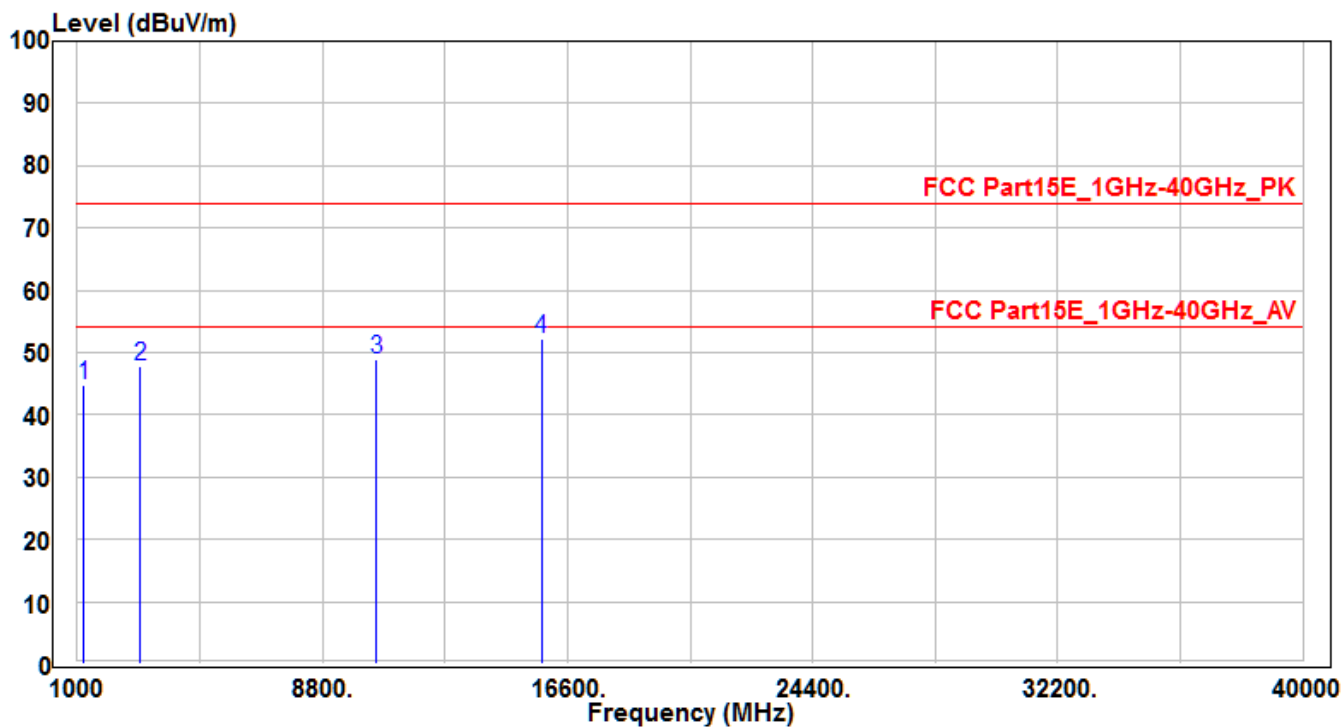


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1196.63	51.87	-7.07	44.8	-29.2	74	150	400	Peak
2		2997.52	50.65	-2.93	47.72	-26.28	74	150	400	Peak
3		10520	31.63	17.32	48.95	-25.05	74	150	400	Peak
4	*	15780	31.55	20.69	52.24	-21.76	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH60	Test Voltage	AC 120V/60Hz

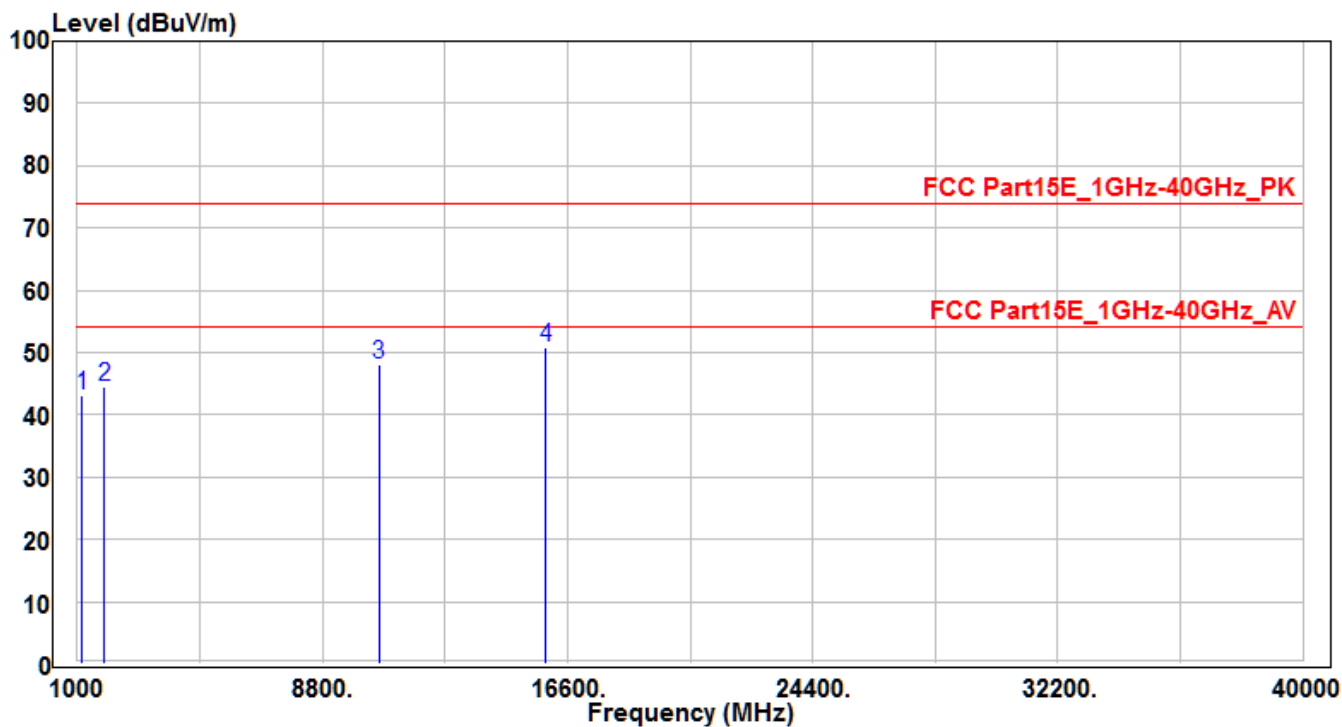


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1152.63	50.2	-7.18	43.02	-30.98	74	150	400	Peak
2		1854.75	49.6	-5.12	44.48	-29.52	74	150	400	Peak
3		10600	30.65	17.53	48.18	-25.82	74	150	400	Peak
4	*	15900	30.39	20.54	50.93	-23.07	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH60	Test Voltage	AC 120V/60Hz

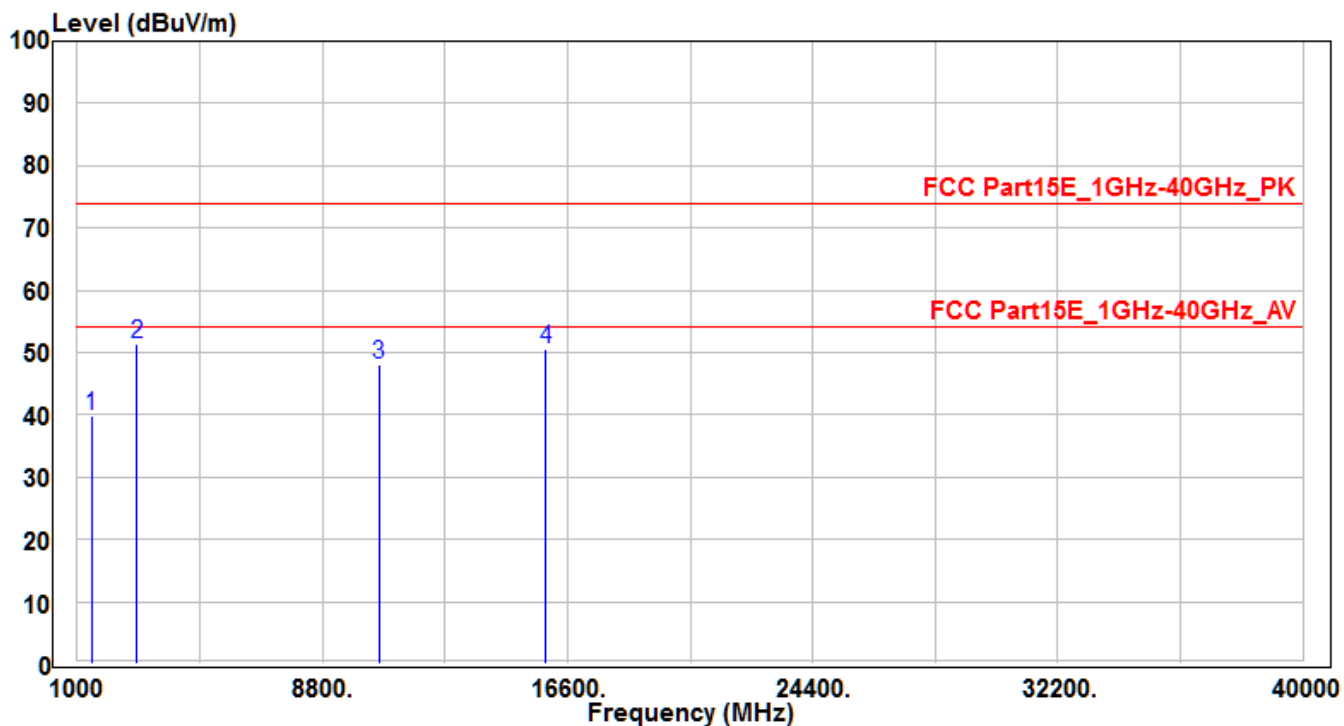


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1453.69	46.33	-6.45	39.88	-34.12	74	150	400	Peak
2	2887	54.1	-2.72	51.38	-22.62	74	150	400	Peak
3	10600	30.6	17.53	48.13	-25.87	74	150	400	Peak
4	*	15900	29.92	20.54	50.46	-23.54	74	150	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH64	Test Voltage	AC 120V/60Hz

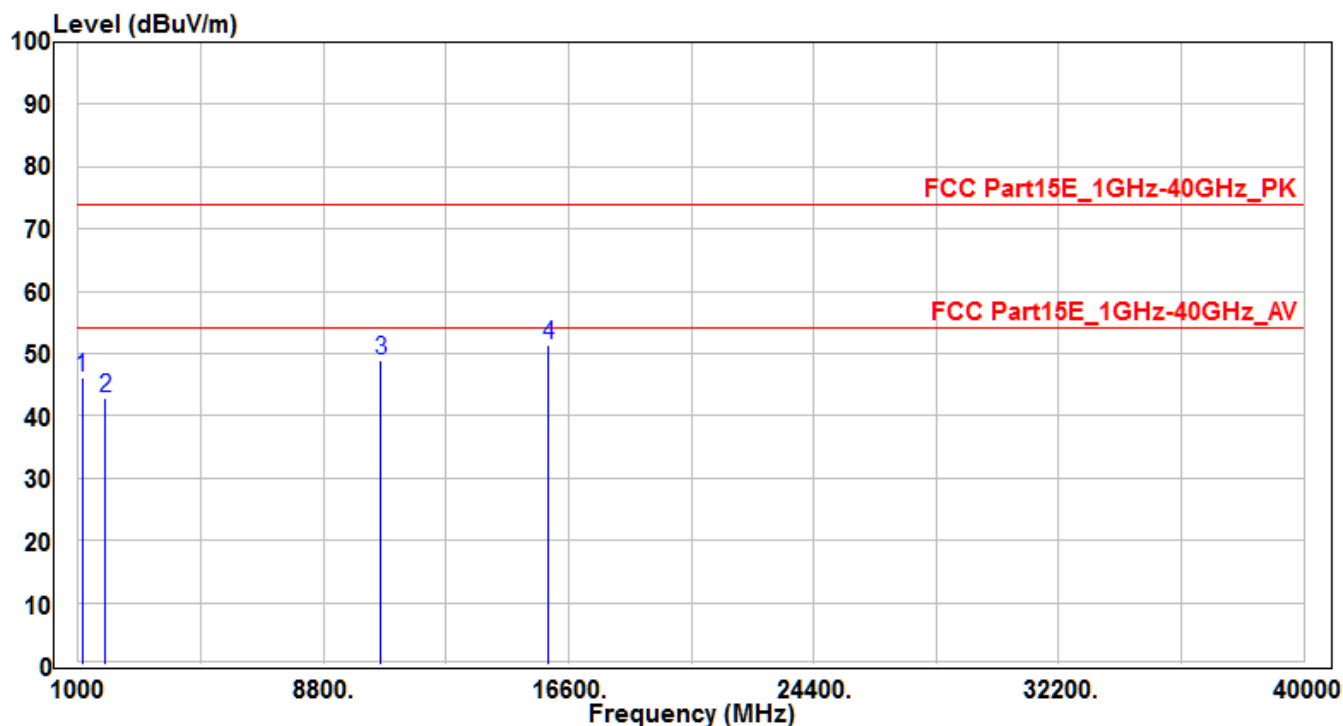


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1135.62	53.33	-7.22	46.11	-27.89	74	150	400	Peak
2	1855.6	47.89	-5.12	42.77	-31.23	74	150	400	Peak
3	10640	31.22	17.64	48.86	-25.14	74	150	400	Peak
4	* 15960	31.05	20.45	51.5	-22.5	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
- The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH64	Test Voltage	AC 120V/60Hz

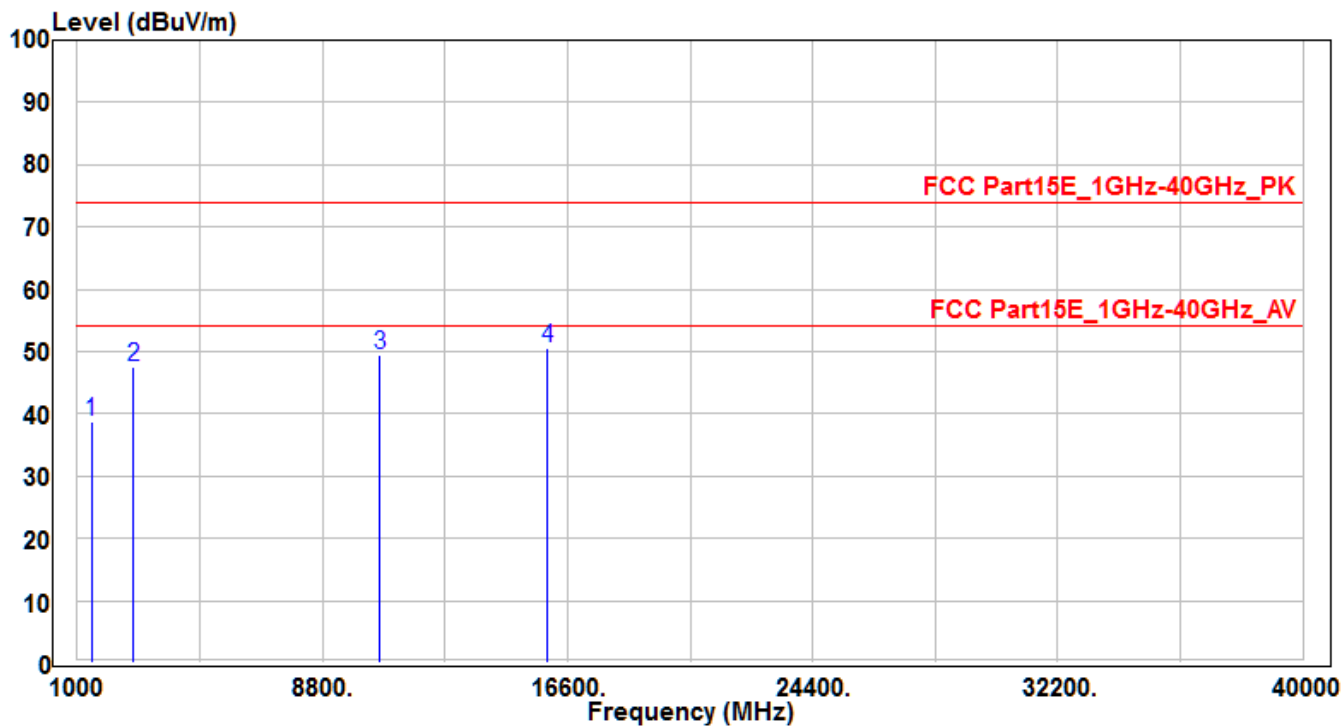


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1463.2	45.19	-6.41	38.78	-35.22	74	150	400	Peak
2		2785	50.11	-2.53	47.58	-26.42	74	150	400	Peak
3		10640	31.78	17.64	49.42	-24.58	74	150	400	Peak
4	*	15960	30.02	20.45	50.47	-23.53	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH100	Test Voltage	AC 120V/60Hz

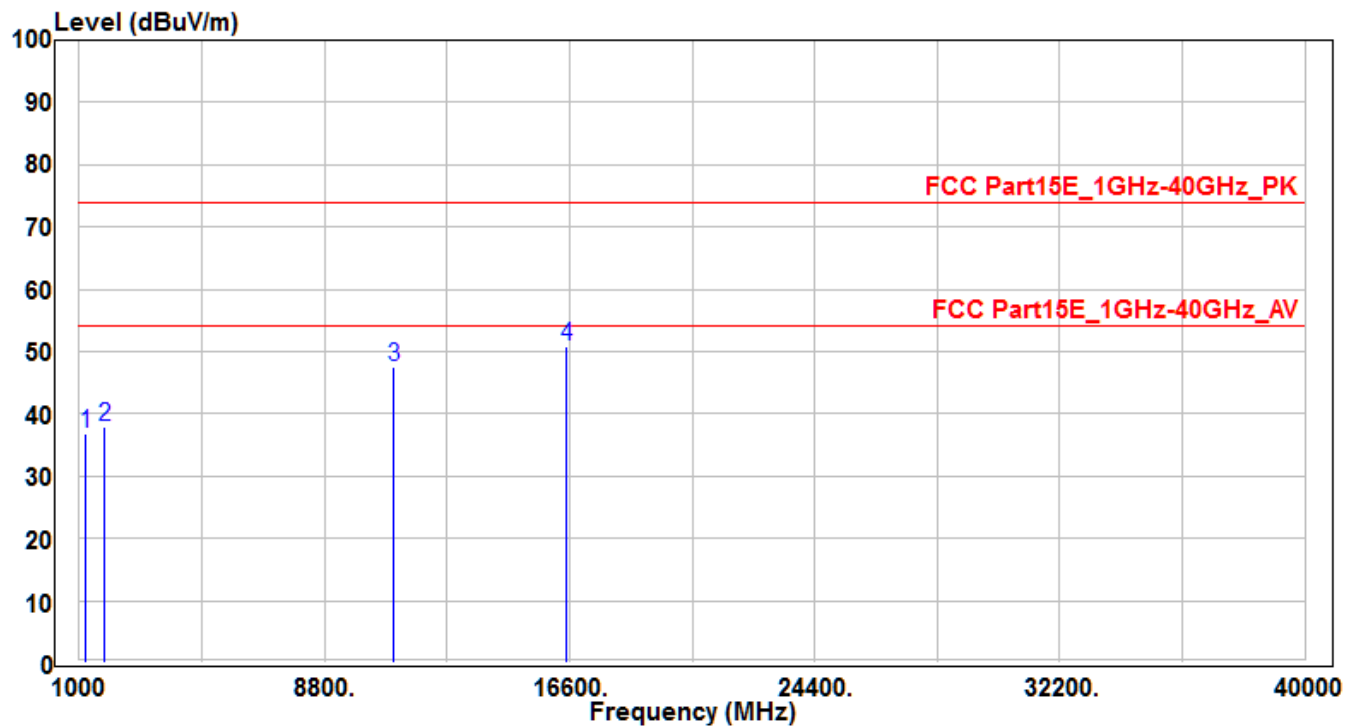


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1197.57	43.78	-7.07	36.71	-37.29	74	150	400	Peak
2		1797.87	43.21	-5.31	37.9	-36.1	74	150	400	Peak
3		11000	28.88	18.58	47.46	-26.54	74	150	400	Peak
4	*	16500	29.98	20.76	50.74	-23.26	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH100	Test Voltage	AC 120V/60Hz

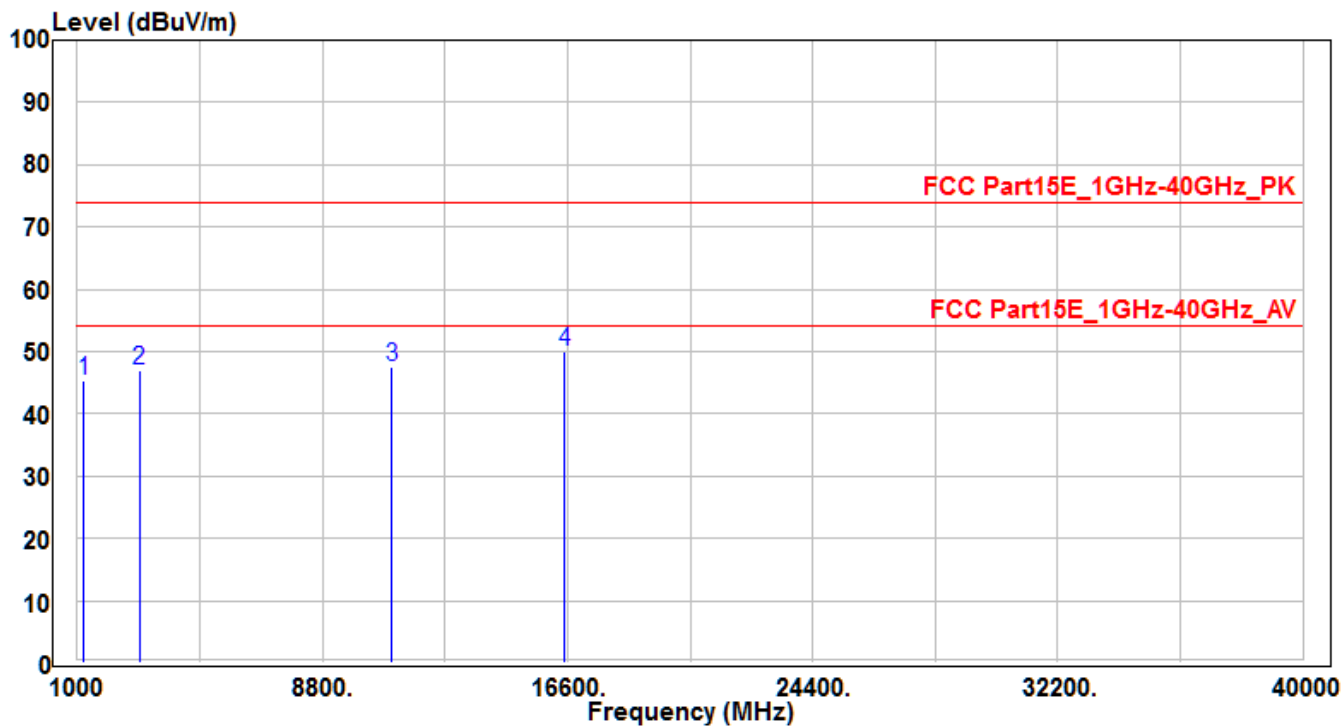


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1198.35	52.28	-7.06	45.22	-28.78	74	150	400	Peak
2		2989.86	49.96	-2.91	47.05	-26.95	74	150	400	Peak
3		11000	28.89	18.58	47.47	-26.53	74	150	400	Peak
4	*	16500	29.16	20.76	49.92	-24.08	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH116	Test Voltage	AC 120V/60Hz

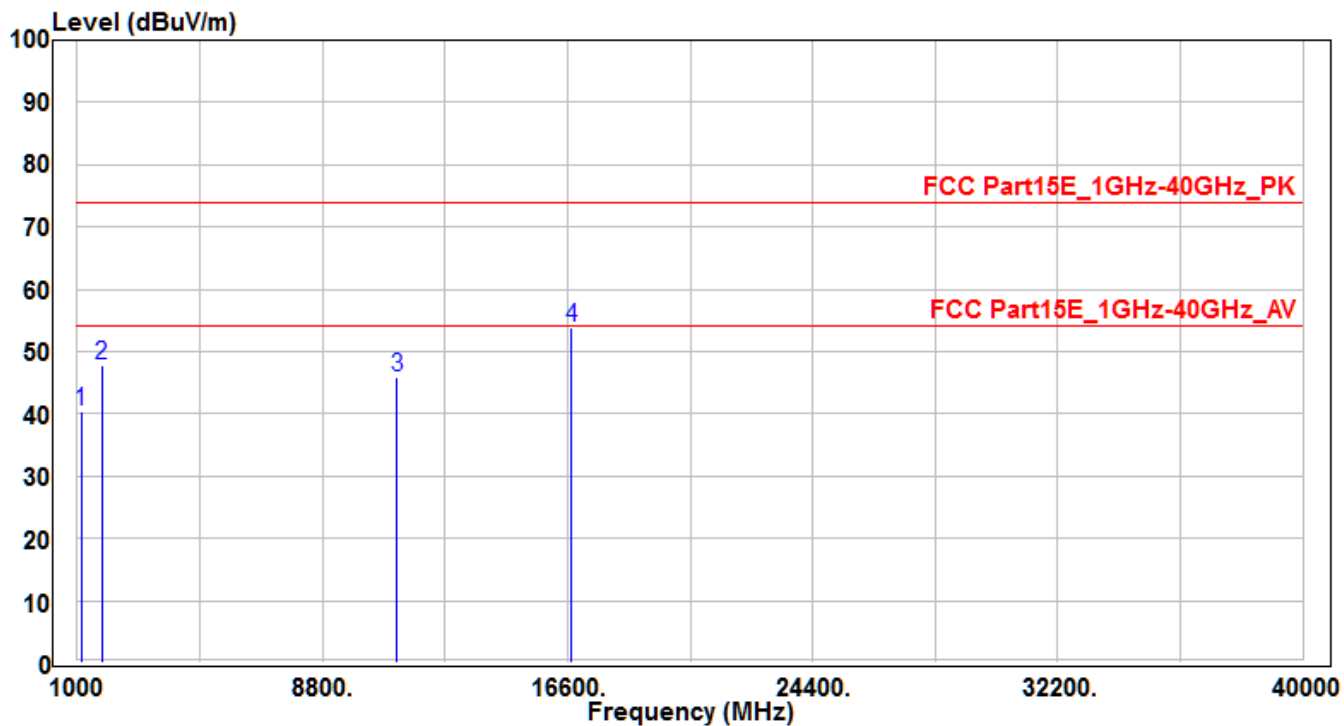


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1134.52	47.52	-7.23	40.29	-33.71	74	150	400	Peak
2	1785.63	53.2	-5.35	47.85	-26.15	74	150	400	Peak
3	11160	27.42	18.51	45.93	-28.07	74	150	400	Peak
4	* 16740	31	22.94	53.94	-20.06	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH116	Test Voltage	AC 120V/60Hz

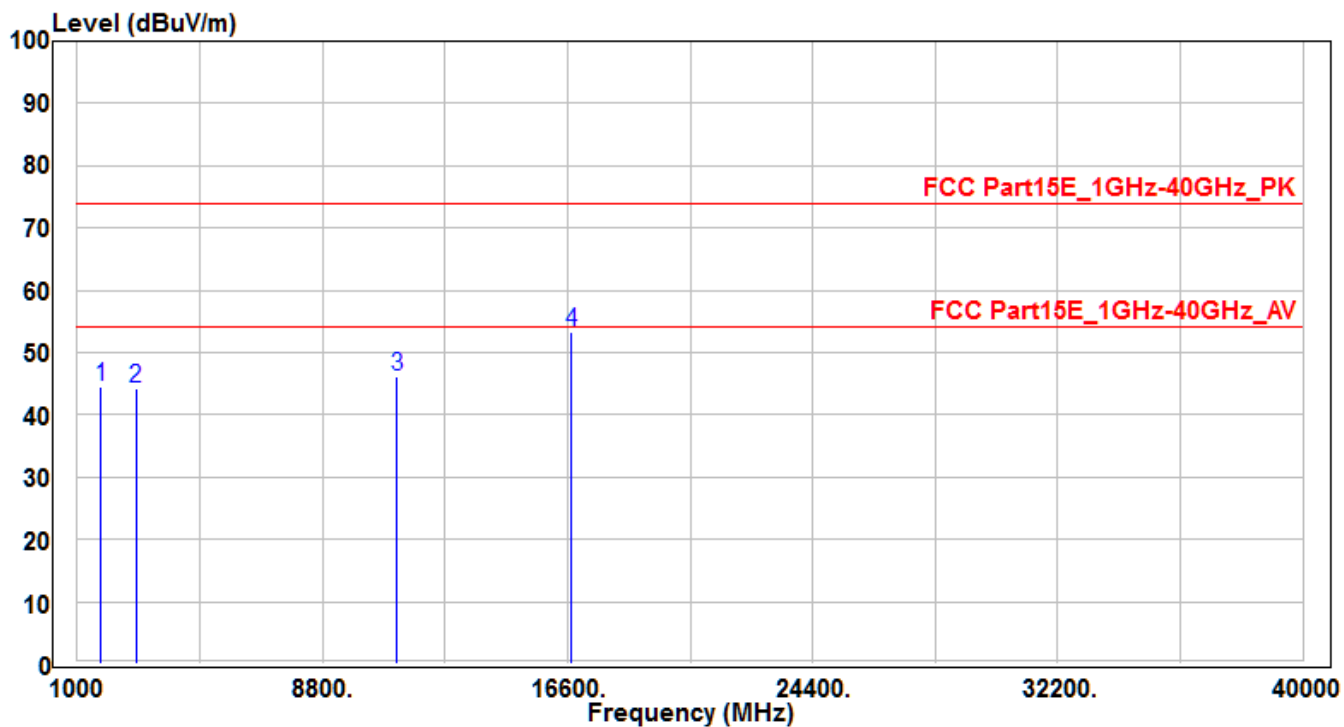


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1754.21	49.85	-5.46	44.39	-29.61	74	150	400	Peak
2		2864	46.85	-2.68	44.17	-29.83	74	150	400	Peak
3		11160	27.69	18.51	46.2	-27.8	74	150	400	Peak
4	*	16740	30.44	22.94	53.38	-20.62	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH120	Test Voltage	AC 120V/60Hz

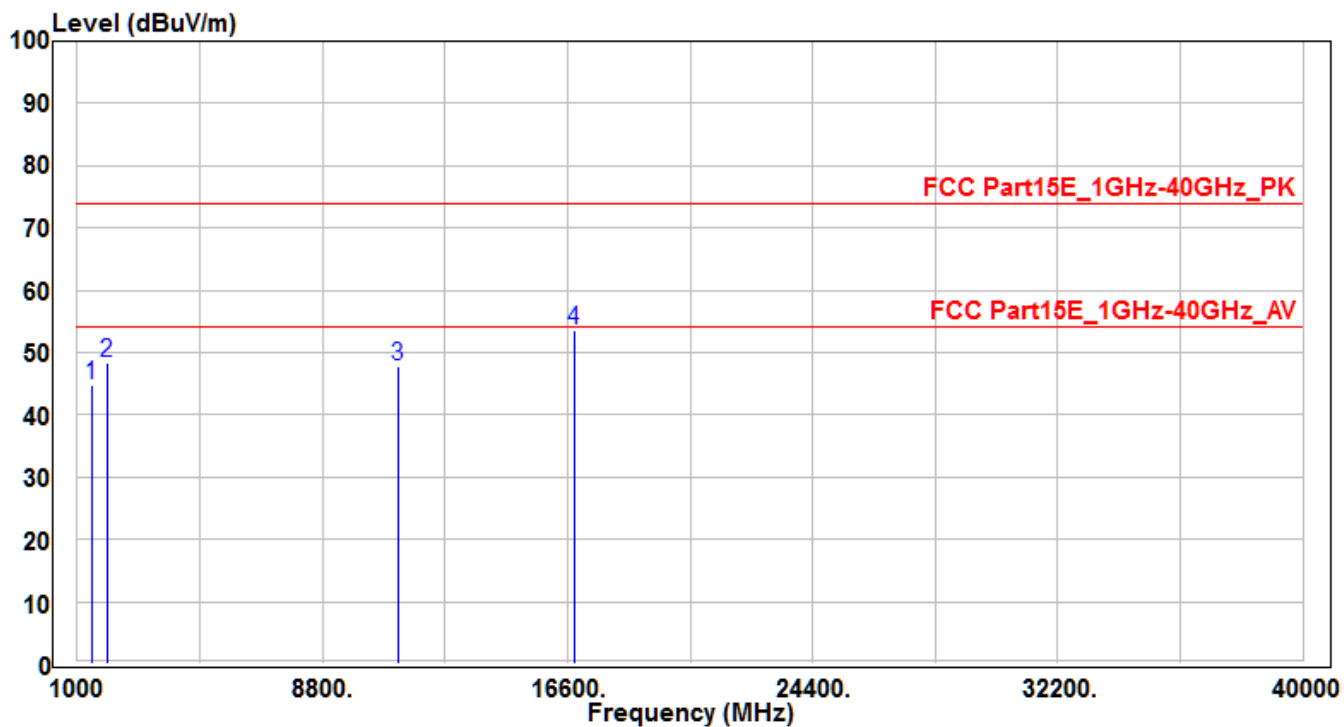


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1452.22	51.2	-6.45	44.75	-29.25	74	150	400	Peak
2		1956.98	53.01	-4.76	48.25	-25.75	74	150	400	Peak
3		11200	29.21	18.49	47.7	-26.3	74	150	400	Peak
4	*	16800	30	23.49	53.49	-20.51	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dB μ V/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH120	Test Voltage	AC 120V/60Hz

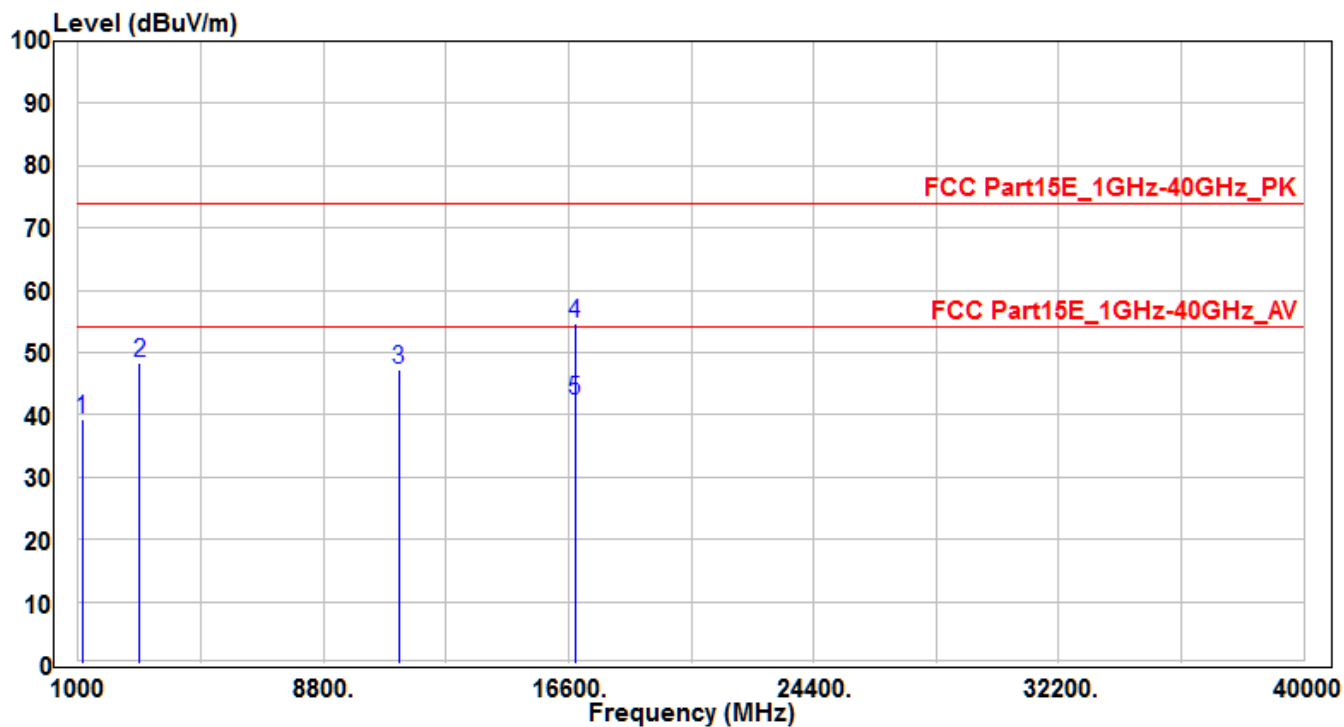


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1127.9	46.52	-7.24	39.28	-34.72	74	150	400	Peak
2		2966.6	51.2	-2.87	48.33	-25.67	74	150	400	Peak
3		11200	28.87	18.49	47.36	-26.64	74	150	400	Peak
4	*	16800	31.14	23.49	54.63	-19.37	74	200	-30	Peak
5	*	16800	18.74	23.49	42.23	-11.77	54	200	-30	Average

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dB μ V/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH140	Test Voltage	AC 120V/60Hz

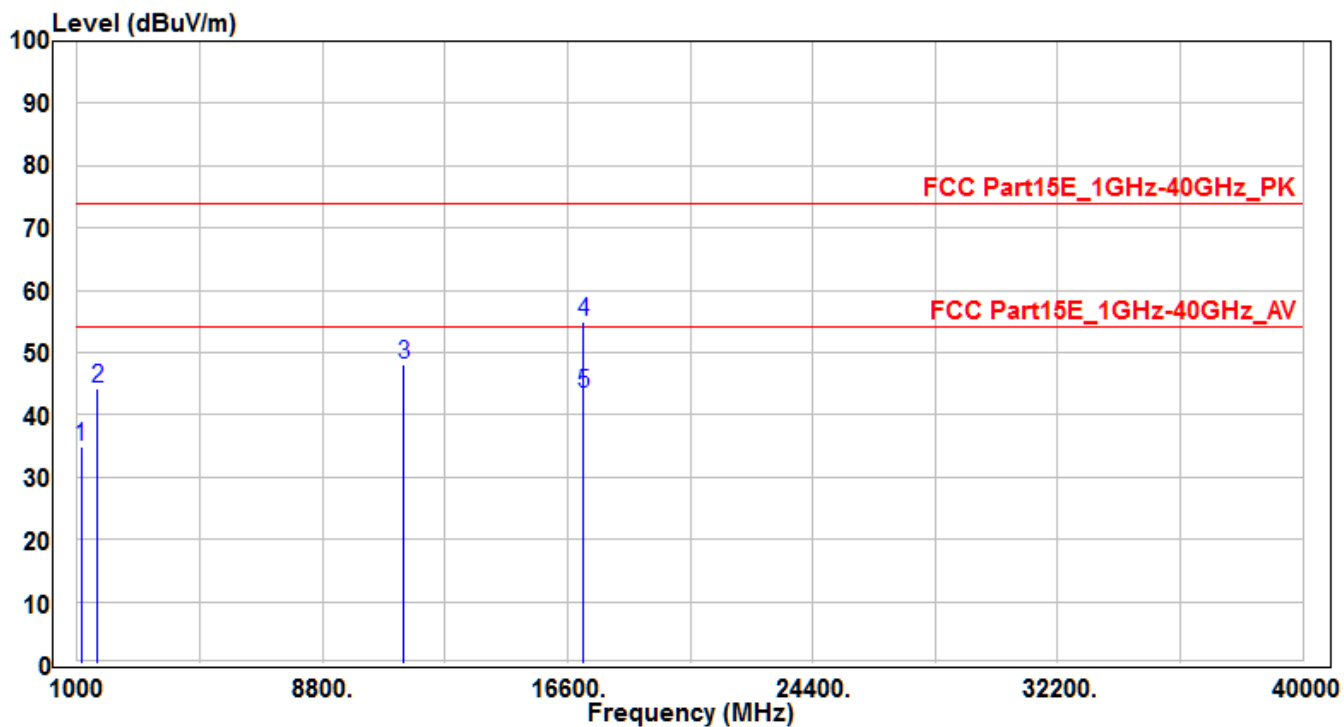


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1136.54	42.1	-7.22	34.88	-39.12	74	150	400	Peak
2		1633.89	50	-5.88	44.12	-29.88	74	150	400	Peak
3		11400	29.69	18.4	48.09	-25.91	74	150	400	Peak
4	*	17100	28.93	26.02	54.95	-19.05	74	170	200	Peak
5	*	17100	17.52	26.02	43.54	-10.46	54	170	200	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH140	Test Voltage	AC 120V/60Hz

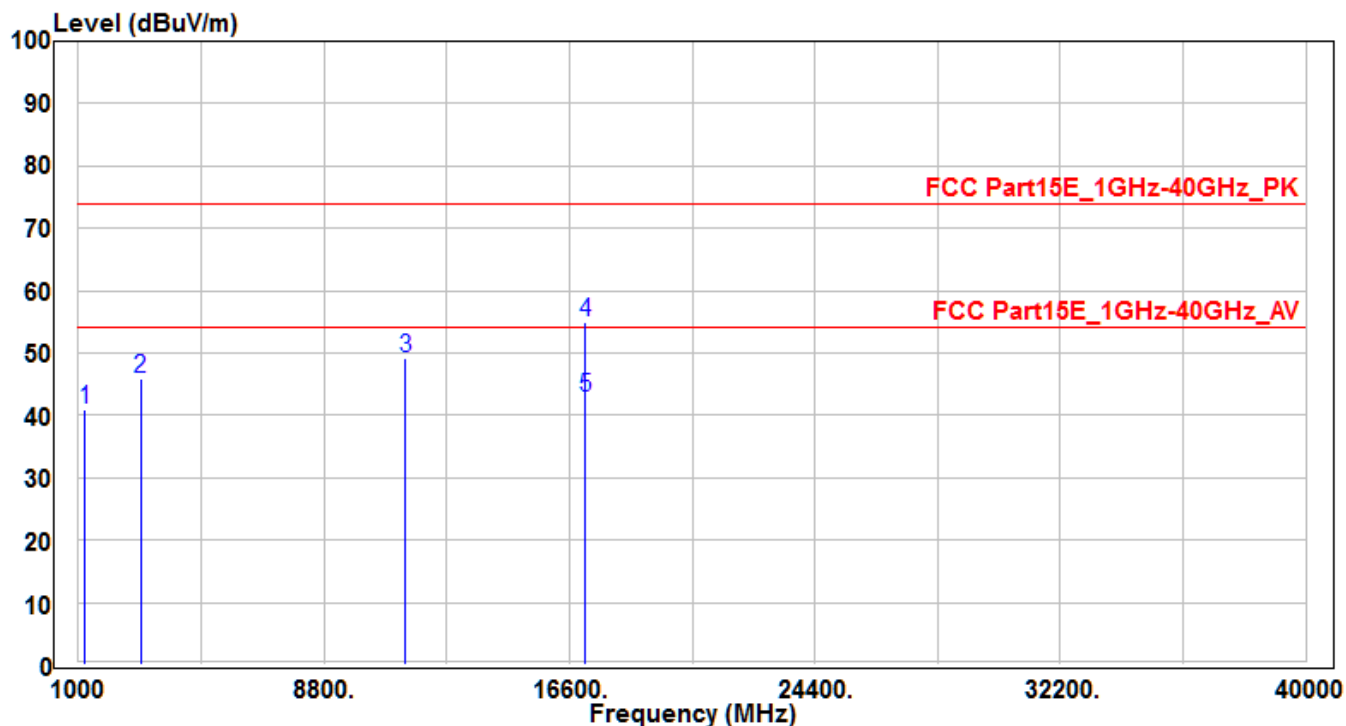


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1212	47.87	-7.03	40.84	-33.16	74	150	400	Peak
2		2987	48.77	-2.91	45.86	-28.14	74	150	400	Peak
3		11400	30.76	18.4	49.16	-24.84	74	150	400	Peak
4	*	17100	29.02	26.02	55.04	-18.96	74	170	380	Peak
5	*	17100	16.9	26.02	42.92	-11.08	54	170	380	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH144	Test Voltage	AC 120V/60Hz

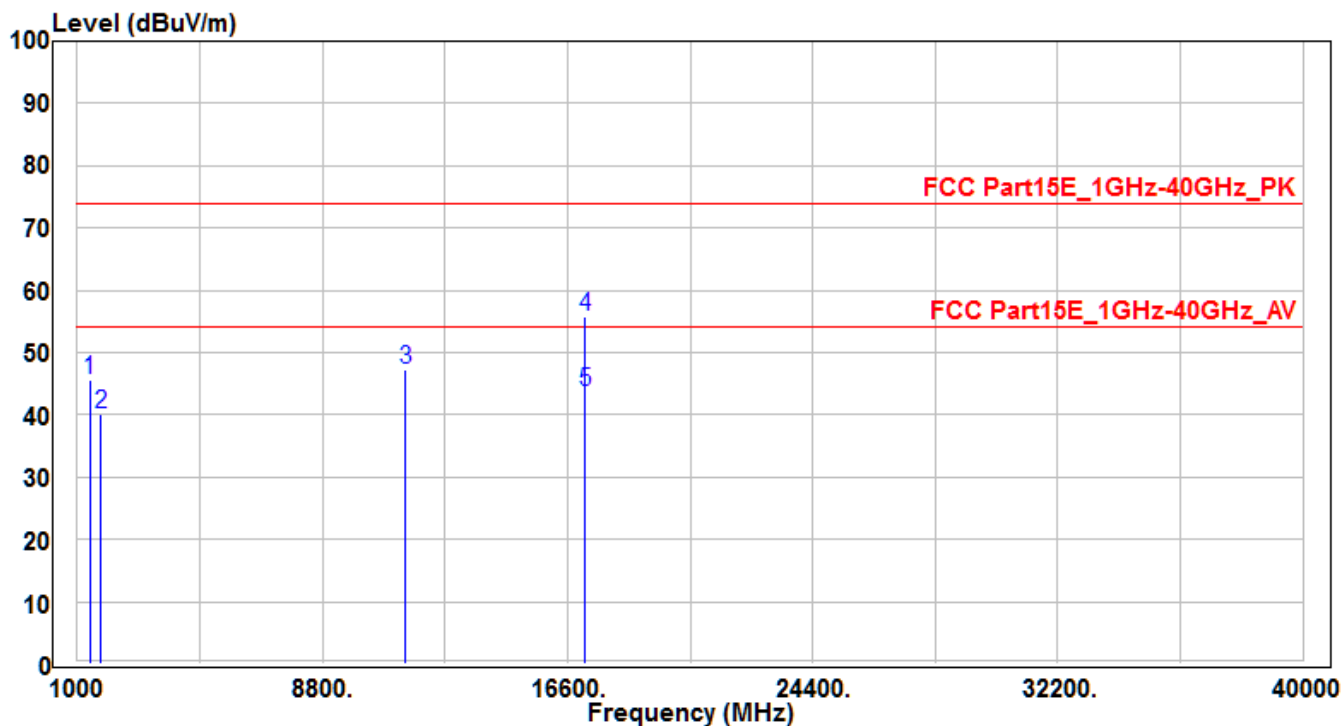


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1396.315	52.31	-6.58	45.73	-28.27	74	150	400	Peak
2		1758	45.7	-5.45	40.25	-33.75	74	150	400	Peak
3		11440	28.88	18.38	47.26	-26.74	74	150	400	Peak
4	*	17160	29.23	26.43	55.66	-18.34	74	180	300	Peak
5	*	17160	17.26	26.43	43.69	-10.31	54	180	300	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH144	Test Voltage	AC 120V/60Hz

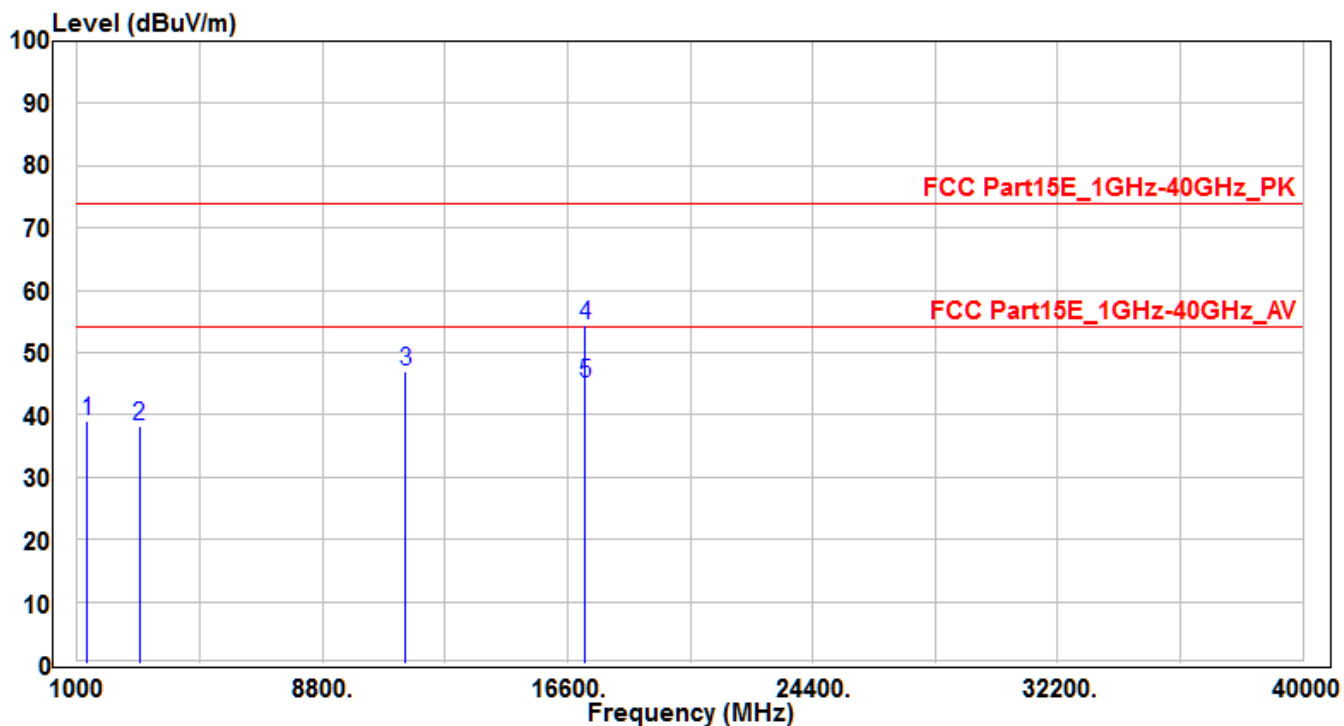


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1320.334	45.89	-6.77	39.12	-34.88	74	150	400	Peak
2		2988.56	41.1	-2.91	38.19	-35.81	74	150	400	Peak
3		11440	28.58	18.38	46.96	-27.04	74	150	400	Peak
4	*	17160	27.94	26.43	54.37	-19.63	74	200	380	Peak
5	*	17160	18.53	26.43	44.96	-9.04	54	200	380	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH149	Test Voltage	AC 120V/60Hz

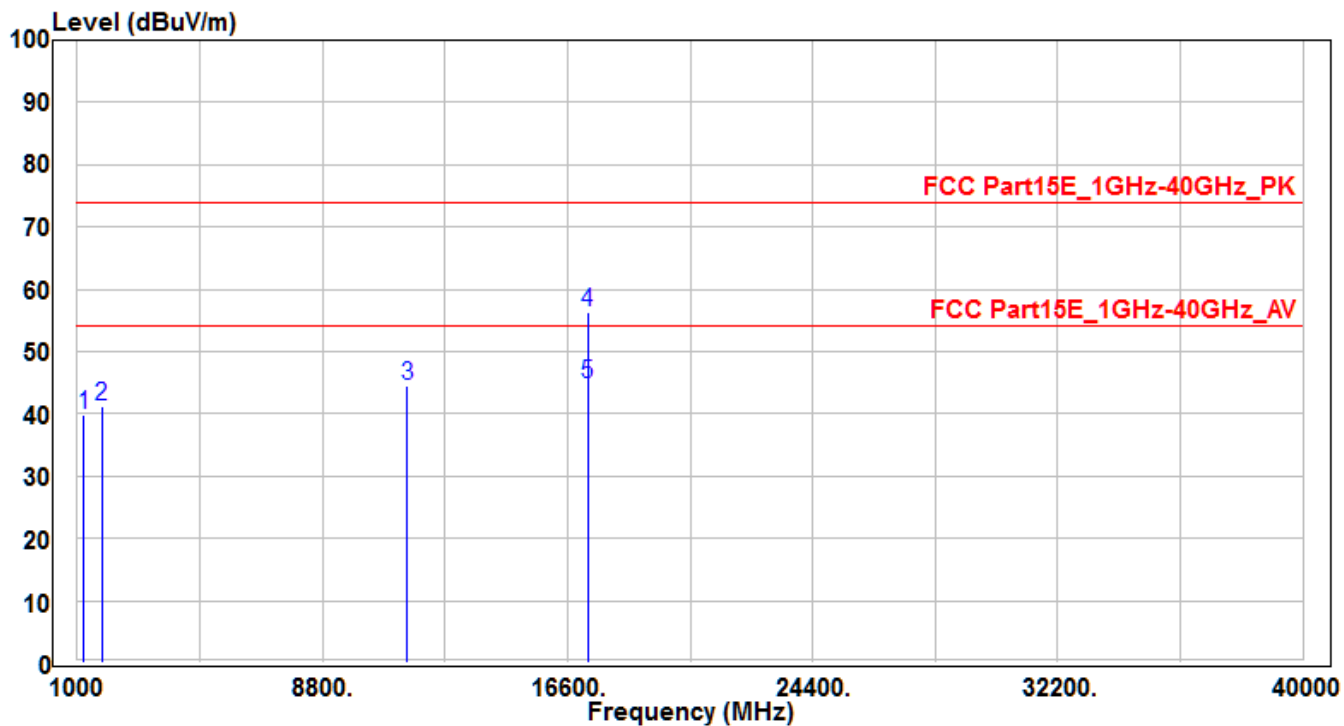


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1199.13	47.03	-7.06	39.97	-34.03	74	150	400	Peak
2		1793.96	46.62	-5.32	41.3	-32.7	74	150	400	Peak
3		11490	26.09	18.35	44.44	-29.56	74	150	400	Peak
4	*	17235	29.38	26.96	56.34	-17.66	74	175	110	Peak
5	*	17235	17.87	26.96	44.83	-9.17	54	175	110	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
- The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH149	Test Voltage	AC 120V/60Hz

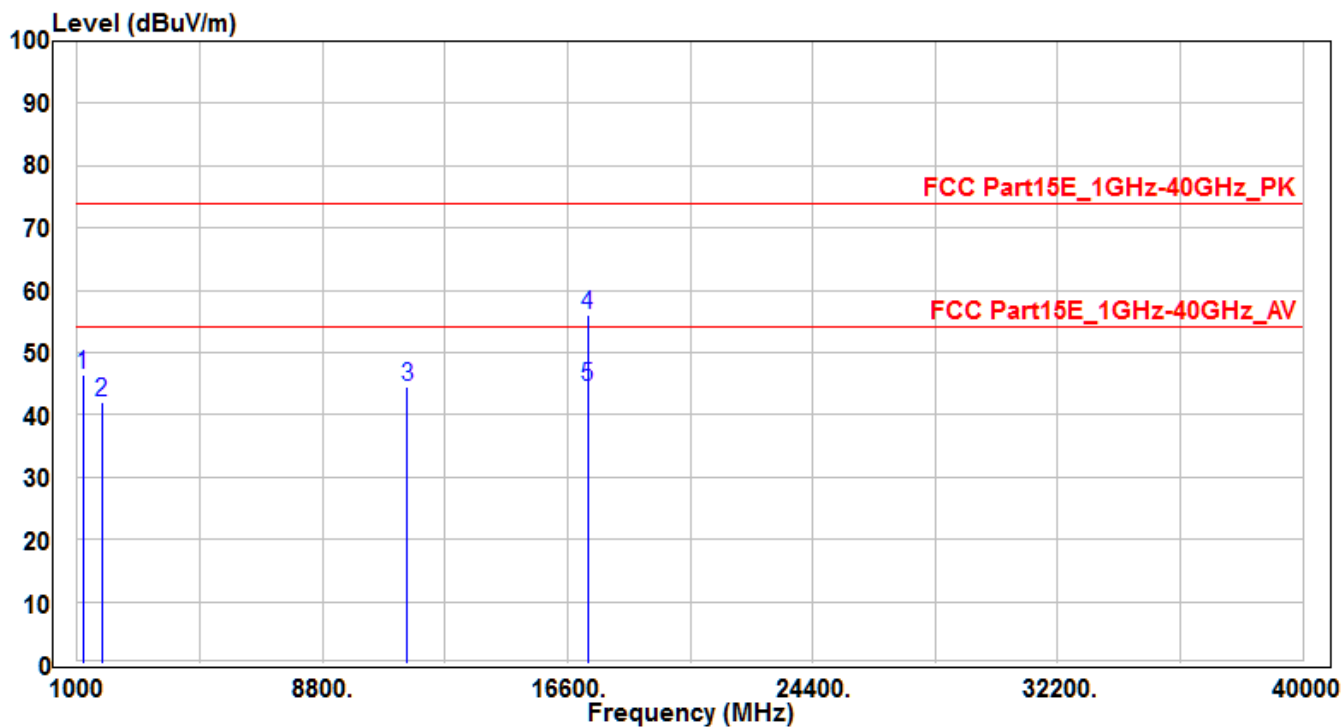


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1196.48	53.5	-7.07	46.43	-27.57	74	150	400	Peak
2		1790.52	47.46	-5.34	42.12	-31.88	74	150	400	Peak
3		11490	26.29	18.35	44.64	-29.36	74	150	400	Peak
4	*	17235	29.17	26.96	56.13	-17.87	74	210	-40	Peak
5	*	17235	17.53	26.96	44.49	-9.51	54	210	-40	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH157	Test Voltage	AC 120V/60Hz

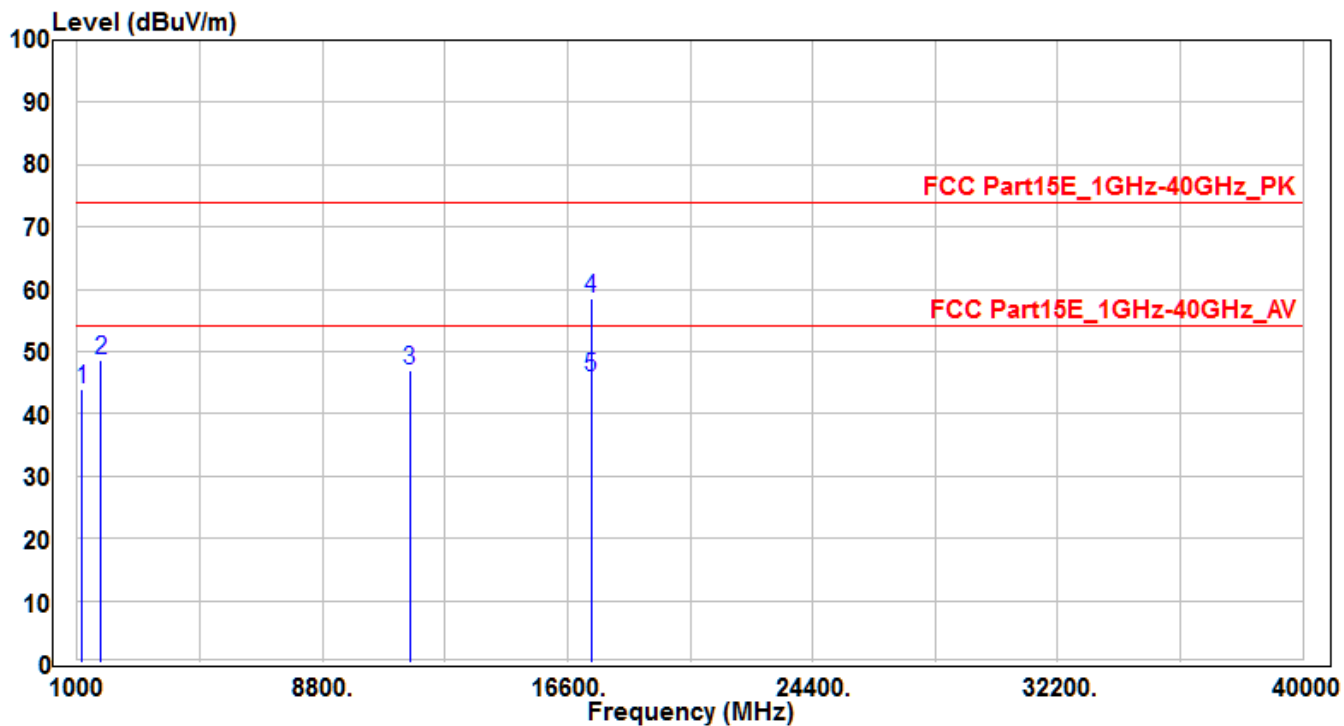


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1152.23	51.23	-7.18	44.05	-29.95	74	150	400	Peak
2		1754.54	54.21	-5.46	48.75	-25.25	74	150	400	Peak
3		11570	28.77	18.24	47.01	-26.99	74	150	400	Peak
4	*	17355	30.65	27.81	58.46	-15.54	74	250	360	Peak
5	*	17355	18.21	27.81	46.02	-7.98	54	250	360	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH157	Test Voltage	AC 120V/60Hz

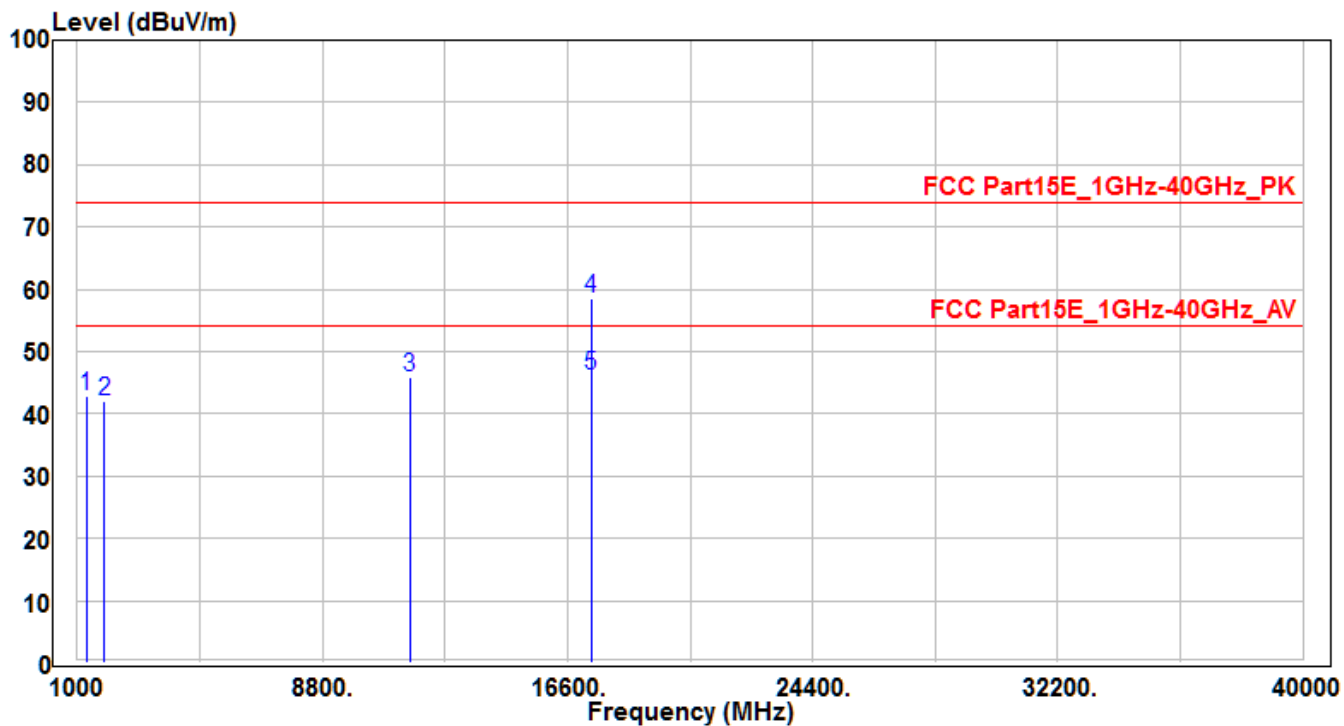


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1296.54	49.59	-6.82	42.77	-31.23	74	150	400	Peak
2		1856	47.22	-5.12	42.1	-31.9	74	150	400	Peak
3		11570	27.54	18.24	45.78	-28.22	74	150	400	Peak
4	*	17355	30.74	27.81	58.55	-15.45	74	160	330	Peak
5	*	17355	18.33	27.81	46.14	-7.86	54	160	330	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH165	Test Voltage	AC 120V/60Hz

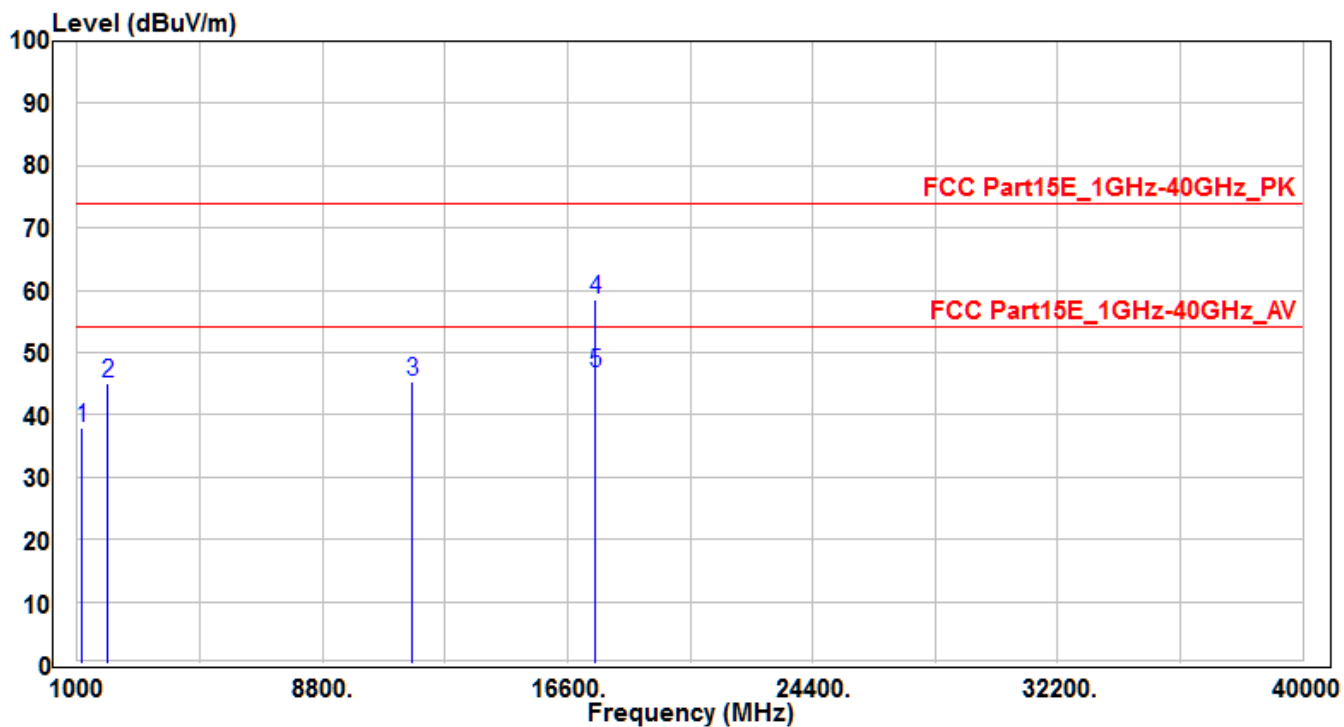


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1154	45.01	-7.18	37.83	-36.17	74	150	400	Peak
2		1965	49.86	-4.74	45.12	-28.88	74	150	400	Peak
3		11650	27.34	18.1	45.44	-28.56	74	150	400	Peak
4	*	17475	29.89	28.66	58.55	-15.45	74	205	-30	Peak
5	*	17475	18.14	28.66	46.8	-7.2	54	205	-30	Average

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE1 -CH165	Test Voltage	AC 120V/60Hz

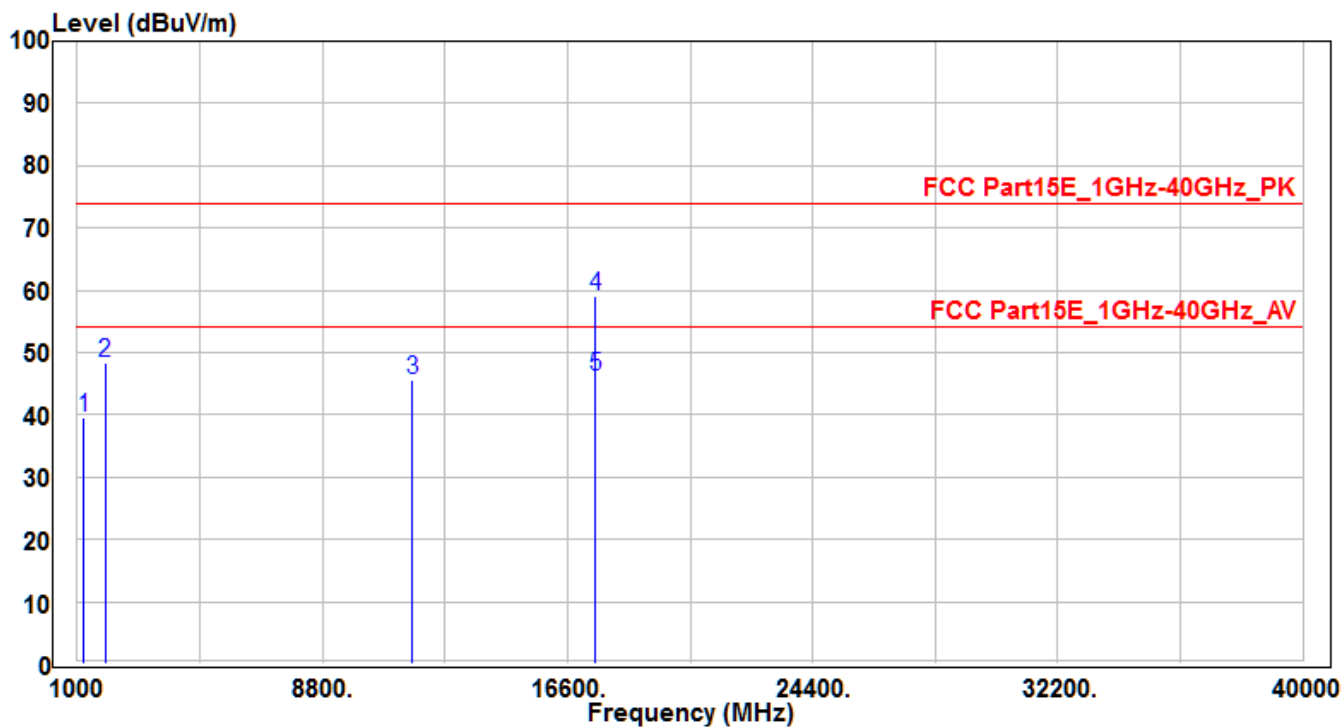


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1202	46.53	-7.06	39.47	-34.53	74	150	400	Peak
2		1899	53.31	-4.96	48.35	-25.65	74	150	400	Peak
3		11650	27.46	18.1	45.56	-28.44	74	150	400	Peak
4	*	17475	30.43	28.66	59.09	-14.91	74	175	120	Peak
5	*	17475	17.52	28.66	46.18	-7.82	54	175	120	Average

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH36	Test Voltage	AC 120V/60Hz

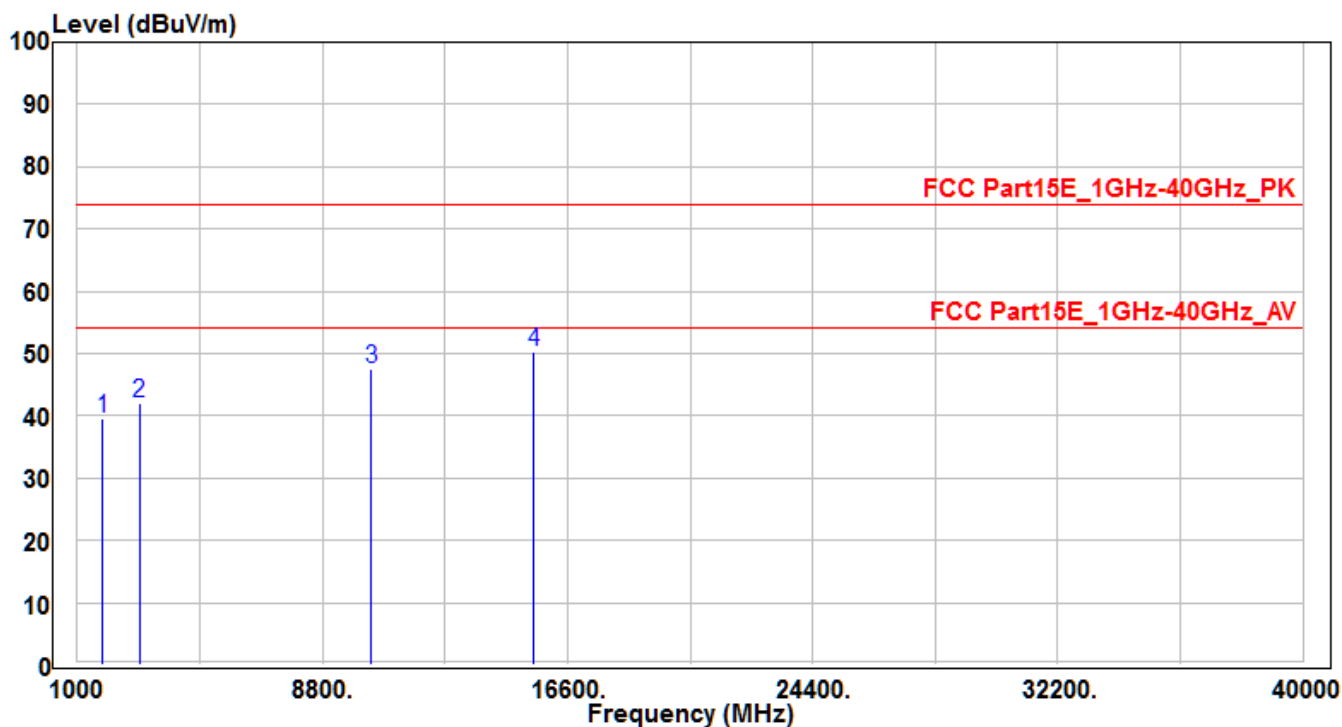


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1797.71	44.87	-5.32	39.55	-34.45	74	150	400	Peak
2	2990.17	45.07	-2.91	42.16	-31.84	74	150	400	Peak
3	10360	30.72	16.73	47.45	-26.55	74	150	400	Peak
4	* 15540	29.15	21.01	50.16	-23.84	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH36	Test Voltage	AC 120V/60Hz

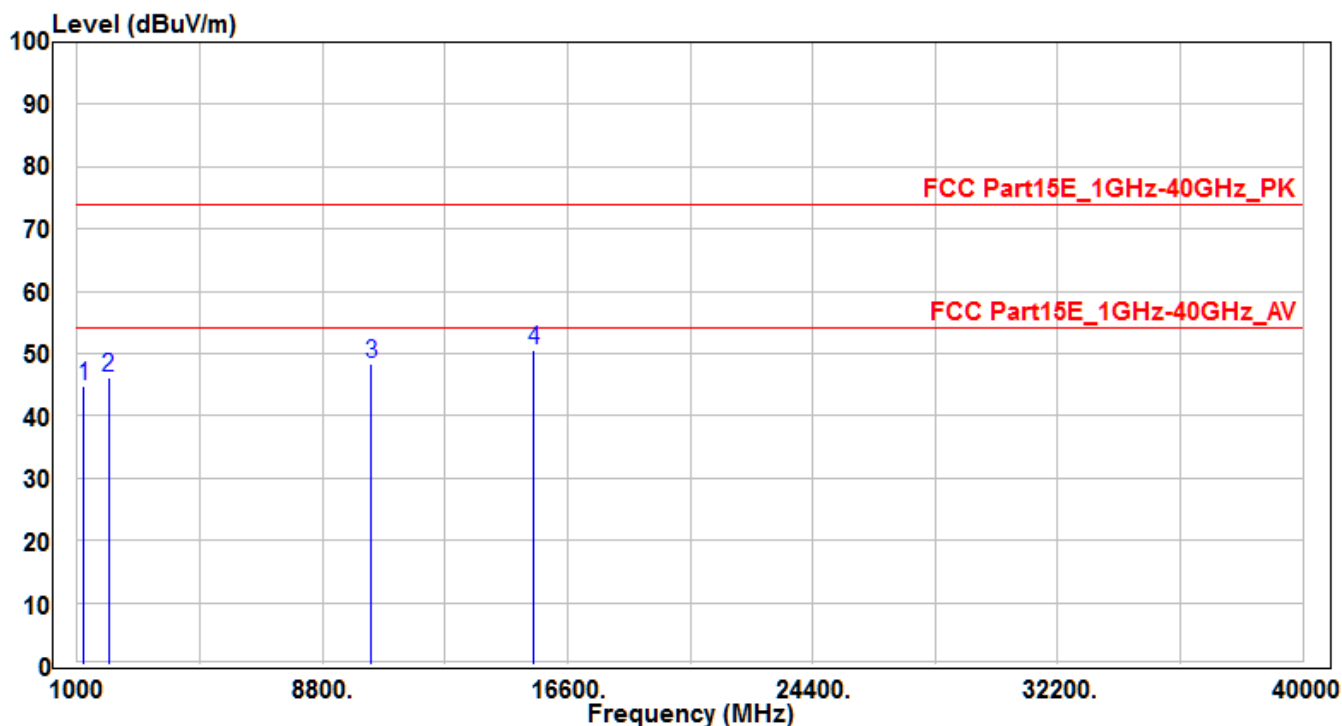


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1197.73	51.8	-7.07	44.73	-29.27	74	150	400	Peak
2	1993.8	50.89	-4.64	46.25	-27.75	74	150	400	Peak
3	10360	31.62	16.73	48.35	-25.65	74	150	400	Peak
4	*	29.5	21.01	50.51	-23.49	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
- The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH44	Test Voltage	AC 120V/60Hz

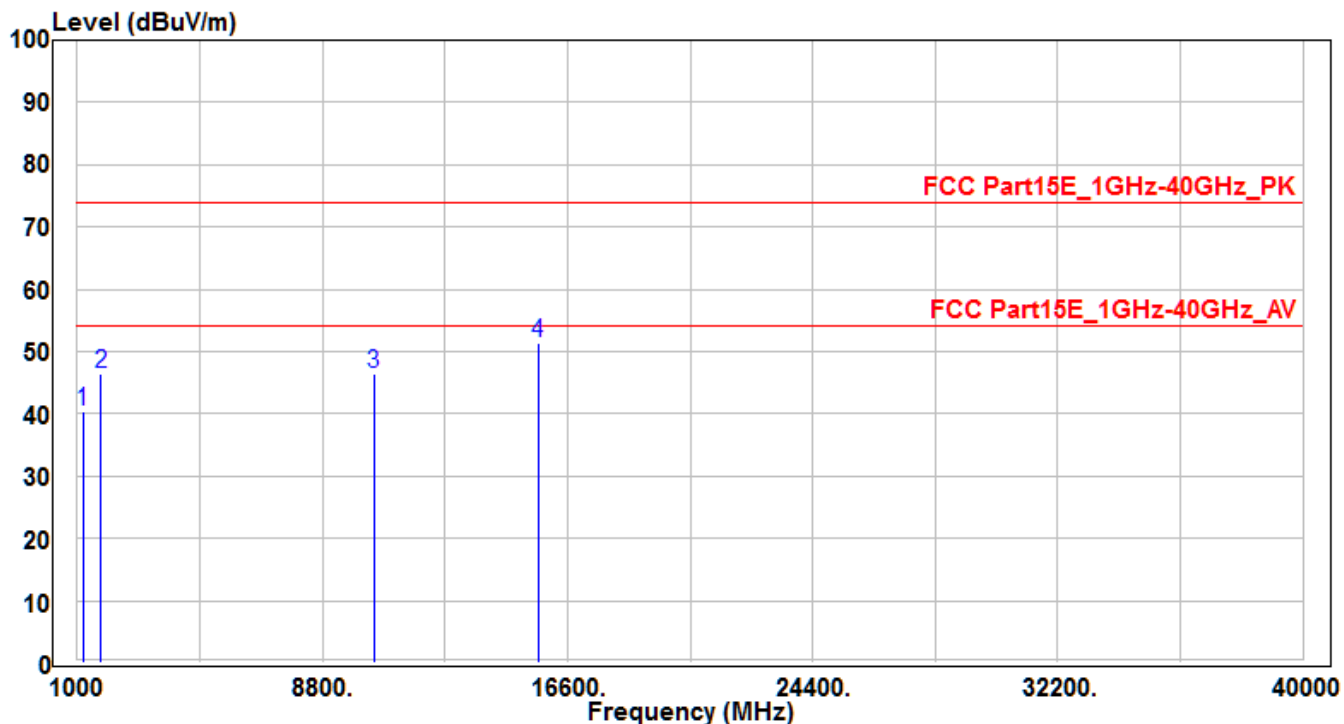


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1174.54	47.51	-7.13	40.38	-33.62	74	150	400	Peak
2	1759.56	52	-5.44	46.56	-27.44	74	150	400	Peak
3	10440	29.36	17.04	46.4	-27.6	74	150	400	Peak
4	*	15660	30.42	51.26	-22.74	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH44	Test Voltage	AC 120V/60Hz

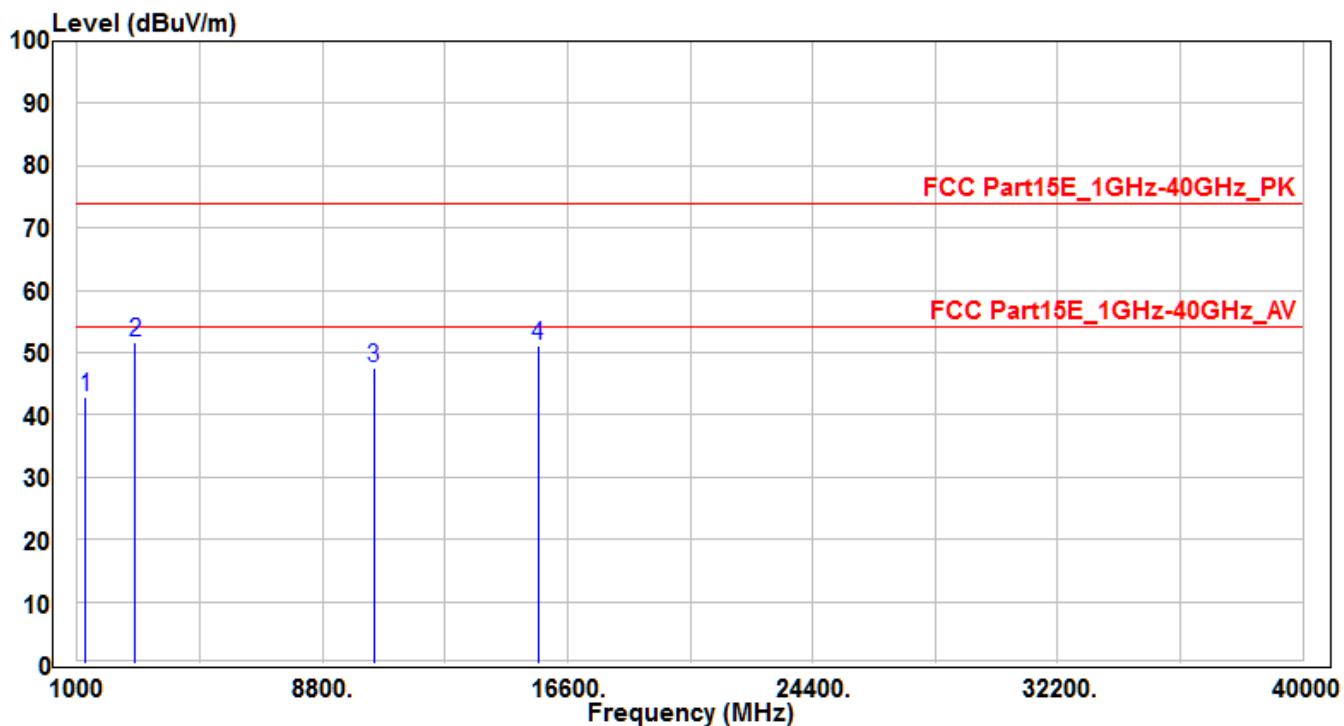


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1251.136	49.7	-6.94	42.76	-31.24	74	150	400	Peak
2	*	2856.65	54.23	-2.67	51.56	-22.44	74	150	400	Peak
3		10440	30.57	17.04	47.61	-26.39	74	150	400	Peak
4		15660	30.34	20.84	51.18	-22.82	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH48	Test Voltage	AC 120V/60Hz

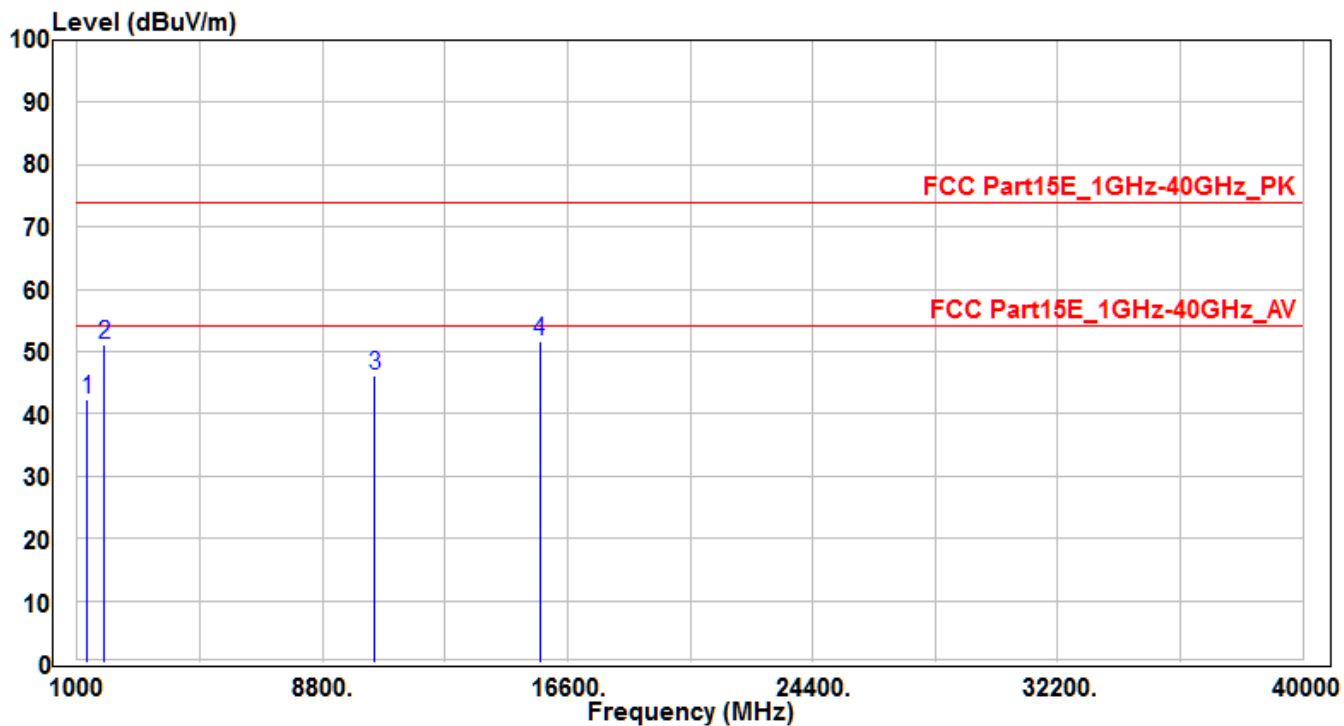


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1320	49	-6.77	42.23	-31.77	74	150	400	Peak
2	1852.156	56.33	-5.13	51.2	-22.8	74	150	400	Peak
3	10480	28.89	17.2	46.09	-27.91	74	150	400	Peak
4	*	30.97	20.77	51.74	-22.26	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH48	Test Voltage	AC 120V/60Hz

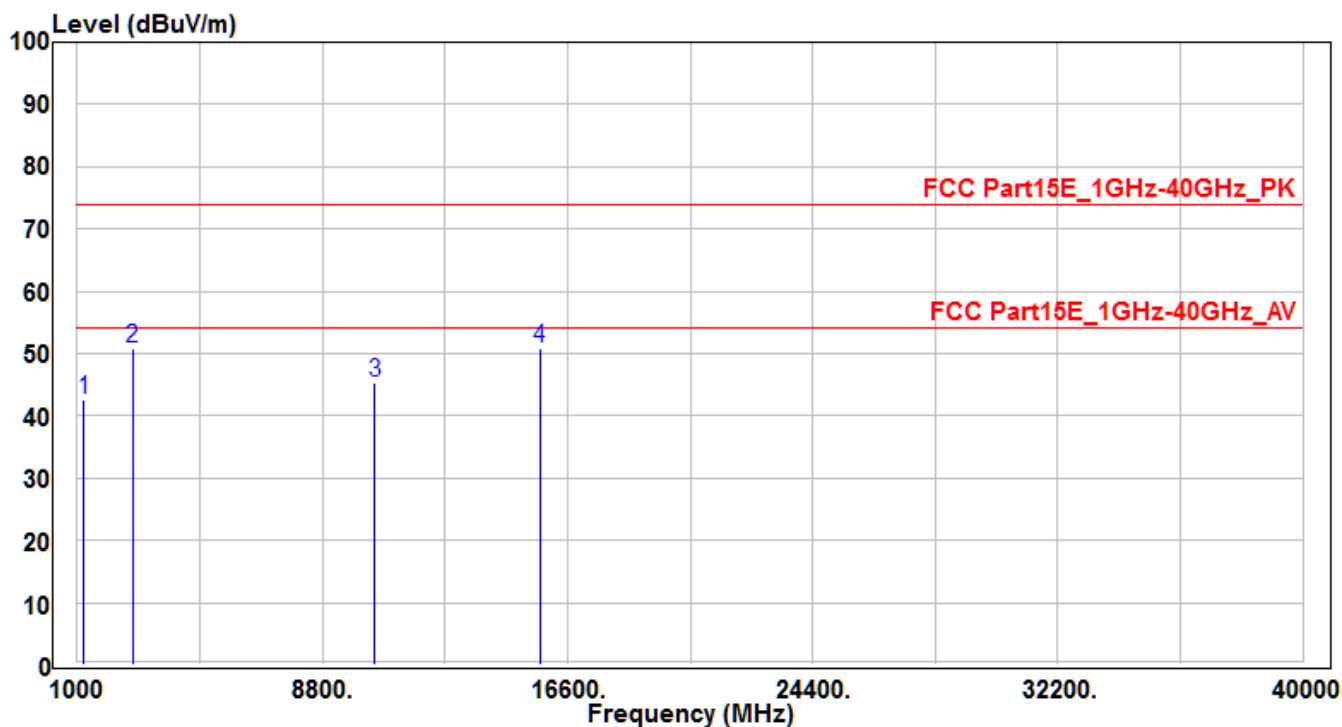


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1220.156	49.6	-7.01	42.59	-31.41	74	150	400	Peak
2	*	2774.45	53.34	-2.53	50.81	-23.19	74	150	400	Peak
3		10480	28.22	17.2	45.42	-28.58	74	150	400	Peak
4		15720	29.97	20.77	50.74	-23.26	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH52	Test Voltage	AC 120V/60Hz

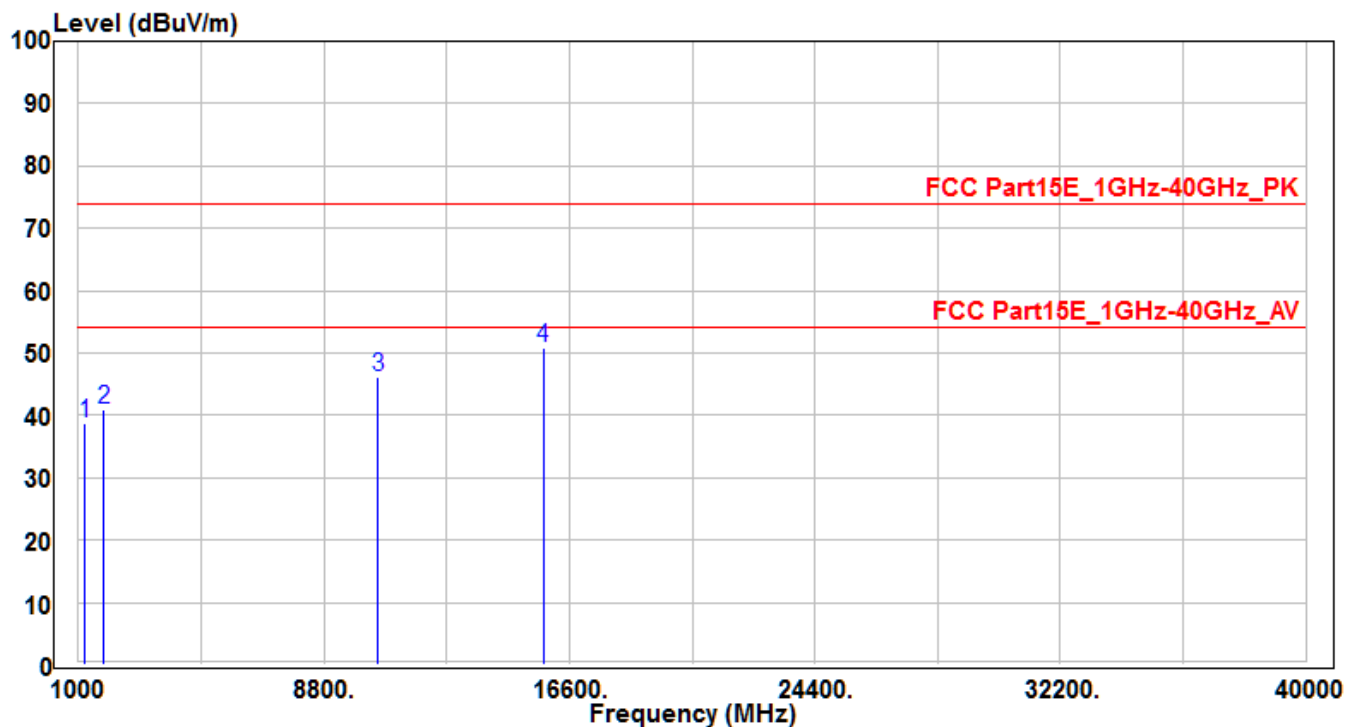


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1198.51	45.93	-7.06	38.87	-35.13	74	150	400	Peak
2	1796.93	46.16	-5.32	40.84	-33.16	74	150	400	Peak
3	10520	28.87	17.32	46.19	-27.81	74	150	400	Peak
4	*	30.17	20.69	50.86	-23.14	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH52	Test Voltage	AC 120V/60Hz

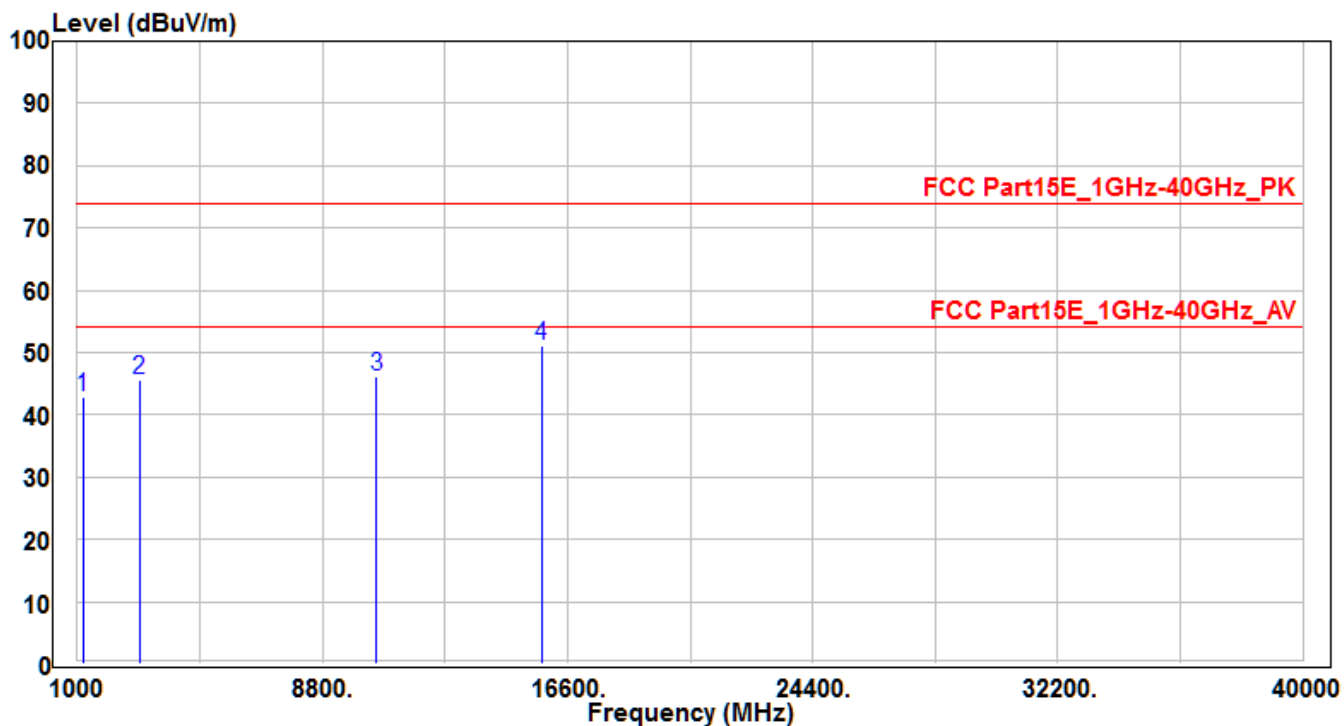


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1196.32	50.01	-7.07	42.94	-31.06	74	150	400	Peak
2	2992.83	48.61	-2.92	45.69	-28.31	74	150	400	Peak
3	10520	28.71	17.32	46.03	-27.97	74	150	400	Peak
4	* 15780	30.31	20.69	51	-23	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH60	Test Voltage	AC 120V/60Hz

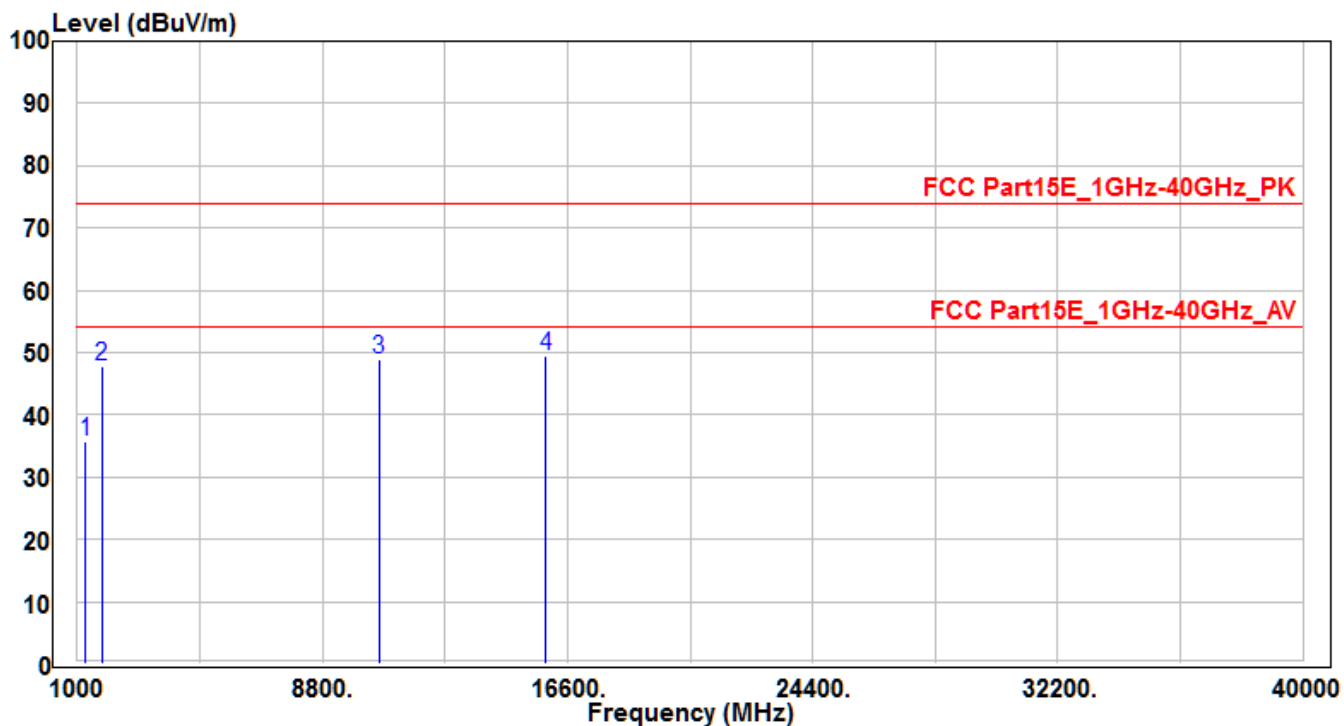


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1254.222	42.65	-6.93	35.72	-38.28	74	150	400	Peak
2	1789.56	53.2	-5.34	47.86	-26.14	74	150	400	Peak
3	10600	31.27	17.53	48.8	-25.2	74	150	400	Peak
4	* 15900	28.81	20.54	49.35	-24.65	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH60	Test Voltage	AC 120V/60Hz

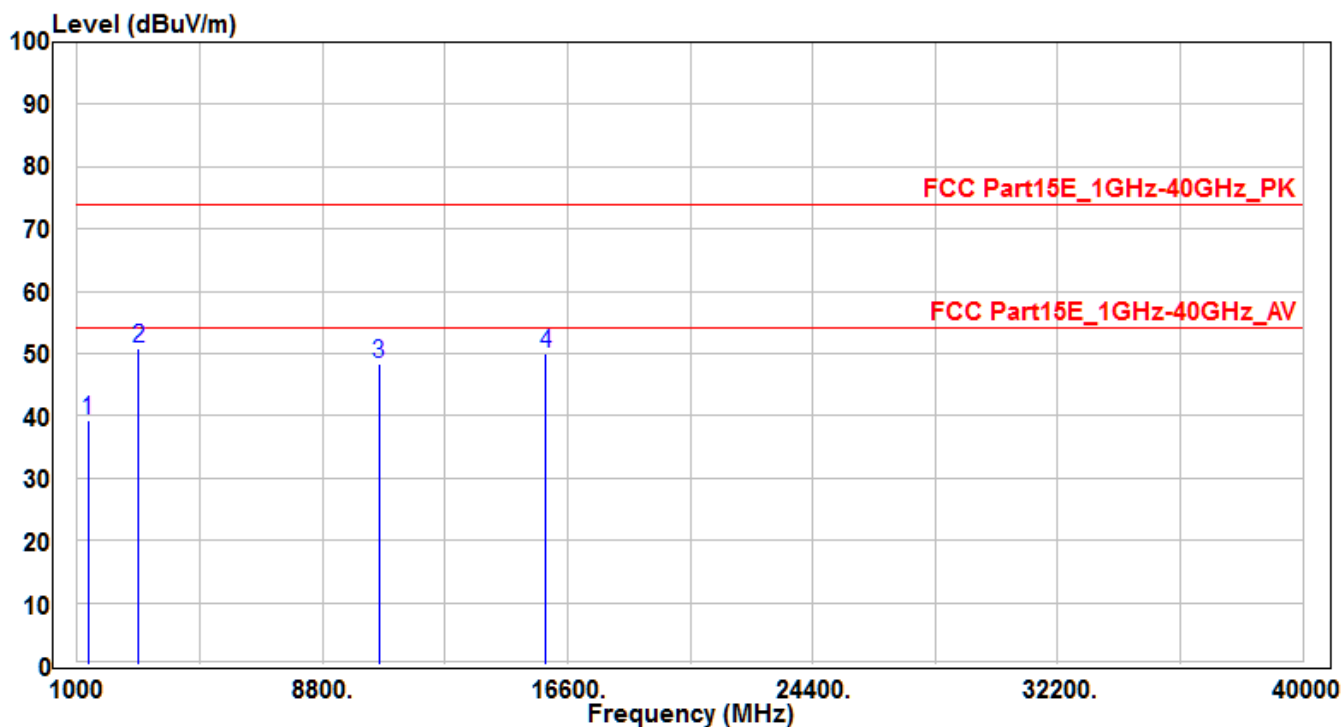


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1354.96	45.88	-6.69	39.19	-34.81	74	150	400	Peak
2	*	2963.36	53.63	-2.86	50.77	-23.23	74	150	400	Peak
3		10600	30.71	17.53	48.24	-25.76	74	150	400	Peak
4		15900	29.47	20.54	50.01	-23.99	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data .
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) .
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) .
- The emission levels of other frequencies are very lower than the limit and not show in test report .

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH64	Test Voltage	AC 120V/60Hz

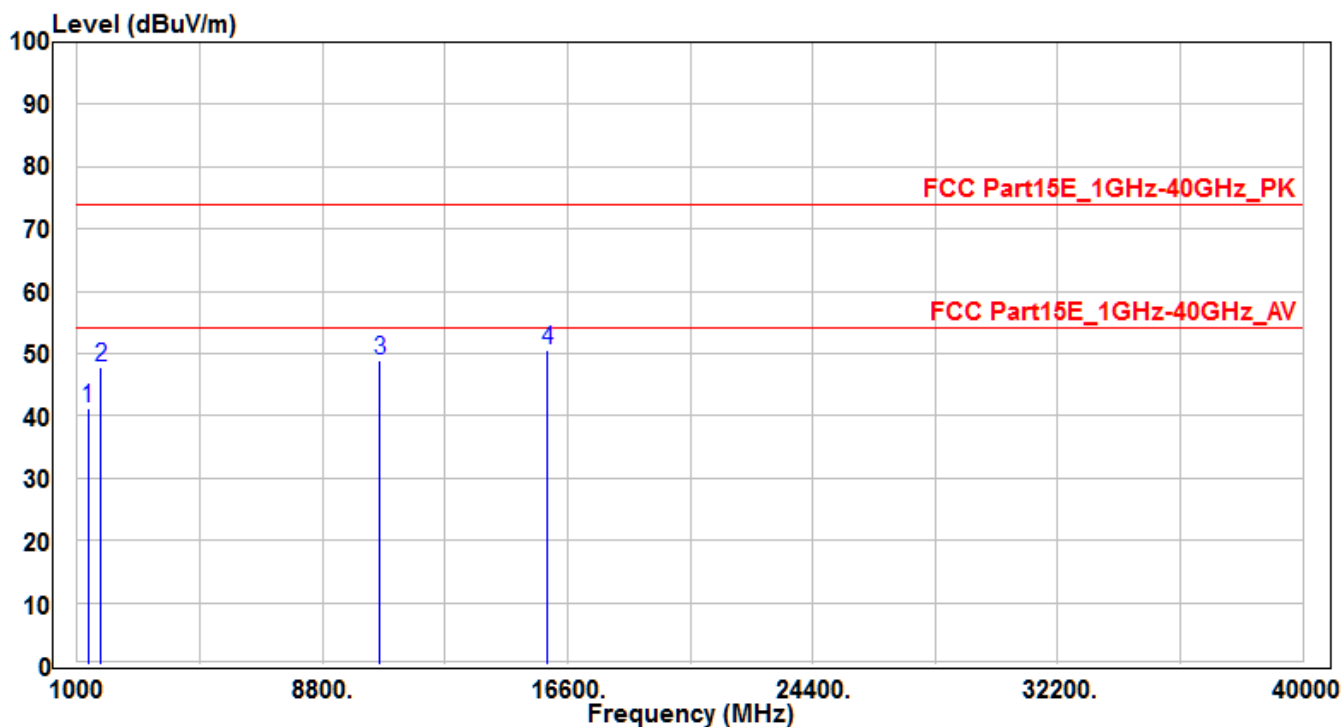


No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1340.5	47.85	-6.72	41.13	-32.87	74	150	400	Peak
2	1754.56	53.2	-5.46	47.74	-26.26	74	150	400	Peak
3	10640	31.31	17.64	48.95	-25.05	74	150	400	Peak
4	*	15960	30.04	20.45	50.49	74	150	400	Peak

Note : The EUT Power by Notebook PC

- "*" means the worst value in this measurement data °
- Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH64	Test Voltage	AC 120V/60Hz

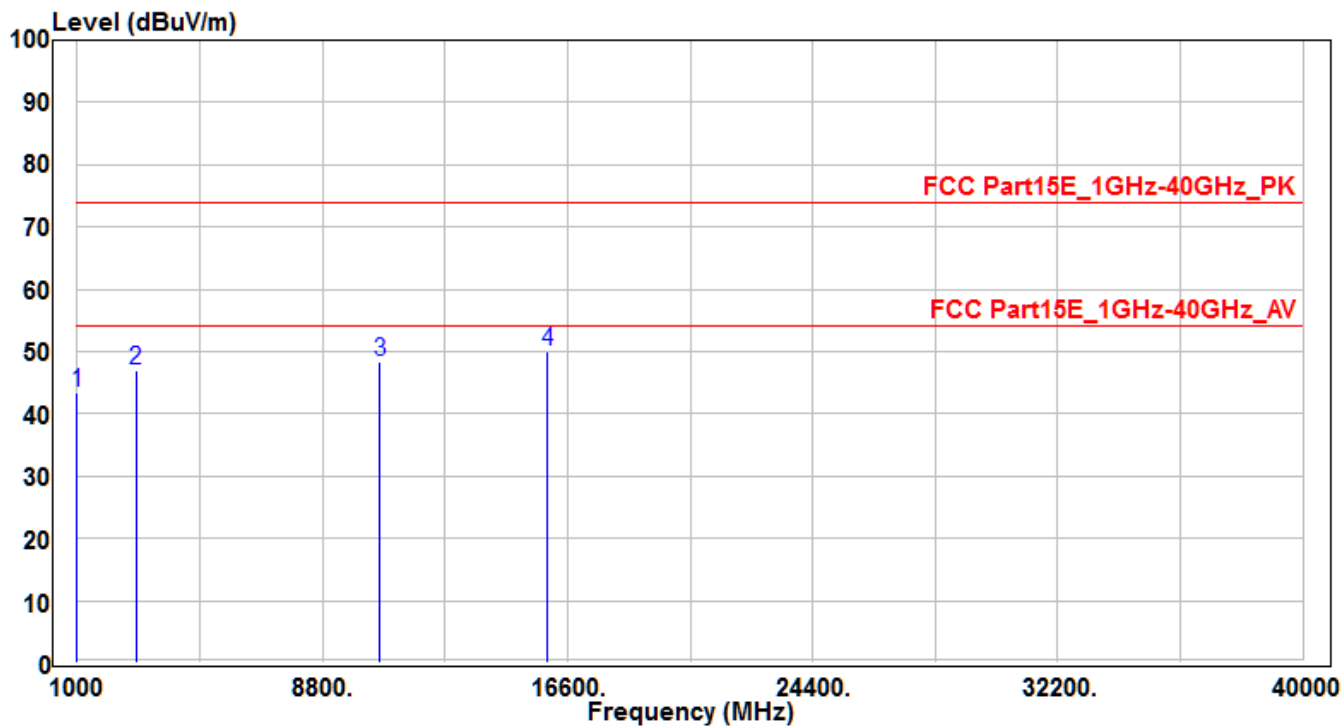


No		Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		1000.55	51	-7.55	43.45	-30.55	74	150	400	Peak
2		2869	49.65	-2.69	46.96	-27.04	74	150	400	Peak
3		10640	30.59	17.64	48.23	-25.77	74	150	400	Peak
4	*	15960	29.67	20.45	50.12	-23.88	74	150	400	Peak

Note : The EUT Power by Notebook PC

1. " * " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dB μ V) + C.F Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The emission levels of other frequencies are very lower than the limit and not show in test report °

EUT	Handheld terminal	Test Date	2017/10/13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Peter
Test Mode	MODE2 -CH100	Test Voltage	AC 120V/60Hz

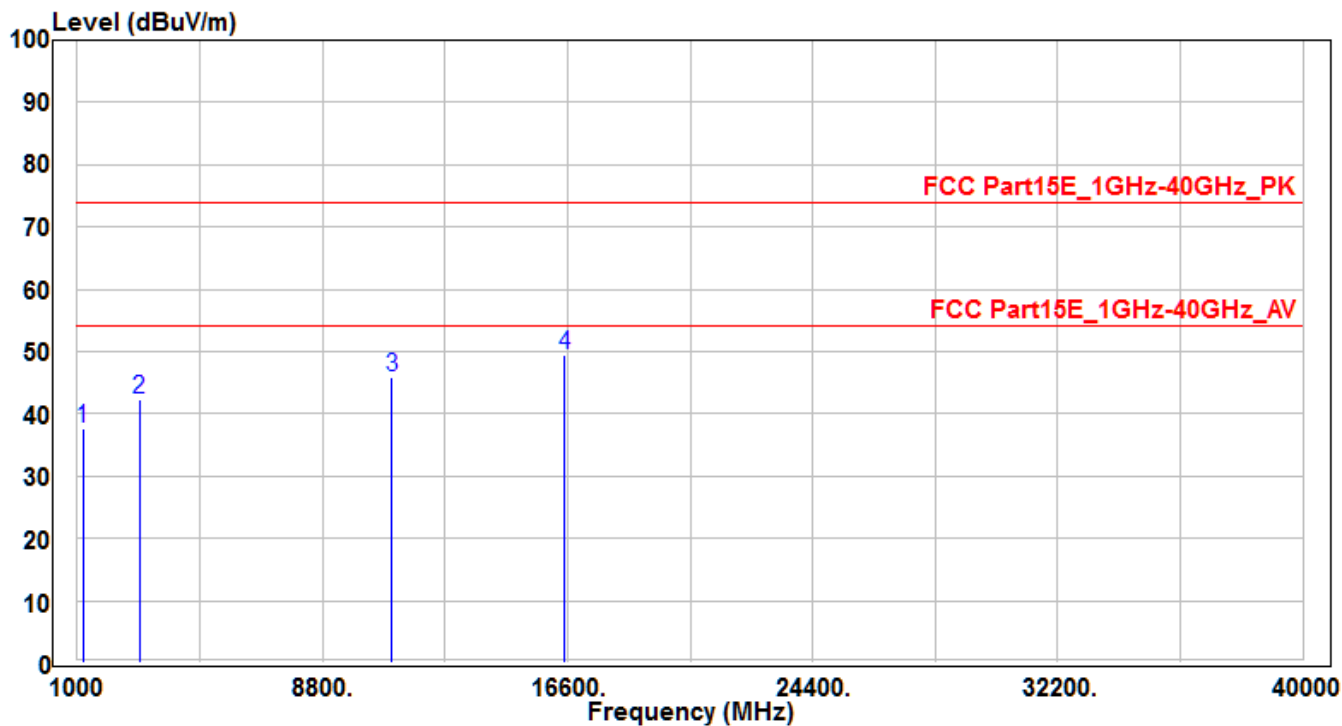

No	Frequency (MHz)	Reading (dBuV/m)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1194.6	44.83	-7.07	37.76	-36.24	74	150	400	Peak
2	2989.55	45.1	-2.91	42.19	-31.81	74	150	400	Peak
3	11000	27.44	18.58	46.02	-27.98	74	150	400	Peak
4	*	28.7	20.76	49.46	-24.54	74	150	400	Peak

Note : The EUT Power by Notebook PC

- " * " means the worst value in this measurement data °
- Measure Level (dB μ V/m) = Reading Level (dB μ V) + C.F Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The emission levels of other frequencies are very lower than the limit and not show in test report °