

FCC Test Report

Equipment : Wireless Pocket CCD Scanner
Brand Name : unitech
Model No. : MS912
FCC ID : HLEMS912BT
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DSS
Applicant : unitech Electronics Co., Ltd.
Manufacturer : 5Fl., No. 136, Lane 235, Pao-Chiao Rd.
Hsin-Tien Area, New Taipei City,
Taiwan 231, R.O.C.

The product sample received on Aug. 01, 2013 and completely tested on Sep. 24, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	7
1.3	Support Equipment	7
1.4	Testing Applied Standards	7
1.5	Testing Location Information	8
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	20dB Bandwidth and Carrier Frequency Separation	16
3.3	Number of Hopping Frequencies.....	18
3.4	Time of Occupancy (Dwell Time).....	20
3.5	RF Output Power	22
3.6	Transmitter Radiated Bandedge Emissions	25
3.7	Transmitter Radiated Unwanted Emissions	28
4	TEST EQUIPMENT AND CALIBRATION DATA.....	39
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.159MHz 38.16 (Margin 17.36dB) - AV 61.00 (Margin 4.52dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	20dB Bandwidth	EDR: 1.2590MHz	N/A	Complied
3.2	15.247(a)	Carrier Frequency Separation (ChS)	EDR: 1.0029MHz	$ChS \geq BW_{20dB} \times 2/3$	Complied
3.3	15.247(a)	Number of Hopping Frequencies (N)	Max: 79 Min: 20	$N \geq 15$	Complied
3.4	15.247(a)	Time of Occupancy (Dwell Time)	EDR: 0.326sec	0.4 s within $0.4 \times N$	Complied
3.5	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] BR: 5.67 EDR: 4.07	Power [dBm] BR: 21 EDR: 21	Complied
3.6	15.247(d)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2483.50MHz 60.25 (Margin 13.75dB) - PK 48.64 (Margin 5.36dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.7	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 1600.000MHz 53.44 (Margin 20.56B) - PK 52.71 (Margin 1.29dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-3273456
FAX : 886-3-3270973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)	Co-location
2400-2483.5	BR / EDR	2402-2480	0-78 [79]	5.67	NA
Note 1: Bluetooth BR uses a GFSK (1Mbps). Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). Note 3: RF output power specifies that Maximum Peak Conducted Output Power. Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)					

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☒	Temporary RF connector provided
☐	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	2.66

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☐ Pre-Production ; ☒ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 81.26% - test mode single channel-DH5	0.90
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.	

1.1.5 EUT Operational Condition

Supply Voltage	☐ AC mains	☒ DC	
Type of DC Source	☐ Internal DC supply	☒ External DC from host	☒ Li-on Battery

1.2 Accessories

Accessories Information		
USB Cable	Signal Line	D-Shielded, 1.5m

Reminder: Regarding to more detail and other information, please refer to user manual.

1.3 Support Equipment

Support Equipment- AC Line Conducted Emission Test				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	D5500	DoC
2	Printer	EPSON	C61	--
3	USB Mouse	Microsoft	1113	DoC
4	iPod Nano	Apple	A1199	DoC

Support Equipment- Radiated Emission Test (Below 1GHz)				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	D5520	DoC
2	USB Mouse	Microsoft	1004	N/A
3	Printer	EPSON	C61	DoC
4	iPod Nano	Apple	A1199	DoC
Support Equipment- Radiated Emission Test (Above 1GHz)				
No.	Equipment	Brand Name	Model Name	FCC ID
1	PC	COMPAQ	D330ut	DoC
2	USB Mouse	Microsoft	1004	N/A
3	USB Keyboard	IBM	SK-8815	N/A
4	LCD Monitor	DELL	1703FPt	--
5	Test Fixture	--	--	--

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC Public Notice DA 00-705

1.5 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO01-HY	David	23°C / 55%
RF Conducted	TH06-HY	Shiming	25.5°C / 62%
Radiated Emission	03CH02-HY	Hsiao	24°C / 63%

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.26 dB
Emission bandwidth, 6dB bandwidth		±1.42 %
RF output power, conducted		±0.63 dB
Power density, conducted		±0.81 dB
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.42 %
Duty Cycle		±1.42 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Bluetooth Mode	Transmit Chains (N _{TX})	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode
BR	1	1 Mbps	BR-1Mbps	5.67	BR-1Mbps
EDR	1	2 Mbps	EDR-2Mbps	2.70	
EDR	1	3 Mbps	EDR-3Mbps	4.07	
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).					
Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).					
Note 3: Modulation modes consist below configuration: FHSS BR-1Mbps: GFSK (1Mbps), EDR-2Mbps: $\pi/4$ -DQPSK (2Mbps), EDR-3Mbps: 8DPSK(3Mbps)					
Note 4: RF output power specifies that Maximum Peak Conducted Output Power.					

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Bluetooth Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
BR / EDR	2402-(F1), 2440-(F2), 2480-(F3)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	BlueTest 3		
Modulation Mode	2402 MHz	2440 MHz	2480 MHz
BR,1Mbps	63	63	63
EDR,2Mbps	120	120	120
EDR,3Mbps	120	120	120


2.4 The Worst Case Measurement Configuration



The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
Test Condition	Conducted measurement at transmit chains
Modulation Mode	BR-1Mbps, EDR-3Mbps

The Worst Case Mode for Following Conformance Tests	
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions
Test Condition	Radiated measurement
User Position	☒ EUT will be placed in fixed position.
	☐ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.
Operating Mode < 1GHz	☒ 1. AC Power & Continuous Transmitting
Modulation Mode	BR-1Mbps, EDR-3Mbps

2.5 Test Setup Diagram

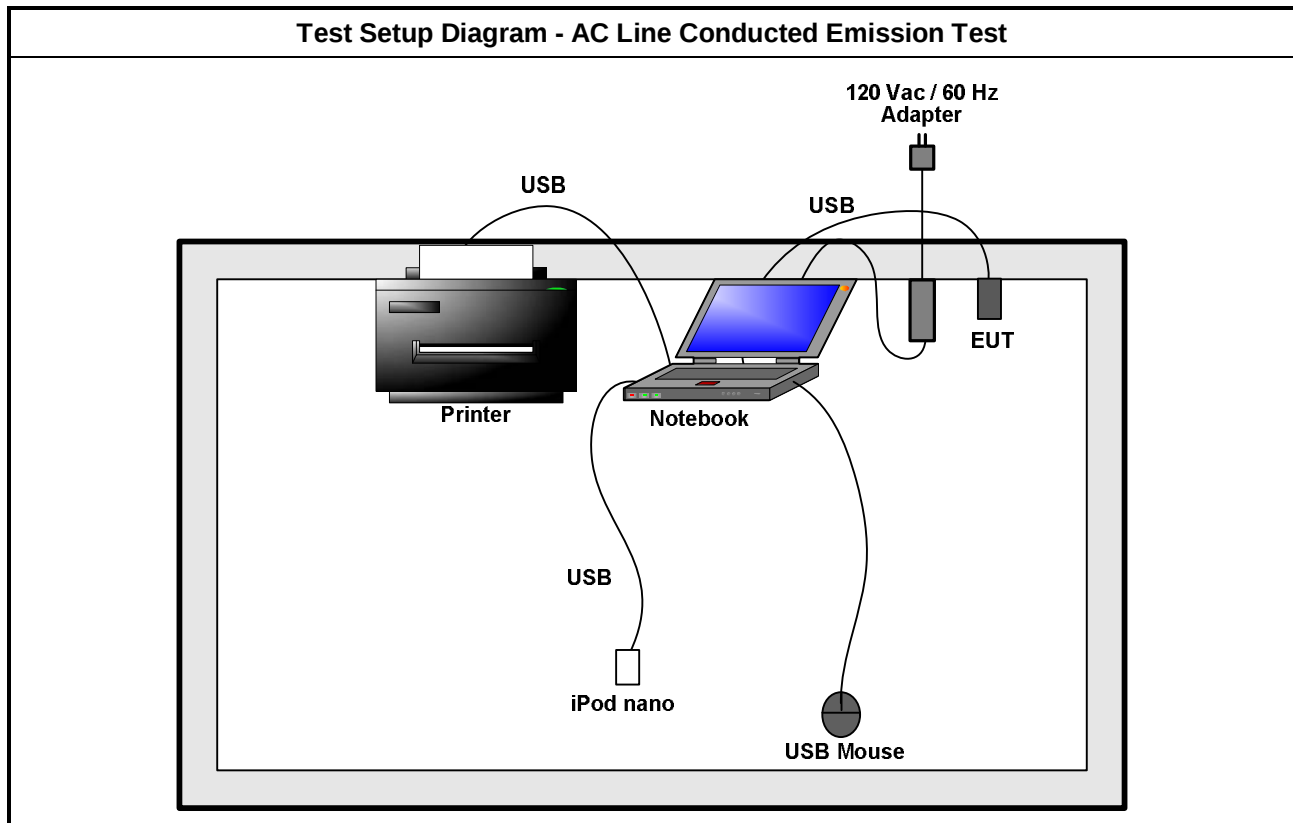

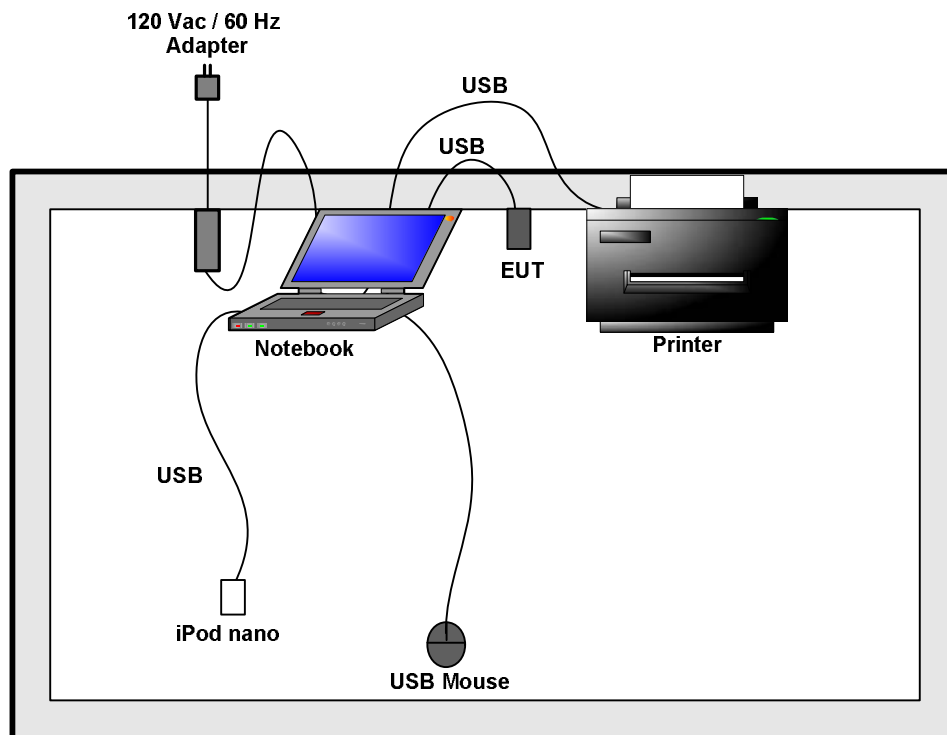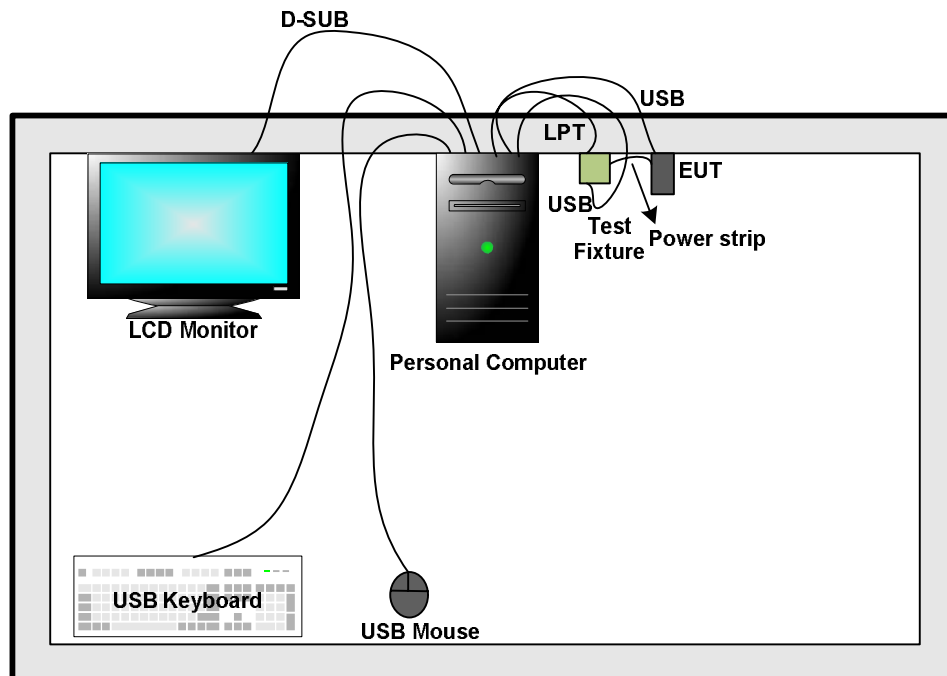Test Setup Diagram - Radiated Below 1GHz Test

Test Setup Diagram - Radiated Above 1GHz Test


3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

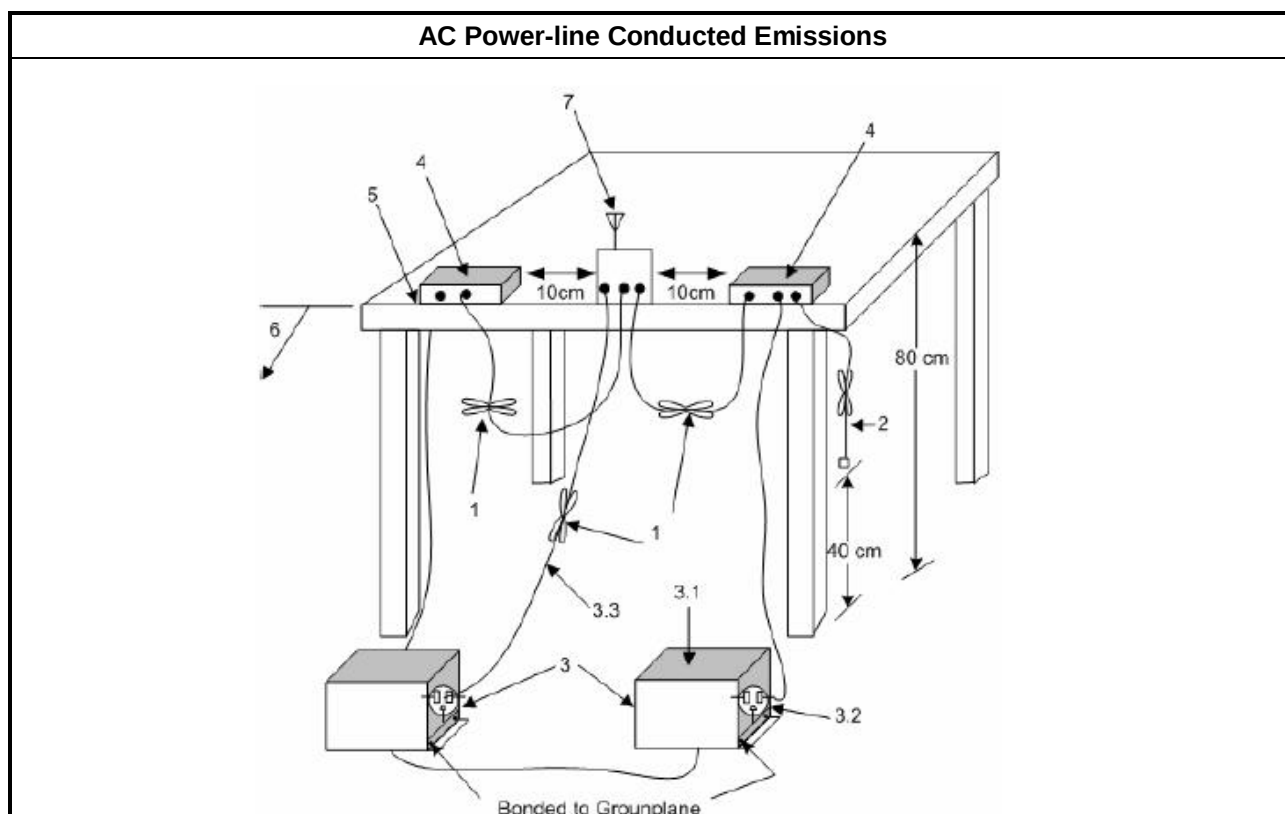


3.1.5 Test Result of AC Power-line Conducted Emissions

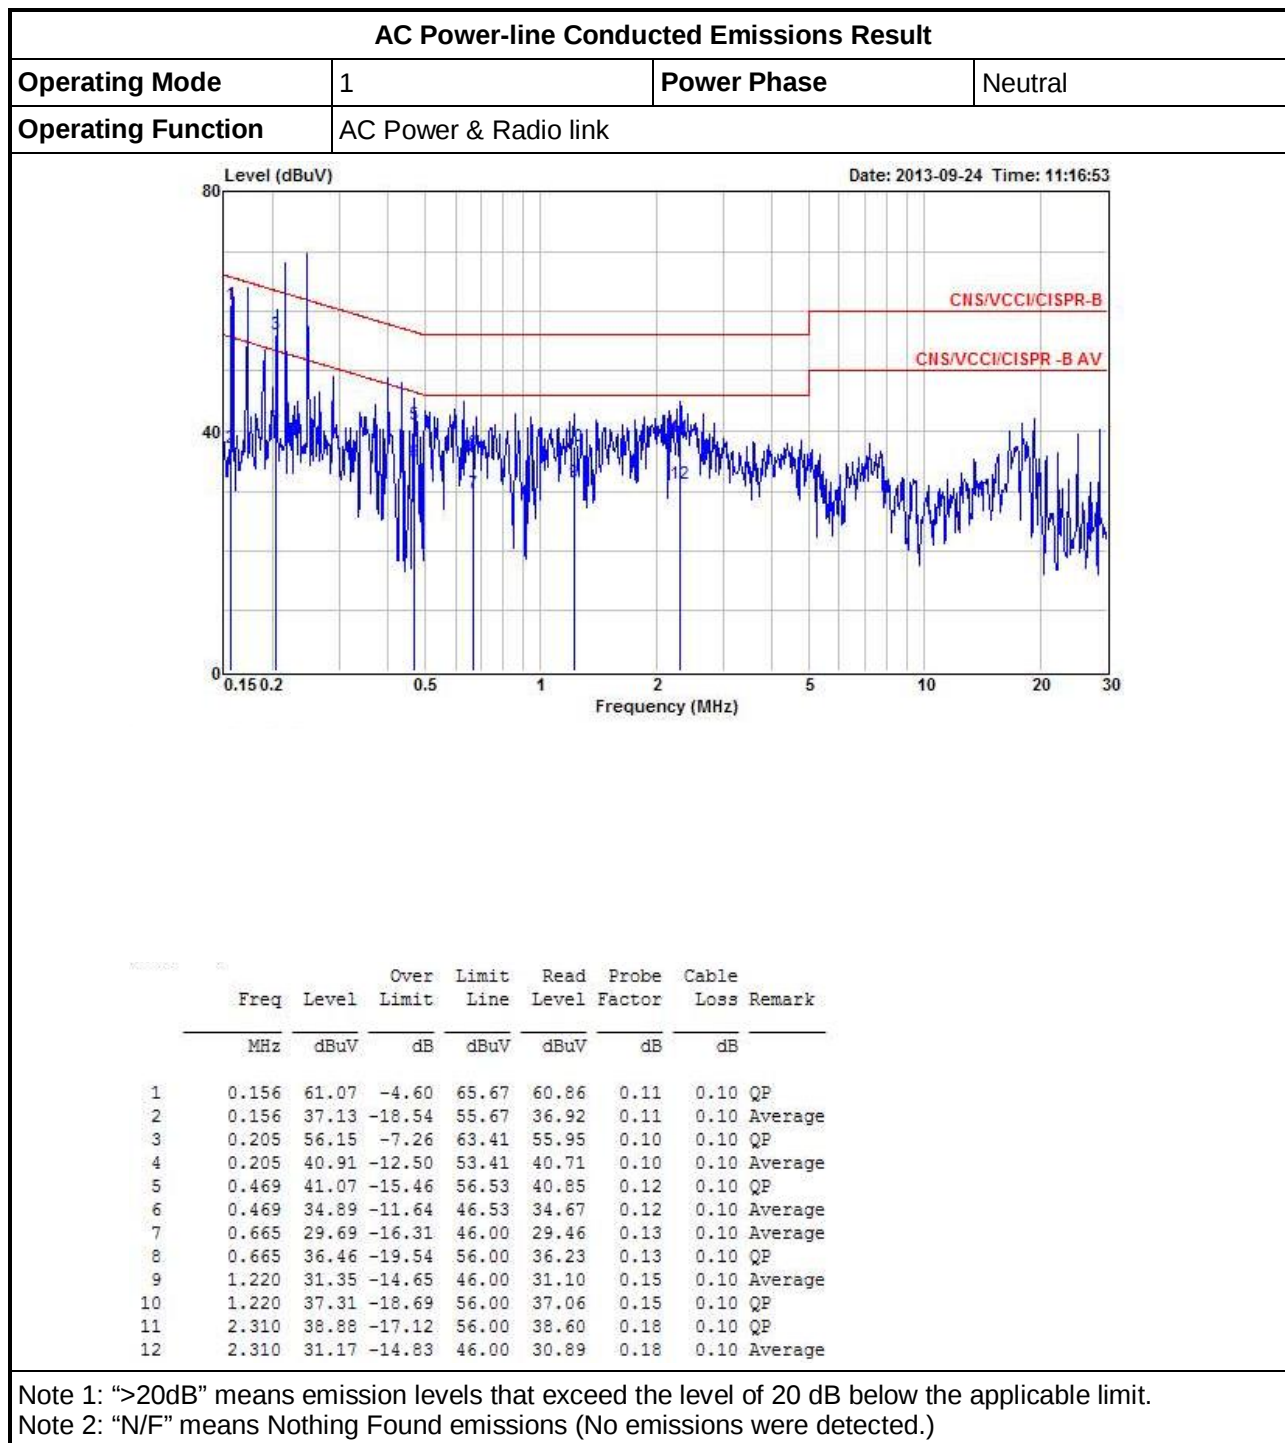

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link		

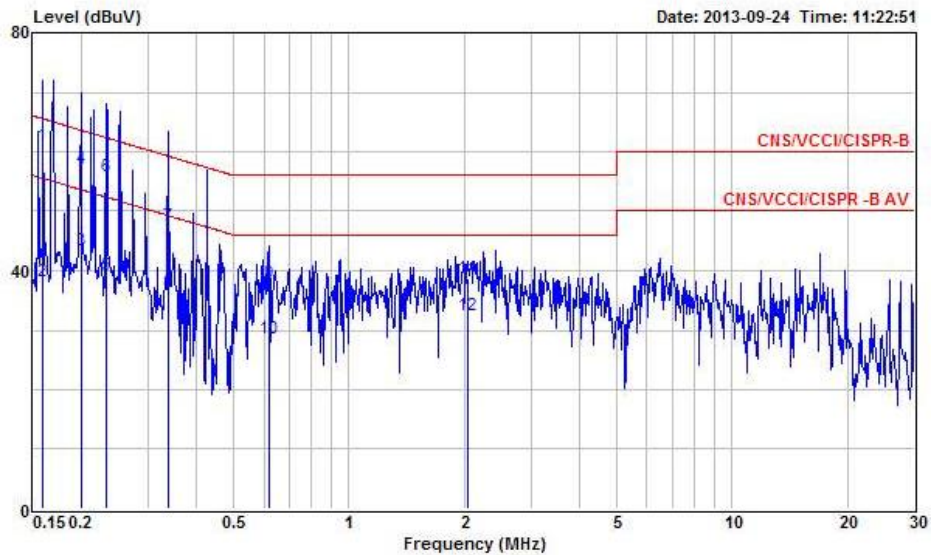

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.159	61.00	-4.52	65.52	60.77	0.13	0.10	QP
2	0.159	38.16	-17.36	55.52	37.93	0.13	0.10	Average
3	0.200	43.30	-10.31	53.61	43.06	0.14	0.10	Average
4	0.200	57.12	-6.49	63.61	56.88	0.14	0.10	QP
5	0.232	39.32	-13.06	52.38	39.08	0.14	0.10	Average
6	0.232	55.90	-6.48	62.38	55.66	0.14	0.10	QP
7	0.337	47.46	-11.82	59.28	47.21	0.15	0.10	QP
8	0.337	36.31	-12.97	49.28	36.06	0.15	0.10	Average
9	0.617	37.85	-18.15	56.00	37.59	0.16	0.10	QP
10	0.617	28.54	-17.46	46.00	28.28	0.16	0.10	Average
11	2.040	38.82	-17.18	56.00	38.53	0.19	0.10	QP
12	2.040	32.37	-13.63	46.00	32.08	0.19	0.10	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 20dB Bandwidth and Carrier Frequency Separation

3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
☒	2400-2483.5 MHz Band:
☐	$N \geq 75$ and ChS $\geq$ MAX (20 dB bandwidth, 25 kHz).
☒	$N \geq 15$ and ChS $\geq$ MAX (20 dB bandwidth x 2/3, 25 kHz).
N: Number of Hopping Frequencies; ChS: Hopping Channel Separation	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.
☒	Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.2.4 Test Setup

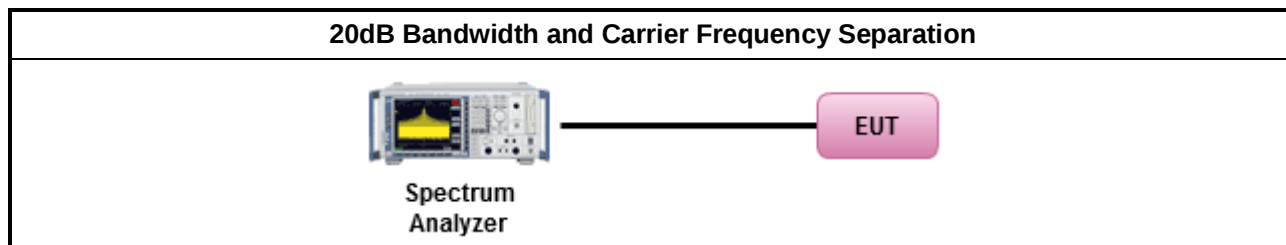


3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
EDR-3Mbps	2402	1.2590	1.1678	1.0029	0.83933
EDR-3Mbps	2440	1.2547	1.1635	1.0029	0.83647
EDR-3Mbps	2480	1.2590	1.1678	1.0029	0.83933
Result		Complied			


Worst 20dB Bandwidth Plots

EDR-3Mbps

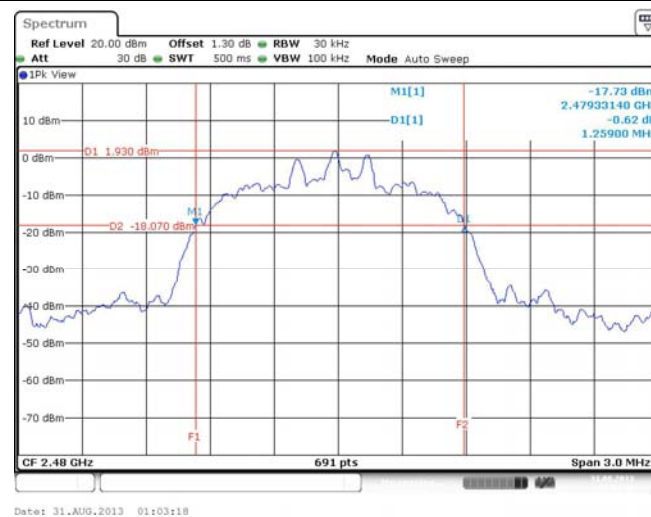

Worst Carrier Frequency Separation Plots

EDR-3Mbps

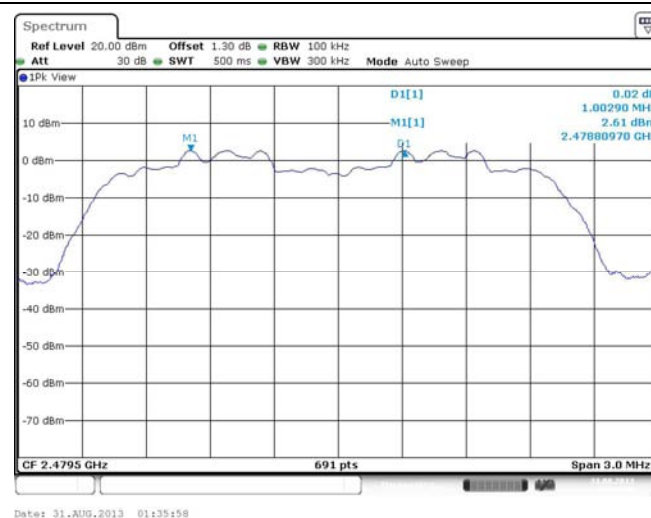

3.3 Number of Hopping Frequencies

3.3.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
☒	2400-2483.5 MHz Band:
☐	$N \geq 75$ and ChS $\geq$ MAX (20 dB bandwidth, 25 kHz).
☒	$N \geq 15$ and ChS $\geq$ MAX (20 dB bandwidth x 2/3, 25 kHz).
N: Number of Hopping Frequencies; ChS: Hopping Channel Separation	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.3.4 Test Setup

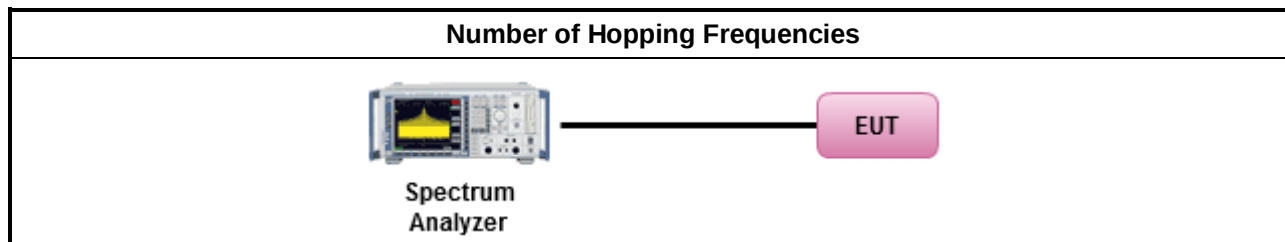

3.3.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result			
Modulation Mode	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
EDR-3Mbps	2402-2480	79	15
Result	Complied		

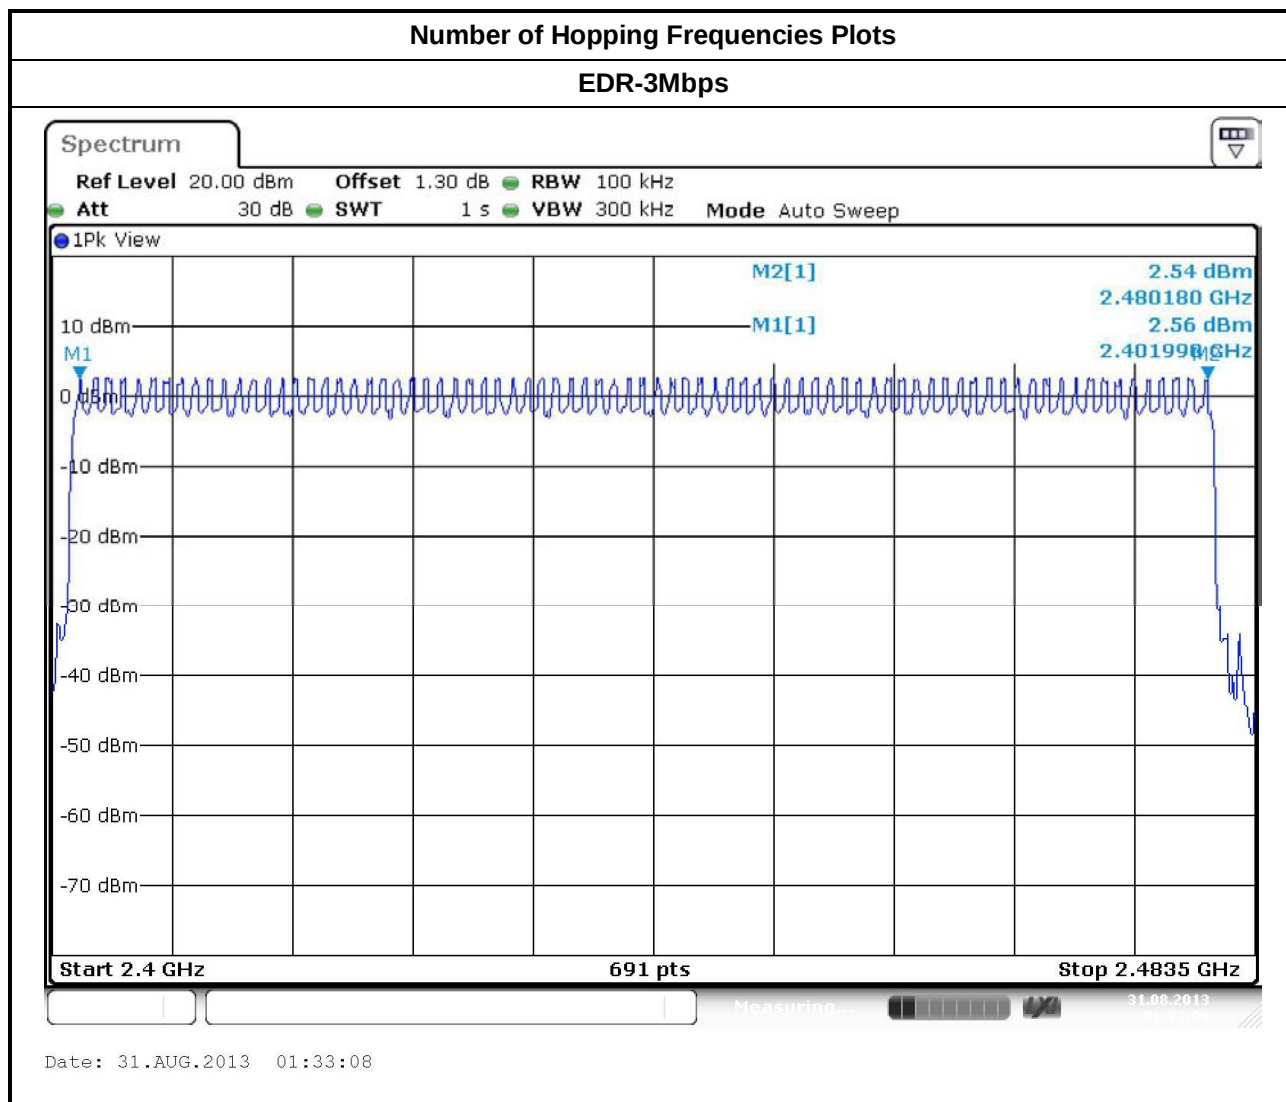

3.4 Time of Occupancy (Dwell Time)

3.4.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems	
☒	2400-2483.5 MHz Band: Dwell time ≤ 0.4 second within $0.4 \times N$
N: Number of Hopping Frequencies	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.
☒	Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.
☒	The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $1/1600$ seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
☒	The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
☒	The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.4.4 Test Setup

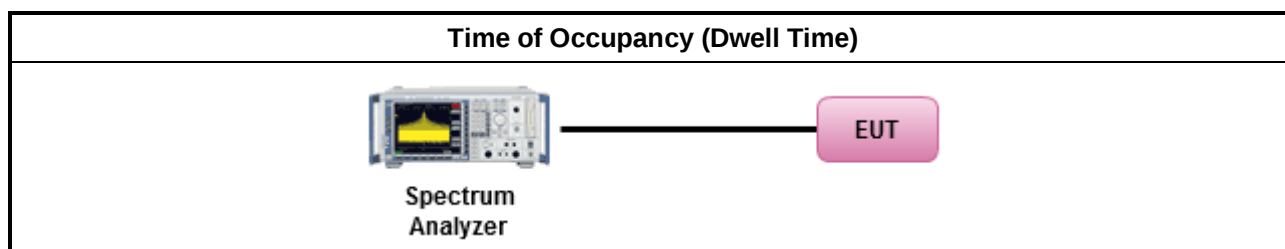

3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
EDR-3Mbps	2402	3.06	106.7	0.326	0.4
Result		Complied			
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.					

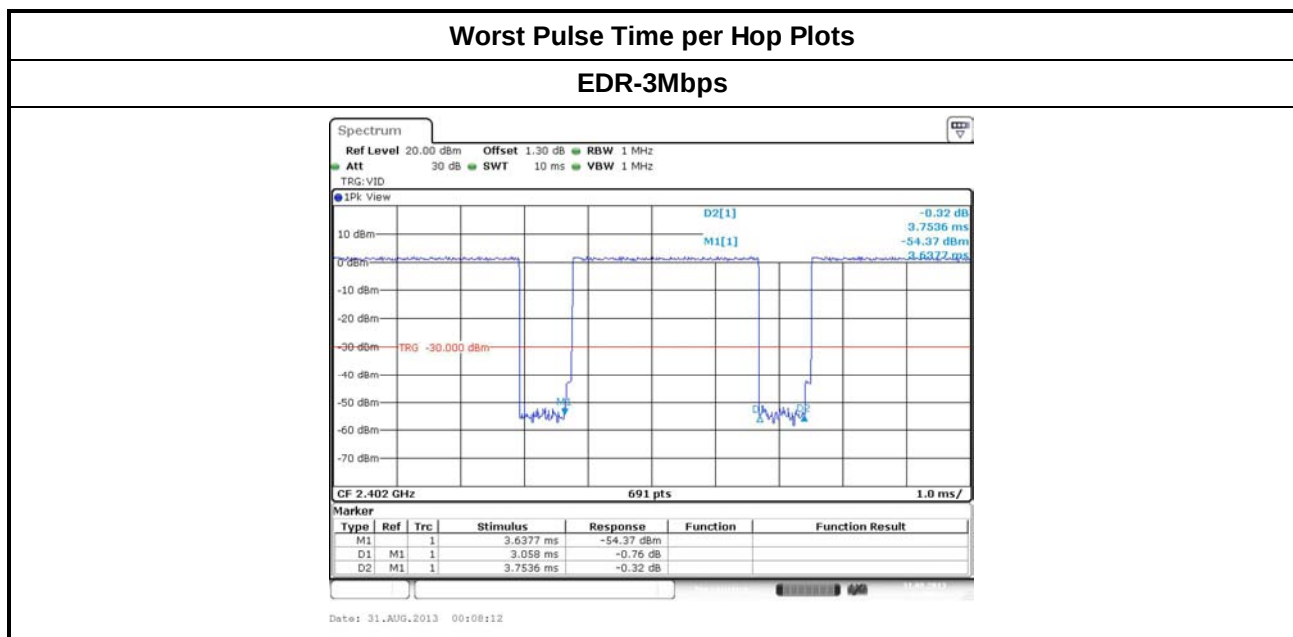

3.5 RF Output Power

3.5.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems	
Maximum Peak Conducted Output Power Limit	
☒ 2400-2483.5 MHz Band:	
	☐ For Hopping Channel: $N \geq 75$
	☐ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	☐ If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	☒ For Hopping Channel: $N \geq 15$
	☒ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 21$ dBm (0.125 W)
	☐ If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm
e.i.r.p. Power Limit:	
☒ 2400-2483.5 MHz Band:	
	☐ For Hopping Channel: $N \geq 75 - P_{eirp} \leq 36$ dBm (4 W)
	☒ For Hopping Channel: $N \geq 15 - P_{eirp} \leq 27$ dBm (0.5 W)
G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm. N: Number of Hopping Frequencies ChS: Hopping Channel Separation	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒ Maximum Peak Conducted Output Power	
	☐ Refer as FCC DA 00-0705, spectrum analyzer for peak power.
	☒ Refer as FCC DA 00-0705, peak power meter for peak power.
	☐ Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
	☐ Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW $\geq$ EBW).
☒ For conducted measurement.	
	☒ The EUT supports single transmit chain and measurements performed on this transmit chain.
	☐ The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.5.4 Test Setup

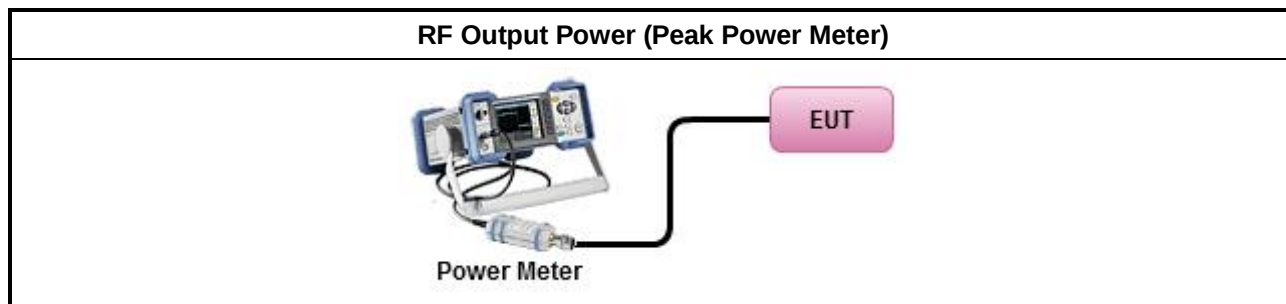

3.5.5 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	5.17	21	2.66	7.83	27
BR-1Mbps	2440	5.48	21	2.66	8.14	27
BR-1Mbps	2480	5.67	21	2.66	8.33	27
EDR-3Mbps	2402	3.89	21	2.66	6.55	27
EDR-3Mbps	2440	4.07	21	2.66	6.73	27
EDR-3Mbps	2480	4.04	21	2.66	6.70	27
Result		Complied				

3.5.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	Average Power	Duty Factor (dB)	RF Output Power	Antenna Gain (dBi)	EIRP Power
BR-1Mbps	2402	4.18	0.89	5.07	2.66	7.73
BR-1Mbps	2440	4.51	0.89	5.40	2.66	8.06
BR-1Mbps	2480	4.69	0.89	5.58	2.66	8.24
EDR-3Mbps	2402	0.62	0.89	1.51	2.66	4.17
EDR-3Mbps	2440	0.71	0.89	1.60	2.66	4.26
EDR-3Mbps	2480	0.68	0.89	1.57	2.66	4.23
Result		Complied				

3.6 Transmitter Radiated Bandedge Emissions

3.6.1 Transmitter Radiated Bandedge Emissions Limit

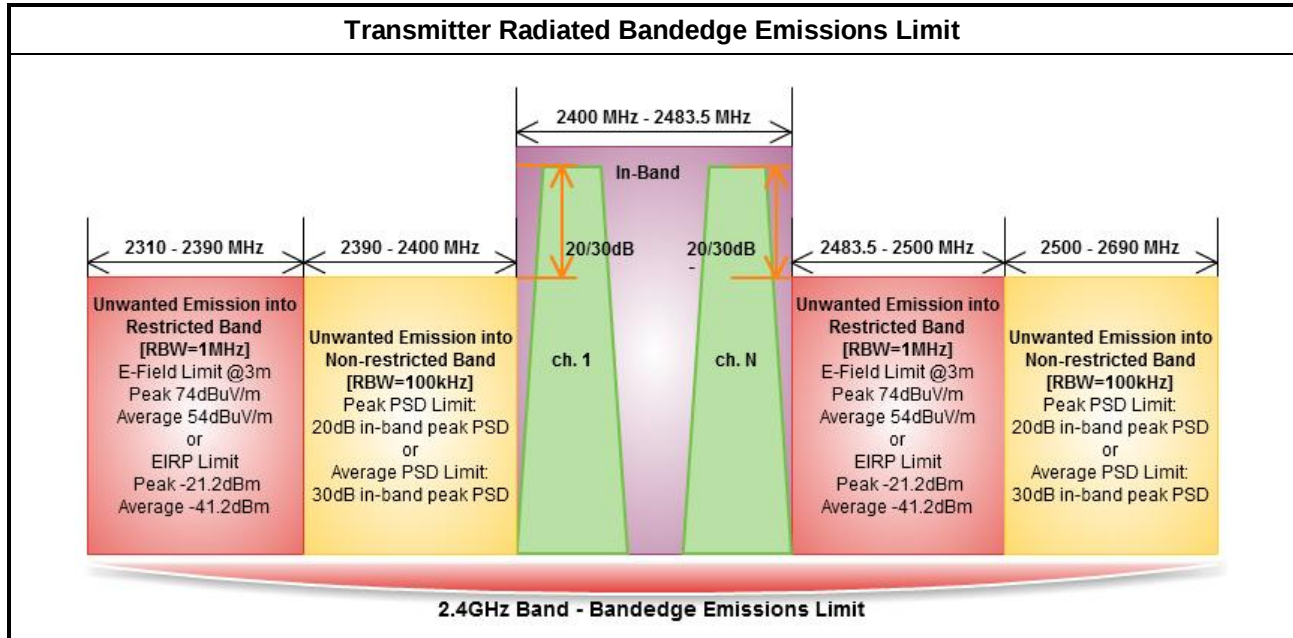


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method – General Information	
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
☒	For unwanted emissions into restricted bands.
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

3.6.4 Test Setup

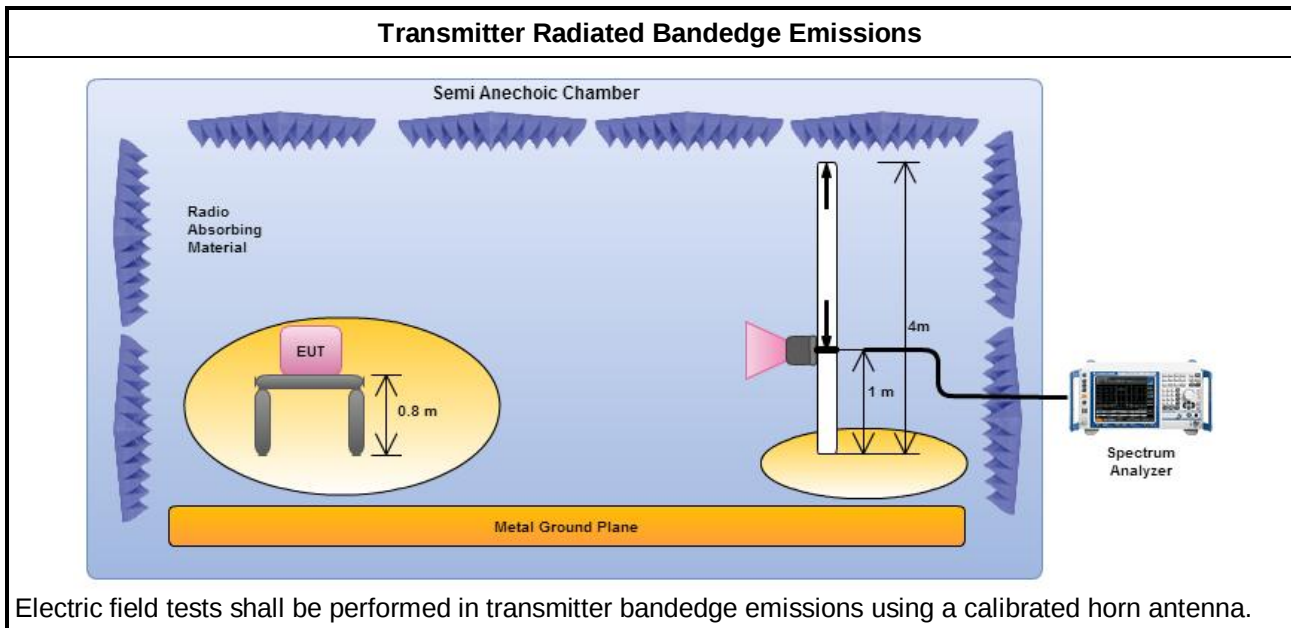

3.6.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
EDR-3Mbps	1	2402	99.24	2390.58	63.33	35.91	20	H
EDR-3Mbps	1	2480	96.76	2540.44	63.61	33.15	20	H
Note 1: Measurement worst emissions of receive antenna polarization								

Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
EDR-3Mbps	1	2402	3	2371.10	60.11	74	2390.00	47.43	54	H
EDR-3Mbps	1	2480	3	2483.61	60.25	74	2483.50	48.64	54	H
Note 1: Measurement worst emissions of receive antenna polarization.										
Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz										

3.7 Transmitter Radiated Unwanted Emissions

3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method – General Information	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$
☒	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
☒	For unwanted emissions into restricted bands.
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $\text{VBW} \geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.


3.7.4 Test Setup

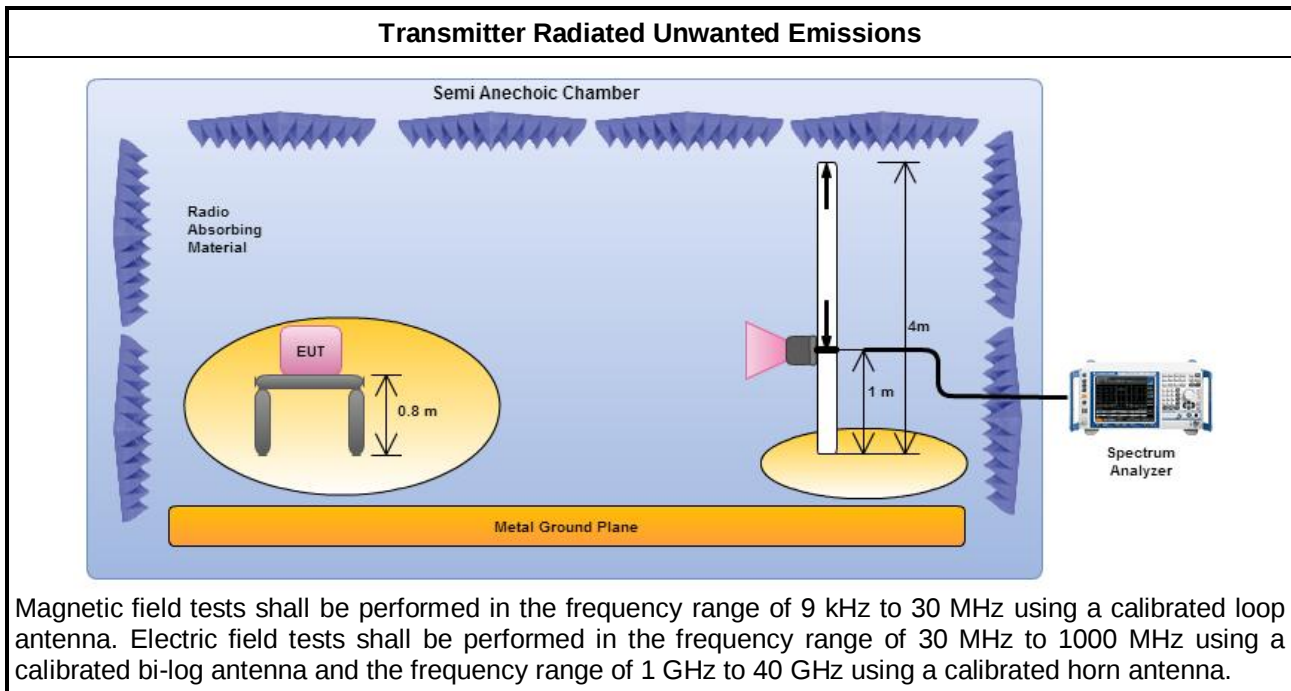

3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

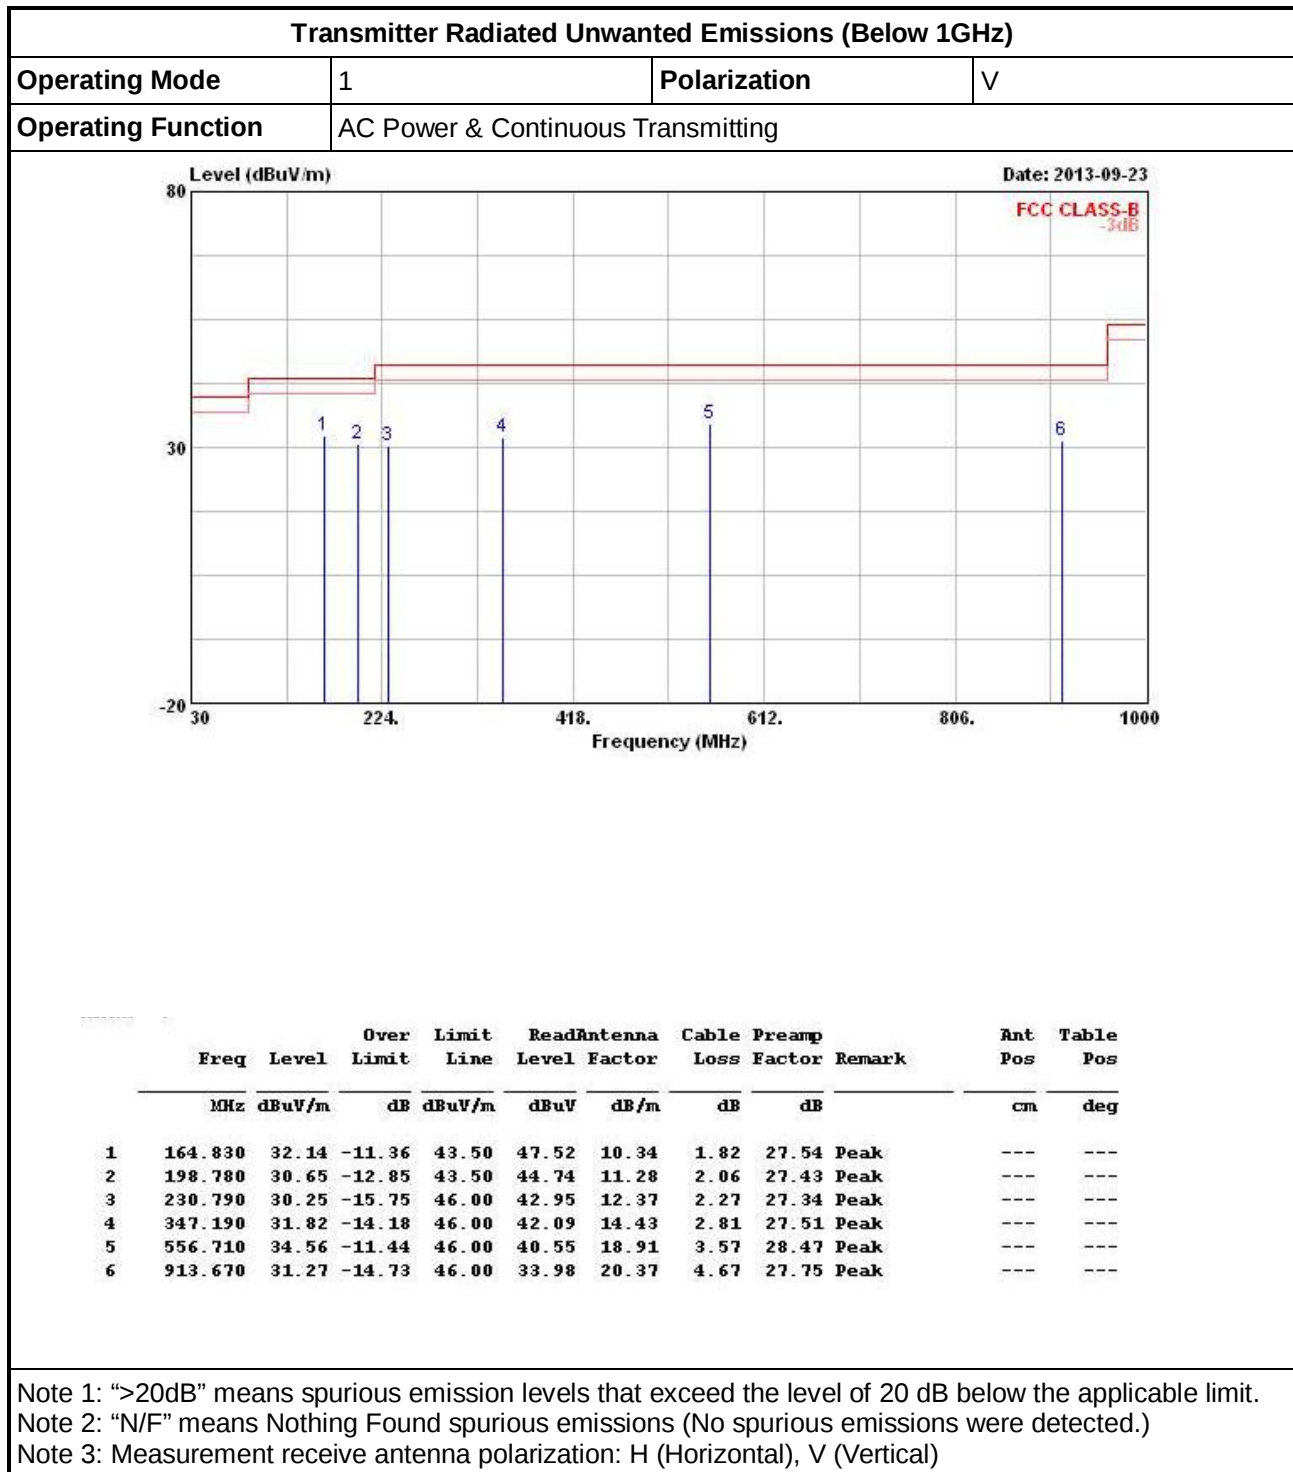

Transmitter Radiated Unwanted Emissions (Below 1GHz)


Operating Mode	1	Polarization	H
Operating Function	AC Power & Continuous Transmitting		

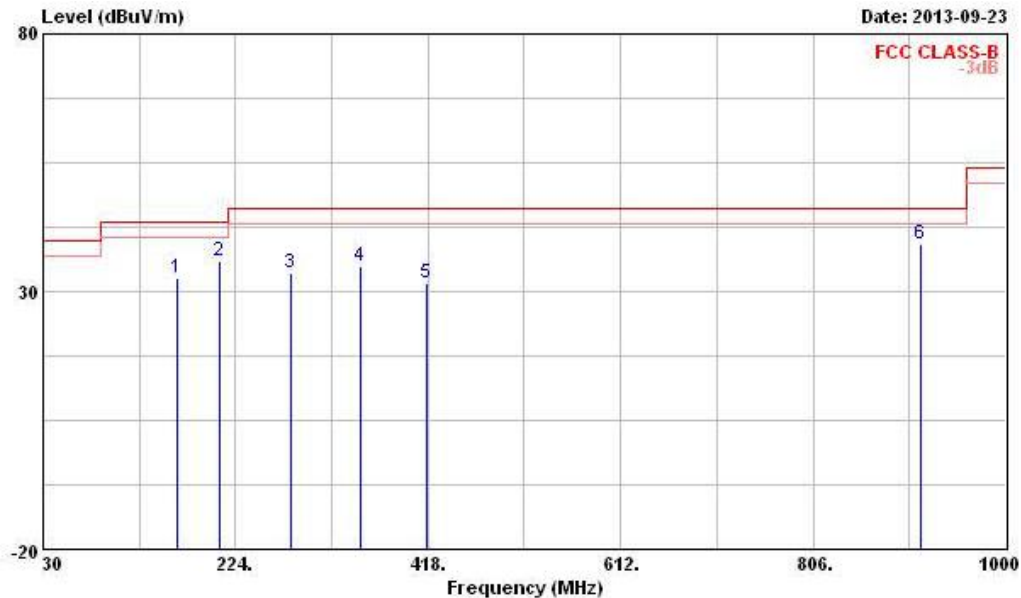

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	164.830	32.54	-10.96	43.50	47.92	10.34	1.82	27.54	Peak	---	---
2	207.510	35.93	-7.57	43.50	49.62	11.60	2.12	27.41	Peak	---	---
3	280.260	33.51	-12.49	46.00	44.79	13.43	2.49	27.20	Peak	---	---
4	350.100	35.06	-10.94	46.00	45.29	14.48	2.82	27.53	Peak	---	---
5	417.030	31.79	-14.21	46.00	41.13	15.61	3.04	27.99	Peak	---	---
6	913.670	39.20	-6.80	46.00	41.91	20.37	4.67	27.75	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

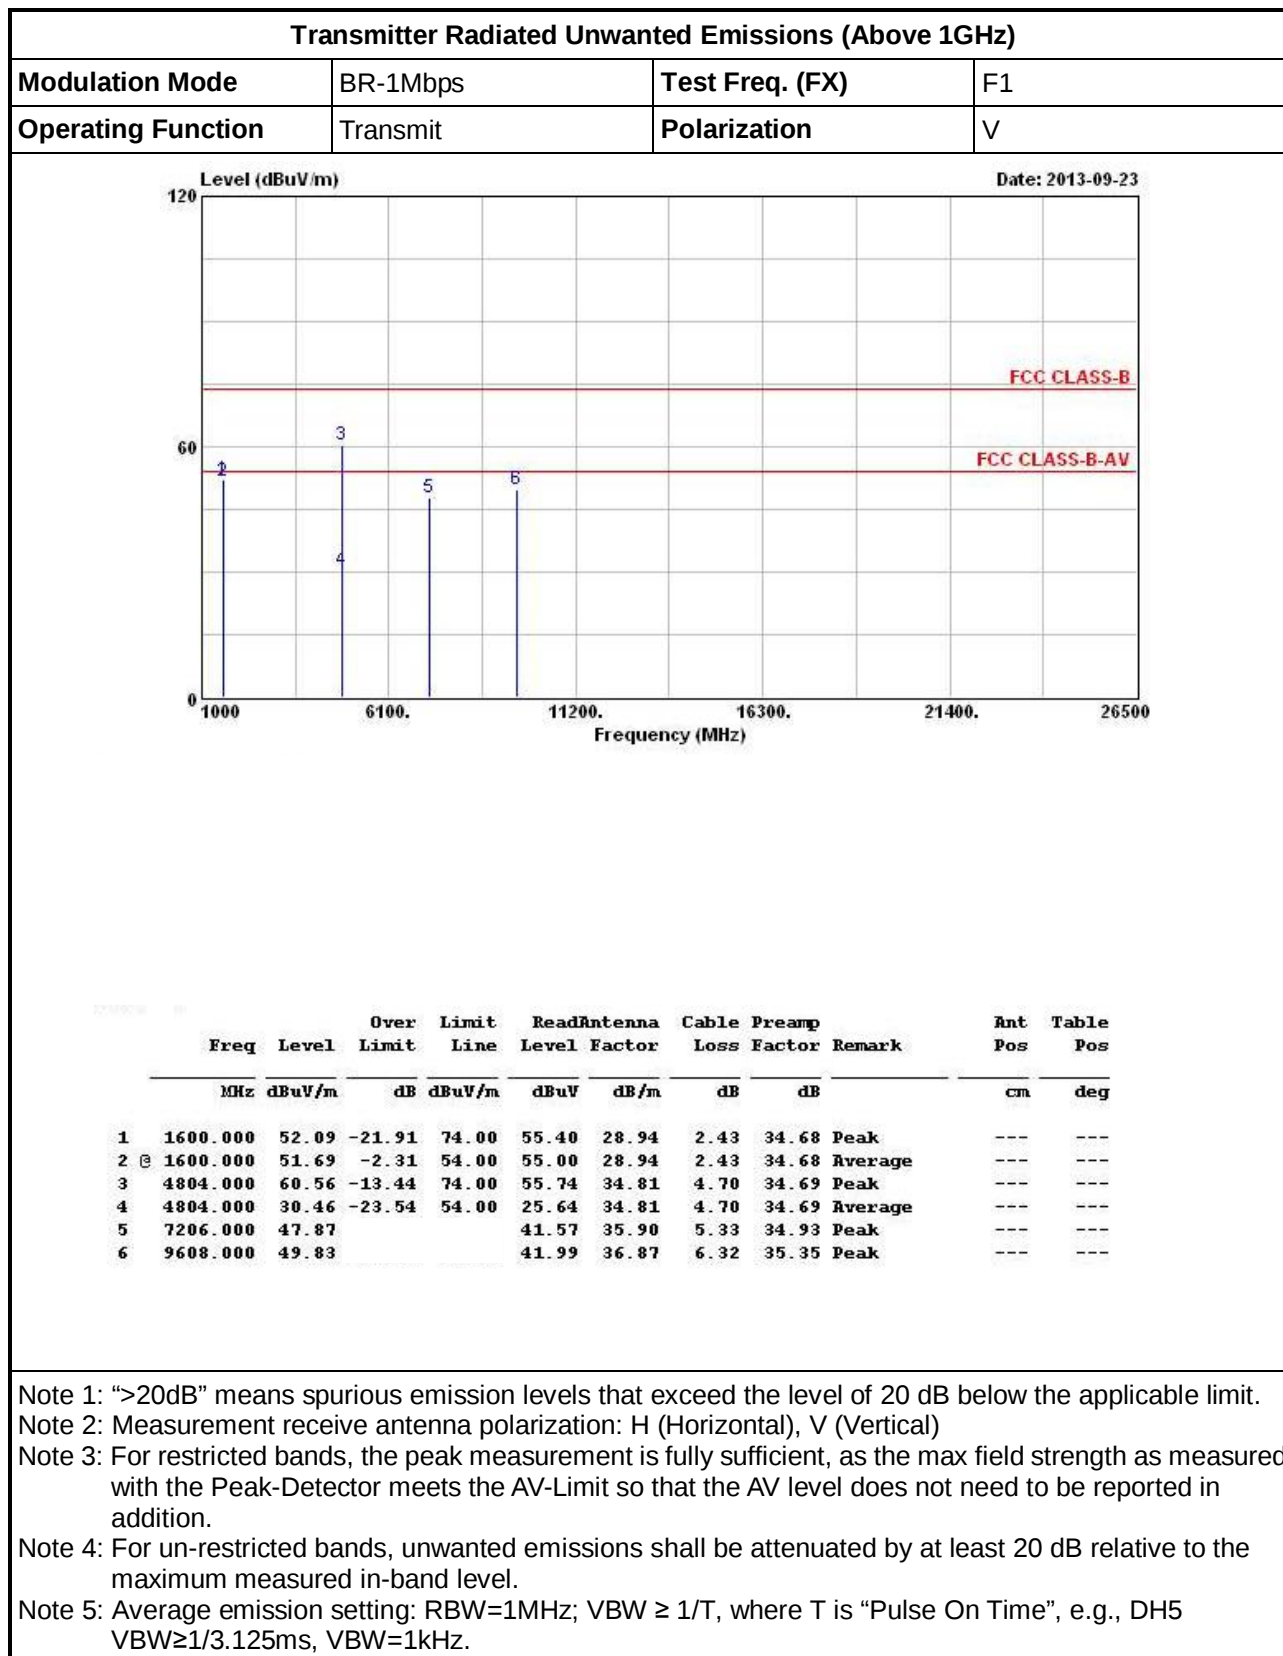

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

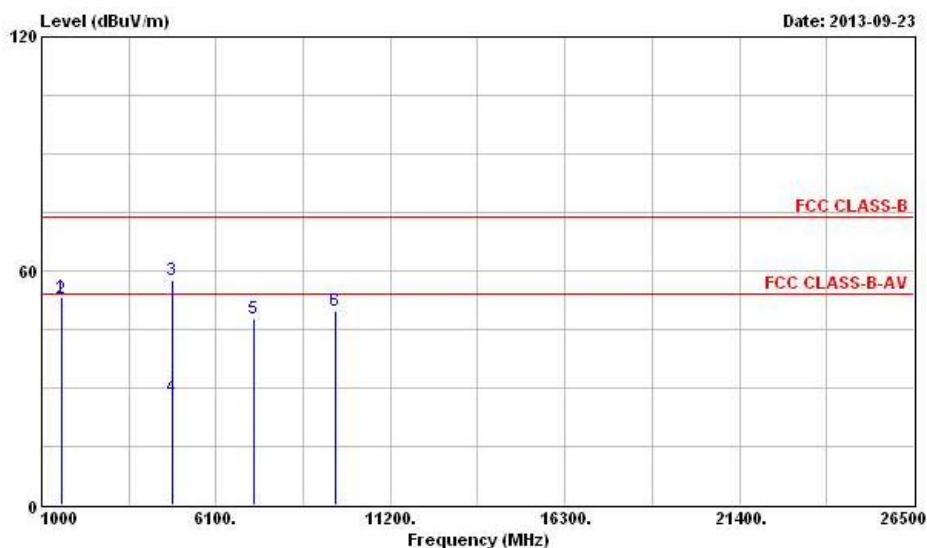


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1600.000	53.44	-20.56	74.00	56.75	28.94	2.43	34.68	Peak	---
2	1600.000	52.71	-1.29	54.00	56.02	28.94	2.43	34.68	Average	---
3	4804.000	57.76	-16.24	74.00	52.94	34.81	4.70	34.69	Peak	---
4	4804.000	27.66	-26.34	54.00	22.84	34.81	4.70	34.69	Average	---
5	7206.000	47.59			41.29	35.90	5.33	34.93	Peak	---
6	9608.000	49.73			41.89	36.87	6.32	35.35	Peak	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

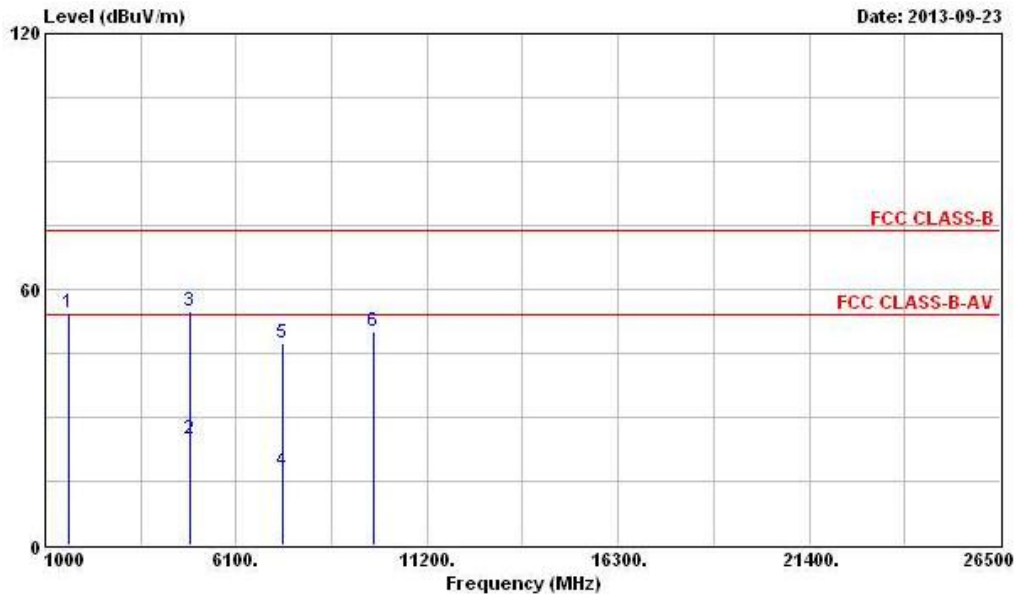


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1628.000	54.36			57.34	29.22	2.47	34.67	Peak	---	---
2	4880.000	24.96	-29.04	54.00	20.13	34.77	4.73	34.67	Average	---	---
3	4880.000	55.06	-18.94	74.00	50.23	34.77	4.73	34.67	Peak	---	---
4	7320.000	17.38	-36.62	54.00	10.97	35.90	5.47	34.96	Average	---	---
5	7320.000	47.48	-26.52	74.00	41.07	35.90	5.47	34.96	Peak	---	---
6	9760.000	50.20			42.01	37.11	6.44	35.36	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

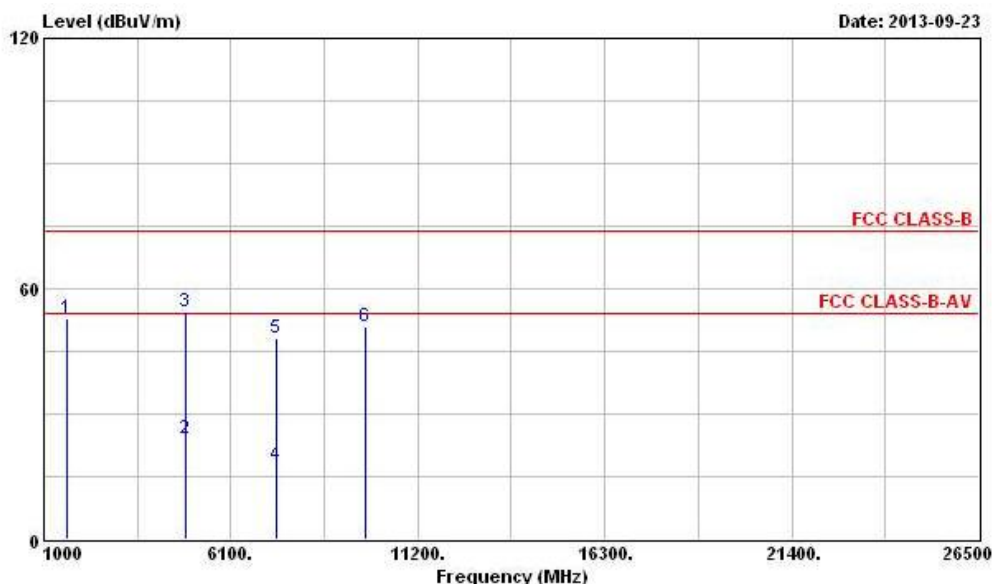


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1628.000	53.08			56.06	29.22	2.47	34.67	Peak	---	---
2	4880.000	24.21	-29.79	54.00	19.38	34.77	4.73	34.67	Average	---	---
3	4880.000	54.31	-19.69	74.00	49.48	34.77	4.73	34.67	Peak	---	---
4	7320.000	17.93	-36.07	54.00	11.52	35.90	5.47	34.96	Average	---	---
5	7320.000	48.03	-25.97	74.00	41.62	35.90	5.47	34.96	Peak	---	---
6	9760.000	50.94			42.75	37.11	6.44	35.36	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

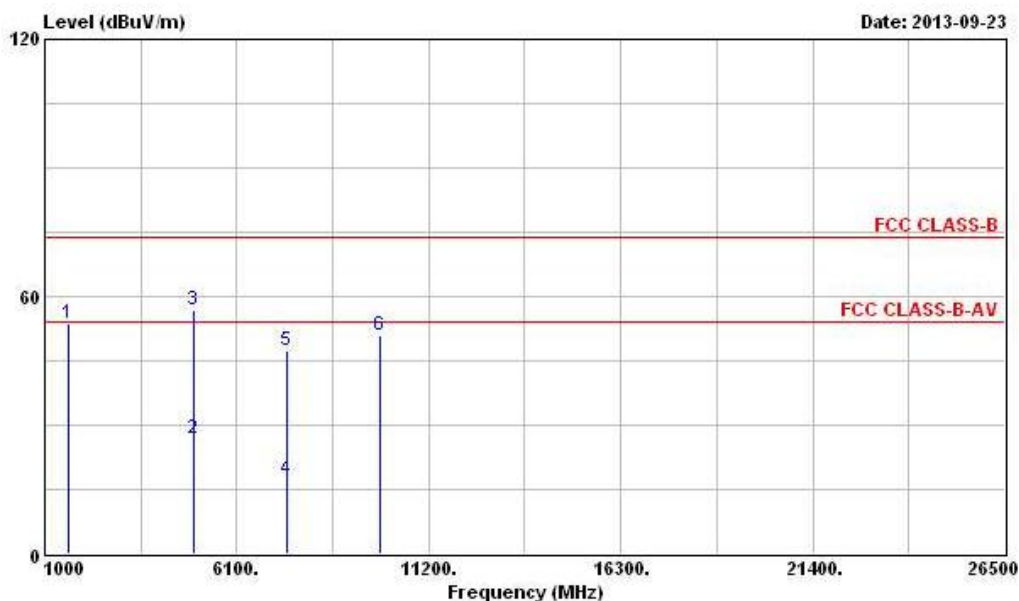

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1652.000	53.56			56.36	29.36	2.50	34.66	Peak	---	---
2	4960.000	26.86	-27.14	54.00	21.97	34.72	4.82	34.65	Average	---	---
3	4960.000	56.96	-17.04	74.00	52.07	34.72	4.82	34.65	Peak	---	---
4	7440.000	17.33	-36.67	54.00	10.80	35.90	5.61	34.98	Average	---	---
5	7440.000	47.43	-26.57	74.00	40.90	35.90	5.61	34.98	Peak	---	---
6	9920.000	50.91			42.33	37.39	6.56	35.37	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

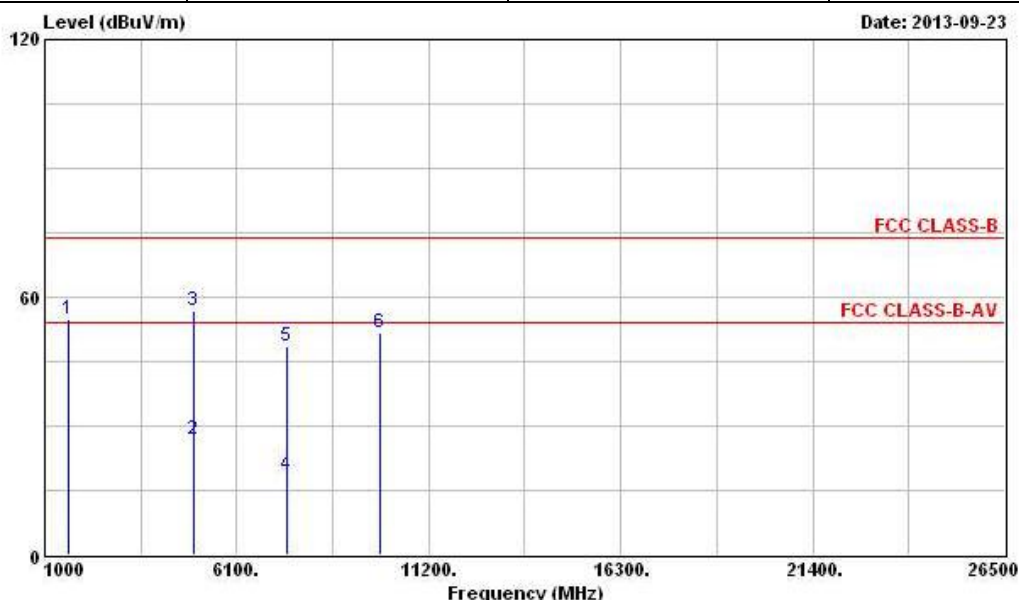

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1652.000	54.90			57.70	29.36	2.50	34.66 Peak	---	---
2	4960.000	26.91	-27.09	54.00	22.02	34.72	4.82	34.65 Average	---	---
3	4960.000	57.01	-16.99	74.00	52.12	34.72	4.82	34.65 Peak	---	---
4	7440.000	18.64	-35.36	54.00	12.11	35.90	5.61	34.98 Average	---	---
5	7440.000	48.74	-25.26	74.00	42.21	35.90	5.61	34.98 Peak	---	---
6	9920.000	51.63			43.05	37.39	6.56	35.37 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz ~ 2.75GHz	Nov. 14, 2012	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz ~ 30MHz	Dec. 28, 2012	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz ~ 30MHz	Jan. 08, 2013	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010001	9kHz ~ 30MHz	Mar. 01, 2013	Conduction (CO01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 29, 2013	Conducted (TH06-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH06-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	-20 ~ 100℃	Nov. 21, 2012	Conducted (TH06-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 11, 2013	Conducted (TH06-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 11, 2013	Conducted (TH06-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345673/4	30MHz ~ 26.5GHz	Dec. 04, 2012	Conducted (TH06-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	30MHz ~ 26.5GHz	Dec. 04, 2012	Conducted (TH06-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct 03, 2013	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul 17, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 28, 2013	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Magnetic Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.