

FCC

RF Test Report

Product Type : Rugged Handheld Computer

Applicant : Unitech Electronics Co., Ltd.

Address : 5F., No.136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan 231, R.O.C.

Trade Name : unitech

Model Number : PA820

Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Receive Date : Mar. 19, 2015

Test Period : Mar. 25 ~ Oct. 23, 2015

Issue Date : Nov. 02, 2015

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Nov. 02, 2015	Initial Issue	

Verification of Compliance

Issued Date: 11/02/2015

Product Type : Rugged Handheld Computer
Applicant : Unitech Electronics Co., Ltd.
Address : 5F., No.136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan 231, R.O.C.
Trade Name : unitech
Model Number : PA820
FCC ID : HLEPA820BTNP
EUT Rated Voltage : DC 5V, 1A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Fly Lu

(Manager)

(Fly Lu)

Reviewed By

: Eric Ou Yang

(Testing Engineer)

(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information.....	6
1.1.	Summary of Test Result	6
1.2.	Measurement Uncertainty	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	10
4	Maximum Conducted Output Power Measurement	11
4.1.	Limit.....	11
4.2.	Test Setup	11
4.3.	Test Instruments	11
4.4.	Test Procedure	11
4.5.	Test Result	12
5	Conducted Emission Measurement.....	13
5.1.	Limit.....	13
5.2.	Test Instruments	13
5.3.	Test Setup	13
5.4.	Test Procedure	14
5.5.	Test Result	15
6	Radiated Interference Measurement.....	17
6.1.	Limit.....	17
6.2.	Test Instruments	17
6.3.	Setup	18
6.4.	Test Procedure	20
6.5.	Test Result	21
7	20dB RF Bandwidth Measurement.....	25
7.1.	Limit.....	25
7.2.	Test Setup	25
7.3.	Test Instruments	25
7.4.	Test Procedure	26
7.5.	Test Result	27
7.6.	Test Graphs	28

8	Carrier Frequency Separation Measurement.....	30
8.1.	Limit.....	30
8.2.	Test Setup	30
8.3.	Test Instruments	30
8.4.	Test Procedure	31
8.5.	Test Result	32
8.6.	Test Graphs	33
9	Number of Hopping Measurement	35
9.1.	Limit.....	35
9.2.	Test Setup	35
9.3.	Test Instruments	35
9.4.	Test Procedure	35
9.5.	Test Result	36
9.6.	Test Graphs	37
10	Time of Occupancy (Dwell Time) Measurement	39
10.1.	Limit.....	39
10.2.	Test Setup	39
10.3.	Test Instruments	39
10.4.	Test Procedure	39
10.5.	Test Result	40
10.6.	Test Graphs	41
11	Out of Band Conducted Emissions Measurement	42
11.1.	Limit.....	42
11.2.	Test Setup	42
11.3.	Test Instruments	42
11.4.	Test Procedure	42
11.5.	Test Graphs	43
12	Band Edges Measurement	47
12.1.	Limit.....	47
12.2.	Test Setup	47
12.3.	Test Instruments	47
12.4.	Test Procedure	48
12.5.	Test Result	49
13	Antenna Measurement	53
13.1.	Limit.....	53
13.2.	Antenna Connector Construction	53

1 General Information

1.1. Summary of Test Result

FCC Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----
15.247(b)(1)	Max. Output Power	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	20dB RF Bandwidth	PASS	-----
15.247(a)(1)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	Band Edge Measurement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.8
Radiated Emission	30MHz ~ 1000MHz	6.300
	1000MHz ~ 18000MHz	5.474
	18000MHz ~ 26500MHz	5.630
	26500MHz ~ 40000MHz	5.054

2 EUT Description

Product	Rugged Handheld Computer				
Trade Name	unitech				
Model Number	PA820				
Applicant	Unitech Electronics Co., Ltd. 5F., No.136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan 231, R.O.C.				
Manufacturer	Unitech Electronics Co., Ltd. 5F., No.136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan 231, R.O.C.				
FCC ID	HLEPA820BTNP				
Frequency Range	2402 ~ 2480 MHz				
Modulation Type	GFSK for 1Mbps				
	$\pi/4$ -DQPSK for 2Mbps				
	8DPSK for 3Mbps				
Antenna Type	Chip Antenna				
Antenna Gain	1.1 dBi				
RF Output Power (Conducted)	GFSK for 1Mbps	3.43	dBm /	0.002	W
	$\pi/4$ -DQPSK for 2Mbps	6.10	dBm /	0.004	W
	8DPSK for 3Mbps	6.15	dBm /	0.004	W

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode
Mode 1: Normal Operation Mode
Mode 2: GFSK Link Mode
Mode 3: $\pi/4$ -DQPSK Link Mode
Mode 4: 8DPSK Link Mode

Final-Test Mode
Mode 1: Normal Operation Mode
Mode 2: GFSK Link Mode
Mode 4: 8DPSK Link Mode

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 4.5. Investigation has been done on all the possible configurations for searching the worst cases.

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:


	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA

3.2. EUT Exercise Software


1	Setup the EUT and Bluetooth Tester (CBT) as shown on 3.3.
2	Turn on the power of all equipment.
3	Open Bluetooth function link to CBT.
4	EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

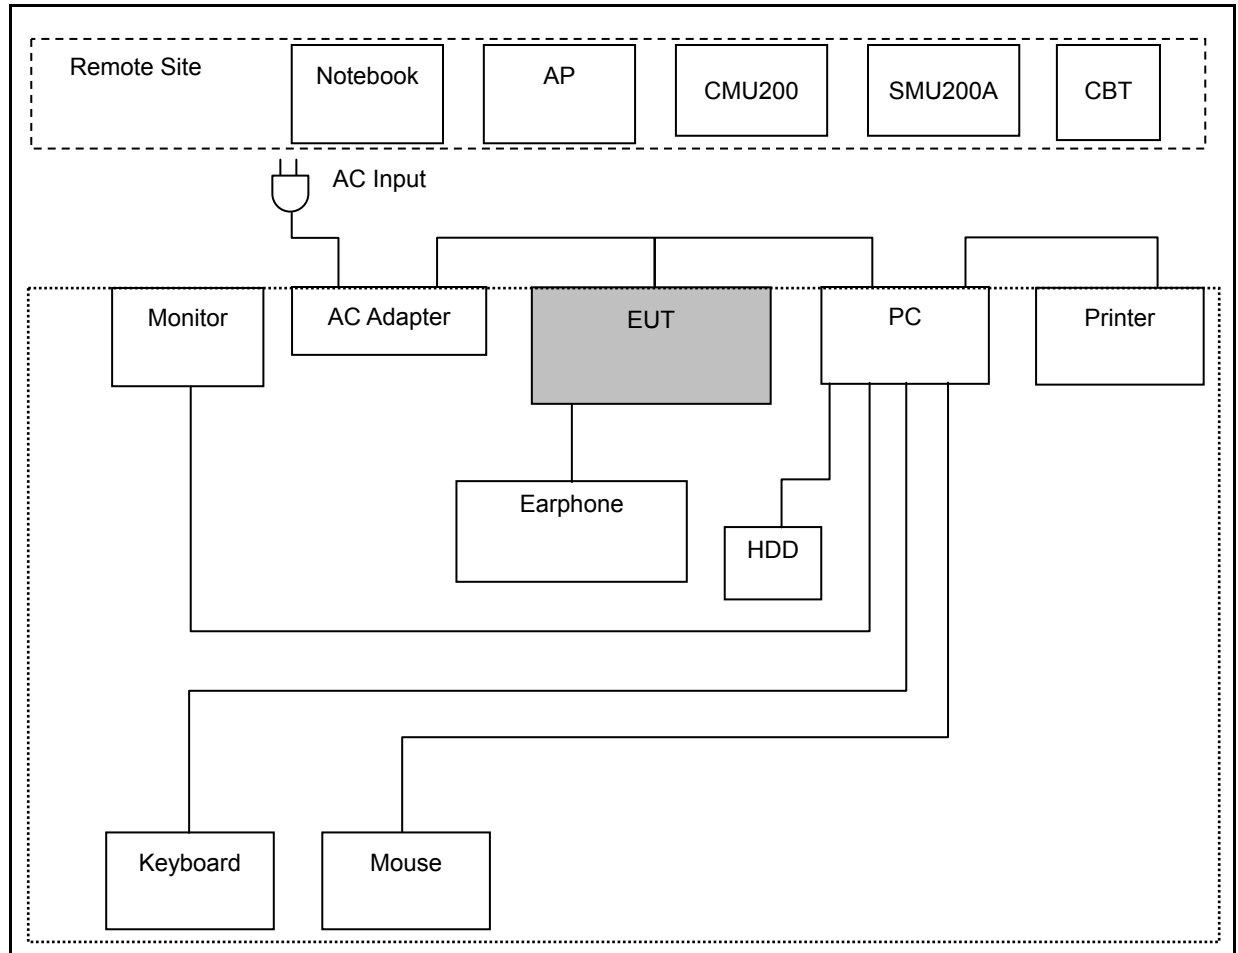

Radiated Emission

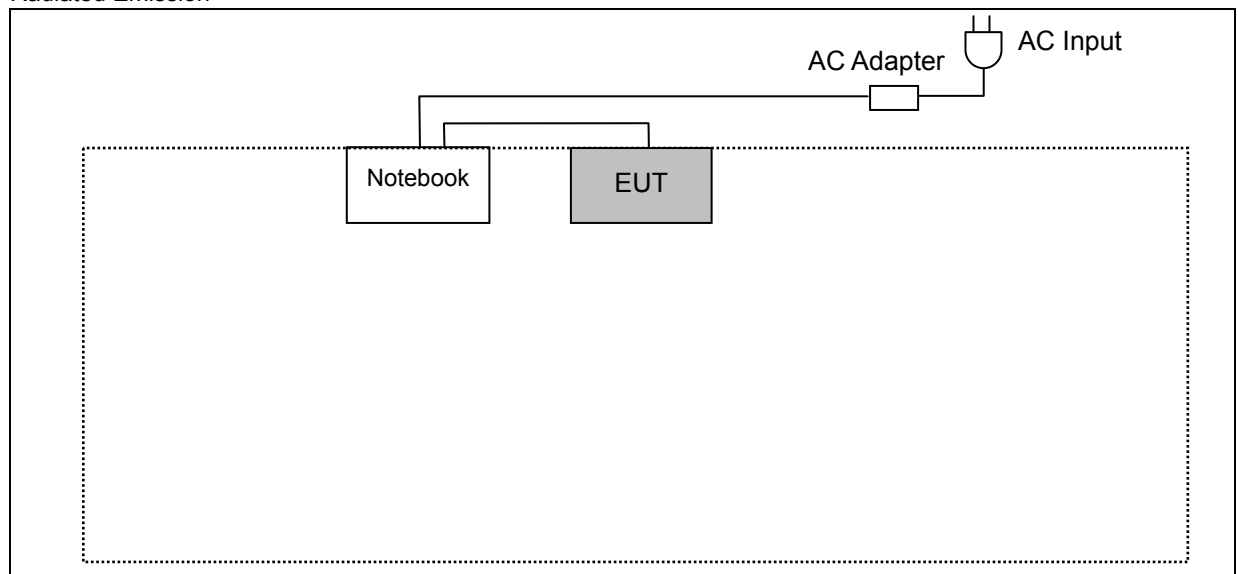

3.4. Test Site Environment


Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Maximum Conducted Output Power Measurement

4.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 0.125 watt.

4.2. Test Setup

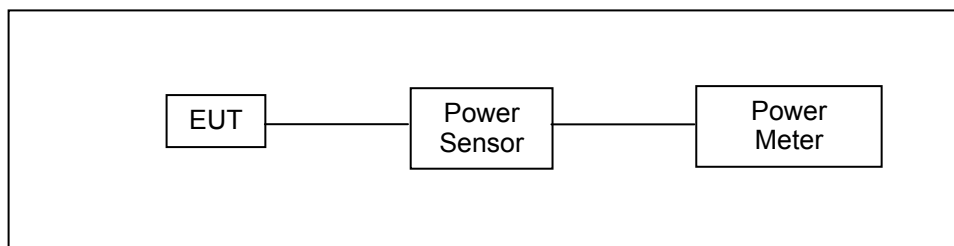

4.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/15/2014	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/15/2014	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/24/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

4.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

4.5. Test Result

Model Number	PA820						
Test Item	Maximum Conducted Output Power						
Test Mode	Mode 2 / Mode 3 / Mode 4						
Date of Test	03/25/2015			Test Site	TE02		
Test Mode	Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
			(dBm)	(W)	(dBm)	(W)	
Mode 2	2402	DH5	1.33	0.00136	1.99	0.00158	< 0.125
	2441	DH5	2.27	0.00169	2.77	0.00189	< 0.125
	2480	DH5	2.78	0.00190	3.43	0.00220	< 0.125
Mode 3	2402	2DH5	1.46	0.00140	4.55	0.00285	< 0.125
	2441	2DH5	2.40	0.00174	5.76	0.00377	< 0.125
	2480	2DH5	2.93	0.00196	6.10	0.00407	< 0.125
Mode 4	2402	3DH5	1.49	0.00141	4.62	0.00290	< 0.125
	2441	3DH5	2.43	0.00175	5.82	0.00382	< 0.125
	2480	3DH5	2.95	0.00197	6.15	0.00412	< 0.125

Note: The relevant measured result has the offset with cable loss already.

5 Conducted Emission Measurement

5.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


5.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/12/2014	(1)
LISN	R&S	ENV216	101040	03/10/2015	(1)
LISN	R&S	ENV216	101041	03/06/2015	(1)
RF Cable	EMCI	RG 214/U	TE-02	06/30/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

5.3. Test Setup

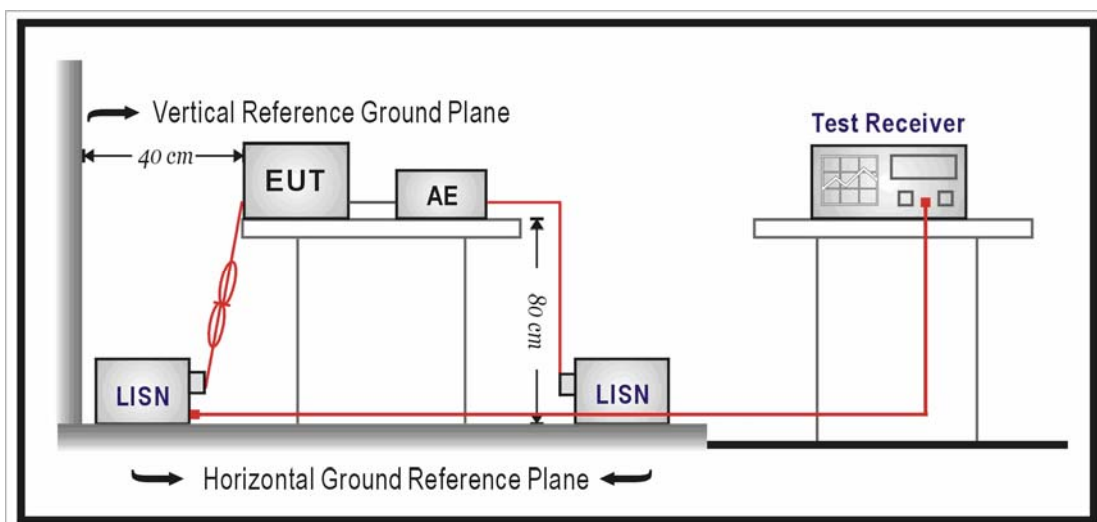

5.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

5.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PA820	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	03/25/2015
		Test By:	Eric Ou Yang
Description:			

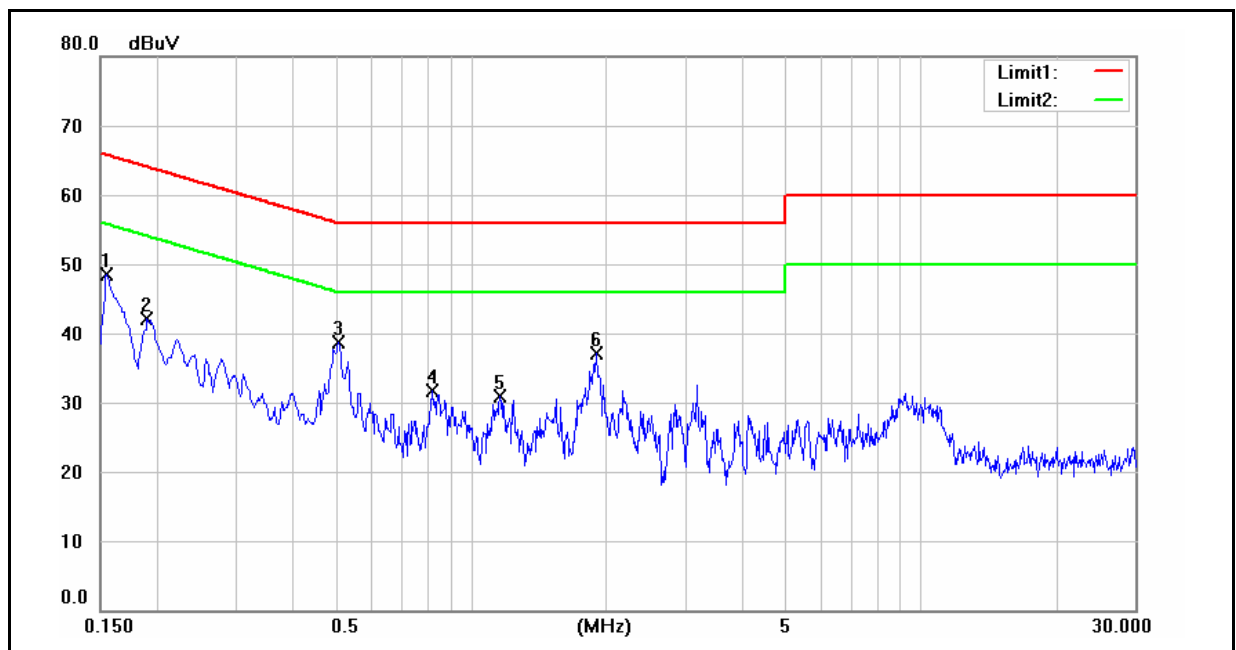


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1548	36.24	24.20	9.60	45.84	33.80	65.74	55.74	-19.90	-21.94	Pass
2	0.1905	33.31	23.47	9.60	42.91	33.07	64.01	54.01	-21.10	-20.94	Pass
3	0.5101	26.39	18.30	9.62	36.01	27.92	56.00	46.00	-19.99	-18.08	Pass
4	0.8251	19.10	11.05	9.64	28.74	20.69	56.00	46.00	-27.26	-25.31	Pass
5	1.1627	17.88	9.98	9.66	27.54	19.64	56.00	46.00	-28.46	-26.36	Pass
6	1.9054	24.39	13.46	9.69	34.08	23.15	56.00	46.00	-21.92	-22.85	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PA820	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	03/25/2015
		Test By:	Eric Ou Yang
Description:			

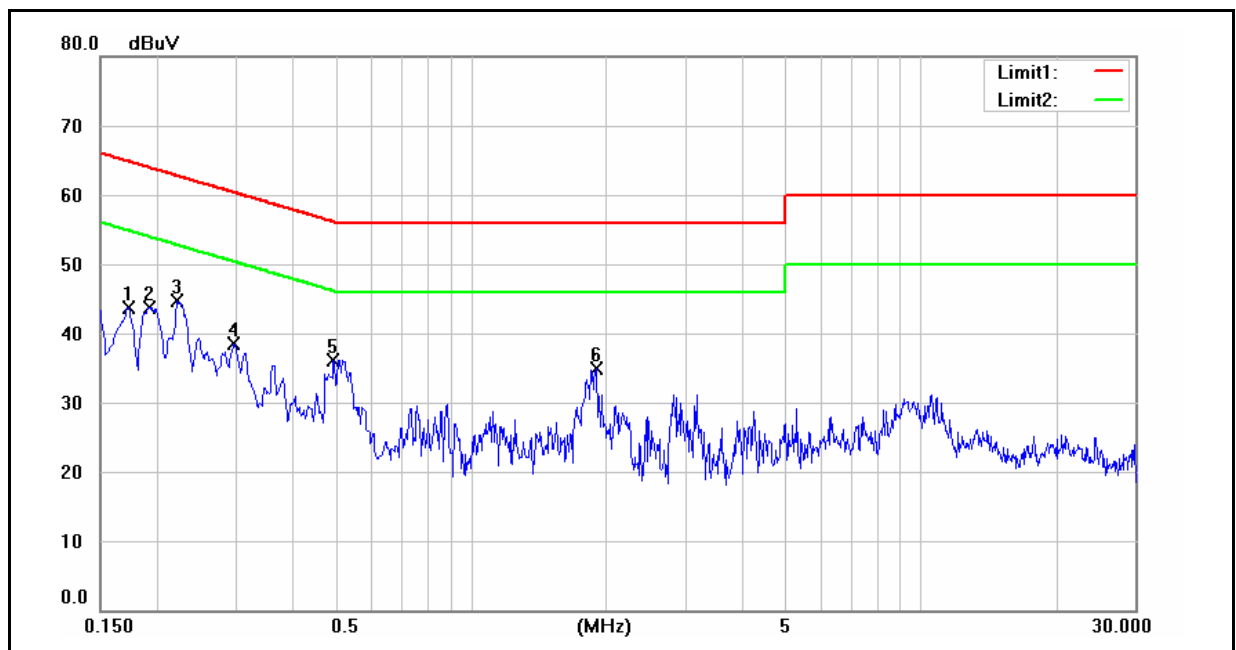

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1731	35.36	24.53	9.60	44.96	34.13	64.81	54.81	-19.85	-20.68	Pass
2	0.1924	32.42	23.46	9.60	42.02	33.06	63.93	53.93	-21.91	-20.87	Pass
3	0.2220	28.98	19.42	9.60	38.58	29.02	62.74	52.74	-24.16	-23.72	Pass
4	0.2985	21.89	14.49	9.61	31.50	24.10	60.28	50.28	-28.78	-26.18	Pass
5	0.4966	26.14	17.90	9.62	35.76	27.52	56.06	46.06	-20.30	-18.54	Pass
6	1.9010	22.25	13.70	9.70	31.95	23.40	56.00	46.00	-24.05	-22.60	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

6 Radiated Interference Measurement

6.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

6.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	08/11/2015	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/06/2015	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/02/2015	(1)
Microwave Cable	EMCI	EMC-104-SM-S M-14000	140202	02/24/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-600	140301	02/24/2015	(1)
Test Site	ATL	TE01	888001	08/27/2015	(1)

Remark: (1) Calibration period 1 year.


NOTE: N.C.R. = No Calibration Request.

6.3. Setup


9kHz ~ 30MHz

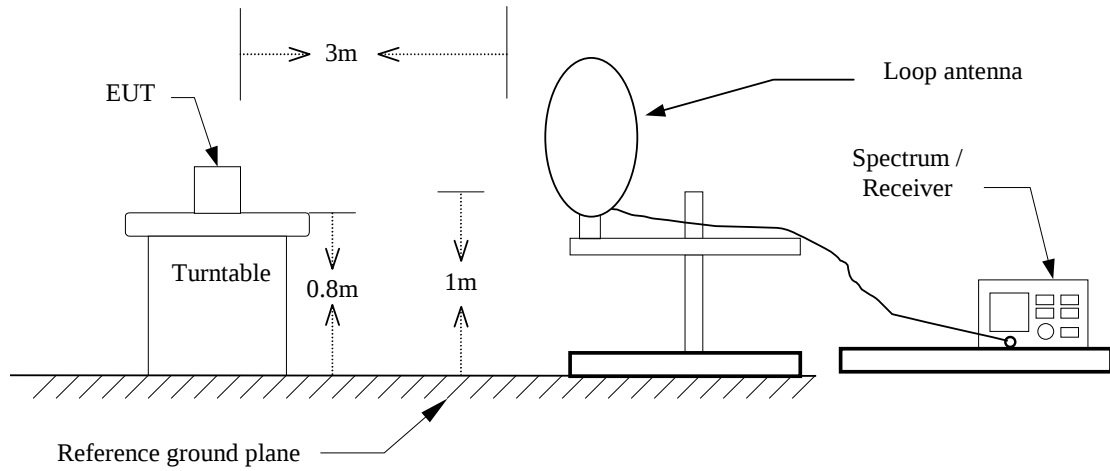

Below 1GHz

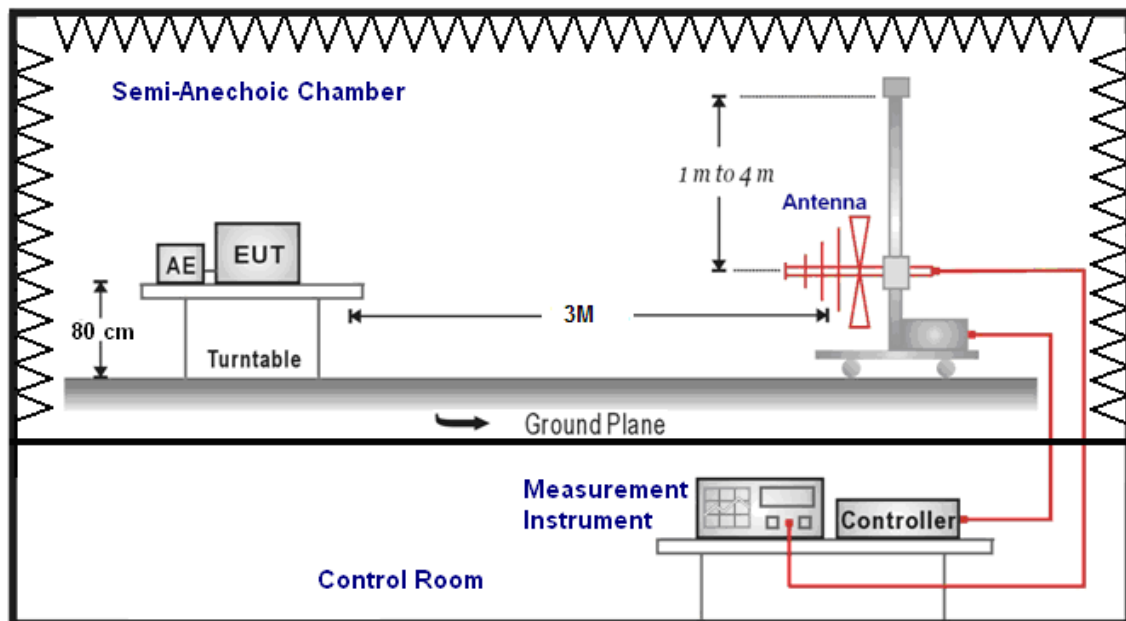

Above 1GHz

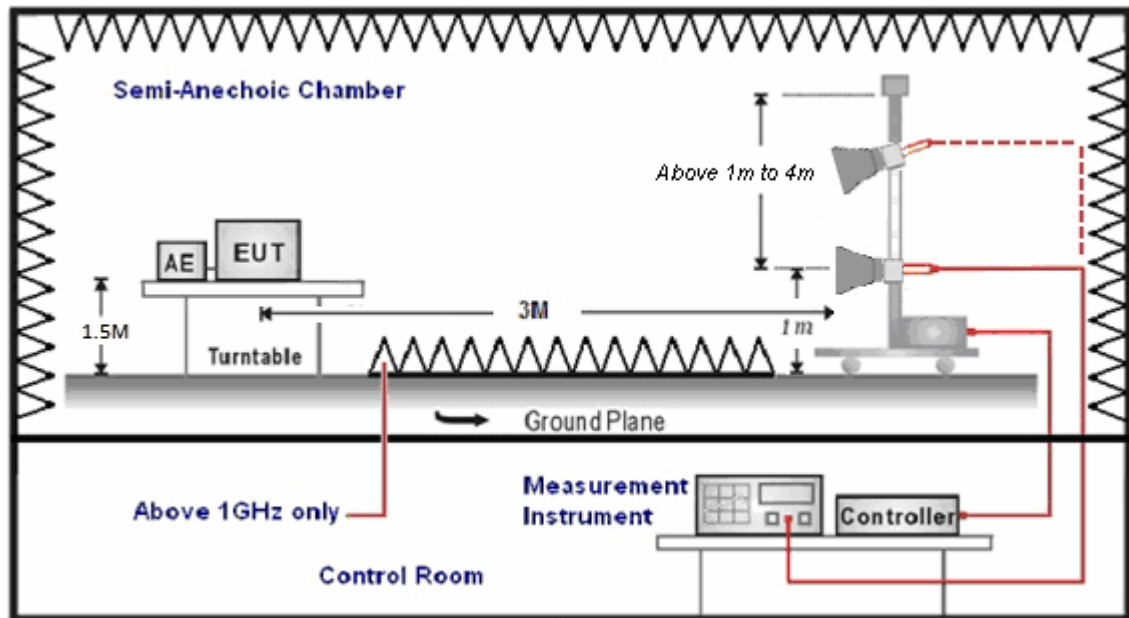

6.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PA820		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		10/23/2015	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
261.5000	40.76	-10.94	29.82	46.00	-16.18	QP	H
345.5000	39.33	-8.57	30.76	46.00	-15.24	QP	H
545.5000	29.66	-4.57	25.09	46.00	-20.91	QP	H
684.0000	28.07	-1.80	26.27	46.00	-19.73	QP	H
870.5000	27.02	1.87	28.89	46.00	-17.11	QP	H
912.5000	25.68	2.82	28.50	46.00	-17.50	QP	H
60.5000	38.46	-11.91	26.55	40.00	-13.45	QP	V
382.5000	38.03	-7.74	30.29	46.00	-15.71	QP	V
422.0000	37.32	-6.88	30.44	46.00	-15.56	QP	V
499.5000	37.56	-5.43	32.13	46.00	-13.87	QP	V
831.5000	27.26	0.99	28.25	46.00	-17.75	QP	V
947.5000	25.94	3.17	29.11	46.00	-16.89	QP	V

Note: No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PA820			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	2			Date:	10/23/2015		
Frequency:	2402 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3177.000	43.56	3.10	46.66	74.00	-27.34	peak	H
4640.000	42.08	6.21	48.29	74.00	-25.71	peak	H
6579.000	40.10	9.17	49.27	74.00	-24.73	peak	H
3065.000	43.70	2.94	46.64	74.00	-27.36	peak	V
4661.000	41.71	6.23	47.94	74.00	-26.06	peak	V
6712.000	39.43	9.28	48.71	74.00	-25.29	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PA820			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	10/23/2015		
Frequency:	2441 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3149.000	42.34	3.06	45.40	74.00	-28.60	peak	H
4486.000	40.11	5.98	46.09	74.00	-27.91	peak	H
6502.000	38.72	9.10	47.82	74.00	-26.18	peak	H
3065.000	42.51	2.94	45.45	74.00	-28.55	peak	V
4542.000	40.85	6.07	46.92	74.00	-27.08	peak	V
6733.000	38.46	9.31	47.77	74.00	-26.23	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PA820		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		2		Date:		10/23/2015	
Frequency:		2480 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2974.000	43.16	2.78	45.94	74.00	-28.06	peak	H
4633.000	40.36	6.19	46.55	74.00	-27.45	peak	H
6698.000	38.85	9.27	48.12	74.00	-25.88	peak	H
3079.000	43.89	2.96	46.85	74.00	-27.15	peak	V
4493.000	40.14	5.99	46.13	74.00	-27.87	peak	V
6747.000	38.31	9.33	47.64	74.00	-26.36	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PA820			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	10/23/2015		
Frequency:	2402 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	42.49	2.88	45.37	74.00	-28.63	peak	H
4535.000	40.94	6.06	47.00	74.00	-27.00	peak	H
6621.000	38.35	9.21	47.56	74.00	-26.44	peak	H
3086.000	43.57	2.97	46.54	74.00	-27.46	peak	V
4563.000	39.67	6.10	45.77	74.00	-28.23	peak	V
6719.000	38.75	9.30	48.05	74.00	-25.95	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PA820			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	4			Date:	10/23/2015		
Frequency:	2441 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3163.000	42.63	3.09	45.72	74.00	-28.28	peak	H
4759.000	39.18	6.37	45.55	74.00	-28.45	peak	H
6747.000	38.52	9.33	47.85	74.00	-26.15	peak	H
3079.000	44.24	2.96	47.20	74.00	-26.80	peak	V
4654.000	40.81	6.23	47.04	74.00	-26.96	peak	V
6726.000	38.84	9.30	48.14	74.00	-25.86	peak	V


Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PA820		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		4		Date:		10/23/2015	
Frequency:		2480 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3079.000	43.14	2.96	46.10	74.00	-27.90	peak	H
4549.000	40.01	6.08	46.09	74.00	-27.91	peak	H
6733.000	38.45	9.31	47.76	74.00	-26.24	peak	H
3107.000	42.59	3.00	45.59	74.00	-28.41	peak	V
4514.000	40.15	6.03	46.18	74.00	-27.82	peak	V
6621.000	38.58	9.21	47.79	74.00	-26.21	peak	V

7 20dB RF Bandwidth Measurement

7.1. Limit

N/A

7.2. Test Setup

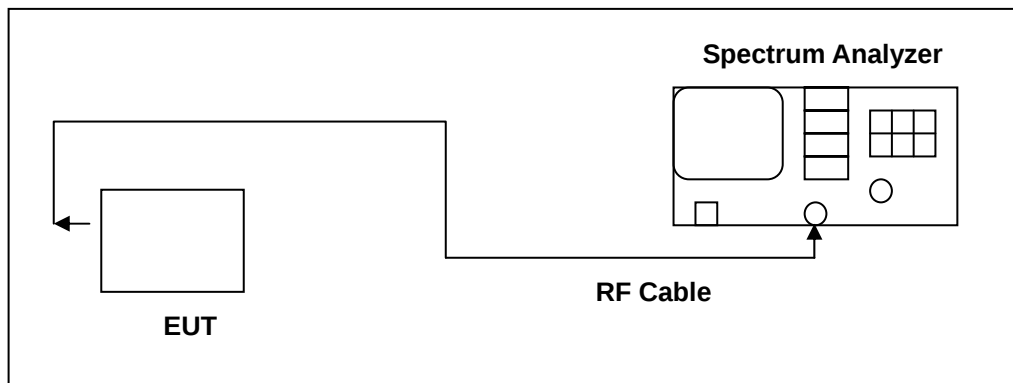

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/24/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

20dB RF Bandwidth

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW $\geq$ 1% of the 20dB span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

7.5. Test Result

Model Number	PA820		
Test Item	20dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2 / Mode 4		
Date of Test	10/04/2015	Test Site	TE02
Test Mode	Frequency (MHz)	20dB RF Bandwidth (MHz)	Limit (MHz)
Mode 2	2402	1.017	-----
	2441	0.967	-----
	2480	0.961	-----
Mode 4	2402	1.348	-----
	2441	1.352	-----
	2480	1.351	-----

7.6. Test Graphs

Mode 2: GFSK Link Mode	
2402	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Trig: Free Run #Att: 10 dB Radio Std: None Radio Device: BTS Ref Offset: 0.5 dB Ref: -20.00 dBm Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 914.20 kHz Transmit Freq Error: 8.834 kHz x dB Bandwidth: 1.017 MHz OBW Power: 99.00 % x dB: -20.00 dB Frequency: Center Freq 2.40200000 GHz CF Step: 300.000 kHz Freq Offset: 0 Hz
2441	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Trig: Free Run #Att: 10 dB Radio Std: None Radio Device: BTS Ref Offset: 0.5 dB Ref: -20.00 dBm Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 903.72 kHz Transmit Freq Error: 8.432 kHz x dB Bandwidth: 967.4 kHz OBW Power: 99.00 % x dB: -20.00 dB Frequency: Center Freq 2.441000000 GHz CF Step: 300.000 kHz Freq Offset: 0 Hz
2480	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Trig: Free Run #Att: 10 dB Radio Std: None Radio Device: BTS Ref Offset: 0.5 dB Ref: -20.00 dBm Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 903.01 kHz Transmit Freq Error: 7.053 kHz x dB Bandwidth: 961.2 kHz OBW Power: 99.00 % x dB: -20.00 dB Frequency: Center Freq 2.480000000 GHz CF Step: 300.000 kHz Freq Offset: 0 Hz




Mode 4: 8DPSK Link Mode	
2402	
2441	
2480	

8 Carrier Frequency Separation Measurement

8.1. Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.

8.2. Test Setup

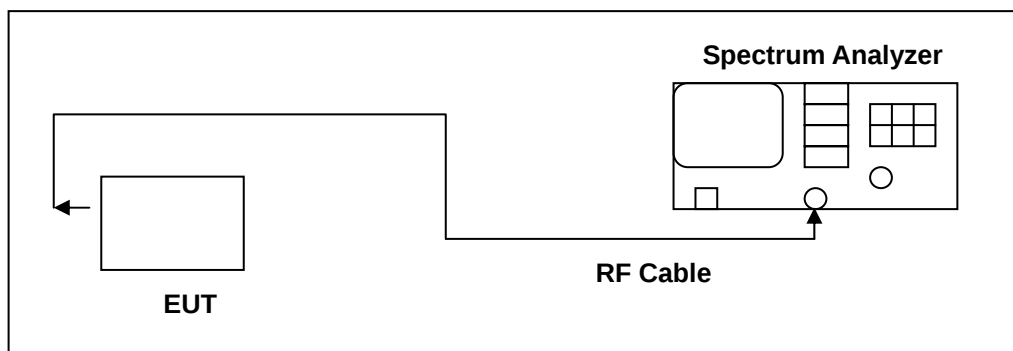

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/24/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth transmitter of the V6 had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span
3. Video (or Average) Bandwidth (VBW) $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold




The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

8.5. Test Result

Model Number	PA820		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 2 / Mode 4		
Date of Test	10/04/2015	Test Site	TE02
Test Mode	Frequency (MHz)	Measurement (MHz)	Limit (MHz)
Mode 2	2402	1.000	> 0.678
	2441	1.000	> 0.645
	2480	1.000	> 0.641
Mode 4	2402	1.000	> 0.899
	2441	1.000	> 0.901
	2480	1.000	> 0.901

8.6. Test Graphs

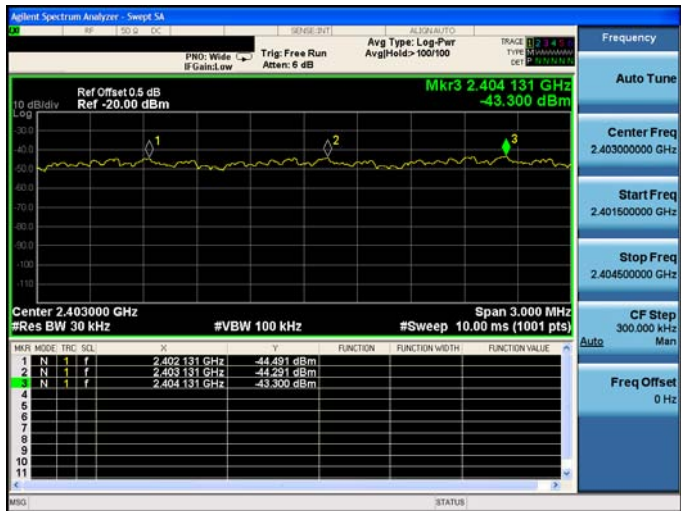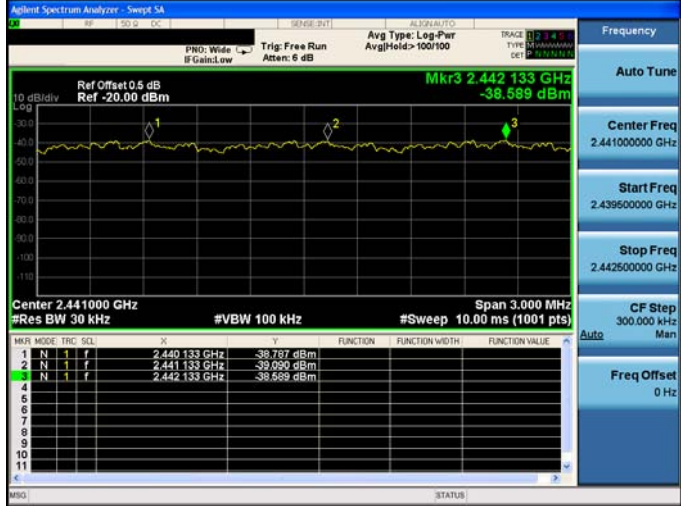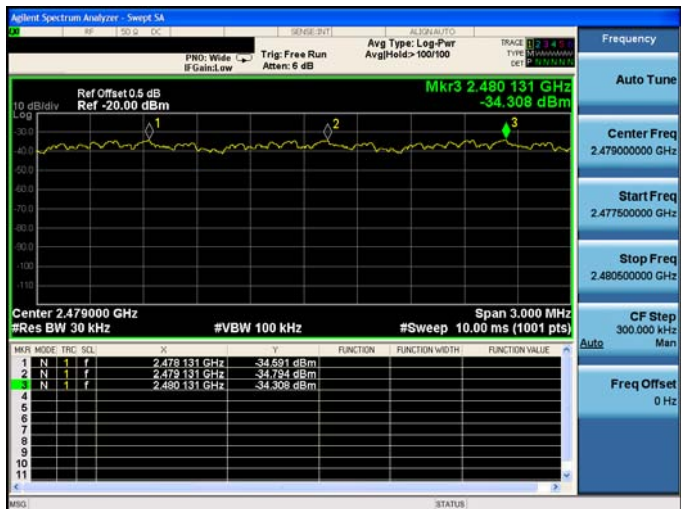


Mode 4: 8DPSK Link Mode													
2402	<table><thead><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr></thead><tbody><tr><td>1</td><td>2.402131</td><td>-44.491</td></tr><tr><td>2</td><td>2.403131</td><td>-44.291</td></tr><tr><td>3</td><td>2.404131</td><td>-43.300</td></tr></tbody></table>	Marker	Freq (GHz)	Power (dBm)	1	2.402131	-44.491	2	2.403131	-44.291	3	2.404131	-43.300
Marker	Freq (GHz)	Power (dBm)											
1	2.402131	-44.491											
2	2.403131	-44.291											
3	2.404131	-43.300											
2441	<table><thead><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr></thead><tbody><tr><td>1</td><td>2.440133</td><td>-38.787</td></tr><tr><td>2</td><td>2.441133</td><td>-38.589</td></tr><tr><td>3</td><td>2.442133</td><td>-38.589</td></tr></tbody></table>	Marker	Freq (GHz)	Power (dBm)	1	2.440133	-38.787	2	2.441133	-38.589	3	2.442133	-38.589
Marker	Freq (GHz)	Power (dBm)											
1	2.440133	-38.787											
2	2.441133	-38.589											
3	2.442133	-38.589											
2480	<table><thead><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr></thead><tbody><tr><td>1</td><td>2.478131</td><td>-34.591</td></tr><tr><td>2</td><td>2.479131</td><td>-34.794</td></tr><tr><td>3</td><td>2.480131</td><td>-34.308</td></tr></tbody></table>	Marker	Freq (GHz)	Power (dBm)	1	2.478131	-34.591	2	2.479131	-34.794	3	2.480131	-34.308
Marker	Freq (GHz)	Power (dBm)											
1	2.478131	-34.591											
2	2.479131	-34.794											
3	2.480131	-34.308											

9 Number of Hopping Measurement

9.1. Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

9.2. Test Setup

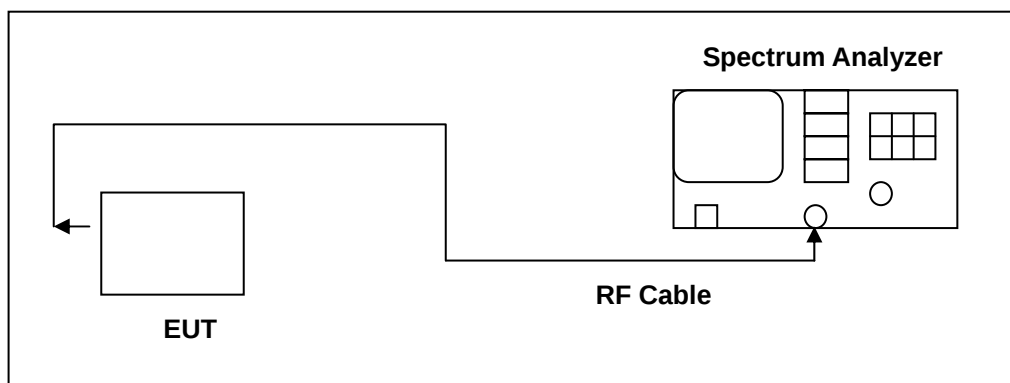

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/24/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:


1. Span = the frequency band of operation
2. RBW $\geq$ 1% of the span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

9.5. Test Result

Model Number	PA820		
Test Item	Number of Hopping		
Test Mode	Mode 2 / Mode 4		
Date of Test	10/04/2015	Test Site	TE02
Test Mode	Frequency Range (MHz)	Measurement (ch)	Limit (ch)
Mode 2	2402 - 2480	79	> 15
Mode 4	2402 - 2480	79	> 15

9.6. Test Graphs

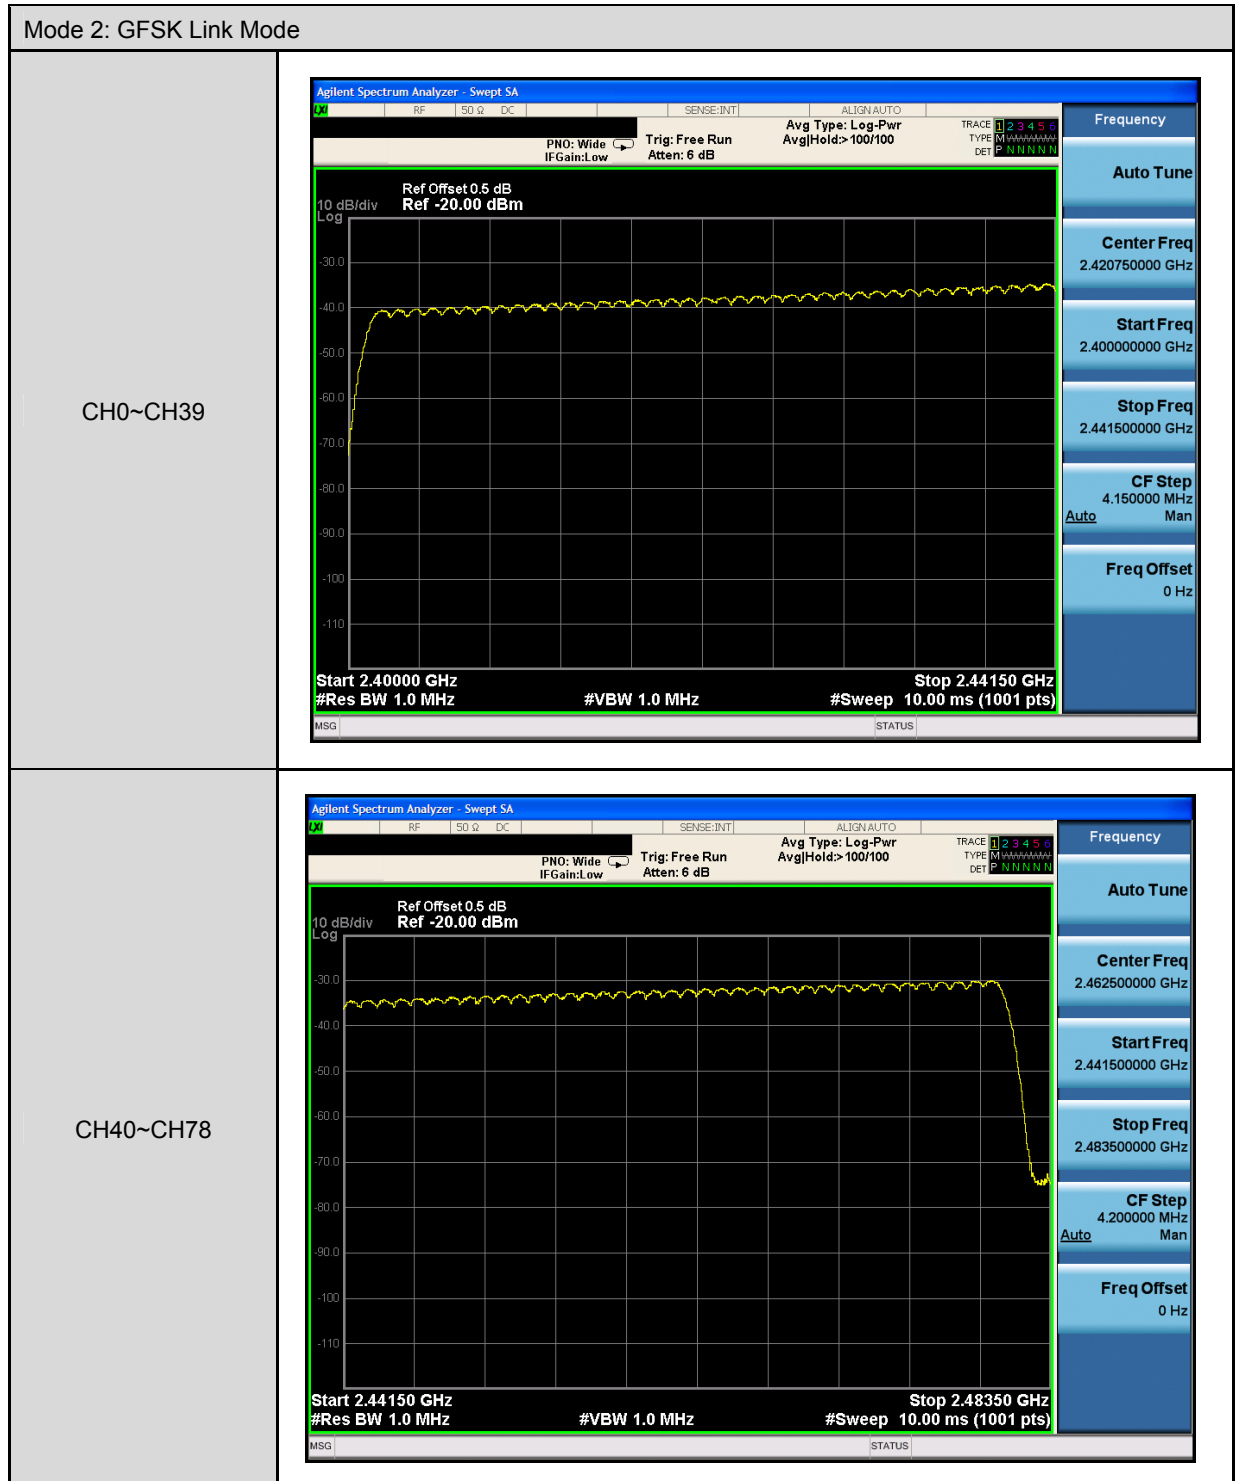

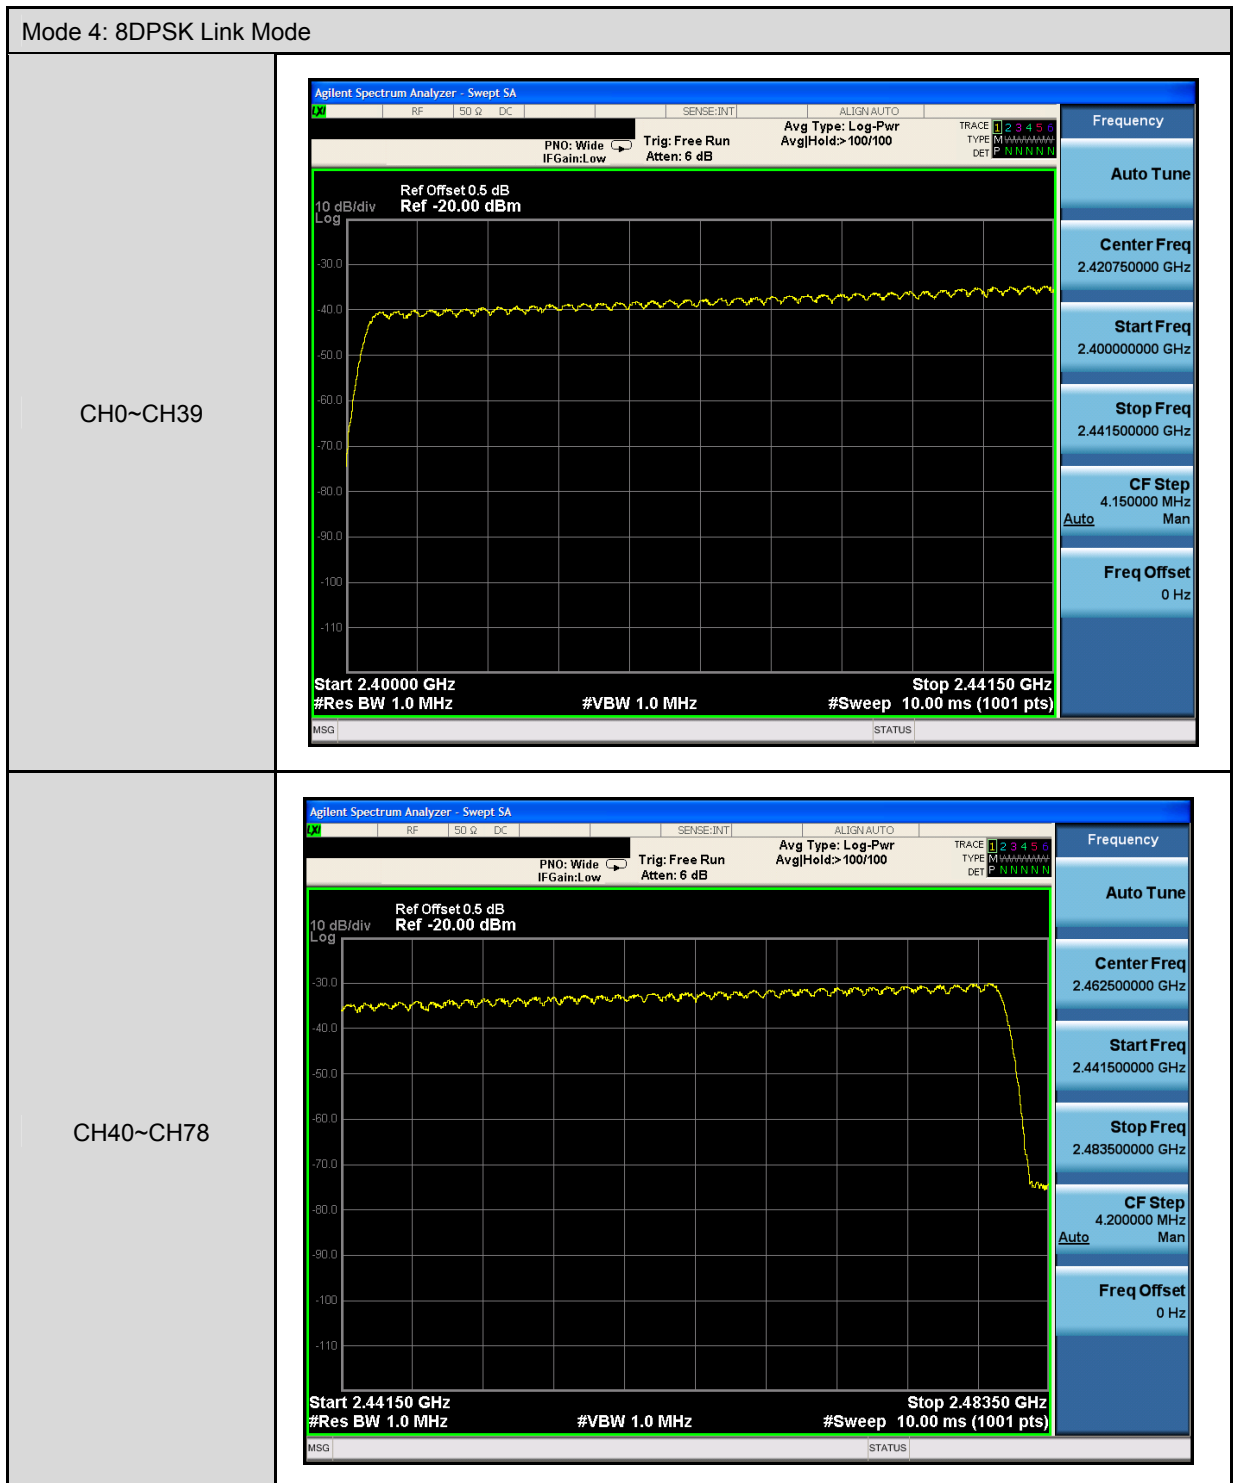


10 Time of Occupancy (Dwell Time) Measurement

10.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2. Test Setup

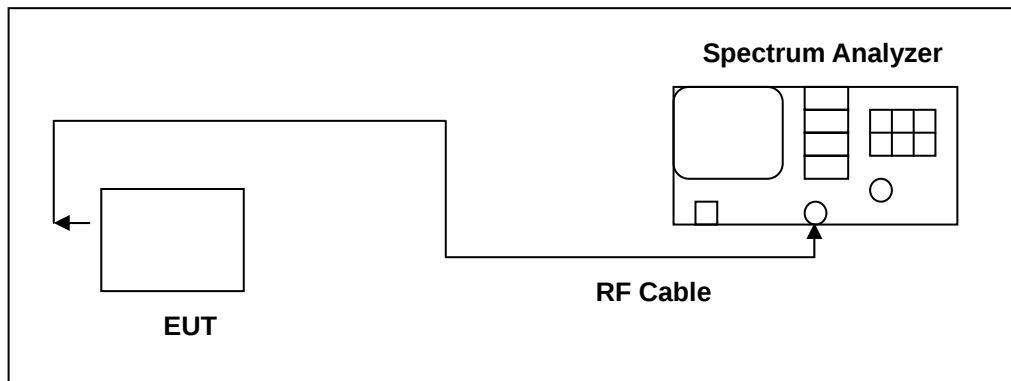

10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/24/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the spectrum through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW $\geq$ RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold


The marker-delta function was used to determine the dwell time.

10.5. Test Result

Model Number	PA820		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	10/20/2015	Test Site	TE02
DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)		
Each Channel Dwell Times on Cycle(1)	31.6 * 3.37 = 106.492(times)		
Each Channel Dwell Times (2)	3.008 ms (sec)		
Dwell Times on Cycle (1) * (2)	321.2785 ms (sec)		
LIMIT(msec)	< = 400		

Model Number	PA820		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 4: 8DPSK Link Mode		
Date of Test	10/20/2015	Test Site	TE02
3DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)		
Each Channel Dwell Times on Cycle(1)	31.6 * 3.37 = 106.492(times)		
Each Channel Dwell Times (2)	3.016	ms (sec)	
Dwell Times on Cycle (1) * (2)	322.1329	ms (sec)	
LIMIT(msec)	< = 400		

10.6. Test Graphs

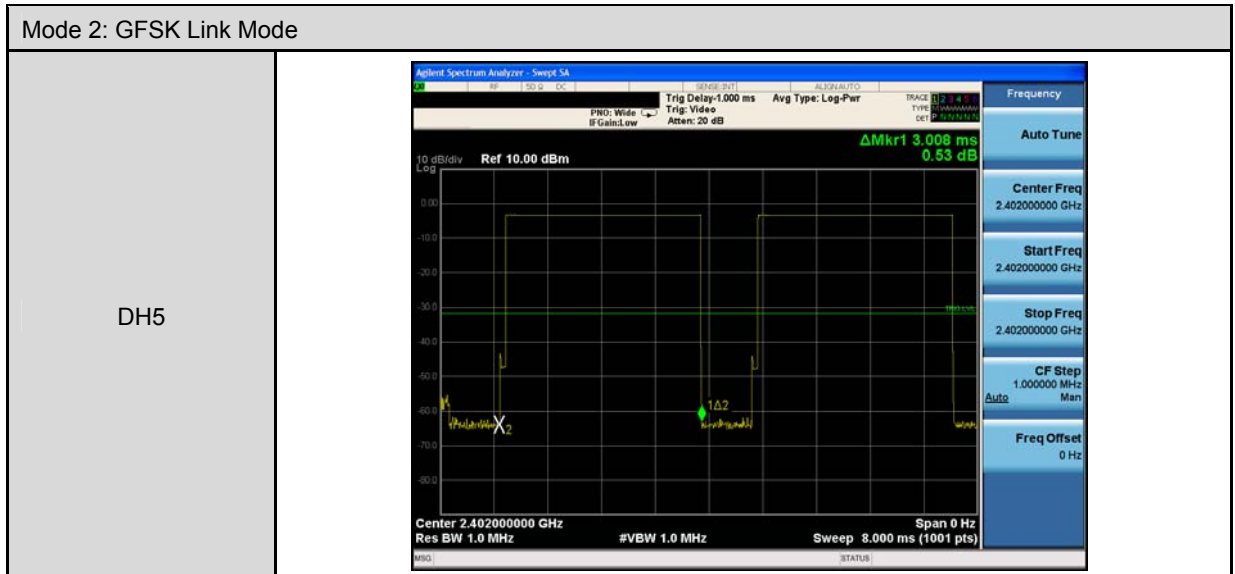


11 Out of Band Conducted Emissions Measurement

11.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

11.2. Test Setup

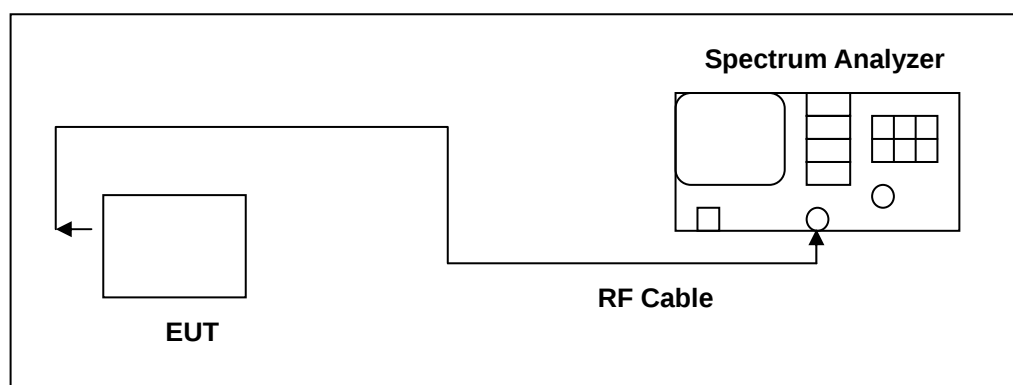

11.3. Test Instruments


Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/27/2015	(1)
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/24/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year.


NOTE: N.C.R. = No Calibration Request.

11.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

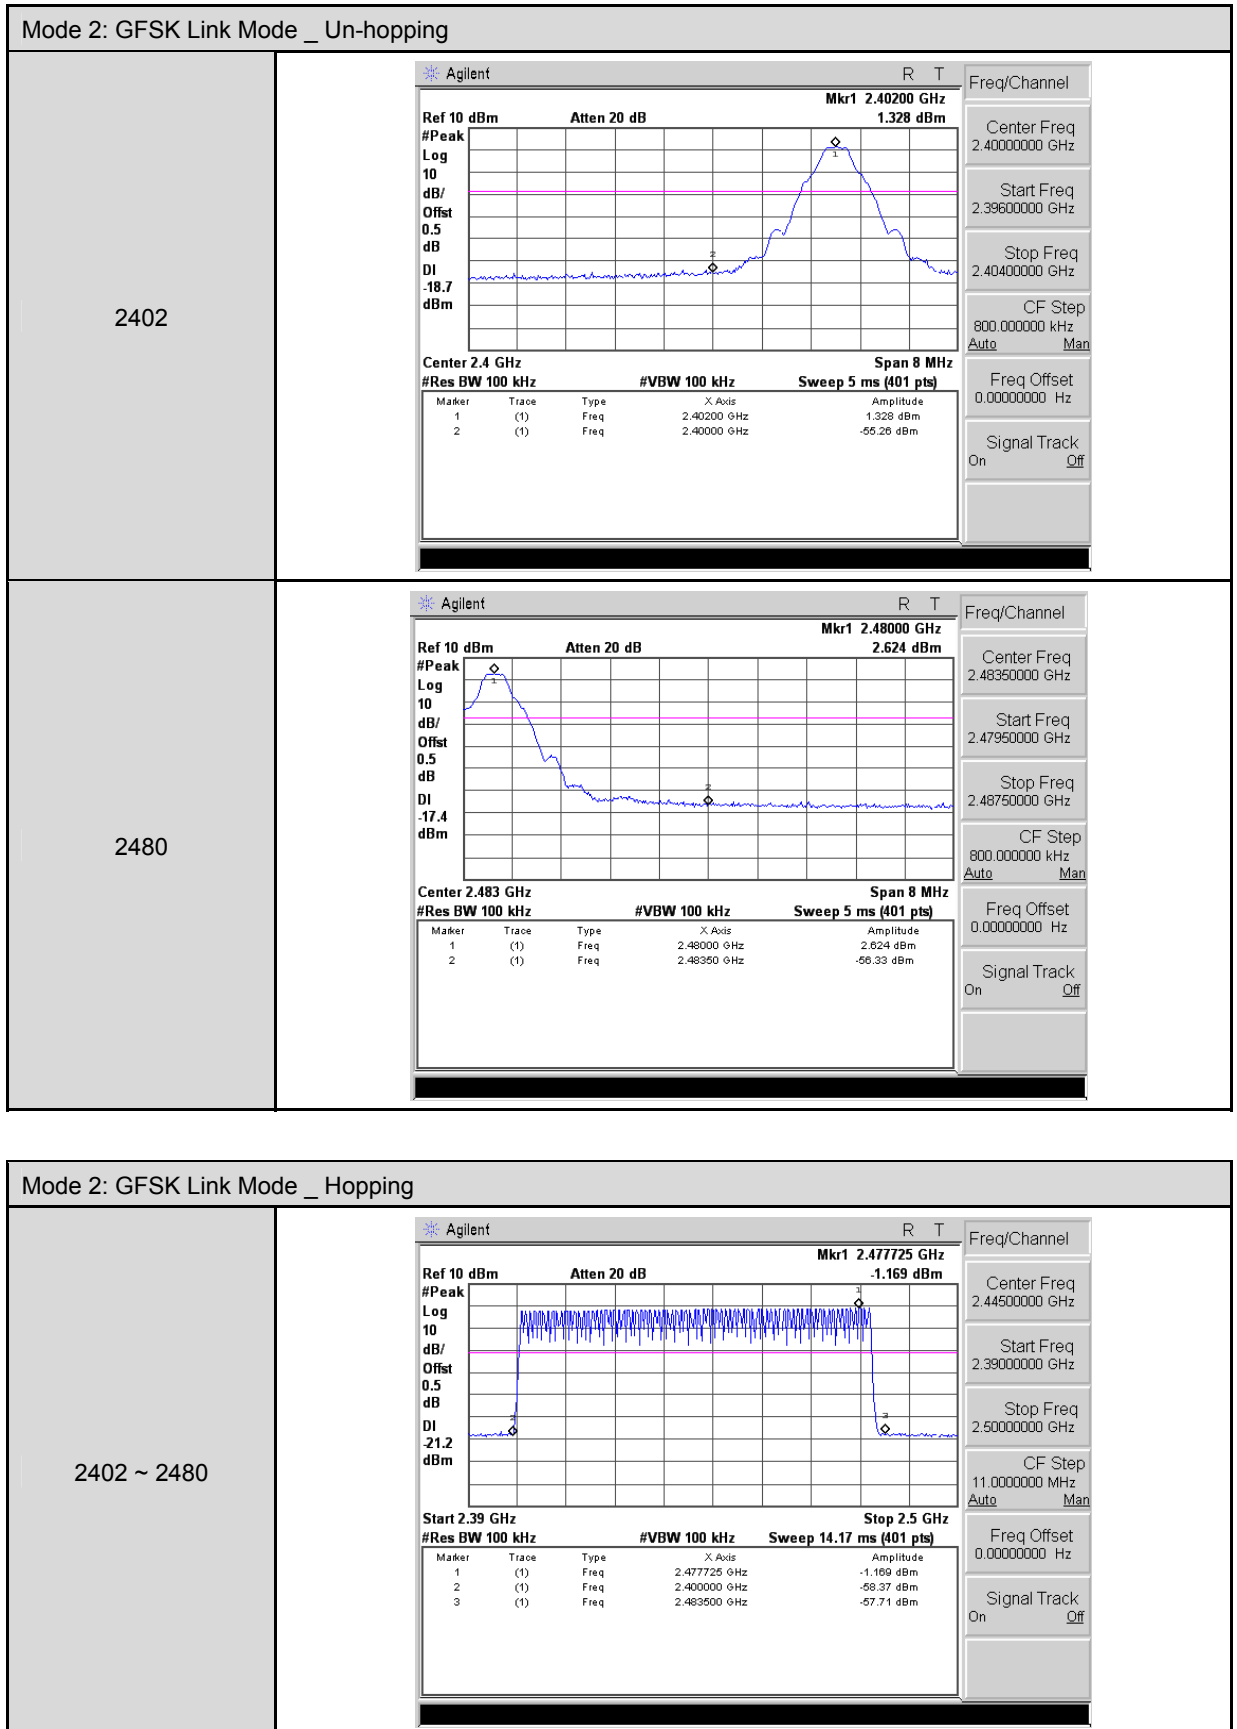

Mode 4: 8DPSK Link Mode											
2402	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.40 GHz 0.472 dBm #Peak Log 10 dB/ Offst 0.5 dB DI -19.5 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table><tr><td>Marker</td><td>Trace</td><td>Type</td><td>X Axis</td><td>Amplitude</td></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.40 GHz</td><td>0.472 dBm</td></tr></table> Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.40 GHz	0.472 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.40 GHz	0.472 dBm							
2441	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.44 GHz 0.912 dBm #Peak Log 10 dB/ Offst 0.5 dB DI -19.1 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table><tr><td>Marker</td><td>Trace</td><td>Type</td><td>X Axis</td><td>Amplitude</td></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.44 GHz</td><td>0.912 dBm</td></tr></table> Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44 GHz	0.912 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.44 GHz	0.912 dBm							
2480	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.48 GHz 0.897 dBm #Peak Log 10 dB/ Offst 0.5 dB DI -19.1 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table><tr><td>Marker</td><td>Trace</td><td>Type</td><td>X Axis</td><td>Amplitude</td></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.48 GHz</td><td>0.897 dBm</td></tr></table> Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.48 GHz	0.897 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.48 GHz	0.897 dBm							

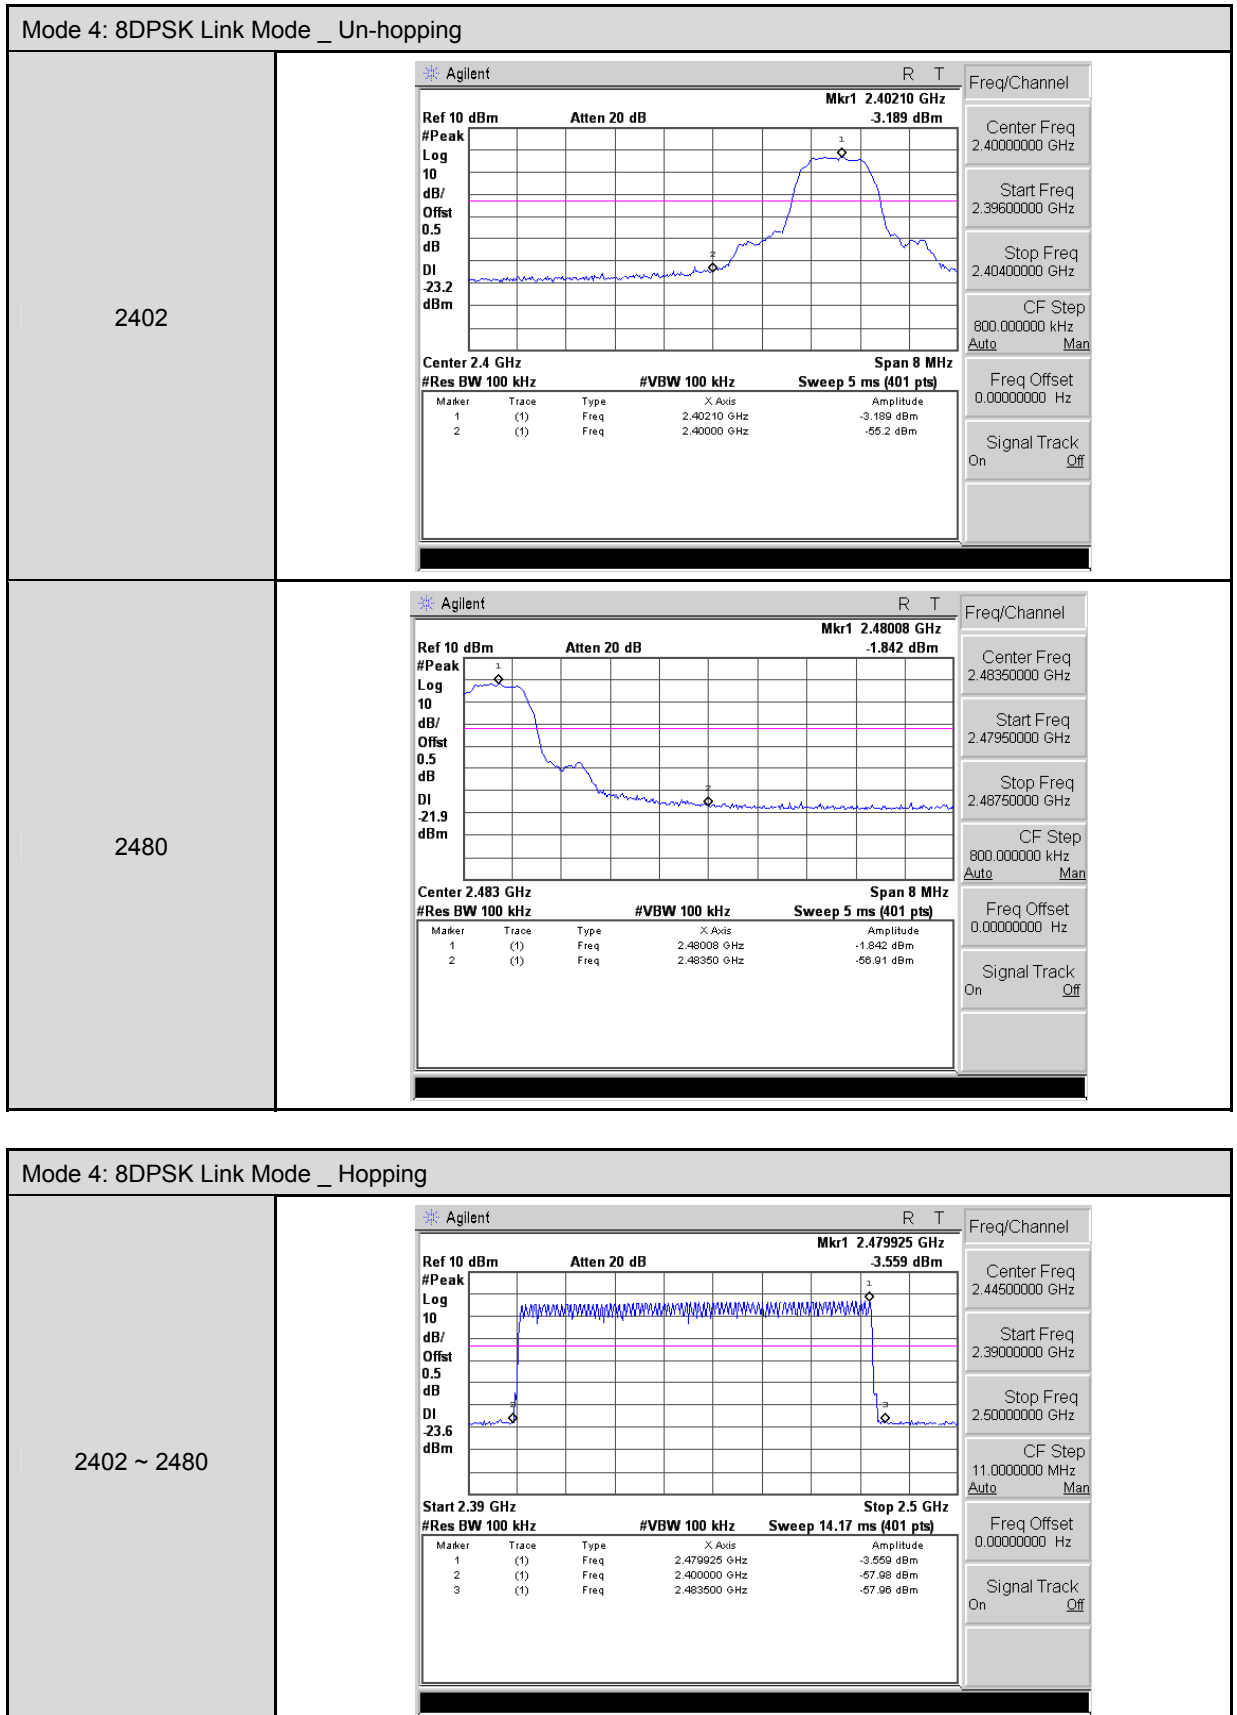


12 Band Edges Measurement

12.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

12.2. Test Setup

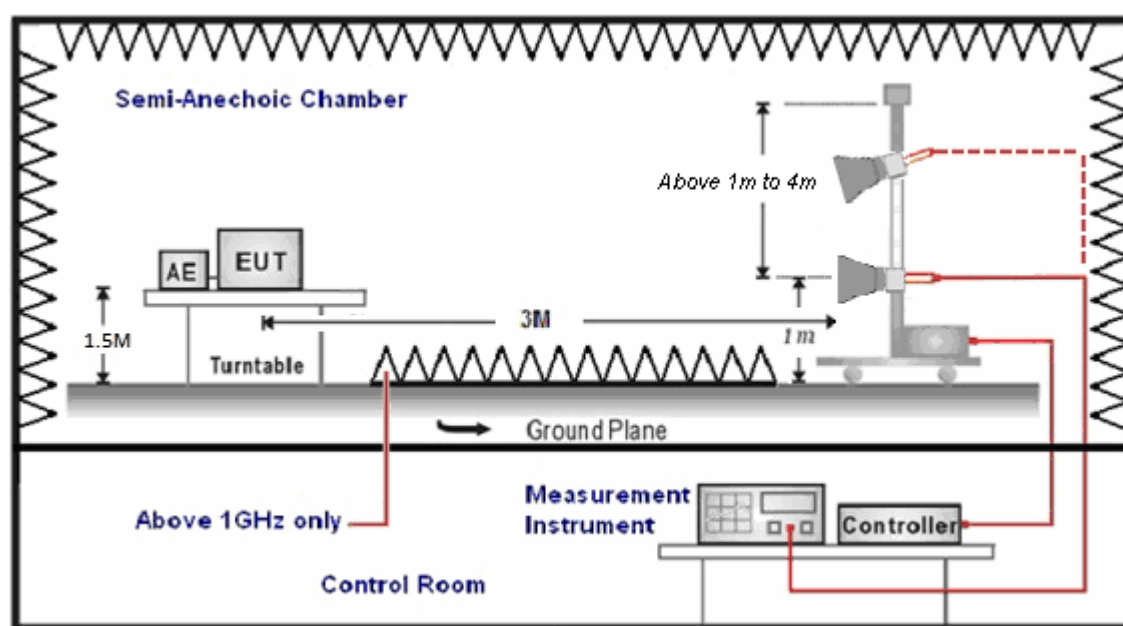

12.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/27/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/12/2015	(1)
Microwave Cable	EMCI	EMC-104-SM-SM-1 4000	140202	02/24/2015	(1)
Microwave Cable	EMCI	EMC104-SM-SM-6 00	140301	02/24/2015	(1)
Test Site	ATL	TE01	888001	08/27/2015	(1)

Remark: (1) Calibration period 1 year.

NOTE: N.C.R. = No Calibration Request.

12.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

12.5. Test Result

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PA820		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		10/23/2015	
Frequency:		2402 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2387.330	48.41	2.55	50.96	74.00	-23.04	peak	H
2390.000	42.35	2.55	44.90	74.00	-29.10	peak	H
2383.700	48.56	2.54	51.10	74.00	-22.90	peak	V
2390.000	40.57	2.55	43.12	74.00	-30.88	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PA820		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		10/23/2015	
Frequency:		2480 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	54.50	2.69	57.19	74.00	-16.81	peak	H
2483.500	34.66	2.69	37.35	54.00	-16.65	AVG	H
2483.880	66.33	2.69	69.02	74.00	-4.98	peak	H
2483.880	34.40	2.69	37.09	54.00	-16.91	AVG	H
2483.500	54.36	2.69	57.05	74.00	-16.95	peak	V
2483.500	35.69	2.69	38.38	54.00	-15.62	AVG	V
2483.980	68.67	2.69	71.36	74.00	-2.64	peak	V
2483.980	35.52	2.69	38.21	54.00	-15.79	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PA820		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		10/23/2015	
		Hopping		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2390.000	42.96	2.55	45.51	74.00	-28.49	peak	H
2483.500	43.93	2.69	46.62	74.00	-27.38	peak	H
2390.000	43.28	2.55	45.83	74.00	-28.17	peak	V
2483.500	46.06	2.69	48.75	74.00	-25.25	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	PA820	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	4	Date:	10/23/2015				
Frequency:	2402 MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2381.500	47.50	2.53	50.03	74.00	-23.97	peak	H
2390.000	46.71	2.55	49.26	74.00	-24.74	peak	H
2378.530	48.41	2.53	50.94	74.00	-23.06	peak	V
2390.000	43.62	2.55	46.17	74.00	-27.83	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PA820			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	10/23/2015		
Frequency:	2480 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	64.25	2.69	66.94	74.00	-7.06	peak	H
2483.500	35.62	2.69	38.31	54.00	-15.69	AVG	H
2483.580	68.50	2.69	71.19	74.00	-2.81	peak	H
2483.580	35.43	2.69	38.12	54.00	-15.88	AVG	H
2483.500	70.09	2.69	72.78	74.00	-1.22	peak	V
2483.500	36.59	2.69	39.28	54.00	-14.72	AVG	V
2483.640	70.44	2.69	73.13	74.00	-0.87	peak	V
2483.640	36.14	2.69	38.83	54.00	-15.17	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PA820		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		4		Date:		10/23/2015	
		Hopping		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2390.000	38.63	2.55	41.18	74.00	-32.82	peak	H
2483.500	38.71	2.69	41.40	74.00	-32.60	peak	H
2390.000	43.17	2.55	45.72	74.00	-28.28	peak	V
2483.500	43.69	2.69	46.38	74.00	-27.62	peak	V

13 Antenna Measurement

13.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2. Antenna Connector Construction

The antenna used in this product is Chip Antenna. And the maximum Gain of this antenna is only 1.1 dBi.