

# TEST REPORT

**Product Name** : Rugged Tablet Computer  
**Model Number** : TB170  
**FCC ID** : HLETB170BTNL

Prepared for : Unitech Electronics Co., Ltd.  
Address : 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist.,  
New Taipei City, Taiwan

Prepared by : EMTEK (SHENZHEN) CO., LTD.  
Address : Building 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

Report Number : ENS2205200174W00303R  
Date(s) of Tests : December 25, 2020 to February 5, 2021  
Date of issue : July 7, 2022

## TABLE OF CONTENTS

<b>1 TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2 EUT TECHNICAL DESCRIPTION.....</b>	<b>4</b>
<b>3 SUMMARY OF TEST RESULT.....</b>	<b>5</b>
<b>4 TEST METHODOLOGY.....</b>	<b>6</b>
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
4.2 MEASUREMENT EQUIPMENT USED.....	6
4.3 DESCRIPTION OF TEST MODES.....	7
<b>5 FACILITIES AND ACCREDITATIONS.....</b>	<b>8</b>
5.1 FACILITIES.....	8
5.2 LABORATORY ACCREDITATIONS AND LISTINGS.....	8
<b>6 TEST SYSTEM UNCERTAINTY.....</b>	<b>9</b>
<b>7 SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>10</b>
7.1 RADIO FREQUENCY TEST SETUP 1.....	10
7.2 RADIO FREQUENCY TEST SETUP 2.....	10
7.3 CONDUCTED EMISSION TEST SETUP.....	12
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	13
7.5 SUPPORT EQUIPMENT.....	13
<b>8 TEST REQUIREMENTS.....</b>	<b>14</b>
8.1 DTS(6DB)BANDWIDTH.....	14
8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	27
8.3 MAXIMUM POWER SPECTRAL DENSITY.....	29
8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	42
8.5 RADIATED SPURIOUS EMISSION.....	47
8.6 CONDUCTED EMISSIONS TEST.....	79
8.7 ANTENNA APPLICATION.....	82

# 1 TEST RESULT CERTIFICATION

Applicant : Unitech Electronics Co., Ltd.  
 Address : 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan  
 Manufacturer : Unitech Electronics Co., Ltd.  
 Address : 5F, No. 136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist., New Taipei City, Taiwan  
 EUT : Rugged Tablet Computer  
 Model Name : TB170  
 Trademark : unitech

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 , Subpart J FCC 47 CFR Part 15 , Subpart C	PASS

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247.


The test results of this report relate only to the tested sample identified in this report.

Date of Test : December 25, 2020 to February 5, 2021

Prepared by : Una Yu  
Una Yu/Editor

Reviewer : Joe Xia  
Joe Xia/Supervisor

Approved & Authorized Signer : Lisa Wang  
Lisa Wang/Manager



## 2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>IEEE 802.11 WLAN Mode Supported</b>	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)
<b>Model Number</b>	TB170
<b>Data Rate</b>	<input checked="" type="checkbox"/> 802.11 b:1,2,5.5,11Mbps; <input checked="" type="checkbox"/> 802.11 g:6,9,12,18,24,36,48,54Mbps; <input checked="" type="checkbox"/> 802.11n(HT20):MCS0-MCS15; <input checked="" type="checkbox"/> 802.11n(HT40):MCS0-MCS15;
<b>Modulation</b>	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
<b>Operating Frequency Range</b>	<input checked="" type="checkbox"/> 2412-2462MHz for 802.11b/g; <input checked="" type="checkbox"/> 2412-2462MHz for 802.11n(HT20); <input checked="" type="checkbox"/> 2422-2452MHz for 802.11n(HT40);
<b>Number of Channels</b>	<input checked="" type="checkbox"/> 11 channels for 802.11b/g; <input checked="" type="checkbox"/> 11 channels for 802.11n(HT20); <input checked="" type="checkbox"/> 7 channels for 802.11n(HT40);
<b>Antenna Type</b>	PIFA Antenna
<b>Antenna Gain</b>	Antenna 1: 4.5 dBi Antenna 2: 3.1 dBi
<b>Antenna Port</b>	<input checked="" type="checkbox"/> Ant 1 ; <input checked="" type="checkbox"/> Ant 2
<b>Smart system</b>	<input checked="" type="checkbox"/> SISO for 802.11b/g/n <input checked="" type="checkbox"/> MIMO for 802.11n
<b>Power supply</b>	Battery: DC 7.6V internal rechargeable li-ion polymer battery Model: IP575399-2S Rating: DC 7.6V, 4800mAh, 36.5Wh Adapter 1: Model: ADP-65JH HB INPUT: 100-240V~1.5A 50-60Hz OUTPUT: DC 19V, 3.42A Adapter 2: Model: A18-065N3A INPUT: 100-240V~1.7A 50-60Hz OUTPUT: DC 19V, 3.42A, 65W
<b>Temperature Range</b>	-20°C ~ +60°C

**Note:** for more details, please refer to the user's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted EmissionTest	PASS	
15.247(b)	Antenna Application	PASS	
<p>NOTE1: N/A (Not Applicable).</p> <p>NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.</p> <p>NOTE3: This report only add adapter2 information and update model name, trademark, applicant and manufacturer information, all test data refer to report No. ES201225029W03.</p>			

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: HLETB170BTNL filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

### 4.2 MEASUREMENT EQUIPMENT USED

#### For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	May 17, 2020	1 Year
Pre-Amplifie	Lunar EM	LNA30M3G-25	J10100000070	May 17, 2020	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	659	Sep 22, 2019	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	May 17, 2020	2 Year
Pre-Amplifie	SKET	LNPA_0118G-45	SK2019051801	May 17, 2020	1 Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	July 14, 2019	2 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	May 17, 2020	1 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1198	May 17, 2020	2 Year
Bilog Antenna	Schwarzbeck	VULB9163	660	July 16, 2019	2 Year
Cable	H+B	NmSm-05-C15052	N/A	May 17, 2020	1 Year
Cable	H+B	NmSm-2-C15201	N/A	May 17, 2020	1 Year
Cable	H+B	NmNm-7-C15702	N/A	May 17, 2020	1 Year
Cable	H+B	SAC-40G-1	414	May 17, 2020	1 Year
Cable	H+B	SUCOFLEX104	MY14871/4	May 17, 2020	
Cable	H+B	BLU18A-NmSm-650 0	D8501	May 17, 2020	1 Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400- 2485MHz)	2	May 17, 2020	1 Year

#### For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Vector Signal Generater	Agilent	N5182B	My53050553	May 17, 2020	1 Year
Analog Signal Generator	Agilent	N5171B	My53050878	May 17, 2020	1 Year
Signal Analyzer	Agilent	N9010A	My53470879	May 17, 2020	1 Year
Power Analyzer	Agilent	PS-X10-200	N/A	May 17, 2020	1 Year
Wideband Radio Communication Tester	R&S	CMW500	1201.0002K50- 140822zk	May 17, 2020	1 Year
Test Accessories	Agilent	PS-X10-100	N/A	May 17, 2020	1 Year
Temperature&Humidity test chamber	ESPEC	EL-02KA	12107166	May 17, 2020	1 Year
Blocking Box	Agilent	AD211	N/A	May 17, 2020	1 Year

### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11n(HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11n(HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

The 2.4G WIFI has two antennas and support Multiple Outputs for 802.11n mode for this report; Antenna 1 Gain is 3.1dBi; Antenna 2 Gain is 4.5dBi; For this function is belong to Correlated Categorization equipment

According to KDB 662911, for Unequal antenna gains,

$$\text{Directional gain} = 10 \log[(10^{3.1/20} + 10^{4.5/20})^2/2] \text{ dBi} = 6.84 \text{ dBi}$$

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291

The Laboratory has been assessed and proved to be in compliance with  
CNAS-CL01 (identical to ISO/IEC 17025:2017)

**Accredited by FCC**

Designation Number: CN1204

Test Firm Registration Number: 882943

**Accredited by A2LA**

The Certificate Number is 4321.01

**Accredited by Industry Canada**

The Conformity Assessment Body Identifier is CN0008

Name of Firm : EMTEK (SHENZHEN) CO., LTD.

Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China



## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%



## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

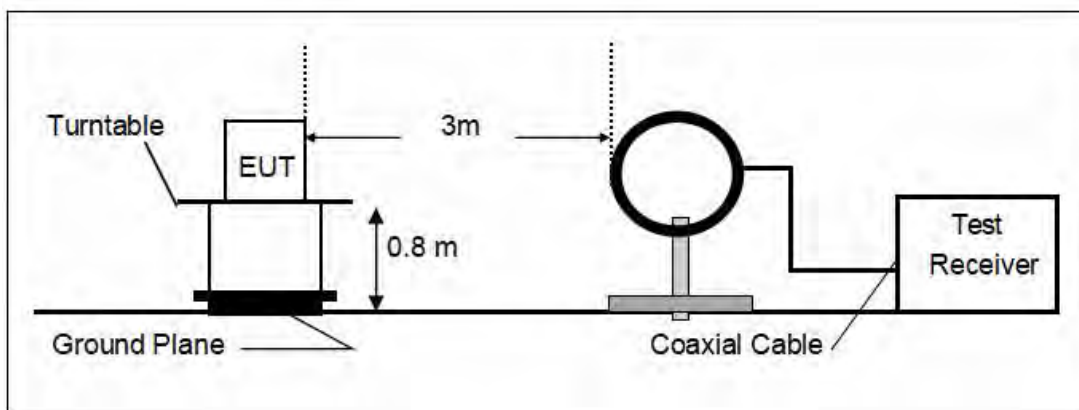

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

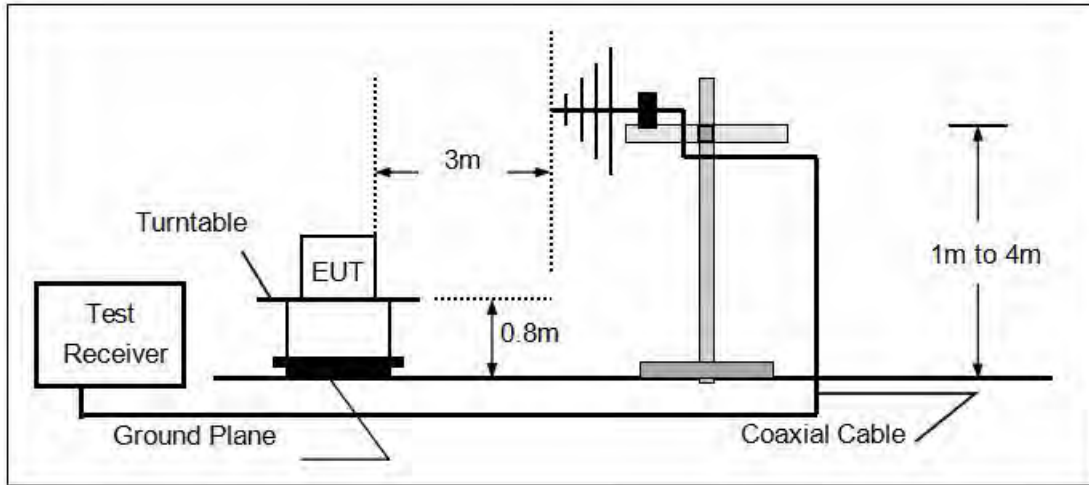

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

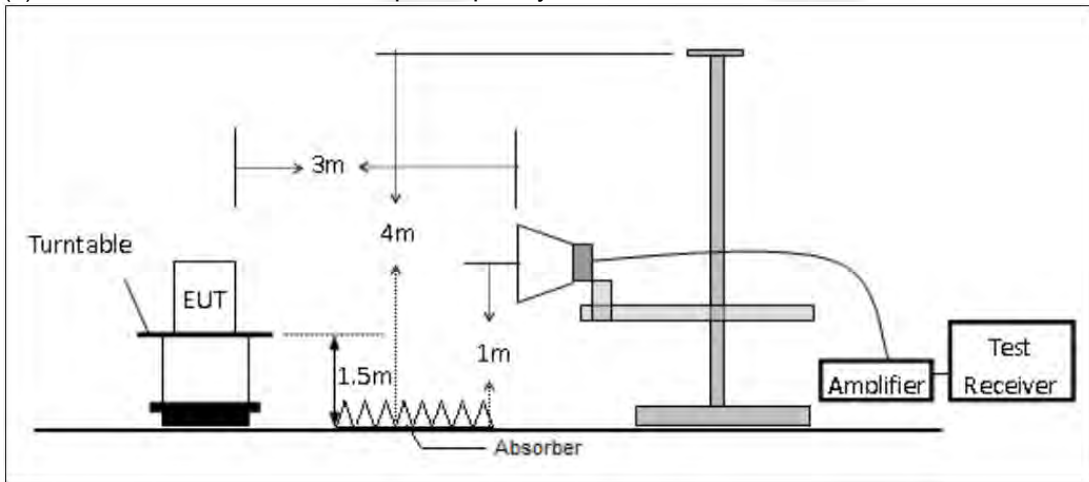


**7.3 CONDUCTED EMISSION TEST SETUP**


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

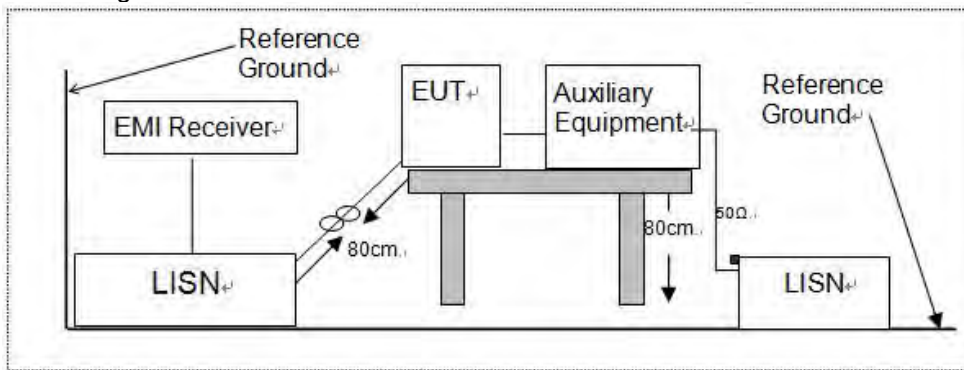

**7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM**

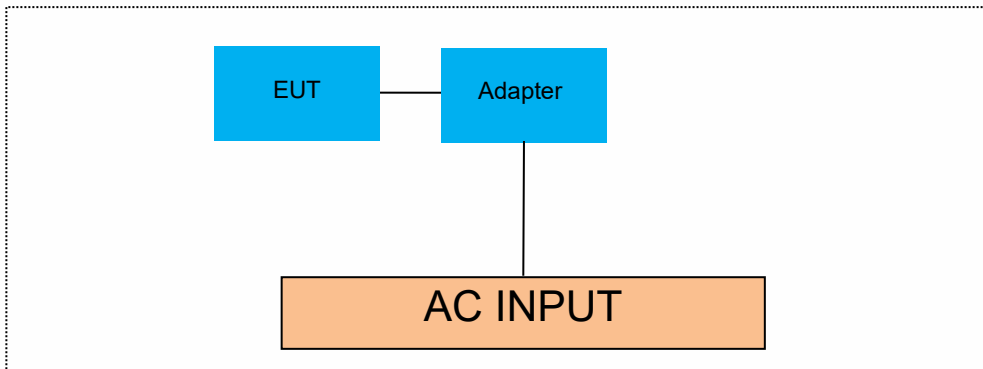

**7.5 SUPPORT EQUIPMENT**

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 TEST REQUIREMENTS

### 8.1 DTS(6DB)BANDWIDTH

#### 8.1.1 Applicable Standard

According to FCC Part15.247 (a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02

#### 8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

#### 8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


#### 8.1.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)		Limit (kHz)	Verdict
			Ant 1	Ant 2		
802.11b	1	2412	10.07	10.07	>500	PASS
	6	2437	10.13	10.07	>500	PASS
	11	2462	10.07	10.07	>500	PASS
802.11g	1	2412	15.69	15.40	>500	PASS
	6	2437	15.75	15.63	>500	PASS
	11	2462	15.69	15.11	>500	PASS
802.11n (ht20)	1	2412	16.09	15.69	>500	PASS
	6	2437	17.31	15.92	>500	PASS
	11	2462	15.69	15.05	>500	PASS
802.11n (ht40)	3	2422	34.96	32.53	>500	PASS
	6	2437	35.54	34.27	>500	PASS
	9	2452	32.65	33.11	>500	PASS

### A. Antenna 1

Test Model DTS (6dB) Bandwidth  
802.11b  
Channel 1: 2412MHz

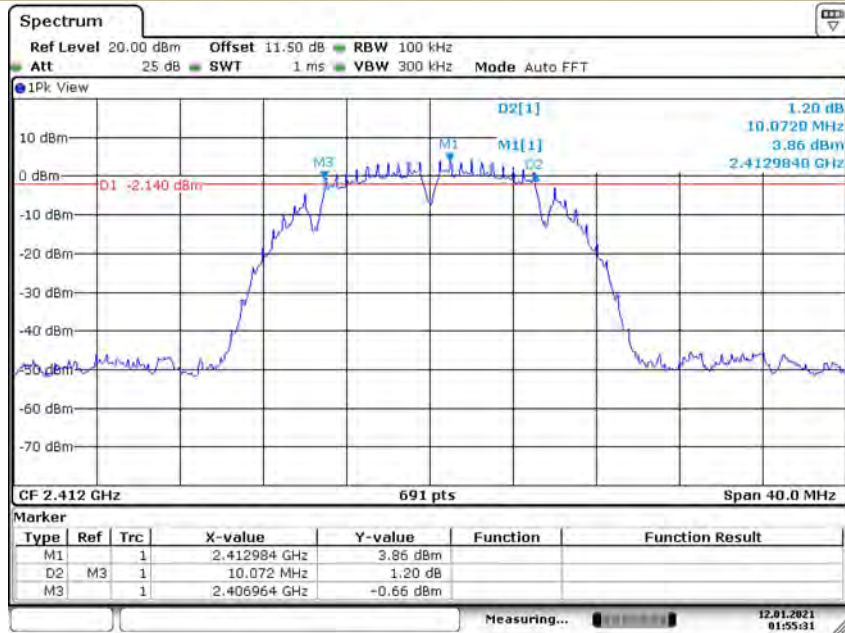


Date: 12.JAN.2021 01:55:31

Test Model DTS (6dB) Bandwidth  
802.11b  
Channel 6: 2437MHz




Date: 12.JAN.2021 01:57:21

Test Model DTS (6dB) Bandwidth  
802.11b  
Channel 11: 2462MHz

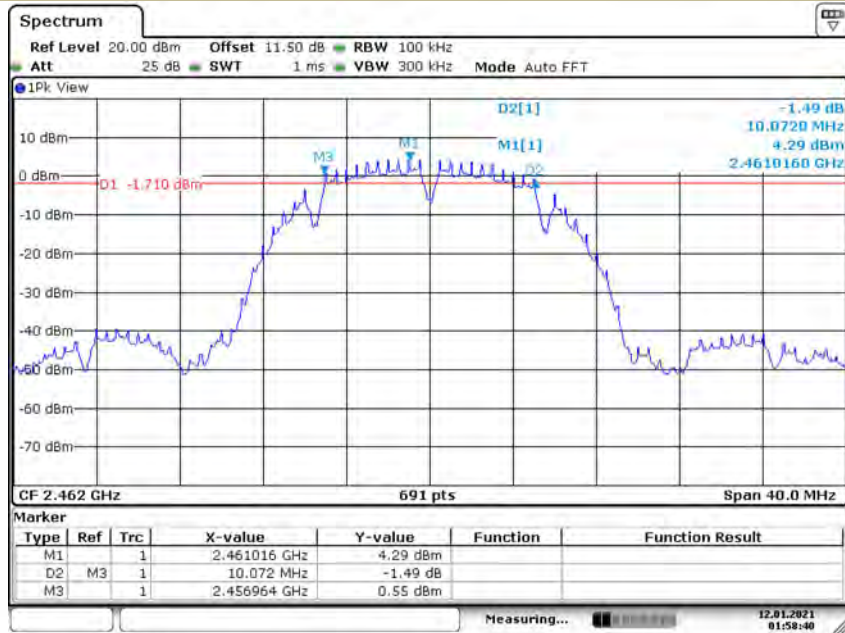

Date: 12.JAN.2021 01:58:40


Test Model DTS (6dB) Bandwidth  
802.11g  
Channel 1: 2412MHz

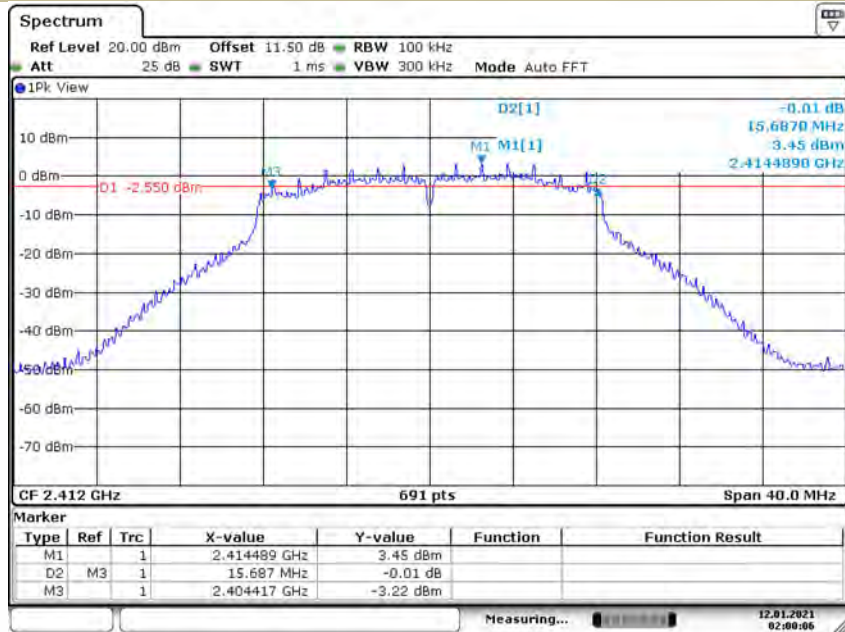

Date: 12.JAN.2021 02:00:06




Test Model DTS (6dB) Bandwidth  
802.11g  
Channel 6: 2437MHz

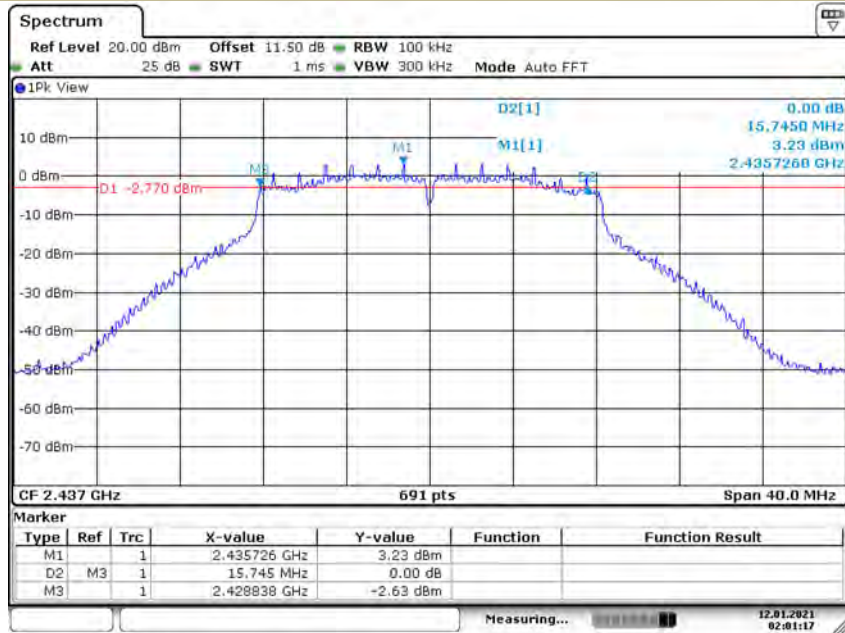


Date: 12.JAN.2021 02:01:17

Test Model DTS (6dB) Bandwidth  
802.11g  
Channel 11: 2462MHz

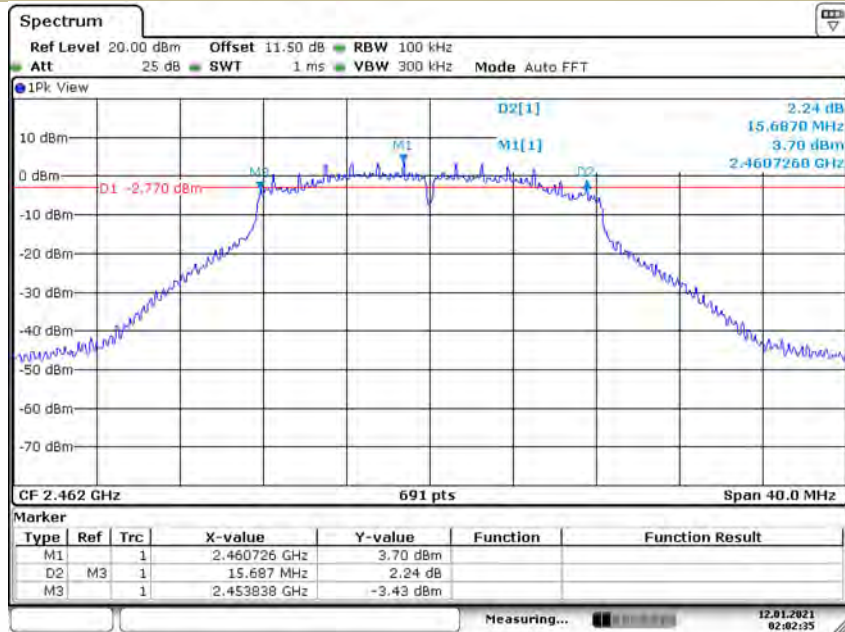


Date: 12.JAN.2021 02:02:35

Test Model DTS (6dB) Bandwidth  
802.11n (HT20)  
Channel 1: 2412MHz

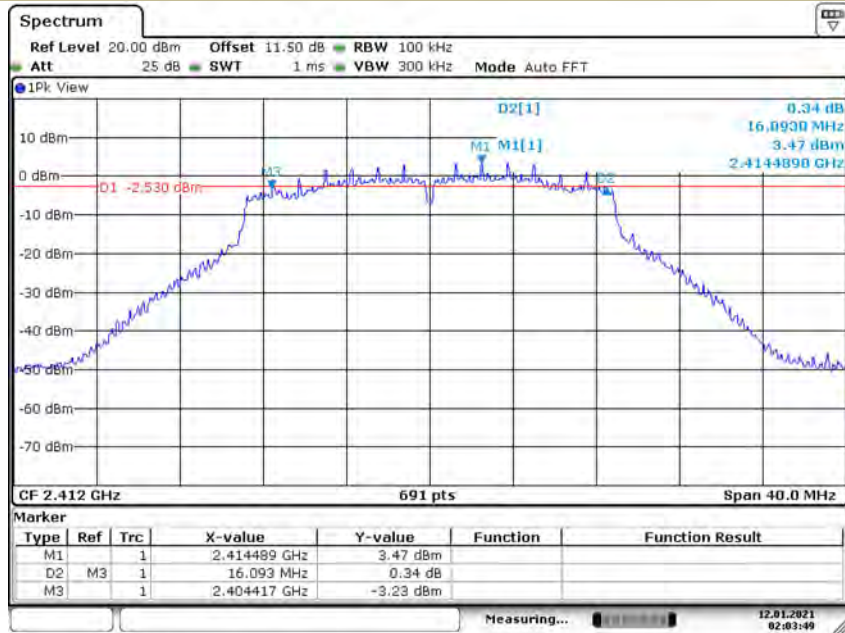


Date: 12.JAN.2021 02:03:49

Test Model DTS (6dB) Bandwidth  
802.11n (HT20)  
Channel 6: 2437MHz

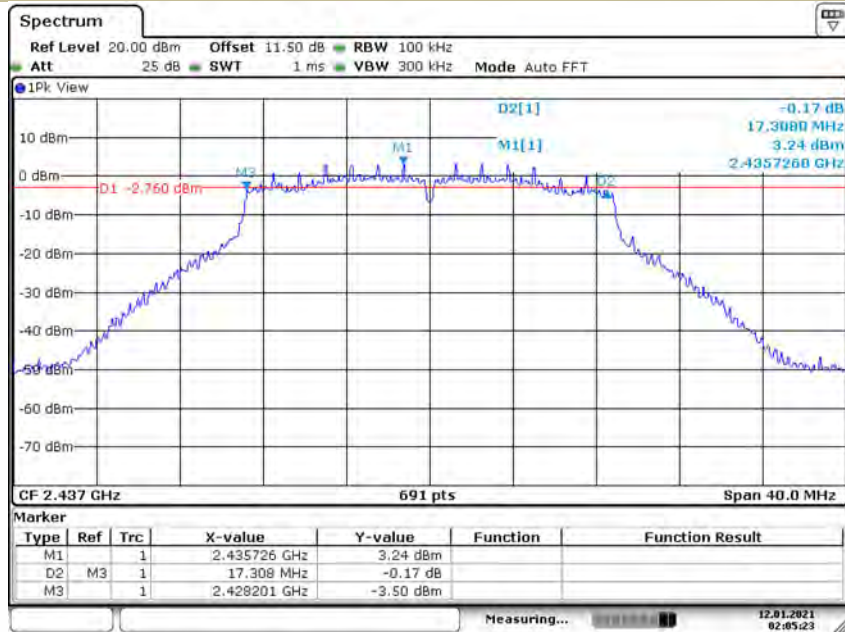


Date: 12.JAN.2021 02:05:23

Test Model DTS (6dB) Bandwidth  
802.11n (HT20)  
Channel 11: 2462MHz

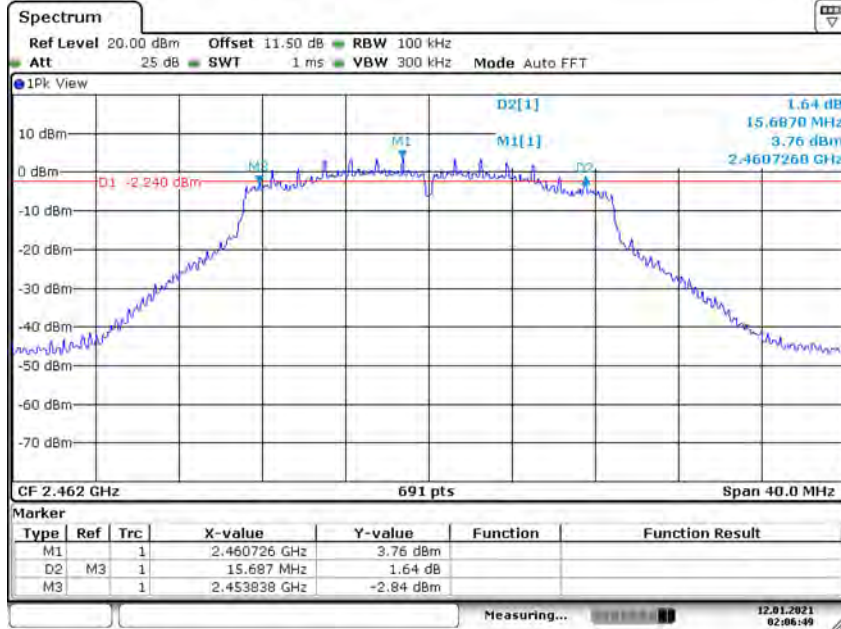


Date: 12.JAN.2021 02:06:49

Test Model DTS (6dB) Bandwidth  
802.11n (HT40)  
Channel 11: 2422MHz

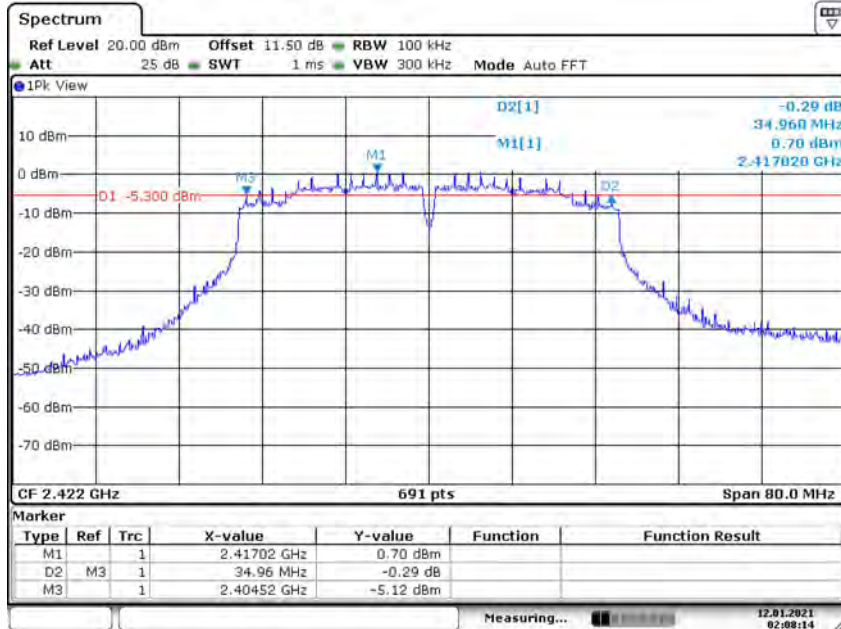


Date: 12.JAN.2021 02:08:14

Test Model DTS (6dB) Bandwidth  
802.11n (HT40)  
Channel 11: 2437MHz

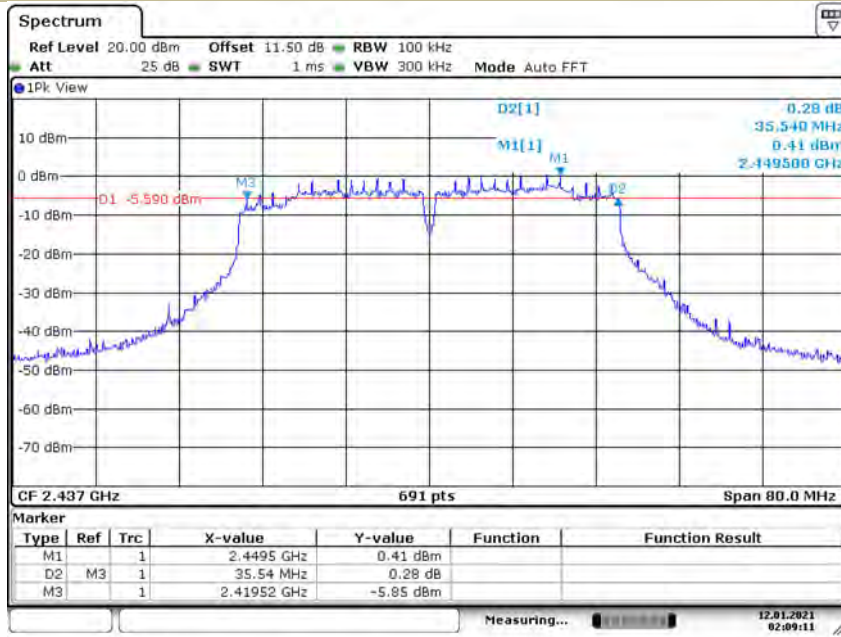

Date: 12.JAN.2021 02:09:12


Test Model DTS (6dB) Bandwidth  
802.11n (HT40)  
Channel 11: 2452MHz

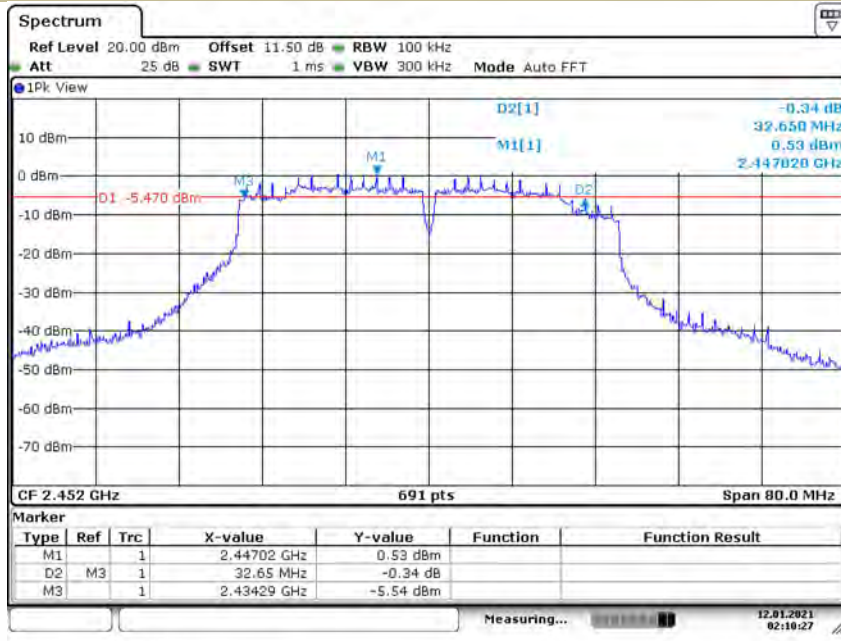

Date: 12.JAN.2021 02:10:27


### B. Antenna 2

Test Model DTS (6dB) Bandwidth  
802.11b  
Channel 1: 2412MHz

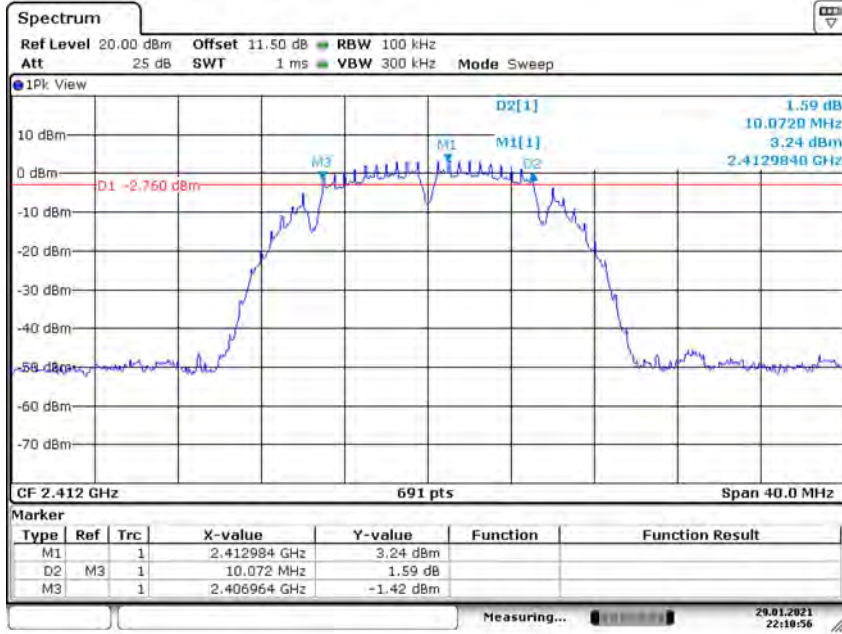


Date: 29 JAN.2021 22:10:56

Test Model DTS (6dB) Bandwidth  
802.11b  
Channel 6: 2437MHz

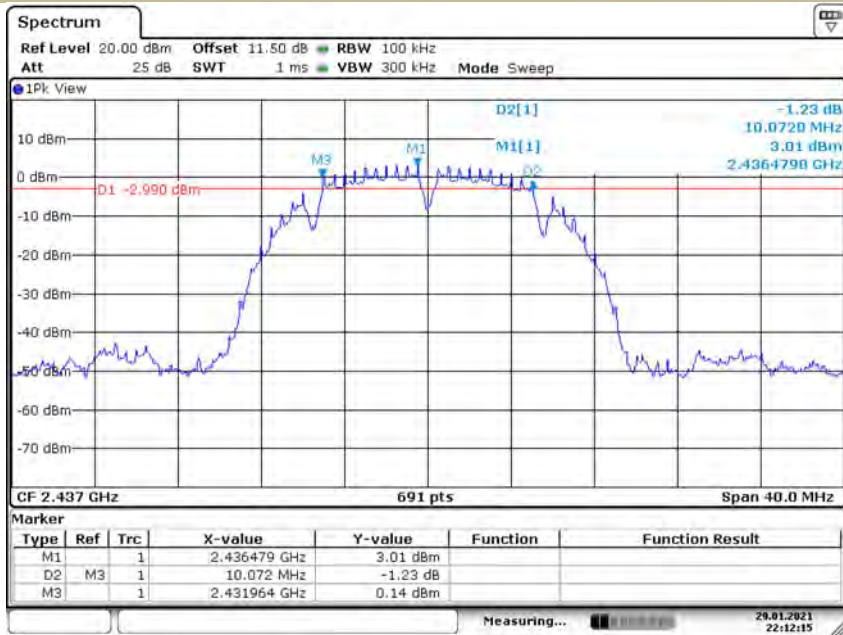


Date: 29 JAN.2021 22:12:14

Test Model DTS (6dB) Bandwidth  
802.11b  
Channel 11: 2462MHz

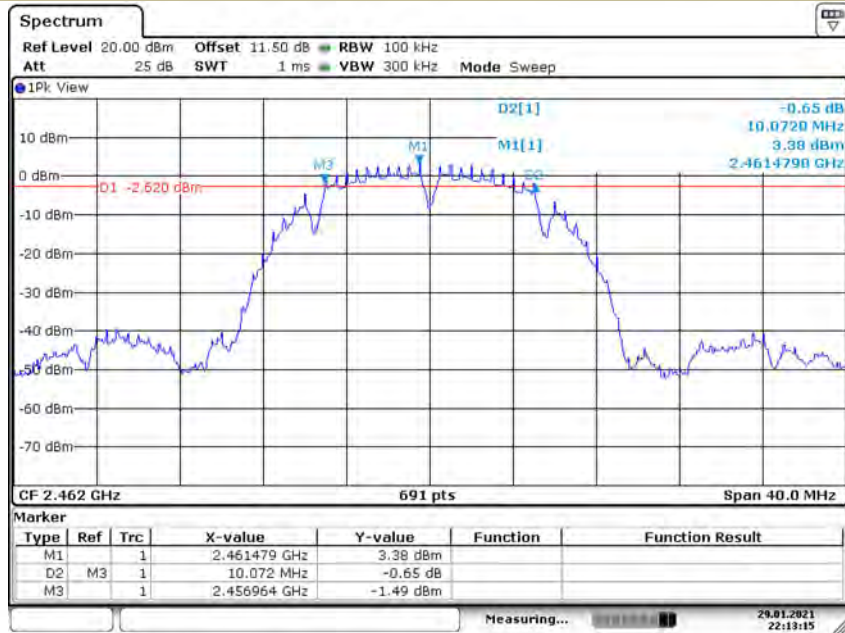


Date: 29.JAN.2021 22:13:16

Test Model DTS (6dB) Bandwidth  
802.11g  
Channel 1: 2412MHz

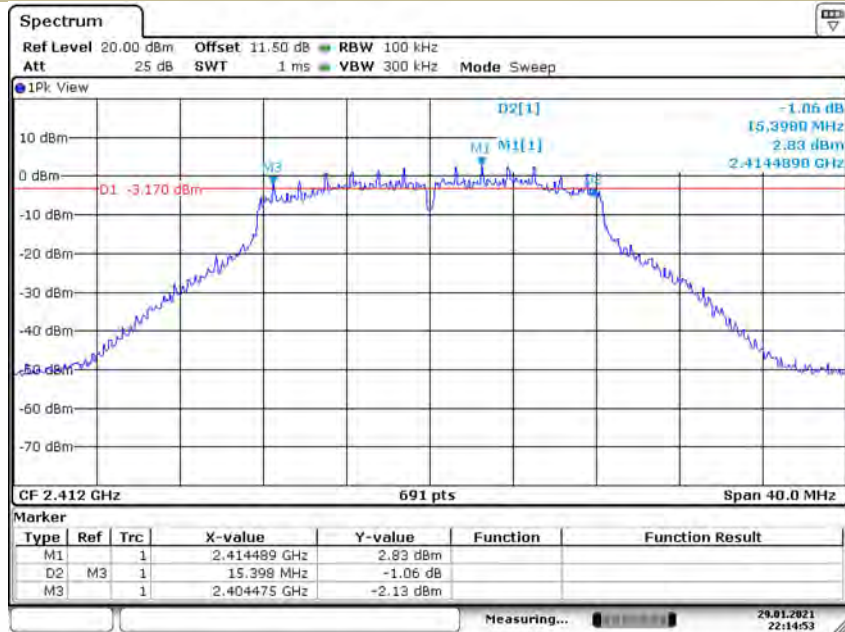


Date: 29.JAN.2021 22:14:52

Test Model DTS (6dB) Bandwidth  
802.11g  
Channel 6: 2437MHz

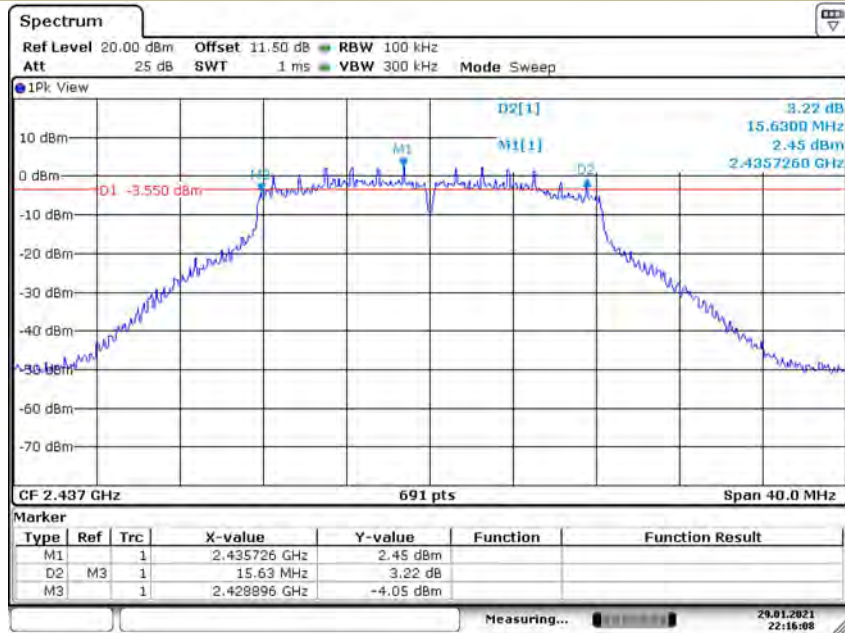


Date: 29.JAN.2021 22:16:08

Test Model DTS (6dB) Bandwidth  
802.11g  
Channel 11: 2462MHz

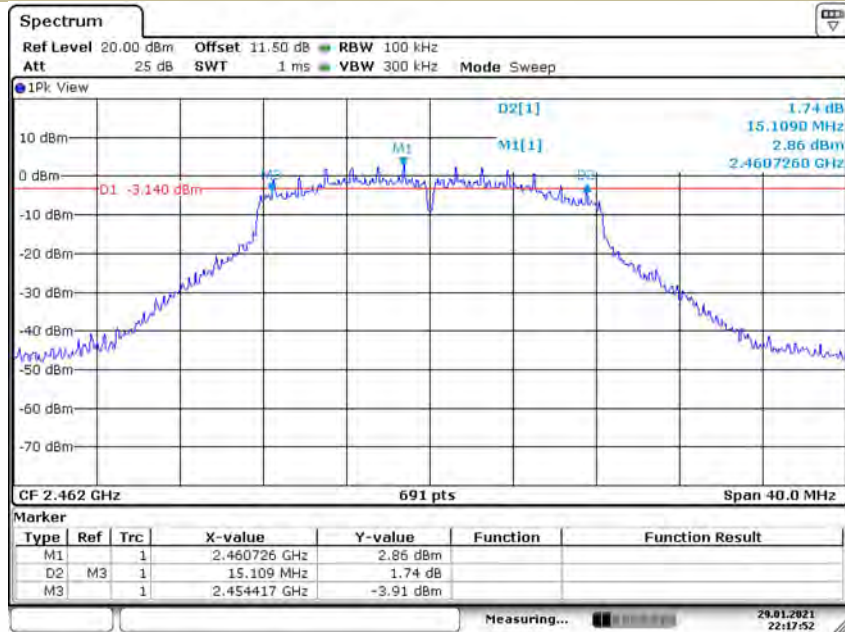


Date: 29.JAN.2021 22:17:52

Test Model DTS (6dB) Bandwidth  
802.11n (HT20)  
Channel 1: 2412MHz

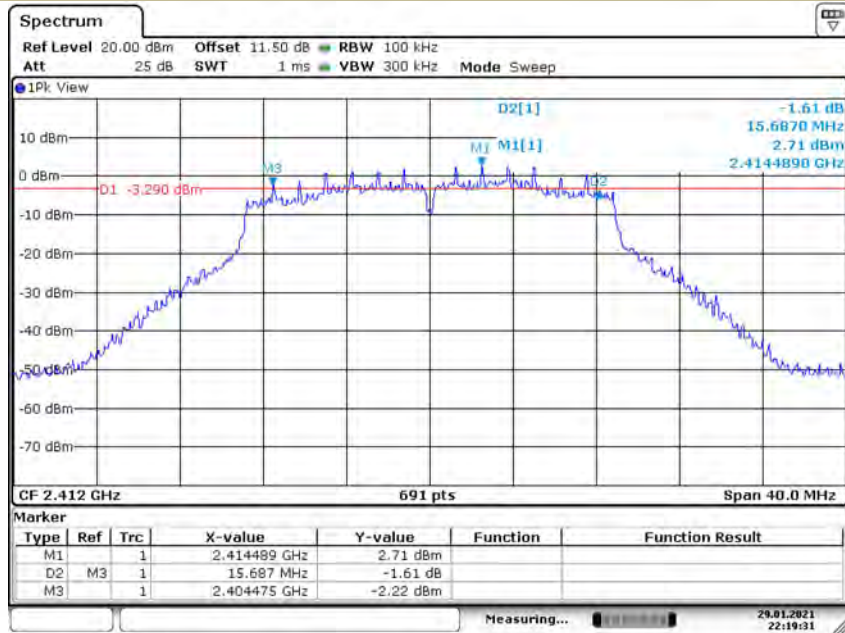

Date: 29.JAN.2021 22:19:31


Test Model DTS (6dB) Bandwidth  
802.11n (HT20)  
Channel 6: 2437MHz

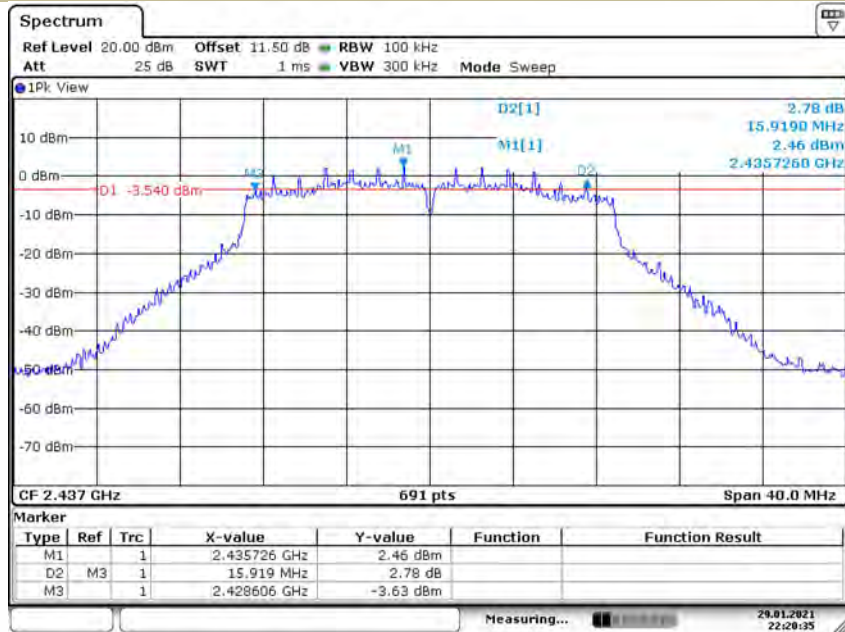


Date: 29.JAN.2021 22:20:35




Test Model DTS (6dB) Bandwidth  
802.11n (HT20)  
Channel 11: 2462MHz

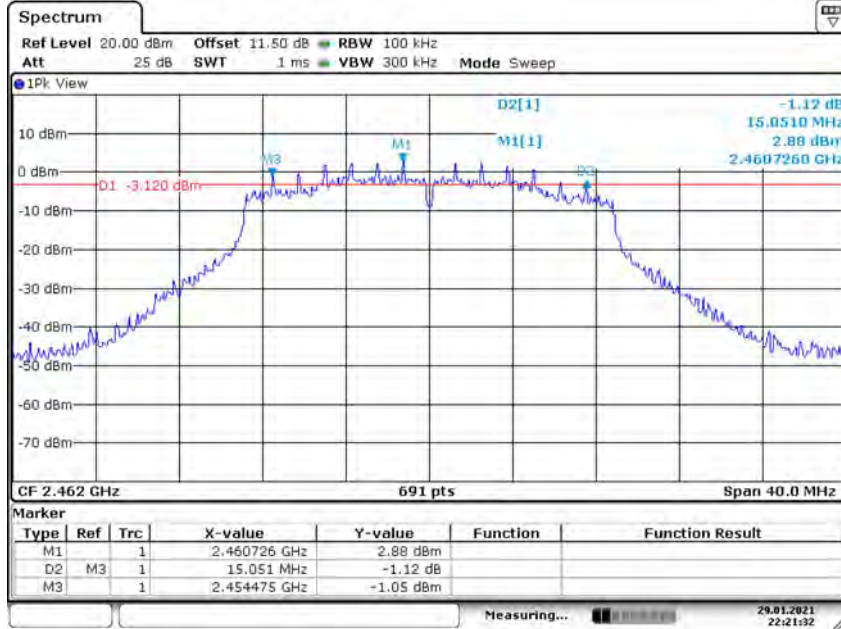

Test Model DTS (6dB) Bandwidth  
802.11n (HT40)  
Channel 11: 2422MHz

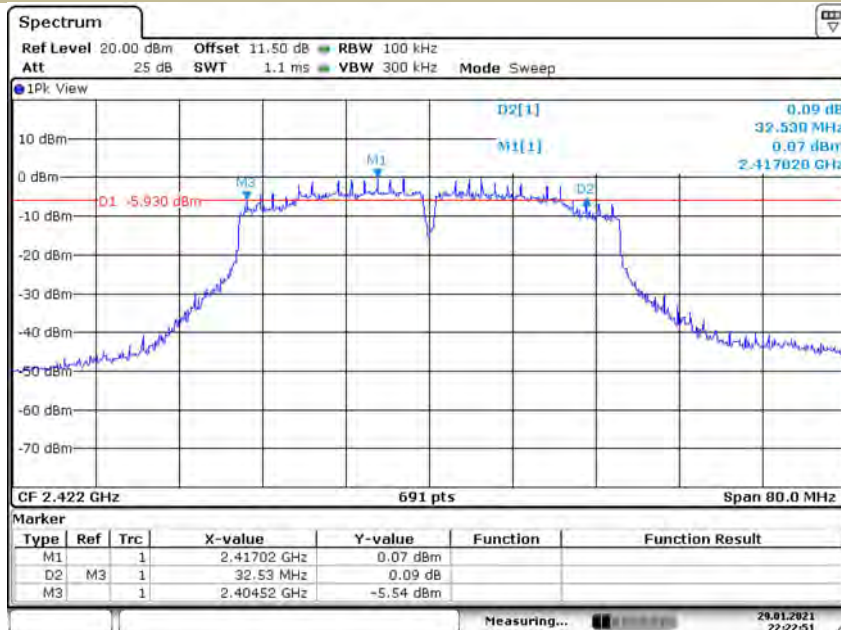


Test Model DTS (6dB) Bandwidth  
802.11n (HT40)  
Channel 11: 2437MHz

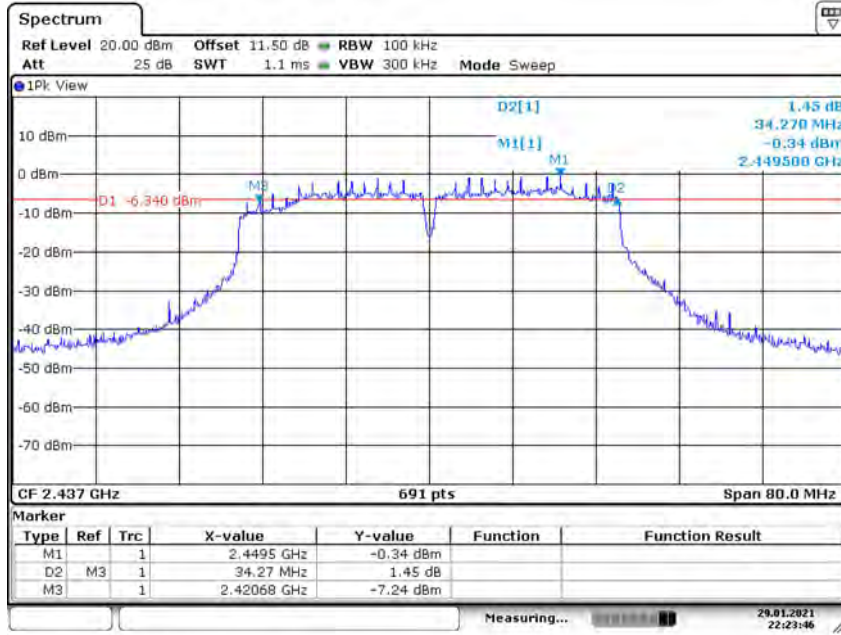

Date: 29. JAN 2021 22:23:46

Test Model DTS (6dB) Bandwidth  
802.11n (HT40)  
Channel 11: 2452MHz

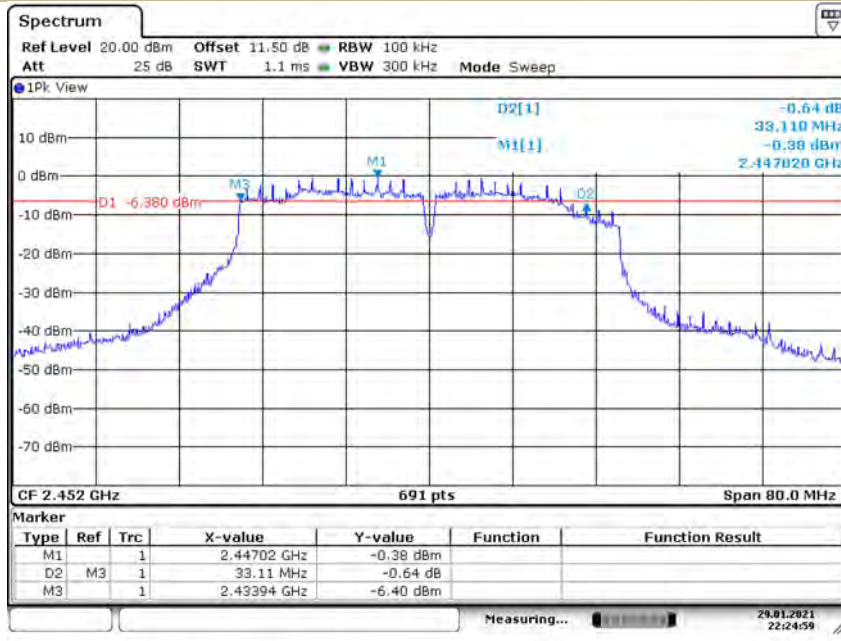

Date: 29. JAN 2021 22:24:59

**8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER**

8.2.1 Applicable Standard

According to FCC Part15.247 (b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)


8.2.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)			Limit (dBm)	Verdict
			Ant 1	Ant 2	Ant 1+ Ant 2		
802.11b	1	2412	13.08	13.15	-	30.00	PASS
	6	2437	13.32	13.37	-	30.00	PASS
	11	2462	13.30	13.27	-	30.00	PASS
802.11g	1	2412	12.01	12.17	-	30.00	PASS
	6	2437	12.34	12.34	-	30.00	PASS
	11	2462	12.34	12.26	-	30.00	PASS
802.11n (ht20)	1	2412	12.00	12.22	15.12	29.16	PASS
	6	2437	12.35	12.35	15.36	29.16	PASS
	11	2462	12.34	12.31	15.34	29.16	PASS
802.11n (ht40)	3	2422	12.42	12.43	<b>15.44</b>	29.16	PASS
	6	2437	12.32	12.31	15.33	29.16	PASS
	9	2452	12.36	12.48	15.43	29.16	PASS

Note: For smart antenna systems, Maximum Conducted Output Power is summed at the total transmit power delivered to all antennas.

Duty Cycle: 8.3768/8.4058=99.66%>98%

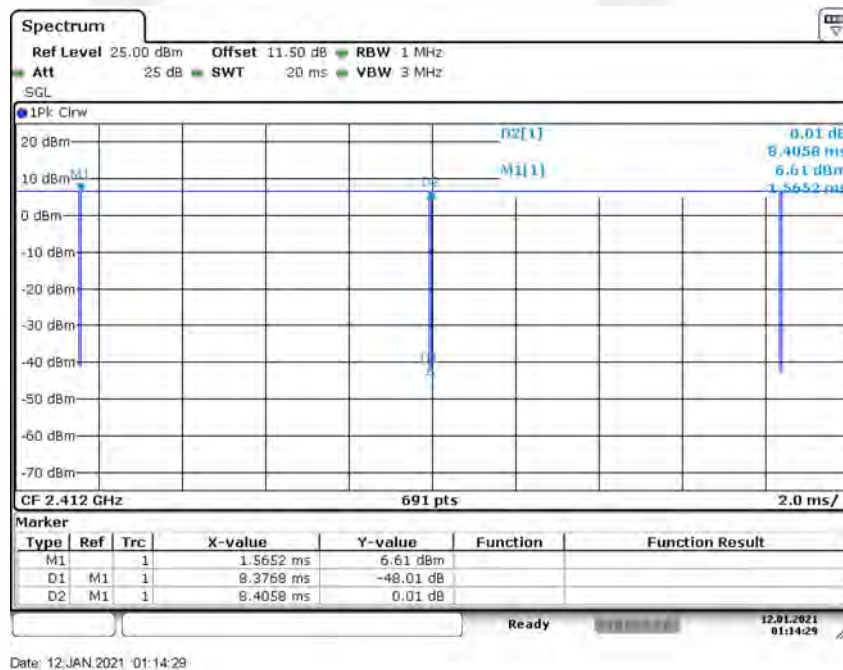

### 8.3 MAXIMUM POWER SPECTRAL DENSITY

#### 8.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

#### 8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

#### 8.3.5 Test Results


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)			Limit (dBm/3kHz)	Verdict
			Ant 1	Ant 2	Ant 1+ Ant 2		
802.11b	1	2412	-9.87	-9.78	-	<=8	PASS
	6	2437	-9.80	-10.01	-	<=8	PASS
	11	2462	-9.54	-9.62	-	<=8	PASS
802.11g	1	2412	-11.96	-11.67	-	<=8	PASS
	6	2437	-11.76	-12.08	-	<=8	PASS
	11	2462	-11.78	-11.73	-	<=8	PASS
802.11n (ht20)	1	2412	-10.85	-12.59	-8.62	<=8	PASS
	6	2437	-10.23	-11.50	-7.81	<=8	PASS
	11	2462	-11.51	-11.98	-8.73	<=8	PASS
802.11n (ht40)	3	2422	-13.51	-14.57	-11.00	<=8	PASS
	6	2437	-14.97	-14.15	-11.53	<=8	PASS
	9	2452	-13.69	-14.36	-11.00	<=8	PASS

Note: For smart antenna systems, Maximum Conducted Output Power is summed at the total transmit power delivered to all antennas.


## Ant. 1

Test Model Power Spectral Density  
802.11b  
Channel 1: 2412MHz

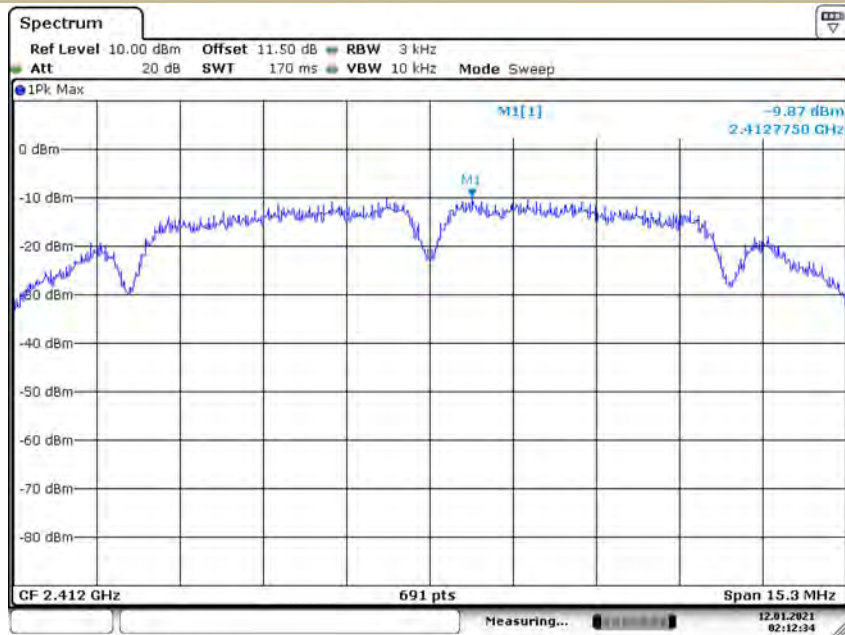

Date: 12.JAN.2021 02:12:35

Test Model Power Spectral Density  
802.11b  
Channel 6: 2437MHz

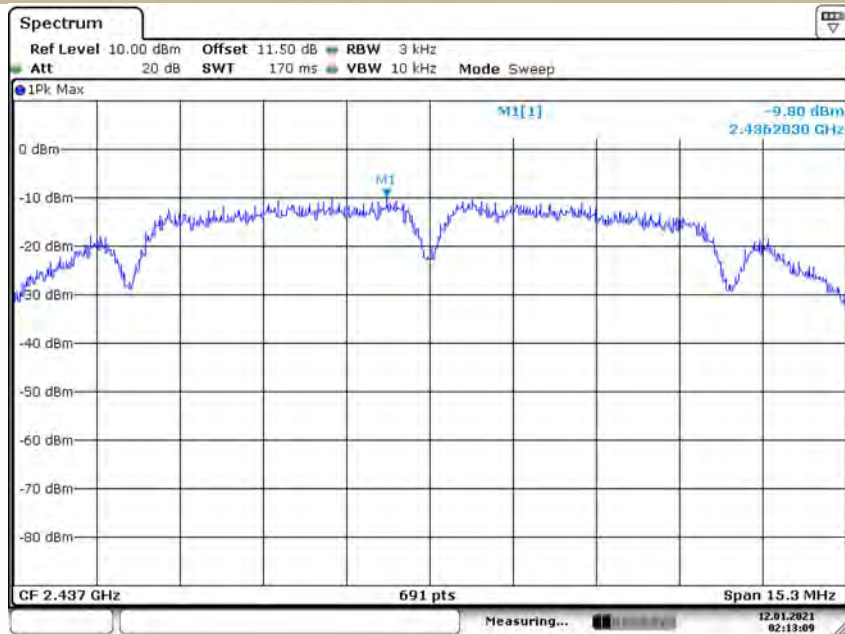


Date: 12.JAN.2021 02:13:08

Test Model Power Spectral Density  
802.11b  
Channel 11: 2462MHz




Date: 12.JAN.2021 02:13:34

Test Model Power Spectral Density  
802.11g  
Channel 1: 2412MHz

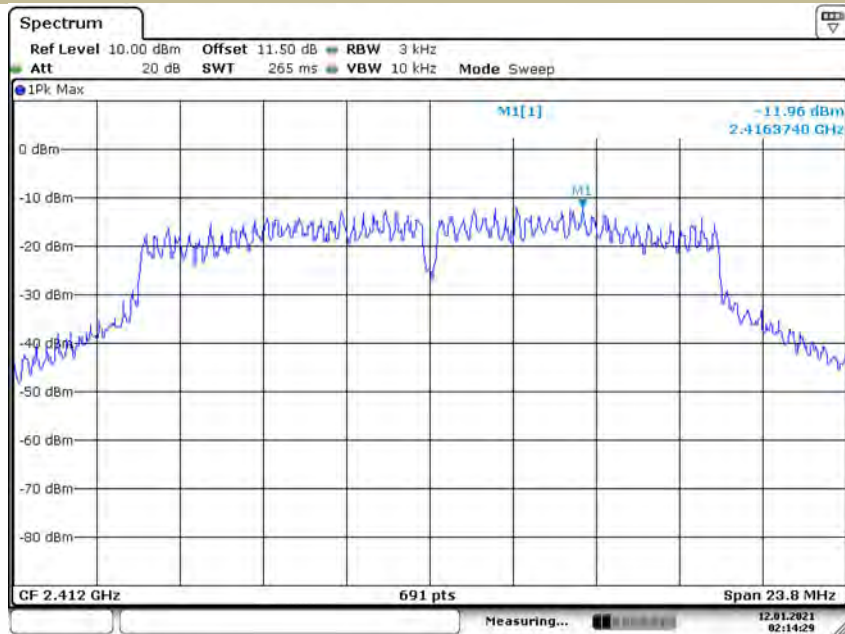


Date: 12.JAN.2021 02:14:29

Test Model Power Spectral Density  
802.11g  
Channel 6: 2437MHz

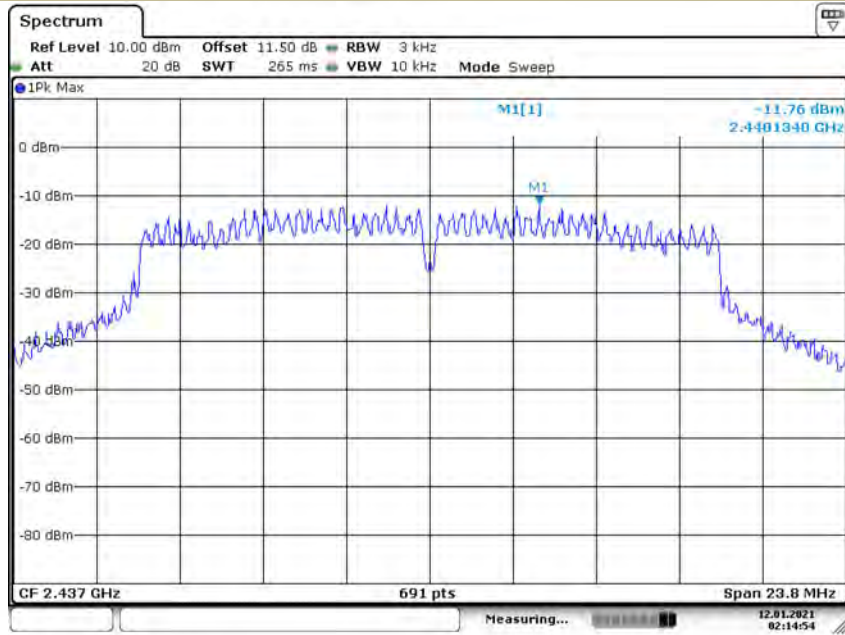

Date: 12.JAN.2021 02:14:54


Test Model Power Spectral Density  
802.11g  
Channel 11: 2462MHz

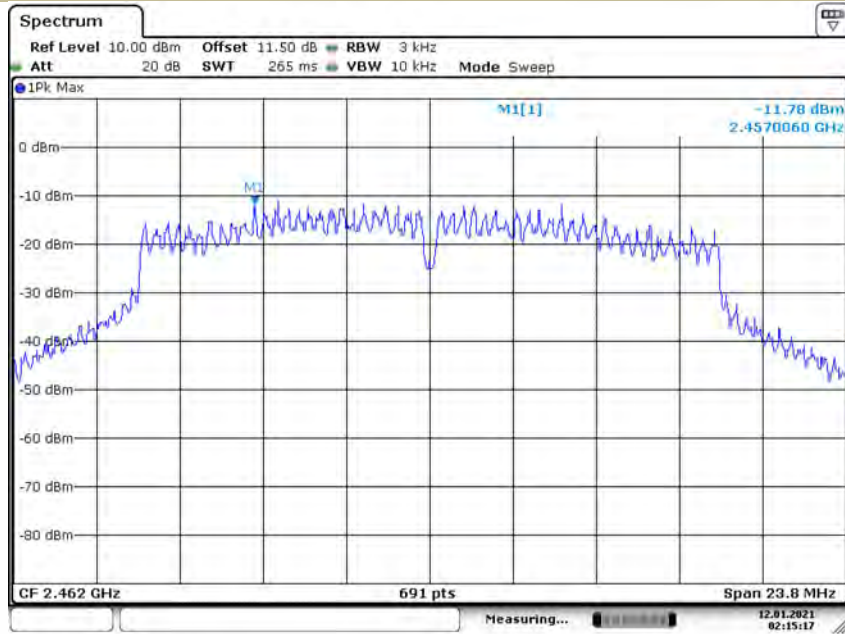

Date: 12.JAN.2021 02:15:18




Test Model Power Spectral Density  
802.11n (HT20)  
Channel 1: 2412MHz

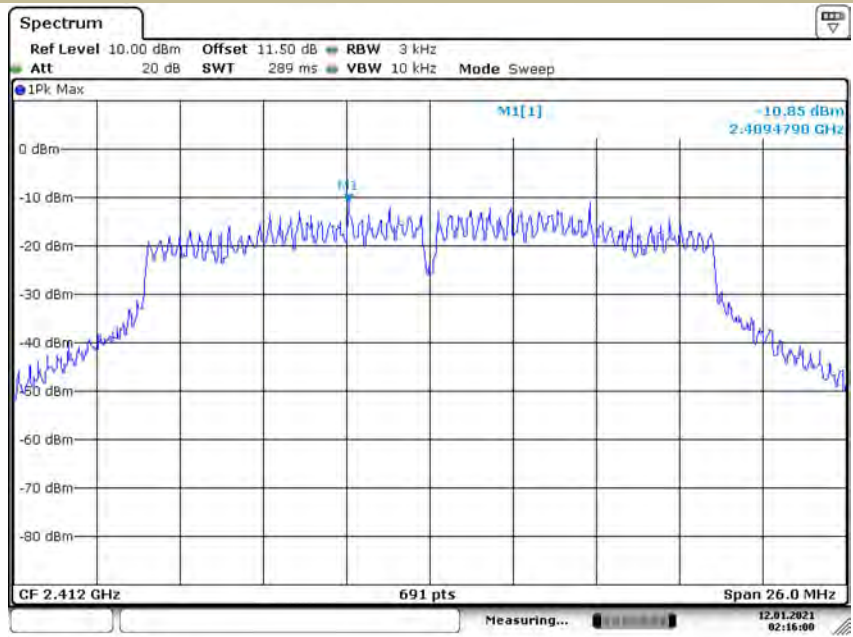


Date: 12.JAN.2021 02:16:00

Test Model Power Spectral Density  
802.11n (HT20)  
Channel 6: 2437MHz

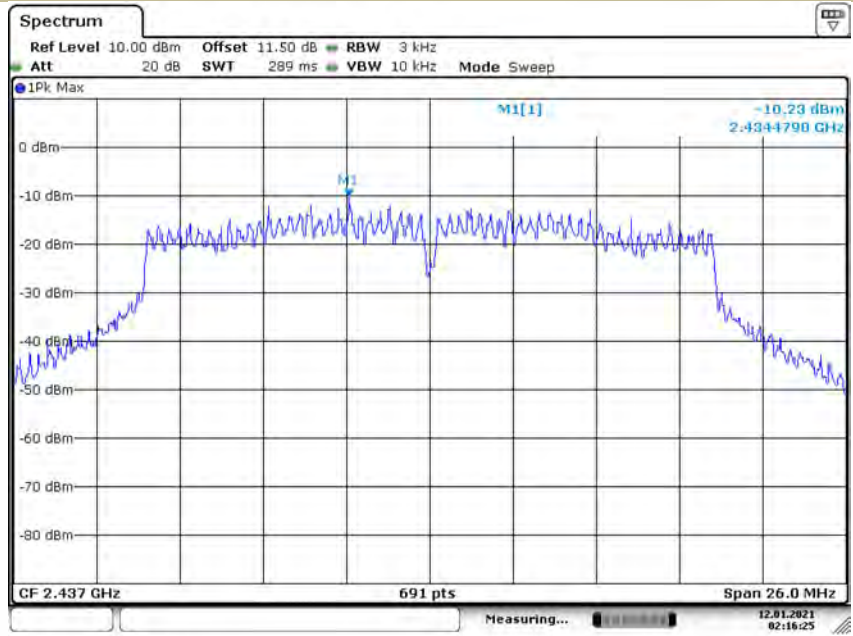


Date: 12.JAN.2021 02:16:26

Test Model Power Spectral Density  
802.11n (HT20)  
Channel 11: 2462MHz

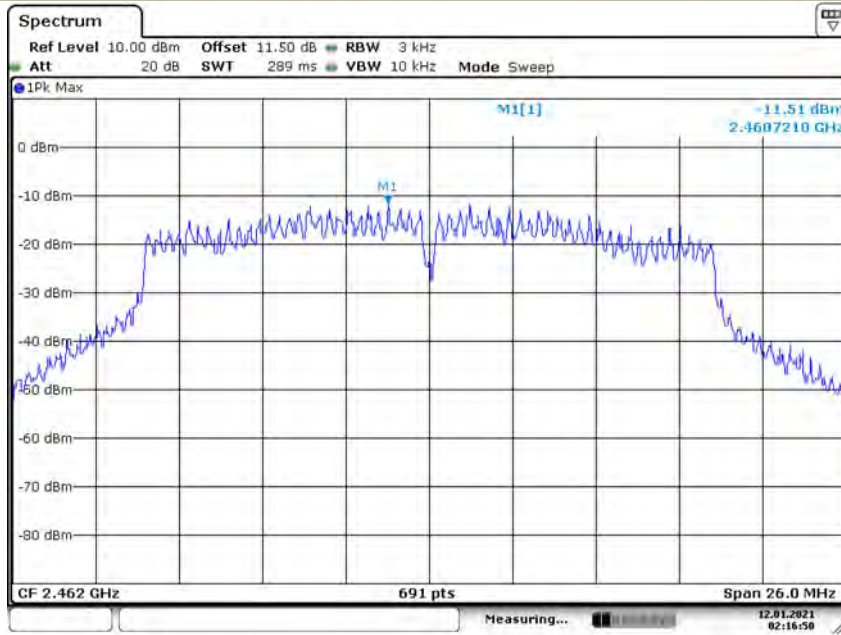


Date: 12.JAN.2021 02:16:49

Test Model Power Spectral Density  
802.11n (HT40)  
Channel 3: 2422MHz

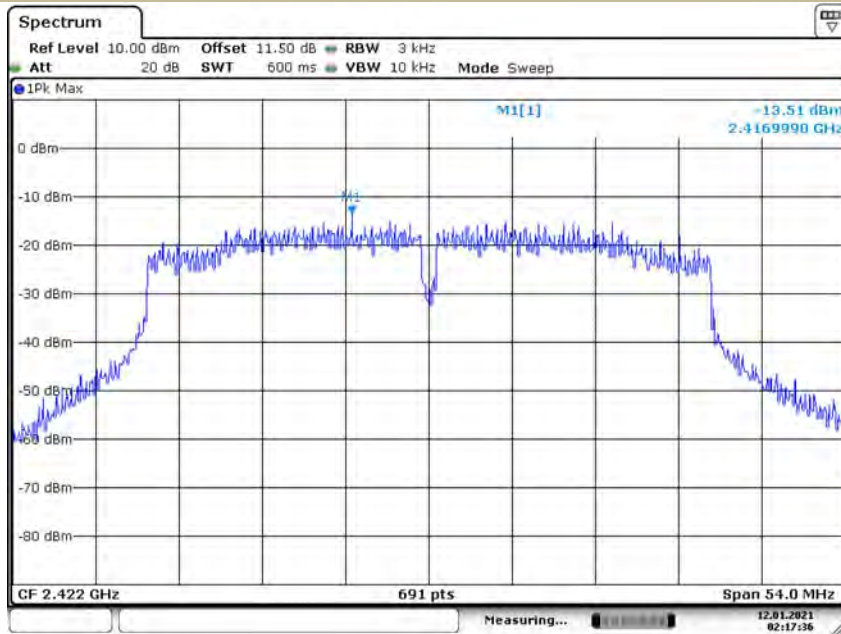


Date: 12.JAN.2021 02:17:36

Test Model Power Spectral Density  
802.11n (HT40)  
Channel 6: 2437MHz

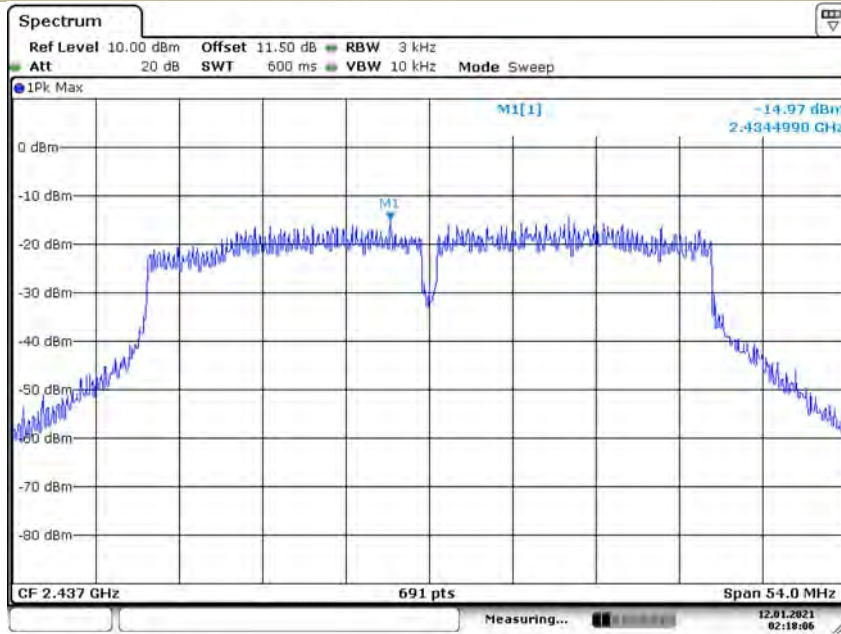

Date: 12.JAN.2021 02:18:06

Test Model Power Spectral Density  
802.11n (HT40)  
Channel 9: 2452MHz

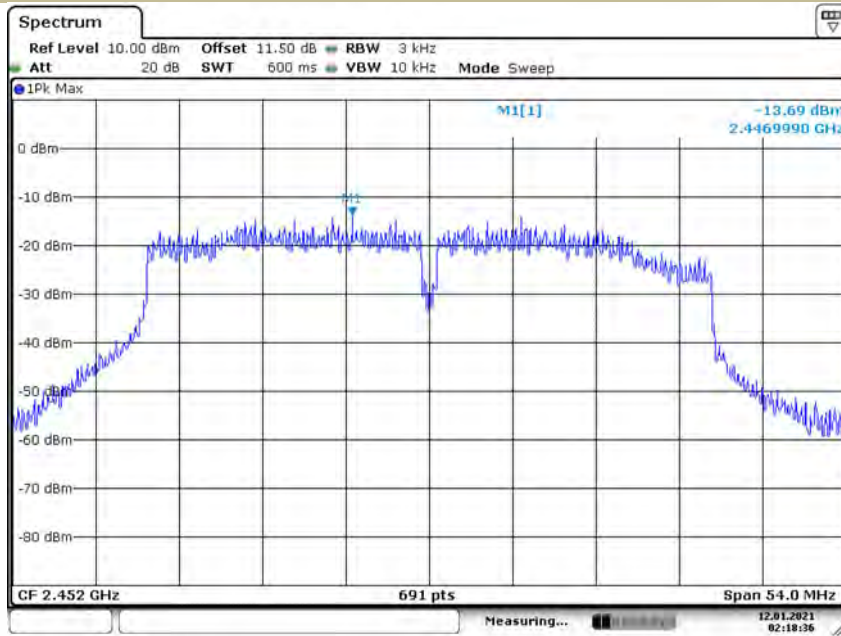


Date: 12.JAN.2021 02:18:37

## Ant.2


Test Model

Power Spectral Density  
802.11b  
Channel 1: 2412MHz

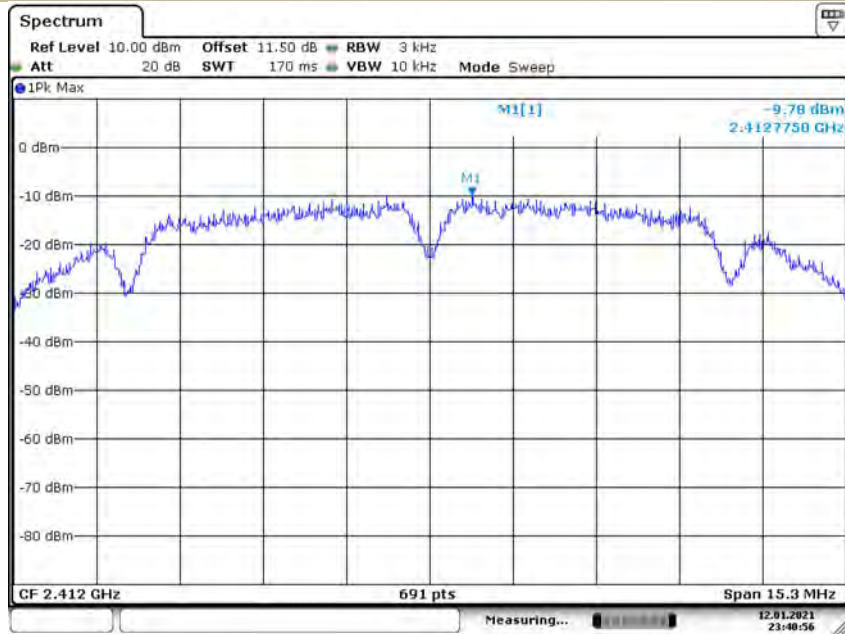


Test Model

Power Spectral Density  
802.11b  
Channel 6: 2437MHz

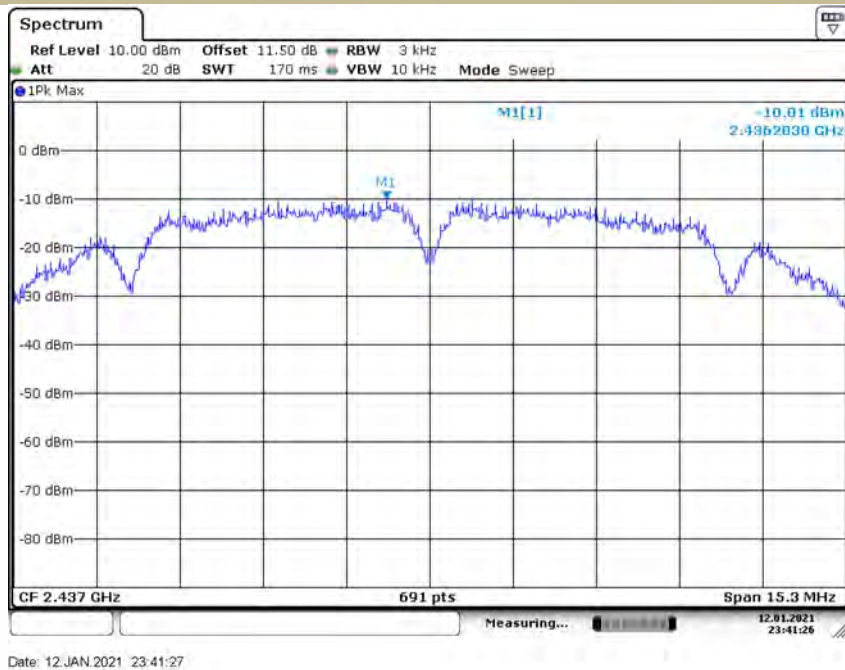


Test Model Power Spectral Density  
802.11b  
Channel 11: 2462MHz

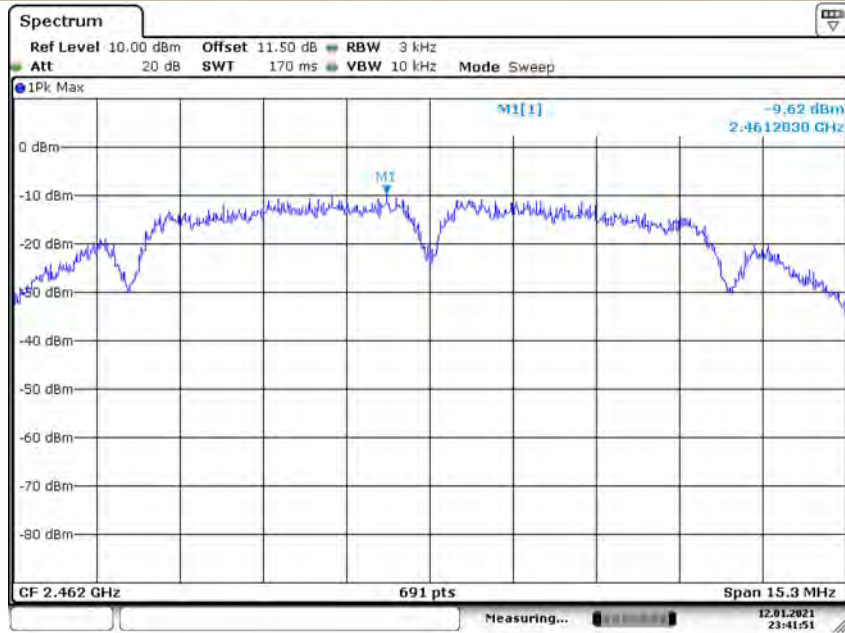


Date: 12.JAN.2021 23:41:51

Test Model Power Spectral Density  
802.11g  
Channel 1: 2412MHz

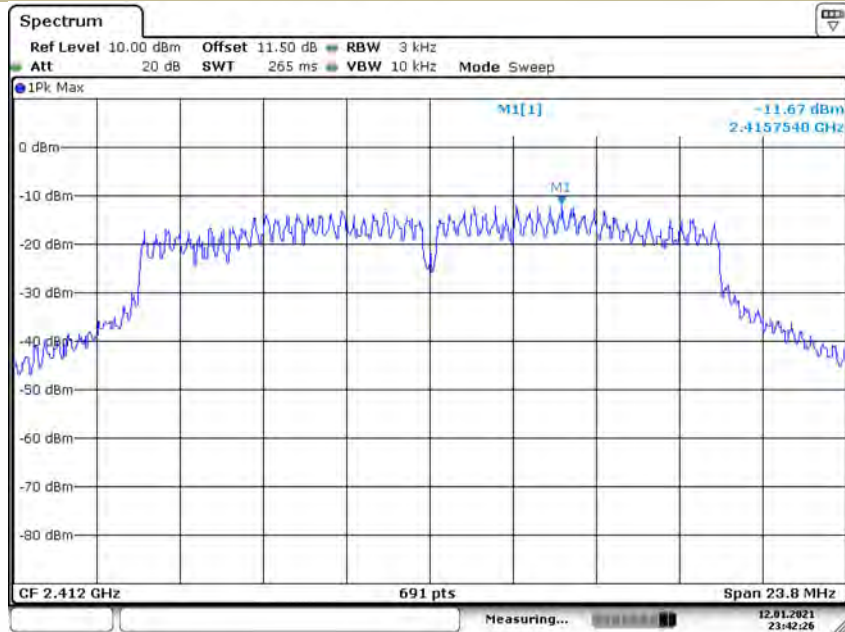


Date: 12.JAN.2021 23:42:27

Test Model Power Spectral Density  
802.11g  
Channel 6: 2437MHz

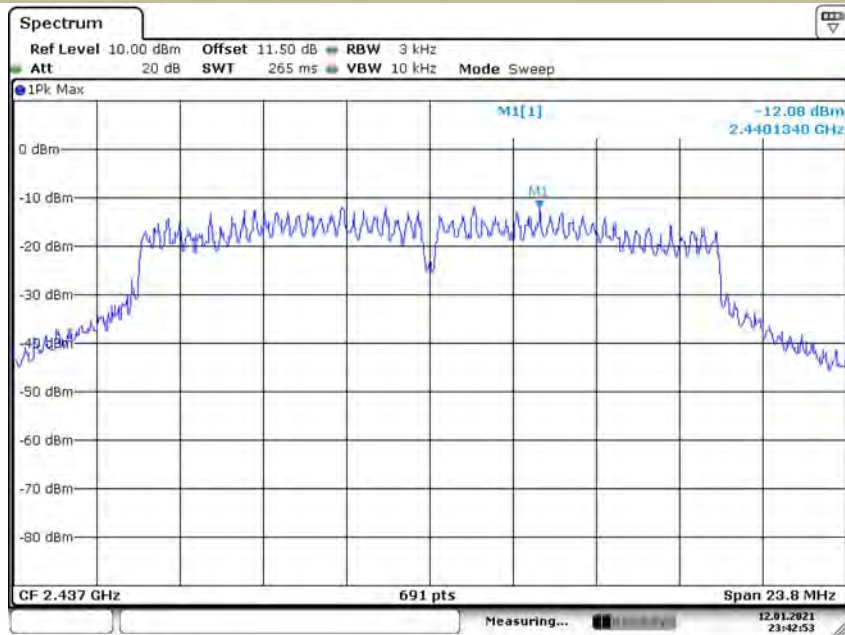


Date: 12.JAN.2021 23:42:53

Test Model Power Spectral Density  
802.11g  
Channel 11: 2462MHz

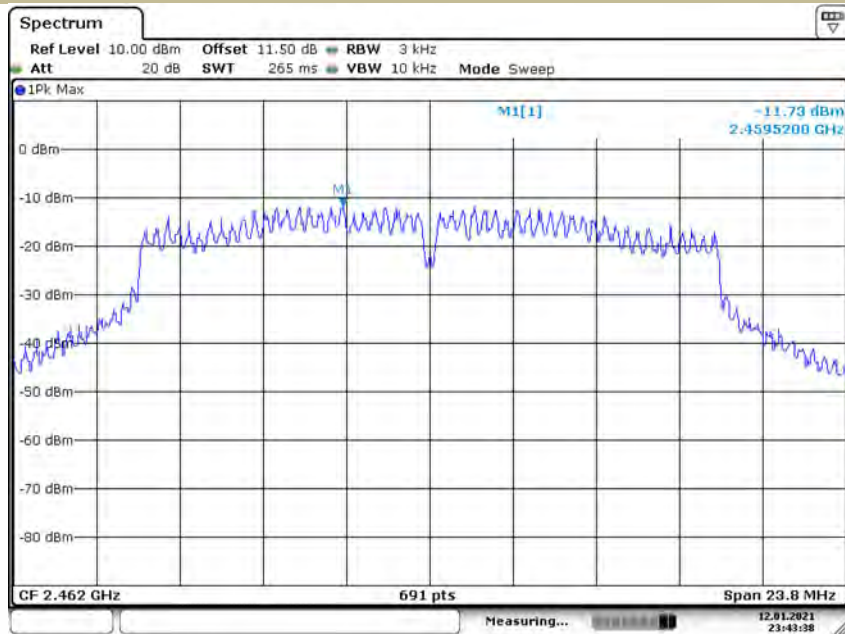


Date: 12.JAN.2021 23:43:38

Test Model Power Spectral Density  
802.11n (HT20)  
Channel 1: 2412MHz

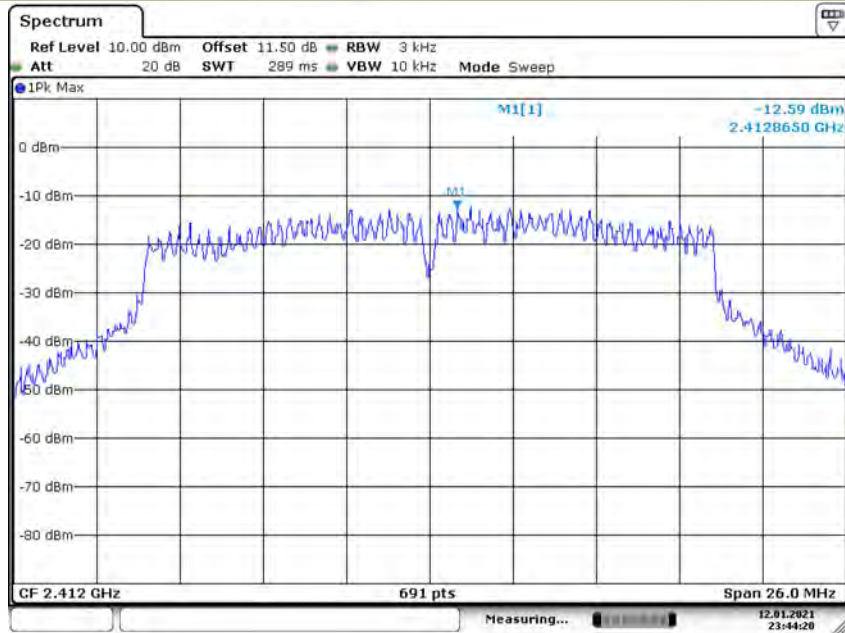


Date: 12.JAN.2021 23:44:20

Test Model Power Spectral Density  
802.11n (HT20)  
Channel 6: 2437MHz

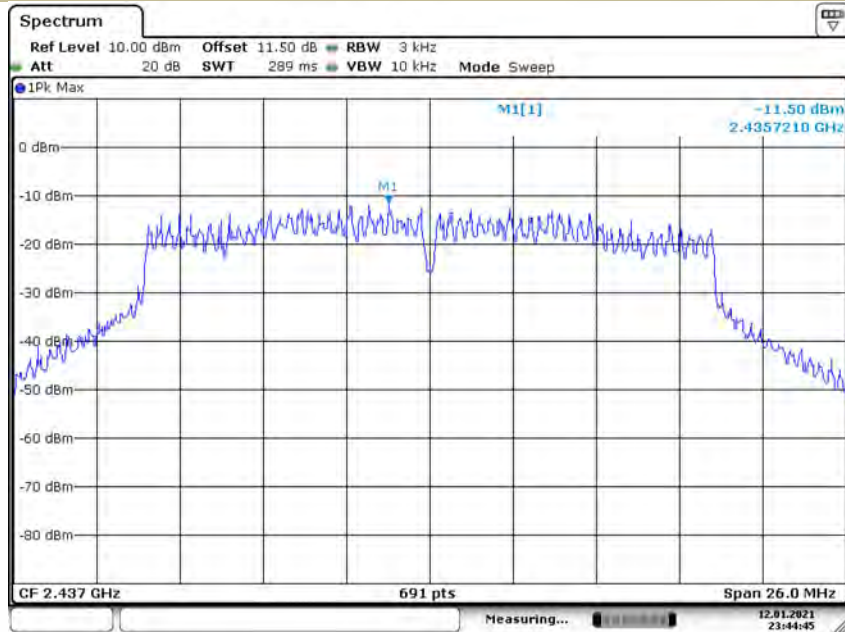


Date: 12.JAN.2021 23:44:46

Test Model Power Spectral Density  
802.11n (HT20)  
Channel 11: 2462MHz

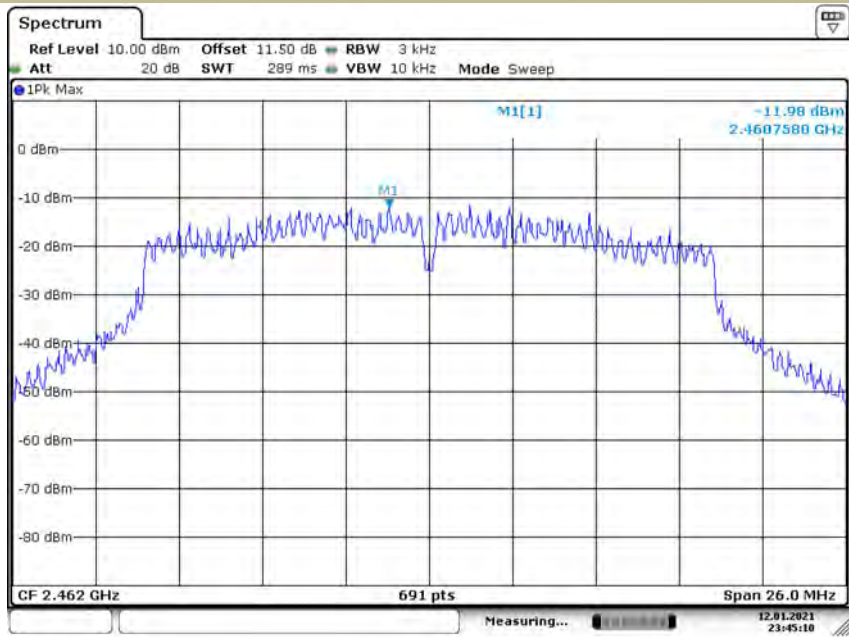

Date: 12.JAN.2021 23:45:10


Test Model Power Spectral Density  
802.11n (HT40)  
Channel 3: 2422MHz

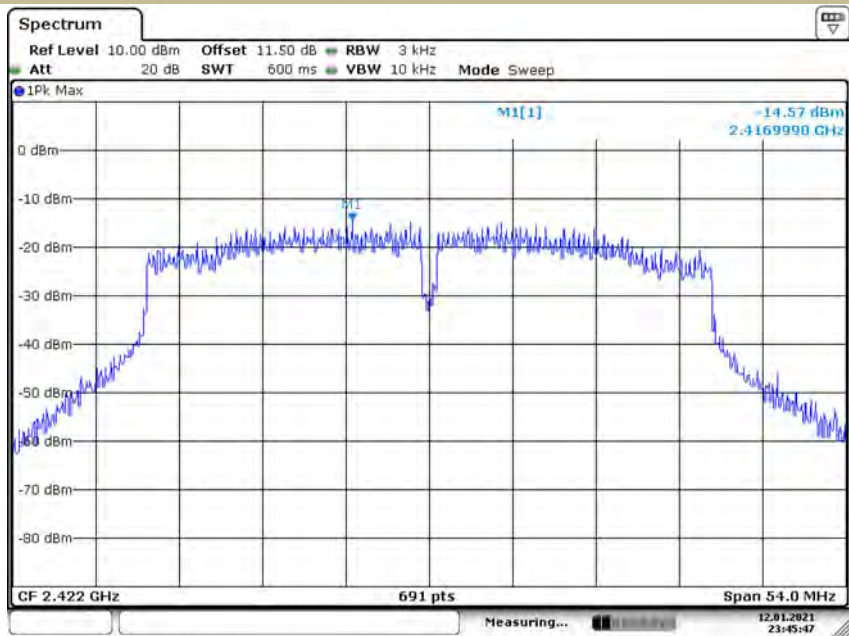

Date: 12.JAN.2021 23:45:47




Test Model Power Spectral Density  
802.11n (HT40)  
Channel 6: 2437MHz

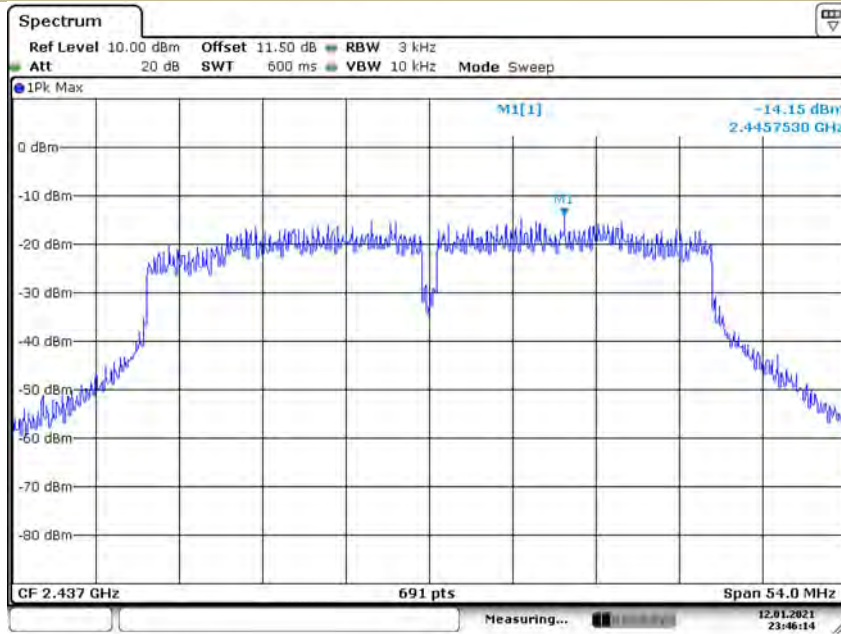

Date: 12.JAN.2021 23:46:15

Test Model Power Spectral Density  
802.11n (HT40)  
Channel 9: 2452MHz

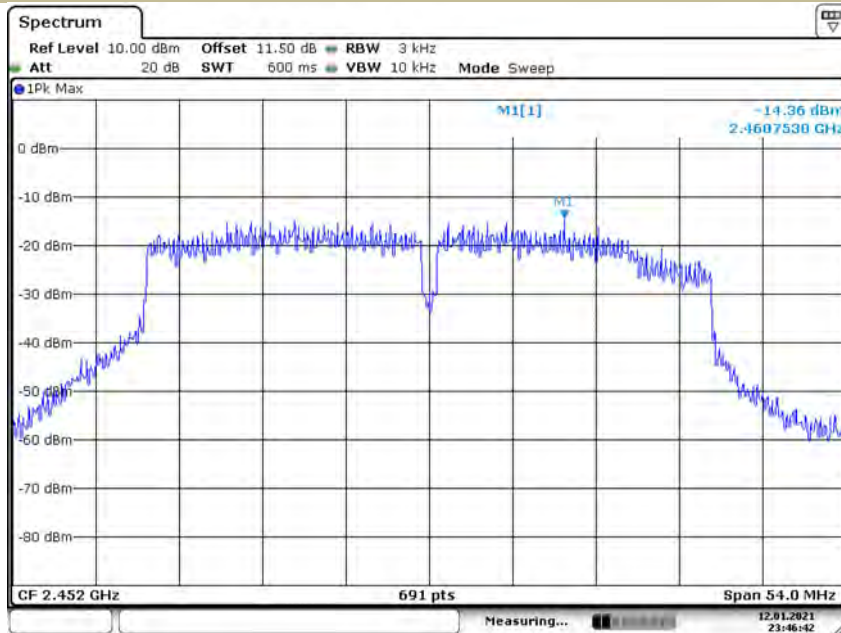

Date: 12.JAN.2021 23:46:42

## 8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

### 8.4.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

### 8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### ■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW =300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements . Report the three highest emissions relative to the limit.

### 8.4.5 Test Results


### 1T1R- Antenna 1

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

PSD(Power Spectral Density ) RBW=100kHz

Test Model       802.11b       802.11g       802.11n(HT20)       802.11n(HT40)

Channel 1: 2412MHz       Channel 3: 2422MHz

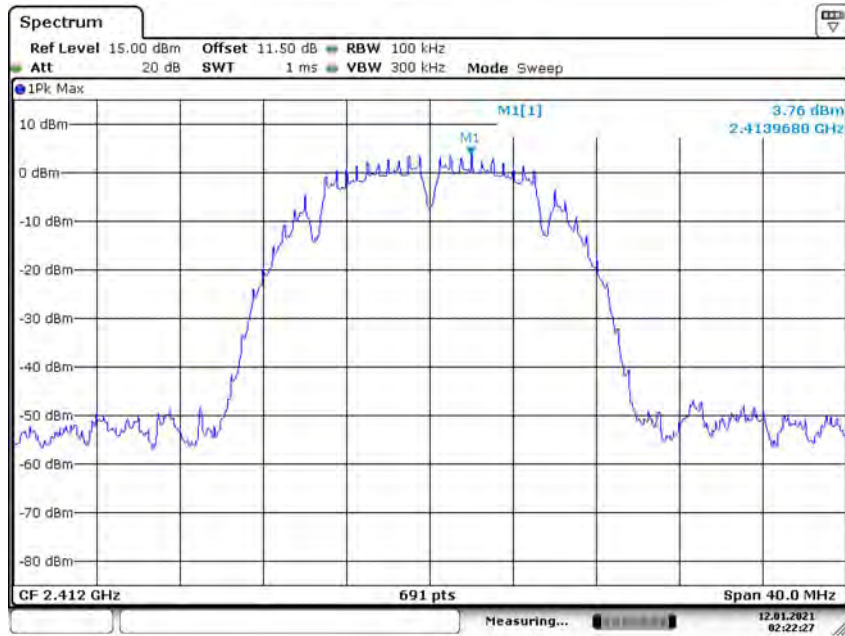


Date: 12 JAN 2021 02:22:28

Unwanted Emissions in non-restricted frequency bands


Test Model       802.11b       802.11g       802.11n(HT20)       802.11n(HT40)

Channel 1: 2412MHz       Channel 3: 2422MHz

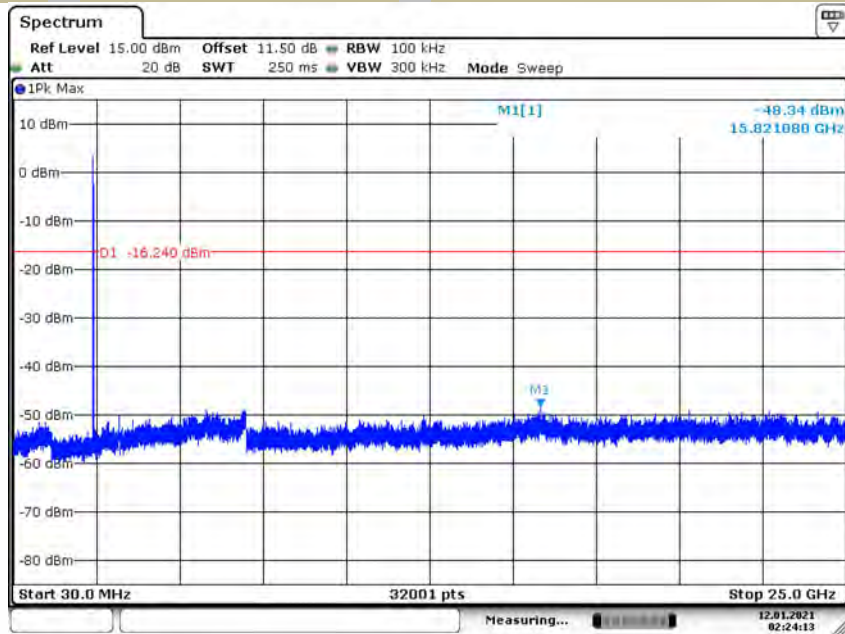


Date: 12 JAN 2021 02:24:13

Test Model  802.11b  802.11g  802.11n(HT20)  802.11n(HT40)  
 Channel 1: 2412MHz  Channel 3: 2422MHz

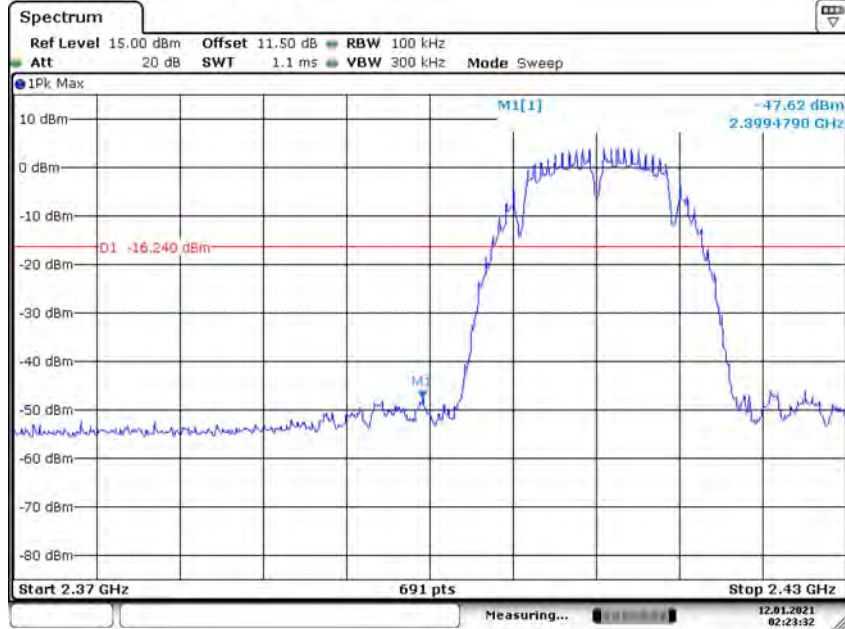

Date: 12.JAN.2021 02:23:32

Test Model  802.11b  802.11g  802.11n(HT20)  802.11n(HT40)  
 PSD(Power Spectral Density) RBW=100kHz  
 Channel 6: 2437MHz

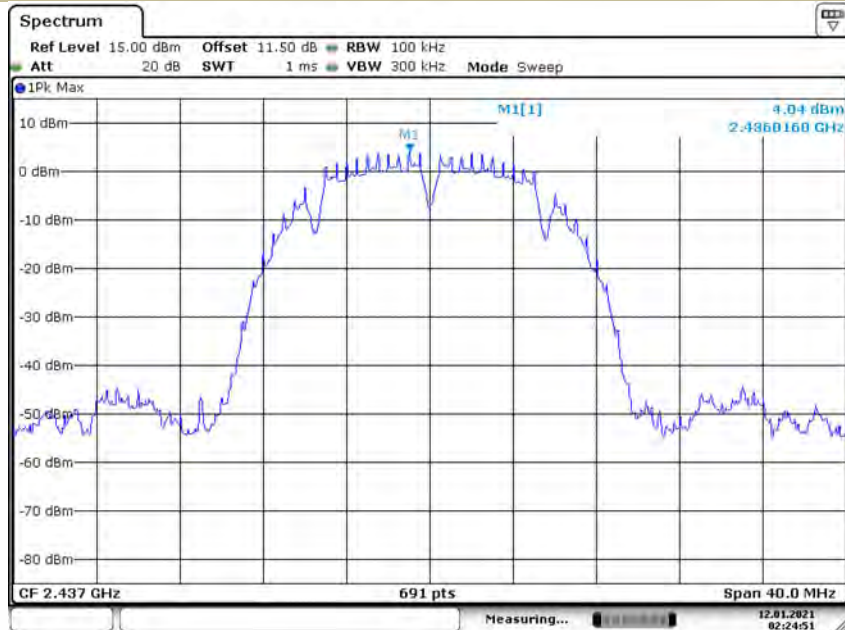


Date: 12.JAN.2021 02:24:51

**Unwanted Emissions In Non-Restricted Frequency Bands**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)

Channel 6: 2437MHz

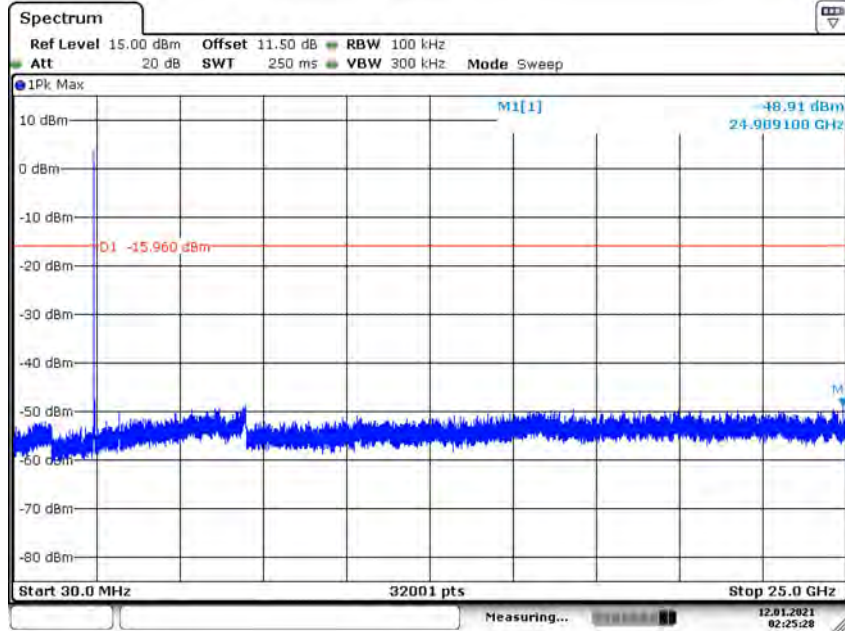


Date: 12.JAN.2021 02:25:28

**PSD(Power Spectral Density ) RBW=100kHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)


Channel 11: 2462MHz     Channel 9: 2452MHz

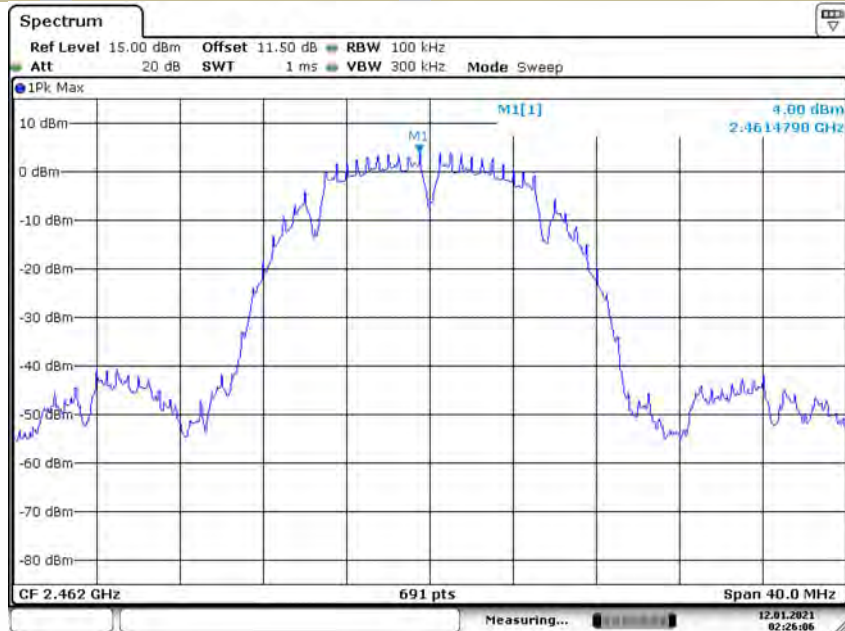

Date: 12.JAN.2021 02:25:07

**Unwanted Emissions In Non-Restricted Frequency Bands**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 11: 2462MHz     Channel 9: 2452MHz

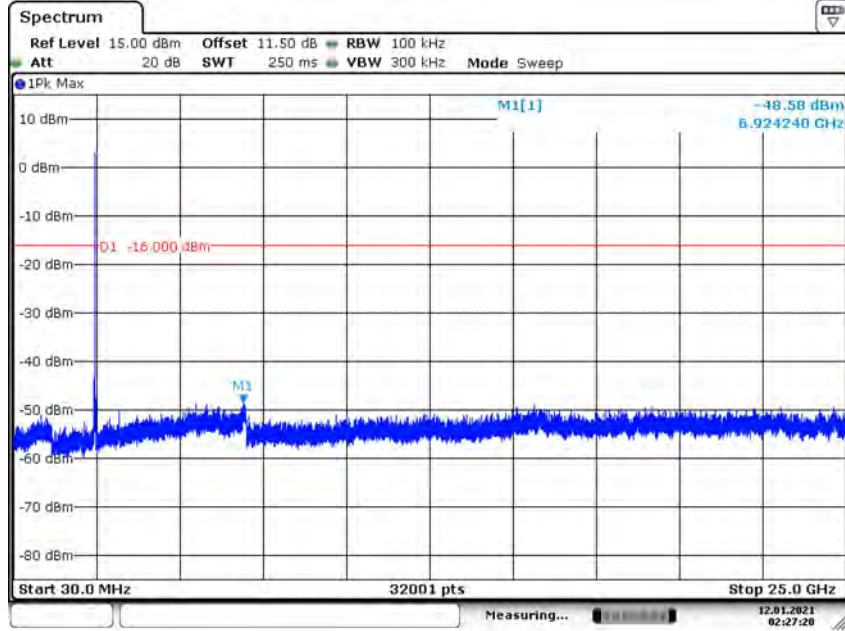

Date: 12.JAN.2021 02:27:21

**Band edge**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 11: 2462MHz     Channel 9: 2452MHz

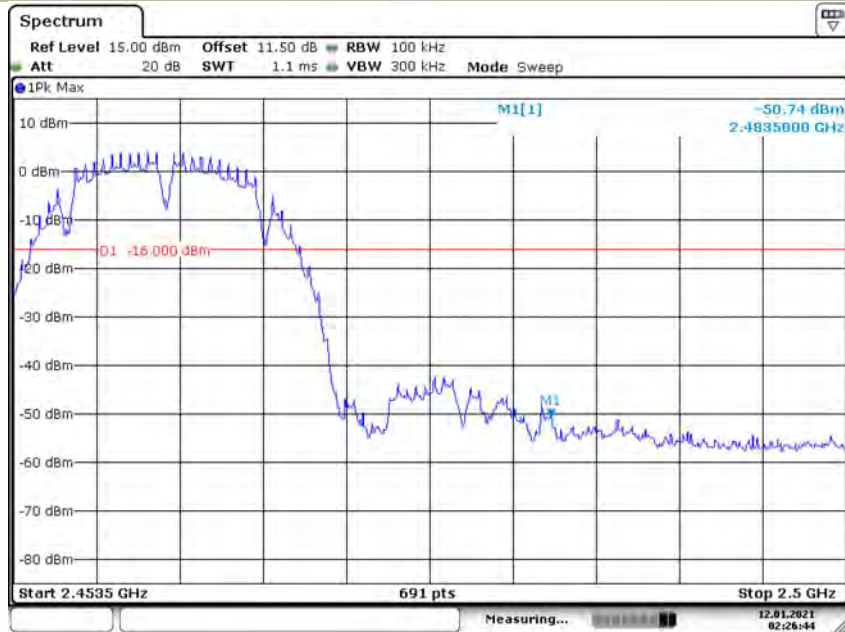

Date: 12.JAN.2021 02:26:44

## 8.5 RADIATED SPURIOUS EMISSION

### 8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

### 8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz(1GHz to 25GHz), 100 kHz for  $f < 1$  GHz(30MHz to 1GHz), 200Hz for  $f < 150$ KHz(9KHz to 150KHz), 9KHz for  $f < 30$ MHz(150KHz to 30KHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the

measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 8.5.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

#### ■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance}/ \text{test distance})$ ( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor



■ Spurious Emission Above 1GHz(1GHz to 25GHz)

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4776.42	V	46.46	32.40	74	54	-27.54	-21.60
7829.86	V	53.05	36.10	74	54	-20.95	-17.90
11566.86	V	56.76	38.60	74	54	-17.24	-15.40
2001.08	H	42.82	27.30	74	54	-31.18	-26.70
5194.04	H	47.96	33.80	74	54	-26.04	-20.20
10791.68	H	56.18	37.40	74	54	-17.82	-16.60

Test mode: 802.11 b Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
3114.03	V	41.15	26.80	74	54	-32.85	-27.20
7807.26	V	53.56	36.50	74	54	-20.44	-17.50
14491.95	V	58.38	40.20	74	54	-15.62	-13.80
3069.35	H	41.28	27.00	74	54	-32.72	-27.00
5487.26	H	47.51	34.10	74	54	-26.49	-19.90
12044.52	H	56.65	37.80	74	54	-17.35	-16.20

Test mode: 802.11 b Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
2053.82	V	41.51	27.30	74	54	-32.49	-26.70
4776.42	V	46.53	32.80	74	54	-27.47	-21.20
12044.52	V	57.08	38.60	74	54	-16.92	-15.40
1995.31	H	41.99	28.40	74	54	-32.01	-25.60
7829.86	H	53.27	37.20	74	54	-20.73	-16.80
14575.97	H	58.30	43.86	74	54	-15.70	-10.14

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test mode: 802.11 g Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4566.67	V	56.73	43.27	74	54	-17.27	-10.73
7236.00	V	51.25	39.6	74	54	-22.75	-14.40
9648.00	V	47.23	36.35	74	54	-26.77	-17.65
4566.67	H	56.76	42.96	74	54	-17.24	-11.04
7236.00	H	51.38	38.99	74	54	-22.62	-15.01
9648.00	H	48.42	36.38	74	54	-25.58	-17.62

Test mode: 802.11 g Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4526.82	V	55.18	42.79	74	54	-18.82	-11.21
7311.00	V	53.95	39.01	74	54	-20.05	-14.99
9748.00	V	49.61	35.01	74	54	-24.39	-18.99
4526.82	H	56.54	42.6	74	54	-17.46	-11.40
7311.00	H	52.68	39.34	74	54	-21.32	-14.66
9748.00	H	47.47	36.77	74	54	-26.53	-17.23

Test mode: 802.11 g Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924.00	V	57.06	43.79	74	54	-16.94	-10.21
7378.59	V	50.61	39.89	74	54	-23.39	-14.11
9848.00	V	49.01	37.83	74	54	-24.99	-16.17
4924.00	H	58.51	41.28	74	54	-15.49	-12.72
7378.59	H	53.81	38.89	74	54	-20.19	-15.11
9848.00	H	49.41	37.68	74	54	-24.59	-16.32

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test mode: 802.11 N20 Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4430.39	V	57.29	43.94	74	54	-16.71	-10.06
7236.00	V	53.86	39.41	74	54	-20.14	-14.59
9648.00	V	49.61	37.84	74	54	-24.39	-16.16
4430.39	H	56.43	41.39	74	54	-17.57	-12.61
7236.00	H	53.47	40.32	74	54	-20.53	-13.68
9648.00	H	50.71	37.82	74	54	-23.29	-16.18

Test mode: 802.11 N20 Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4375.06	V	56.3	41.08	74	54	-17.70	-12.92
7311.00	V	52.9	40.58	74	54	-21.10	-13.42
9748.00	V	49.73	37.03	74	54	-24.27	-16.97
4375.06	H	57.39	43.37	74	54	-16.61	-10.63
7311.00	H	51.28	38.64	74	54	-22.72	-15.36
9748.00	H	50.2	36.88	74	54	-23.80	-17.12

Test mode: 802.11 N20 Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924.35	V	58.7	41.14	74	54	-15.30	-12.86
7575.54	V	50.48	38.41	74	54	-23.52	-15.59
9848.00	V	49.93	37.31	74	54	-24.07	-16.69
4924.17	H	57.64	41.79	74	54	-16.36	-12.21
7575.54	H	52.1	40.98	74	54	-21.90	-13.02
9848.00	H	50.16	35.62	74	54	-23.84	-18.38

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test mode: 802.11 N40 Frequency: Channel 3: 2422MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4541.48	V	55.91	41.12	74	54	-18.09	-12.88
7266.00	V	51.34	40.84	74	54	-22.66	-13.16
9688.00	V	50.16	37.6	74	54	-23.84	-16.40
4541.48	H	58	43.63	74	54	-16.00	-10.37
7266.00	H	53.42	40.89	74	54	-20.58	-13.11
9688.00	H	49.49	37.39	74	54	-24.51	-16.61

Test mode: 802.11 N40 Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4550.4	V	55.83	42.24	74	54	-18.17	-11.76
7311.00	V	53.39	39.76	74	54	-20.61	-14.24
9748.00	V	47.07	37.49	74	54	-26.93	-16.51
4550.40	H	57.18	42.85	74	54	-16.82	-11.15
7311.00	H	51.68	39.67	74	54	-22.32	-14.33
9748.00	H	50.19	36.59	74	54	-23.81	-17.41

Test mode: 802.11 N40 Frequency: Channel 9: 2452MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4904.00	V	55.78	41.49	74	54	-18.22	-12.51
7577.51	V	50.82	40.33	74	54	-23.18	-13.67
9808.00	V	48.72	35.48	74	54	-25.28	-18.52
4904.00	H	57.67	43.51	74	54	-16.33	-10.49
7577.51	H	50.31	39.76	74	54	-23.69	-14.24
9808.00	H	50.85	35.85	74	54	-23.15	-18.15

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test mode: 802.11 N20(MIMO) Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4550.32	V	56.38	42.69	74	54	-17.62	-11.31
7236.00	V	53.18	40.92	74	54	-20.82	-13.08
9648.00	V	50.95	36.86	74	54	-23.05	-17.14
4550.32	H	55.67	41.59	74	54	-18.33	-12.41
7236.00	H	50.41	39.72	74	54	-23.59	-14.28
9648.00	H	47.61	37.65	74	54	-26.39	-16.35

Test mode: 802.11 N20(MIMO) Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4298.1	V	58.87	41.79	74	54	-15.13	-12.21
7311.00	V	51.69	40.08	74	54	-22.31	-13.92
9748.00	V	47.57	37.82	74	54	-26.43	-16.18
4298.10	H	55.63	41.82	74	54	-18.37	-12.18
7311.00	H	50.86	38.17	74	54	-23.14	-15.83
9748.00	H	50.68	38	74	54	-23.32	-16.00

Test mode: 802.11 N20(MIMO) Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924.00	V	55.36	43.07	74	54	-18.64	-10.93
7264.02	V	51.47	39.2	74	54	-22.53	-14.80
9848.00	V	47.46	36.56	74	54	-26.54	-17.44
4924.00	H	57.42	42.83	74	54	-16.58	-11.17
7264.02	H	51.02	39.81	74	54	-22.98	-14.19
9848.00	H	49.57	36.6	74	54	-24.43	-17.40

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test mode: 802.11 N40(MIMO) Frequency: Channel 3: 2422MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4588.1	V	58.93	42.33	74	54	-15.07	-11.67
7266.00	V	53.14	39.45	74	54	-20.86	-14.55
9688.00	V	49.24	37.94	74	54	-24.76	-16.06
4588.10	H	58.38	43.3	74	54	-15.62	-10.70
7266.00	H	52.58	39.3	74	54	-21.42	-14.70
9688.00	H	47.09	36.96	74	54	-26.91	-17.04

Test mode: 802.11 N40(MIMO) Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4200.05	V	58.12	43.67	74	54	-15.88	-10.33
7311.00	V	53.15	40.28	74	54	-20.85	-13.72
9748.00	V	48.11	37.19	74	54	-25.89	-16.81
4200.05	H	56.05	41.66	74	54	-17.95	-12.34
7311.00	H	52.59	38.43	74	54	-21.41	-15.57
9748.00	H	49.5	35.37	74	54	-24.50	-18.63

Test mode: 802.11 N40(MIMO) Frequency: Channel 9: 2452MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4904.11	V	56.23	43.57	74	54	-17.77	-10.43
7426.34	V	51.05	38.64	74	54	-22.95	-15.36
9808.00	V	48.74	36.74	74	54	-25.26	-17.26
4904.32	H	56.27	43.76	74	54	-17.73	-10.24
7426.34	H	51.34	38.75	74	54	-22.66	-15.25
9808.00	H	50.99	37.38	74	54	-23.01	-16.62

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2388.400	H	47.88	74	-26.12	34.60	54	-19.40
2389.440	V	46.90	74	-27.10	31.30	54	-22.70


Test mode: 802.11 b Frequency: Channel 11: 2462MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2484.160	H	59.12	74	-14.88	43.90	54	-10.10
2483.582	V	52.87	74	-21.13	36.40	54	-17.60

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


**Spurious Emission in Restricted Band 2310-2390MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 1: 2412MHz     Channel 3: 2422MHz    Polarity: H  
 VBW=3MHz

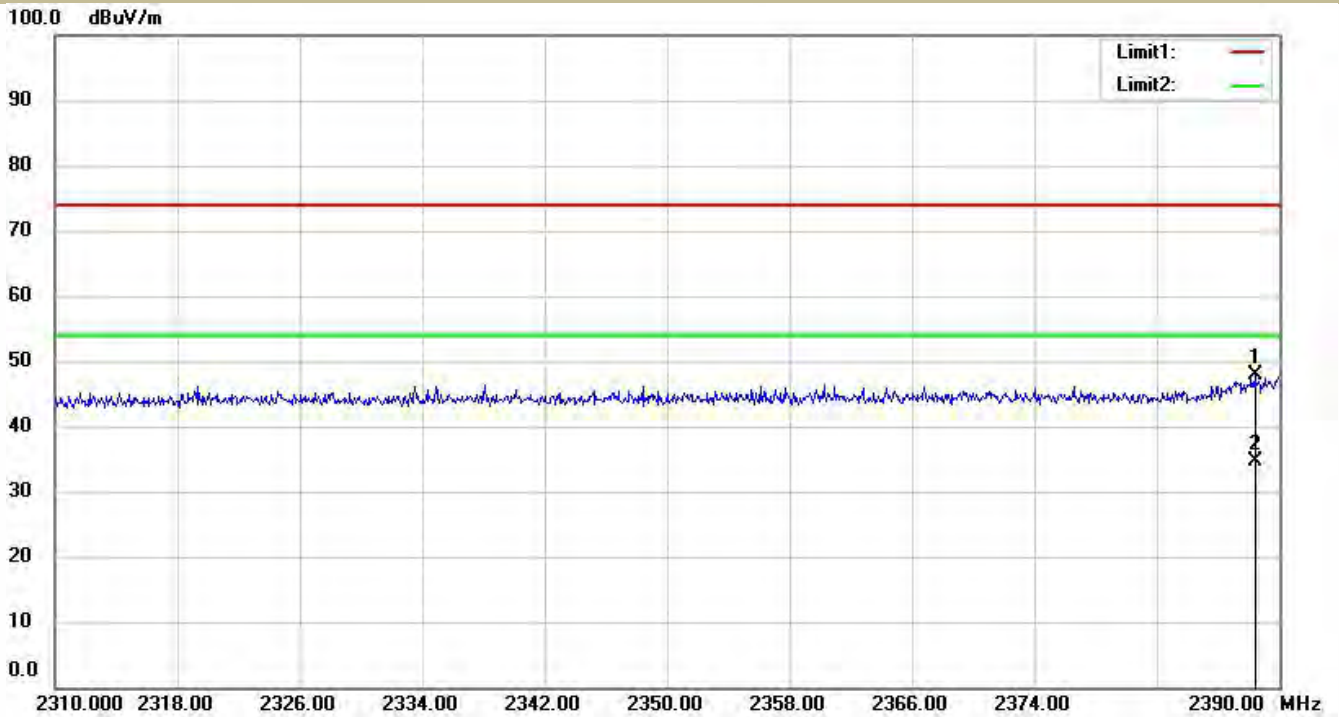

**Spurious Emission in Restricted Band 2310-2390MHz**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 1: 2412MHz     Channel 3: 2422MHz    Polarity: V  
 VBW=3MHz

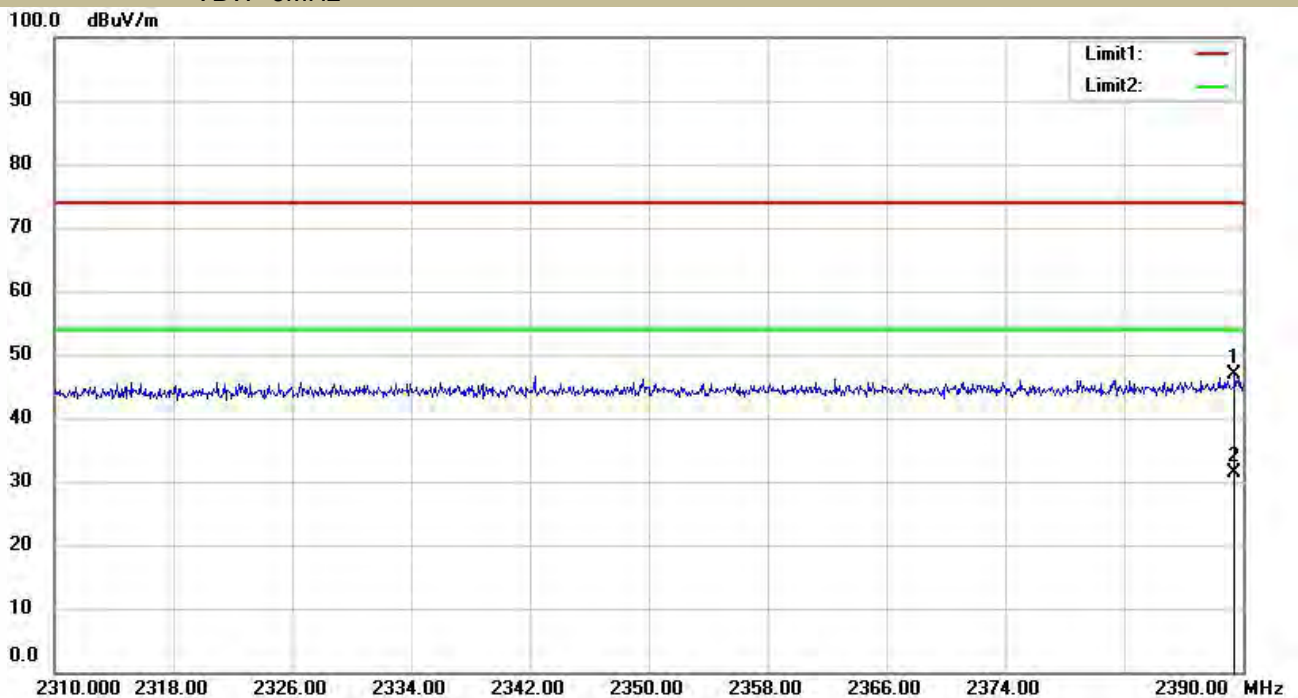




**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 11: 2462MHz     Channel 9: 2452MHz    Polarity: H  
 VBW=3MHz

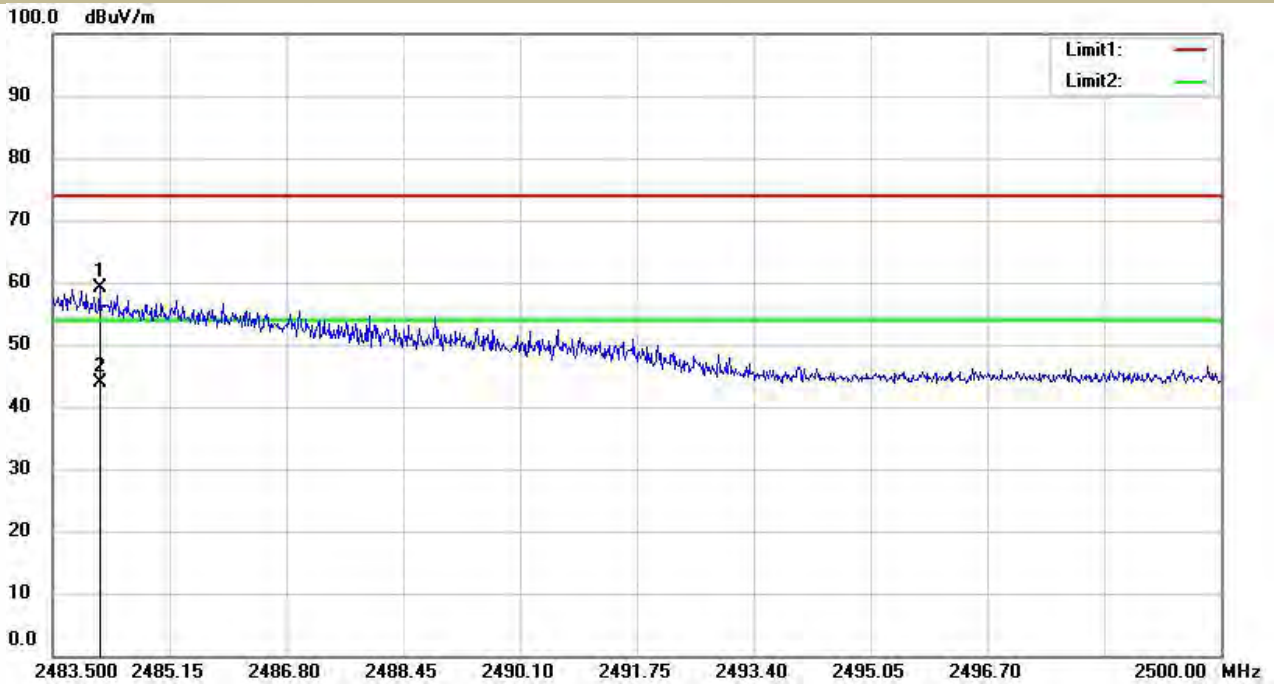

**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 11: 2462MHz     Channel 9: 2452MHz    Polarity: V  
 VBW=3MHz

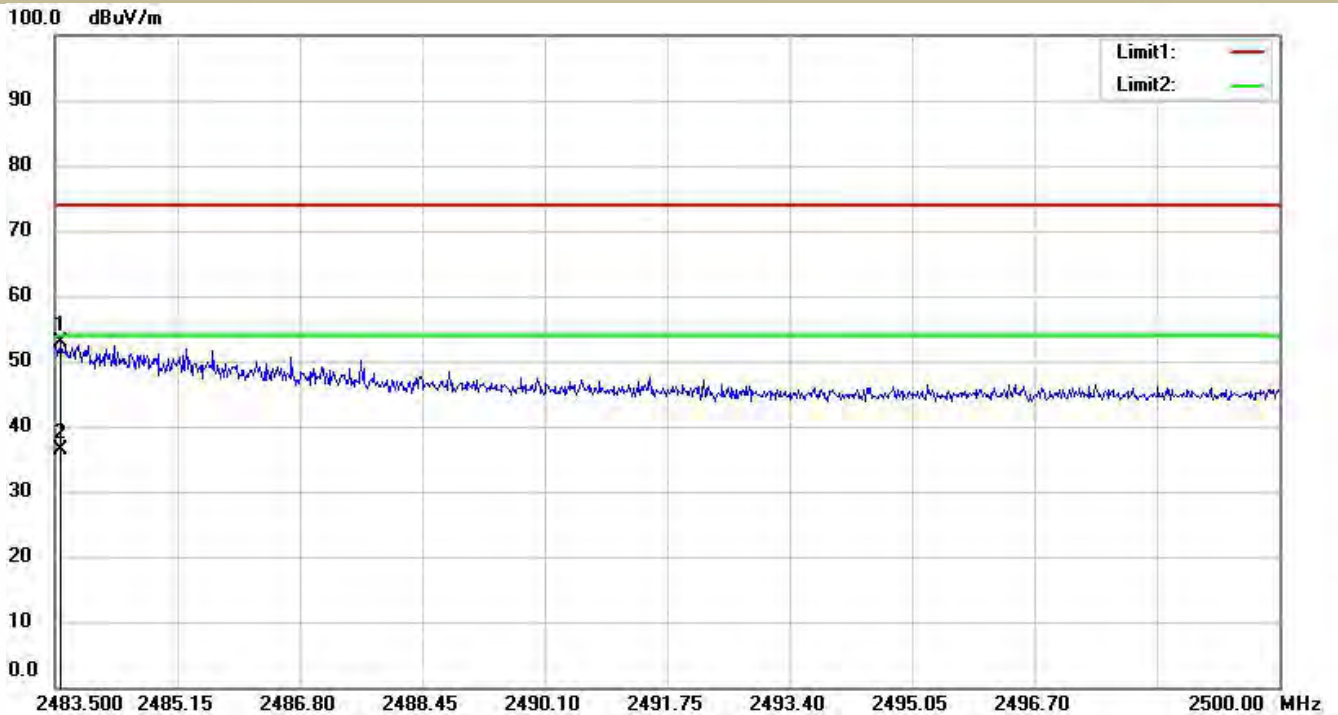

Test mode: 802.11 g Frequency: Channel 1: 2412MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2384.16	H	52.91	74	-21.09	41.36	54	-12.64
2387.86	V	51.45	74	-22.55	40.29	54	-13.71


Test mode: 802.11 g Frequency: Channel 11: 2462MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2484.11	H	52.24	74	-21.76	39.46	54	-14.54
2484.20	V	52.02	74	-21.98	38.92	54	-15.08

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Spurious Emission in Restricted Band 2310-2390MHz


Test Model  802.11b  802.11g  802.11n(HT20)  802.11n(HT40)  
 Channel 1: 2412MHz  Channel 3: 2422MHz Polarity: H  
VBW=3MHz

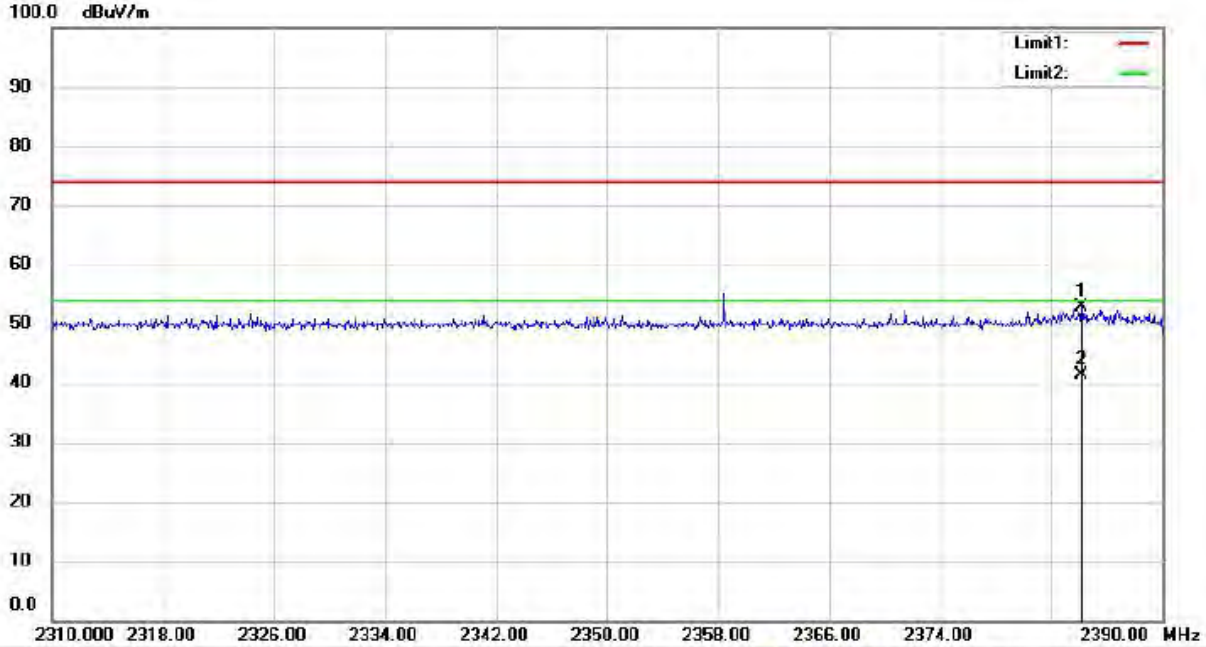

Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 29.5 C  
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 48 %

Spurious Emission in Restricted Band 2310-2390MHz


Test Model  802.11b  802.11g  802.11n(HT20)  802.11n(HT40)  
 Channel 1: 2412MHz  Channel 3: 2422MHz Polarity: V  
VBW=3MHz

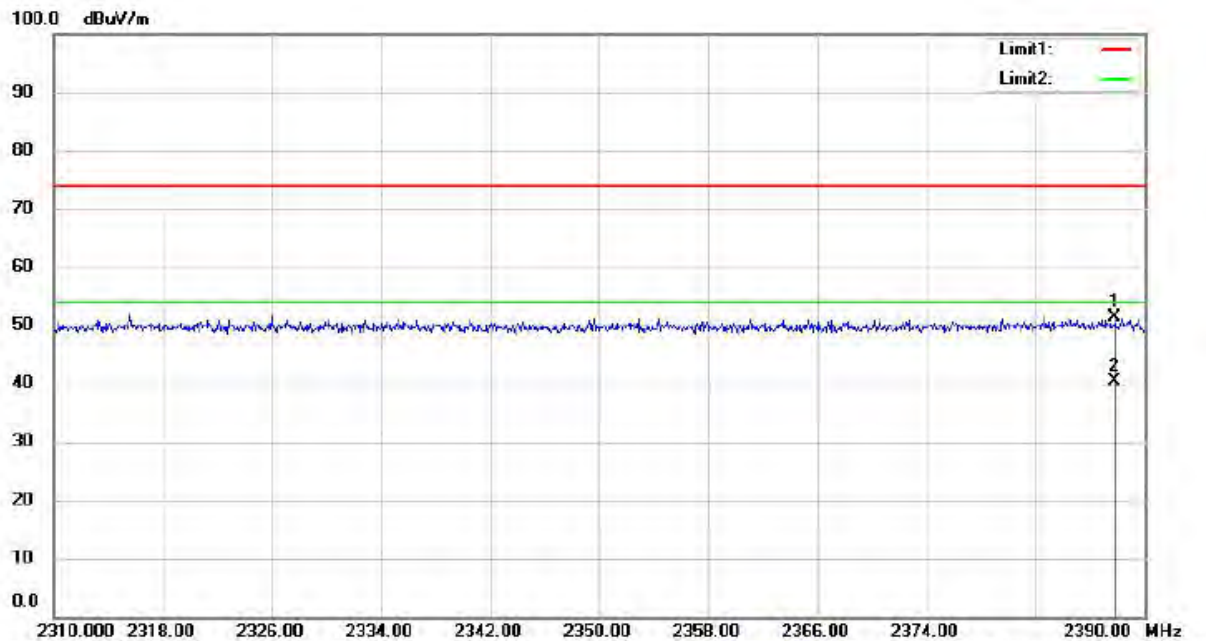

Site 3m Chamber #1 Polarization: **Vertical** Temperature: 29.5 C  
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 48 %


**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model       802.11b       802.11g       802.11n(HT20)       802.11n(HT40)  
 Channel 11: 2462MHz       Channel 9: 2452MHz      Polarity: H  
 VBW=3MHz

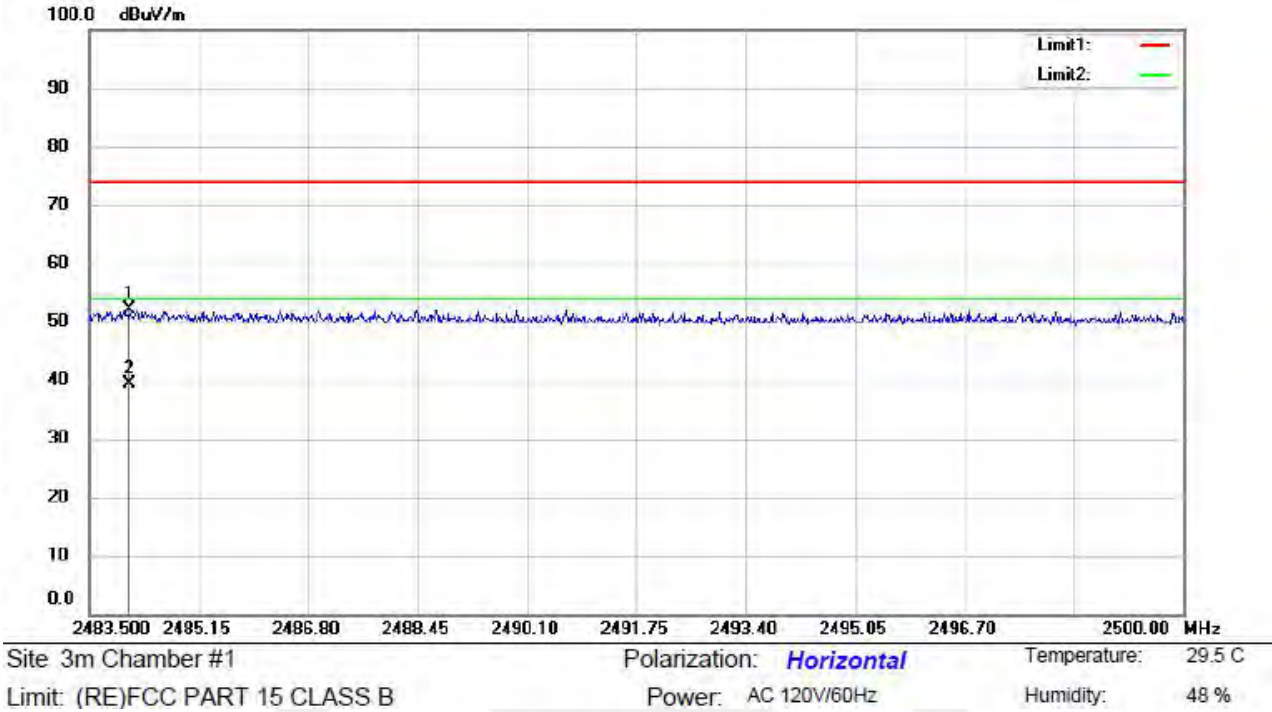

**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model       802.11b       802.11g       802.11n(HT20)       802.11n(HT40)  
 Channel 11: 2462MHz       Channel 9: 2452MHz      Polarity: V  
 VBW=3MHz

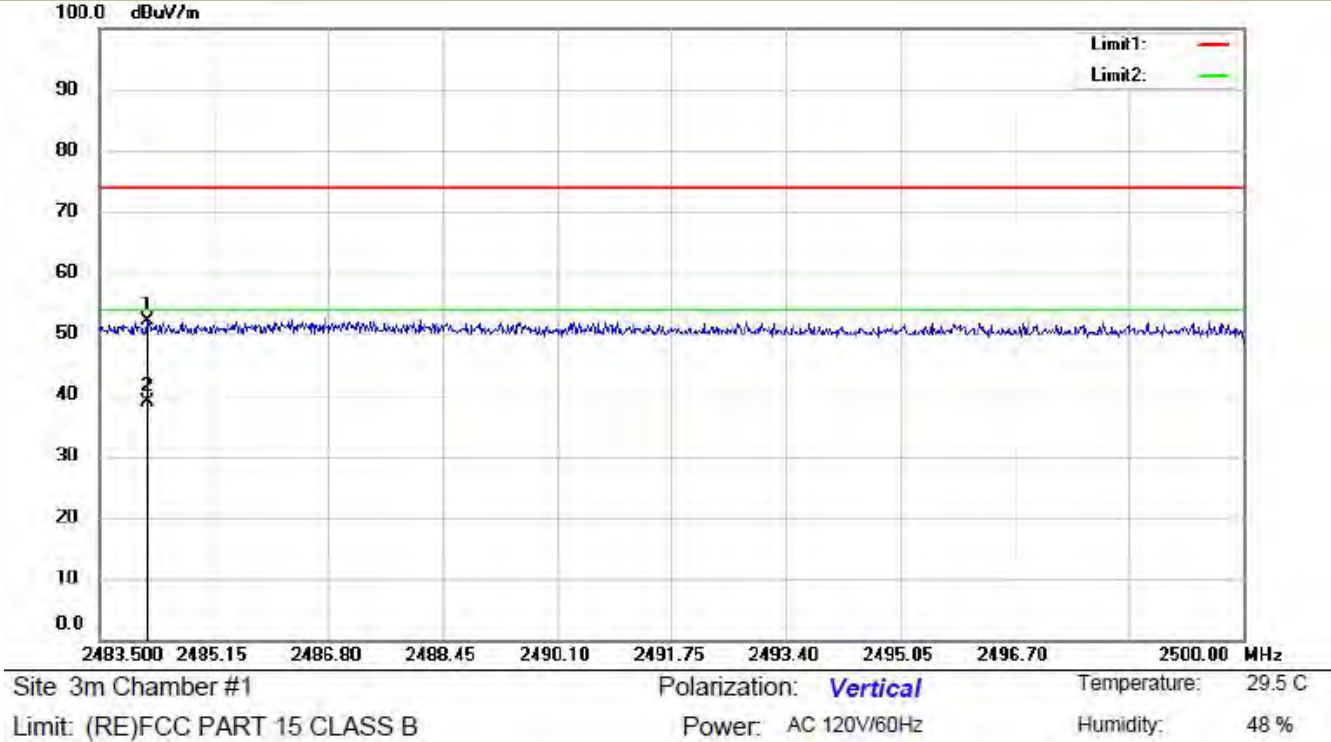

Test mode: 802.11 N20 Frequency: Channel 1: 2412MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2389.90	H	53.99	74	-20.01	35.01	54	-18.99
2387.69	V	51.80	74	-22.20	34.15	54	-19.85


Test mode: 802.11 N20 Frequency: Channel 11: 2462MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2483.97	H	52.20	74	-21.80	33.58	54	-20.42
2483.58	V	52.48	74	-21.52	35.25	54	-18.75

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**Spurious Emission in Restricted Band 2310-2390MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 1: 2412MHz     Channel 3: 2422MHz    Polarity: H  
 VBW=3MHz

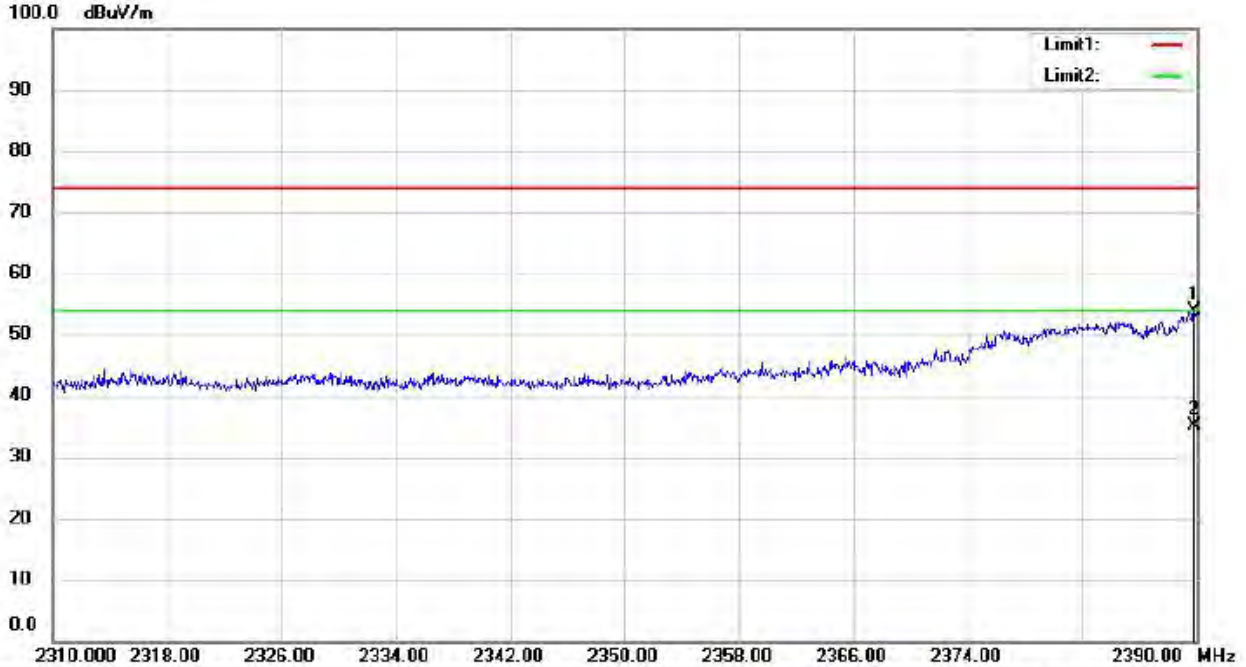

Site 3m Chamber #1    Polarization: **Horizontal**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %

**Spurious Emission in Restricted Band 2310-2390MHz**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 1: 2412MHz     Channel 3: 2422MHz    Polarity: V  
 VBW=3MHz



Site 3m Chamber #1    Polarization: **Vertical**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %

**Spurious Emission in Restricted Band 2483.5-2500MHz**


Test Model       802.11b       802.11g       802.11n(HT20)       802.11n(HT40)  
 Channel 11: 2462MHz       Channel 9: 2452MHz      Polarity: H  
 VBW=3MHz

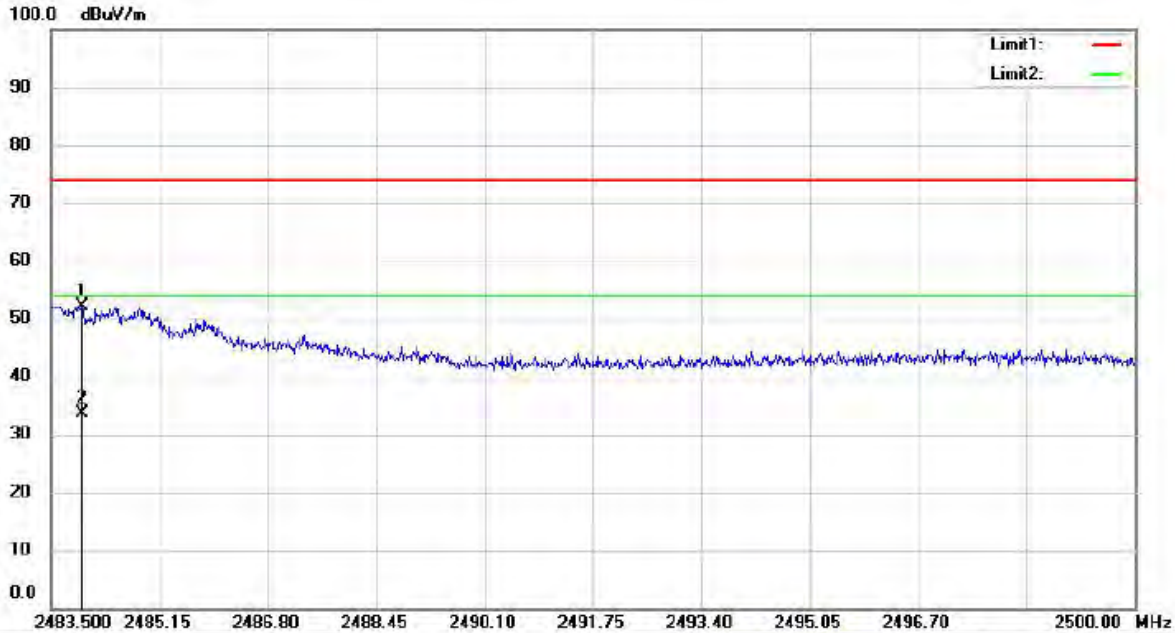

Site 3m Chamber #1      Polarization: **Horizontal**      Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 48 %

**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model       802.11b       802.11g       802.11n(HT20)       802.11n(HT40)  
 Channel 11: 2462MHz       Channel 9: 2452MHz      Polarity: V  
 VBW=3MHz

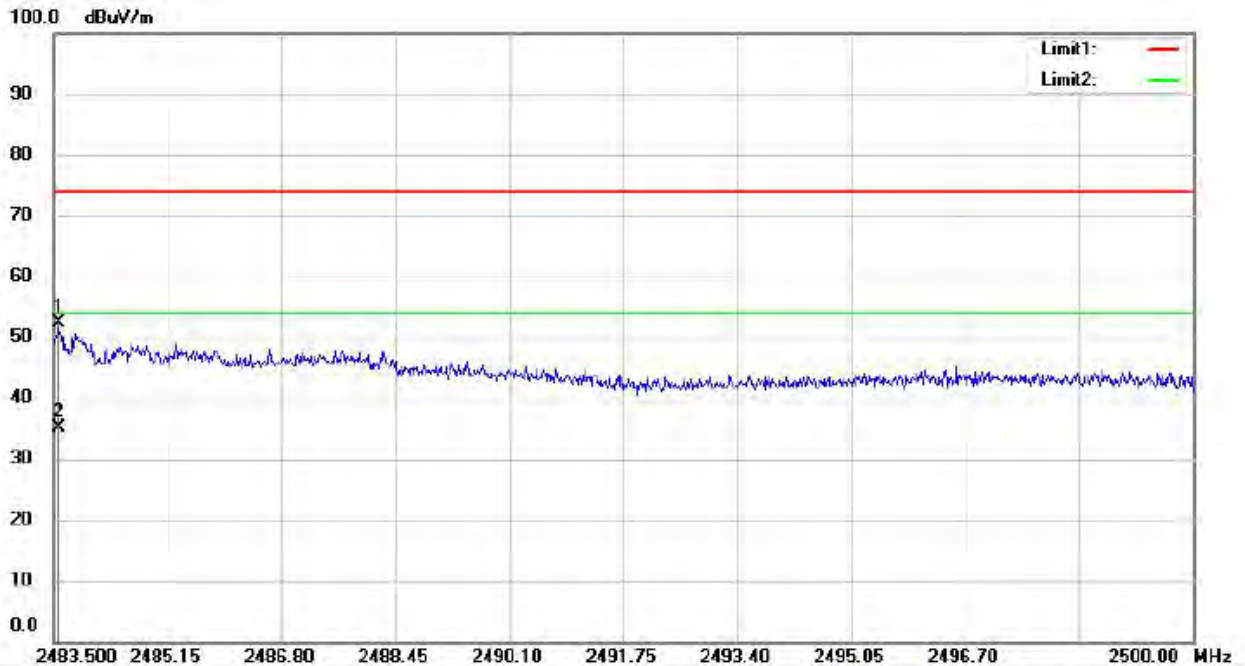

Site 3m Chamber #1      Polarization: **Vertical**      Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 48 %

Test mode: 802.11 N40 Frequency: Channel 3: 2422MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2388.42	V	50.68	74	-23.32	39.52	54	-14.48
2386.81	H	51.12	74	-22.88	39.24	54	-14.76

Test mode: 802.11 N40 Frequency: Channel 9: 2452MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2485.31	H	52.20	74	-21.80	39.31	54	-14.69
2484.53	V	52.54	74	-21.46	39.46	54	-14.54

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



**Spurious Emission in Restricted Band 2310-2390MHz**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 3: 2422MHz     Channel 3: 2422MHz    Polarity: H  
 VBW=3MHz

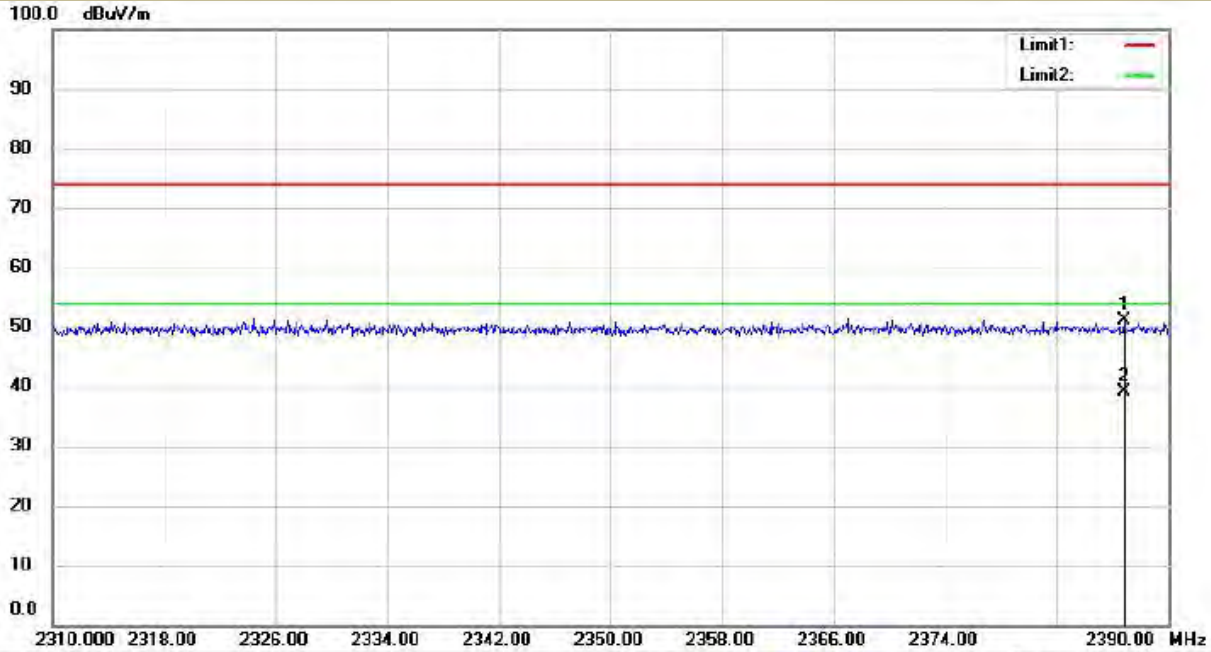

Site 3m Chamber #1    Polarization: **Horizontal**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %

**Spurious Emission in Restricted Band 2310-2390MHz**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 3: 2422MHz     Channel 3: 2422MHz    Polarity: V  
 VBW=3MHz

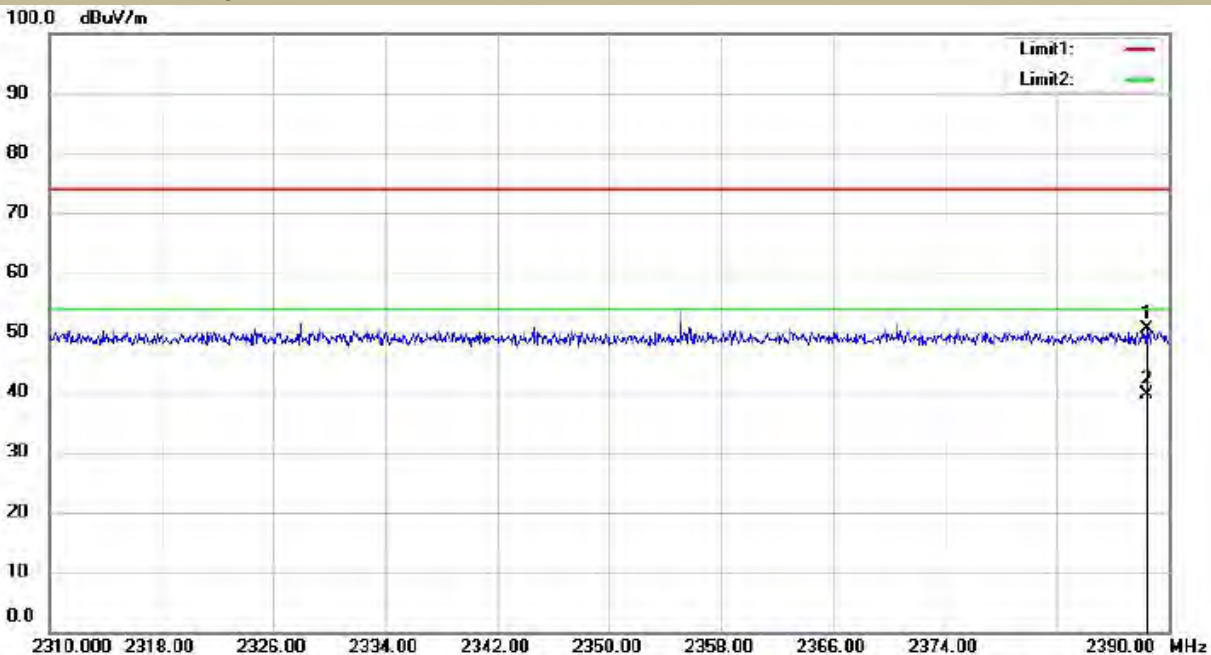

Site 3m Chamber #1    Polarization: **Vertical**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %


**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 9: 2452MHz     Channel 9: 2452MHz    Polarity: H  
 VBW=3MHz

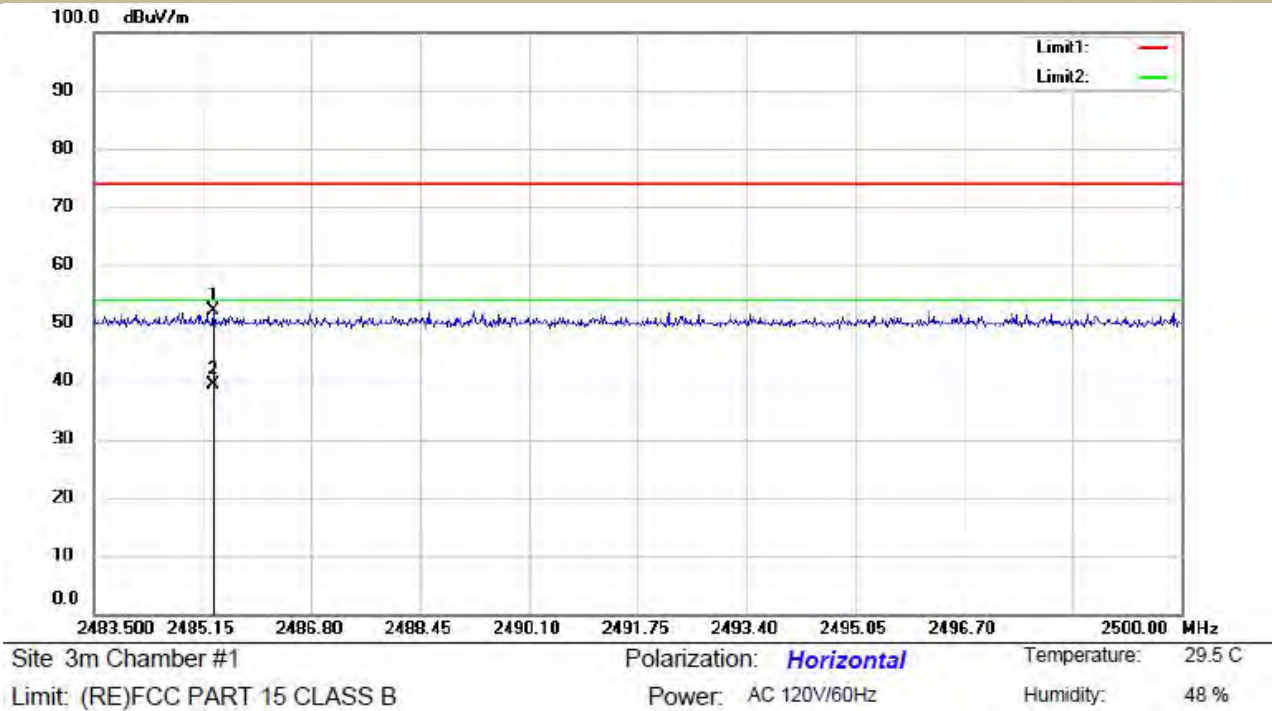

**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 9: 2452MHz     Channel 9: 2452MHz    Polarity: V  
 VBW=3MHz

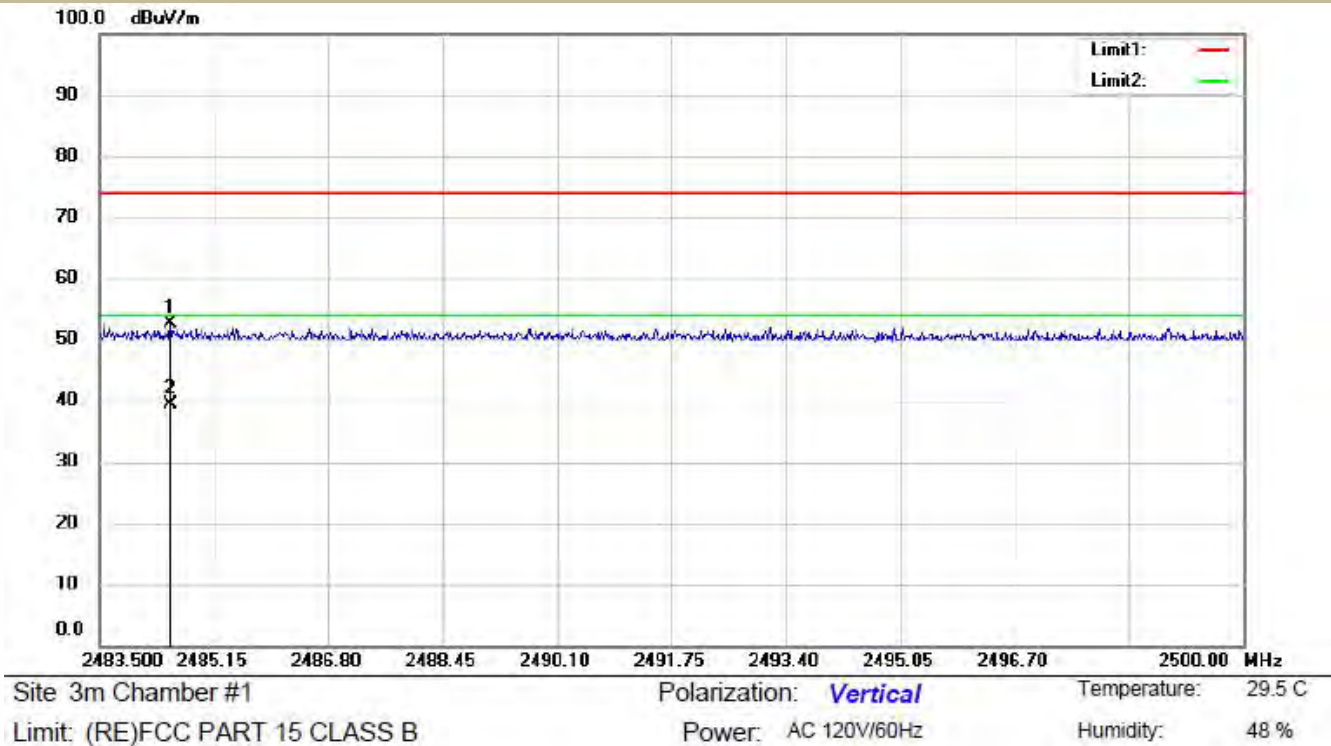

Test mode: 802.11 N20(MIMO) Frequency: Channel 1: 2412MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2388.30	H	56.91	74	-17.09	43.84	54	-10.16
2389.90	V	53.75	74	-20.25	41.10	54	-12.90

Test mode: 802.11 N20(MIMO) Frequency: Channel 11: 2462MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2483.80	H	62.24	74	-11.76	48.55	54	-5.45
2483.70	V	64.13	74	-9.87	50.24	54	-3.76

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**Spurious Emission in Restricted Band 2310-2390MHz**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 1: 2412MHz     Channel 3: 2422MHz    Polarity: H  
 VBW=3MHz



Site 3m Chamber #1    Polarization: **Horizontal**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %

**Spurious Emission in Restricted Band 2310-2390MHz**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 1: 2412MHz     Channel 3: 2422MHz    Polarity: V  
 VBW=3MHz

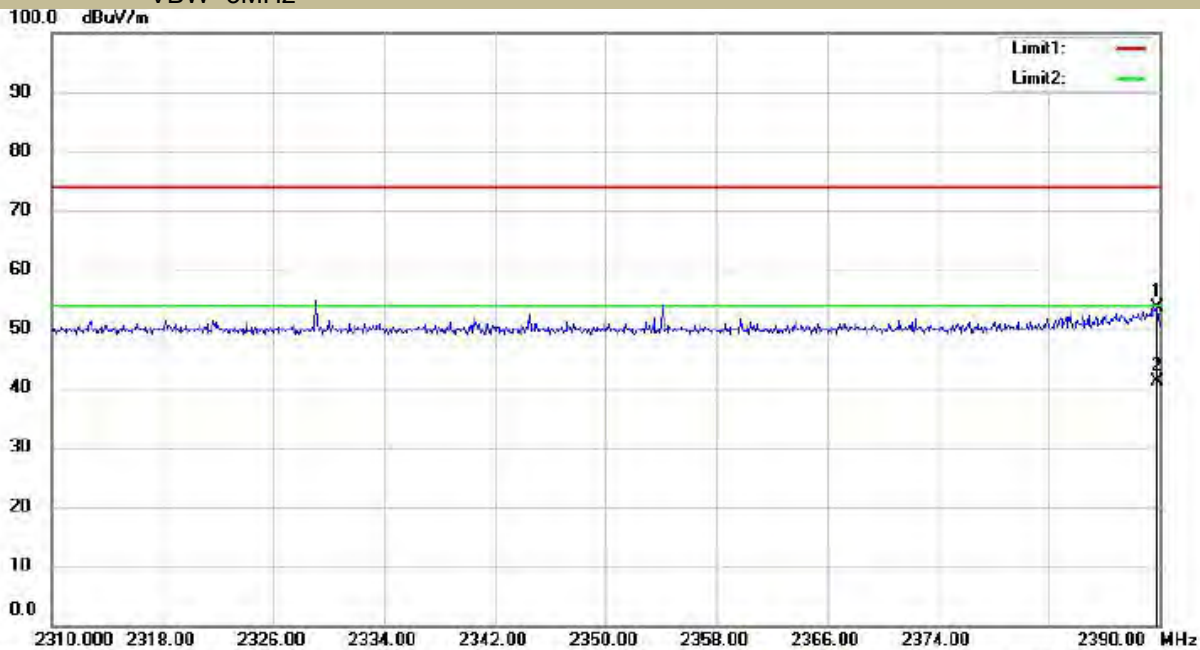

Site 3m Chamber #1    Polarization: **Vertical**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %


**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 11: 2462MHz     Channel 9: 2452MHz    Polarity: H  
 VBW=3MHz

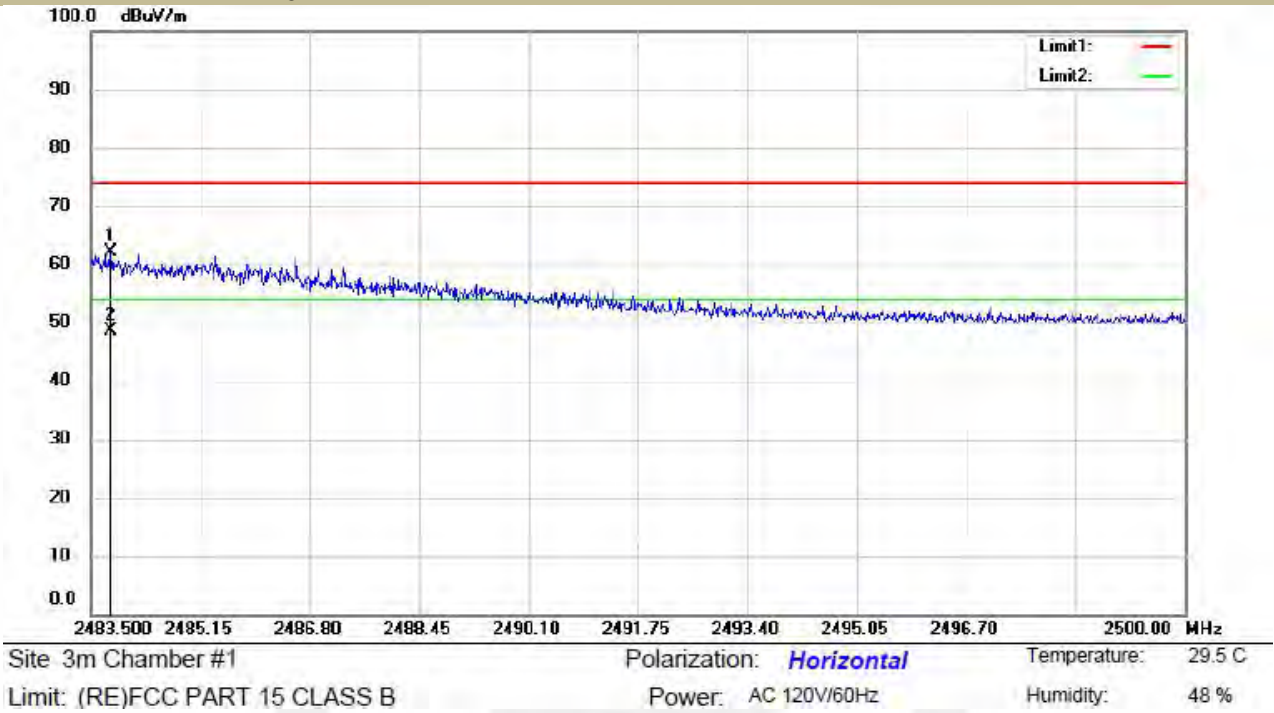

**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 11: 2462MHz     Channel 9: 2452MHz    Polarity: V  
 VBW=3MHz

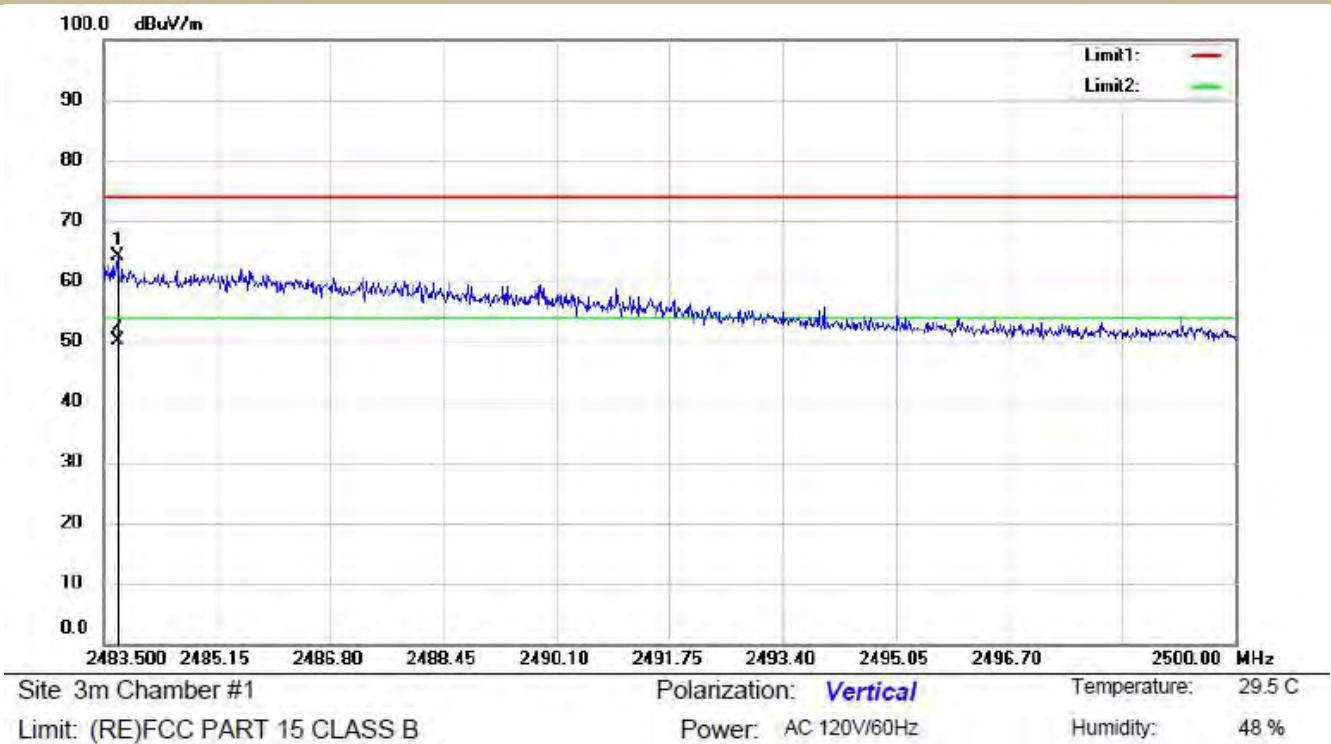

Test mode: 802.11 N40(MIMO) Frequency: Channel 3: 2422MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2388.76	H	54.89	74	-19.11	41.51	54	-12.49
2388.09	V	51.66	74	-22.34	39.25	54	-14.75


Test mode: 802.11 N40(MIMO) Frequency: Channel 9: 2452MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2483.73	H	62.35	74	-11.65	49.41	54	-4.59
2483.93	V	59.48	74	-14.52	46.37	54	-7.63

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**Spurious Emission in Restricted Band 2310-2390MHz**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 3: 2422MHz     Channel 3: 2422MHz    Polarity: H  
 VBW=3MHz

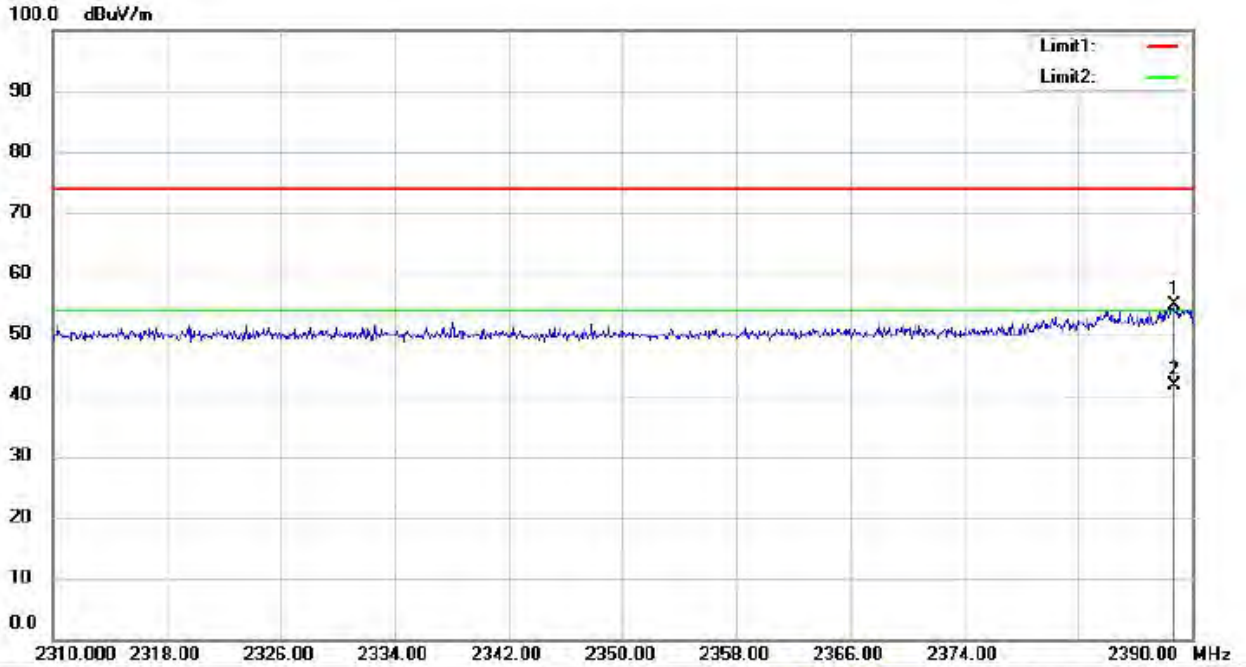

Site 3m Chamber #1    Polarization: **Horizontal**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %

**Spurious Emission in Restricted Band 2310-2390MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 3: 2422MHz     Channel 3: 2422MHz    Polarity: V  
 VBW=3MHz

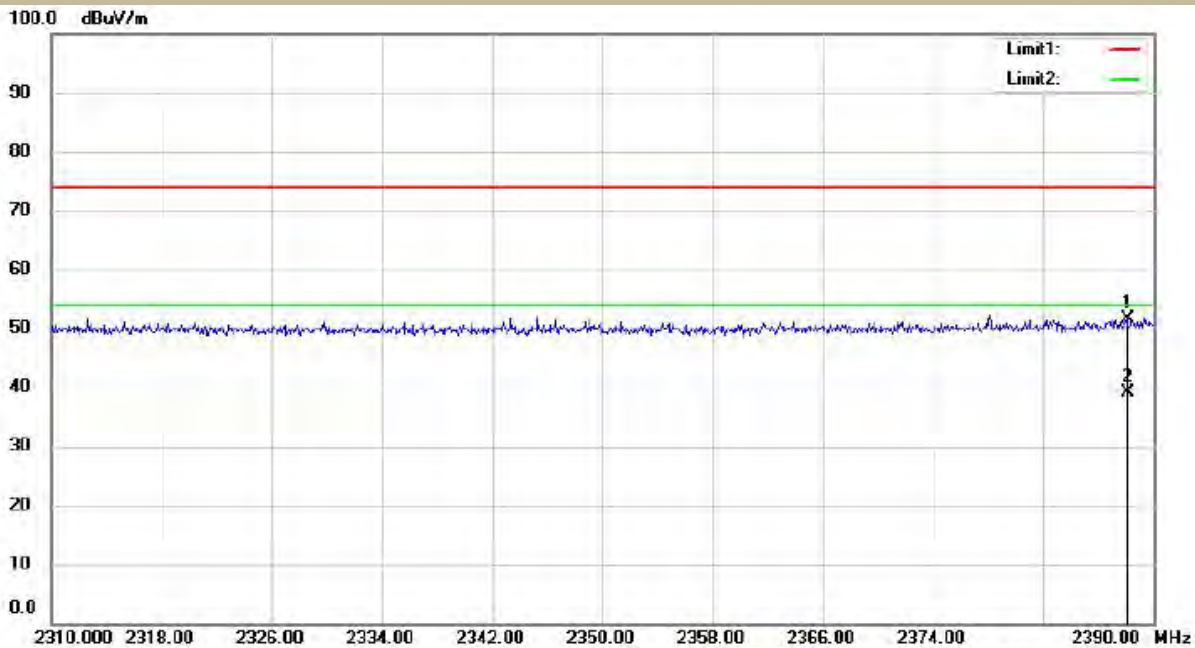

Site 3m Chamber #1    Polarization: **Vertical**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %

**Spurious Emission in Restricted Band 2483.5-2500MHz**


Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel : 2452MHz     Channel 9: 2452MHz    Polarity: H  
 VBW=3MHz



Site 3m Chamber #1    Polarization: **Horizontal**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %

**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 9: 2452MHz     Channel 9: 2452MHz    Polarity: V  
 VBW=3MHz

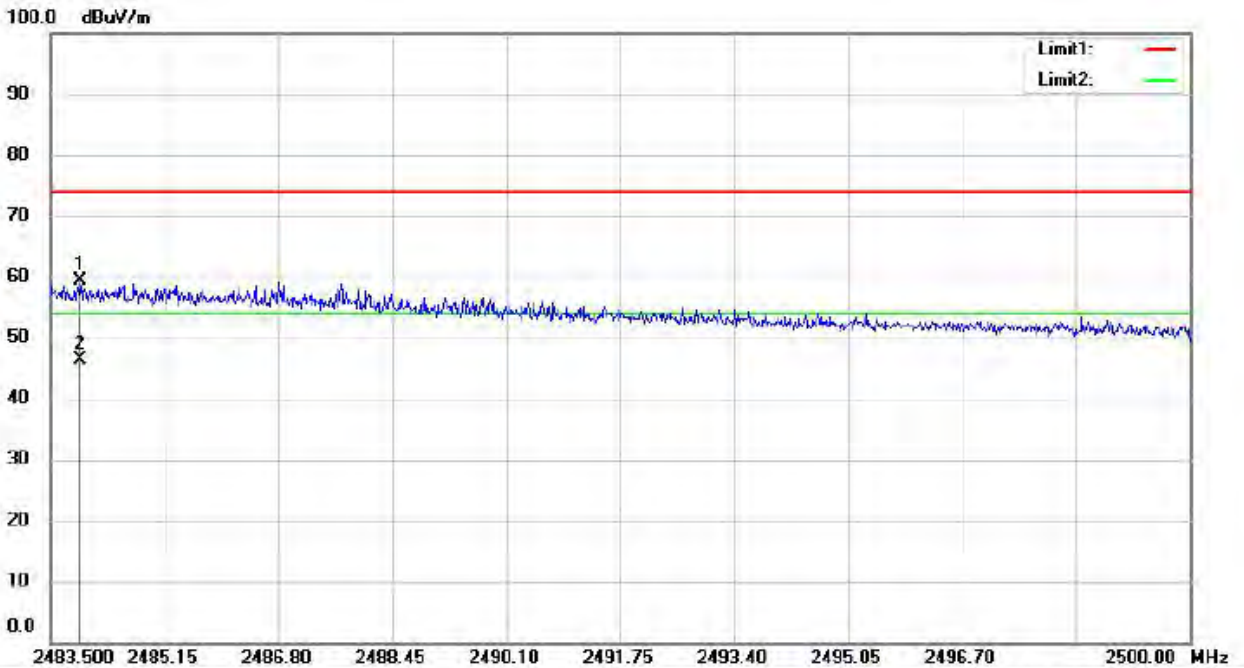


Site 3m Chamber #1    Polarization: **Vertical**    Temperature: 29.5 C  
 Limit: (RE)FCC PART 15 CLASS B    Power: AC 120V/60Hz    Humidity: 48 %




■ Spurious Emission below 1GHz (30MHz to 1GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

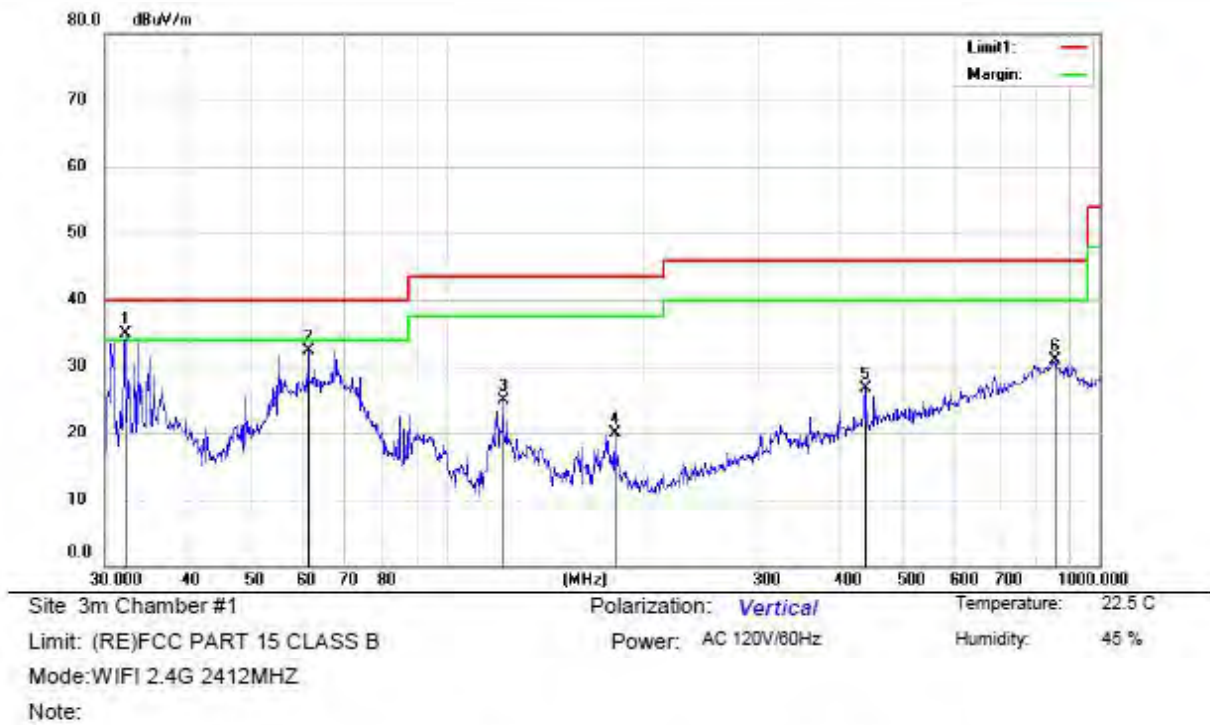


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	32.1794	51.49	-16.54	34.95	40.00	-5.05			QP
2		61.3462	46.27	-13.91	32.36	40.00	-7.64			QP
3		121.9754	41.57	-16.71	24.86	43.50	-18.64			QP
4		180.6487	36.37	-16.45	19.92	43.50	-23.58			QP
5		437.1200	33.80	-7.17	26.63	46.00	-19.37			QP
6		854.0247	28.38	2.57	30.95	46.00	-15.05			QP

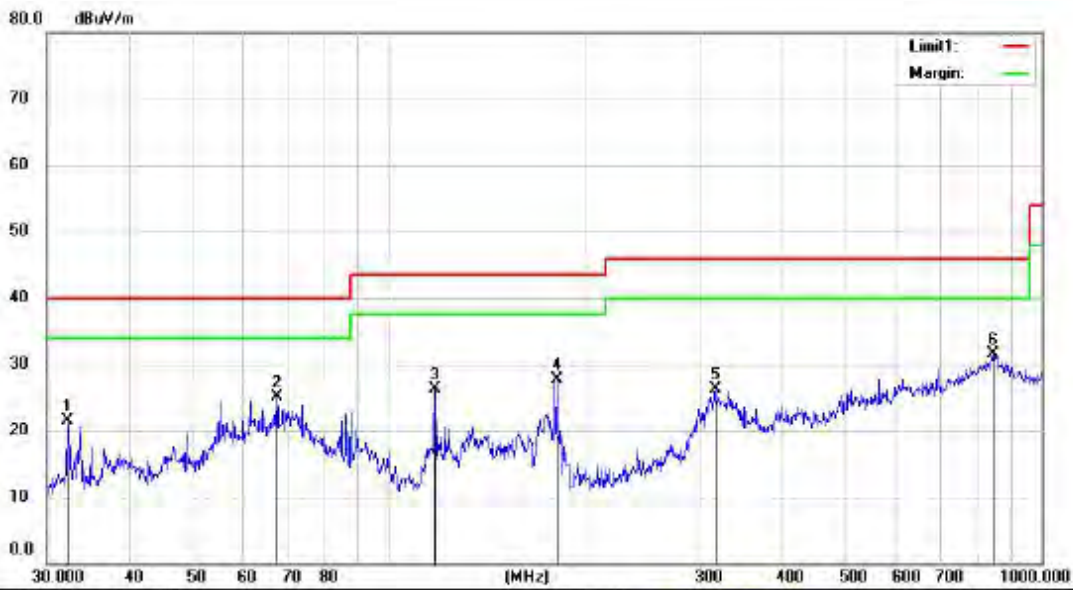


Site: 3m Chamber #1      Polarization: *Horizontal*      Temperature: 22.5 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 45 %  
 Mode: WIFI 2.4G 2412MHZ  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		32.2924	37.94	-16.53	21.41	40.00	-18.59			QP	
2		67.4381	39.70	-14.56	25.14	40.00	-14.86			QP	
3		117.7724	42.90	-16.60	26.30	43.50	-17.20			QP	
4		180.6487	44.17	-16.45	27.72	43.50	-15.78			QP	
5		316.5890	37.76	-11.44	26.32	46.00	-19.68			QP	
6	*	842.1295	28.59	2.86	31.45	46.00	-14.55			QP	

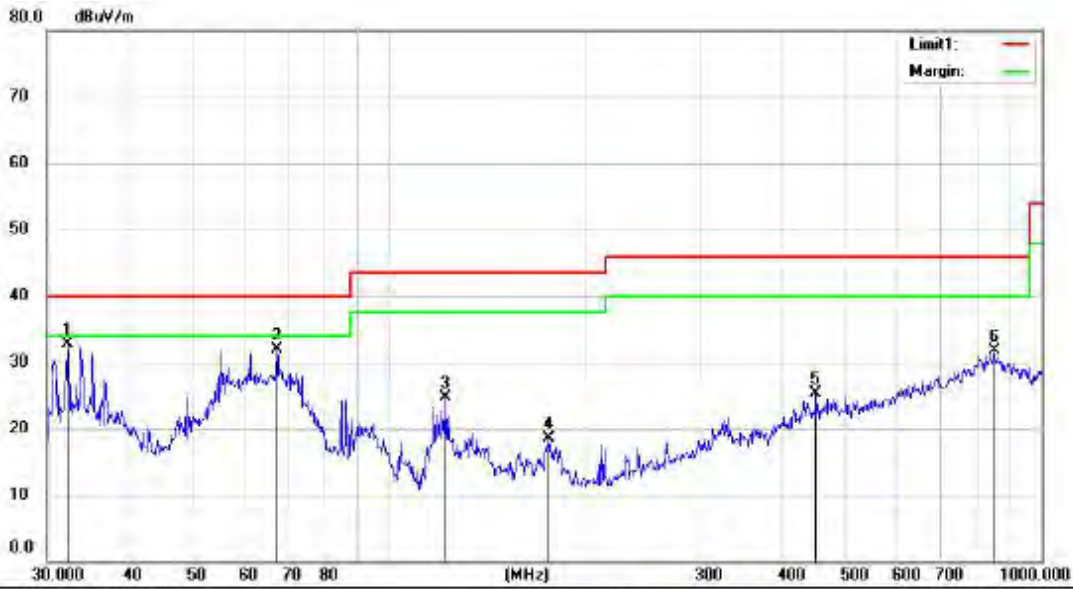

Site: 3m Chamber #1      Polarization: *Vertical*      Temperature: 22.5 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 45 %  
 Mode: WIFI 2.4G 2437MHZ  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	32.2925	49.27	-16.53	32.74	40.00	-7.26	QP			
2		67.4382	46.45	-14.56	31.89	40.00	-8.11	QP			
3		122.4040	41.37	-16.72	24.65	43.50	-18.85	QP			
4		176.2686	34.82	-16.32	18.50	43.50	-25.00	QP			
5		451.1350	32.20	-6.95	25.25	46.00	-20.75	QP			
6		845.0877	28.82	2.87	31.69	46.00	-14.31	QP			

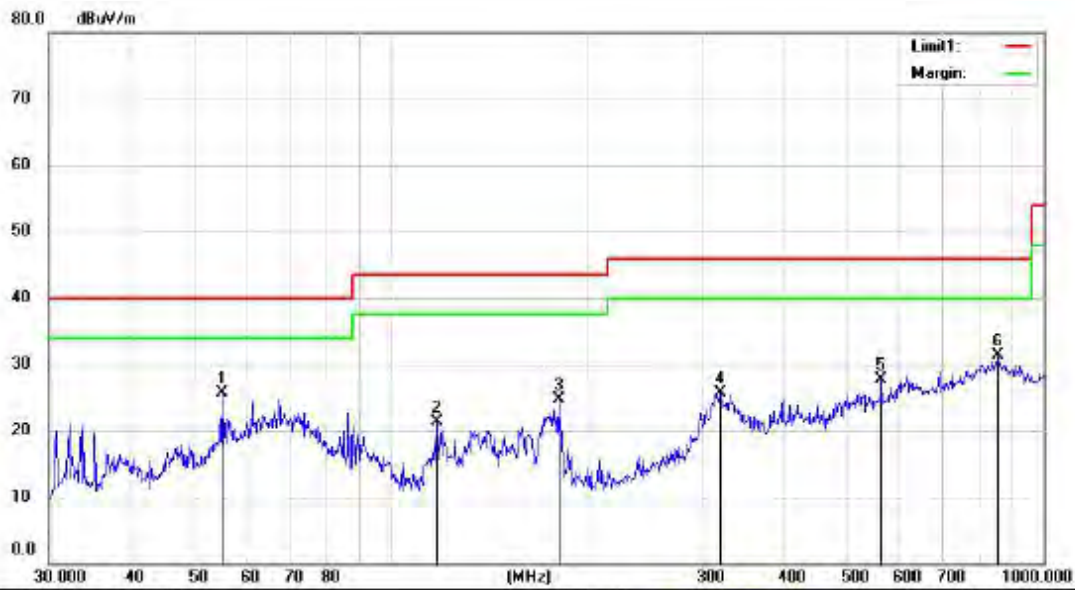


Site: 3m Chamber #1      Polarization: *Horizontal*      Temperature: 22.5 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 45 %  
 Mode: WIFI 2.4G 2437MHZ  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	55.2207	39.69	-13.95	25.74	40.00	-14.26			QP	
2		117.7725	37.90	-16.60	21.30	43.50	-22.20			QP	
3		180.6488	41.16	-16.45	24.71	43.50	-18.79			QP	
4		319.9370	37.03	-11.25	25.78	46.00	-20.22			QP	
5		564.6388	32.16	-4.42	27.74	46.00	-18.26			QP	
6		851.0353	28.55	2.80	31.35	46.00	-14.65			QP	



Site 3m Chamber #1      Polarization: *Vertical*      Temperature: 22.5 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 45 %  
 Mode: WIFI 2.4G 2462MHZ  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	32.0667	49.80	-16.56	33.24	40.00	-6.76			QP	
2		61.3463	46.15	-13.91	32.24	40.00	-7.76			QP	
3		122.4040	42.75	-16.72	26.03	43.50	-17.47			QP	
4		175.6516	35.23	-16.28	18.95	43.50	-24.55			QP	
5		319.9370	32.88	-11.25	21.63	46.00	-24.37			QP	
6		851.0353	28.38	2.80	31.18	46.00	-14.82			QP	

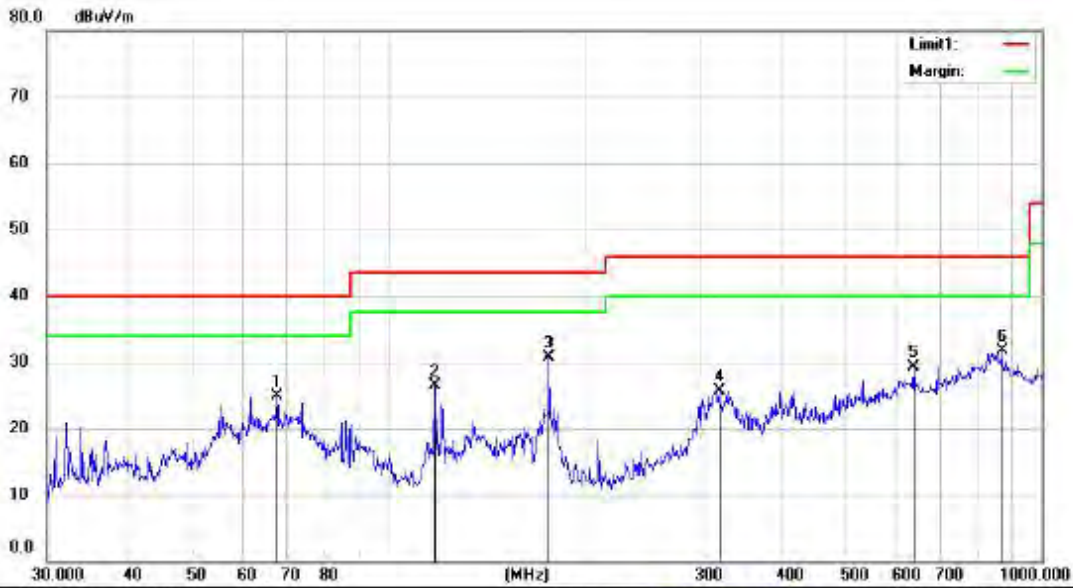

Site: 3m Chamber #1      Polarization: *Horizontal*      Temperature: 22.5 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 45 %  
 Mode: WIFI 2.4G 2462MHZ  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		67.4382	39.48	-14.56	24.92	40.00	-15.08			QP	
2		117.7725	43.11	-16.60	26.51	43.50	-16.99			QP	
3	*	176.2686	47.09	-16.32	30.77	43.50	-12.73			QP	
4		321.0608	36.94	-11.20	25.74	46.00	-20.26			QP	
5		636.1340	32.08	-2.77	29.31	46.00	-16.69			QP	
6		869.1302	29.79	1.83	31.62	46.00	-14.38			QP	

## 8.6 CONDUCTED EMISSIONS TEST

### 8.6.1 Applicable Standard

According to FCC Part 15.207(a)

### 8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup


### 8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 8.6.5 Test Results

Pass


The 120V &240V voltagehave been tested, and the worst result recorded was report as below:

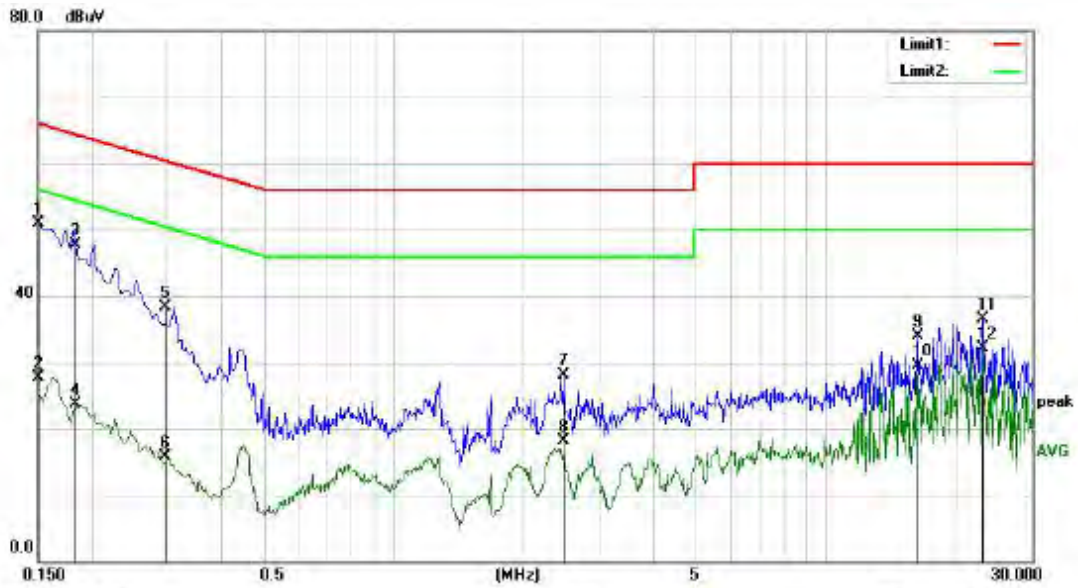

Site Conduction #1 Phase: **L1** Temperature: 24.7  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 38 %  
 Mode: 2.4G WIFI  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	41.49	9.44	50.93	66.00	-15.07	QP	
2		0.1500	18.25	9.44	27.69	56.00	-28.31	AVG	
3		0.1835	38.35	9.44	47.79	64.33	-16.54	QP	
4		0.1835	14.17	9.44	23.61	54.33	-30.72	AVG	
5		0.2980	29.06	9.28	38.34	60.30	-21.96	QP	
6		0.2980	6.46	9.28	15.74	50.30	-34.56	AVG	
7		2.4780	18.33	9.81	28.14	56.00	-27.86	QP	
8		2.4780	8.26	9.81	18.07	46.00	-27.93	AVG	
9		16.2300	23.83	10.11	33.94	60.00	-26.06	QP	
10		16.2300	19.33	10.11	29.44	50.00	-20.56	AVG	
11		23.1300	26.30	10.20	36.50	60.00	-23.50	QP	
12		23.1300	21.94	10.20	32.14	50.00	-17.86	AVG	



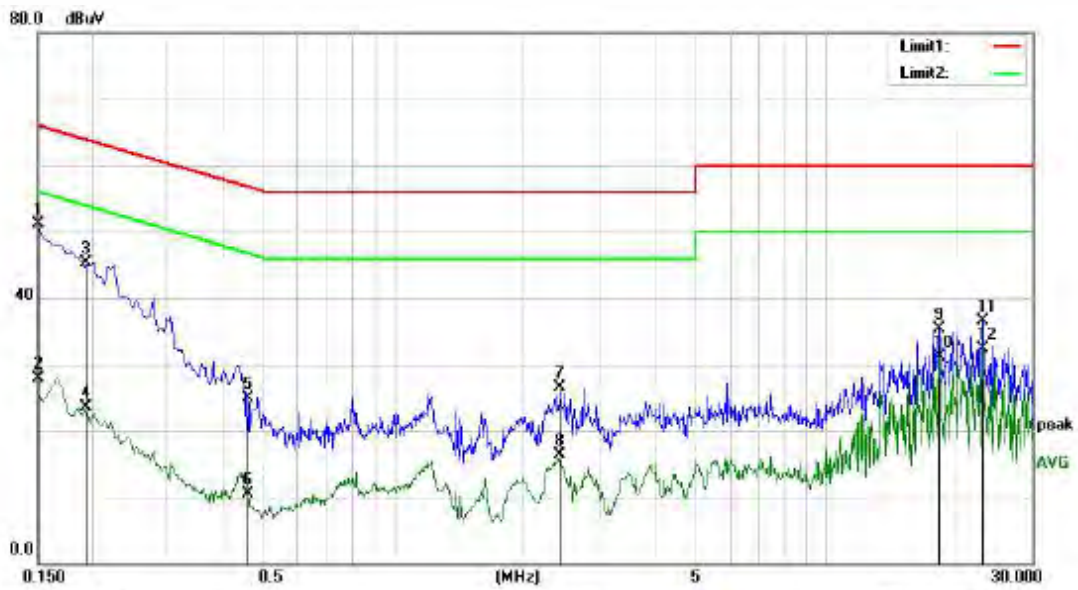

Site Conduction #1 Phase: **N** Temperature: 24.7  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 38 %  
 Mode: 2.4G WIFI  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	41.68	9.44	51.12	66.00	-14.88	QP	
2		0.1500	18.37	9.44	27.81	56.00	-28.19	AVG	
3		0.1940	35.83	9.44	45.27	63.66	-18.59	QP	
4		0.1940	14.00	9.44	23.44	53.86	-30.42	AVG	
5		0.4580	15.70	9.29	24.99	56.73	-31.74	QP	
6		0.4580	1.26	9.29	10.55	46.73	-36.18	AVG	
7		2.4180	16.60	9.81	26.41	56.00	-29.59	QP	
8		2.4180	6.48	9.81	16.29	46.00	-29.71	AVG	
9		18.3060	25.13	10.17	35.30	60.00	-24.70	QP	
10		18.3060	20.89	10.17	31.06	50.00	-18.94	AVG	
11		23.1300	26.24	10.20	36.44	60.00	-23.56	QP	
12		23.1300	22.14	10.20	32.34	50.00	-17.66	AVG	

## 8.7 ANTENNA APPLICATION

### 8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.7.2 Result

#### PASS

The EUT has 2 PIFA antennas, antenna1: 4.5dBi, antenna2: 3.1dBi.

- Note:
- Antenna uses a permanently attached antenna which is not replaceable.
  - Not using a standard antenna jack or electrical connector for antenna replacement
  - The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---