

# TEST REPORT

**Applicant:** Acer Incorporated

**Address of Applicant:** 8F ,88, Sec.1 Xintai 5th Rd. 221 Xizhi, New Taipei City , Taiwan

**Manufacturer:** Acer Incorporated

**Address of Manufacturer:** 8F ,88, Sec.1 Xintai 5th Rd. 221 Xizhi, New Taipei City , Taiwan

**Factory:** Guangxi Century Innovation Display Electronics Co.,Ltd

**Address of Factory:** No.3 standard workshop,Zhongguancun Electronic Industry Park,No. 67 Lianchou Road, Nanning City, China

**Equipment Under Test (EUT)**

Product Name: Rollable smart device

Model No.: 32S1U Pro, 32S1U\_PRO, V32D4U, 32S1U

Trade Mark: acer, AOPEN

**FCC ID:** HLZ-32S1UPRO

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407

**Date of sample receipt:** July 20, 2023

**Date of Test:** July 20~31, 2023

**Date of report issue:** August 2, 2023

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




**Robinson Luo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## Version

Version No.	Date	Description
00	August 2, 2023	Original

Prepared By:




Date:

August 2, 2023

Project Engineer

Check By:

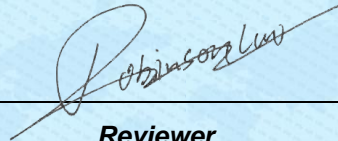

Reviewer

Date:

August 2, 2023

## 2 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	6
5.3 TEST FACILITY .....	7
5.4 TEST LOCATION .....	7
5.5 DESCRIPTION OF SUPPORT UNITS .....	7
5.6 DEVIATION FROM STANDARDS .....	7
5.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
5.8 ADDITIONAL INSTRUCTIONS .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA .....	10
7.1 ANTENNA REQUIREMENT: .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH .....	14
7.4 TRANSMIT POWER .....	15
7.5 POWER SPECTRAL DENSITY .....	16
7.6 BAND EDGE .....	17
7.7 RADIATED EMISSION .....	20
7.8 FREQUENCY STABILITY .....	32
8 TEST SETUP PHOTO .....	33
9 EUT CONSTRUCTIONAL DETAILS .....	33

## 3 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	PASS
AC Power Line Conducted Emission	15.207	PASS
Transmit Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Undesirable Emission	15.407(b), 15.205/15.209	PASS
Radiated Emission	15.205/15.209	PASS
Band Edge	15.407(b)	PASS
Frequency Stability	15.407(g)	PASS

*Remark:*

*Pass: The EUT complies with the essential requirements in the standard.*

### 3.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



## 4 General Information

### 4.1 General Description of EUT

Product Name:	Rollable smart device
Model No.:	32S1U Pro, 32S1U_PRO, V32D4U, 32S1U
Test Model No.:	32S1U Pro
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Serial No.:	N/A
Test sample(s) ID:	GTSL2023080104-1
Sample(s) Status:	Engineer sample
Operation Frequency:	5180-5320MHz, 5500-5700(20MHz Bandwidth) 5190-5310MHz, 5510-5670(40MHz Bandwidth) 5210-5290MHz, 5530-5690(80MHz Bandwidth)
Modulation technology:	OFDM(A) MIMO: 802.11n/ac/ax SISO: 802.11a
Antenna Type:	IPEX
Antenna gain:	1.18dBi@NII-2A, 2.53dBi@NII-2C, 3.46dBi @NII-3
Power supply:	AC adapter 1 Model No.: DA-120B19 INPUT: AC 100-240V, 50/60Hz, 2.0A Max OUTPUT: DC 19.0V, 6.32A, 120.08W AC adapter 2 Model No.: AY120EA-ZF190632M INPUT: AC 100-240V, 50/60Hz, 2.0A Max OUTPUT: DC 19.0V, 6.32A, 120.08W  Or DC 14.8V 10000mAh Li-ion polymer battery

**Remark:**

- Both two adapters were tested and found to compliance with the relevant requirement, only the worst data (adapter 1) report.
- Antenna gain information provided by the customer
- The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.500GHz-5.700GHz	
Channel	Frequency	Channel	Frequency
36	5180	100	5500
38	5190	102	5510
40	5200	104	5520
42	5210	106	5530
44	5220	108	5540
46	5230	110	5550
48	5240	112	5560
		116	5580
		118	5590
5.260GHz-5.320GHz			
Channel	Frequency	Channel	Frequency
52	5260	120	5600
54	5270	122	5610
56	5280	124	5620
58	5290	126	5630
60	5300	128	5640
62	5310	132	5660
64	5320	134	5670
		136	5680
		140	5700
5.745GHz-5.825GHz			
Channel	Frequency		
149	5745		
151	5755		
153	5765		
155	5775		
157	5785		
159	5795		
161	5805		
165	5825		

## 4.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation..		
<i>Remark: test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So just report worst condition</i>			
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:			
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.			
<b>Mode</b>	<b>Data rate</b>	<b>Mode</b>	<b>Data rate</b>
802.11a	6Mbps	802.11n/ac(HT40)	13Mbps
802.11n/ac(HT20)	6.5Mbps	802.11ac(HT80)	29.3Mbps
802.11ax(HEW20)	8.6Mbps	802.11ax(HEW80)	36Mbps
802.11ax(HEW40)	17.2Mbps		

### 4.3 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC—Registration No.: 381383</b> Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.</li> <li>● <b>ISED—Registration No.: 9079A</b> CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing</li> <li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).</li> </ul>
--

### 4.4 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, sBaoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

### 4.5 Description of Support Units

None.
-------

### 4.6 Deviation from Standards

None.
-------

### 4.7 Abnormalities from Standard Conditions

None.
-------

### 4.8 Additional Instructions

Test Software	Special test software provided by manufacturer For 802.11ax, special test command used
Power level setup	Default



## 5 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 23, 2021	June 22, 2024
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 14, 2023	April 13, 2024
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Coaxial Cable	GTS	N/A	GTS213	April 21, 2023	April 20, 2024
8	Coaxial Cable	GTS	N/A	GTS211	April 21, 2023	April 20, 2024
9	Coaxial cable	GTS	N/A	GTS210	April 21, 2023	April 20, 2024
10	Coaxial Cable	GTS	N/A	GTS212	April 21, 2023	April 20, 2024
11	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 14, 2023	April 13, 2024
12	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
13	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 14, 2023	April 13, 2024
14	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 14, 2023	April 13, 2024
15	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 30, 2022	Oct. 29, 2023
16	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 30, 2022	Oct. 29, 2023
17	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 13, 2023	March 12, 2024
18	Amplifier	/	LNA-1000-30S	GTS650	April 14, 2023	April 13, 2024
19	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS668	Dec. 20,2022	Dec.19,2023
20	Thermo meter	JINCHUANG	GSP-8A	GTS643	April 19, 2023	April 18, 2024



Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	July 12, 2022	July 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	April 14, 2023	April 13, 2024
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
6	Thermo meter	JINCHUANG	GSP-8A	GTS642	April 19, 2023	April 18, 2024
7	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	April 14, 2023	April 13, 2024
8	ISN	SCHWARZBECK	NTFM 8158	GTS565	April 14, 2023	April 13, 2024
9	High voltage probe	SCHWARZBECK	TK9420	GTS537	April 14, 2023	April 13, 2024
10	Antenna end assembly	Weinschel	1870A	GTS560	April 14, 2023	April 13, 2024

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 14, 2023	April 13, 2024
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	April 14, 2023	April 13, 2024
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 14, 2023	April 13, 2024
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 14, 2023	April 13, 2024
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 14, 2023	April 13, 2024
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 14, 2023	April 13, 2024
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 14, 2023	April 13, 2024
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	April 19, 2023	April 18, 2024

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	April 19, 2023	April 18, 2024

## 6 Test results and Measurement Data

### 6.1 Antenna requirement:

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p><i>15.203 requirement:</i></p> <p><i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p>	
<b>E.U.T Antenna:</b>	
<p>The antennas type is IPEX, reference to the appendix II for details</p>	

## 6.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz					
Limit:	Frequency range (MHz)	Limit (dBuV)				
		Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
* Decreases with the logarithm of the frequency.						
Test procedure	<p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</p>					
Test setup:						
Test Instruments:	Refer to section 6 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					



**Measurement data:**


Pre-scan all test modes, found worst case at ANT 1 802.11a 5180MHz, and so only show the test result of it.

**Line:**

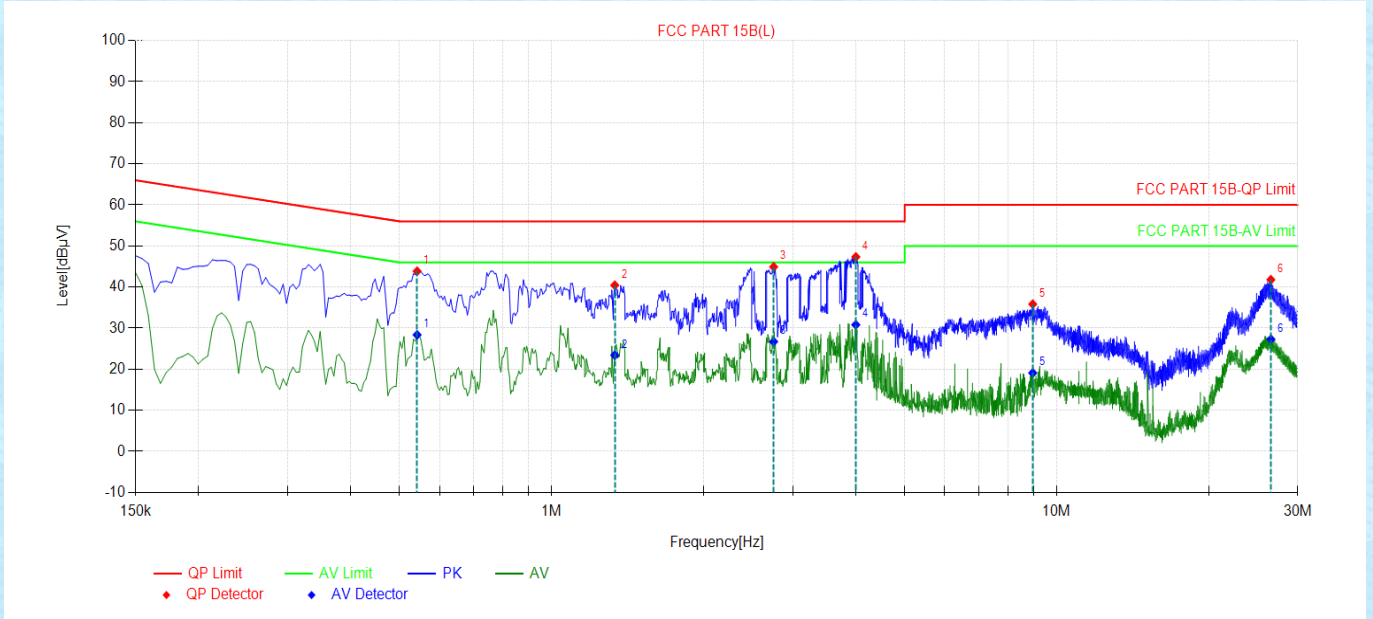

Final Data List									
NO.	Freq. [MHz]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict	Type
1	0.5415	43.86	56.00	12.14	28.37	46.00	17.63	PASS	L
2	1.3335	40.45	56.00	15.55	23.42	46.00	22.58	PASS	L
3	2.751	44.92	56.00	11.08	26.72	46.00	19.28	PASS	L
4	4.002	47.34	56.00	8.66	30.82	46.00	15.18	PASS	L
5	8.9655	35.84	60.00	24.16	19.10	50.00	30.90	PASS	L
6	26.5515	41.79	60.00	18.21	27.30	50.00	22.70	PASS	L

**Neutral:**

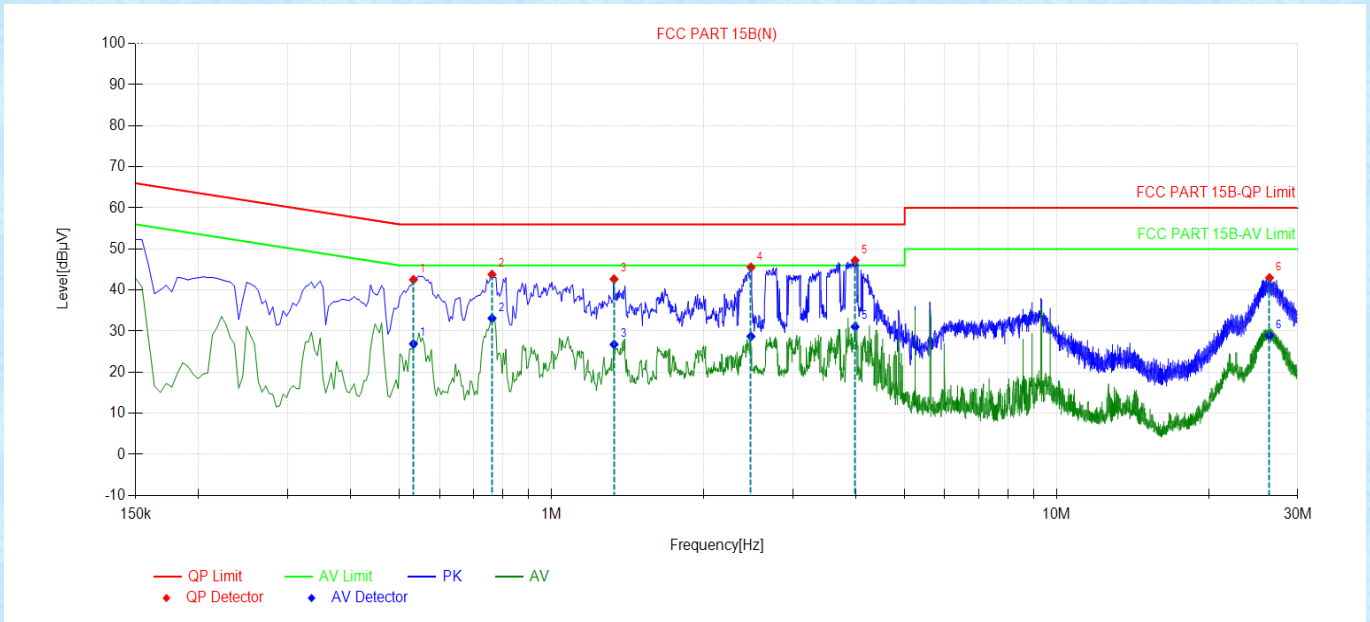


Final Data List									
NO.	Freq. [MHz]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict	Type
1	0.5325	42.53	56.00	13.47	26.91	46.00	19.09	PASS	N
2	0.762	43.79	56.00	12.21	33.12	46.00	12.88	PASS	N
3	1.329	42.67	56.00	13.33	26.76	46.00	19.24	PASS	N
4	2.481	45.54	56.00	10.46	28.72	46.00	17.28	PASS	N
5	3.9885	47.20	56.00	8.80	31.05	46.00	14.95	PASS	N
6	26.385	42.97	60.00	17.03	28.92	50.00	21.08	PASS	N

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss


### 6.3 Emission Bandwidth and 99% Occupied Bandwidth

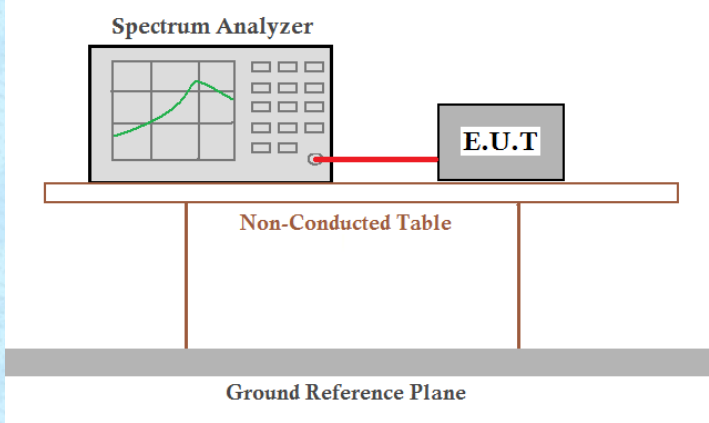Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test procedure:	According to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Measurement data:** The detailed test data see Appendix for 5G UNII.




## 6.4 Transmit Power

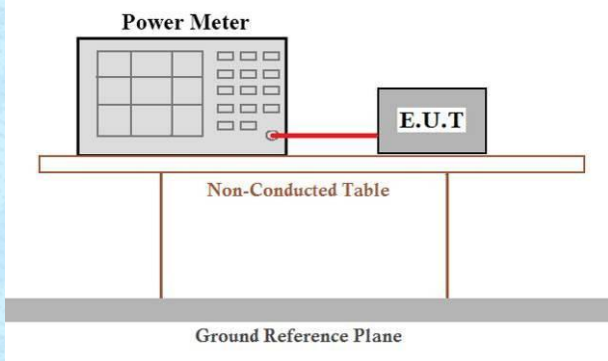Test Requirement:	FCC Part15 E Section 15.407	
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Frequency band (MHz)	Limit
	5150-5250	≤1W(30dBm) for master device
		≤250mW(23.98dBm) for client device
	5250-5350	≤250mW(23.98dBm) for client device or 11dBm+10logB*
	5470-5725	≤250mW(23.98dBm) for client device or 11dBm+10logB*
Remark: *Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.		
Test setup:		
Test procedure:	<p><b>Measurement using an RF average power meter</b></p> <ul style="list-style-type: none"> <li>(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied <ul style="list-style-type: none"> <li>a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle.</li> <li>b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.</li> <li>c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.</li> </ul> </li> <li>(ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B).</li> <li>(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.</li> <li>(iv) Adjust the measurement in dBm by adding <math>10 \log(1/x)</math> where x is the duty cycle (e.g., <math>10 \log(1/0.25)</math> if the duty cycle is 25 percent).</li> </ul>	
Test Instruments:	Refer to section 6 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

**Measurement data:** The detailed test data see Appendix for 5G UNII.

## 6.5 Power Spectral Density

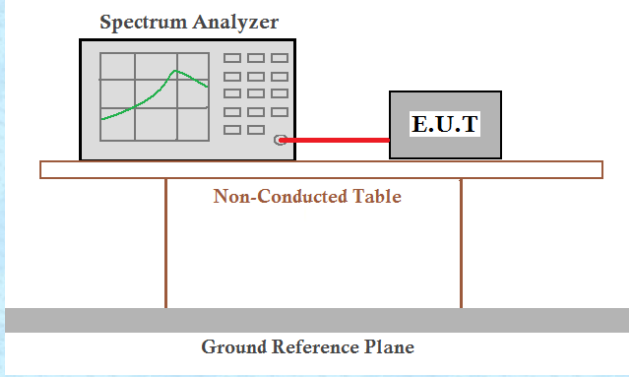Test Requirement:	FCC Part15 E Section 15.407									
Test Method:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01									
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td rowspan="2">5150-5250</td> <td>≤17dBm in 1MHz for master device</td> </tr> <tr> <td>≤11dBm in 1MHz for client device</td> </tr> <tr> <td>5250-5350</td> <td>≤11dBm in 1MHz for client device</td> </tr> <tr> <td>5470-5725</td> <td>≤11dBm in 1MHz for client device</td> </tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	≤17dBm in 1MHz for master device	≤11dBm in 1MHz for client device	5250-5350	≤11dBm in 1MHz for client device	5470-5725	≤11dBm in 1MHz for client device
	Frequency band (MHz)	Limit								
	5150-5250	≤17dBm in 1MHz for master device								
		≤11dBm in 1MHz for client device								
	5250-5350	≤11dBm in 1MHz for client device								
5470-5725	≤11dBm in 1MHz for client device									
Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.										
Test setup:										
Test procedure:	<ol style="list-style-type: none"> <li>1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...".</li> <li>2) Use the peak search function on the instrument to find the peak of the spectrum.</li> <li>3) Make the following adjustments to the peak value of the spectrum, if applicable: <ol style="list-style-type: none"> <li>a) If Method SA-2 or SA-2 Alternative was used, add <math>10 \log(1/x)</math>, where <math>x</math> is the duty cycle, to the peak of the spectrum.</li> <li>b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.</li> </ol> </li> <li>4) The result is the PSD.</li> </ol>									
Test Instruments:	Refer to section 6 for details									
Test mode:	Refer to section 5.2 for details									
Test results:	Pass									


**Measurement data:** The detailed test data see Appendix for 5G UNII.



## 6.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 5.205			
Test Method:	ANSI C63.10:2013			
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)			
Receiver setup:	Frequency	Detector	RBW	VBW
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
		AV	1MHz	3MHz
Limit:	Frequency	Limit (dBuV/m @3m)		Remark
	30MHz-88MHz	40.0		Quasi-peak Value
	88MHz-216MHz	43.5		Quasi-peak Value
	216MHz-960MHz	46.0		Quasi-peak Value
	960MHz-1GHz	54.0		Quasi-peak Value
	Above 1GHz	54.0		Average Value
68.2		Peak Value		
<p>Undesirable emission limits:</p> <p>(1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>(2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.</p> <p>(3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p>				
Test Procedure:	<p>a. The EUT was placed on the top of a rotating table 0.1 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>			

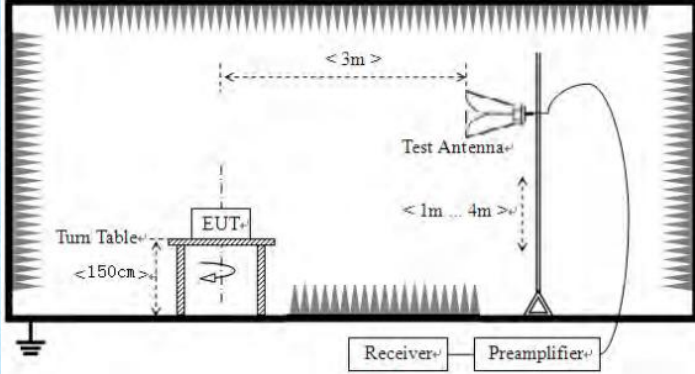

<p>Test setup:</p>	<p>For radiated emissions above 1GHz</p> 
<p>Test Instruments:</p>	<p>Refer to section 6 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

**Remarks:**

- Both 2 antennas and all modulation type were tested and compliance, only worst condition (ANT 1) report.
- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
- According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:  
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$   
 For example, if  $\text{EIRP} = -27\text{dBm}$   
 $E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$

**Measurement Data:**

<b>802.11ac(HT20)</b>								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150	57.14	33.87	8.01	53.64	45.38	68.2	-22.82	Horizontal
5350	56.94	33.83	8.17	53.56	45.38	68.2	-22.82	Horizontal
5150	54.94	33.87	8.01	53.64	43.18	68.2	-25.02	Vertical
5350	52.75	33.83	8.17	53.56	41.19	68.2	-27.01	Vertical
5150	46.27	33.87	8.01	53.64	34.51	54	-19.49	Horizontal
5350	45.66	33.83	8.17	53.56	34.1	54	-19.9	Horizontal
5150	45.54	33.87	8.01	53.64	33.78	54	-20.22	Vertical
5350	44.61	33.83	8.17	53.56	33.05	54	-20.95	Vertical

<b>802.11ac(HT40)</b>								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150	57.11	33.87	8.01	53.64	45.35	68.2	-22.85	Horizontal
5350	54.17	33.83	8.17	53.56	42.61	68.2	-25.59	Horizontal
5150	56.11	33.87	8.01	53.64	44.35	68.2	-23.85	Vertical
5350	55.94	33.83	8.17	53.56	44.38	68.2	-23.82	Vertical
5150	43.81	33.87	8.01	53.64	32.05	54	-21.95	Horizontal
5350	44.67	33.83	8.17	53.56	33.11	54	-20.89	Horizontal
5150	46.72	33.87	8.01	53.64	34.96	54	-19.04	Vertical
5350	43.27	33.83	8.17	53.56	31.71	54	-22.29	Vertical


<b>802.11ac(HT80)</b>								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150	55.33	33.87	8.01	53.64	43.57	68.2	-24.63	Horizontal
5350	56.41	33.83	8.17	53.56	44.85	68.2	-23.35	Horizontal
5150	55.67	33.87	8.01	53.64	43.91	68.2	-24.29	Vertical
5350	55.68	33.83	8.17	53.56	44.12	68.2	-24.08	Vertical
5150	44.81	33.87	8.01	53.64	33.05	54	-20.95	Horizontal
5350	47.33	33.83	8.17	53.56	35.77	54	-18.23	Horizontal
5150	47.81	33.87	8.01	53.64	36.05	54	-17.95	Vertical
5350	44.74	33.83	8.17	53.56	33.18	54	-20.82	Vertical





## 6.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
AV		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test Procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <p>1&gt;.Below 1GHz test procedure:</p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table (0.1m for below 1GHz and above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> <p>2&gt;.Above 1GHz test procedure:</p> <ol style="list-style-type: none"> <li>On the test site as test setup graph above,the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal</li> </ol>				

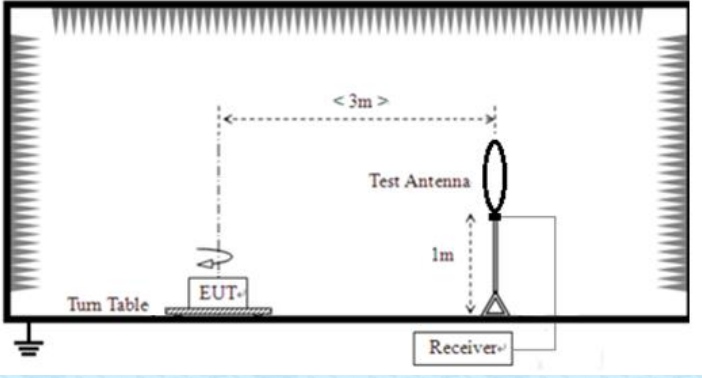

	<p>use as declared by the provider.</p> <ol style="list-style-type: none"> <li>2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver.</li> <li>3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.</li> <li>4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.</li> <li>5. Repeat step 4 for test frequency with the test antenna polarized horizontally.</li> <li>6. Remove the transmitter and replace it with a substitution antenna</li> <li>7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.</li> <li>8. Repeat step 7 with both antennas horizontally polarized for each test frequency.</li> <li>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:  <math display="block">\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}</math>                     where:                      Pg is the generator output power into the substitution antenna.</li> </ol>
<p>Test setup:</p>	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>

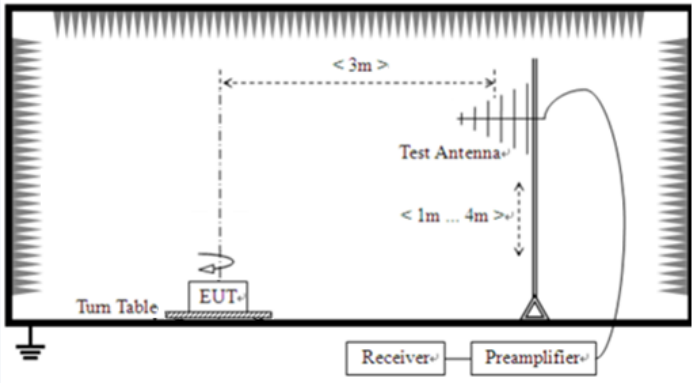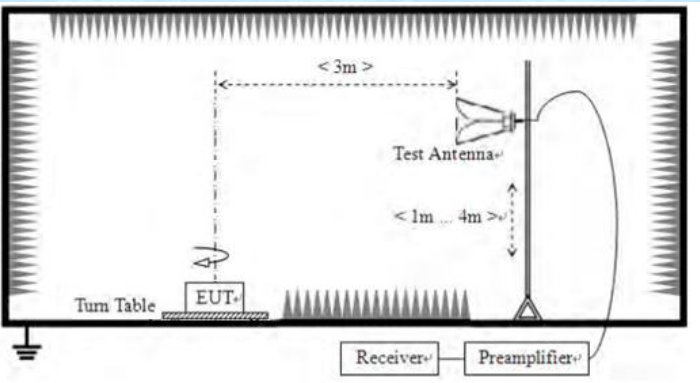	 <p>For radiated emissions above 1GHz</p> 					
Test Instruments:	Refer to section 6 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

**Remarks:**

1. Both 2 antennas were tested and compliance, only worst condition(ANT 1) report.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

**Measurement Data:**


**9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

## 30MHz~ 1GHz

Pre-scan all test modes, found worst case at 802.11ac(HT20), and so only show the test result of it


### Horizontal:

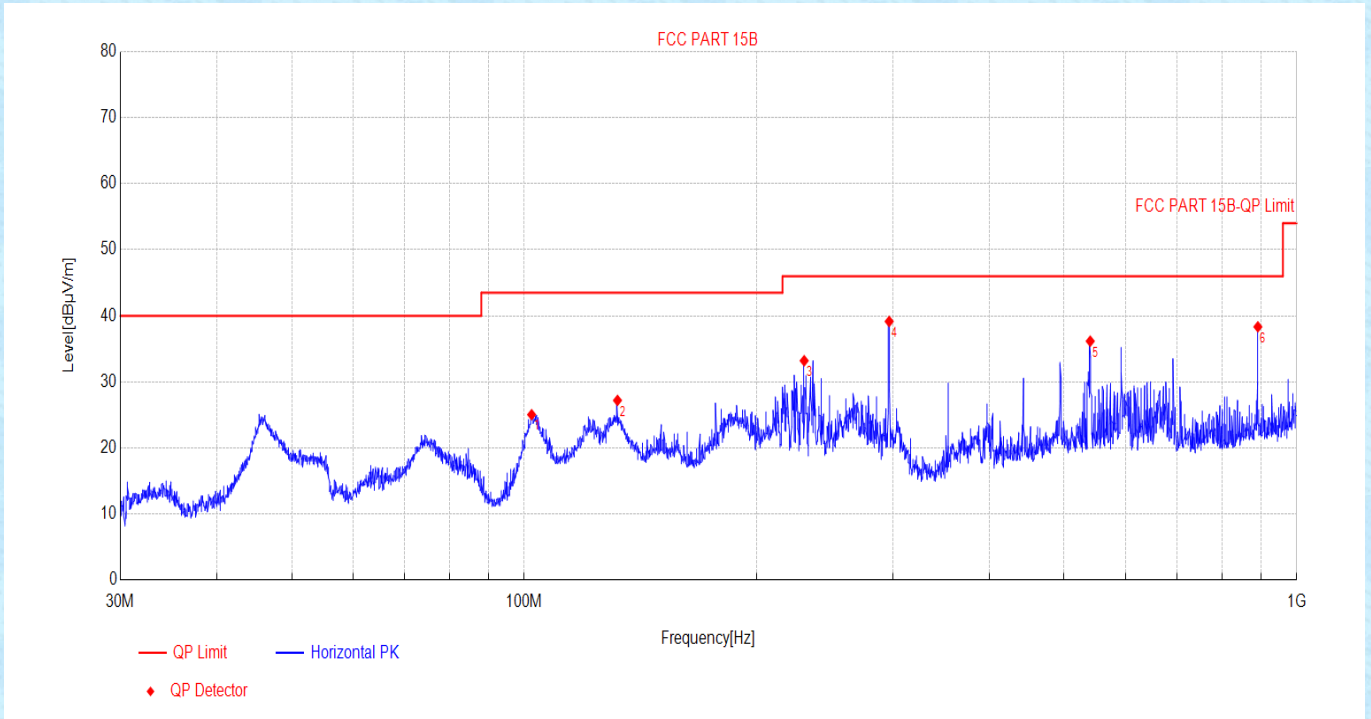

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	102.2386	-18.72	25.04	43.50	18.46	100	164	Horizontal	PASS
2	132.0558	-20.05	27.20	43.50	16.30	100	94	Horizontal	PASS
3	230.3848	-16.37	33.21	46.00	12.79	100	30	Horizontal	PASS
4	296.7935	-14.39	39.15	46.00	6.85	100	130	Horizontal	PASS
5	540.5073	-9.32	36.16	46.00	9.84	100	71	Horizontal	PASS
6	890.7536	-4.58	38.34	46.00	7.66	100	12	Horizontal	PASS



**Vertical:**

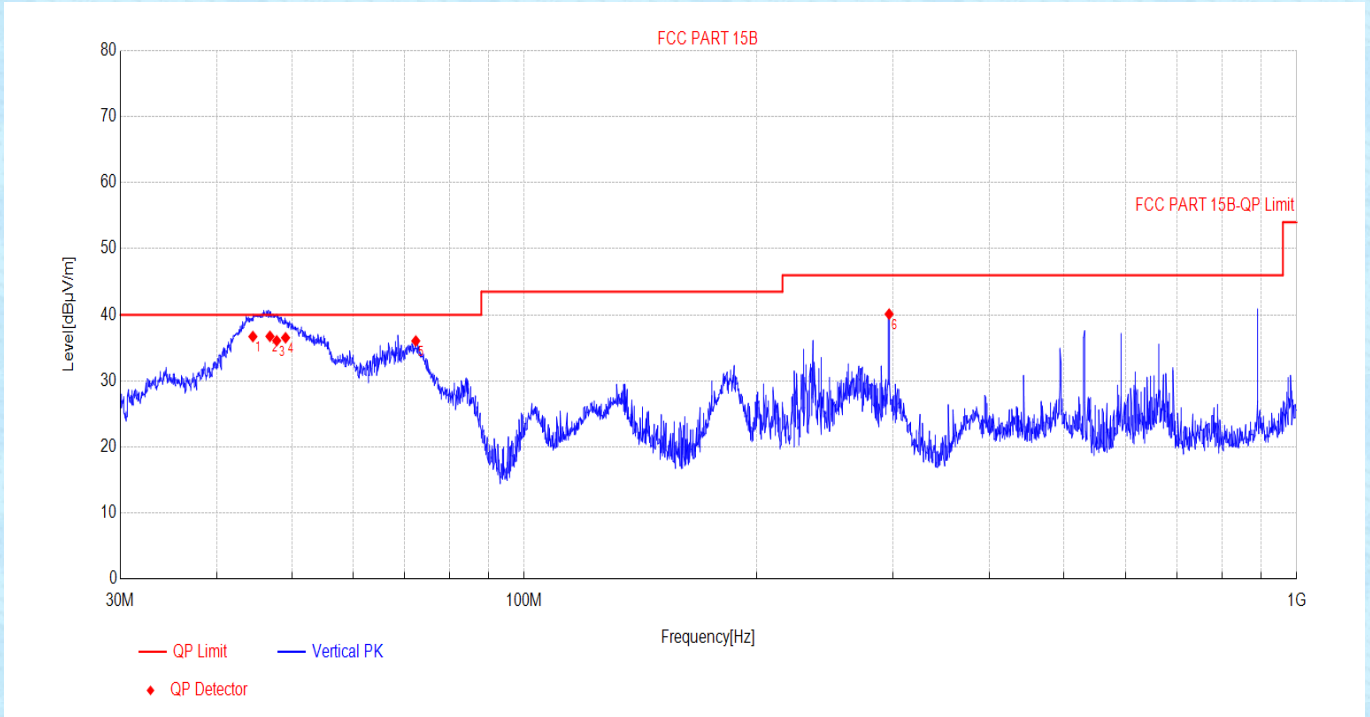

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	44.5434	-16.61	36.71	40.00	3.29	100	125	Vertical	PASS
2	46.8661	-16.16	36.74	40.00	3.26	100	172	Vertical	PASS
3	47.8204	-15.98	36.08	40.00	3.92	100	114	Vertical	PASS
4	49.0944	-15.74	36.53	40.00	3.47	100	32	Vertical	PASS
5	72.3851	-19.80	36.04	40.00	3.96	100	201	Vertical	PASS
6	296.7935	-14.39	40.11	46.00	5.89	100	207	Vertical	PASS

**Above 1GHz:**

**802.11ac(HT20) 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	55.41	39.34	11.73	53.2	53.28	68.2	-14.62	Vertical
15540	54	38.92	14.71	52.85	54.78	68.2	-12.01	Vertical
10360	55.41	39.34	11.73	53.2	53.28	68.2	-14.28	Horizontal
15540	57.22	38.92	14.71	52.85	58	68.2	-11.37	Horizontal
10360	45.09	39.34	11.73	53.2	42.96	54	-8.25	Vertical
15540	46.89	38.92	14.71	52.85	47.67	54	-9.85	Vertical
10360	47.17	39.34	11.73	53.2	45.04	54	-8.49	Horizontal
15540	45.24	38.92	14.71	52.85	46.02	54	-8.48	Horizontal

**802.11ac(HT20) 5200MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	57.25	39.36	11.76	53.2	55.17	68.2	-13.03	Vertical
15600	57.98	38.96	14.73	52.78	58.89	68.2	-9.31	Vertical
10400	56.57	39.36	11.76	53.2	54.49	68.2	-13.71	Horizontal
15600	52.36	38.96	14.73	52.78	53.27	68.2	-14.93	Horizontal
10400	47.17	39.36	11.76	53.2	45.09	54	-8.91	Vertical
15600	46.84	38.96	14.73	52.78	47.75	54	-6.25	Vertical
10400	43.31	39.36	11.76	53.2	41.23	54	-12.77	Horizontal
15600	47.25	38.96	14.73	52.78	48.16	54	-5.84	Horizontal

**802.11ac(HT20) 5240MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	56.81	39.39	11.82	53.2	54.82	68.2	-13.38	Vertical
15720	54.01	39.03	14.78	52.64	55.18	68.2	-13.02	Vertical
10480	54.16	39.39	11.82	53.2	52.17	68.2	-16.03	Horizontal
15720	52.73	39.03	14.78	52.64	53.9	68.2	-14.3	Horizontal
10480	46.54	39.39	11.82	53.2	44.55	54	-9.45	Vertical
15720	47.9	39.03	14.78	52.64	49.07	54	-4.93	Vertical
10480	46.76	39.39	11.82	53.2	44.77	54	-9.23	Horizontal
15720	44.45	39.03	14.78	52.64	45.62	54	-8.38	Horizontal

**802.11ac(HT20) 5260MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520	52.94	39.4	11.84	53.2	50.98	68.2	-17.22	Vertical
15780	53.83	39.07	14.8	52.56	55.14	68.2	-13.06	Vertical
10520	53.29	39.4	11.84	53.2	51.33	68.2	-16.87	Horizontal
15780	54.53	39.07	14.8	52.56	55.84	68.2	-12.36	Horizontal
10520	44.78	39.4	11.84	53.2	42.82	54	-11.18	Vertical
15780	45.17	39.07	14.8	52.56	46.48	54	-7.52	Vertical
10520	43.71	39.4	11.84	53.2	41.75	54	-12.25	Horizontal
15780	43.78	39.07	14.8	52.56	45.09	54	-8.91	Horizontal

**802.11ac(HT20) 5300MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10600	55.83	39.38	11.9	53.2	53.91	68.2	-14.29	Vertical
15900	54.34	39.14	14.85	52.42	55.91	68.2	-12.29	Vertical
10600	55.01	39.38	11.9	53.2	53.09	68.2	-15.11	Horizontal
15900	53.61	39.14	14.85	52.42	55.18	68.2	-13.02	Horizontal
10600	47.68	39.38	11.9	53.2	45.76	54	-8.24	Vertical
15900	46.12	39.14	14.85	52.42	47.69	54	-6.31	Vertical
10600	43.47	39.38	11.9	53.2	41.55	54	-12.45	Horizontal
15900	43.39	39.14	14.85	52.42	44.96	54	-9.04	Horizontal

**802.11ac(HT20) 5320MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640	54.87	39.37	11.93	53.2	52.97	68.2	-15.23	Vertical
15960	53.04	39.18	14.87	52.35	54.74	68.2	-13.46	Vertical
10640	52.85	39.37	11.93	53.2	50.95	68.2	-17.25	Horizontal
15960	54.81	39.18	14.87	52.35	56.51	68.2	-11.69	Horizontal
10640	45.58	39.37	11.93	53.2	43.68	54	-10.32	Vertical
15960	43.34	39.18	14.87	52.35	45.04	54	-8.96	Vertical
10640	45.16	39.37	11.93	53.2	43.26	54	-10.74	Horizontal
15960	43.39	39.18	14.87	52.35	45.09	54	-8.91	Horizontal

**802.11ac(HT20) 5500MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000	52.86	39.3	12.22	53.2	51.18	68.2	-17.02	Vertical
16500	57.84	39.5	15.18	52.05	60.47	68.2	-7.73	Vertical
11000	57.45	39.3	12.22	53.2	55.77	68.2	-12.43	Horizontal
16500	54.51	39.5	15.18	52.05	57.14	68.2	-11.06	Horizontal
11000	47.6	39.3	12.22	53.2	45.92	54	-8.08	Vertical
16500	43.81	39.5	15.18	52.05	46.44	54	-7.56	Vertical
11000	44.36	39.3	12.22	53.2	42.68	54	-11.32	Horizontal
16500	44.53	39.5	15.18	52.05	47.16	54	-6.84	Horizontal



## 802.11ac(HT20) 5580MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160	53.24	39.27	12.3	53.25	51.56	68.2	-16.64	Vertical
16740	56.62	39.36	15.3	51.93	59.35	68.2	-8.85	Vertical
11160	54.91	39.27	12.3	53.25	53.23	68.2	-14.97	Horizontal
16740	55.03	39.36	15.3	51.93	57.76	68.2	-10.44	Horizontal
11160	45.94	39.27	12.3	53.25	44.26	54	-9.74	Vertical
16740	46.77	39.36	15.3	51.93	49.5	54	-4.5	Vertical
11160	47.22	39.27	12.3	53.25	45.54	54	-8.46	Horizontal
16740	46.64	39.36	15.3	51.93	49.37	54	-4.63	Horizontal

## 802.11ac(HT20) 5700MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400	53.85	39.22	12.42	53.32	52.17	68.2	-16.03	Vertical
17100	52.5	39.46	15.51	51.75	55.72	68.2	-12.48	Vertical
11400	57.15	39.22	12.42	53.32	55.47	68.2	-12.73	Horizontal
17100	54.09	39.46	15.51	51.75	57.31	68.2	-10.89	Horizontal
11400	47.4	39.22	12.42	53.32	45.72	54	-8.28	Vertical
17100	43.04	39.46	15.51	51.75	46.26	54	-7.74	Vertical
11400	46.78	39.22	12.42	53.32	45.1	54	-8.9	Horizontal
17100	47.8	39.46	15.51	51.75	51.02	54	-2.98	Horizontal

## 802.11acHT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	57.82	39.35	11.75	53.2	55.72	68.2	-12.48	Vertical
15570	56.84	38.94	14.72	52.82	57.68	68.2	-10.52	Vertical
10380	56.23	39.35	11.75	53.2	54.13	68.2	-14.07	Horizontal
15570	52.39	38.94	14.72	52.82	53.23	68.2	-14.97	Horizontal
10380	46.82	39.35	11.75	53.2	44.72	54	-9.28	Vertical
15570	46.77	38.94	14.72	52.82	47.61	54	-6.39	Vertical
10380	45.61	39.35	11.75	53.2	43.51	54	-10.49	Horizontal
15570	45.39	38.94	14.72	52.82	46.23	54	-7.77	Horizontal

### 802.11ac(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	53.88	39.38	11.8	53.2	51.86	68.2	-16.34	Vertical
15690	52.65	39.01	14.77	52.67	53.76	68.2	-14.44	Vertical
10460	54.05	39.38	11.8	53.2	52.03	68.2	-16.17	Horizontal
15690	52.95	39.01	14.77	52.67	54.06	68.2	-14.14	Horizontal
10460	45.37	39.38	11.8	53.2	43.35	54	-10.65	Vertical
15690	47.96	39.01	14.77	52.67	49.07	54	-4.93	Vertical
10460	47.19	39.38	11.8	53.2	45.17	54	-8.83	Horizontal
15690	46.23	39.01	14.77	52.67	47.34	54	-6.66	Horizontal

### 802.11acHT40) 5270MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540	52.28	39.39	11.86	53.2	50.33	68.2	-17.87	Vertical
15810	52.59	39.09	14.81	52.53	53.96	68.2	-14.24	Vertical
10540	54.65	39.39	11.86	53.2	52.7	68.2	-15.5	Horizontal
15810	52.43	39.09	14.81	52.53	53.8	68.2	-14.4	Horizontal
10540	44.83	39.39	11.86	53.2	42.88	54	-11.12	Vertical
15810	46.58	39.09	14.81	52.53	47.95	54	-6.05	Vertical
10540	43.38	39.39	11.86	53.2	41.43	54	-12.57	Horizontal
15810	47.14	39.09	14.81	52.53	48.51	54	-5.49	Horizontal

### 802.11acHT40) 5310MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620	54.9	39.38	11.91	53.2	52.99	68.2	-15.21	Vertical
15930	55.11	39.16	14.86	52.38	56.75	68.2	-11.45	Vertical
10620	53.88	39.38	11.91	53.2	51.97	68.2	-16.23	Horizontal
15930	56.43	39.16	14.86	52.38	58.07	68.2	-10.13	Horizontal
10620	46.14	39.38	11.91	53.2	44.23	54	-9.77	Vertical
15930	47.44	39.16	14.86	52.38	49.08	54	-4.92	Vertical
10620	47.64	39.38	11.91	53.2	45.73	54	-8.27	Horizontal
15930	46.17	39.16	14.86	52.38	47.81	54	-6.19	Horizontal



### 802.11acHT40) 5510MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020	55.87	39.3	12.23	53.21	54.19	68.2	-14.01	Vertical
16530	53.72	39.48	15.2	52.04	56.36	68.2	-11.84	Vertical
11020	54.23	39.3	12.23	53.21	52.55	68.2	-15.65	Horizontal
16530	52.45	39.48	15.2	52.04	55.09	68.2	-13.11	Horizontal
11020	46.31	39.3	12.23	53.21	44.63	54	-9.37	Vertical
16530	45.46	39.48	15.2	52.04	48.1	54	-5.9	Vertical
11020	43.12	39.3	12.23	53.21	41.44	54	-12.56	Horizontal
16530	43.71	39.48	15.2	52.04	46.35	54	-7.65	Horizontal

### 802.11acHT40) 5550MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11100	53.49	39.28	12.27	53.23	51.81	68.2	-16.39	Vertical
16650	56.97	39.41	15.26	51.98	59.66	68.2	-8.54	Vertical
11100	54.52	39.28	12.27	53.23	52.84	68.2	-15.36	Horizontal
16650	52.82	39.41	15.26	51.98	55.51	68.2	-12.69	Horizontal
11100	45.29	39.28	12.27	53.23	43.61	54	-10.39	Vertical
16650	45.56	39.41	15.26	51.98	48.25	54	-5.75	Vertical
11100	47.57	39.28	12.27	53.23	45.89	54	-8.11	Horizontal
16650	44.57	39.41	15.26	51.98	47.26	54	-6.74	Horizontal

### 802.11acHT40) 5670MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340	52.43	39.23	12.39	53.3	50.75	68.2	-17.45	Vertical
17010	54.94	39.23	15.47	51.8	57.84	68.2	-10.36	Vertical
11340	53.8	39.23	12.39	53.3	52.12	68.2	-16.08	Horizontal
17010	53.06	39.23	15.47	51.8	55.96	68.2	-12.24	Horizontal
11340	46.35	39.23	12.39	53.3	44.67	54	-9.33	Vertical
17010	47.9	39.23	15.47	51.8	50.8	54	-3.2	Vertical
11340	45.94	39.23	12.39	53.3	44.26	54	-9.74	Horizontal
17010	44.94	39.23	15.47	51.8	47.84	54	-6.16	Horizontal



## 802.11ac(HT80) 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420	54.27	39.37	11.77	53.2	52.21	68.2	-15.99	Vertical
15630	55.12	38.98	14.74	52.74	56.1	68.2	-12.1	Vertical
10420	56.66	39.37	11.77	53.2	54.6	68.2	-13.6	Horizontal
15630	57.71	38.98	14.74	52.74	58.69	68.2	-9.51	Horizontal
10420	47.15	39.37	11.77	53.2	45.09	54	-8.91	Vertical
15630	46.32	38.98	14.74	52.74	47.3	54	-6.7	Vertical
10420	43.48	39.37	11.77	53.2	41.42	54	-12.58	Horizontal
15630	46.51	38.98	14.74	52.74	47.49	54	-6.51	Horizontal

## 802.11ac(HT80) 5290MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10580	55.12	39.38	11.89	53.2	53.19	68.2	-15.01	Vertical
15870	56.81	39.12	14.84	52.46	58.31	68.2	-9.89	Vertical
10580	56.25	39.38	11.89	53.2	54.32	68.2	-13.88	Horizontal
15870	56.94	39.12	14.84	52.46	58.44	68.2	-9.76	Horizontal
10580	45.99	39.38	11.89	53.2	44.06	54	-9.94	Vertical
15870	44.23	39.12	14.84	52.46	45.73	54	-8.27	Vertical
10580	47.12	39.38	11.89	53.2	45.19	54	-8.81	Horizontal
15870	44.06	39.12	14.84	52.46	45.56	54	-8.44	Horizontal

## 802.11ac(HT80) 5530MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11060	55.02	39.29	12.25	53.22	53.34	68.2	-14.86	Vertical
16590	57.03	39.45	15.23	52.01	59.7	68.2	-8.5	Vertical
11060	55.37	39.29	12.25	53.22	53.69	68.2	-14.51	Horizontal
16590	56.29	39.45	15.23	52.01	58.96	68.2	-9.24	Horizontal
11060	46.57	39.29	12.25	53.22	44.89	54	-9.11	Vertical
16590	44.41	39.45	15.23	52.01	47.08	54	-6.92	Vertical
11060	43.59	39.29	12.25	53.22	41.91	54	-12.09	Horizontal
16590	47.77	39.45	15.23	52.01	50.44	54	-3.56	Horizontal


**802.11ac(HT80) 5610MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11220	56.08	39.26	12.33	53.27	54.4	68.2	-13.8	Vertical
16830	57.42	39.3	15.35	51.89	60.18	68.2	-8.02	Vertical
11220	55.8	39.26	12.33	53.27	54.12	68.2	-14.08	Horizontal
16830	57.58	39.3	15.35	51.89	60.34	68.2	-7.86	Horizontal
11220	45.43	39.26	12.33	53.27	43.75	54	-10.25	Vertical
16830	43.77	39.3	15.35	51.89	46.53	54	-7.47	Vertical
11220	46.3	39.26	12.33	53.27	44.62	54	-9.38	Horizontal
16830	47.05	39.3	15.35	51.89	49.81	54	-4.19	Horizontal

## Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. Both 2 antennas and all modulation type were tested and passed, only the worst condition report (ANT 1).

## 6.8 Frequency stability

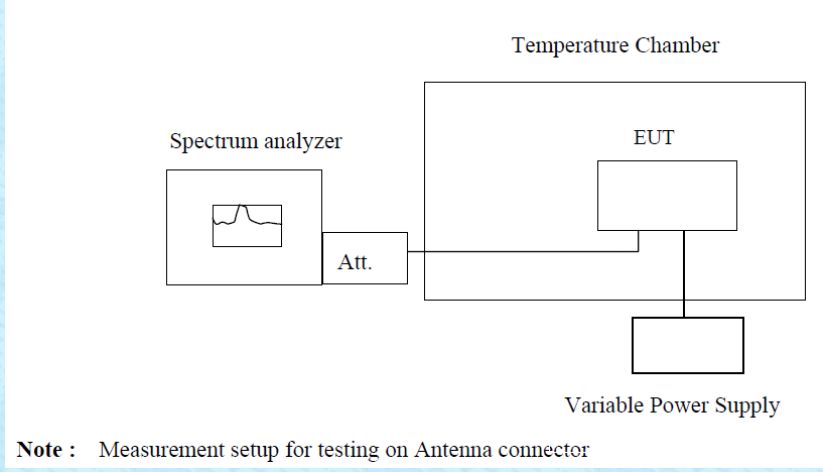Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 <p><b>Note :</b> Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Measurement data:** The detailed test data see Appendix for 5G UNII.



## 7 Test Setup Photo

Reference to the **appendix I** for details.

## 8 EUT Constructional Details

Reference to the **appendix II** for details.

---END---