

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/26/2009 11:33:15 AM Date/Time: 11/26/2009 11:43:56 AM

**Flat_802.11n(2.4GHz) CH6_13.5M_HT40_Tablet Mode LCD Right side Close
Body_chan0eport**

DUT: ZE8_Tablet Mode LCD Right side; Type: Tablet PC; Serial: N/A

Communication System: IEEE 802.11n(2.4GHz); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV3 - SN3150; ConvF(4.23, 4.23, 4.23); Calibrated: 1/20/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/24/2009
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1036
- Measurement SW: DASYS, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.045 mW/g


Flat/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 2.57 V/m; Power Drift = 0.168 dB

Peak SAR (extrapolated) = 0.084 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

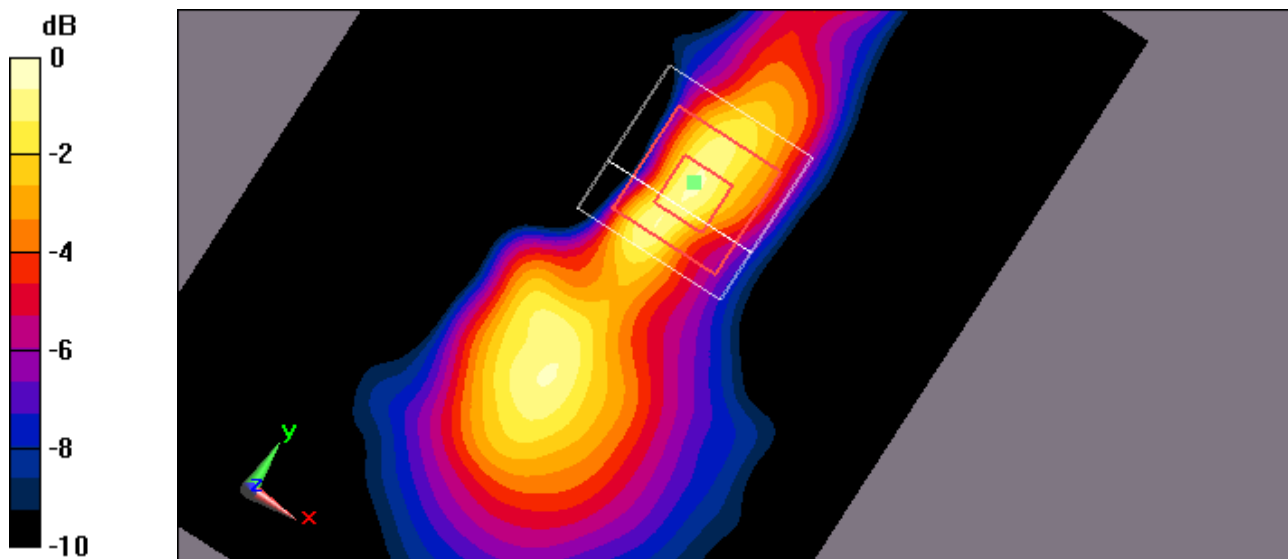

0 dB = 0.051mW/g