



## FCC 47 CFR PART 15 SUBPART C

for

**Tablet Computer**

**Model: A1409**

**Brand: acer**

**Test Report Number:**

**C140707Z04-RP1**

**Issued Date: July 28, 2014**

Issued for

**Acer Incorporated**

**8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan**

Issued by:

**Compliance Certification Services (Shenzhen) Inc.**

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	July 28, 2014	Initial Issue	ALL	Sabrina Wang



**TABLE OF CONTENTS**

**1 TEST CERTIFICATION..... 4**

**2 TEST RESULT SUMMARY..... 5**

**3 EUT DESCRIPTION ..... 6**

**4 TEST METHODOLOGY ..... 7**

    4.1. DESCRIPTION OF TEST MODES ..... 7

**5 SETUP OF EQUIPMENT UNDER TEST..... 8**

    5.1. DESCRIPTION OF SUPPORT UNITS..... 8

    5.2. CONFIGURATION OF SYSTEM UNDER TEST ..... 8

**6 FACILITIES AND ACCREDITATIONS ..... 9**

    6.1. FACILITIES ..... 9

    6.2. ACCREDITATIONS ..... 9

    6.3. MEASUREMENT UNCERTAINTY..... 9

**7 FCC PART 15.247 REQUIREMENTS..... 10**

    7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT ..... 10

    7.2. SPURIOUS EMISSIONS MEASUREMENT ..... 15

    7.3. 6dB BANDWIDTH MEASUREMENT ..... 41

    7.4. PEAK OUTPUT POWER ..... 49

    7.5. BAND EDGES MEASUREMENT ..... 53

    7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT..... 67



# 1 TEST CERTIFICATION

<b>Product</b>	Tablet Computer
<b>Model</b>	A1409
<b>Brand</b>	acer
<b>Tested</b>	July 7~19, 2014
<b>Applicant</b>	<b>Acer Incorporated</b> 8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan
<b>Manufacturer</b>	<b>Acer Incorporated</b> 8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan

APPLICABLE STANDARDS			
Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	<ul style="list-style-type: none"> <li>● Spurious Emissions</li> <li>● Conducted Measurement</li> <li>● Radiated Emissions</li> </ul>
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

**Reviewed by:**

---

**Sunday Hu**  
Supervisor of EMC Dept.  
Compliance Certification Service Inc.

---

**Ruby Zhang**  
Supervisor of Report Dept.  
Compliance Certification Service Inc.



## 2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

- Note:
1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
  2. The information of measurement uncertainty is available upon the customer's request.



### 3 EUT DESCRIPTION

<b>Product</b>	Tablet Computer
<b>Model Number</b>	A1409
<b>Brand</b>	acer
<b>Model Discrepancy</b>	N/A
<b>Identify Number</b>	C140707Z04-RP1
<b>Power Supply</b>	DC5.35V supplied by the Adapter or DC3.7V supplied by the battery(30107108) or DC3.8V supplied by the battery(AP14F8K)
<b>Adapter Manufacturer /Model No.</b>	<b>Adapter 1:</b> Chicony / W12-010N3A I/P: 100-240Vac, 50/60Hz, 0.3A O/P: 5.35Vdc, 2.0A <b>Adapter 2:</b> Delta / ADP-10HW A I/P: 100-240Vac, 50/60Hz, 0.4A max O/P: 5.35Vdc, 2.0A
<b>Transmit Power</b>	IEEE 802.11b mode: 15.60dBm IEEE 802.11g mode: 21.91dBm IEEE 802.11n HT20 MHz mode: 21.18dBm
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
<b>Transmit Data Rate</b>	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 65.0Mbps with fall back rates of 65.0/58.5/52.0/ 39.0/26.0/19.5/13.0/6.5 Mbps
<b>Number of Channels</b>	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels
<b>Antenna Specification</b>	PCB Antenna with 1.29dBi gain (Max)
<b>Channels Spacing</b>	IEEE 802.11b/g ,802.11n HT20 : 5MHz
<b>Temperature Range</b>	0°C ~ 35°C
<b>Hardware Version</b>	V1.0
<b>Software Version</b>	4.4.2

**Note:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: **LNQA1409** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



## 4 TEST METHODOLOGY

### 4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Copy Data + Battery(AP14F8K) + Panel(FL080XW001)	<input type="checkbox"/>
	Mode 2: HDMI Out + Adapter(ADP-10HW A)+ Battery(30107108)+Panel(KD080D10-31NA-A7)	<input type="checkbox"/>
	Mode 3: HDMI Out + Adapter(W12-010N3A)+ Battery(30107108)+Panel(KD080D10-31NA-A7)	<input type="checkbox"/>
	Mode 4: HDMI Out + Adapter(W12-010N3A)+ Battery(AP14F8K)+Panel(KD080D10-31NA-A7)	<input type="checkbox"/>
	Mode 5: HDMI Out + Adapter(W12-010N3A)+ Battery(AP14F8K)+Panel(FL080XW001)	<input checked="" type="checkbox"/>
	Mode 6: GPS+ Adapter(W12-010N3A)+ Battery(AP14F8K) + Panel(FL080XW001)	<input type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.



## 5 SETUP OF EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	PC	OPTIPLEX780	C7X53X	N/A	DELL	N/A	Unshielded 1.80m
2	Monitor	S2440LB	CN0N5XDC74261 31EOGZQ	N/A	DELL	Unshielded 1.20m	Unshielded 1.80m
3	Printer	D1668	CN9CKCB2RG	N/A	HP	Unshielded 1.50m	Unshielded 1.50m
4	Modem	DU-562M	DU562MSG.B1	N/A	ACELL	Unshielded 1.50m	N/A
5	Mouse	MS111-P	J1101ANN	N/A	DELL	Unshielded 1.80m	N/A
6	Keyboard	KB212-B	CNOK6KPN71616	N/A	DELL	Unshielded 1.80m	N/A
7	TF Card	N/A	N/A	N/A	Kingston	N/A	N/A
8	Earphone	ST-908	N/A	N/A	SENICC	Shielded 2.20m	N/A

**Note:**

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.





## 6 FACILITIES AND ACCREDITATIONS

### 6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>USA</b>	<b>A2LA</b>
<b>China</b>	<b>CNAS</b>

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>USA</b>	<b>FCC</b>
<b>Japan</b>	<b>VCCI(C-3478, R-3135, T-652, G-624)</b>
<b>Canada</b>	<b>INDUSTRY CANADA</b>
<b>Taiwan</b>	<b>BSMI</b>

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

### 6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



## 7 FCC PART 15.247 REQUIREMENTS

### 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

#### 7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

**NOTE:**

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2014	04/19/2015
LISN	EMCO	3825/2	8901-1459	03/09/2014	03/08/2015
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/17/2014	03/17/2015
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.




**7.1.3. TEST PROCEDURES** (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

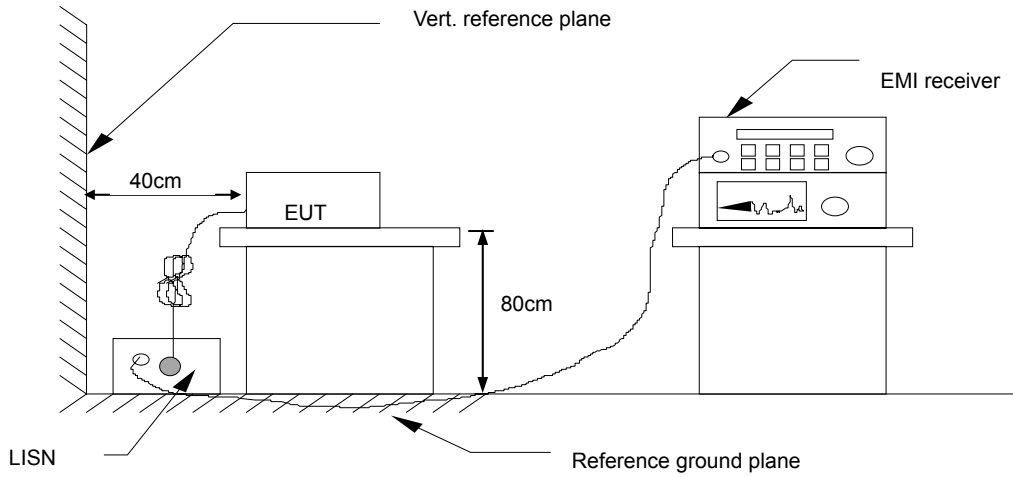

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.1.5. DATA SAMPLE


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

- Factor = Insertion loss of LISN + Cable Loss
- Result = Quasi-peak Reading/ Average Reading + Factor
- Limit = Limit stated in standard
- Margin = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

<b>Model No.</b>	A1409	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	22°C, 45% RH	<b>Test Mode</b>	Mode 5
<b>Tested by</b>	Sun Guo	<b>Line</b>	L1

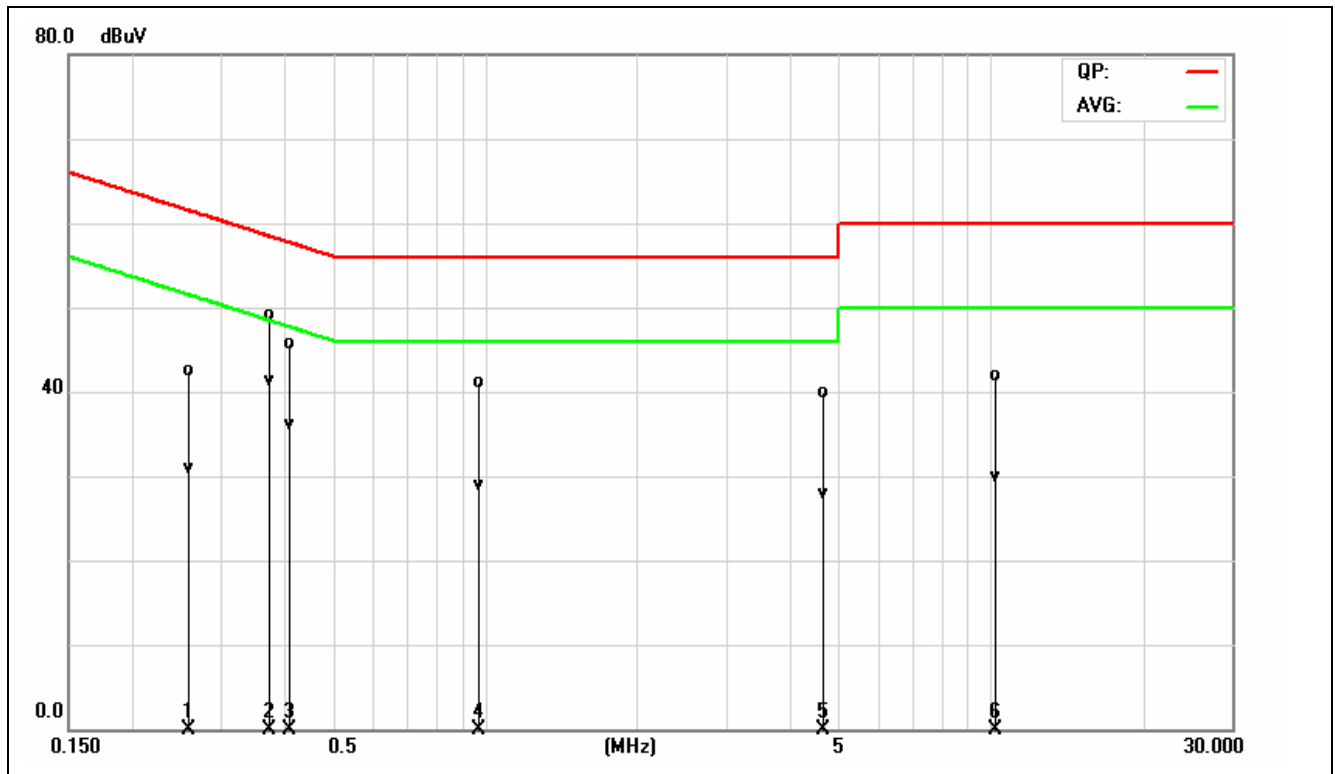


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.2580	32.82	21.15	9.69	42.51	30.84	61.49	51.50	-18.98	-20.66	Pass
0.3740	39.38	31.57	9.68	49.06	41.25	58.41	48.41	-9.35	-7.16	Pass
0.4100	36.12	26.45	9.68	45.80	36.13	57.65	47.65	-11.85	-11.52	Pass
0.9660	31.36	19.16	9.72	41.08	28.88	56.00	46.00	-14.92	-17.12	Pass
4.6620	30.30	18.30	9.68	39.98	27.98	56.00	46.00	-16.02	-18.02	Pass
10.2180	32.11	19.97	9.87	41.98	29.84	60.00	50.00	-18.02	-20.16	Pass

REMARKS: L1 = Line One (Live Line)



<b>Model No.</b>	A1409	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	22°C, 45% RH	<b>Test Mode</b>	Mode 5
<b>Tested by</b>	Sun Guo	<b>Line</b>	L2

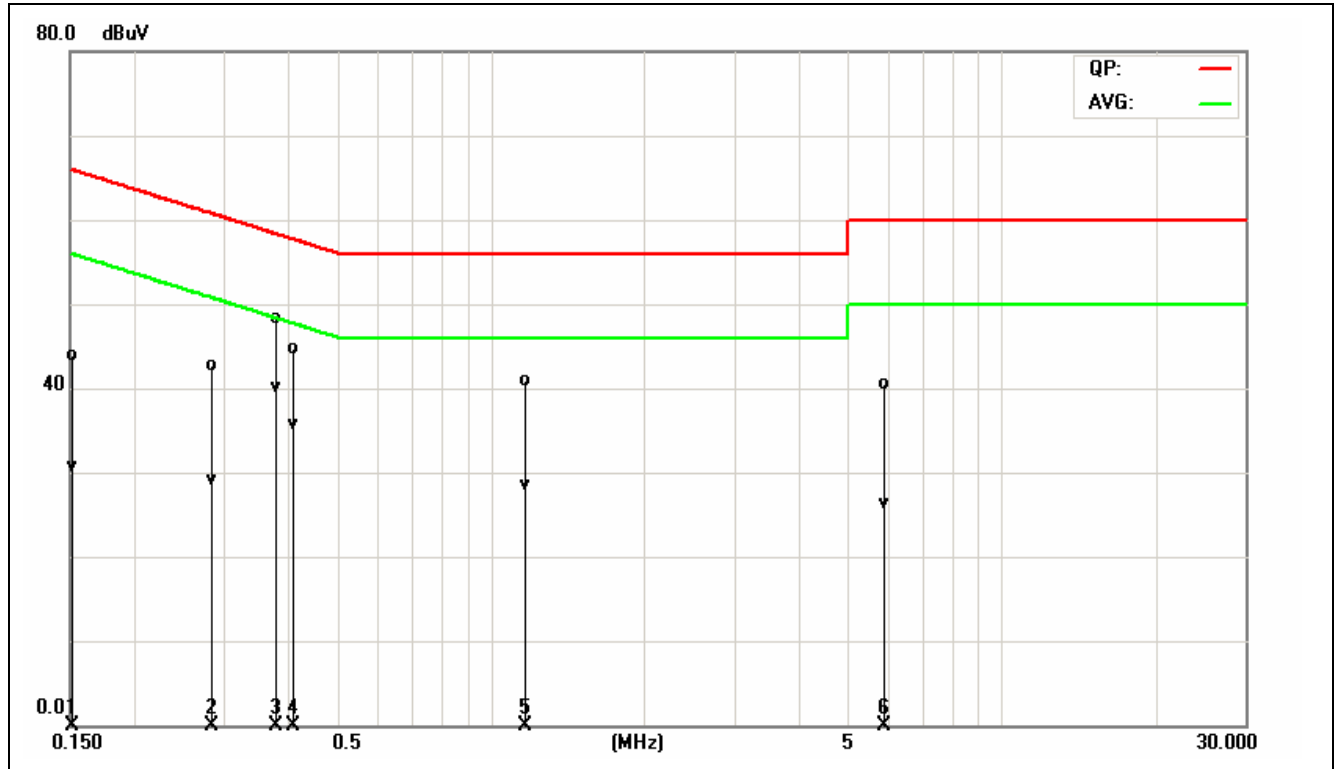

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	34.05	20.88	9.78	43.83	30.66	65.99	56.00	-22.16	-25.34	Pass
0.2819	33.00	19.42	9.76	42.76	29.18	60.76	50.76	-18.00	-21.58	Pass
0.3780	38.55	30.39	9.72	48.27	40.11	58.32	48.32	-10.05	-8.21	Pass
0.4100	35.04	25.95	9.71	44.75	35.66	57.65	47.65	-12.90	-11.99	Pass
1.1620	31.20	18.64	9.79	40.99	28.43	56.00	46.00	-15.01	-17.57	Pass
5.8659	30.72	16.56	9.78	40.50	26.34	60.00	50.00	-19.50	-23.66	Pass

**REMARKS:** L2 = Line Two (Neutral Line)



## 7.2. SPURIOUS EMISSIONS MEASUREMENT

### 7.2.1. CONDUCTED EMISSIONS MEASUREMENT

#### 7.2.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### 7.2.1.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

#### 7.2.1.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.




7.2.1.4. TEST RESULTS

Test Plot
IEEE 802.11b mode

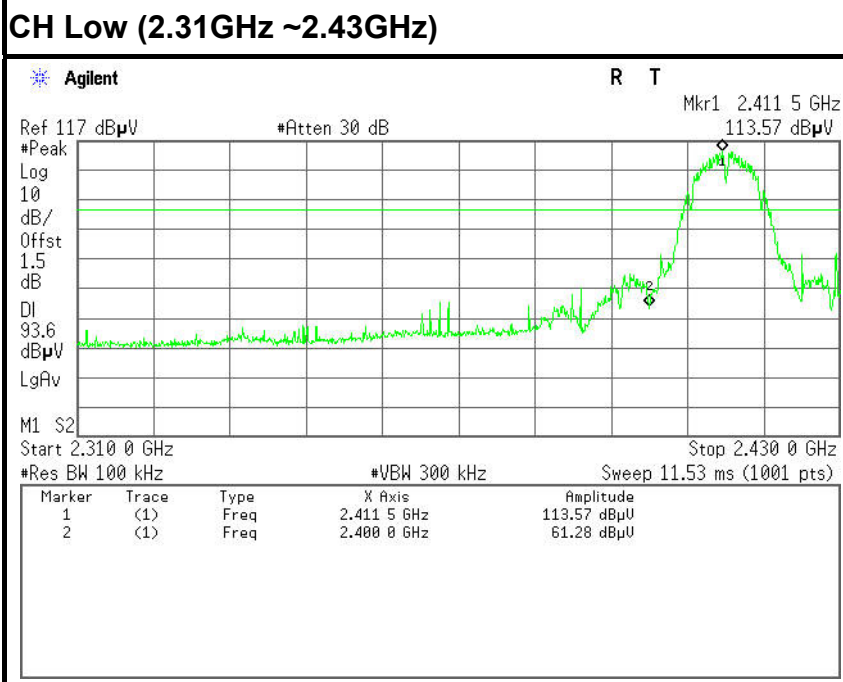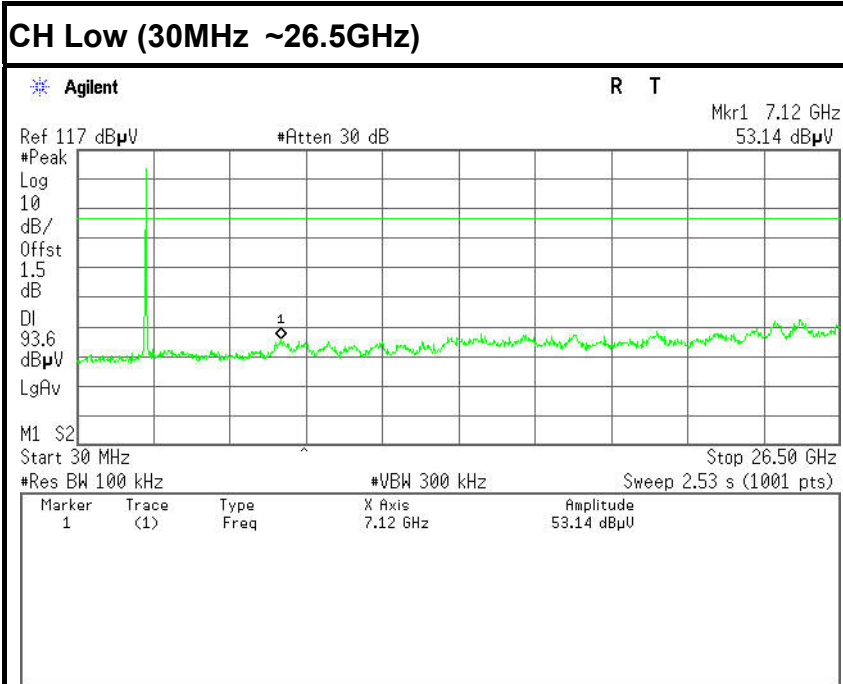




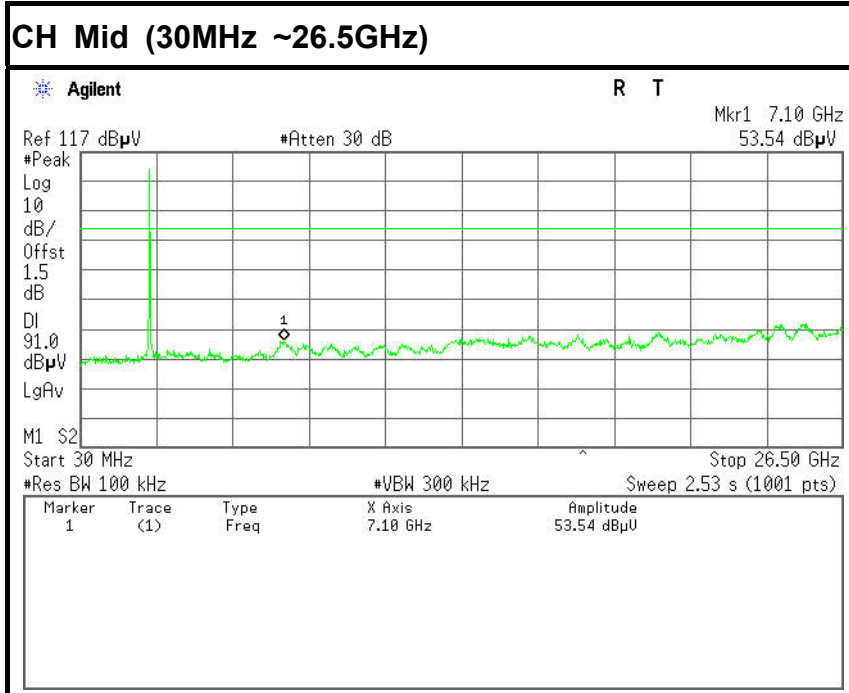




### CH High (30MHz ~26.5GHz)


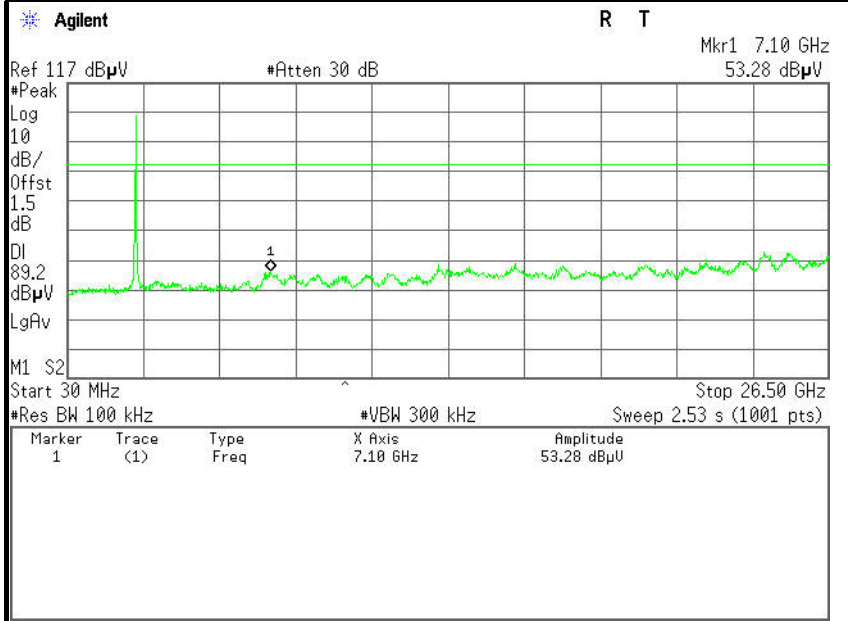



### CH High (2.45GHz ~2.5GHz)

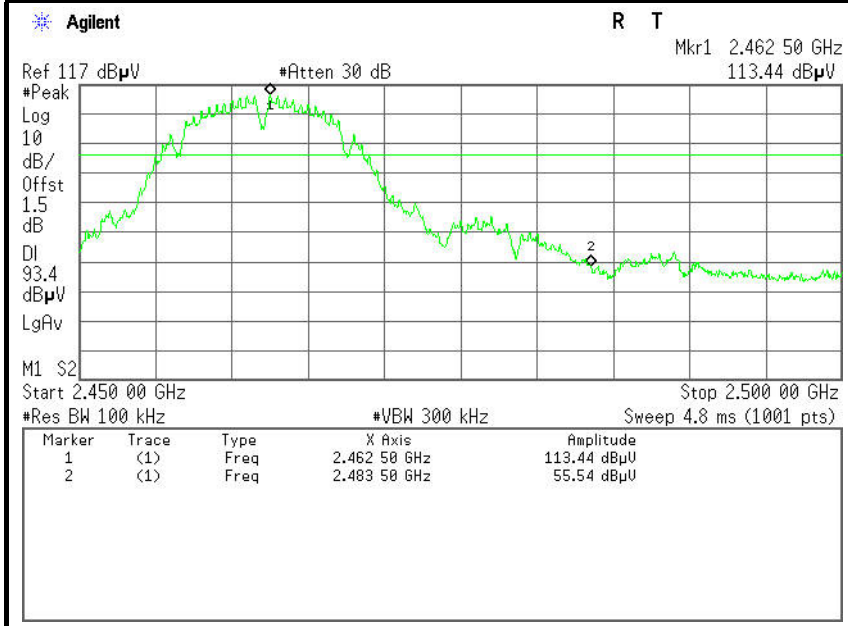




**IEEE 802.11g mode**

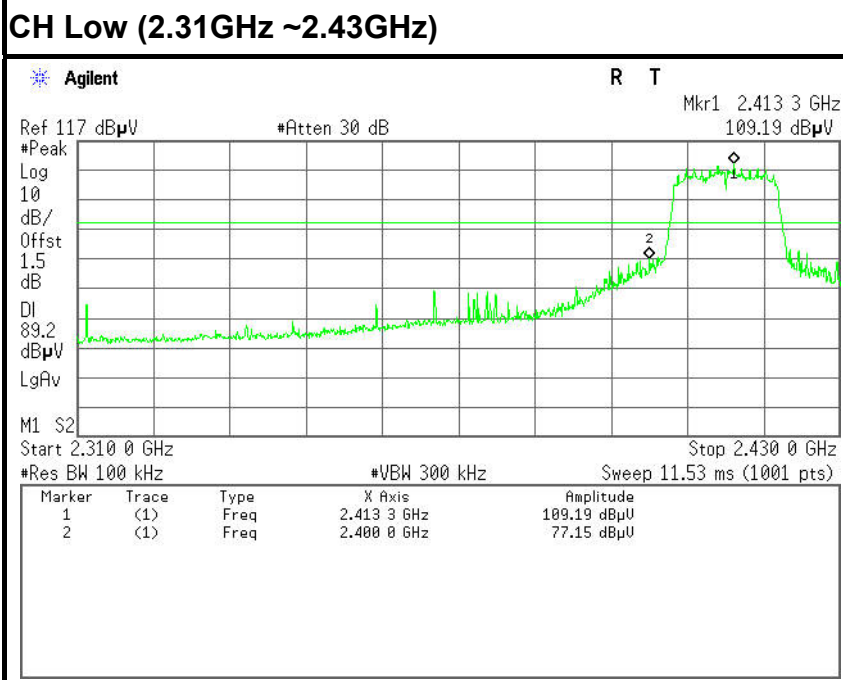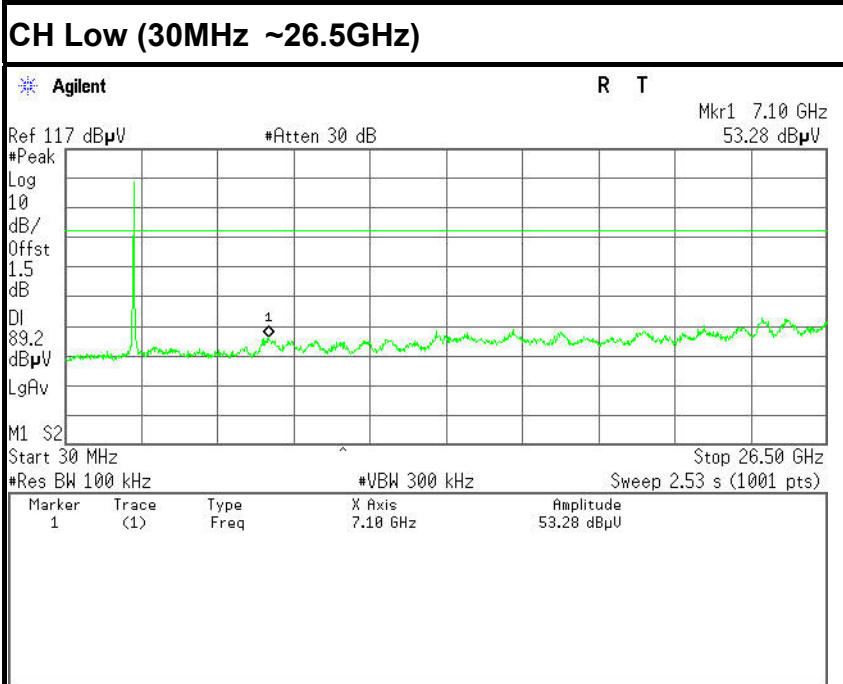

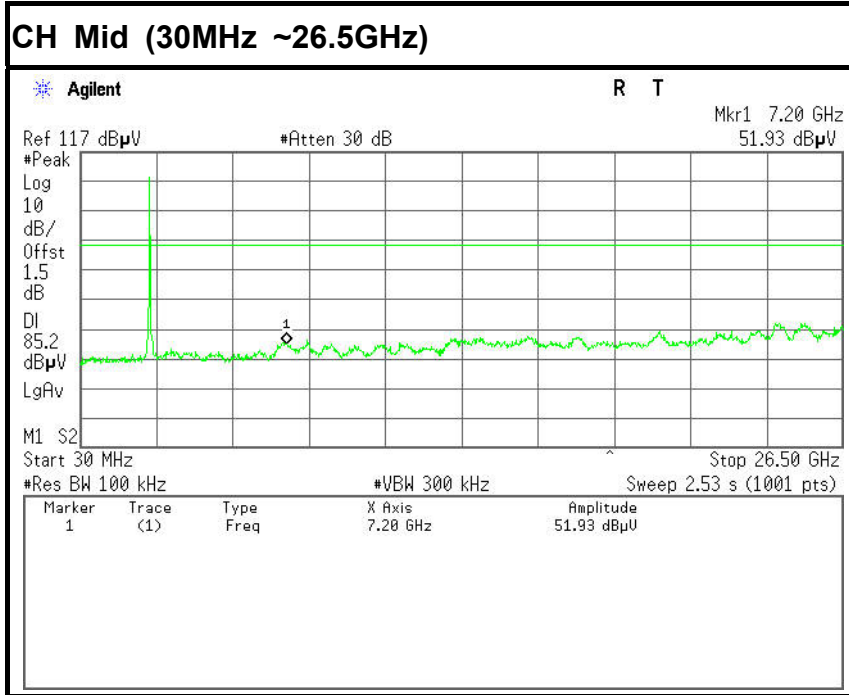




### CH High (30MHz ~26.5GHz)


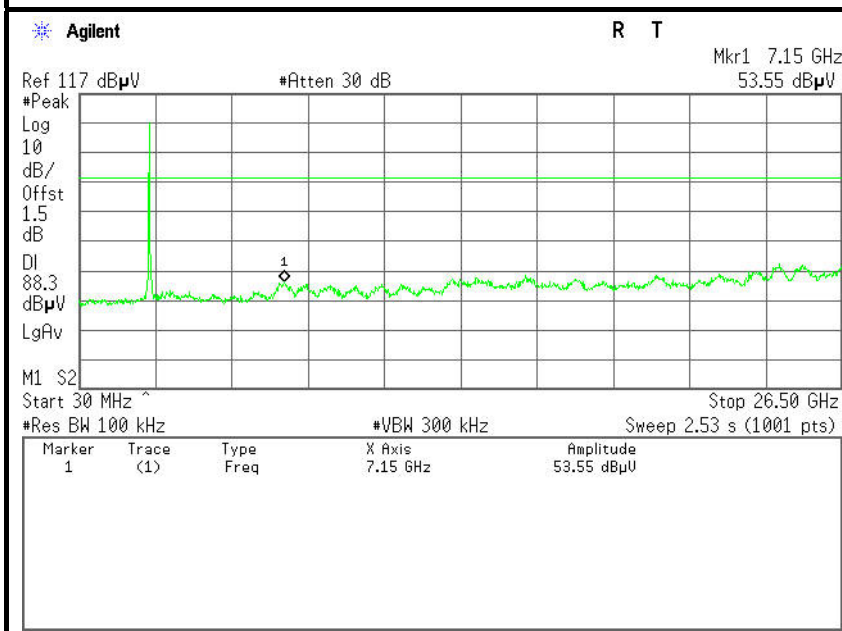



### CH High (2.45GHz ~2.5GHz)

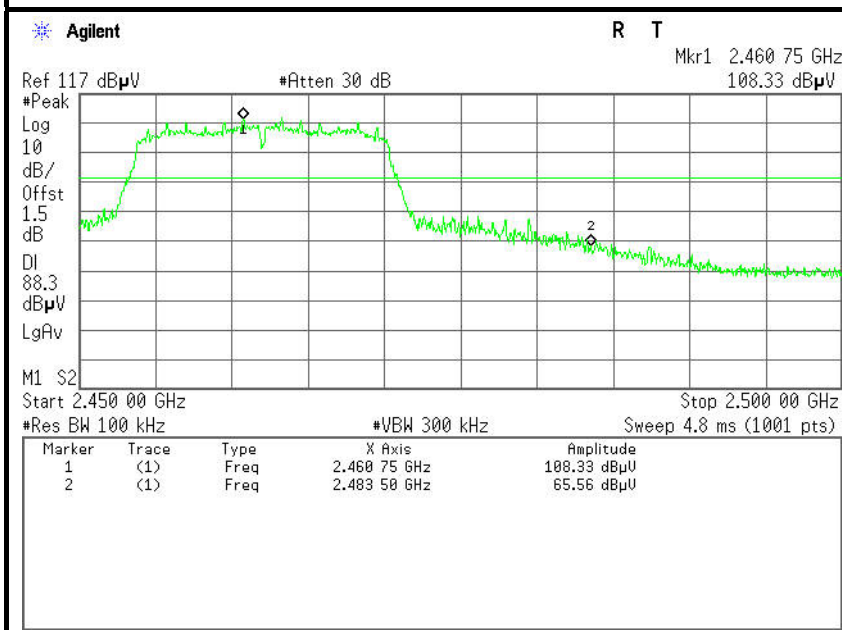




**IEEE 802.11n HT20 MHz mode**

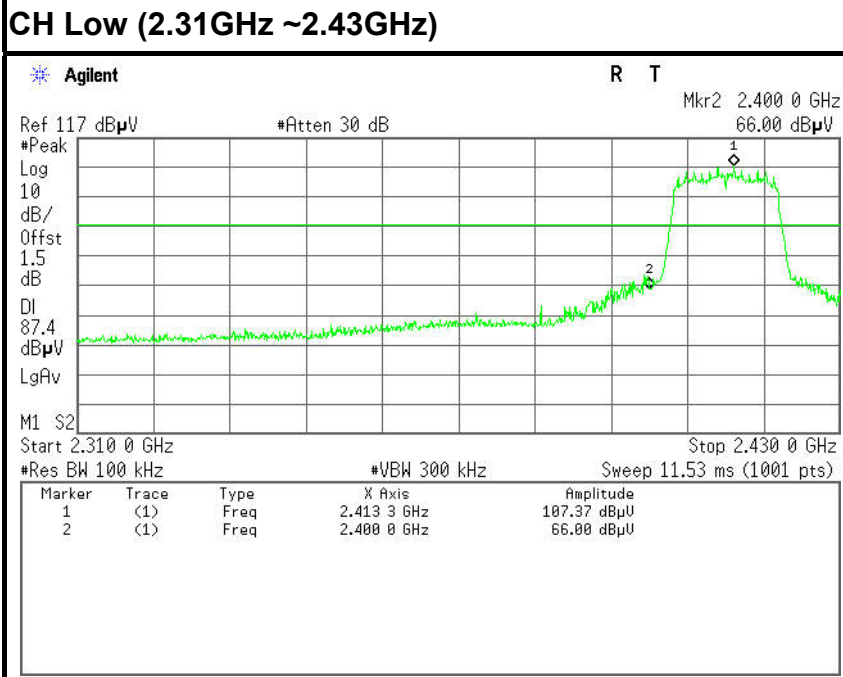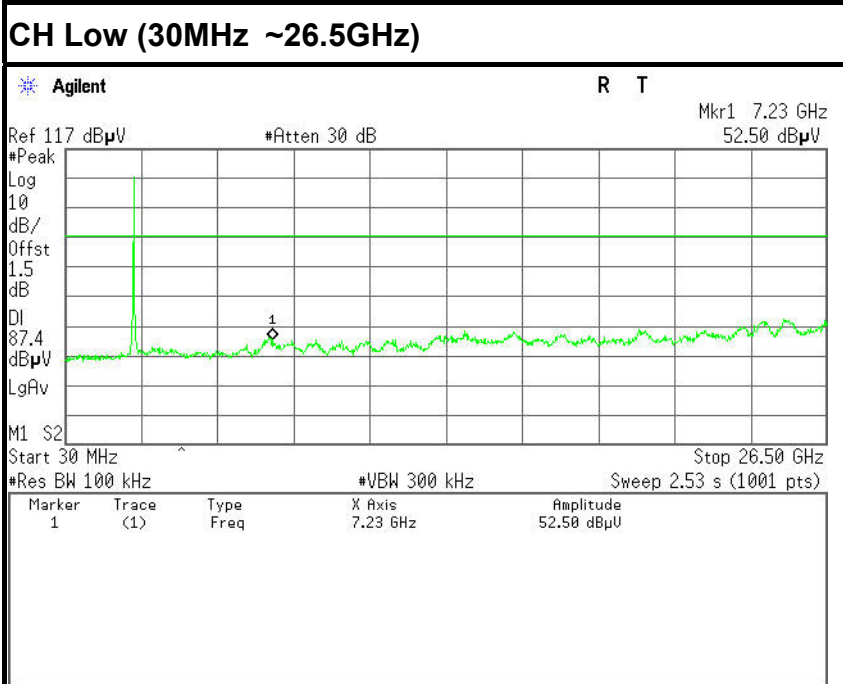

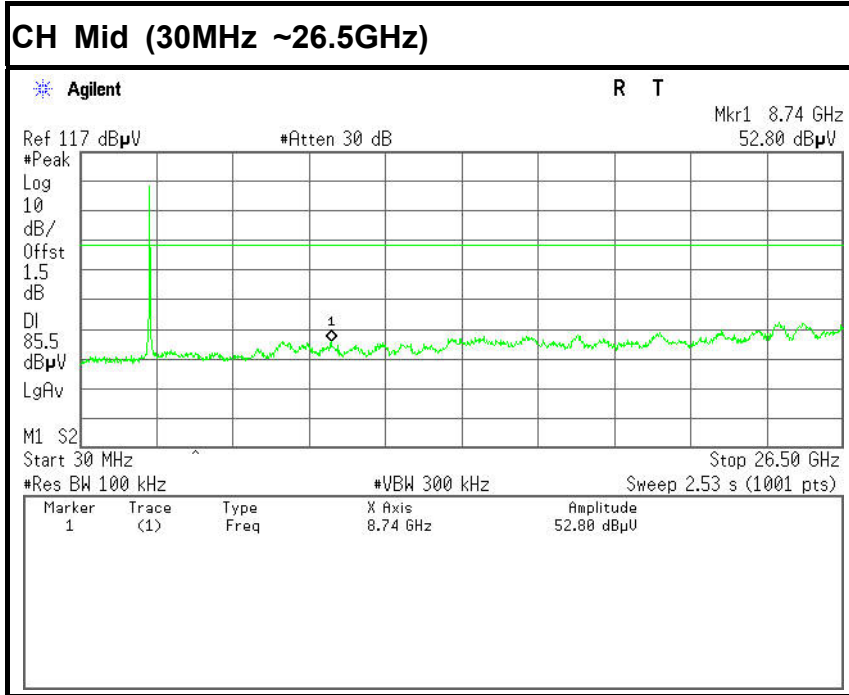




### CH High (30MHz ~26.5GHz)

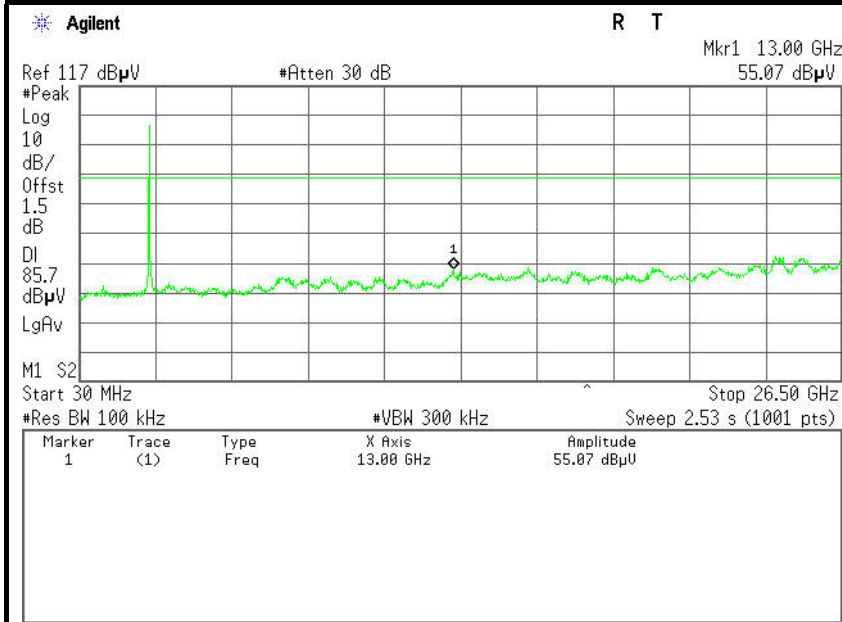

### CH High (2.45GHz ~2.5GHz)

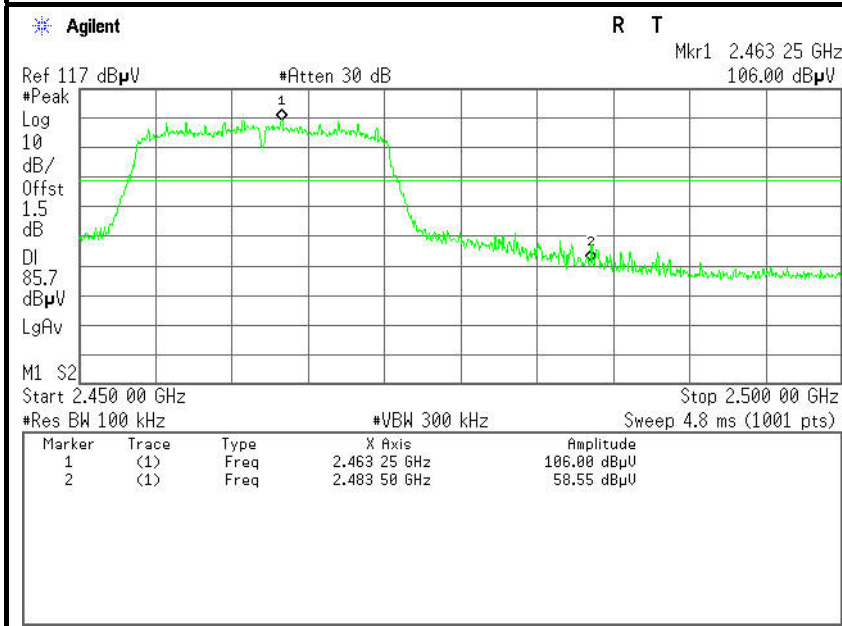





7.2.2. RADIATED EMISSIONS MEASUREMENT

7.2.2.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**NOTE:**(1) The lower limit shall apply at the transition frequencies.  
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).



7.2.2.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2014	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2014	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	COM-POWER	AL-130	121044	09/27/2013	09/26/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The FCC Site Registration number is 101879.  
 3. N.C.R = No Calibration Required.




**7.2.2.3. TEST PROCEDURE** (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
  - Below 1GHz:
    - RBW=100kHz / VBW=300kHz / Sweep=AUTO
  - Above 1GHz:
    - (a) PEAK: RBW=1MHz,VBW=3MHz / Sweep=AUTO
    - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.




7.2.2.4. TEST SETUP

Below 30MHz

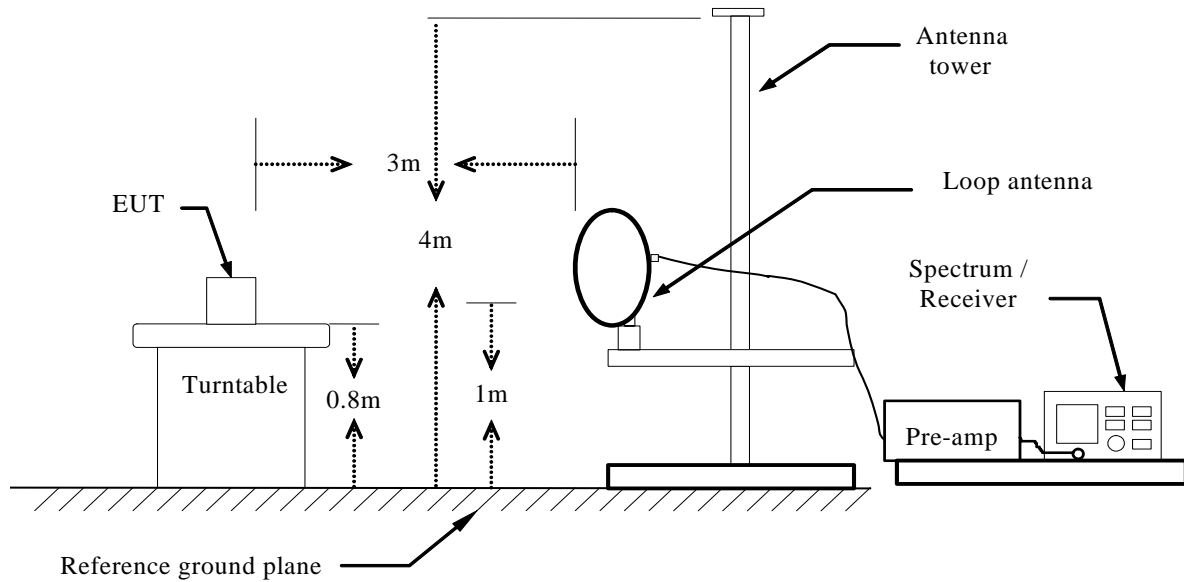


Below 1 GHz

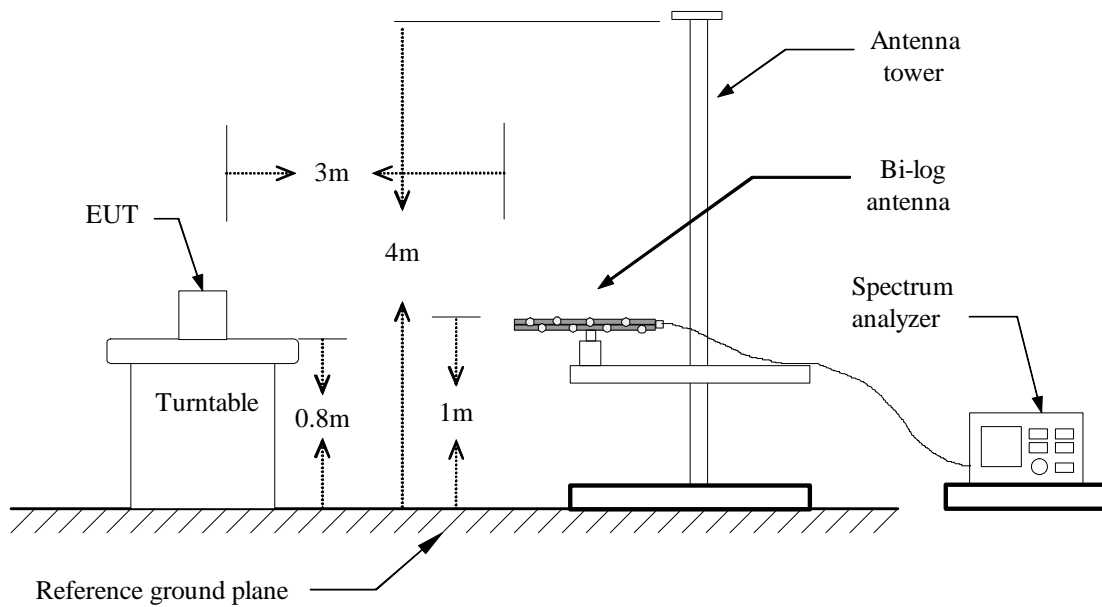



**Above 1 GHz**

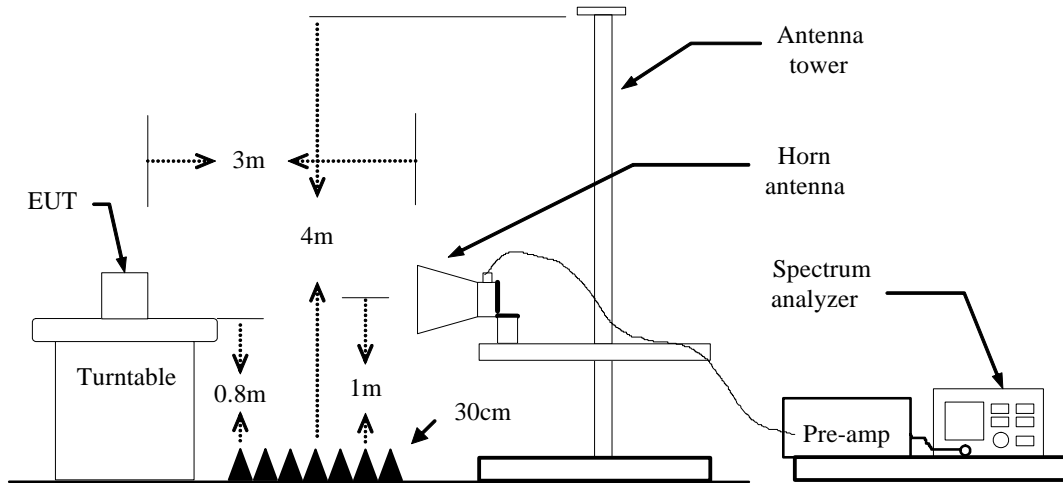

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.2.2.5. DATA SAPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz  
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading  
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain  
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)  
 Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz  
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading  
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain  
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)  
 Peak = Peak Reading  
 AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)  
 Result (dBuV/m) = Reading (dBuV) + Correction Factor



7.2.2.6. TEST RESULTS

**Below 1 GHz**

Test Mode: TX

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 17, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
199.7500	52.37	-22.73	29.64	43.50	-13.86	V	QP
286.0800	49.49	-20.44	29.05	46.00	-16.95	V	QP
329.7300	51.05	-18.41	32.64	46.00	-13.36	V	QP
398.6000	51.62	-16.14	35.48	46.00	-10.52	V	QP
479.1100	45.32	-14.39	30.93	46.00	-15.07	V	QP
666.3200	41.99	-12.22	29.77	46.00	-16.23	V	QP
199.7500	59.44	-22.73	36.71	43.50	-6.79	H	QP
333.6100	52.44	-18.31	34.13	46.00	-11.87	H	QP
399.5700	53.27	-16.10	37.17	46.00	-8.83	H	QP
600.3600	40.75	-12.86	27.89	46.00	-18.11	H	QP
700.2700	44.66	-11.94	32.72	46.00	-13.28	H	QP
771.0800	46.09	-11.14	34.95	46.00	-11.05	H	QP

**\*\*Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

**Notes:**

- Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
- |                        |  |
|------------------------|--|
| Frequency (MHz).       | = Emission frequency in MHz                    |
| Reading (dBuV/m)       | = Receiver reading                             |
| Correction Factor (dB) | = Antenna factor + Cable loss – Amplifier gain |
| Limit (dBuV/m)         | = Limit stated in standard                     |
| Margin (dB)            | = Measured (dBuV/m) – Limits (dBuV/m)          |
| Antenna Pol e(H/V)     | = Current carrying line of reading             |



**Above 1 GHz**

Test Mode: TX / IEEE 802.11b(CH Low)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2818.000	45.11	-4.67	40.44	74.00	-33.56	V	peak
3763.000	44.40	-1.92	42.48	74.00	-31.52	V	peak
4924.000	41.55	2.19	43.74	74.00	-30.26	V	peak
6490.000	40.04	5.50	45.54	74.00	-28.46	V	peak
6949.000	41.79	7.48	49.27	74.00	-24.73	V	peak
8002.000	40.94	9.65	50.59	74.00	-23.41	V	peak
3151.000	43.52	-3.53	39.99	74.00	-34.01	H	Peak
3898.000	43.33	-1.42	41.91	74.00	-32.09	H	Peak
5005.000	41.29	2.51	43.80	74.00	-30.20	H	Peak
6310.000	40.10	4.73	44.83	74.00	-29.17	H	peak
6625.000	40.42	6.08	46.50	74.00	-27.50	H	peak
7543.000	40.59	8.76	49.35	74.00	-24.65	H	peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Test Mode: TX / IEEE 802.11b (CH Mid)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2818.000	44.98	-4.67	40.31	74.00	-33.69	V	Peak
3835.000	44.39	-1.65	42.74	74.00	-31.26	V	Peak
4807.000	41.72	1.71	43.43	74.00	-30.57	V	Peak
6454.000	40.42	5.35	45.77	74.00	-28.23	V	Peak
7588.000	39.53	8.85	48.38	74.00	-25.62	V	Peak
8164.000	41.10	9.56	50.66	74.00	-23.34	V	Peak
3133.000	43.68	-3.56	40.12	74.00	-33.88	H	Peak
3952.000	43.06	-1.22	41.84	74.00	-32.16	H	Peak
5014.000	40.56	2.51	43.07	74.00	-30.93	H	Peak
5473.000	40.65	2.55	43.20	74.00	-30.80	H	Peak
6634.000	40.16	6.12	46.28	74.00	-27.72	H	Peak
7759.000	39.88	9.18	49.06	74.00	-24.94	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11b (CH High)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2791.000	44.47	-4.80	39.67	74.00	-34.33	V	Peak
3997.000	44.77	-1.05	43.72	74.00	-30.28	V	Peak
5113.000	41.23	2.52	43.75	74.00	-30.25	V	Peak
6085.000	40.11	3.76	43.87	74.00	-30.13	V	Peak
6751.000	40.63	6.63	47.26	74.00	-26.74	V	Peak
7885.000	40.57	9.43	50.00	74.00	-24.00	V	Peak
3142.000	43.98	-3.54	40.44	74.00	-33.56	H	Peak
3844.000	43.51	-1.62	41.89	74.00	-32.11	H	Peak
4861.000	41.01	1.93	42.94	74.00	-31.06	H	Peak
5437.000	41.18	2.54	43.72	74.00	-30.28	H	Peak
6877.000	39.60	7.17	46.77	74.00	-27.23	H	Peak
7921.000	39.30	9.50	48.80	74.00	-25.20	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g(CH Low)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3259.000	43.79	-3.33	40.46	74.00	-33.54	V	Peak
3907.000	44.37	-1.38	42.99	74.00	-31.01	V	Peak
4834.000	41.09	1.82	42.91	74.00	-31.09	V	Peak
5284.000	41.93	2.53	44.46	74.00	-29.54	V	Peak
6301.000	40.58	4.69	45.27	74.00	-28.73	V	Peak
7219.000	40.49	8.13	48.62	74.00	-25.38	V	Peak
3214.000	43.14	-3.41	39.73	74.00	-34.27	H	Peak
3934.000	42.48	-1.28	41.20	74.00	-32.80	H	Peak
4798.000	41.55	1.67	43.22	74.00	-30.78	H	Peak
5275.000	41.71	2.53	44.24	74.00	-29.76	H	Peak
6454.000	41.27	5.35	46.62	74.00	-27.38	H	Peak
7669.000	40.33	9.00	49.33	74.00	-24.67	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g (CH Mid)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3169.000	43.77	-3.49	40.28	74.00	-33.72	V	Peak
3772.000	43.59	-1.88	41.71	74.00	-32.29	V	Peak
4420.000	42.57	0.19	42.76	74.00	-31.24	V	Peak
4942.000	41.45	2.27	43.72	74.00	-30.28	V	Peak
6733.000	40.27	6.55	46.82	74.00	-27.18	V	Peak
7885.000	40.64	9.43	50.07	74.00	-23.93	V	Peak
3043.000	44.27	-3.72	40.55	74.00	-33.45	H	Peak
3934.000	43.42	-1.28	42.14	74.00	-31.86	H	Peak
4906.000	41.21	2.12	43.33	74.00	-30.67	H	Peak
5869.000	40.95	3.17	44.12	74.00	-29.88	H	Peak
7120.000	40.74	7.93	48.67	74.00	-25.33	H	Peak
7417.000	40.30	8.51	48.81	74.00	-25.19	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g (CH High)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3160.000	44.13	-3.51	40.62	74.00	-33.38	V	Peak
3997.000	43.11	-1.05	42.06	74.00	-31.94	V	Peak
4573.000	41.93	0.73	42.66	74.00	-31.34	V	Peak
6067.000	40.35	3.68	44.03	74.00	-29.97	V	Peak
7120.000	40.06	7.93	47.99	74.00	-26.01	V	Peak
7786.000	41.86	9.23	51.09	74.00	-22.91	V	Peak
2809.000	44.65	-4.72	39.93	74.00	-34.07	H	Peak
3583.000	43.96	-2.58	41.38	74.00	-32.62	H	Peak
4528.000	43.04	0.55	43.59	74.00	-30.41	H	Peak
5104.000	41.23	2.52	43.75	74.00	-30.25	H	Peak
6778.000	41.03	6.74	47.77	74.00	-26.23	H	Peak
7174.000	41.08	8.04	49.12	74.00	-24.88	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT20 MHz (CH Low)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3331.000	43.39	-3.20	40.19	74.00	-33.81	V	Peak
3871.000	42.91	-1.52	41.39	74.00	-32.61	V	Peak
4960.000	42.00	2.34	44.34	74.00	-29.66	V	Peak
5806.000	41.28	3.06	44.34	74.00	-29.66	V	Peak
7093.000	41.54	7.88	49.42	74.00	-24.58	V	Peak
7696.000	41.09	9.06	50.15	74.00	-23.85	V	Peak
3106.000	44.41	-3.61	40.80	74.00	-33.20	H	Peak
4069.000	43.03	-0.84	42.19	74.00	-31.81	H	Peak
4780.000	41.80	1.59	43.39	74.00	-30.61	H	Peak
5275.000	41.59	2.53	44.12	74.00	-29.88	H	Peak
6391.000	40.49	5.08	45.57	74.00	-28.43	H	Peak
7327.000	41.00	8.34	49.34	74.00	-24.66	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT20 MHz (CH Mid)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3331.000	44.28	-3.20	41.08	74.00	-32.92	V	Peak
4006.000	43.30	-1.02	42.28	74.00	-31.72	V	Peak
4807.000	41.45	1.71	43.16	74.00	-30.84	V	Peak
5248.000	40.93	2.53	43.46	74.00	-30.54	V	Peak
6499.000	40.55	5.54	46.09	74.00	-27.91	V	Peak
7543.000	40.50	8.76	49.26	74.00	-24.74	V	Peak
2809.000	44.33	-4.72	39.61	74.00	-34.39	H	Peak
3727.000	44.35	-2.05	42.30	74.00	-31.70	H	Peak
4807.000	42.31	1.71	44.02	74.00	-29.98	H	Peak
5563.000	40.96	2.66	43.62	74.00	-30.38	H	Peak
6958.000	41.01	7.52	48.53	74.00	-25.47	H	Peak
7372.000	40.45	8.43	48.88	74.00	-25.12	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Test Mode: TX / EEE 802.11n HT20 MHz (CH High)

Tested by: Sun Guo

Ambient temperature: 24°C Relative humidity: 52% RH

Date: July 10, 2014

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3097.000	43.31	-3.62	39.69	74.00	-34.31	V	Peak
3862.000	42.97	-1.55	41.42	74.00	-32.58	V	Peak
4438.000	42.79	0.25	43.04	74.00	-30.96	V	Peak
5617.000	40.39	2.75	43.14	74.00	-30.86	V	Peak
6958.000	40.64	7.52	48.16	74.00	-25.84	V	Peak
7831.000	40.95	9.32	50.27	74.00	-23.73	V	Peak
2809.000	44.67	-4.72	39.95	74.00	-34.05	H	Peak
3736.000	43.75	-2.02	41.73	74.00	-32.27	H	Peak
4393.000	42.64	0.12	42.76	74.00	-31.24	H	Peak
5167.000	41.56	2.52	44.08	74.00	-29.92	H	Peak
6814.000	39.95	6.90	46.85	74.00	-27.15	H	Peak
7723.000	40.48	9.11	49.59	74.00	-24.41	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





### 7.3. 6dB BANDWIDTH MEASUREMENT

#### 7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015

#### 7.3.3. TEST PROCEDURES (please refer to measurement standard)

##### 8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 7.3.4. TEST SETUP





7.3.5. TEST RESULTS

No non-compliance noted

**Test Data**

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	8086	>500	PASS
Mid	2437	7568		PASS
High	2462	8080		PASS

**Test mode: IEEE 802.11g**


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	15132	>500	PASS
Mid	2437	15129		PASS
High	2462	15126		PASS

**Test mode: IEEE 802.11n HT20 MHz**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	17032	>500	PASS
Mid	2437	15114		PASS
High	2462	15133		PASS





Test Plot

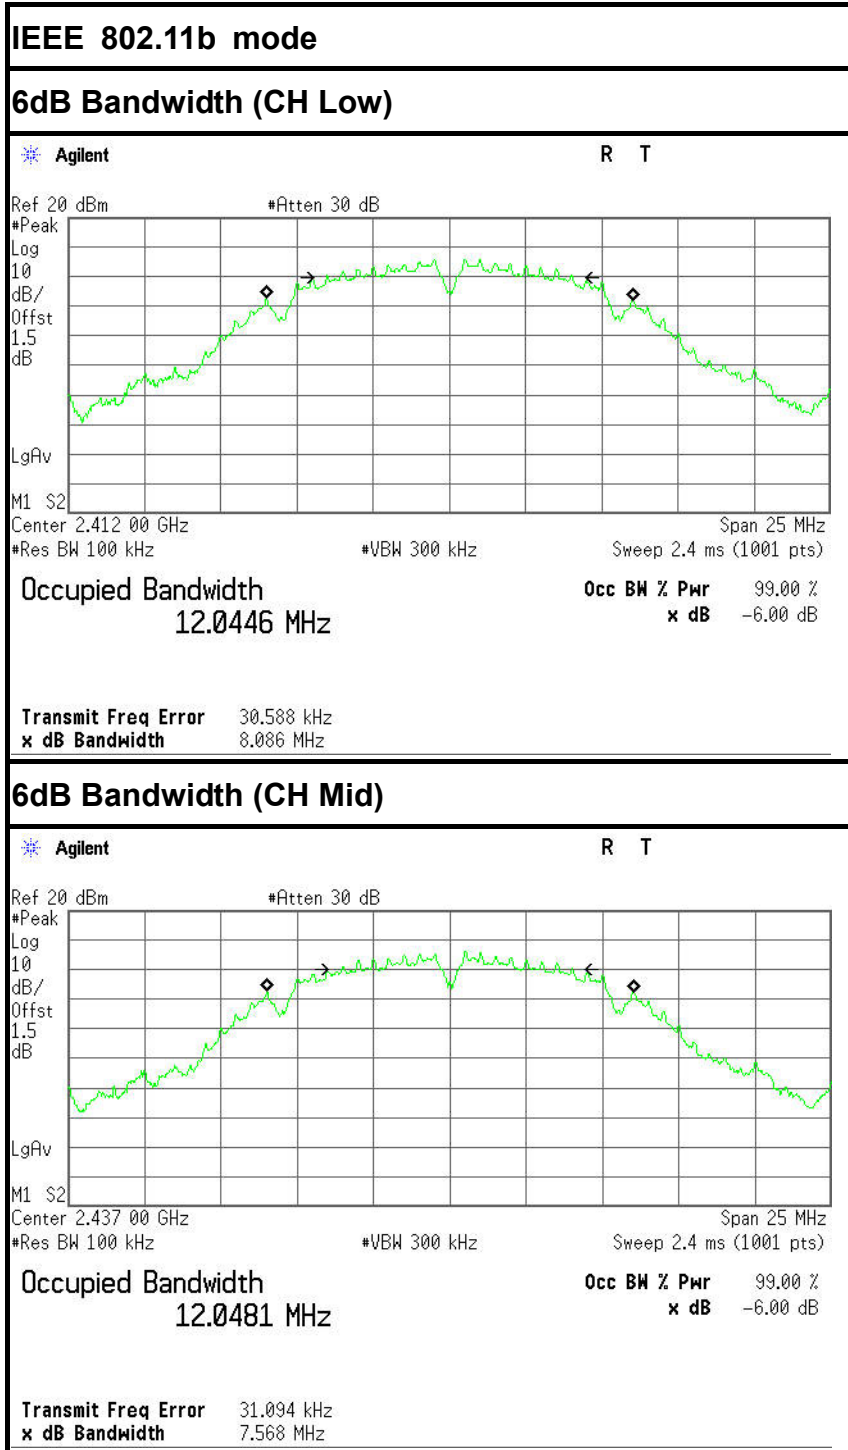




### 6dB Bandwidth (CH High)

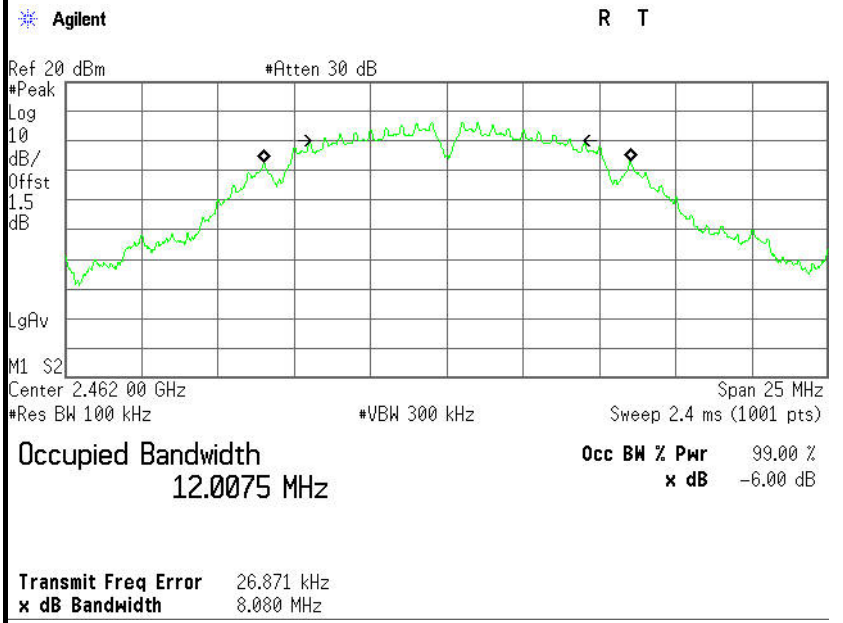

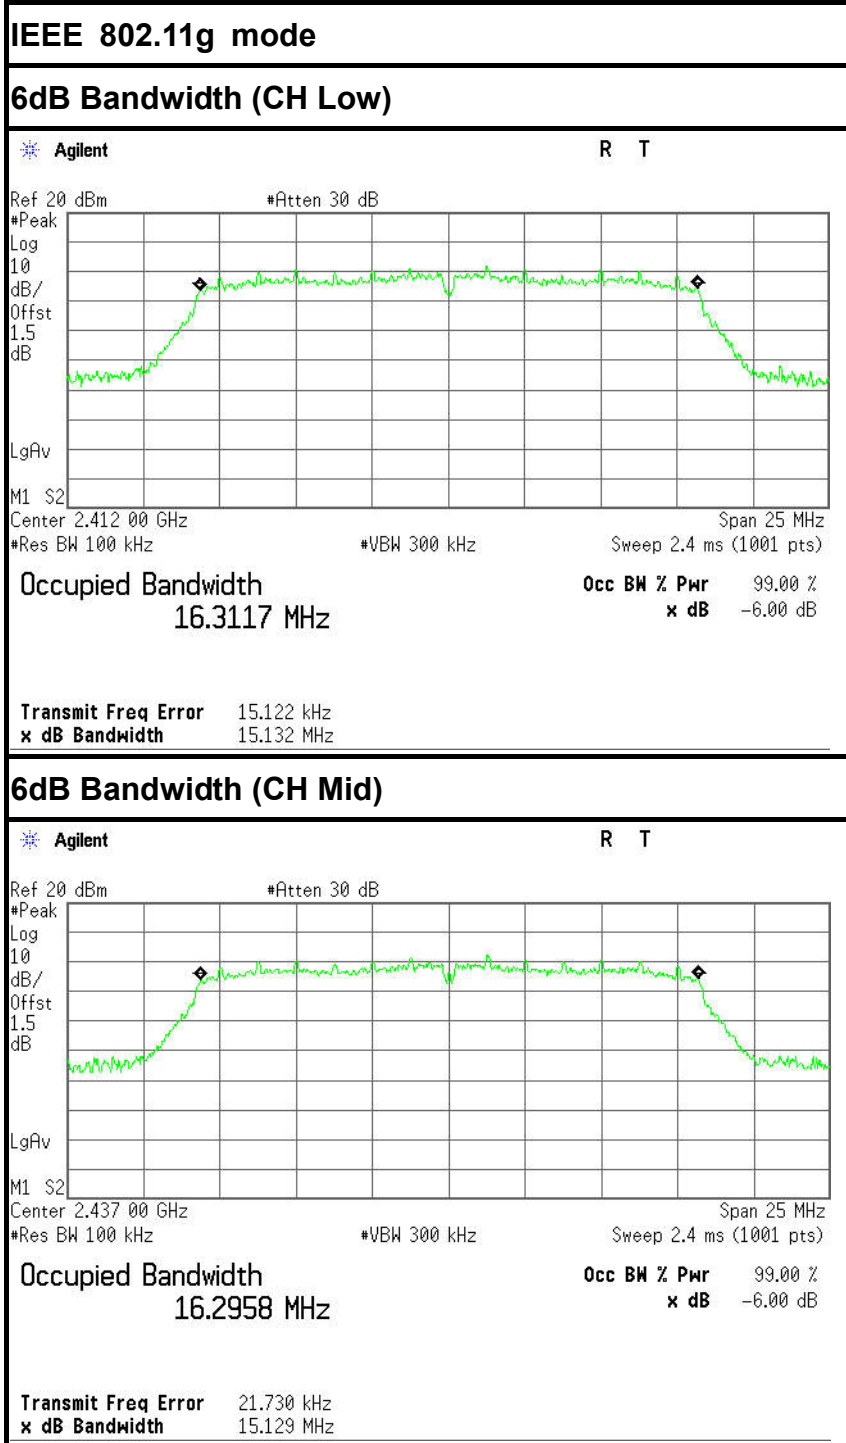


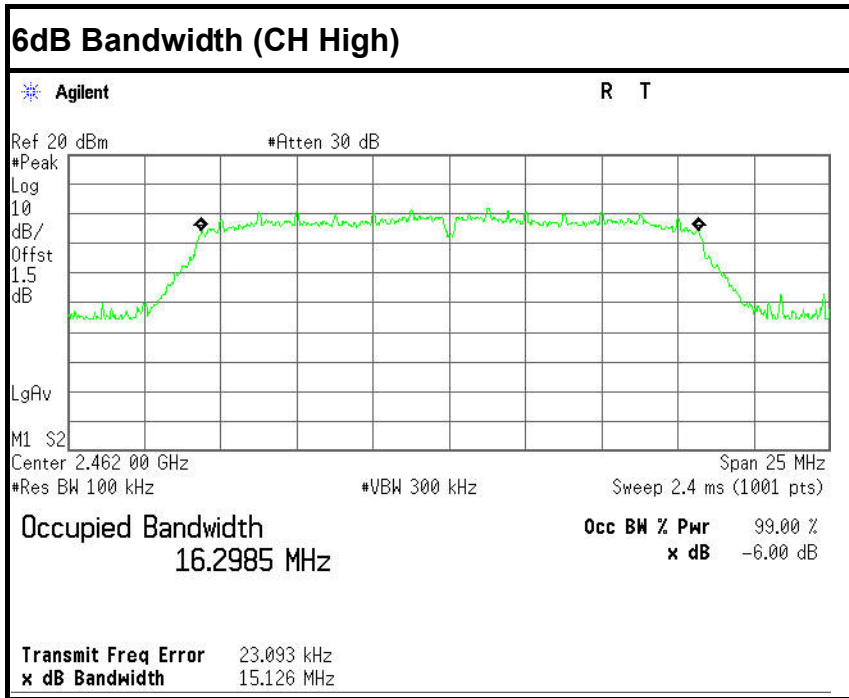




IEEE 802.11n HT20 MHz mode

6dB Bandwidth (CH Low)

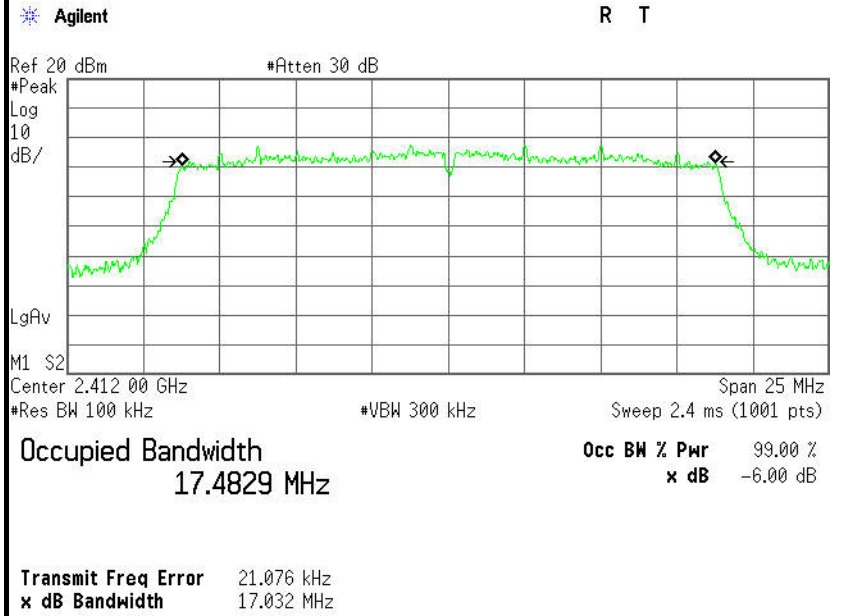


6dB Bandwidth (CH Mid)

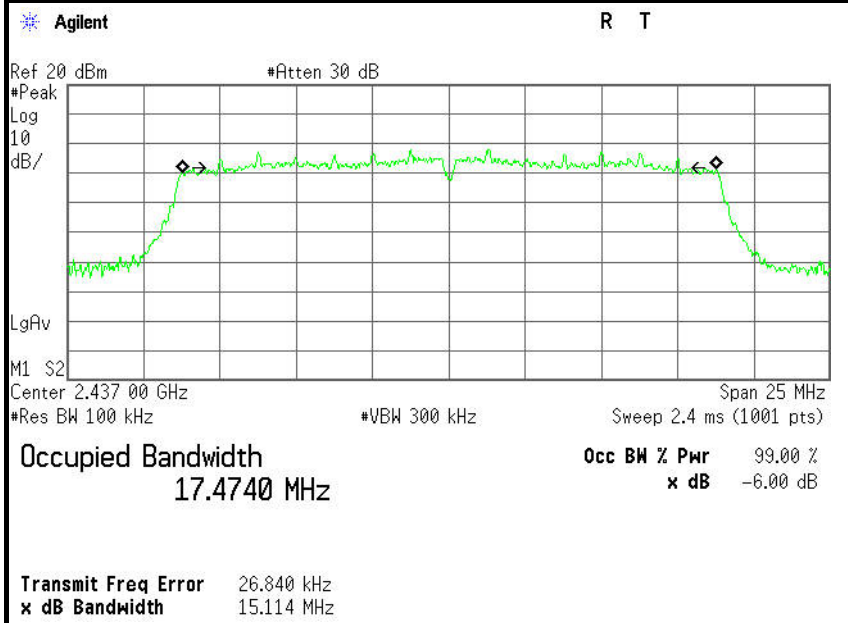



### 6dB Bandwidth (CH High)

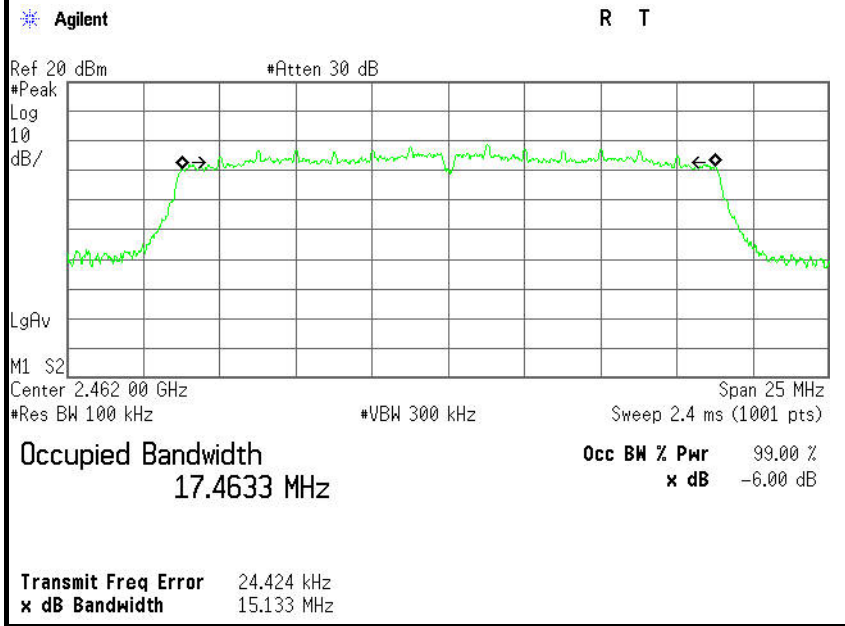





## 7.4. PEAK OUTPUT POWER

### 7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 7.4.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
Power Meter	Anritsu	ML2495A	1204003	03/01/2014	03/01/2015
Power Sensor	Anritsu	MA2411B	1126150	03/01/2014	03/01/2015

### 7.4.3. TEST PROCEDURES (please refer to measurement standard)

#### 9.1.1 RBW $\geq$ DTS bandwidth

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW  $\geq$  *DTS bandwidth*.
- b) Set VBW  $\geq$  3 RBW.
- c) Set span  $\geq$  3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



### 9.1.2 Integrated band power method

This procedure may be used when the maximum available RBW of the measurement instrument is less than the *DTS bandwidth*.


- a) Set the RBW = 1 MHz.
- b) Set the VBW  $\geq 3$  RBW
- c) Set the span  $\geq 1.5 \times$  DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

### 9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.



7.4.4. TEST SETUP

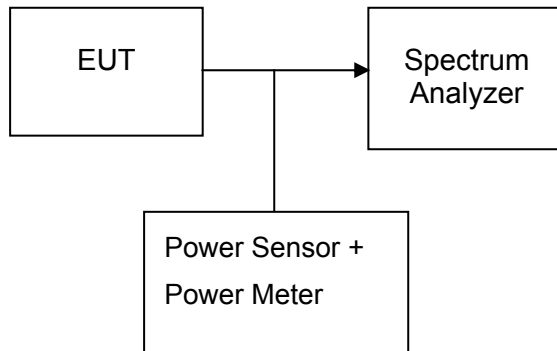



7.4.5. TEST RESULTS

No non-compliance noted

**Test Data**

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	15.33	0.03412	1	PASS
Mid	2437	15.22	0.03327		PASS
High	2462	15.60	0.03631		PASS

**Test mode: IEEE 802.11g**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	21.91	0.15524	1	PASS
Mid	2437	21.73	0.14894		PASS
High	2462	21.82	0.15205		PASS

**Test mode: IEEE 802.11n HT20 MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	21.17	0.13092	1	PASS
Mid	2437	21.18	0.13122		PASS
High	2462	21.14	0.13002		PASS



7.5. BAND EDGES MEASUREMENT

7.5.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.5.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2013	10/24/2014
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2014	03/08/2015
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2014	03/18/2015
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2014	03/18/2015
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2014	03/01/2015
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2014	03/01/2015
Loop Antenna	COM-POWER	AL-130	121044	09/27/2013	09/26/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2014	02/28/2015
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.


3. N.C.R = No Calibration Required.



**7.5.3. TEST PROCEDURES** (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are



**7.5.4. TEST SETUP**

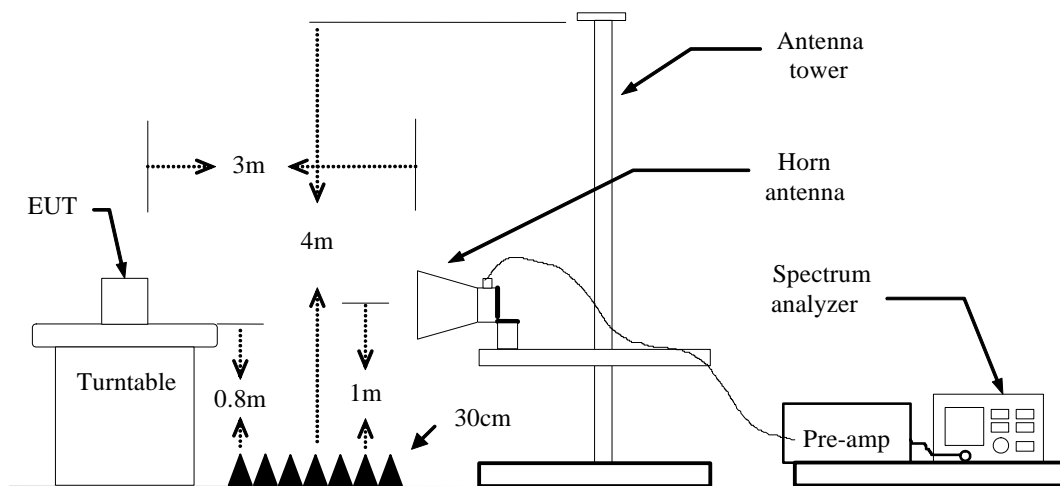





7.5.5. TEST RESULTS

**Test Plot**  
**IEEE 802.11b mode**  
**Band Edges (CH Low)**

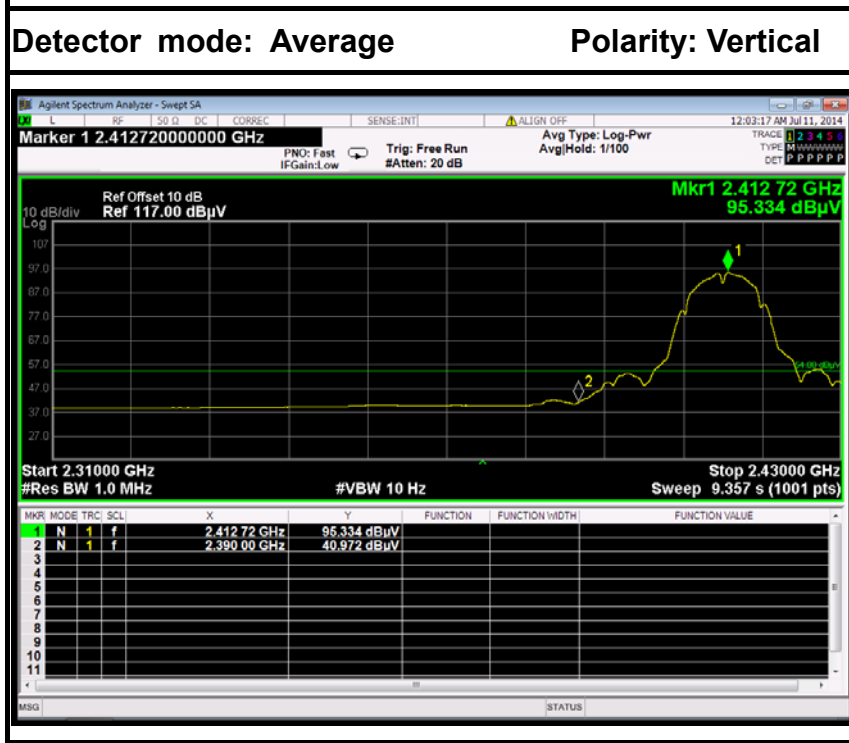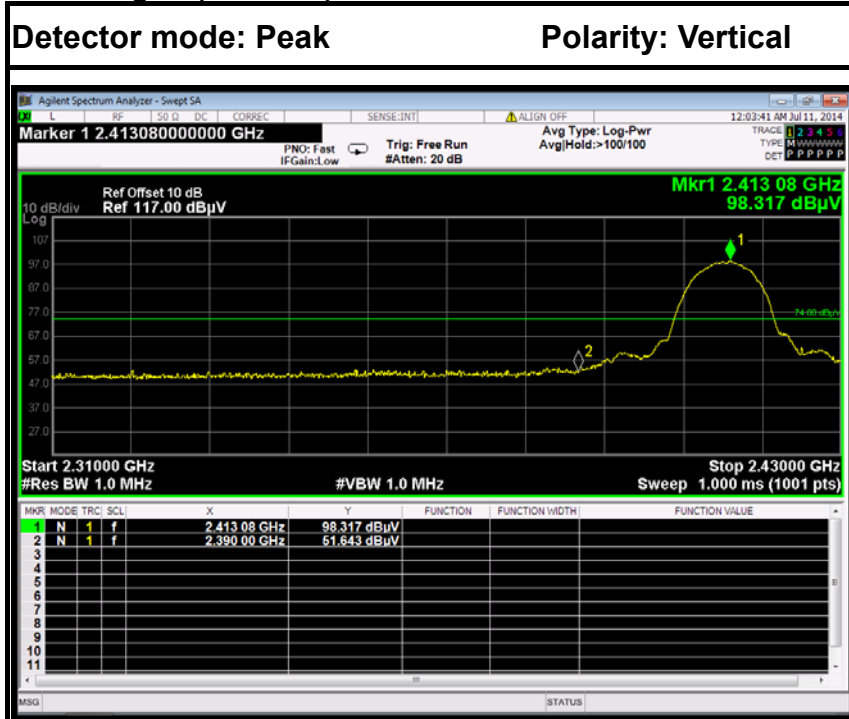

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	45.04	-6.60	51.64	74.00	-22.36	Peak	Vertical
2	2390.0000	34.37	-6.60	40.97	54.00	-13.03	Average	Vertical

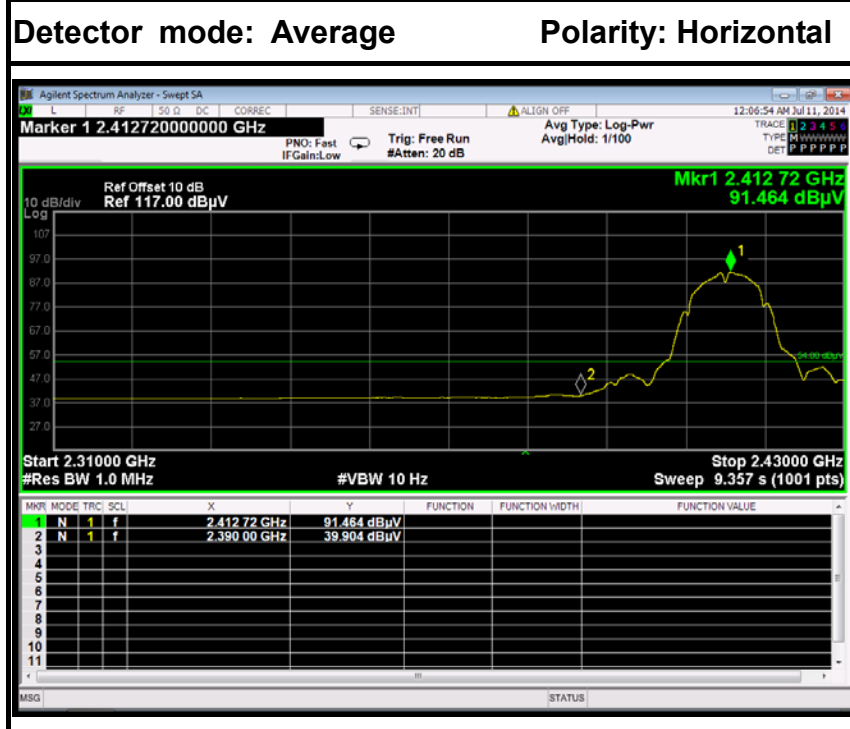
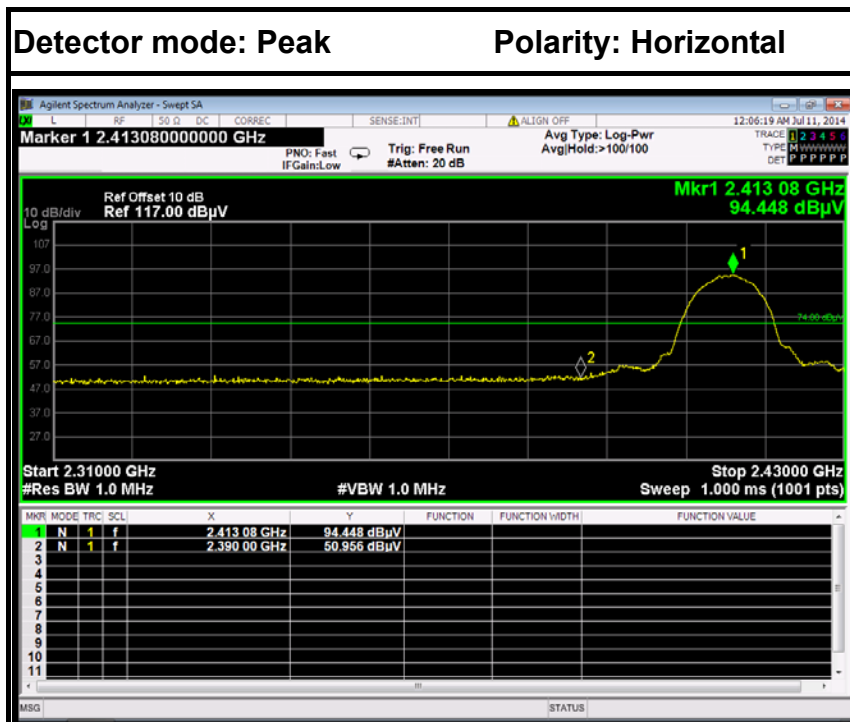


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	44.36	-6.60	50.96	74.00	-23.04	Peak	Horizontal
2	2390.0000	33.30	-6.60	39.90	54.00	-14.10	Average	Horizontal







**Band Edges (CH High)**

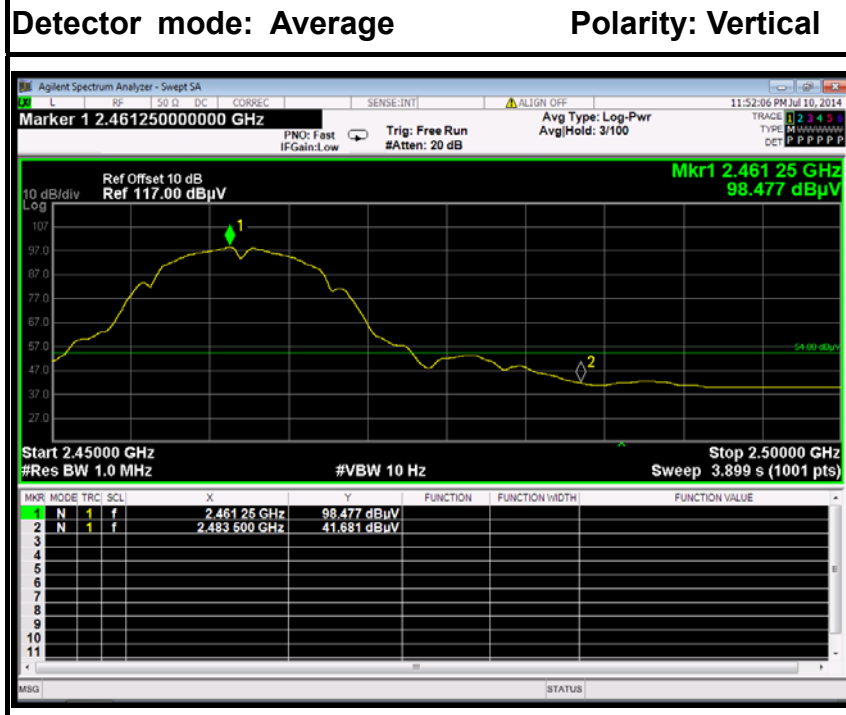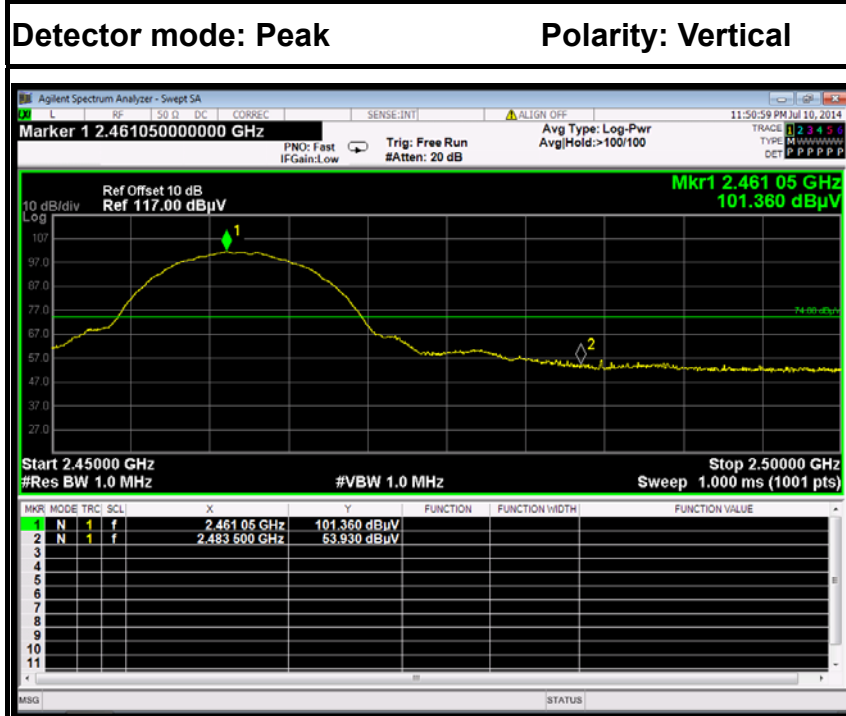



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	47.69	-6.24	53.93	74.00	-20.07	Peak	Vertical
2	2483.5000	35.44	-6.24	41.68	54.00	-12.32	Average	Vertical

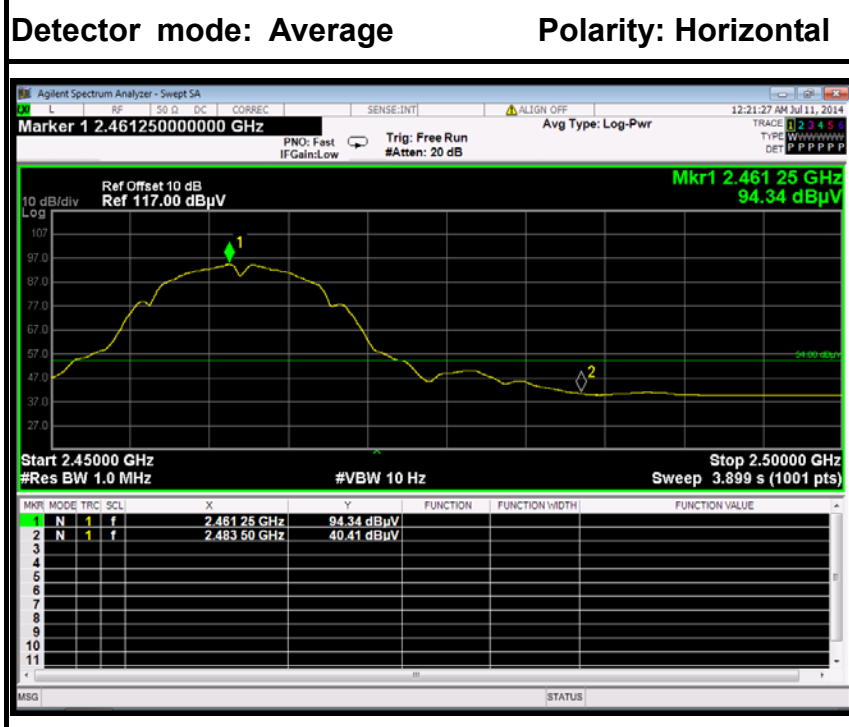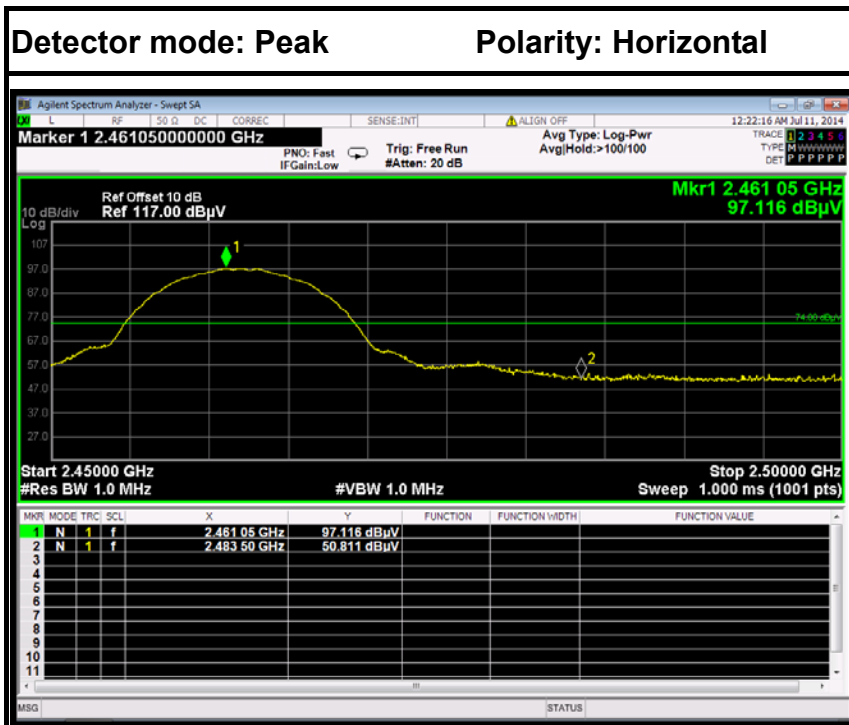

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	44.57	-6.24	50.81	74.00	-23.19	Peak	Horizontal
2	2483.5000	34.17	-6.24	40.41	54.00	-13.59	Average	Horizontal




IEEE 802.11g mode  
Band Edges (CH Low)

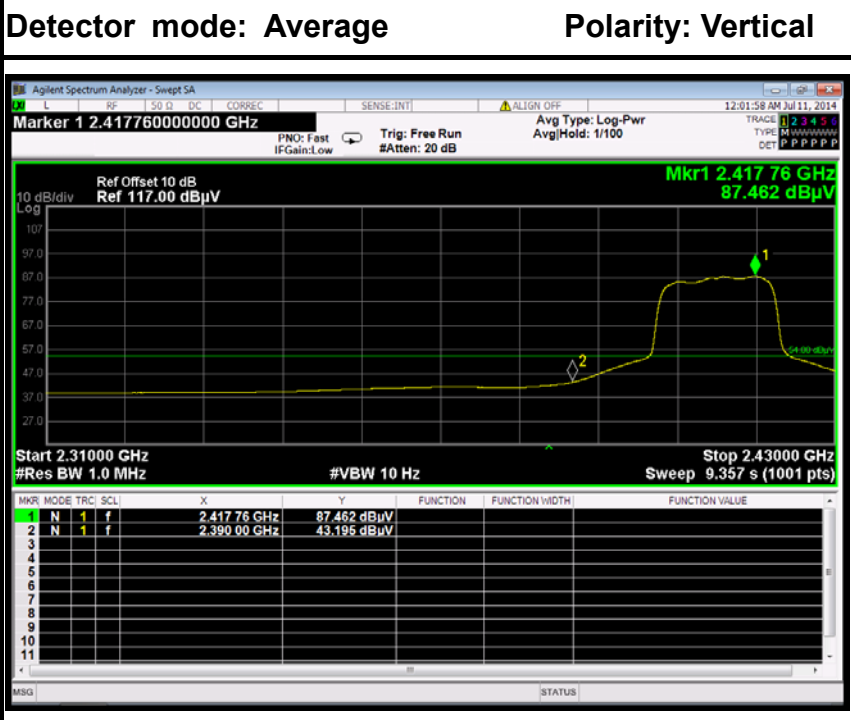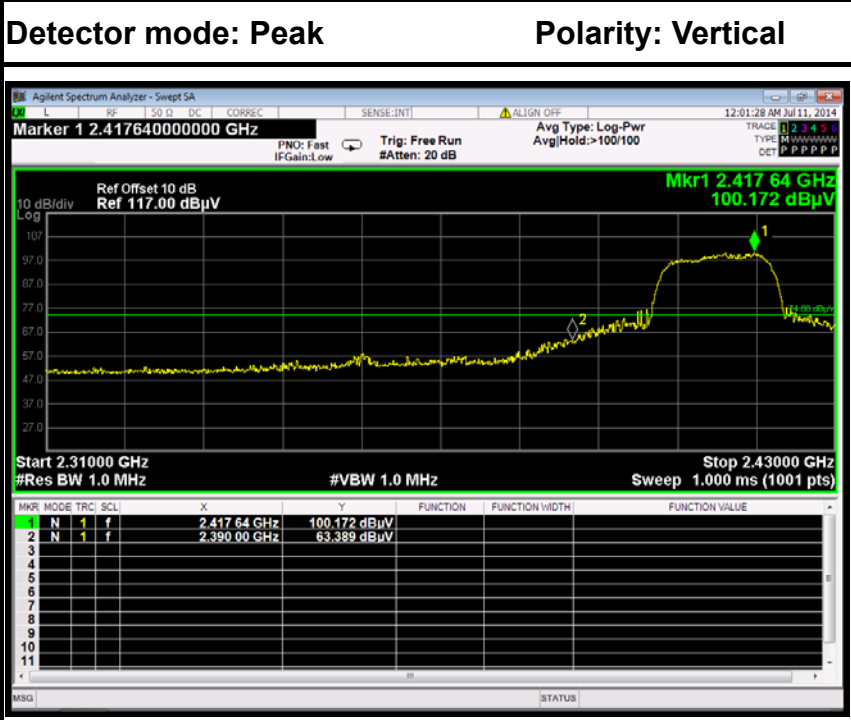


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	56.79	-6.60	63.39	74.00	-10.61	Peak	Vertical
2	2390.0000	36.60	-6.60	43.20	54.00	-10.81	Average	Vertical



**Detector mode: Peak      Polarity: Horizontal**

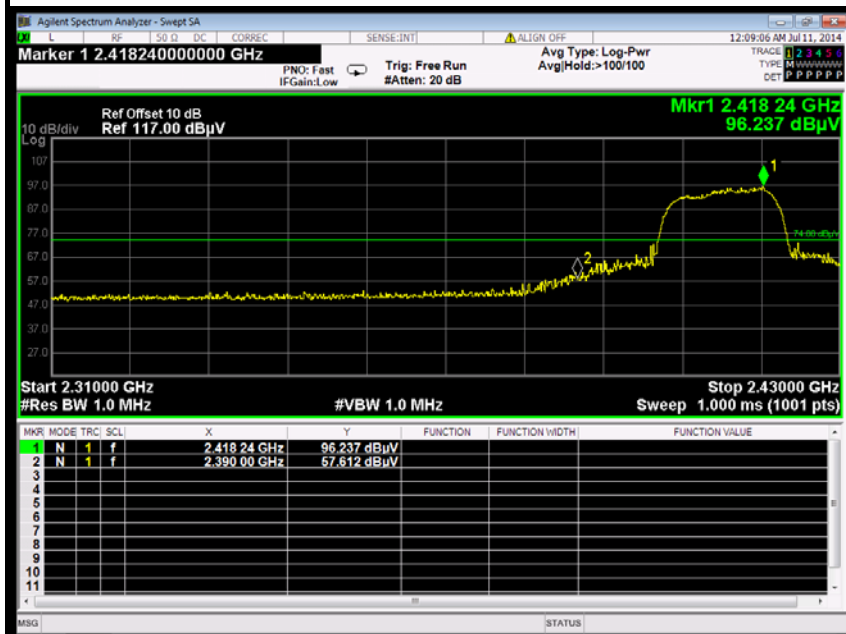

**Detector mode: Average      Polarity: Horizontal**

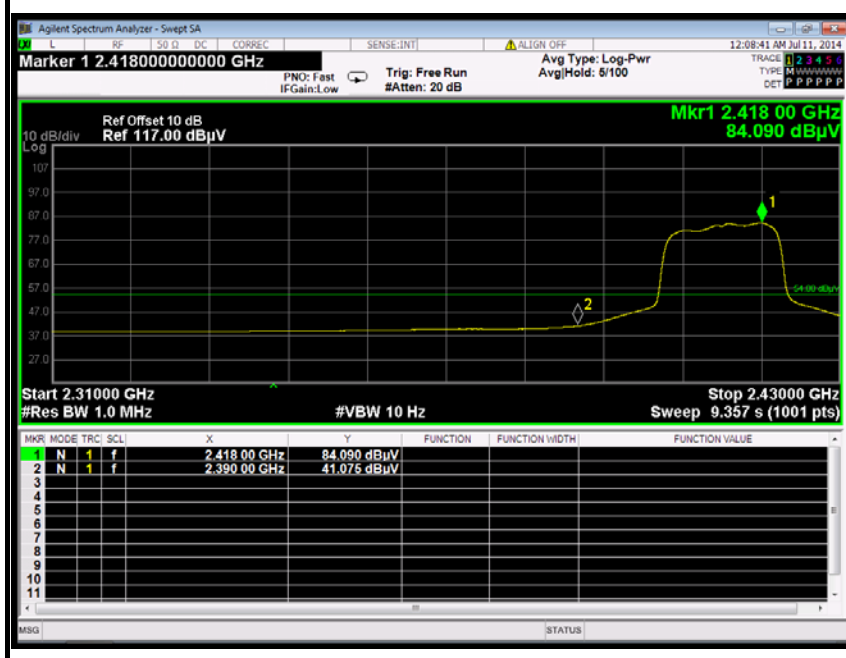


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	51.01	-6.60	57.61	74.00	-16.39	Peak	Horizontal
2	2390.0000	34.48	-6.60	41.08	54.00	-12.93	Average	Horizontal






**Detector mode: Peak** **Polarity: Horizontal**

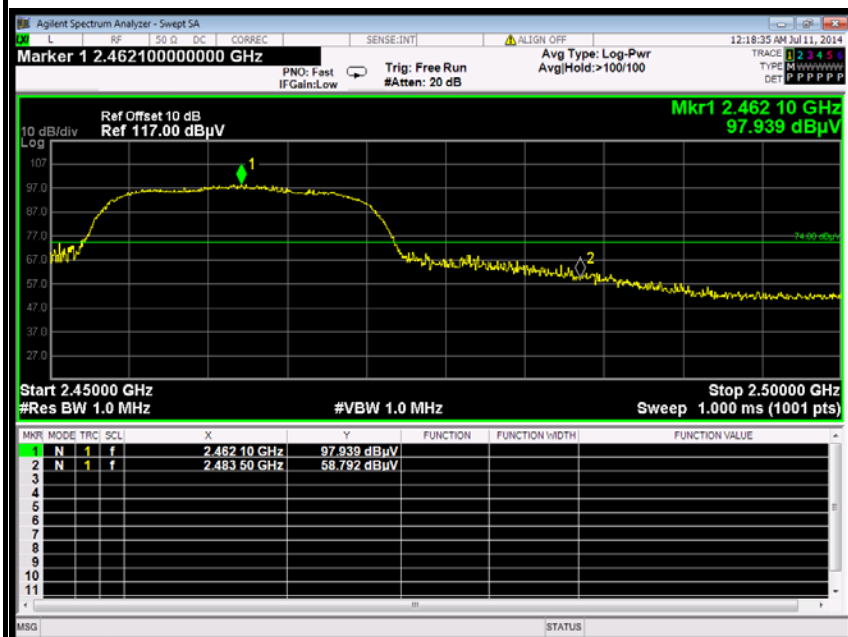

**Detector mode: Average** **Polarity: Horizontal**


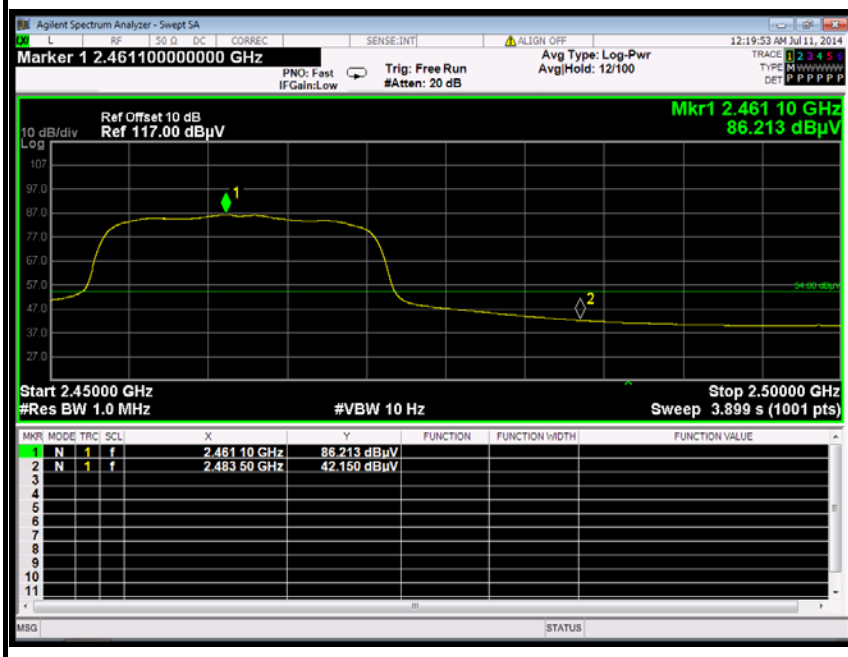


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	52.55	-6.24	58.79	74.00	-15.21	Peak	Horizontal
2	2483.5000	35.91	-6.24	42.15	54.00	-11.85	Average	Horizontal



IEEE 802.11n HT20 MHz mode


Band Edges (CH Low)

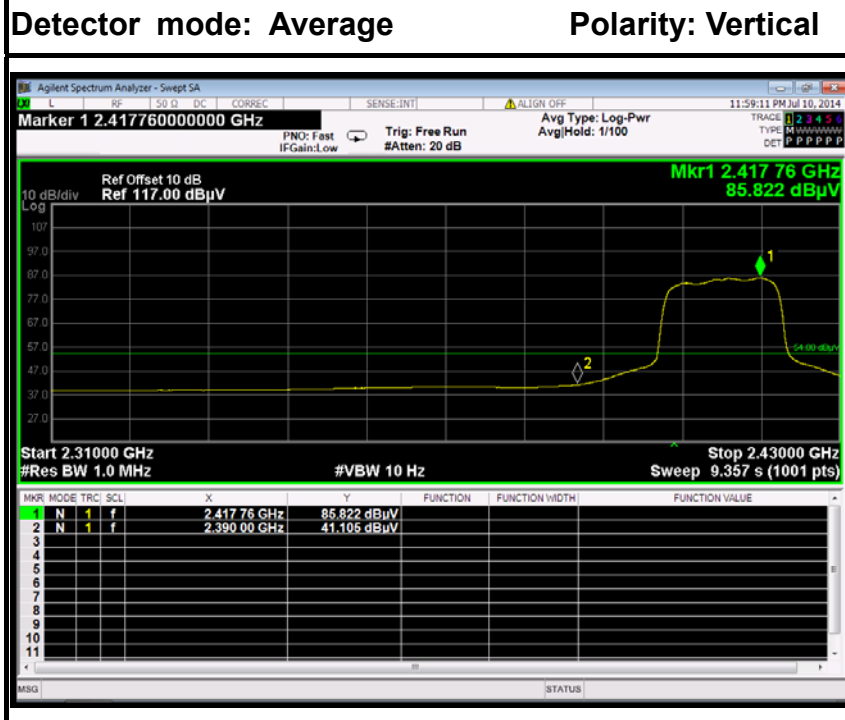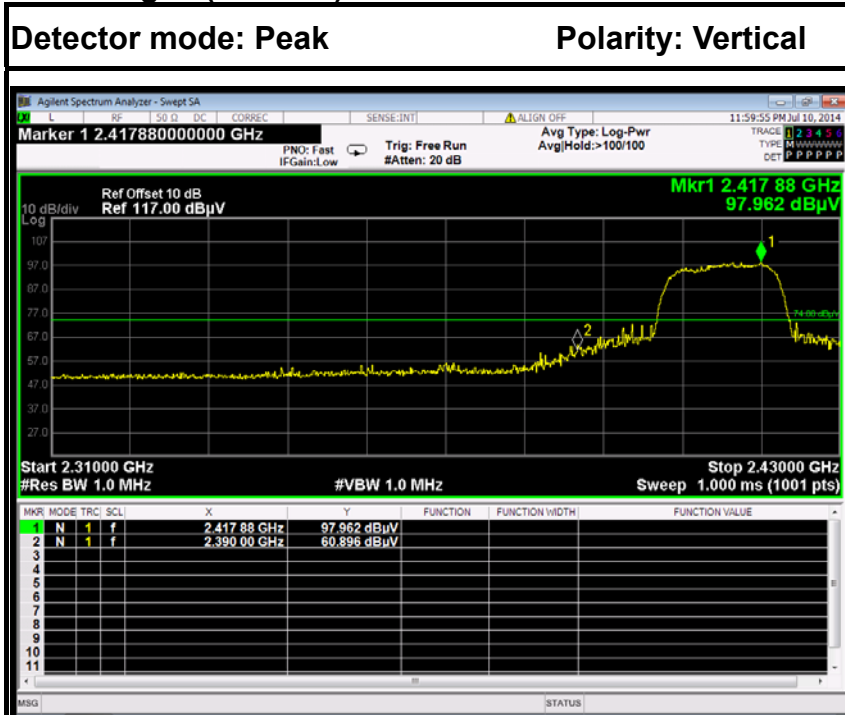


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	54.30	-6.60	60.90	74.00	-13.10	Peak	Vertical
2	2390.0000	34.51	-6.60	41.11	54.00	-12.90	Average	Vertical



**Detector mode: Peak      Polarity: Horizontal**

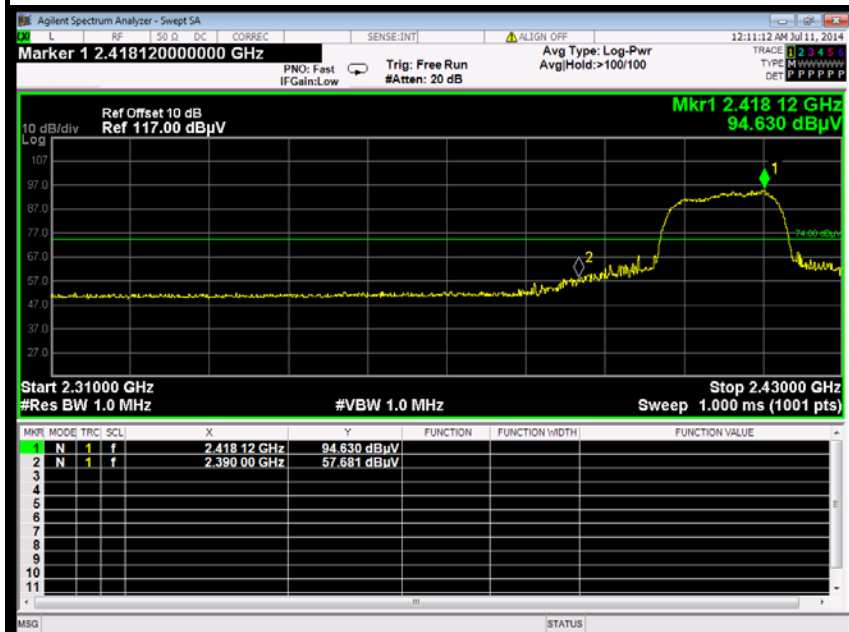

**Detector mode: Average      Polarity: Horizontal**


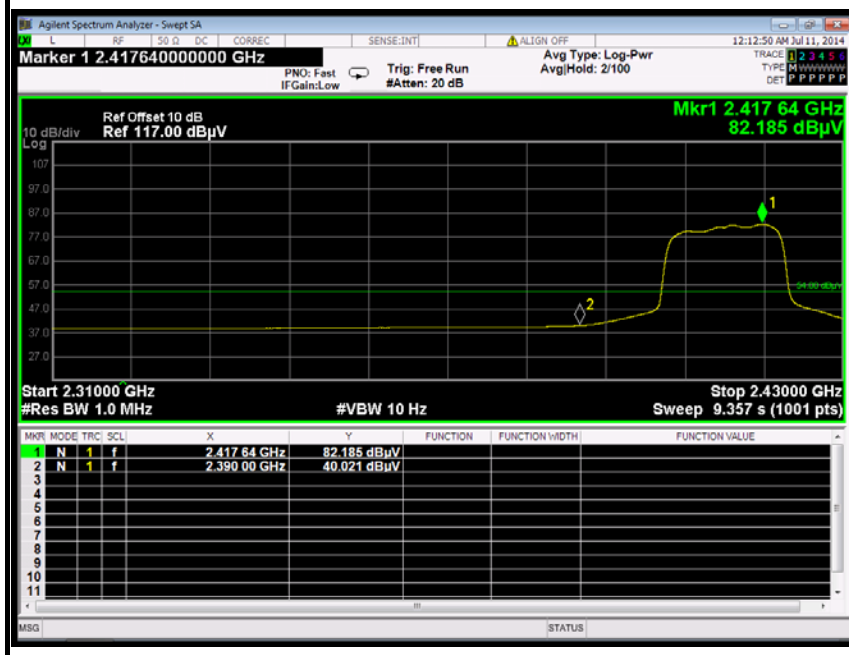


No.	Frequency (MHz)	Reading (dBµV)	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	51.08	-6.60	57.68	74.00	-16.32	Peak	Horizontal
2	2390.0000	33.42	-6.60	40.02	54.00	-13.98	Average	Horizontal







Band Edges (CH High)

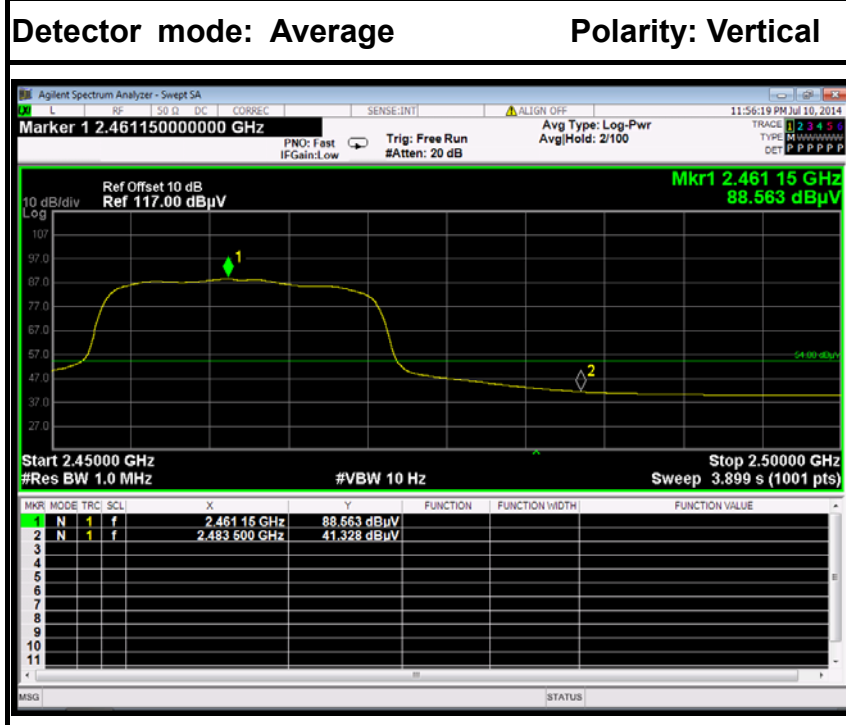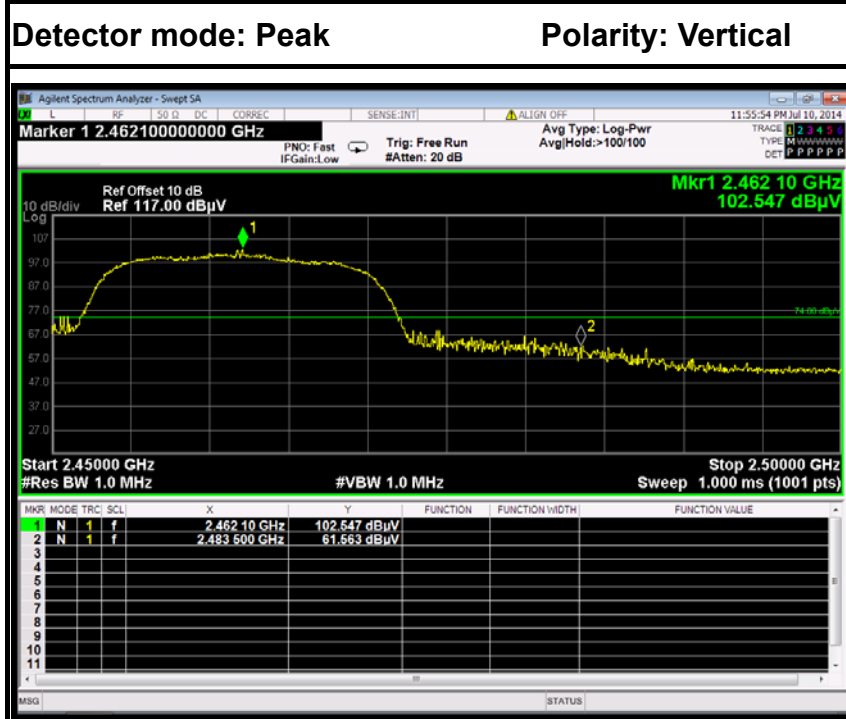

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	55.32	-6.24	61.56	74.00	-12.44	Peak	Vertical
2	2483.5000	35.09	-6.24	41.33	54.00	-12.67	Average	Vertical

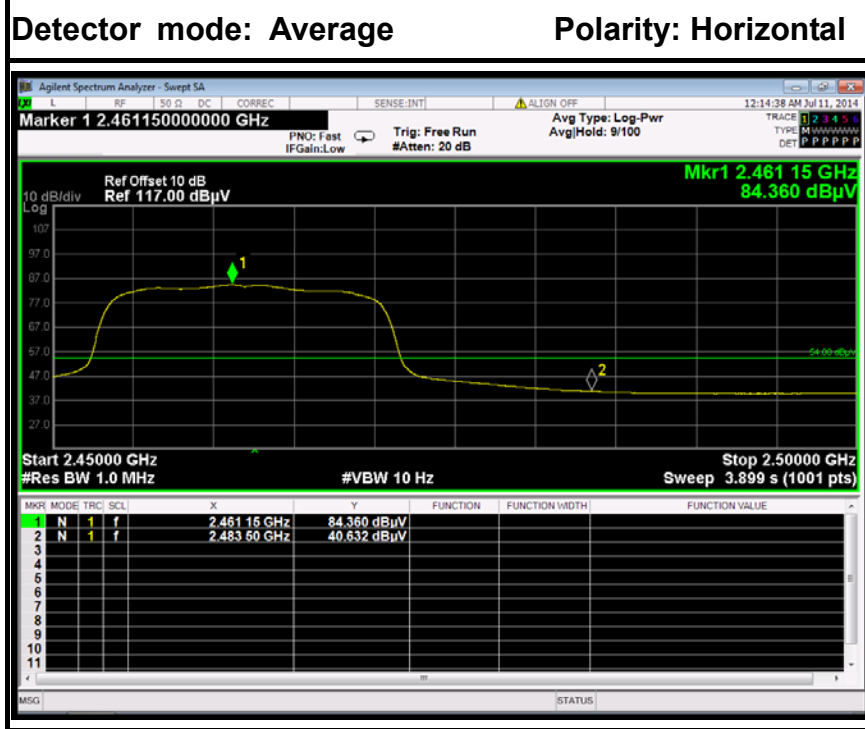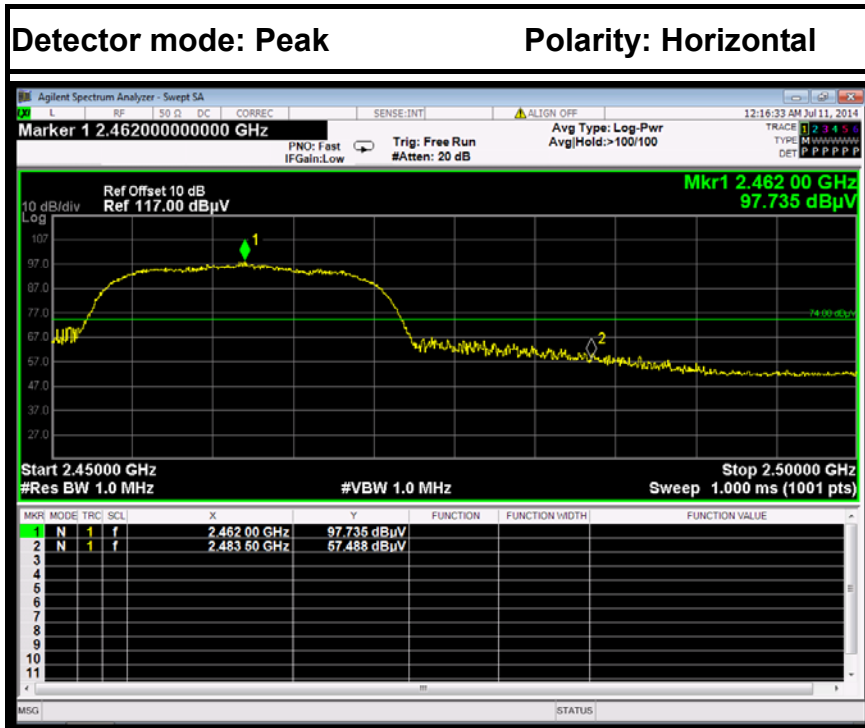

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	51.25	-6.24	57.49	74.00	-16.51	Peak	Horizontal
2	2483.5000	34.39	-6.24	40.63	54.00	-13.37	Average	Horizontal



## 7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 7.6.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 7.6.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2014	03/01/2015


### 7.6.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

### 10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 7.6.4. TEST SETUP





**7.6.5. TEST RESULTS**

*No non-compliance noted*

**Test Data**

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-8.72	8	PASS
Mid	2437	-8.54		PASS
High	2462	-7.19		PASS

**Test mode: IEEE 802.11g**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-13.23	8	PASS
Mid	2437	-11.32		PASS
High	2462	-11.50		PASS



**Test mode: IEEE 802.11n HT20 MHz**


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-14.60	8	PASS
Mid	2437	-14.98		PASS
High	2462	-14.65		PASS



Test Plot

IEEE 802.11b mode

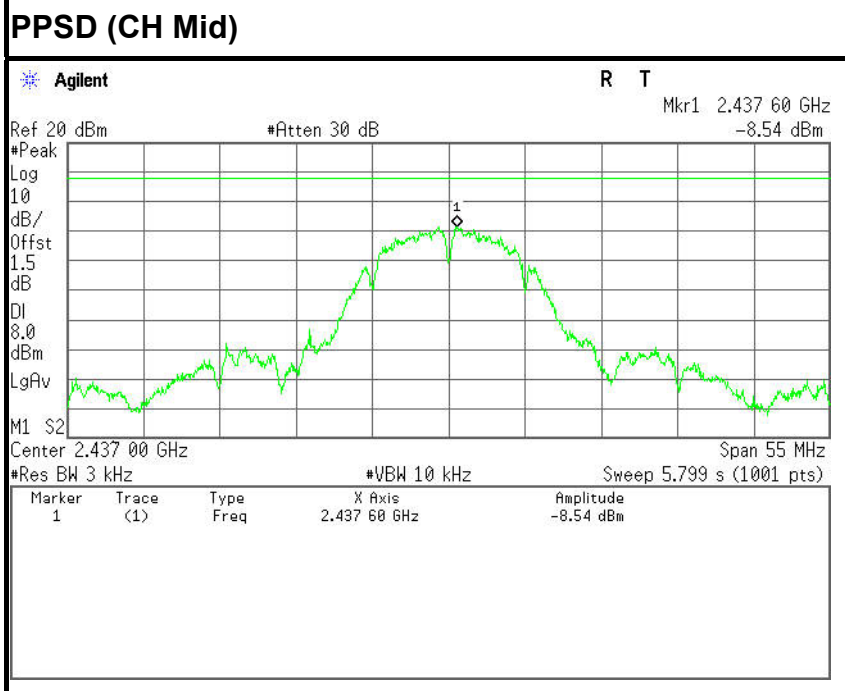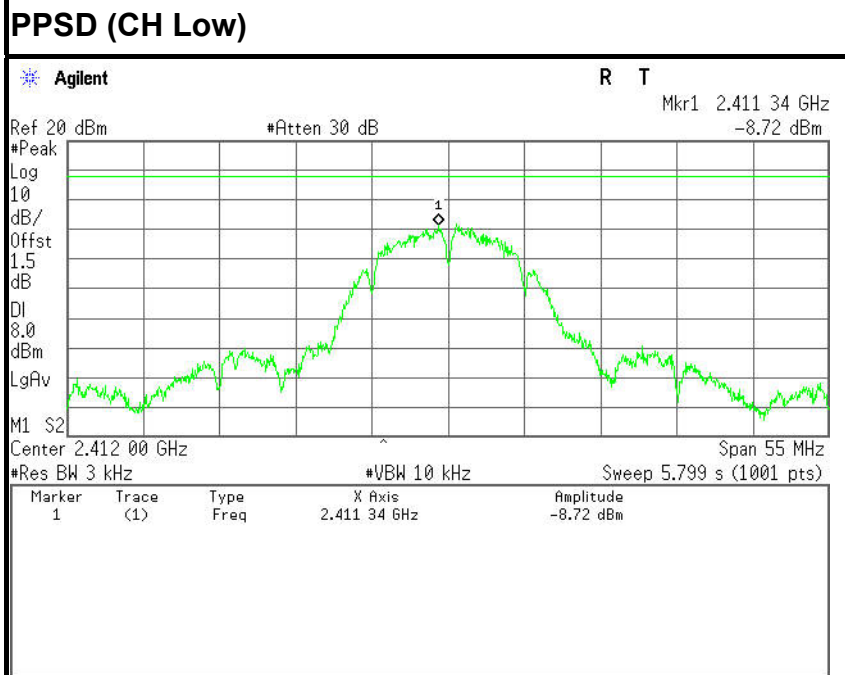


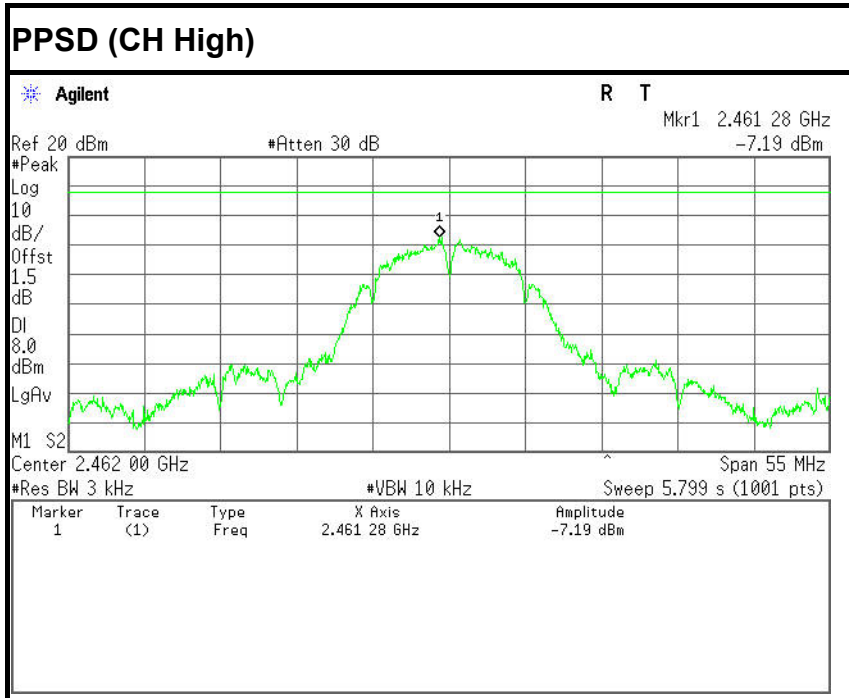




IEEE 802.11g mode

PPSD (CH Low)

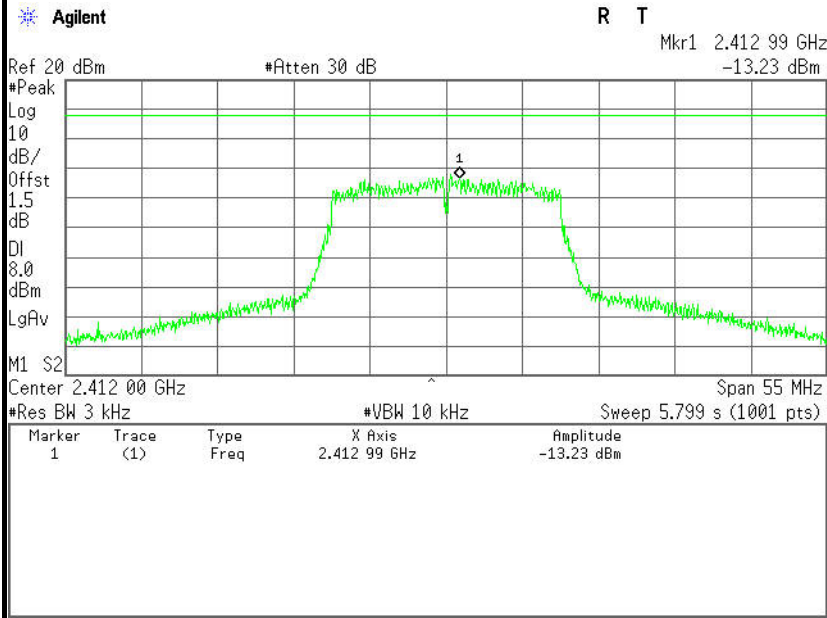


PPSD (CH Mid)

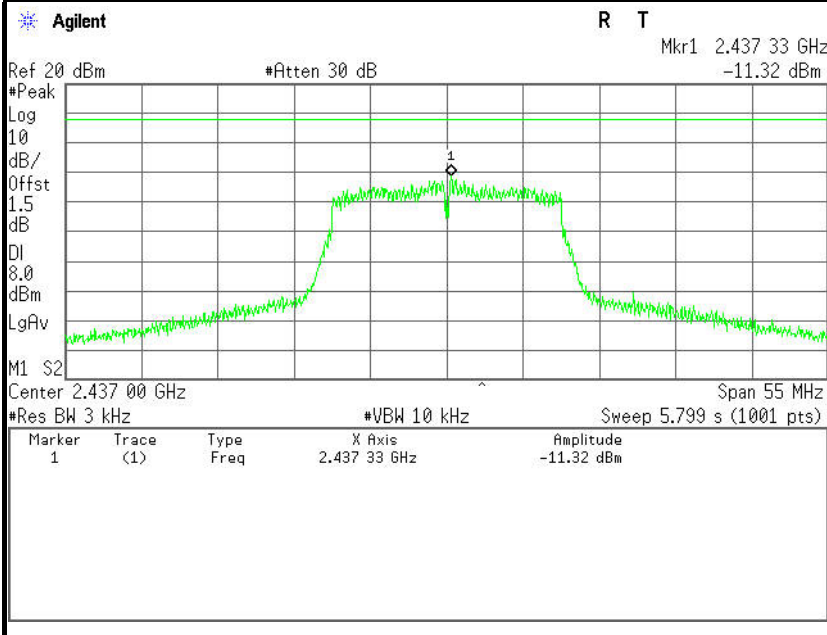



PPSD (CH High)

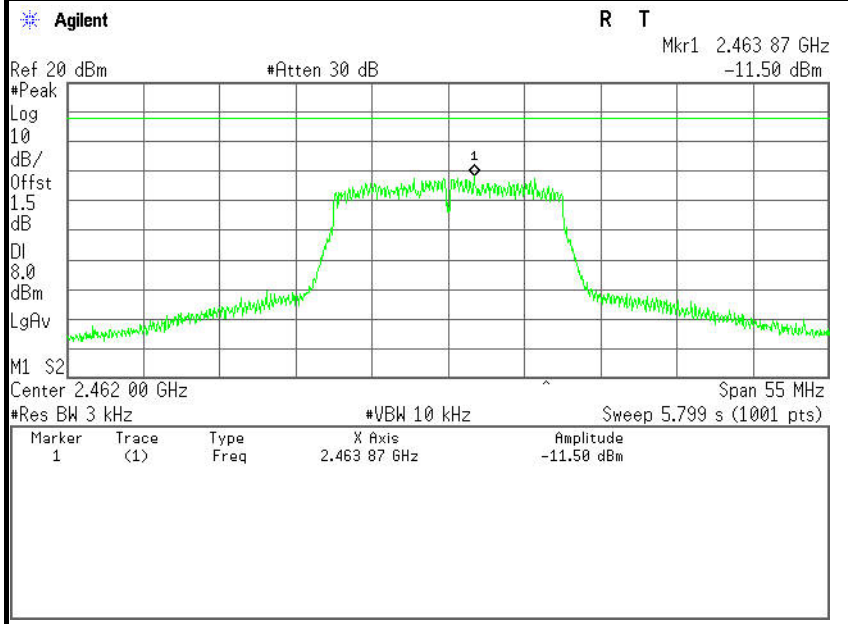






IEEE 802.11n HT20 MHz mode

PPSD (CH Low)

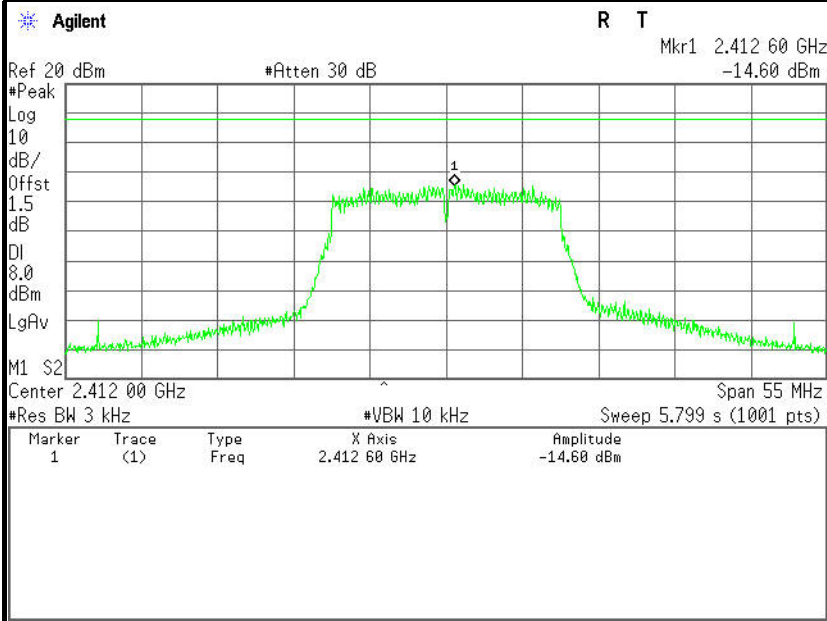

PPSD (CH Mid)

