

# FCC Test Report

**FCC ID** : HLZA21001  
**Equipment** : Tablet PC  
**Marketing name** : ENDURO Urban T3 EUT310A-11A  
(Refer to item 1.1.1 for more details)  
**Model No.** : A21001  
**Brand Name** : acer  
**Applicant** : Acer Incorporated  
**Address** : 9F, 88, Sec. 1, Xintai 5th Rd., New Taipei City  
22181, Taiwan (R.O.C)  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Dec. 03, 2021  
**Tested Date** : Dec. 06 ~ Dec. 21, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

  
\_\_\_\_\_  
Gary Chang / Manager



## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	9
1.3	Test Setup Chart .....	9
1.4	The Equipment List .....	10
1.5	Test Standards .....	11
1.6	Reference Guidance .....	11
1.7	Deviation from Test Standard and Measurement Procedure.....	11
1.8	Measurement Uncertainty .....	12
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>13</b>
2.1	Testing Facility .....	13
2.2	The Worst Test Modes and Channel Details .....	13
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>14</b>
3.1	Conducted Emissions.....	14
3.2	Unwanted Emissions into Restricted Frequency Bands .....	17
3.3	Unwanted Emissions into Non-Restricted Frequency Bands .....	34
3.4	Conducted Output Power .....	42
3.5	Number of Hopping Frequency .....	45
3.6	20dB and Occupied Bandwidth.....	49
3.7	Channel Separation.....	56
3.8	Number of Dwell Time.....	63
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>69</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR1D0301AD	Rev. 01	Initial issue	Jan. 03, 2022

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.661MHz 39.88 (Margin -6.12dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 936.95MHz 39.88 (Margin -6.12dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 6.96	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Marketing name	Description
acer	A21001	ENDURO T1 ET110A-11A	With shockproof housing (plastic housing, without any metal composition)
		ENDURO Urban T3 EUT310A-11A	Without shockproof housing
<ul style="list-style-type: none"> <li>✦ All models are electrically identical, different model names are for marketing purpose.</li> <li>✦ The above marketings, marketing <b>ENDURO Urban T3 EUT310A-11A</b> was selected as a representative one for the final test and only its data was recorded in this report.</li> </ul>			

### 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR V4.1	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR V4.1	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR V4.1	2402-2480	0-78 [79]	3 Mbps
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: Bluetooth BR uses a GFSK. Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.				

### 1.1.3 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	cxytech	Z16	PIFA	N/A	5.46

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from adapter 3.8Vdc from battery
-------------------	--

### 1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	Adapter	Brand: TIANYIN Model: TPA-23A050200UU01 Power Rating: I/P: 100-240Vac, 50/60Hz, 0.3A O/P: 5Vdc=2.0A
2	Battery	Brand: ZHUHAI GREAT POWER ENERGY CO., LTD. Model: 289392 Rated Capacity: 5900mAh/22.42Wh Topical Capacity: 6000mAh/22.8Wh Nominal Voltage: 3.8V Limited Charge Voltage: 4.35V
3	USB cable	Brand: SHENZHEN BAISITAI COMPUTER Model: USB AM TO Type-C Line: 1m shielded without core

### 1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

### 1.1.7 Test Tool and Duty Cycle

<b>Test Tool</b>	EngineerMode, Version: v4.4.107 BT simulator, Brand: R&S / Model: CMW270	
<b>Modulation Mode</b>	<b>Duty Cycle Of Test Signal (%)</b>	<b>Duty Factor (dB)</b>
DH5	78.10%	1.07
2DH5	78.10%	1.07
3DH5	78.10%	1.07

### 1.1.8 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	6	6	6
$\pi/4$ -DQPSK /2Mbps	6	6	6
8DPSK/3Mbps	6	6	6



## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Earphone	Samsung	EHS64	---	---

## 1.3 Test Setup Chart

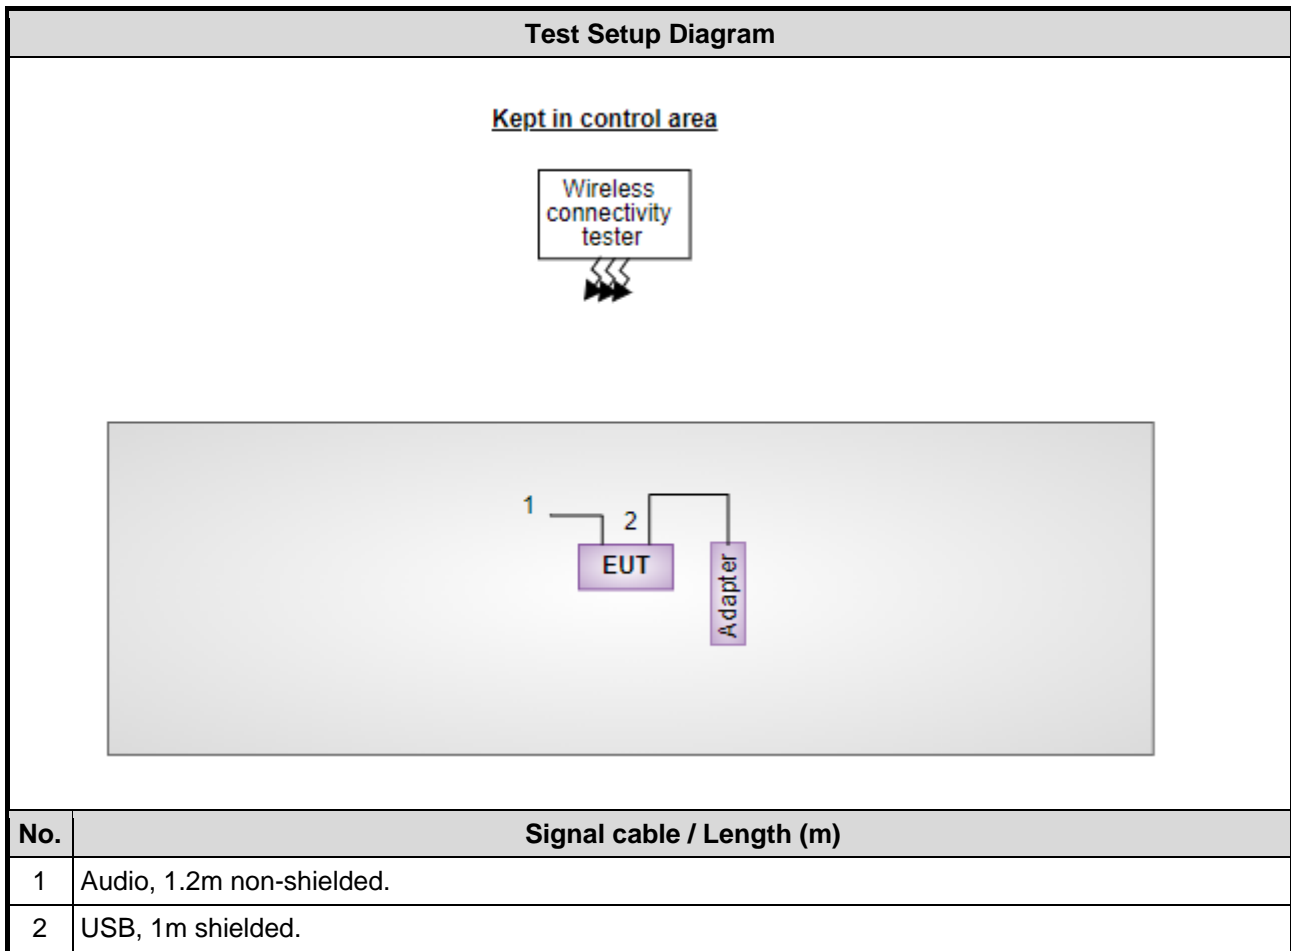

## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Dec. 08, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 29, 2020	Dec. 28, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Dec. 21, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Apr. 19, 2021	Apr. 18, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Measurement Software	Sporton	SENSE-15247_DTS	V5.10	NA	NA
Wireless connectivity tester	R&S	CMW270	100856	Nov. 01, 2021	Oct. 31, 2022
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Tested Date</b>	Dec. 06 ~ Dec. 14, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Dec. 31, 2020	Dec. 30, 2021
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Wireless connectivity tester	R&S	CMW270	100856	Nov. 01, 2021	Oct. 31, 2022
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB
Time	±0.1%

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	CO01-WS, 03CH01-WS, TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions Radiated Emissions ≤ 1GHz	GFSK	2402	1Mbps	---
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	---
Conducted Output Power	GFSK π/4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	---
Number of Hopping Channels	GFSK π/4 DQPSK 8DPSK	2402~2480 2402~2480 2402~2480	1Mbps 2Mbps 3Mbps	---
Hopping Channel Separation 20dB and Occupied bandwidth	GFSK π/4 DQPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	---
Dwell Time	GFSK π/4 DQPSK 8DPSK	2402 2402 2402	1Mbps 2Mbps 3Mbps	---

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


#### 3.1.3 Test Setup

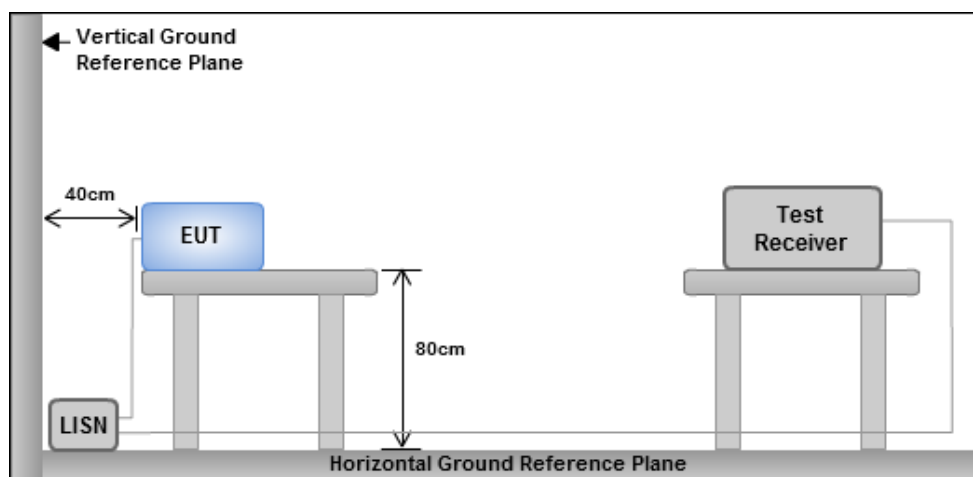

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

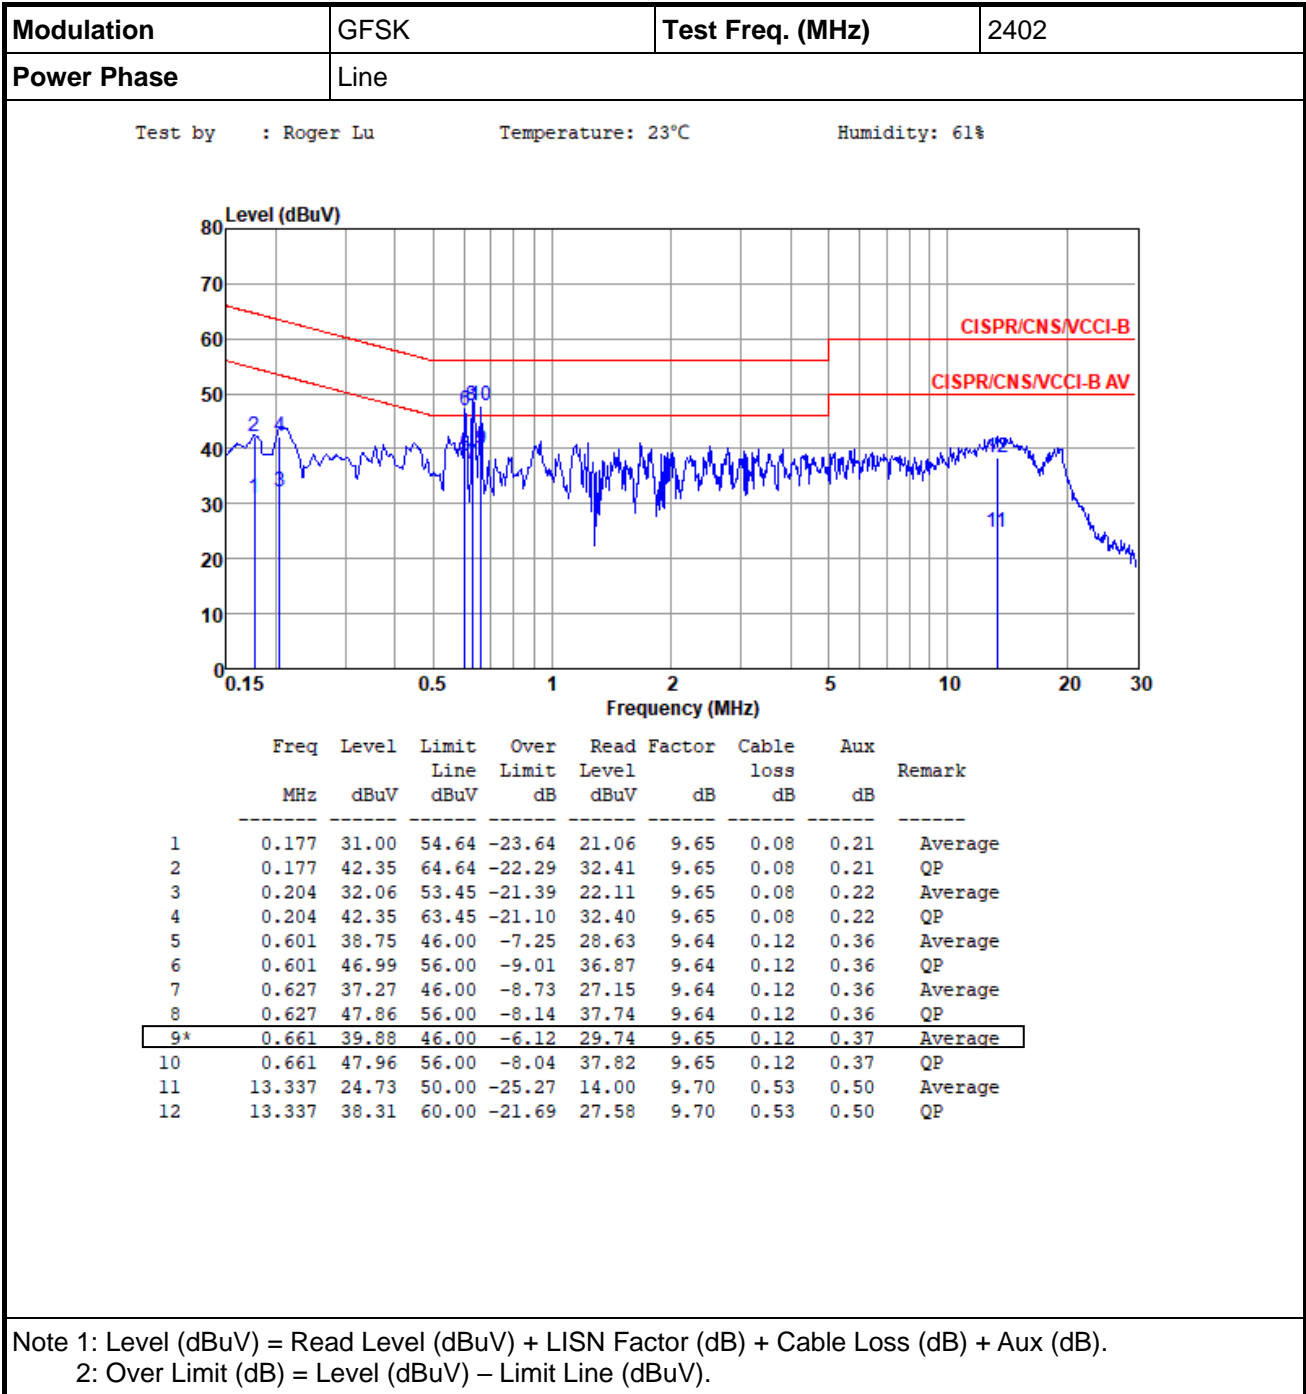

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Power Phase</b>	Neutral		

Test by : Roger Lu      Temperature: 23°C      Humidity: 61%

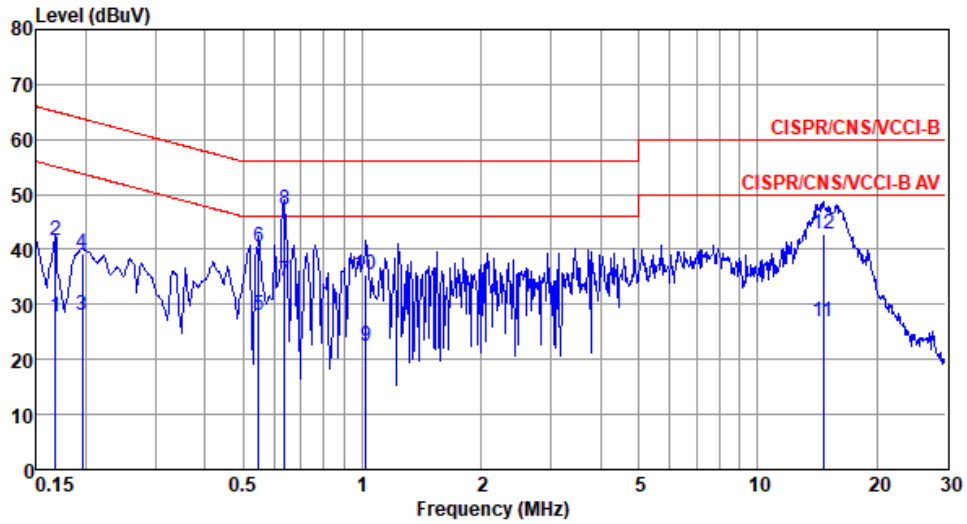

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.168	27.68	55.08	-27.40	17.74	9.69	0.08	0.17	Average
2	0.168	41.64	65.08	-23.44	31.70	9.69	0.08	0.17	QP
3	0.195	28.00	53.80	-25.80	18.06	9.68	0.08	0.18	Average
4	0.195	39.41	63.80	-24.39	29.47	9.68	0.08	0.18	QP
5	0.546	28.15	46.00	-17.85	18.15	9.67	0.11	0.22	Average
6	0.546	40.50	56.00	-15.50	30.50	9.67	0.11	0.22	QP
7	0.637	34.13	46.00	-11.87	24.09	9.68	0.12	0.24	Average
8*	0.637	47.25	56.00	-8.75	37.21	9.68	0.12	0.24	QP
9	1.021	22.36	46.00	-23.64	12.24	9.68	0.16	0.28	Average
10	1.021	35.54	56.00	-20.46	25.42	9.68	0.16	0.28	QP
11	14.672	26.73	50.00	-23.27	15.91	9.80	0.55	0.47	Average
12	14.672	42.80	60.00	-17.20	31.98	9.80	0.55	0.47	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



## 3.2 Unwanted Emissions into Restricted Frequency Bands

### 3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value  
RBW=1MHz, VBW=3MHz and Peak detector  
Radiated emission above 1GHz / Average value for harmonics  
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:
3.
$$20\log(\text{Duty cycle}) = 20\log \frac{1\text{s} / 1600 * 5}{100\text{ ms}} = -30.1\text{dB}$$
4. Radiated emission above 1GHz / Average value for other emissions  
RBW=1MHz, VBW=1/T and Peak detector

### 3.2.3 Test Setup


#### Radiated Emissions below 1 GHz

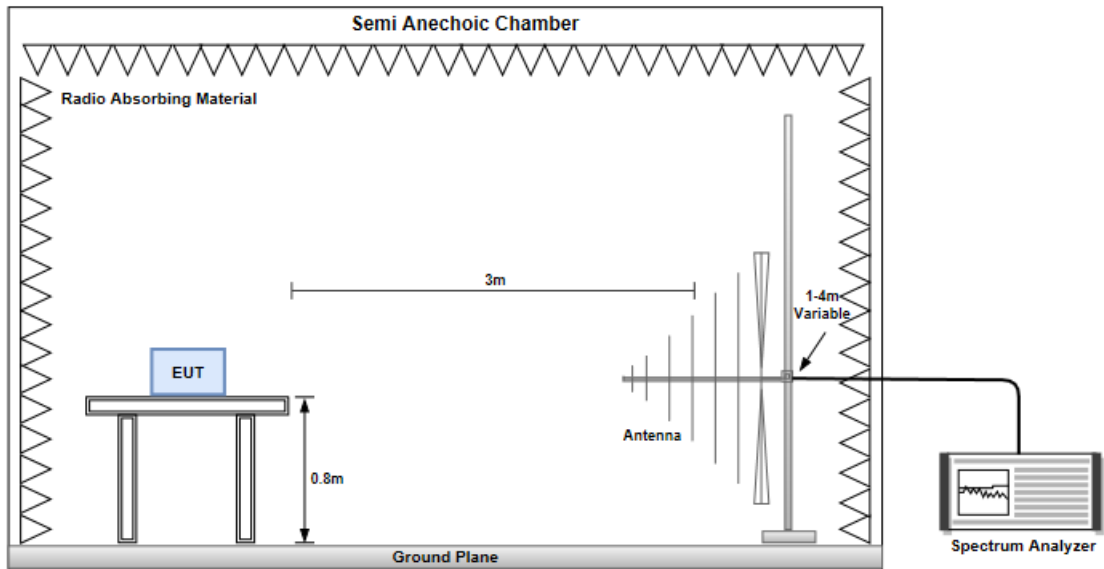

#### Radiated Emissions above 1 GHz

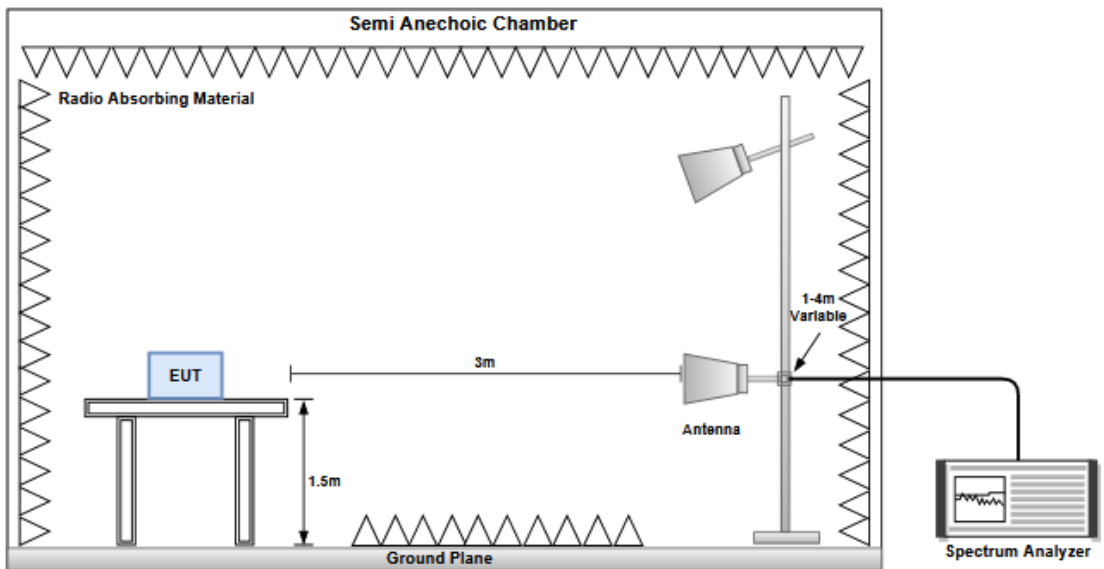


### 3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

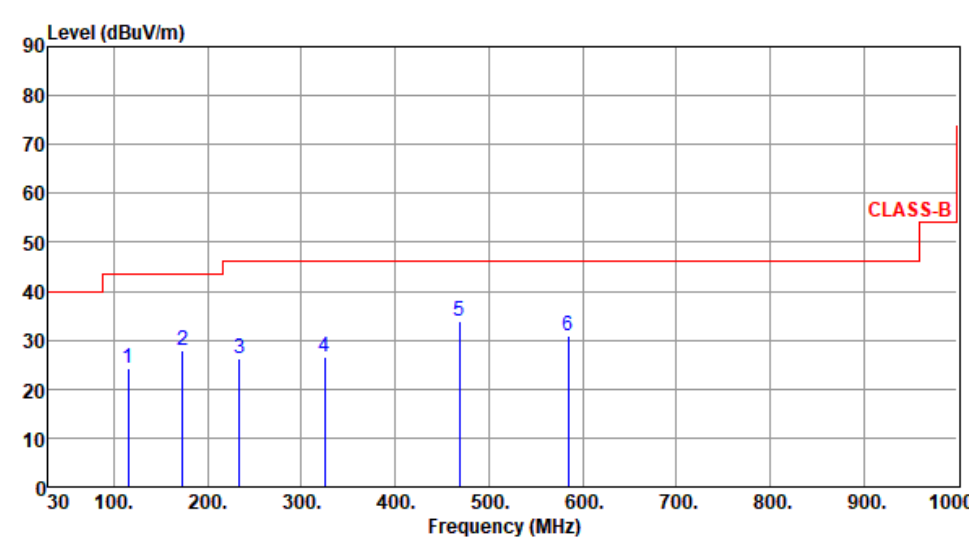Modulation	GFSK	Test Freq. (MHz)	2402																																																																																																																										
Polarization	Horizontal																																																																																																																												
Test By : Roger Lu      Temperature(°C):22      Humidity(%):68																																																																																																																													
																																																																																																																													
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>115.36</td> <td>173.56</td> <td>233.70</td> <td>324.88</td> <td>468.44</td> <td>584.84</td> </tr> <tr> <td>24.32</td> <td>28.01</td> <td>26.12</td> <td>26.52</td> <td>33.85</td> <td>31.01</td> </tr> <tr> <td>43.50</td> <td>43.50</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> </tr> <tr> <td>-19.18</td> <td>-15.49</td> <td>-19.88</td> <td>-19.48</td> <td>-12.15</td> <td>-14.99</td> </tr> <tr> <td>35.44</td> <td>37.47</td> <td>37.20</td> <td>33.98</td> <td>37.84</td> <td>32.47</td> </tr> <tr> <td>-11.12</td> <td>-9.46</td> <td>-11.08</td> <td>-7.46</td> <td>-3.99</td> <td>-1.46</td> </tr> <tr> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	1	2	3	4	5	6	115.36	173.56	233.70	324.88	468.44	584.84	24.32	28.01	26.12	26.52	33.85	31.01	43.50	43.50	46.00	46.00	46.00	46.00	-19.18	-15.49	-19.88	-19.48	-12.15	-14.99	35.44	37.47	37.20	33.98	37.84	32.47	-11.12	-9.46	-11.08	-7.46	-3.99	-1.46	Peak	Peak	Peak	Peak	Peak	Peak	---	---	---	---	---	---	---	---	---	---	---	---	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>115.36</td> <td>24.32</td> <td>43.50</td> <td>-19.18</td> <td>35.44</td> <td>-11.12</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>173.56</td> <td>28.01</td> <td>43.50</td> <td>-15.49</td> <td>37.47</td> <td>-9.46</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>233.70</td> <td>26.12</td> <td>46.00</td> <td>-19.88</td> <td>37.20</td> <td>-11.08</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>324.88</td> <td>26.52</td> <td>46.00</td> <td>-19.48</td> <td>33.98</td> <td>-7.46</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>468.44</td> <td>33.85</td> <td>46.00</td> <td>-12.15</td> <td>37.84</td> <td>-3.99</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>584.84</td> <td>31.01</td> <td>46.00</td> <td>-14.99</td> <td>32.47</td> <td>-1.46</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	115.36	24.32	43.50	-19.18	35.44	-11.12	Peak	---	---	173.56	28.01	43.50	-15.49	37.47	-9.46	Peak	---	---	233.70	26.12	46.00	-19.88	37.20	-11.08	Peak	---	---	324.88	26.52	46.00	-19.48	33.98	-7.46	Peak	---	---	468.44	33.85	46.00	-12.15	37.84	-3.99	Peak	---	---	584.84	31.01	46.00	-14.99	32.47	-1.46	Peak	---	---
1	2	3	4	5	6																																																																																																																								
115.36	173.56	233.70	324.88	468.44	584.84																																																																																																																								
24.32	28.01	26.12	26.52	33.85	31.01																																																																																																																								
43.50	43.50	46.00	46.00	46.00	46.00																																																																																																																								
-19.18	-15.49	-19.88	-19.48	-12.15	-14.99																																																																																																																								
35.44	37.47	37.20	33.98	37.84	32.47																																																																																																																								
-11.12	-9.46	-11.08	-7.46	-3.99	-1.46																																																																																																																								
Peak	Peak	Peak	Peak	Peak	Peak																																																																																																																								
---	---	---	---	---	---																																																																																																																								
---	---	---	---	---	---																																																																																																																								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																					
115.36	24.32	43.50	-19.18	35.44	-11.12	Peak	---	---																																																																																																																					
173.56	28.01	43.50	-15.49	37.47	-9.46	Peak	---	---																																																																																																																					
233.70	26.12	46.00	-19.88	37.20	-11.08	Peak	---	---																																																																																																																					
324.88	26.52	46.00	-19.48	33.98	-7.46	Peak	---	---																																																																																																																					
468.44	33.85	46.00	-12.15	37.84	-3.99	Peak	---	---																																																																																																																					
584.84	31.01	46.00	-14.99	32.47	-1.46	Peak	---	---																																																																																																																					
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																																																																													

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

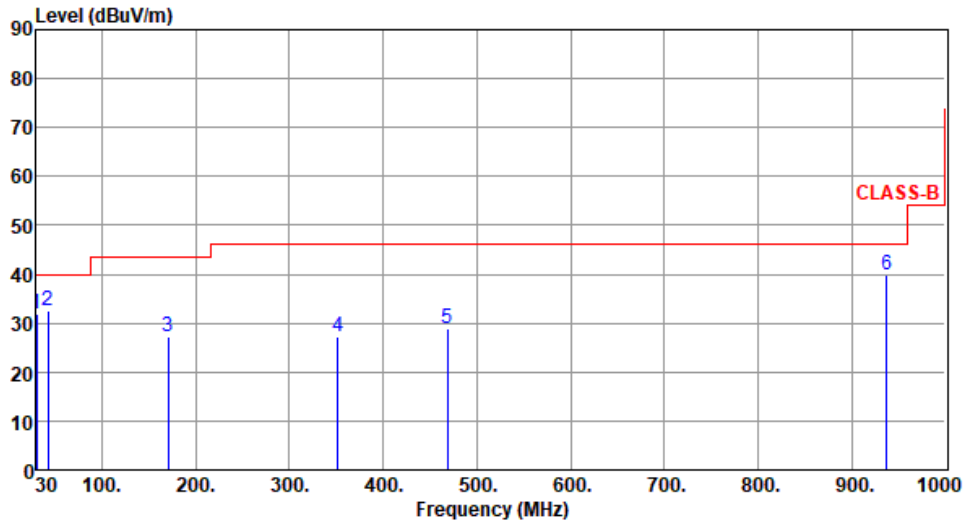

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	30.00	31.92	40.00	-8.08	41.86	-9.94	Peak	---	---
2	42.61	32.49	40.00	-7.51	40.94	-8.45	Peak	---	---
3	170.65	27.20	43.50	-16.30	36.33	-9.13	Peak	---	---
4	352.04	27.28	46.00	-18.72	34.28	-7.00	Peak	---	---
5	468.44	28.98	46.00	-17.02	32.97	-3.99	Peak	---	---
6	936.95	39.88	46.00	-6.12	35.64	4.24	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

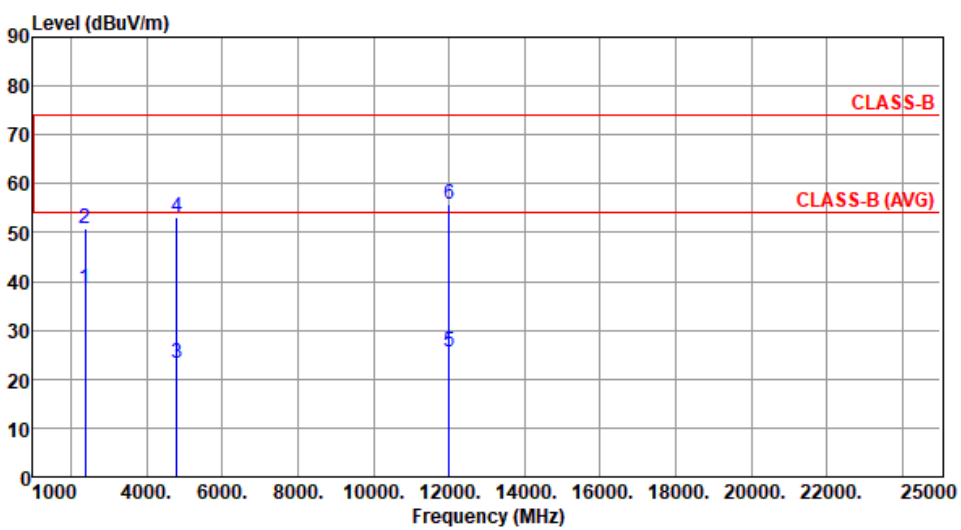Modulation	GFSK	Test Freq. (MHz)	2402																																																																							
Polarization	Horizontal																																																																									
Test By : Roger Lu      Temperature(°C):22      Humidity(%):68																																																																										
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent limits: CLASS-B at approximately 75 dBuV/m and CLASS-B (AVG) at approximately 55 dBuV/m. Six data points are shown as vertical blue lines with labels 1 through 6. Point 1 is at 2390 MHz (level ~41.63), point 2 at 2390 MHz (level ~53.75), point 3 at 4804 MHz (level ~23.16), point 4 at 4804 MHz (level ~49.59), point 5 at 12010 MHz (level ~12.14), and point 6 at 12010 MHz (level ~42.24).</p>																																																																										
	<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>38.62</td> <td>54.00</td> <td>-15.38</td> <td>41.63</td> <td>-3.01</td> <td>Average</td> <td>168</td> <td>234</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>50.74</td> <td>74.00</td> <td>-23.26</td> <td>53.75</td> <td>-3.01</td> <td>Peak</td> <td>168</td> <td>234</td> </tr> <tr> <td>3</td> <td>4804.00</td> <td>23.16</td> <td>54.00</td> <td>-30.84</td> <td>19.49</td> <td>3.67</td> <td>Average</td> <td>100</td> <td>248</td> </tr> <tr> <td>4</td> <td>4804.00</td> <td>53.26</td> <td>74.00</td> <td>-20.74</td> <td>49.59</td> <td>3.67</td> <td>Peak</td> <td>100</td> <td>248</td> </tr> <tr> <td>5</td> <td>12010.00</td> <td>25.56</td> <td>54.00</td> <td>-28.44</td> <td>12.14</td> <td>13.42</td> <td>Average</td> <td>100</td> <td>80</td> </tr> <tr> <td>6</td> <td>12010.00</td> <td>55.66</td> <td>74.00</td> <td>-18.34</td> <td>42.24</td> <td>13.42</td> <td>Peak</td> <td>100</td> <td>80</td> </tr> </tbody> </table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2390.00	38.62	54.00	-15.38	41.63	-3.01	Average	168	234	2	2390.00	50.74	74.00	-23.26	53.75	-3.01	Peak	168	234	3	4804.00	23.16	54.00	-30.84	19.49	3.67	Average	100	248	4	4804.00	53.26	74.00	-20.74	49.59	3.67	Peak	100	248	5	12010.00	25.56	54.00	-28.44	12.14	13.42	Average	100	80	6	12010.00	55.66	74.00	-18.34	42.24	13.42	Peak	100	80			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	2390.00	38.62	54.00	-15.38	41.63	-3.01	Average	168	234																																																																	
2	2390.00	50.74	74.00	-23.26	53.75	-3.01	Peak	168	234																																																																	
3	4804.00	23.16	54.00	-30.84	19.49	3.67	Average	100	248																																																																	
4	4804.00	53.26	74.00	-20.74	49.59	3.67	Peak	100	248																																																																	
5	12010.00	25.56	54.00	-28.44	12.14	13.42	Average	100	80																																																																	
6	12010.00	55.66	74.00	-18.34	42.24	13.42	Peak	100	80																																																																	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																										

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

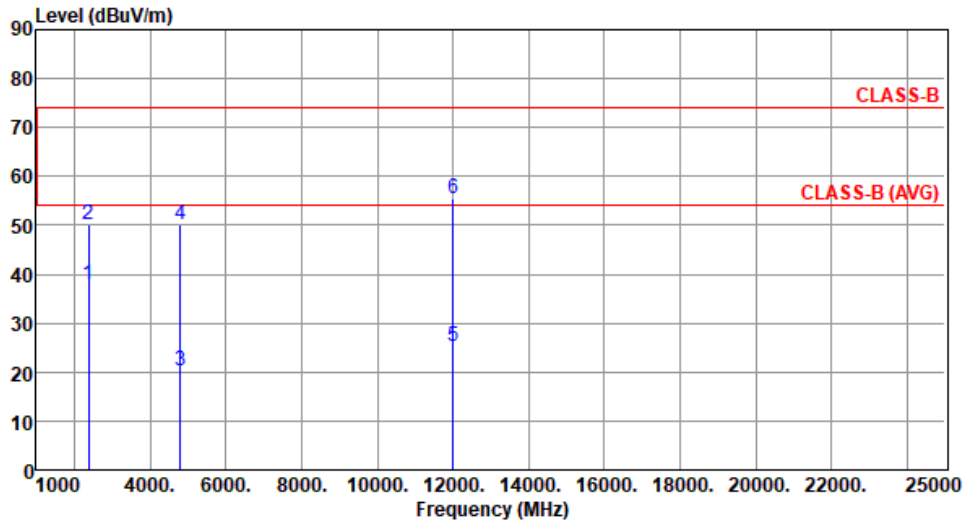

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.90	54.00	-16.10	40.91	-3.01	Average	146	265
2	2390.00	50.15	74.00	-23.85	53.16	-3.01	Peak	146	265
3	4804.00	20.12	54.00	-33.88	16.45	3.67	Average	169	268
4	4804.00	50.22	74.00	-23.78	46.55	3.67	Peak	169	268
5	12010.00	25.35	54.00	-28.65	11.93	13.42	Average	100	50
6	12010.00	55.45	74.00	-18.55	42.03	13.42	Peak	100	50


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

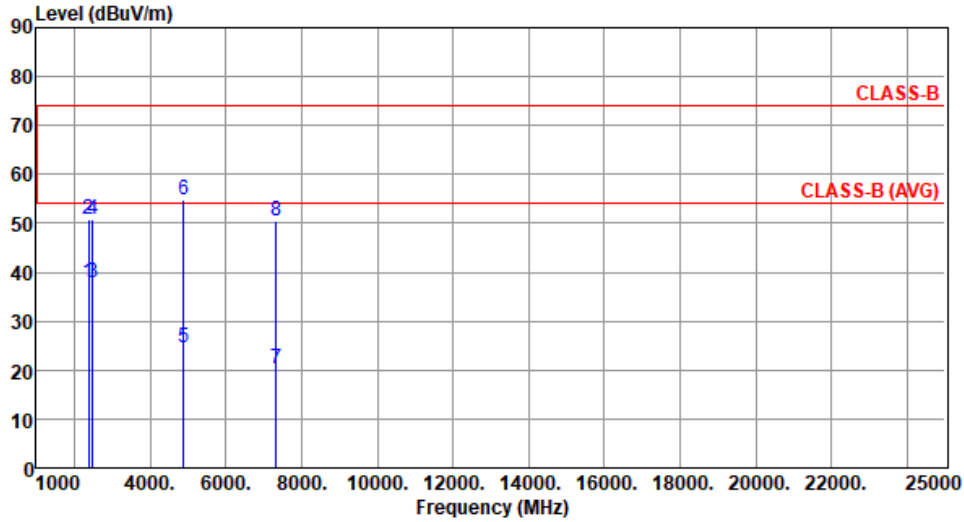


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.85	54.00	-16.15	40.86	-3.01	Average	175	235
2	2390.00	50.70	74.00	-23.30	53.71	-3.01	Peak	175	235
3	2483.50	37.96	54.00	-16.04	40.91	-2.95	Average	175	235
4	2483.50	50.85	74.00	-23.15	53.80	-2.95	Peak	175	235
5	4882.00	24.72	54.00	-29.28	21.06	3.66	Average	100	255
6	4882.00	54.82	74.00	-19.18	51.16	3.66	Peak	100	255
7	7323.00	20.28	54.00	-33.72	11.31	8.97	Average	100	90
8	7323.00	50.38	74.00	-23.62	41.41	8.97	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

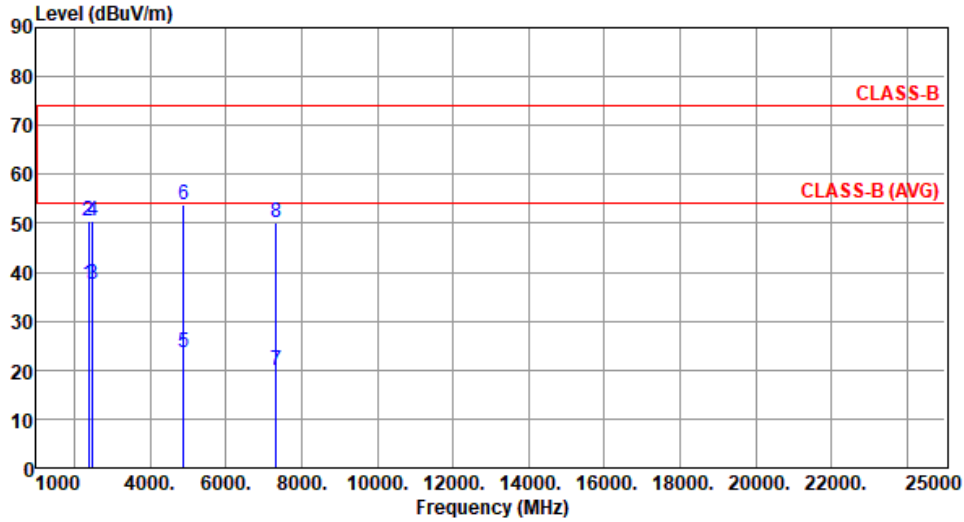


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.40	54.00	-16.60	40.41	-3.01	Average	145	268
2	2390.00	50.37	74.00	-23.63	53.38	-3.01	Peak	145	268
3	2483.50	37.57	54.00	-16.43	40.52	-2.95	Average	145	268
4	2483.50	50.55	74.00	-23.45	53.50	-2.95	Peak	145	268
5	4882.00	23.65	54.00	-30.35	19.99	3.66	Average	166	261
6	4882.00	53.75	74.00	-20.25	50.09	3.66	Peak	166	261
7	7323.00	19.97	54.00	-34.03	11.00	8.97	Average	100	40
8	7323.00	50.07	74.00	-23.93	41.10	8.97	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

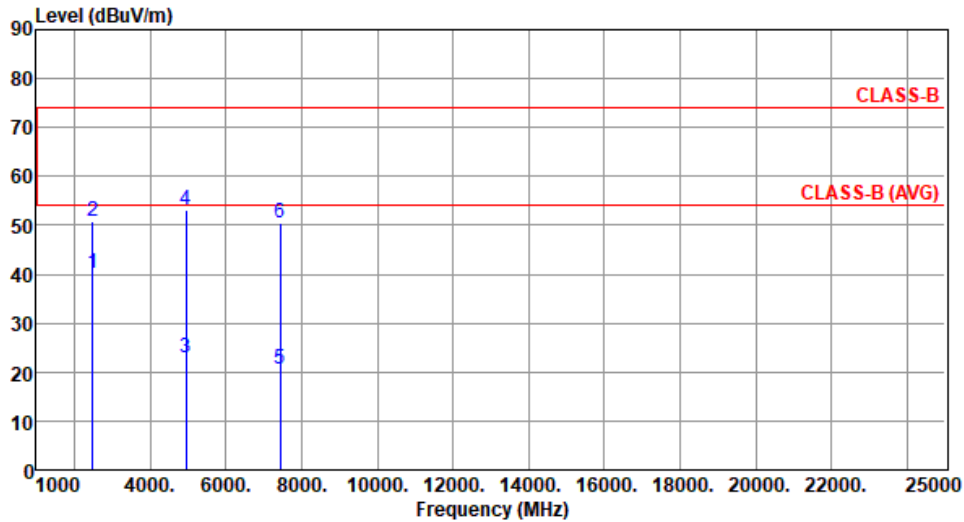

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	40.03	54.00	-13.97	42.98	-2.95	Average	180	234
2	2483.50	50.70	74.00	-23.30	53.65	-2.95	Peak	180	234
3	4960.00	23.07	54.00	-30.93	19.50	3.57	Average	100	255
4	4960.00	53.17	74.00	-20.83	49.60	3.57	Peak	100	255
5	7440.00	20.51	54.00	-33.49	11.42	9.09	Average	100	70
6	7440.00	50.61	74.00	-23.39	41.52	9.09	Peak	100	70


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

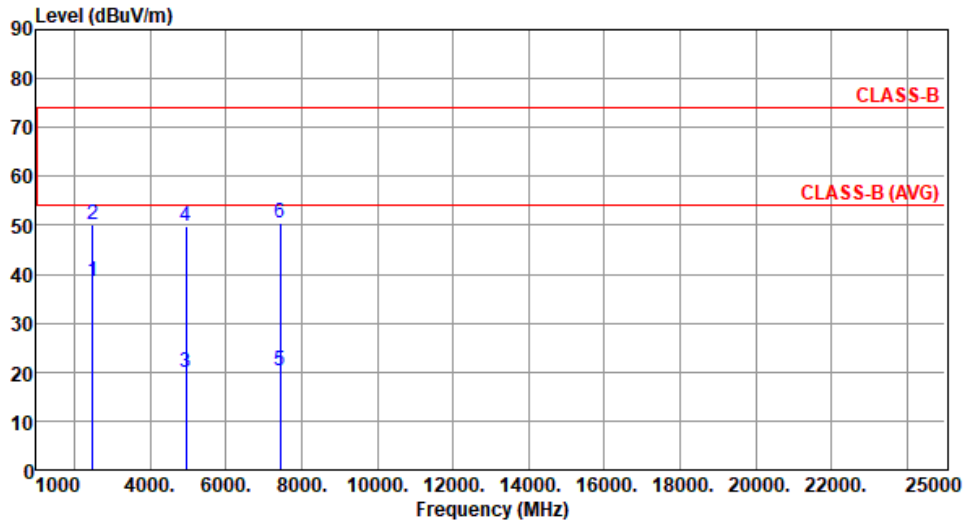


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	38.54	54.00	-15.46	41.49	-2.95	Average	146	262
2	2483.50	50.17	74.00	-23.83	53.12	-2.95	Peak	146	262
3	4960.00	19.83	54.00	-34.17	16.26	3.57	Average	166	271
4	4960.00	49.93	74.00	-24.07	46.36	3.57	Peak	166	271
5	7440.00	20.32	54.00	-33.68	11.23	9.09	Average	100	20
6	7440.00	50.42	74.00	-23.58	41.33	9.09	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


### 3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK
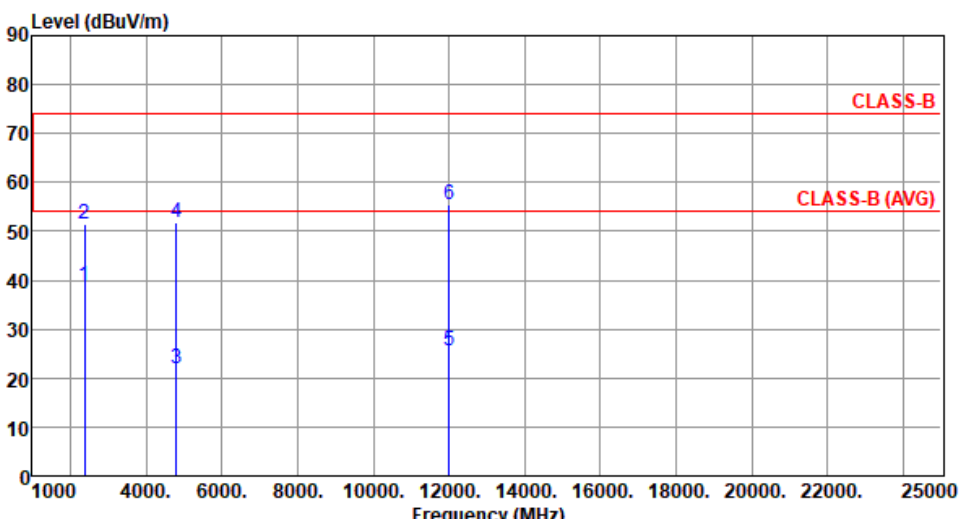
<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2402						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu      Temperature(°C):22      Humidity(%):68									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.89	54.00	-15.11	41.90	-3.01	Average	169	235
2	2390.00	51.55	74.00	-22.45	54.56	-3.01	Peak	169	235
3	4804.00	21.78	54.00	-32.22	18.11	3.67	Average	100	244
4	4804.00	51.88	74.00	-22.12	48.21	3.67	Peak	100	244
5	12010.00	25.41	54.00	-28.59	11.99	13.42	Average	100	30
6	12010.00	55.51	74.00	-18.49	42.09	13.42	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

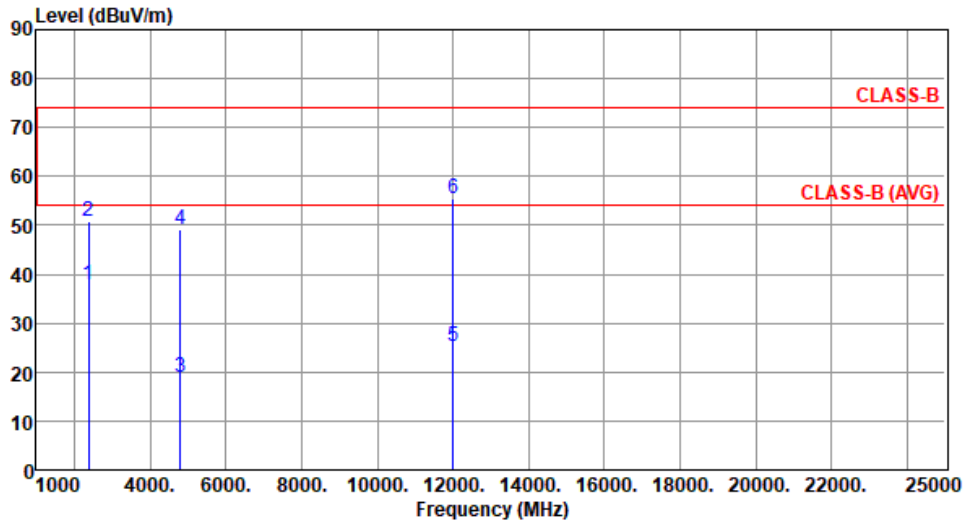

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.82	54.00	-16.18	40.83	-3.01	Average	149	263
2	2390.00	50.92	74.00	-23.08	53.93	-3.01	Peak	149	263
3	4804.00	19.06	54.00	-34.94	15.39	3.67	Average	162	265
4	4804.00	49.16	74.00	-24.84	45.49	3.67	Peak	162	265
5	12010.00	25.25	54.00	-28.75	11.83	13.42	Average	100	40
6	12010.00	55.35	74.00	-18.65	41.93	13.42	Peak	100	40


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

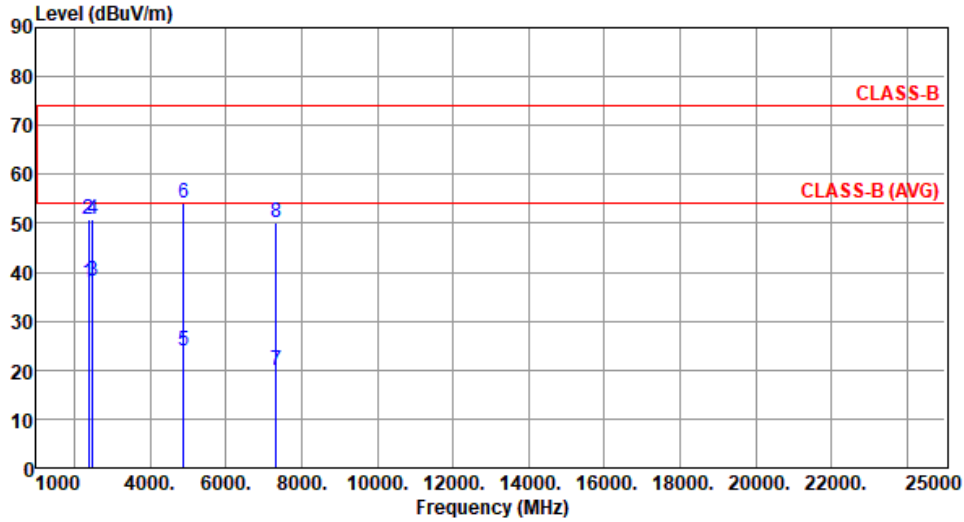

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.85	54.00	-16.15	40.86	-3.01	Average	175	233
2	2390.00	50.72	74.00	-23.28	53.73	-3.01	Peak	175	233
3	2483.50	38.04	54.00	-15.96	40.99	-2.95	Average	175	233
4	2483.50	50.87	74.00	-23.13	53.82	-2.95	Peak	175	233
5	4882.00	23.96	54.00	-30.04	20.30	3.66	Average	100	253
6	4882.00	54.06	74.00	-19.94	50.40	3.66	Peak	100	253
7	7323.00	19.94	54.00	-34.06	10.97	8.97	Average	100	30
8	7323.00	50.04	74.00	-23.96	41.07	8.97	Peak	100	30


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

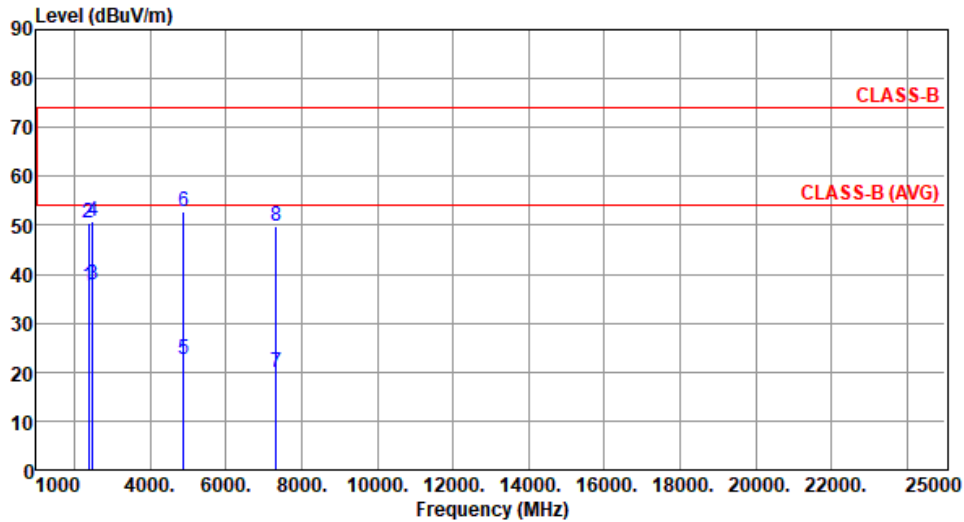

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.51	54.00	-16.49	40.52	-3.01	Average	138	269
2	2390.00	50.51	74.00	-23.49	53.52	-3.01	Peak	138	269
3	2483.50	37.73	54.00	-16.27	40.68	-2.95	Average	138	269
4	2483.50	50.65	74.00	-23.35	53.60	-2.95	Peak	138	269
5	4882.00	22.74	54.00	-31.26	19.08	3.66	Average	167	266
6	4882.00	52.84	74.00	-21.16	49.18	3.66	Peak	167	266
7	7323.00	19.78	54.00	-34.22	10.81	8.97	Average	100	50
8	7323.00	49.88	74.00	-24.12	40.91	8.97	Peak	100	50


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

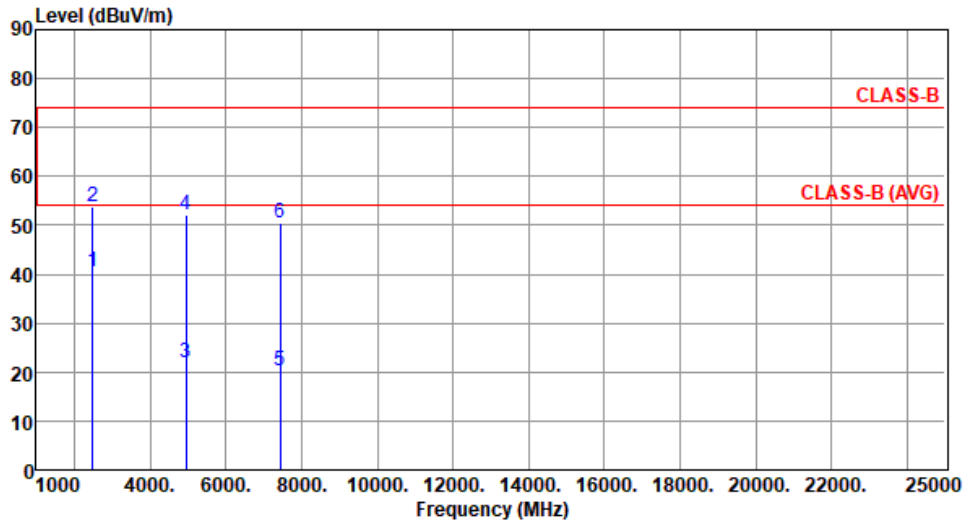

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	40.63	54.00	-13.37	43.58	-2.95	Average	171	236
2	2483.50	53.93	74.00	-20.07	56.88	-2.95	Peak	171	236
3	4960.00	21.90	54.00	-32.10	18.33	3.57	Average	100	251
4	4960.00	52.00	74.00	-22.00	48.43	3.57	Peak	100	251
5	7440.00	20.35	54.00	-33.65	11.26	9.09	Average	100	60
6	7440.00	50.45	74.00	-23.55	41.36	9.09	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):22      Humidity(%):68

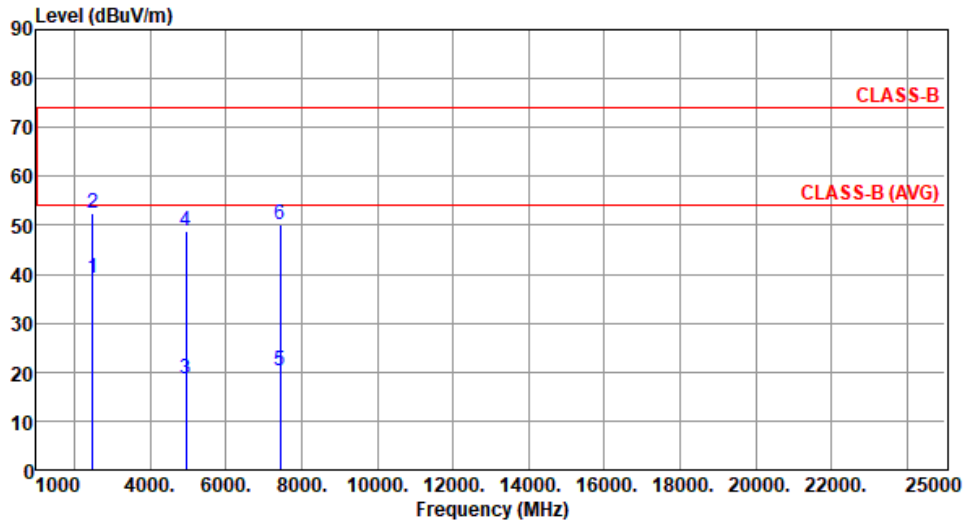

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	39.17	54.00	-14.83	42.12	-2.95	Average	139	264
2	2483.50	52.40	74.00	-21.60	55.35	-2.95	Peak	139	264
3	4960.00	18.66	54.00	-35.34	15.09	3.57	Average	163	264
4	4960.00	48.76	74.00	-25.24	45.19	3.57	Peak	163	264
5	7440.00	20.15	54.00	-33.85	11.06	9.09	Average	100	30
6	7440.00	50.25	74.00	-23.75	41.16	9.09	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.3 Unwanted Emissions into Non-Restricted Frequency Bands

#### 3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

#### 3.3.2 Test Procedures


##### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

##### Emission level measurement



1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

#### 3.3.3 Test Setup

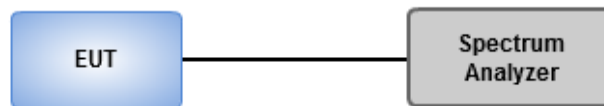


### 3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

Ambient Condition	22°C / 65%	Tested By	Roger Lu
-------------------	------------	-----------	----------

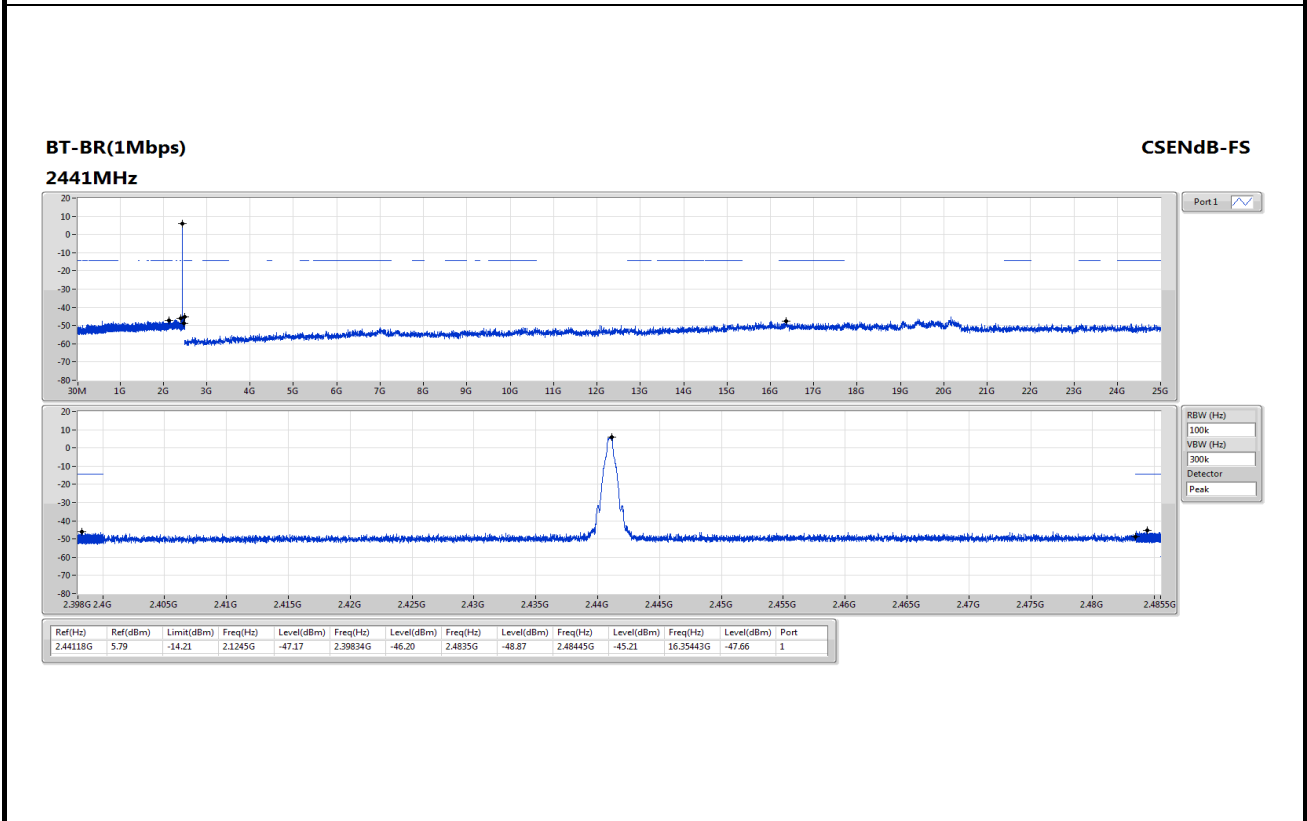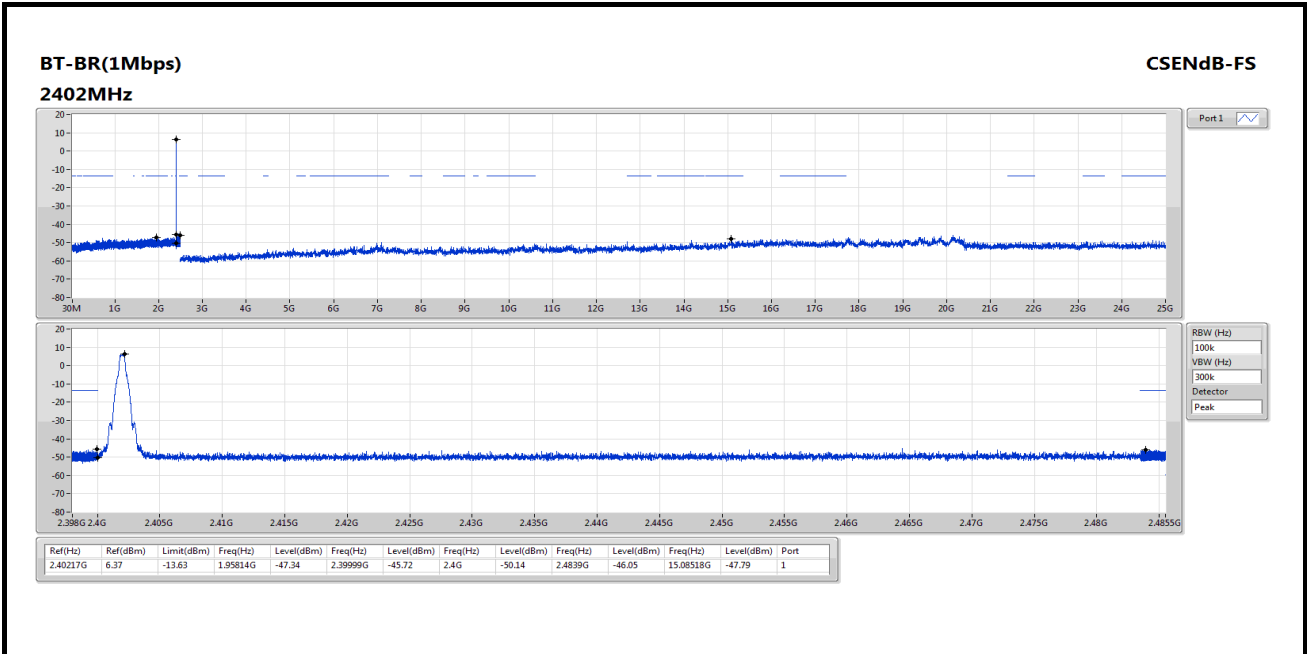


**BT-BR(1Mbps)**  
**2480MHz**

CSENdB-FS

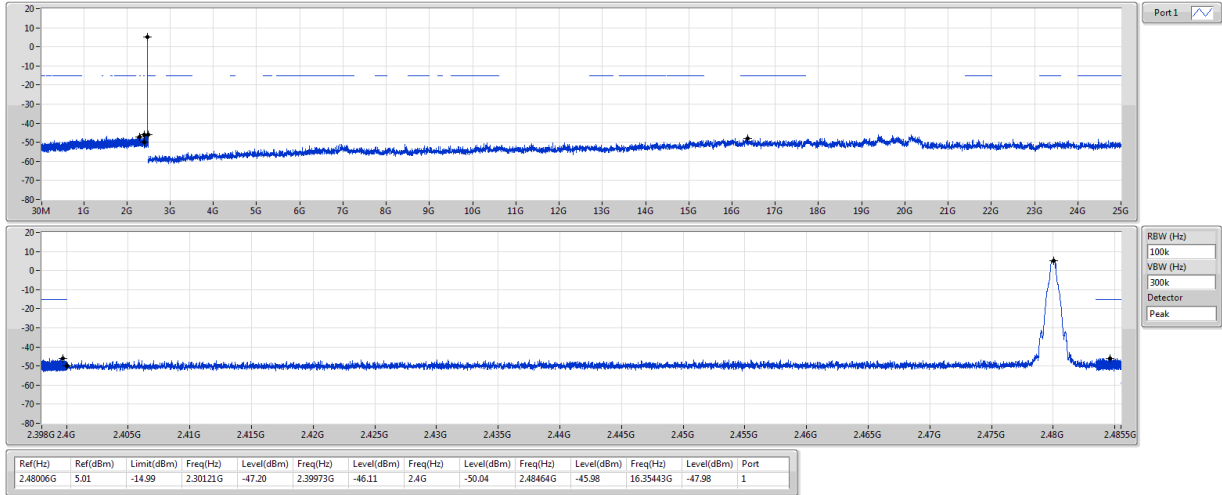


**BT-EDR(2Mbps)**  
**2402MHz**

CSENdB-FS

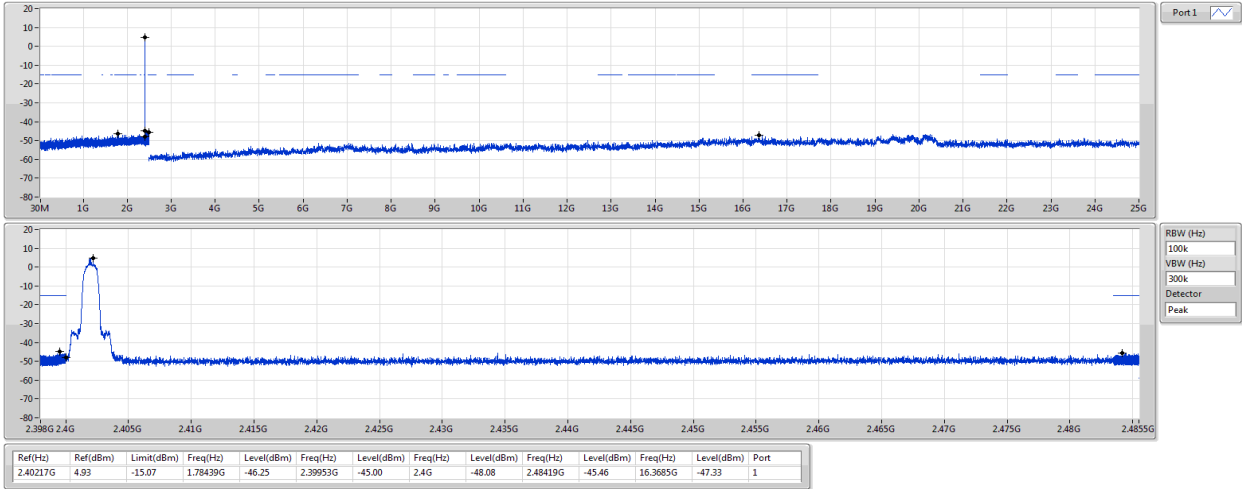


**BT-EDR(2Mbps)**  
**2441MHz**

**CSENdB-FS**

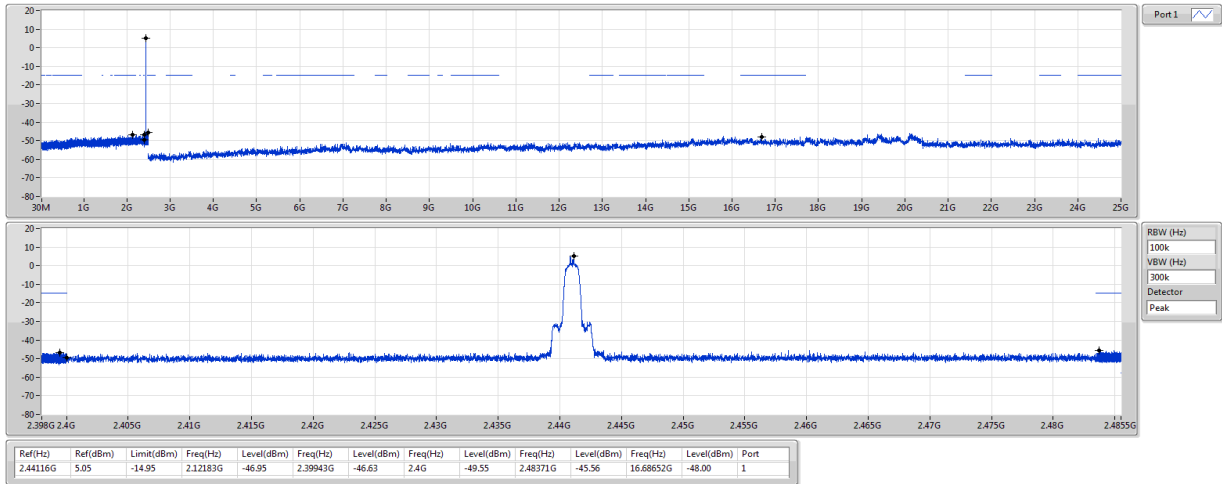

**BT-EDR(2Mbps)**  
**2480MHz**


**CSENdB-FS**

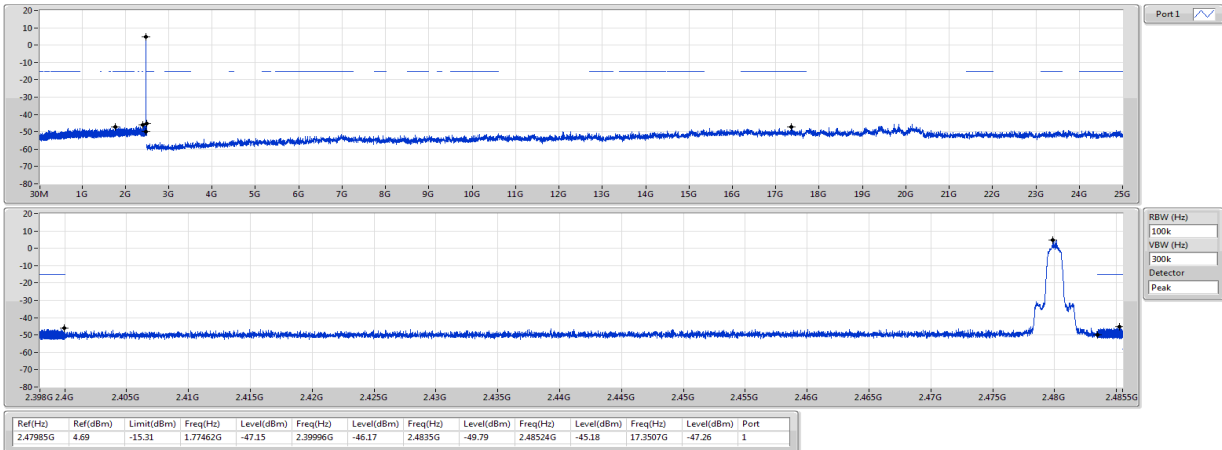

**BT-EDR(3Mbps)**

**CSENdB-FS**


**2402MHz**

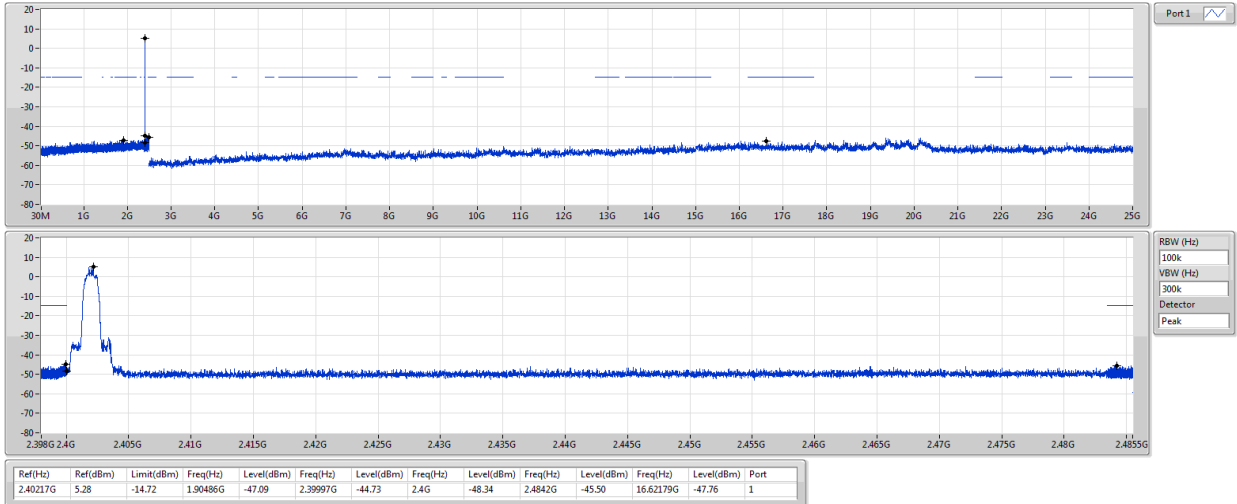


**BT-EDR(3Mbps)**

**CSENdB-FS**

**2441MHz**

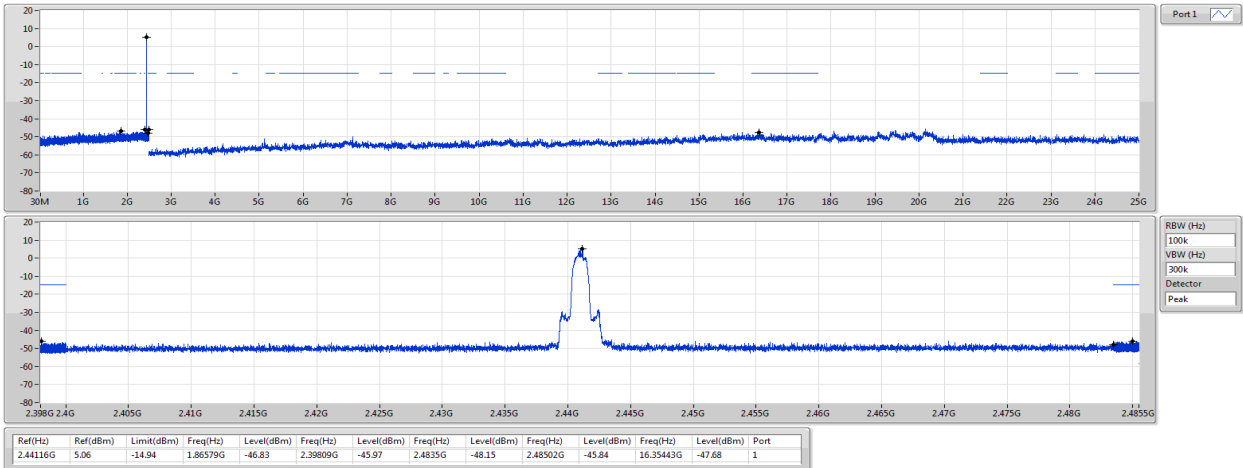


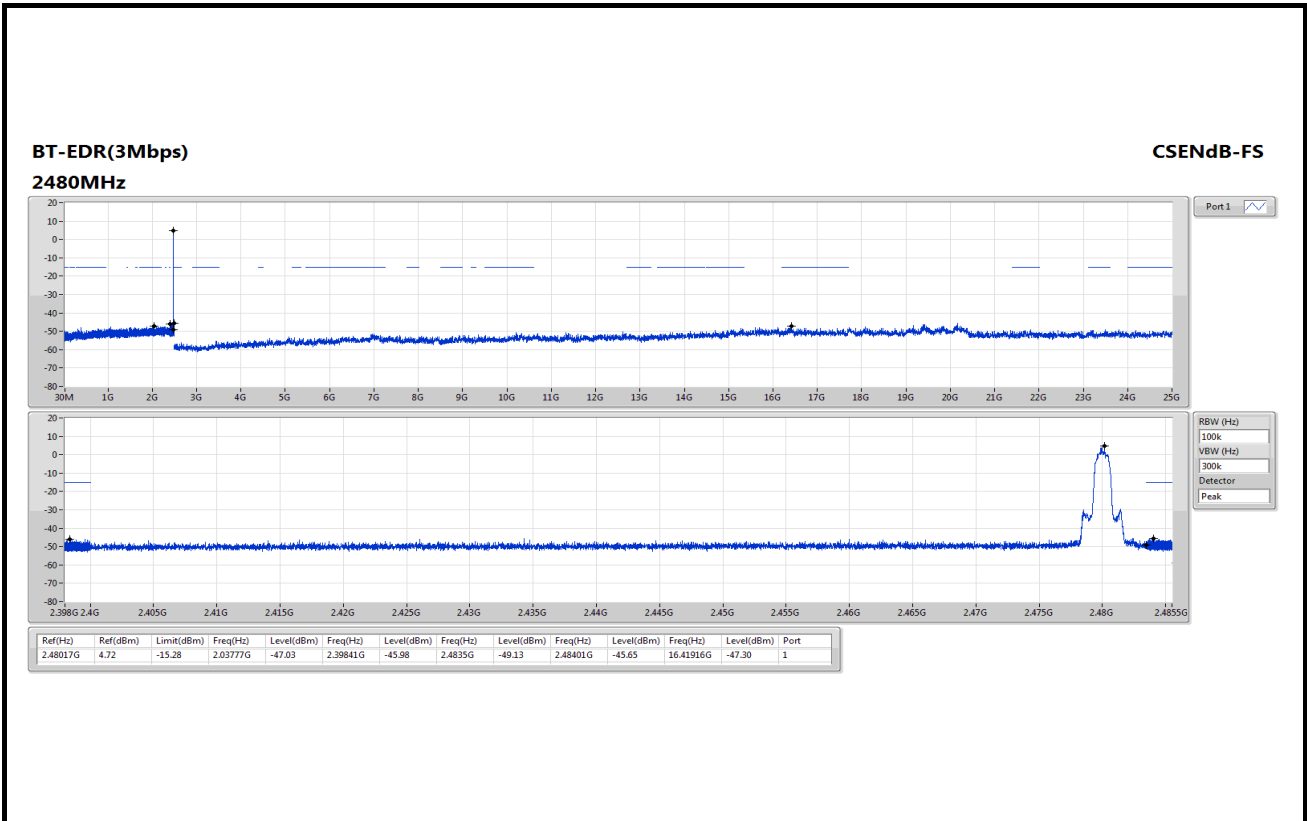

### BT-BR(1Mbps)

2402MHz


### Hopping Ch Bandedge (Non-restricted Band)

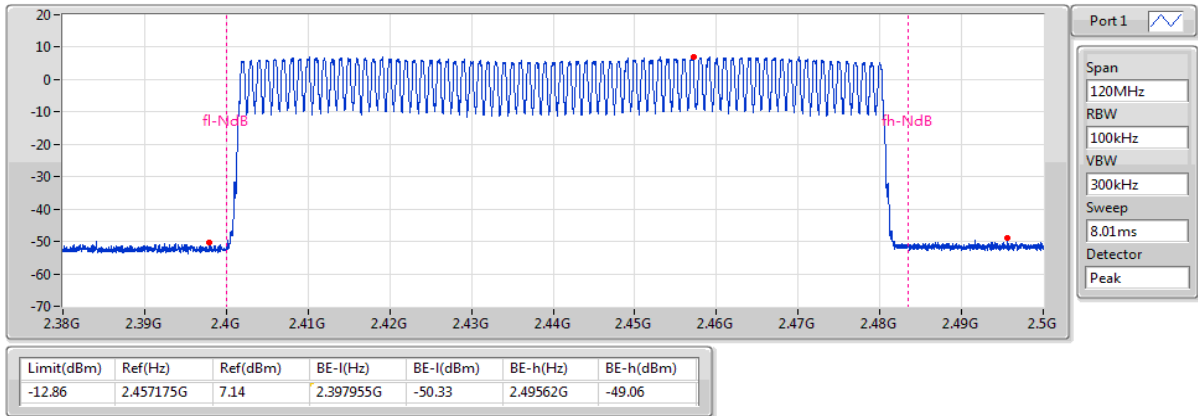

### BT-EDR(2Mbps)

2402MHz

### Hopping Ch Bandedge (Non-restricted Band)

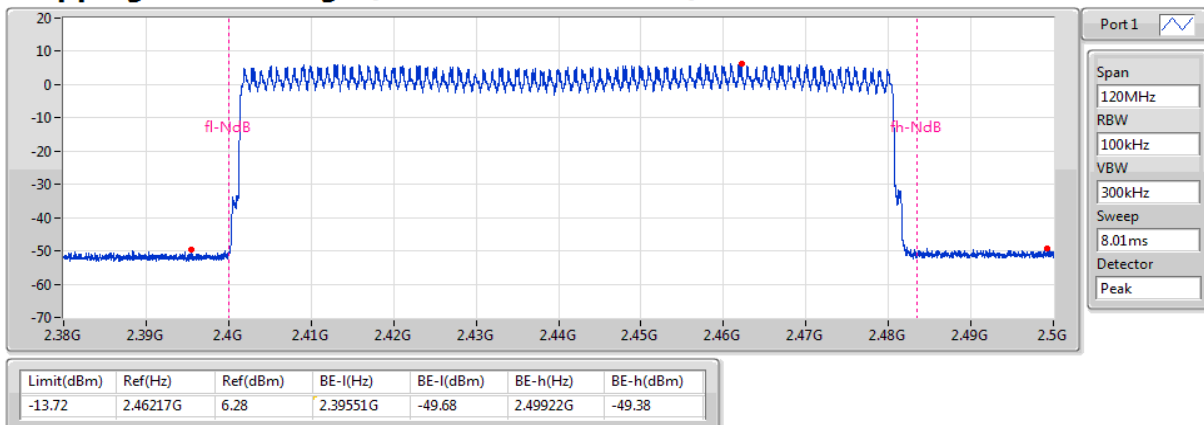




## BT-EDR(3Mbps)

2402MHz

### Hopping Ch Bandedge (Non-restricted Band)

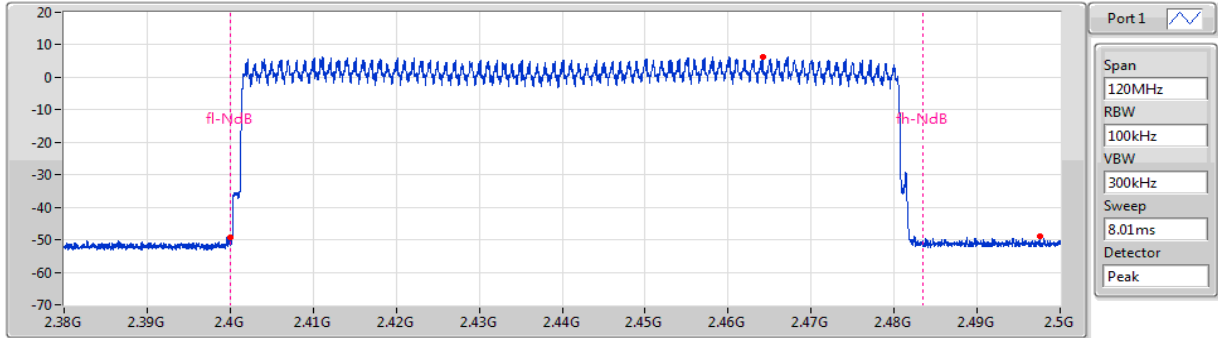

Limit(dBm)	Ref(Hz)	Ref(dBm)	BE-l(Hz)	BE-l(dBm)	BE-h(Hz)	BE-h(dBm)
-13.63	2.464165G	6.37	2.399995G	-49.18	2.49754G	-49.05

## 3.4 Conducted Output Power


### 3.4.1 Limit of Conducted Output Power

- 1 Watt  
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- 0.125 Watt  
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- 0.125 Watt  
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

### 3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

### 3.4.3 Test Setup

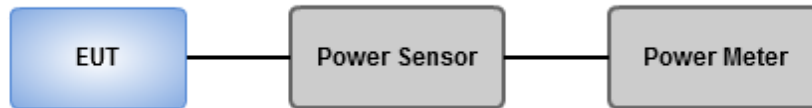

### 3.4.4 Test Result of Conducted Output Power

<b>Ambient Condition</b>	22°C / 65%	<b>Tested By</b>	Roger Lu
--------------------------	------------	------------------	----------

#### Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	6.96	0.00497
BT-EDR(2Mbps)	5.92	0.00391
BT-EDR(3Mbps)	6.41	0.00438

#### Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	5.46	6.96	21.00
2441MHz	Pass	5.46	6.47	21.00
2480MHz	Pass	5.46	6.18	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	5.46	5.92	21.00
2441MHz	Pass	5.46	5.87	21.00
2480MHz	Pass	5.46	5.62	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	5.46	6.41	21.00
2441MHz	Pass	5.46	5.86	21.00
2480MHz	Pass	5.46	5.72	21.00

### Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	6.54	0.00451
BT-EDR(2Mbps)	4.01	0.00252
BT-EDR(3Mbps)	4.06	0.00255

### Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	5.46	6.54	-
2441MHz	Pass	5.46	6.05	-
2480MHz	Pass	5.46	5.70	-
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	5.46	4.01	-
2441MHz	Pass	5.46	3.82	-
2480MHz	Pass	5.46	3.81	-
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	5.46	4.06	-
2441MHz	Pass	5.46	3.84	-
2480MHz	Pass	5.46	3.58	-

Note: Average power is for reference only.

## 3.5 Number of Hopping Frequency


### 3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

### 3.5.3 Test Setup

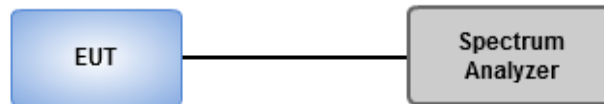

### 3.5.4 Test Result of Number of Hopping Frequency

<b>Ambient Condition</b>	22°C / 65%	<b>Tested By</b>	Roger Lu
--------------------------	------------	------------------	----------

#### Summary


Mode	Max-Hop No
2.4-2.4835GHz	-
BT-BR(1Mbps)	79
BT-EDR(2Mbps)	79
BT-EDR(3Mbps)	79

#### Result

Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2402MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2402MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2402MHz	Pass	79	15


**BT-BR(1Mbps)**  
**2402MHz**

**Hopping-FS**

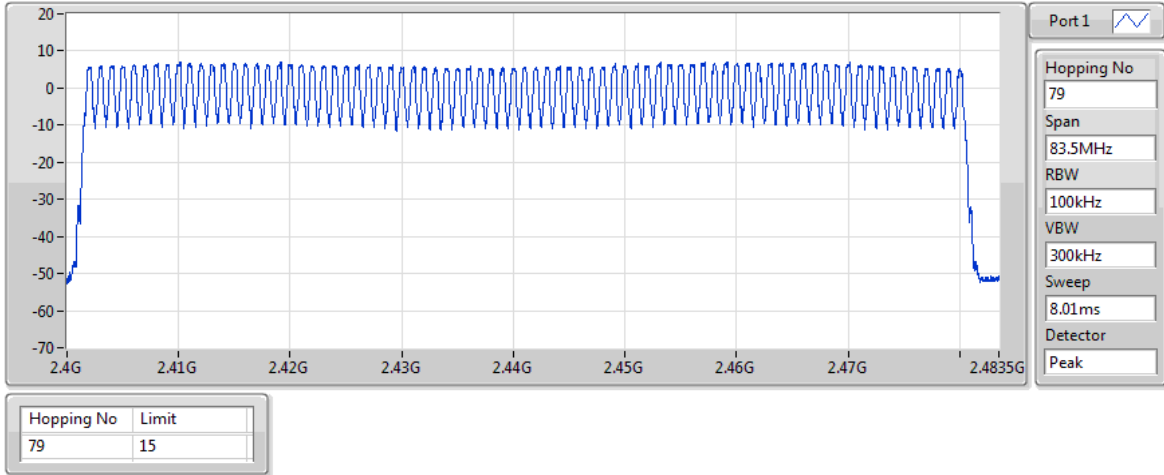


**BT-EDR(2Mbps)**  
**2402MHz**

**Hopping-FS**

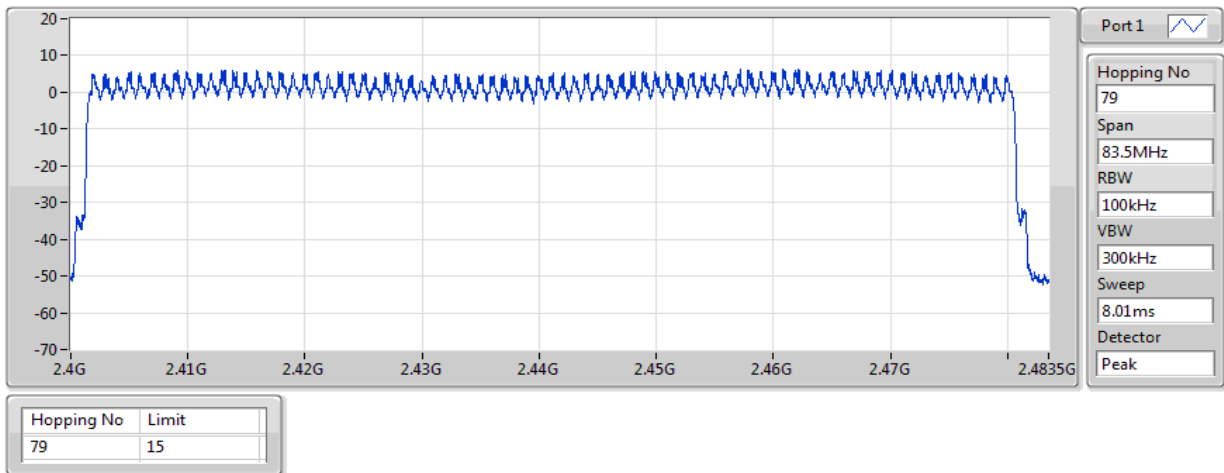

**BT-EDR(3Mbps)**  
**2402MHz**

**Hopping-FS**

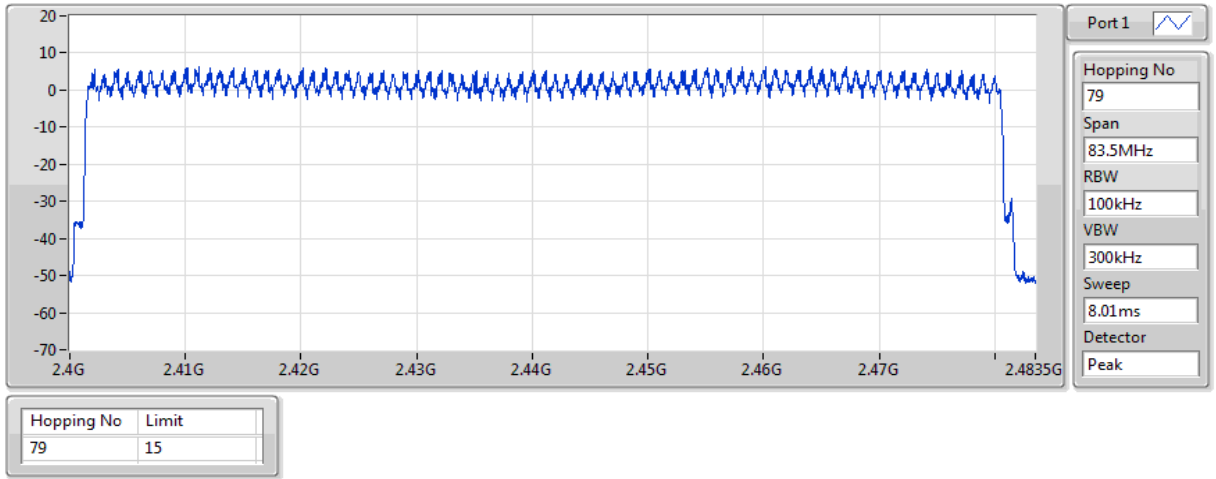



## 3.6 20dB and Occupied Bandwidth

### 3.6.1 Test Procedures


#### 20dB Bandwidth

1. Set RBW=20kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak , Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set RBW=20kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample , Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

### 3.6.2 Test Setup



### 3.6.3 Test result of 20dB and Occupied Bandwidth

<b>Ambient Condition</b>	22°C / 65%	<b>Tested By</b>	Roger Lu
--------------------------	------------	------------------	----------

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	938.406k	897.25k	897KF1D	938.406k	890.014k
BT-EDR(2Mbps)	1.308M	1.19M	1M19G1D	1.286M	1.179M
BT-EDR(3Mbps)	1.301M	1.201M	1M20G1D	1.283M	1.176M

Max-N dB = Maximum 20dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 20dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

#### Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	938.406k	890.014k
2441MHz	Pass	Inf	938.406k	897.25k
2480MHz	Pass	Inf	938.406k	893.632k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.286M	1.179M
2441MHz	Pass	Inf	1.308M	1.183M
2480MHz	Pass	Inf	1.293M	1.19M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.283M	1.179M
2441MHz	Pass	Inf	1.301M	1.176M
2480MHz	Pass	Inf	1.283M	1.201M

Port X-N dB = Port X 20dB down bandwidth;  
Port X-OBW = Port X 99% occupied bandwidth

**BT-BR(1Mbps)**

**EBW-FS**


**2402MHz**

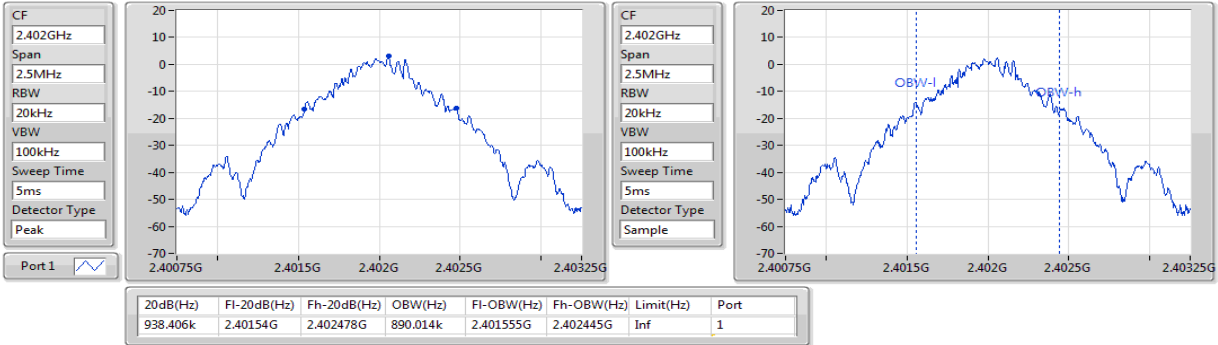

**BT-BR(1Mbps)**

**EBW-FS**


**2441MHz**

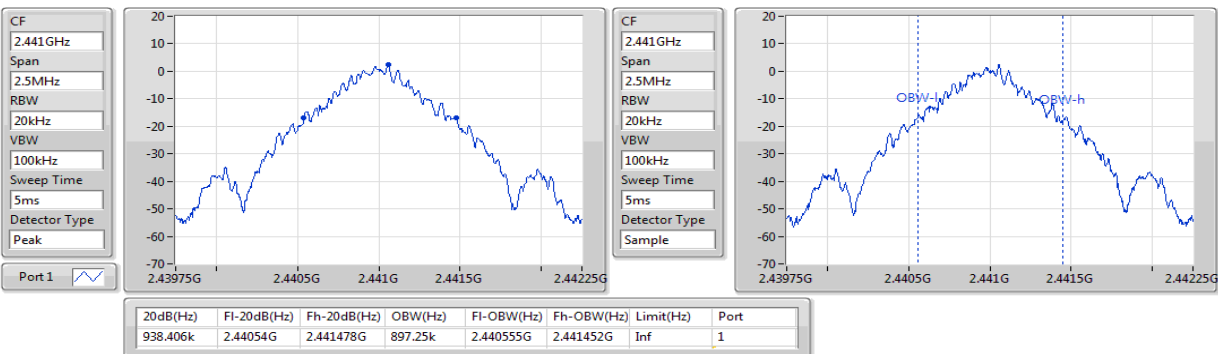

### BT-BR(1Mbps)

EBW-FS


2480MHz

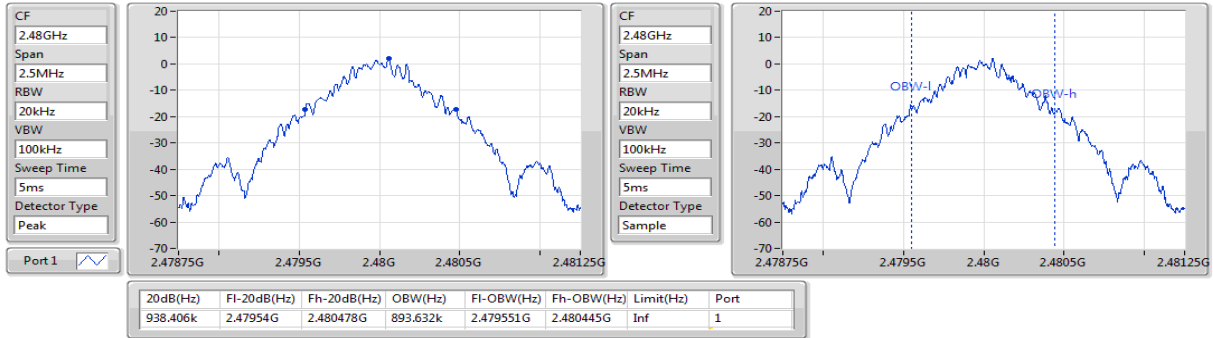

### BT-EDR(2Mbps)

EBW-FS


2402MHz

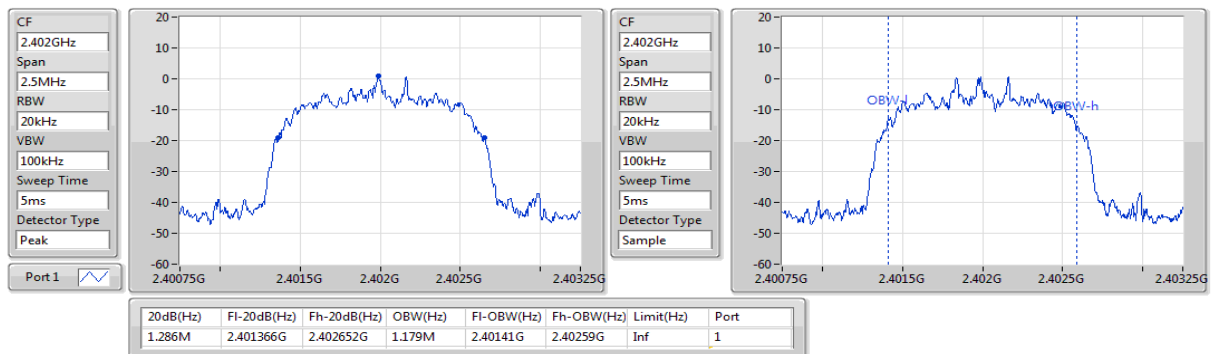

### BT-EDR(2Mbps)

### EBW-FS


#### 2441MHz

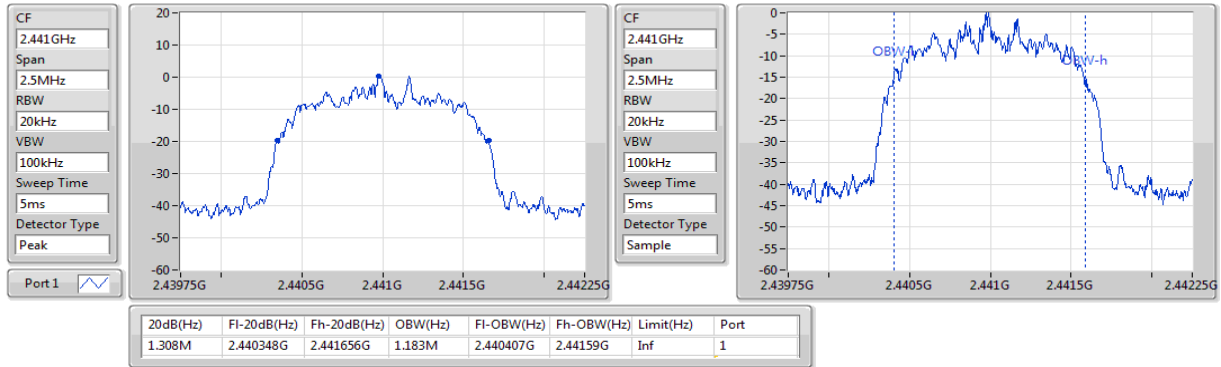

### BT-EDR(2Mbps)

### EBW-FS


#### 2480MHz

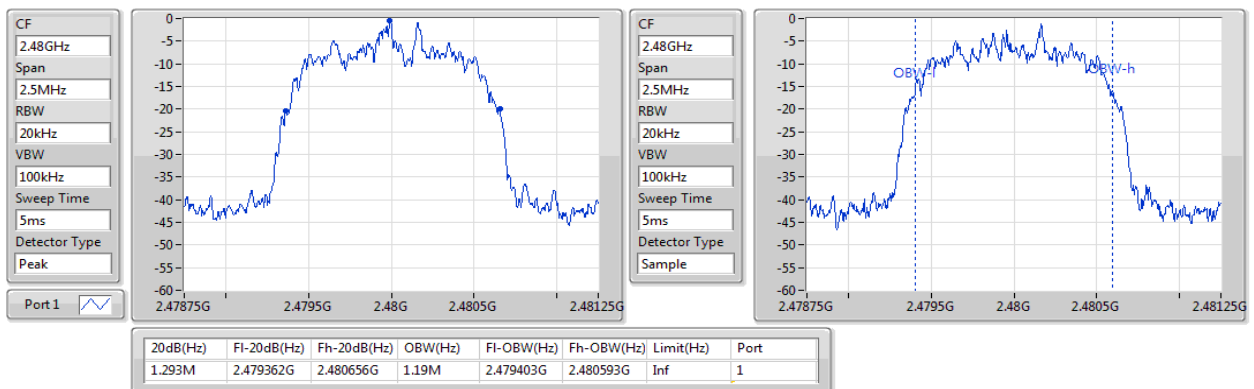

**BT-EDR(3Mbps)**

**EBW-FS**


**2402MHz**

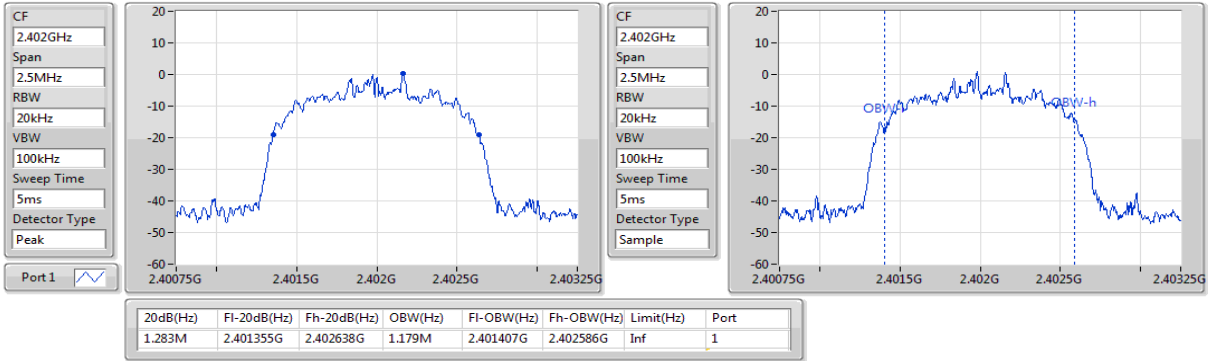

**BT-EDR(3Mbps)**

**EBW-FS**

**2441MHz**

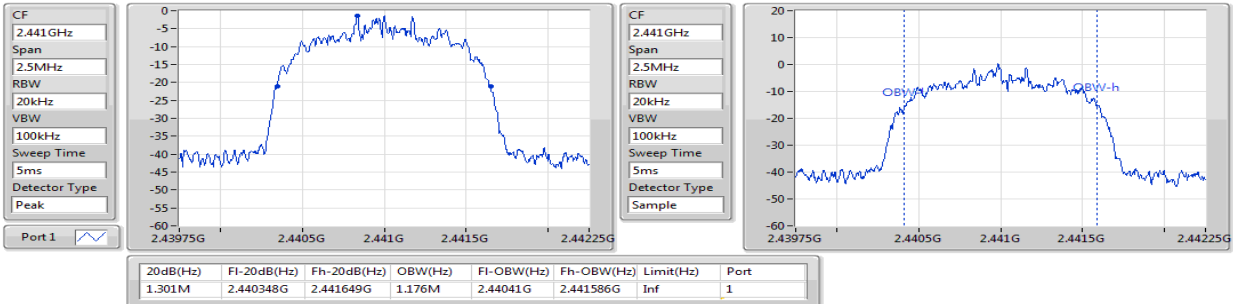


**BT-EDR(3Mbps)**


**EBW-FS**

**2480MHz**

CF  
2.48GHz  
Span  
2.5MHz  
RBW  
20kHz  
VBW  
100kHz  
Sweep Time  
5ms  
Detector Type  
Peak

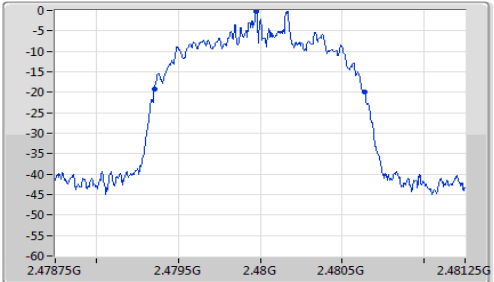

CF  
2.48GHz  
Span  
2.5MHz  
RBW  
20kHz  
VBW  
100kHz  
Sweep Time  
5ms  
Detector Type  
Sample

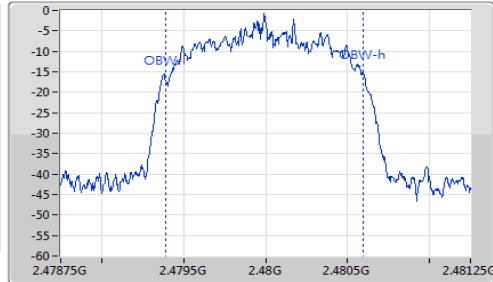

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.283M	2.479355G	2.480638G	1.201M	2.479392G	2.480593G	Inf	1

## 3.7 Channel Separation


### 3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 3.7.2 Test Procedures

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

### 3.7.3 Test Setup





### 3.7.4 Test result of Channel Separation

<b>Ambient Condition</b>	22°C / 65%	<b>Tested By</b>	Roger Lu
--------------------------	------------	------------------	----------

#### Summary

Mode	Max-Space (Hz)	Min-Space (Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1.004348M	1.004348M
BT-EDR(2Mbps)	1.004348M	1M
BT-EDR(3Mbps)	1.004348M	1M


#### Result

Mode	Result	Fl (Hz)	Fh (Hz)	Ch.Space (Hz)	Limit (Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.401987G	2.402991G	1.004348M	624.978396k
2441MHz	Pass	2.440987G	2.441991G	1.004348M	624.978396k
2480MHz	Pass	2.478987G	2.479991G	1.004348M	624.978396k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.401987G	2.402991G	1.004348M	856.476k
2441MHz	Pass	2.440991G	2.441991G	1M	871.128k
2480MHz	Pass	2.478987G	2.479991G	1.004348M	861.138k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.401987G	2.402991G	1.004348M	854.478k
2441MHz	Pass	2.440987G	2.441987G	1M	866.466k
2480MHz	Pass	2.478987G	2.479991G	1.004348M	854.478k

**BT-BR(1Mbps)**

**Channel Separation-FS**


**2.402G/2.403GHz**

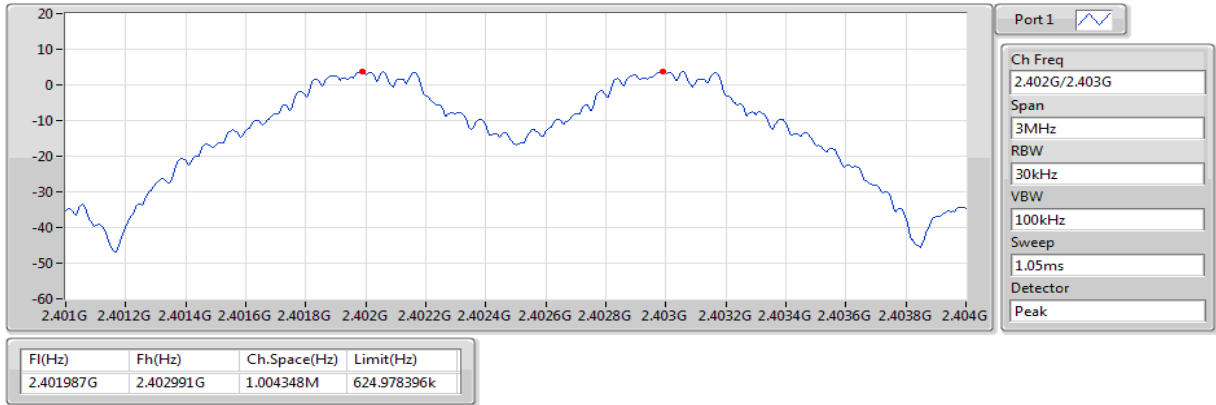

**BT-BR(1Mbps)**

**Channel Separation-FS**


**2.441G/2.442GHz**

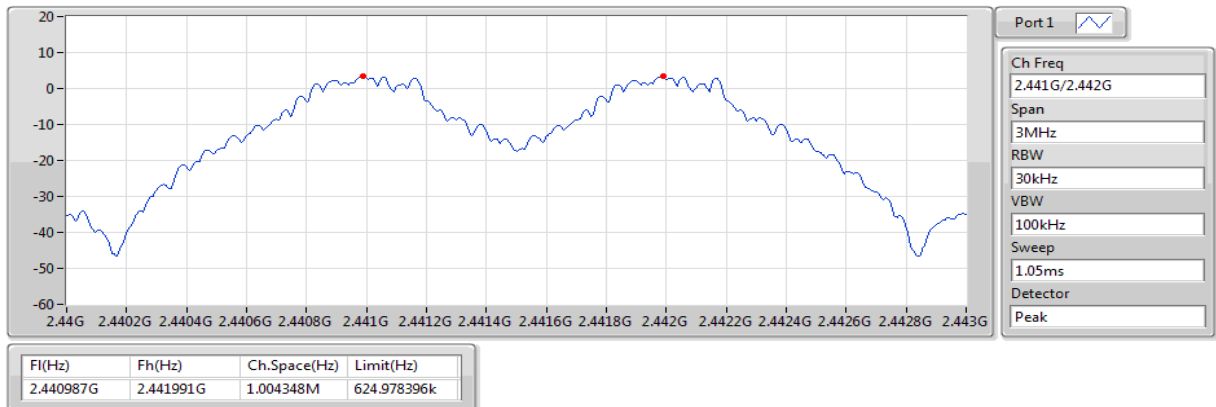

### BT-BR(1Mbps)

### Channel Separation-FS


2.48G/2.479GHz

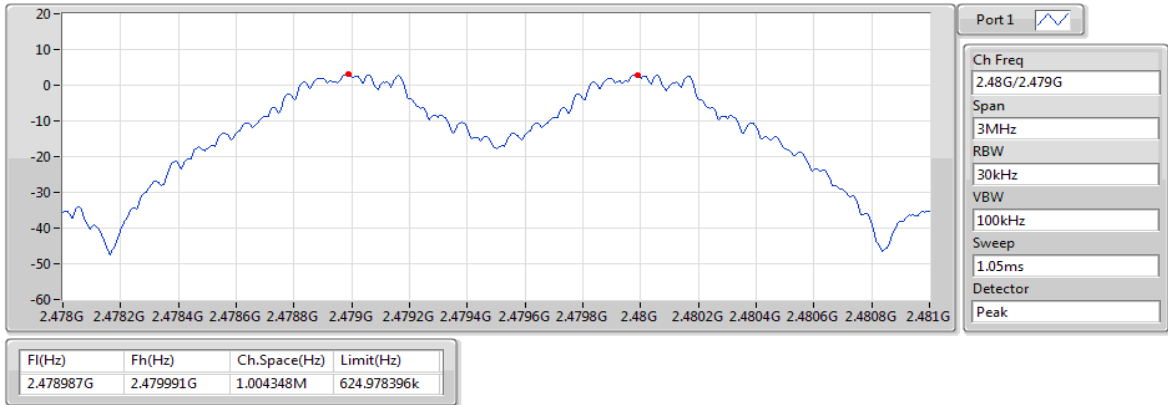

### BT-EDR(2Mbps)

### Channel Separation-FS


2.402G/2.403GHz

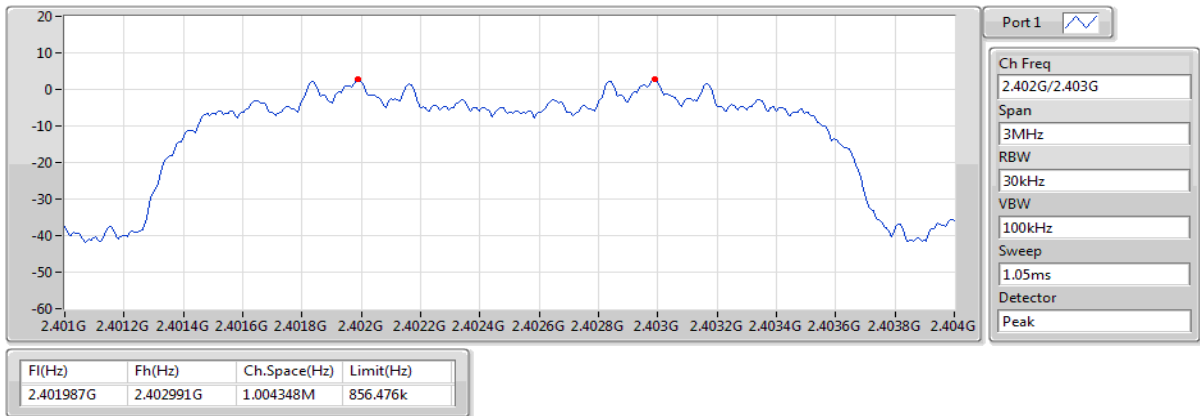

### BT-EDR(2Mbps)

### Channel Separation-FS


2.441G/2.442GHz

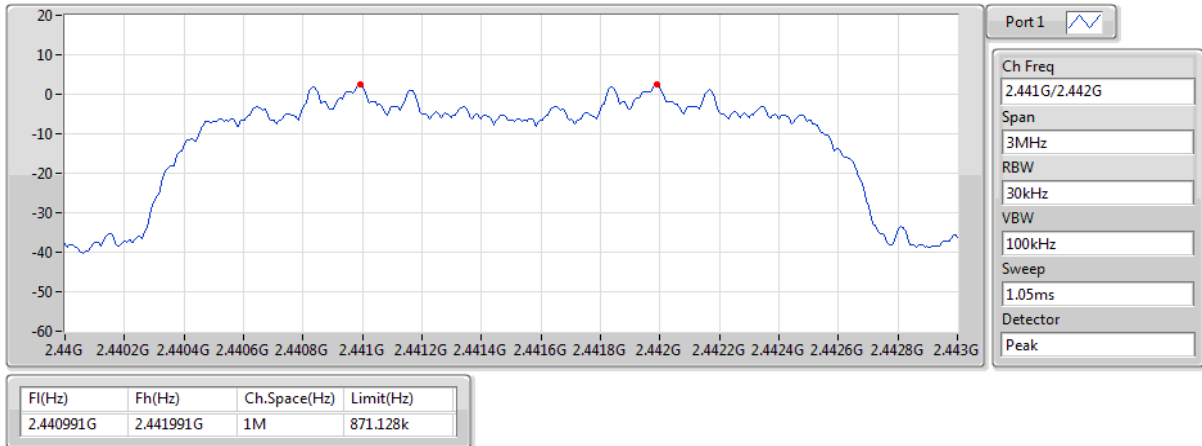

### BT-EDR(2Mbps)

### Channel Separation-FS


2.48G/2.479GHz

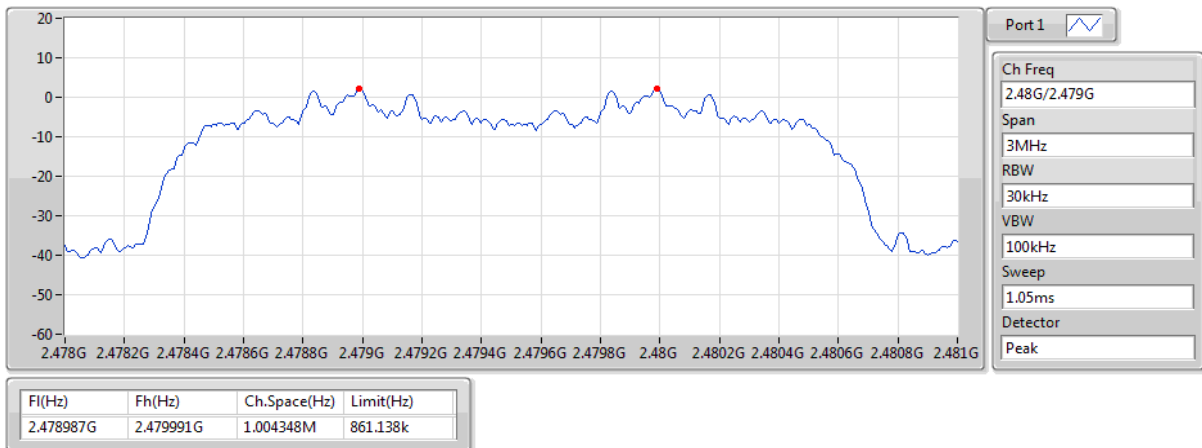

### BT-EDR(3Mbps)

### Channel Separation-FS


2.402G/2.403GHz

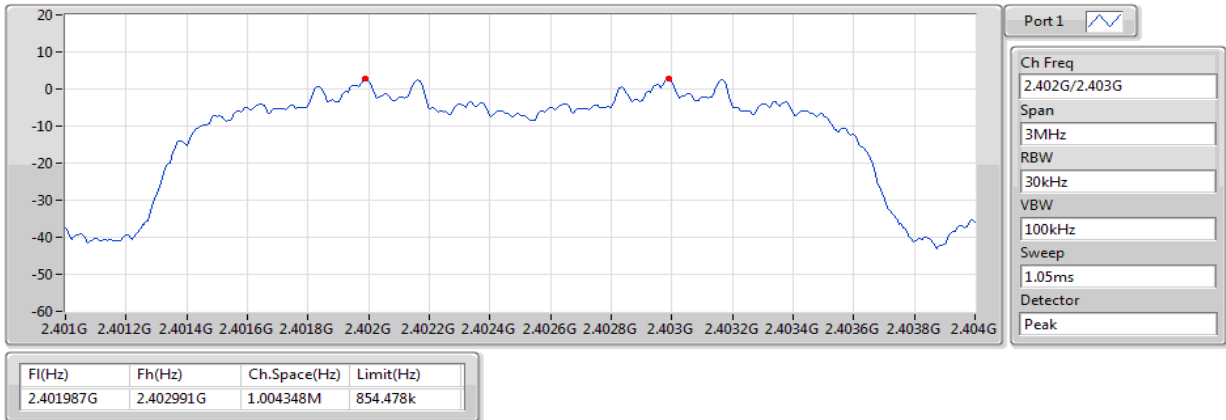

### BT-EDR(3Mbps)


### Channel Separation-FS

2.441G/2.442GHz

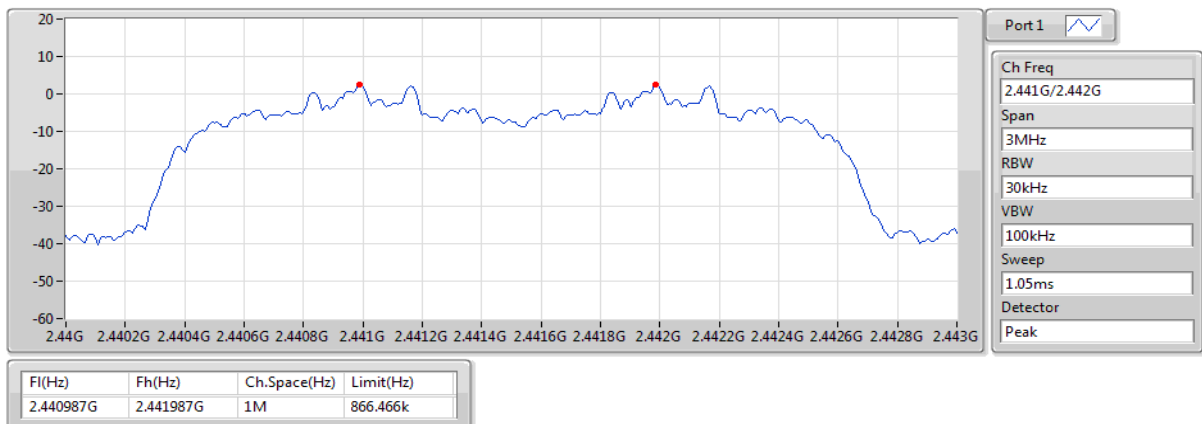

**BT-EDR(3Mbps)  
2.48G/2.479GHz**

**Channel Separation-FS**

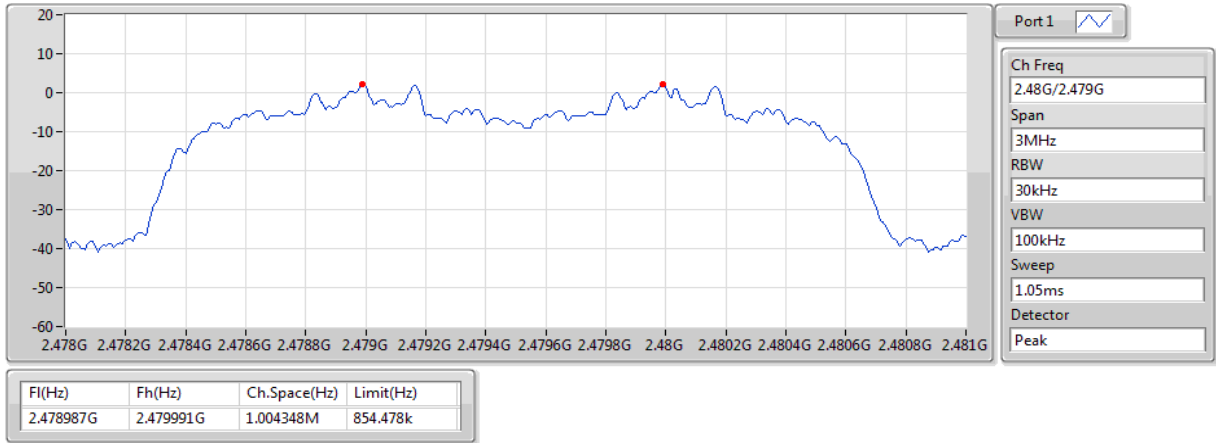

## 3.8 Number of Dwell Time


### 3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 3.8.2 Test Procedures

1. Set RBW=300 kHz, VBW=1 MHz, Sweep time=8 ms, Detector=Peak, Span=0 Hz, Trace max hold.
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. Set RBW=300 kHz, VBW=1 MHz, Sweep time=5 s / 2 s, Detector=Peak, Span=0 Hz, Trace max hold.
4. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission.
5. Set RBW=300 kHz, VBW=1 MHz, Sweep time=31.6 s / 8 s, Detector=Peak, Span=0 Hz, Trace max hold.
6. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission of entire time cycle.

### 3.8.3 Test Setup

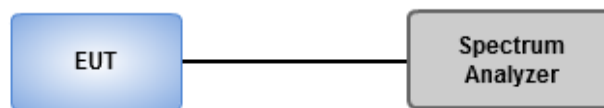

### 3.8.4 Test Result of Dwell Time

<b>Ambient Condition</b>	22°C / 65%	<b>Tested By</b>	Roger Lu
--------------------------	------------	------------------	----------

#### Summary

Mode	Max-Dwell (s)
2.4-2.4835GHz	-
BT-BR(1Mbps)	346.5809m_DH5
BT-EDR(2Mbps)	328.70952m_DH5
BT-EDR(3Mbps)	310.66276m_DH5
BT-BR-AFH(1Mbps)	288.625m_DH5-AFH
BT-EDR-AFH(2Mbps)	312.066m_DH5-AFH
BT-EDR-AFH(3Mbps)	312.282m_DH5-AFH

#### Result/ Non AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 5 s
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.34658	0.4	2.88625	19
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.32871	0.4	2.88950	18
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.31066	0.4	2.89150	17

Note 1: Dwell time =Number of transmission in a 5 second x Tx On Time x 6.32

Note 2: DH5 was the worst mode.



**Result/ AFH mode**


<b>Mode</b>	<b>Result</b>	<b>Period (s)</b>	<b>Dwell (s)</b>	<b>Limit (s)</b>	<b>Tx On (ms)</b>	<b>Number of transmission in a 2 s</b>
BT-BR-AFH(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.28863	0.4	2.88625	25
BT-EDR-AFH(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.31207	0.4	2.88950	27
BT-EDR-AFH(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.31228	0.4	2.89150	27

Note 1: Dwell time =Number of transmission in a 2 second x Tx On Time x 4

Note 2: DH5 was the worst mode.


**BT-BR(1Mbps)**  
**2402MHz**

**Dwell-FS**

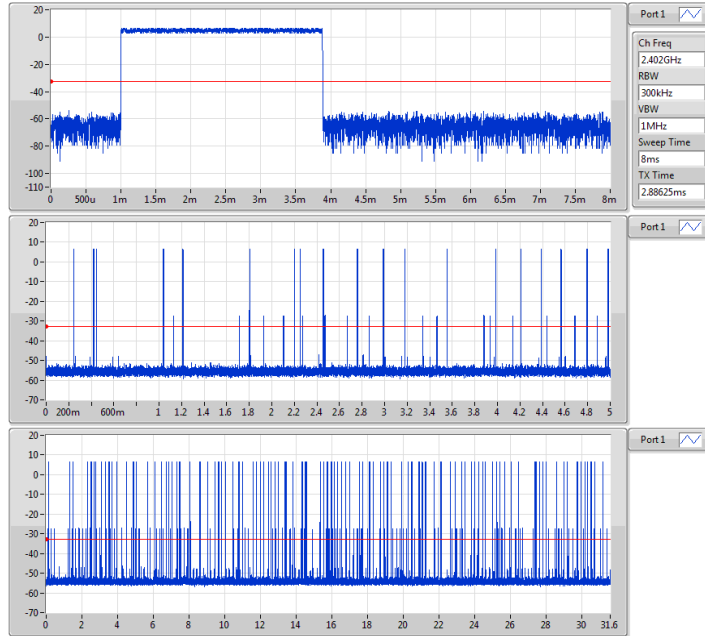

**BT-EDR(2Mbps)**  
**2402MHz**


**Dwell-FS**

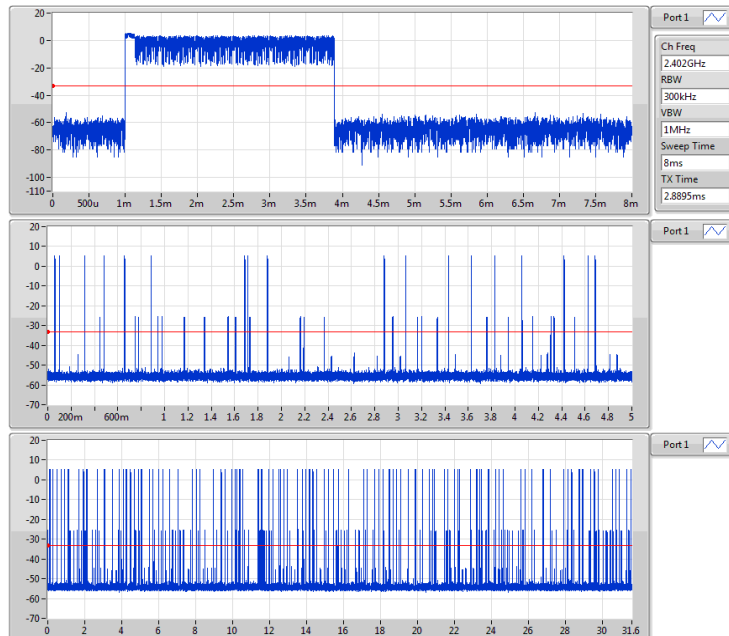

**BT-EDR(3Mbps)**

**Dwell-FS**


**2402MHz**

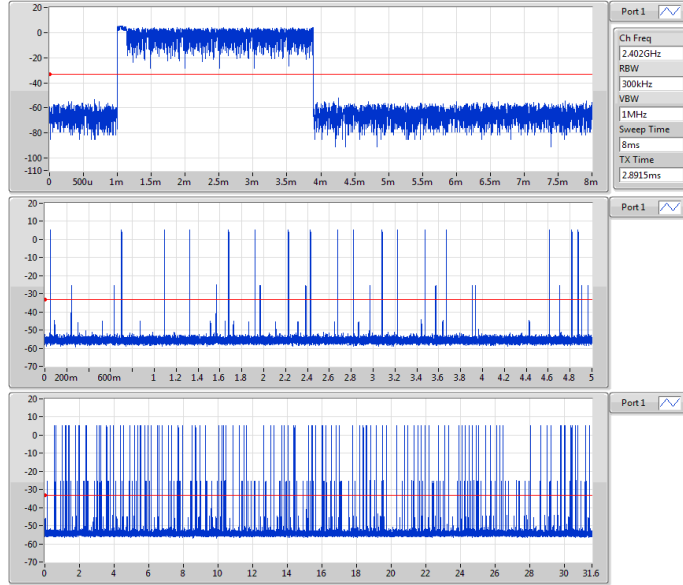

**BT-BR-AFH(1Mbps)**


**Dwell-FS**

**2402MHz**

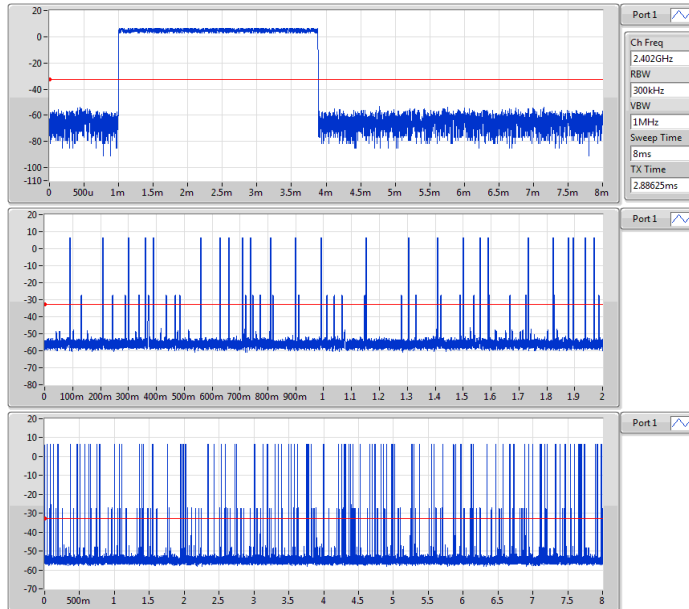

**BT-EDR-AFH(2Mbps)**  
**2402MHz**

**Dwell-FS**

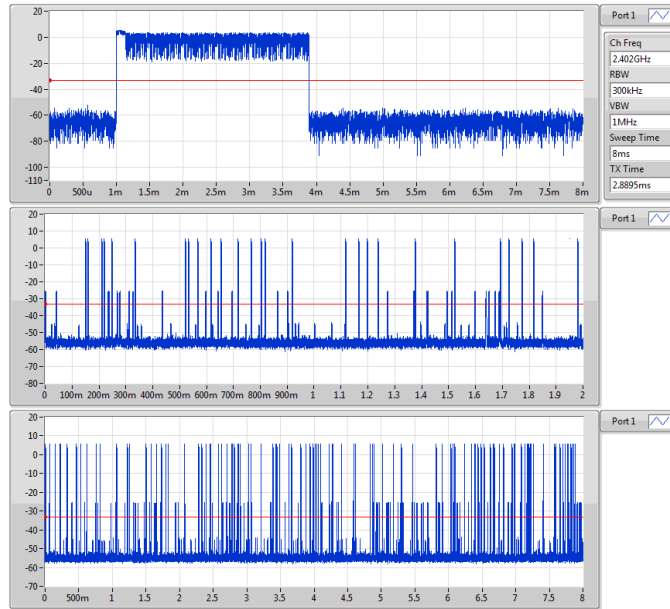

**BT-EDR-AFH(3Mbps)**  
**2402MHz**

**Dwell-FS**



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: [ICC\\_Service@icertifi.com.tw](mailto:ICC_Service@icertifi.com.tw)

==END==