



FCC RADIO TEST REPORT

FCC ID : HLZA22002
Equipment : Tablet PC
Brand Name : acer
Model Name : A22002
Marketing Name : Iconia Tab A10;A10-11
Applicant : Acer Incorporated
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New
Taipei City 22181, Taiwan (R.O.C)
Manufacturer : Acer Incorporated
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New
Taipei City 22181, Taiwan (R.O.C)
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 06, 2023 and testing was performed from Apr. 21, 2023 to May 22, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements	21
4 List of Measuring Equipment.....	22
5 Measurement Uncertainty	23
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	2.29 dB under the limit at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	9.41 dB under the limit at 0.151 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Danny Lee
Report Producer: Ming Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.	
Antenna Type WLAN: PCB Antenna Bluetooth: PCB Antenna GPS / Glonass / Galileo: PIFA Antenna	

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	3.65

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH12-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

The final test modes include the worst data rates for each modulation shown in the table below.

Single Antenna


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + H-pattern + Earphone + SD Card + USB Cable (Charging from AC Adapter)
	Mode 2 :Bluetooth Link + WLAN (5GHz) Link + MPEG4 + Earphone + SD Card + USB Cable (Charging from AC Adapter)
	Mode 3 :Bluetooth Idle + WLAN (2.4GHz) Idle + Camera (Front) + Earphone + SD + USB Cable (Data Link With Notebook)
	Mode 4 :Bluetooth Idle + WLAN (5GHz) Idle + Camera (Rear) + Earphone + SD + USB Cable (Data Link With Notebook)
Remark:	
1. The worst case of Conducted Emission is mode 3; only the test data of it was reported.	
2. Data Link with Notebook means data application transferred mode between EUT and Notebook.	

Ch. #	2400-2483.5 MHz		
	802.11b	802.11g	802.11n HT20
Low	01	01	01
Middle	06	06	06
High	11	11	11

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

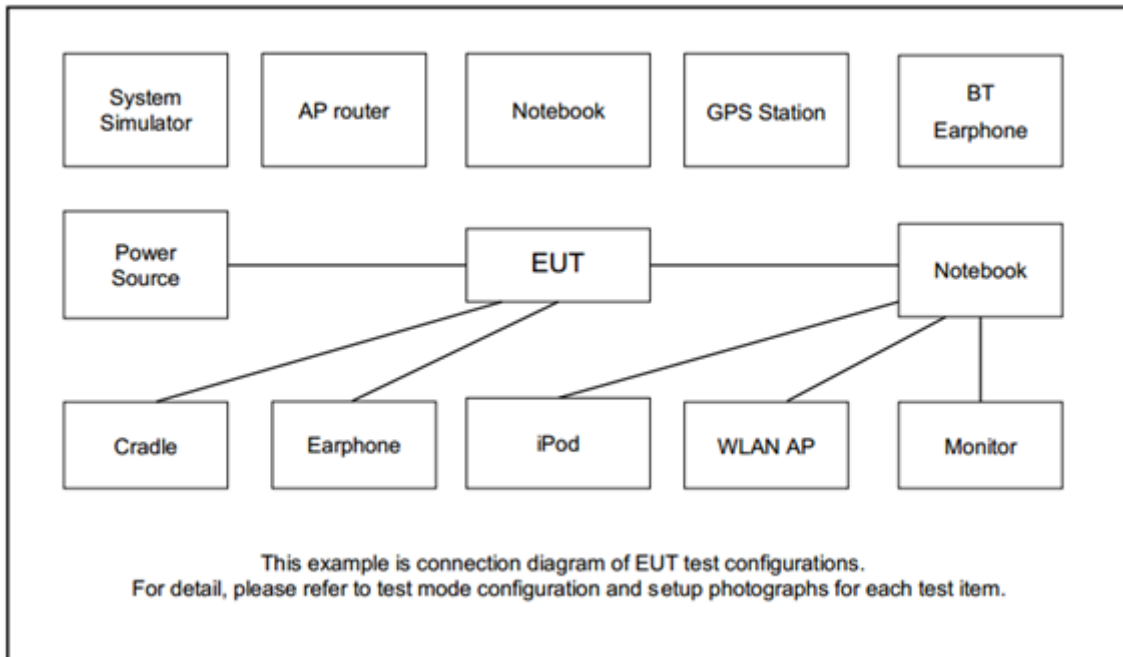

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded, 1.2m	N/A
5.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0m	N/A
6.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0m	N/A



2.5 EUT Operation Test Setup

The RF test items, make the EUT (SW: sys_mssi_t_64_ab-userdebug 12 SP1A.210812.016 1681386744 releas-keys) get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

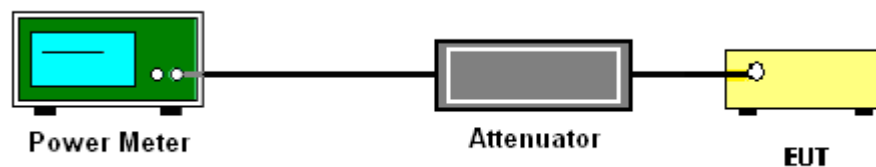

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

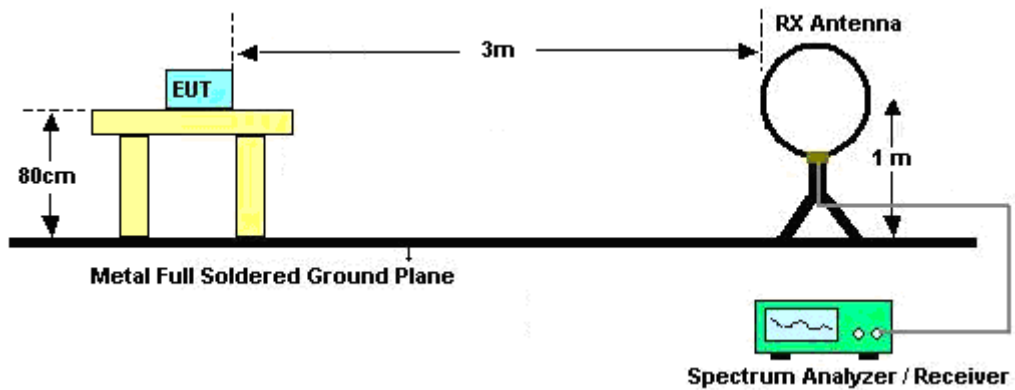


For radiated emissions from 30MHz to 1GHz

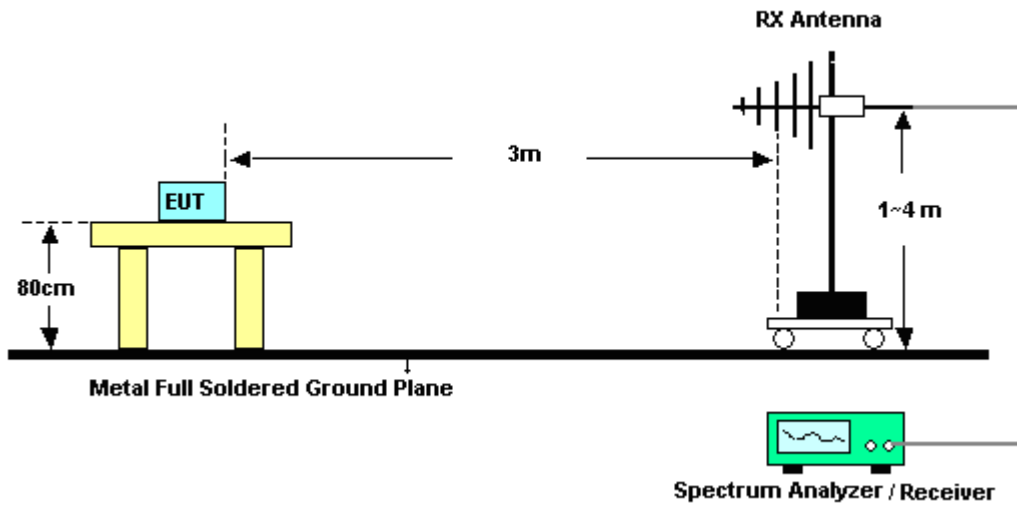

For radiated test from 1GHz to 18GHz

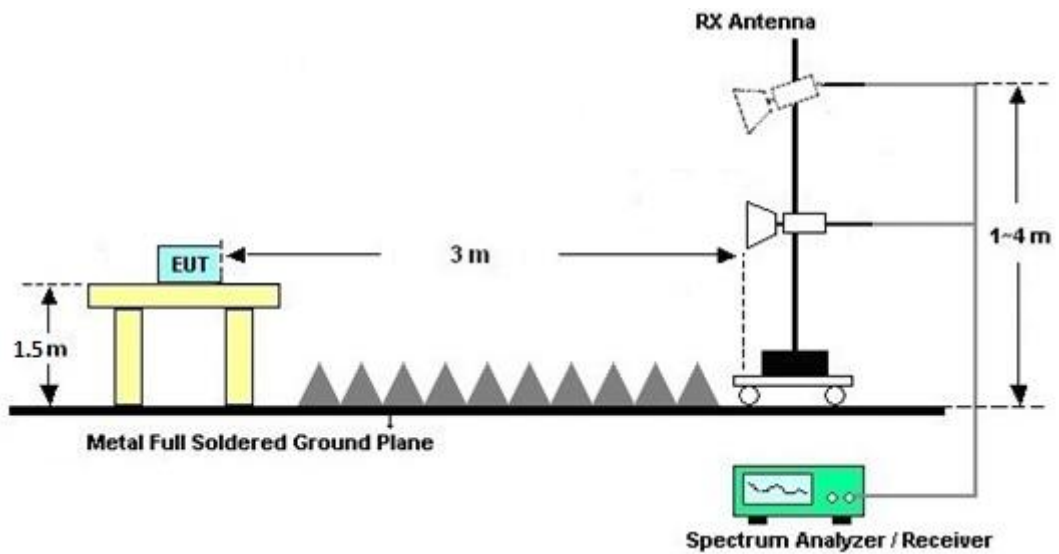

For radiated test above 18GHz

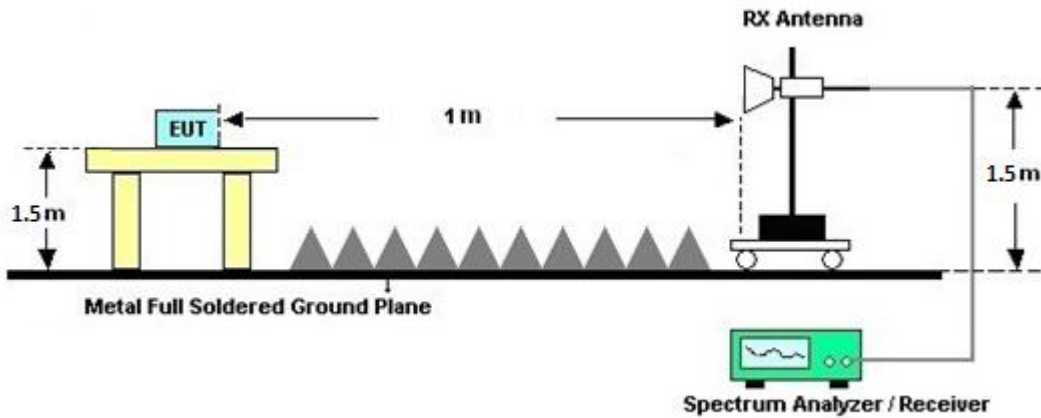

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

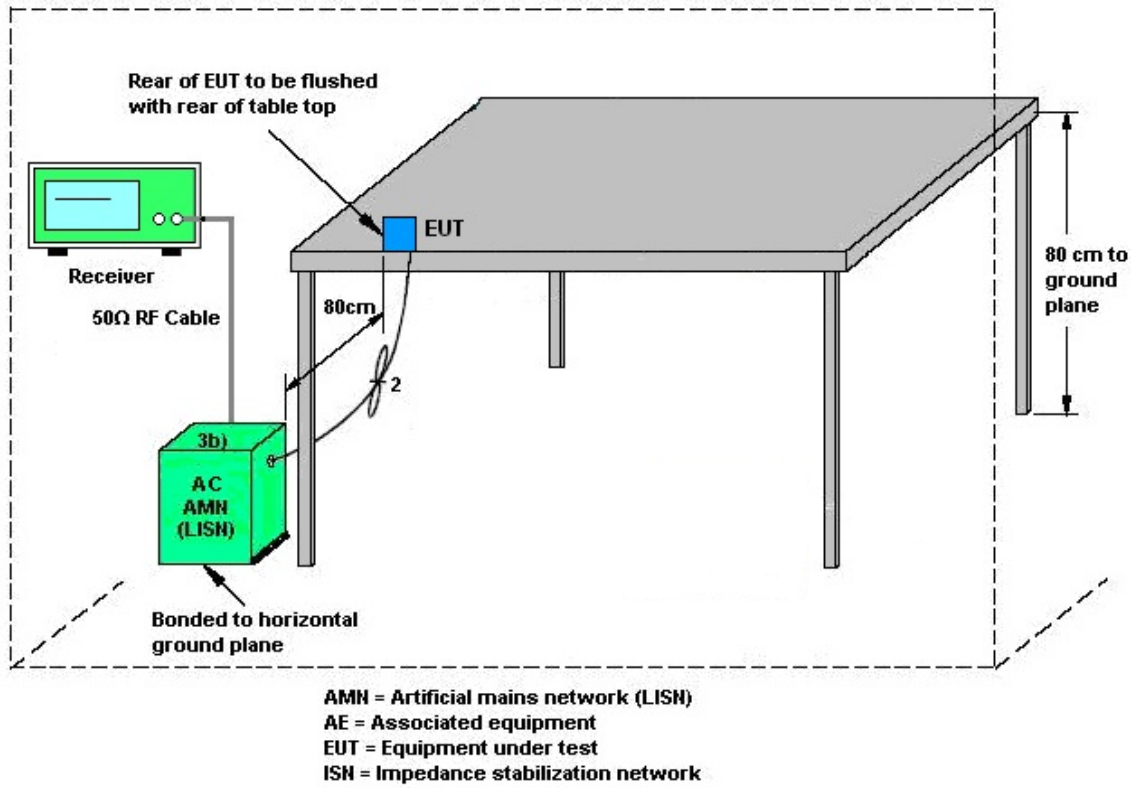

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 13, 2022	Apr. 27, 2023 May 19, 2023	Dec. 12, 2023	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GHz(amp)	Aug. 03, 2022	Apr. 27, 2023 May 19, 2023	Aug. 02, 2023	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 21, 2023	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 21, 2023	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Nov. 01, 2022	Apr. 21, 2023	Oct. 31, 2023	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 15, 2023	Apr. 21, 2023	Mar. 14, 2024	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 05, 2023	Apr. 21, 2023	Mar. 04, 2024	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 13, 2023	Apr. 21, 2023	Mar. 12, 2024	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 06, 2022	Apr. 21, 2023	Oct. 05, 2023	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	May 10, 2023~ May 22, 2023	Sep. 19, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Nov. 10, 2022	May 10, 2023~ May 22, 2023	Nov. 09, 2023	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Aug. 09, 2022	May 10, 2023~ May 22, 2023	Aug. 08, 2023	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz-40GHz	Nov. 24, 2022	May 10, 2023~ May 22, 2023	Nov. 23, 2023	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 21, 2023	May 10, 2023~ May 22, 2023	Mar. 20, 2024	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 24, 2022	May 10, 2023~ May 22, 2023	May 23, 2023	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz-18GHz	Dec. 21, 2022	May 10, 2023~ May 22, 2023	Dec. 20, 2023	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2022	May 10, 2023~ May 22, 2023	Dec. 06, 2023	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Jan. 10, 2023	May 10, 2023~ May 22, 2023	Jan. 09, 2024	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12 SS	SN2	1.2GHz Low Pass Filter	Mar. 13, 2023	May 10, 2023~ May 22, 2023	Mar. 12, 2024	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN2	3GHz High Pass Filter	Jul. 11, 2022	May 10, 2023~ May 22, 2023	Jul. 10, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 15, 2023	May 10, 2023~ May 22, 2023	Mar. 14, 2024	Radiation (03CH12-HY)
RF Cable	TUYUE	RG142D-NmB NCm-3000	H0620	9kHz~30MHz	Mar. 14, 2023	May 10, 2023~ May 22, 2023	Mar. 13, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 20, 2022	May 10, 2023~ May 22, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15539/4	30MHz~18GHz	Dec. 20, 2022	May 10, 2023~ May 22, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 20, 2022	May 10, 2023~ May 22, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Dec. 20, 2022	May 10, 2023~ May 22, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	May 10, 2023~ May 22, 2023	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May 10, 2023~ May 22, 2023	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	May 10, 2023~ May 22, 2023	N/A	Radiation (03CH12-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.46 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.40 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.40 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu, James Li	Temperature:	21~25	°C
Test Date:	2023/4/27~2023/5/19	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	12.94	-	8.10	-	0.50	Pass
11b	1Mbps	1	6	2437	13.14	-	8.10	-	0.50	Pass
11b	1Mbps	1	11	2462	13.19	-	8.08	-	0.50	Pass
11g	6Mbps	1	1	2412	12.84	-	8.10	-	0.50	Pass
11g	6Mbps	1	6	2437	13.19	-	8.10	-	0.50	Pass
11g	6Mbps	1	11	2462	12.79	-	8.10	-	0.50	Pass
HT20	MCS0	1	1	2412	18.78	-	16.34	-	0.50	Pass
HT20	MCS0	1	6	2437	19.18	-	15.72	-	0.50	Pass
HT20	MCS0	1	11	2462	18.58	-	13.92	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)		Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail	
					Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	17.00	-	30.00	-	3.65	-	20.65	-	36.00	-	Pass	
11b	1Mbps	1	6	2437	16.80	-	30.00	-	3.65	-	20.45	-	36.00	-	Pass	
11b	1Mbps	1	11	2462	16.80	-	30.00	-	3.65	-	20.45	-	36.00	-	Pass	
11g	6Mbps	1	1	2412	16.10	-	30.00	-	3.65	-	19.75	-	36.00	-	Pass	
11g	6Mbps	1	6	2437	17.00	-	30.00	-	3.65	-	20.65	-	36.00	-	Pass	
11g	6Mbps	1	11	2462	13.80	-	30.00	-	3.65	-	17.45	-	36.00	-	Pass	
HT20	MCS0	1	1	2412	15.50	-	30.00	-	3.65	-	19.15	-	36.00	-	Pass	
HT20	MCS0	1	6	2437	16.80	-	30.00	-	3.65	-	20.45	-	36.00	-	Pass	
HT20	MCS0	1	11	2462	12.50	-	30.00	-	3.65	-	16.15	-	36.00	-	Pass	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density


2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)		DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-5.01	-	3.65	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-5.79	-	3.65	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-5.34	-	3.65	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-4.86	-	3.65	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-4.79	-	3.65	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-8.15	-	3.65	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-7.10	-	3.65	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-8.47	-	3.65	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-11.87	-	3.65	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.




6dB and 99% Occupied Bandwidth

<802.11b>

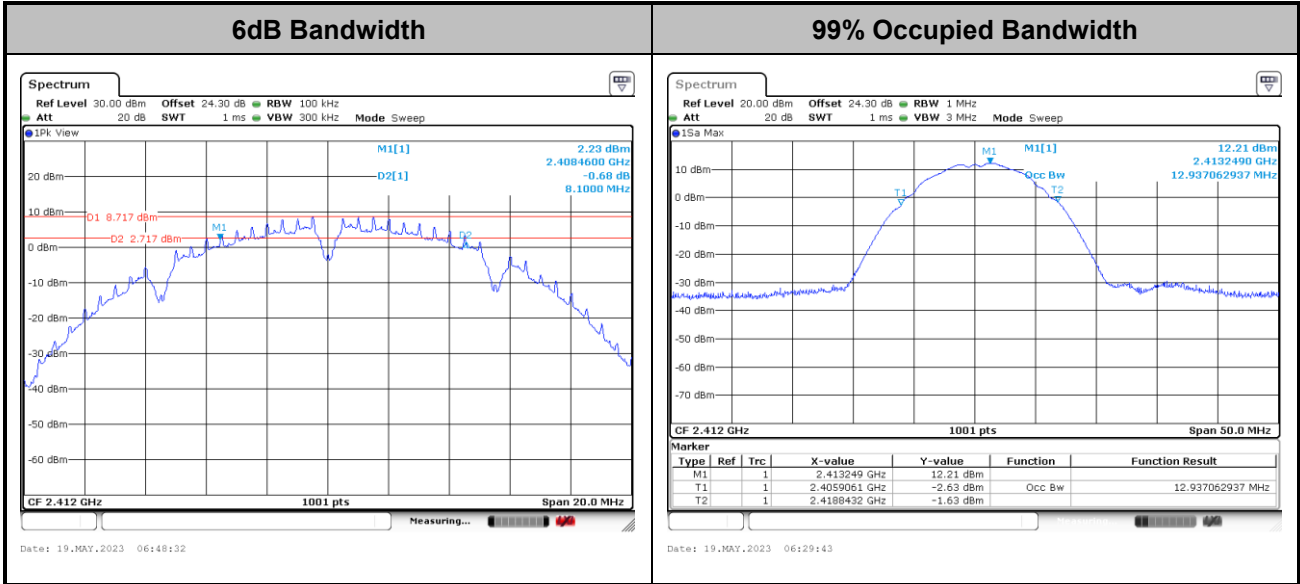

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

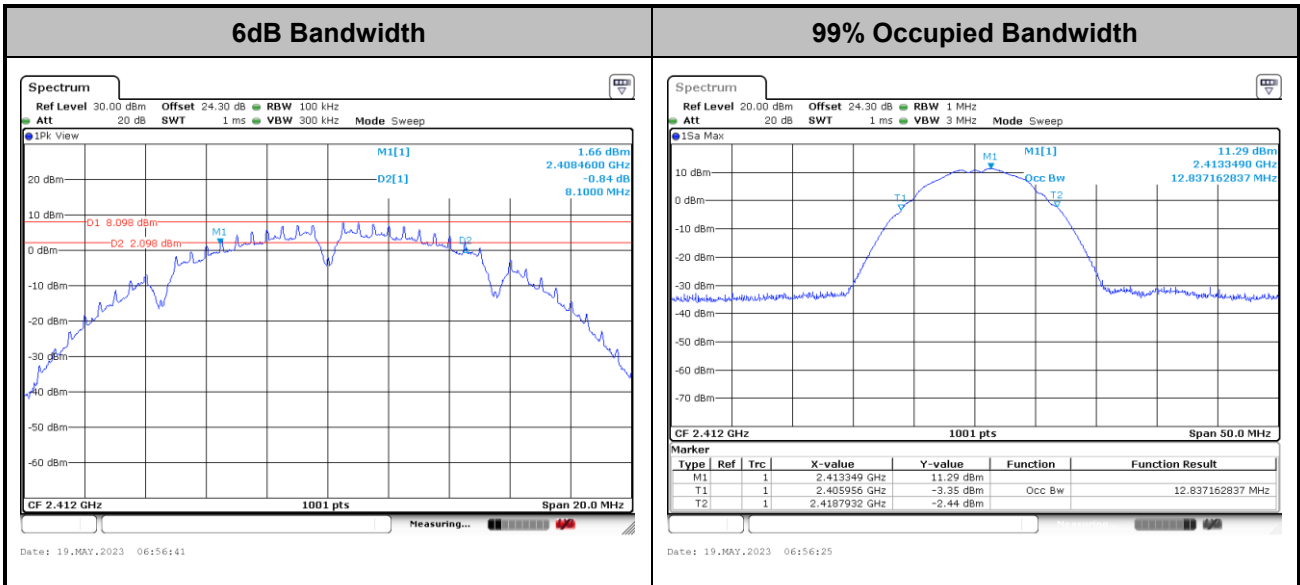

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11n HT20>

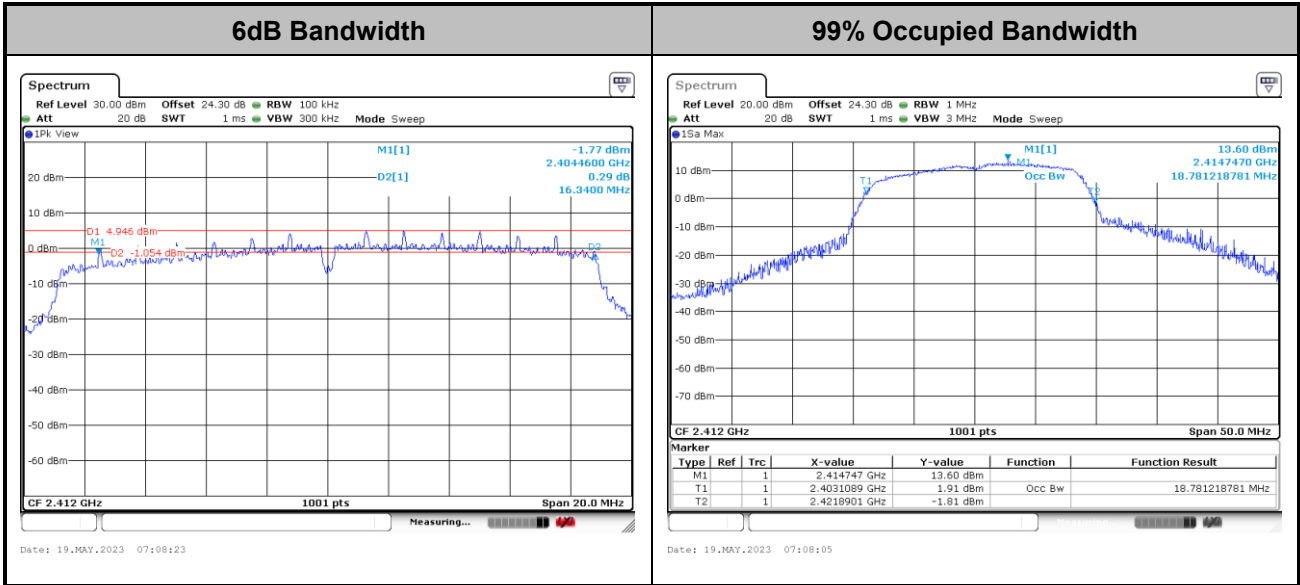


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Power Spectral Density(dBm/3kHz)

<802.11b>

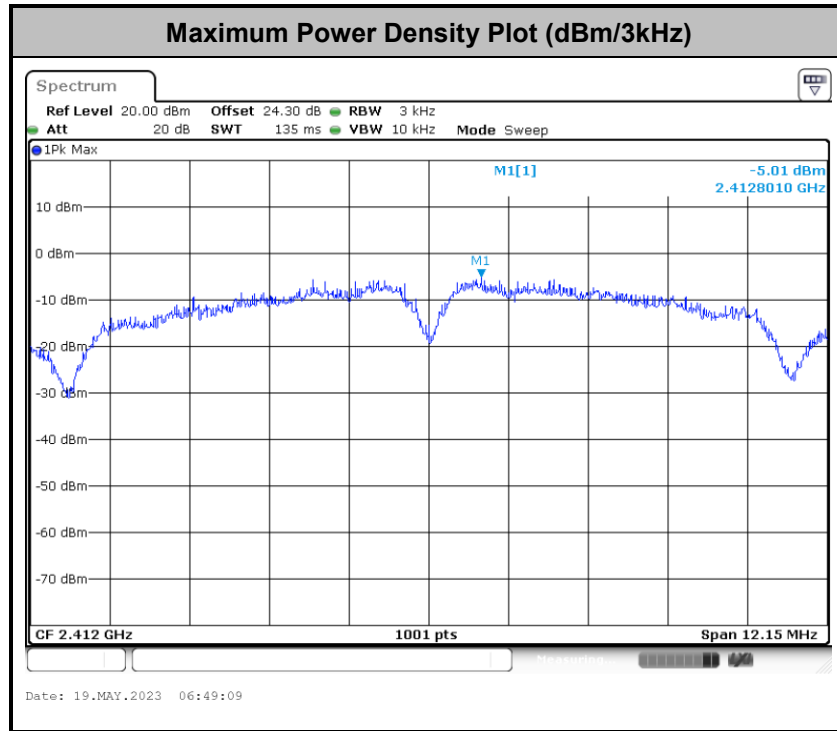


<802.11g>

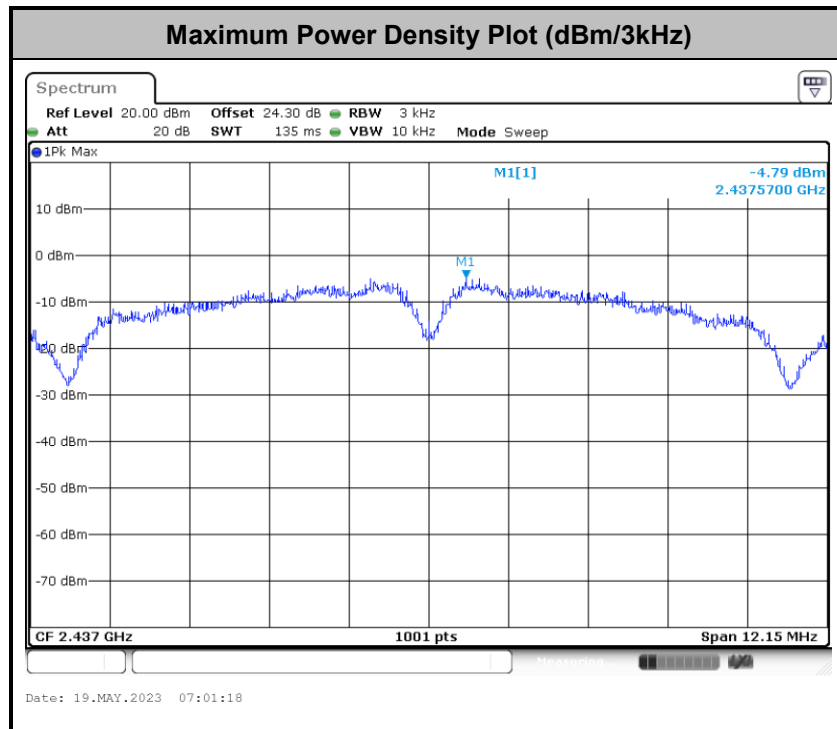



<802.11n HT20>

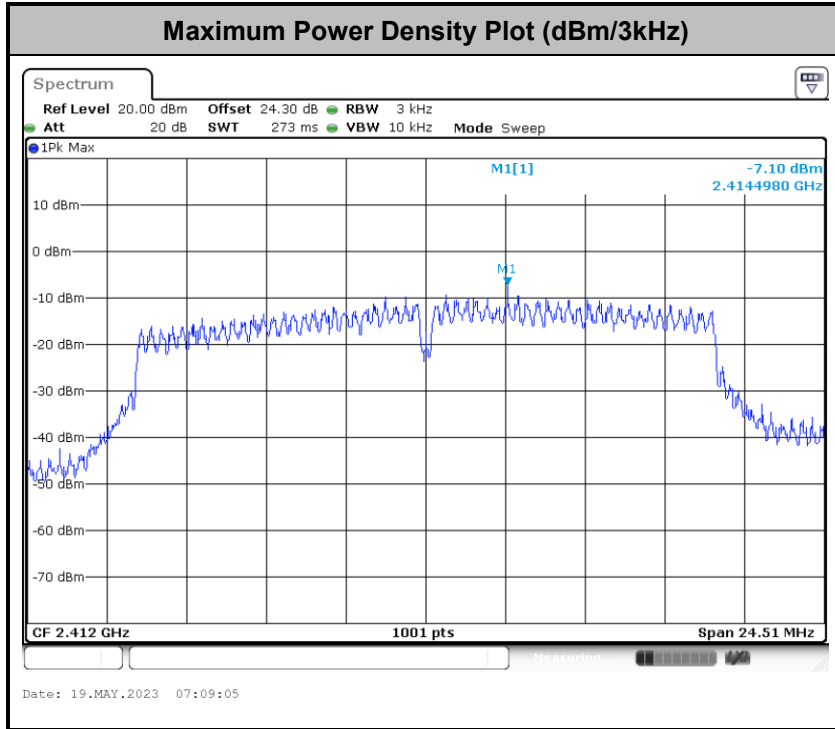




Band Edges and Spurious Emission

Number of TX = 1, Ant. 1 (Measured)


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

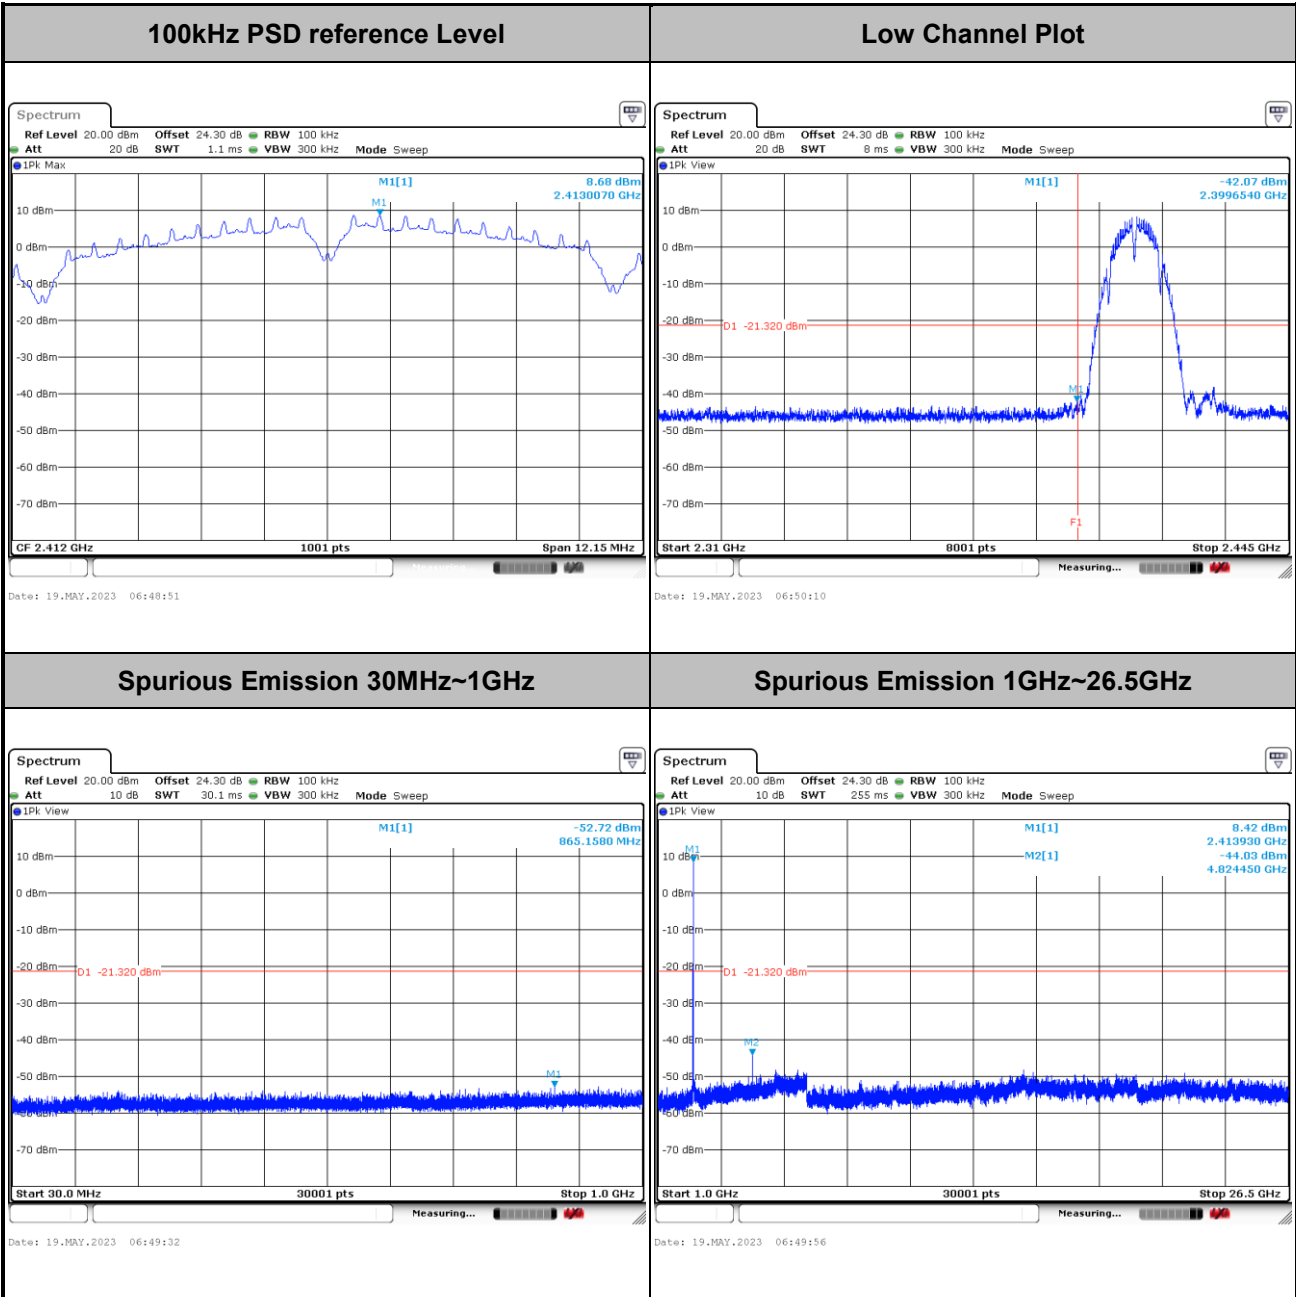





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level	Mid Channel Plot
-----------------------------------	-------------------------

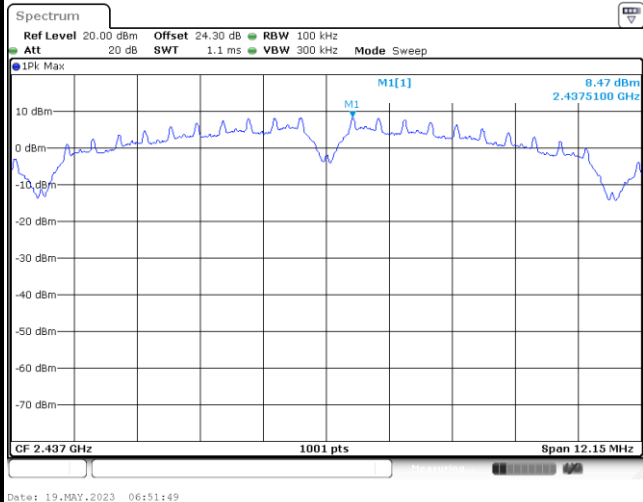


Spurious Emission 30MHz~1GHz	Spurious Emission 1GHz~26.5GHz
-------------------------------------	---------------------------------------

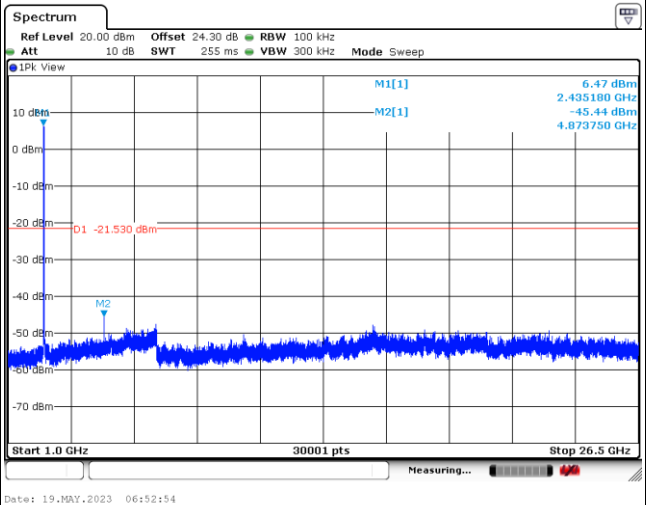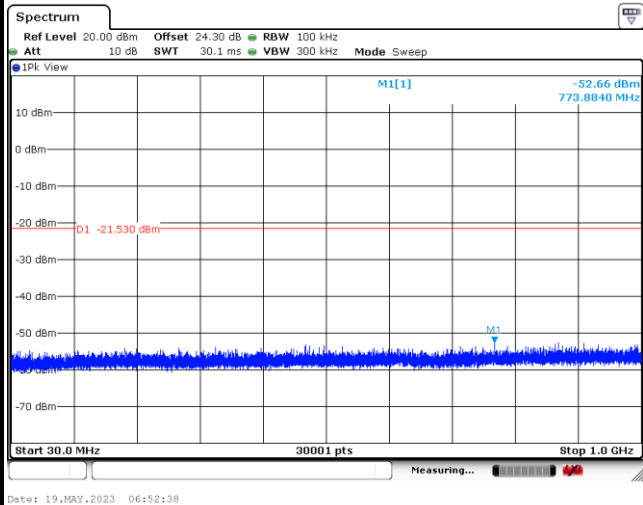




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

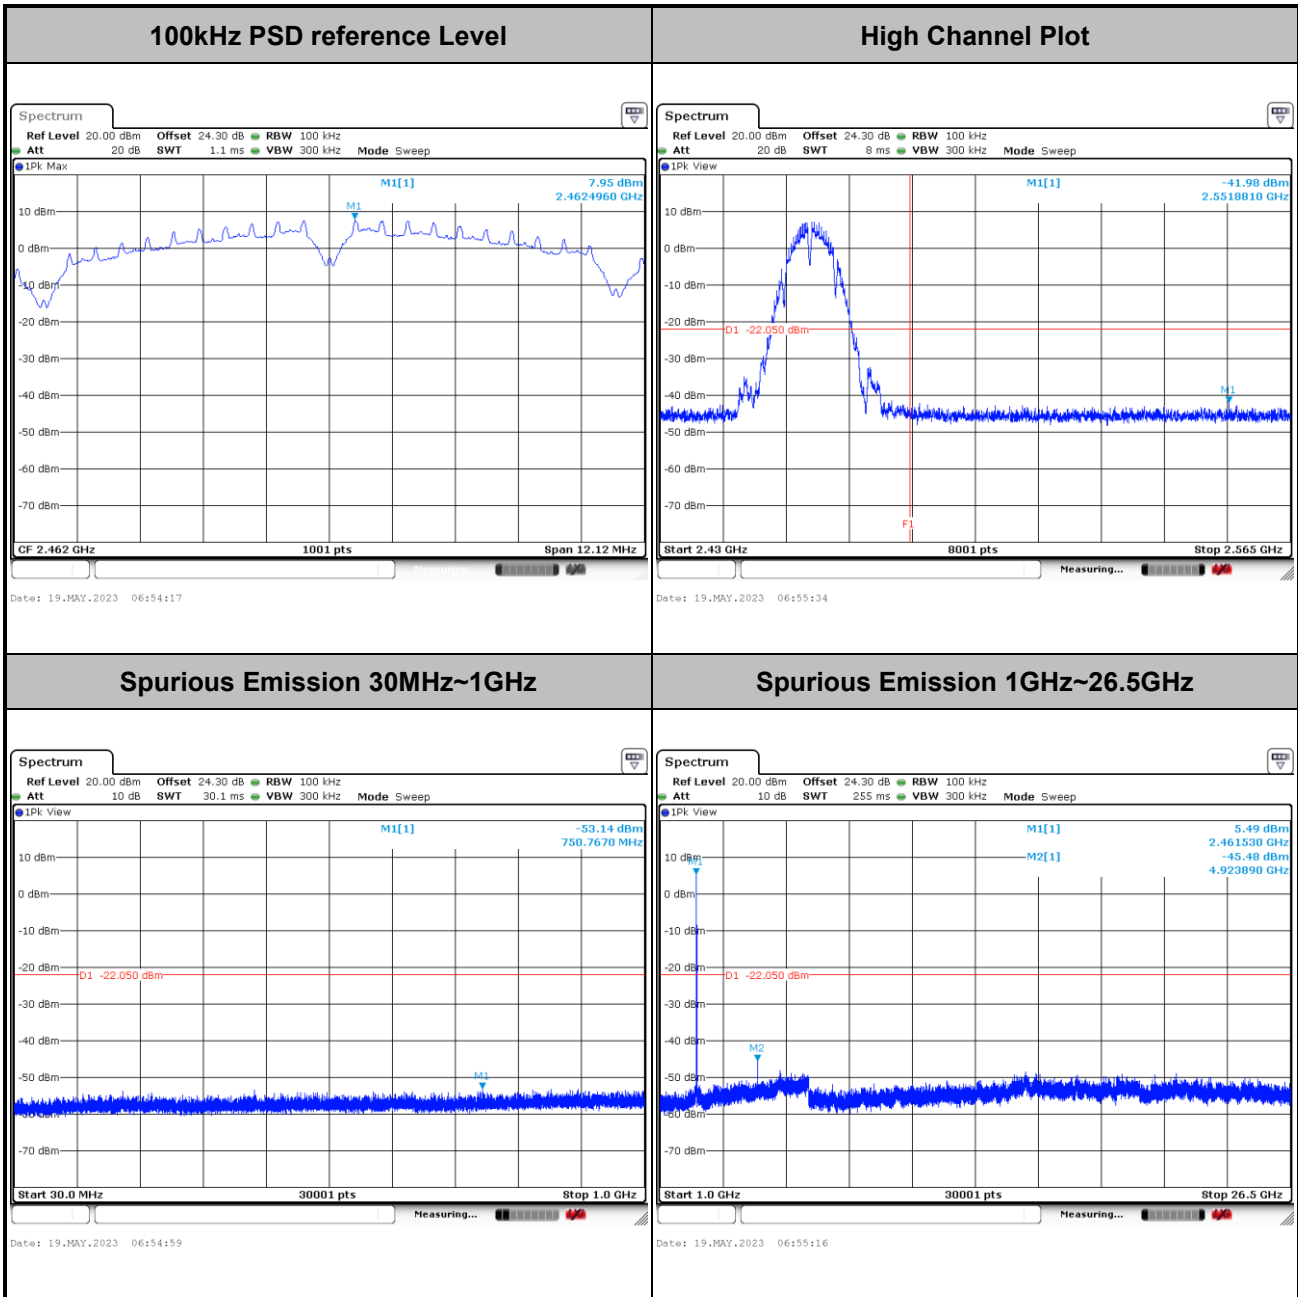





Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

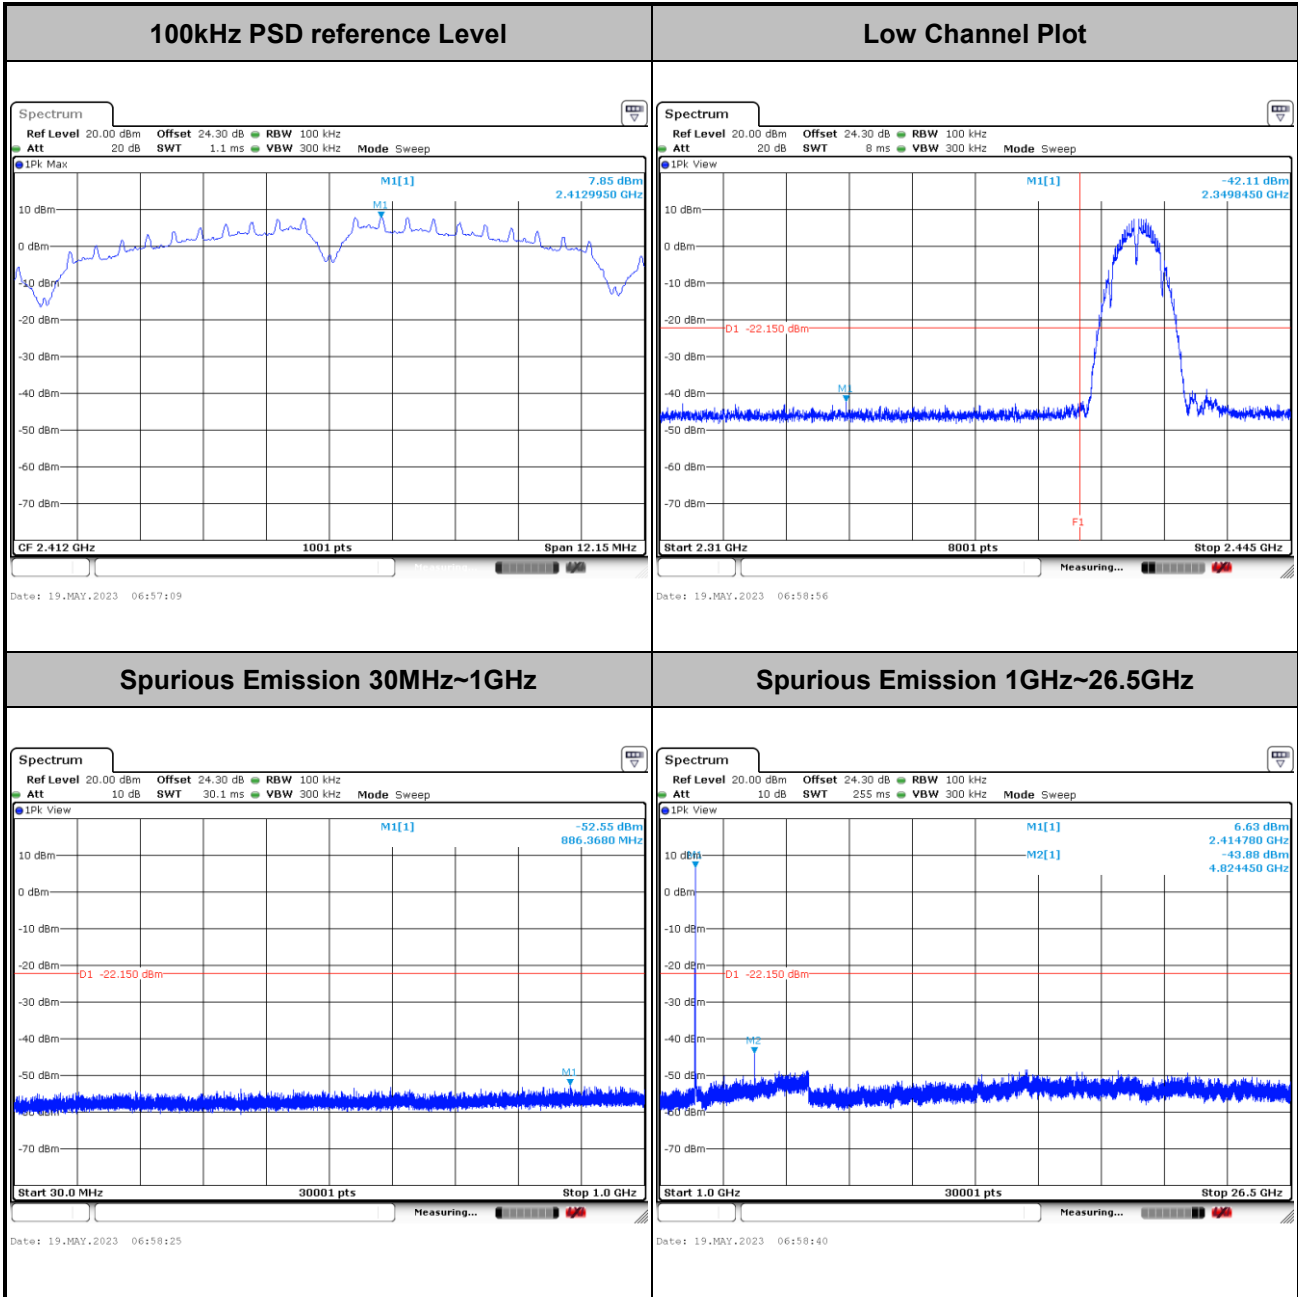




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

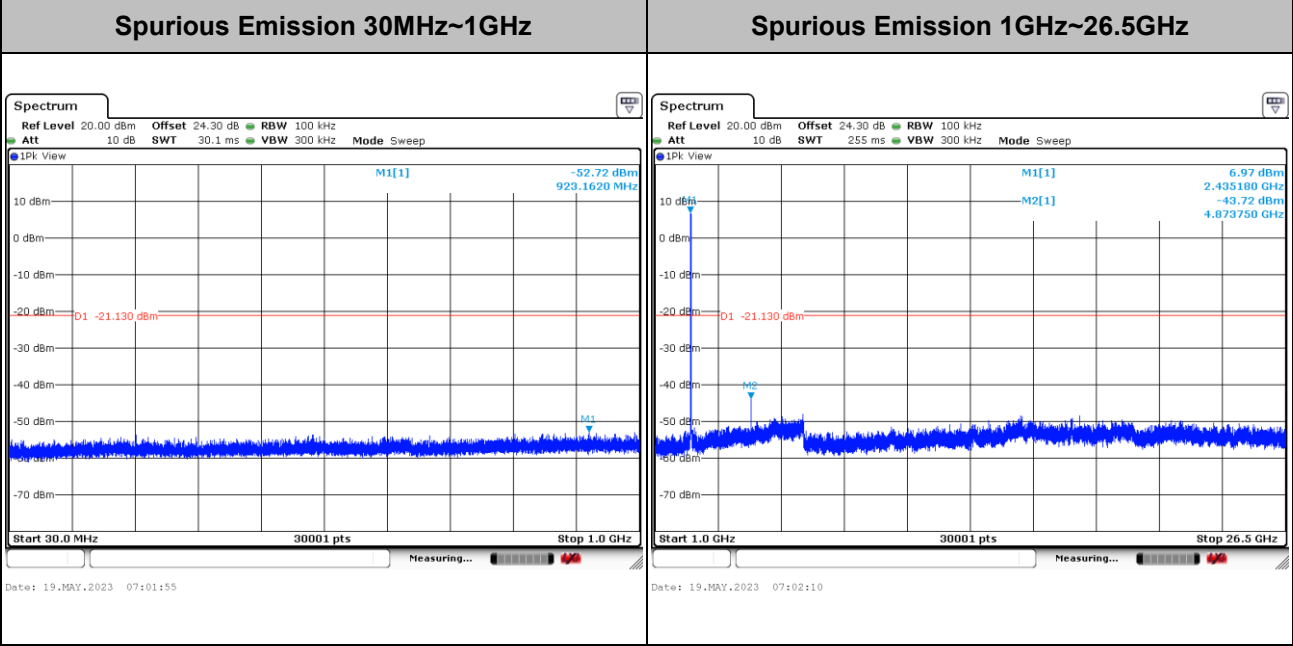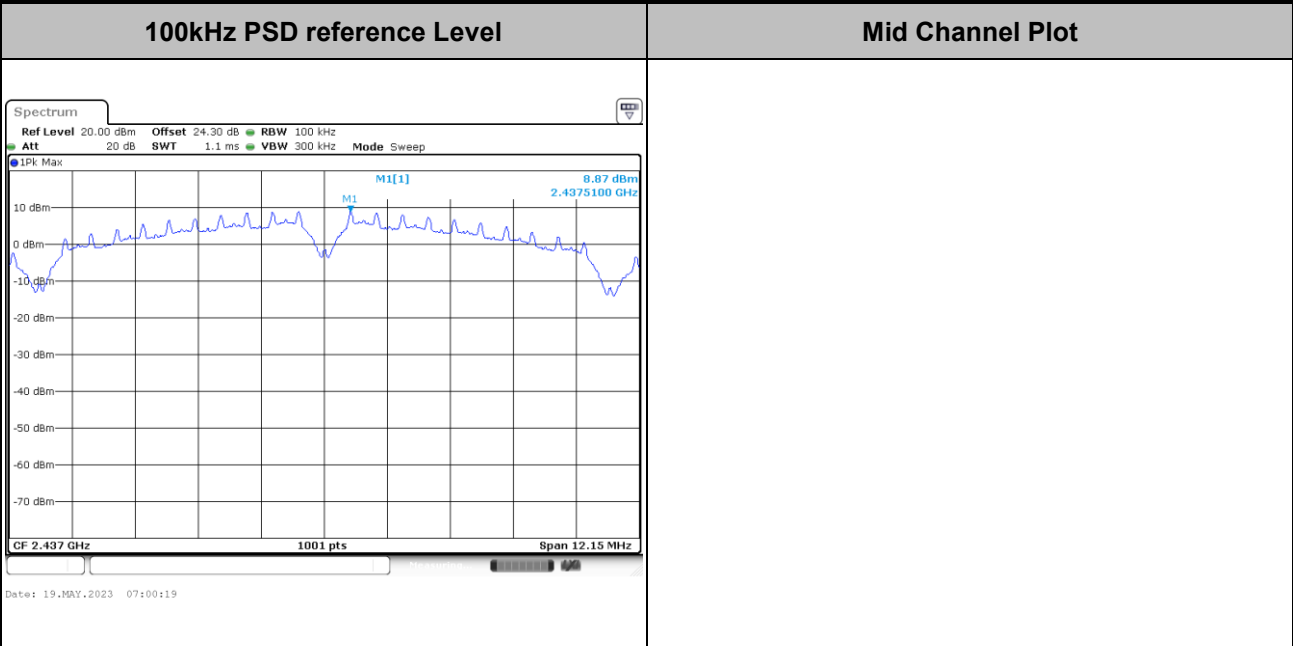




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

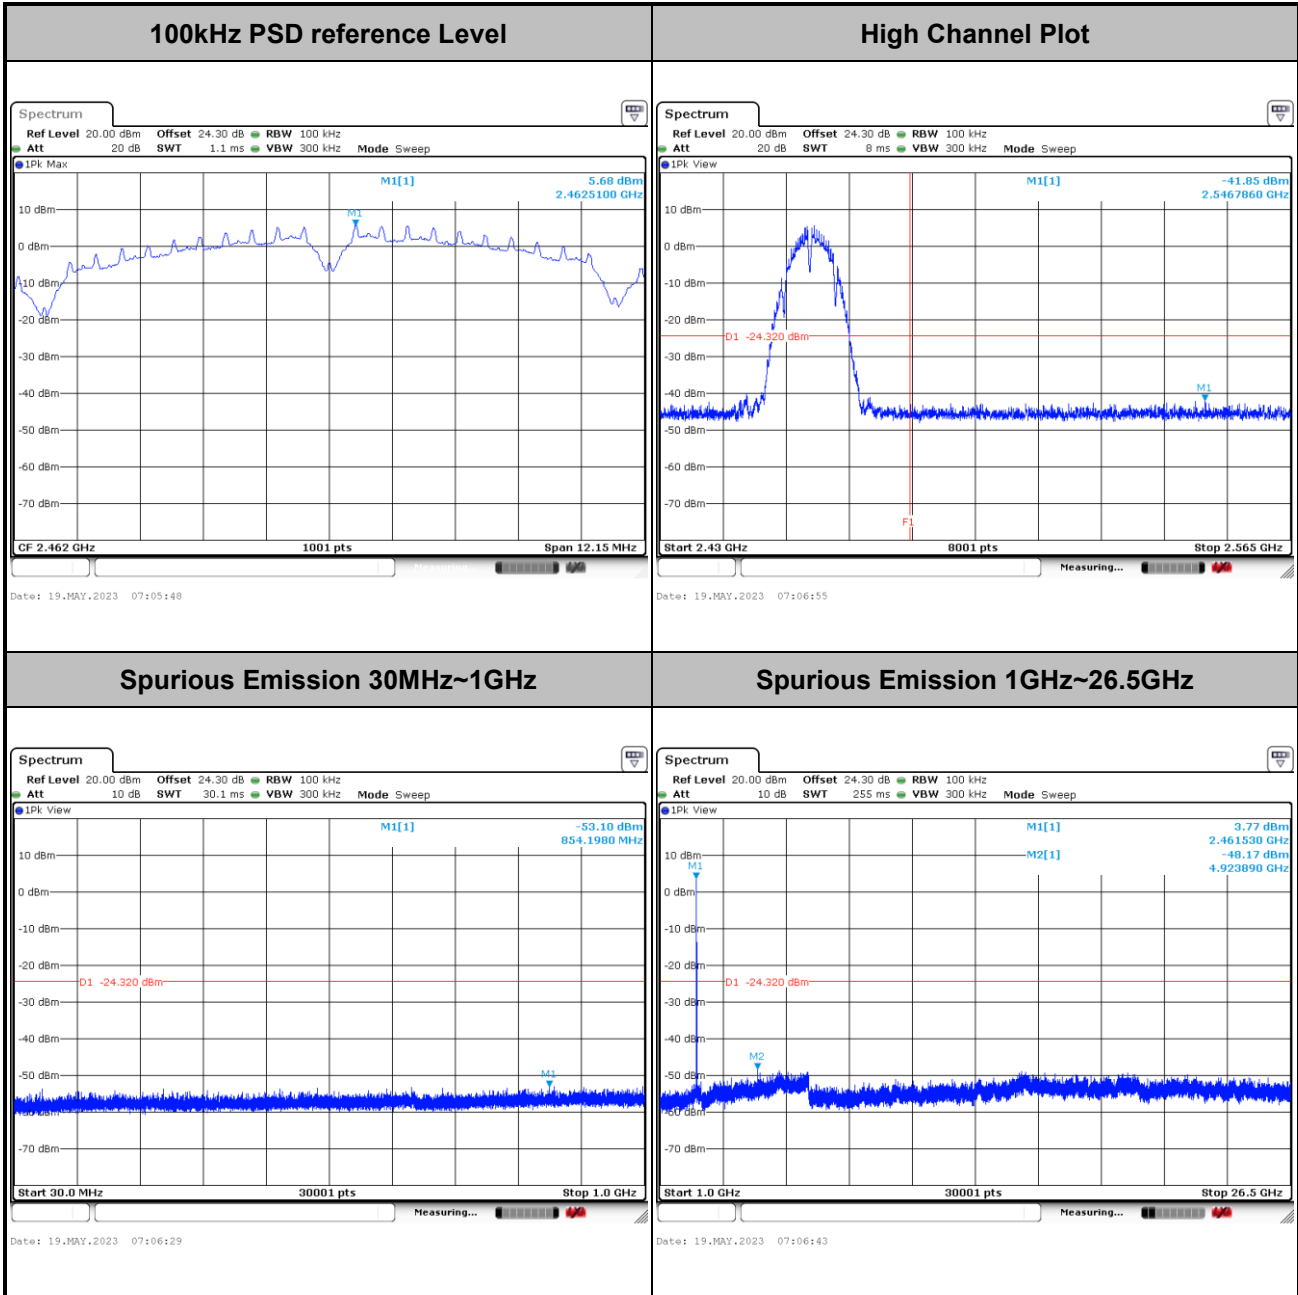




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

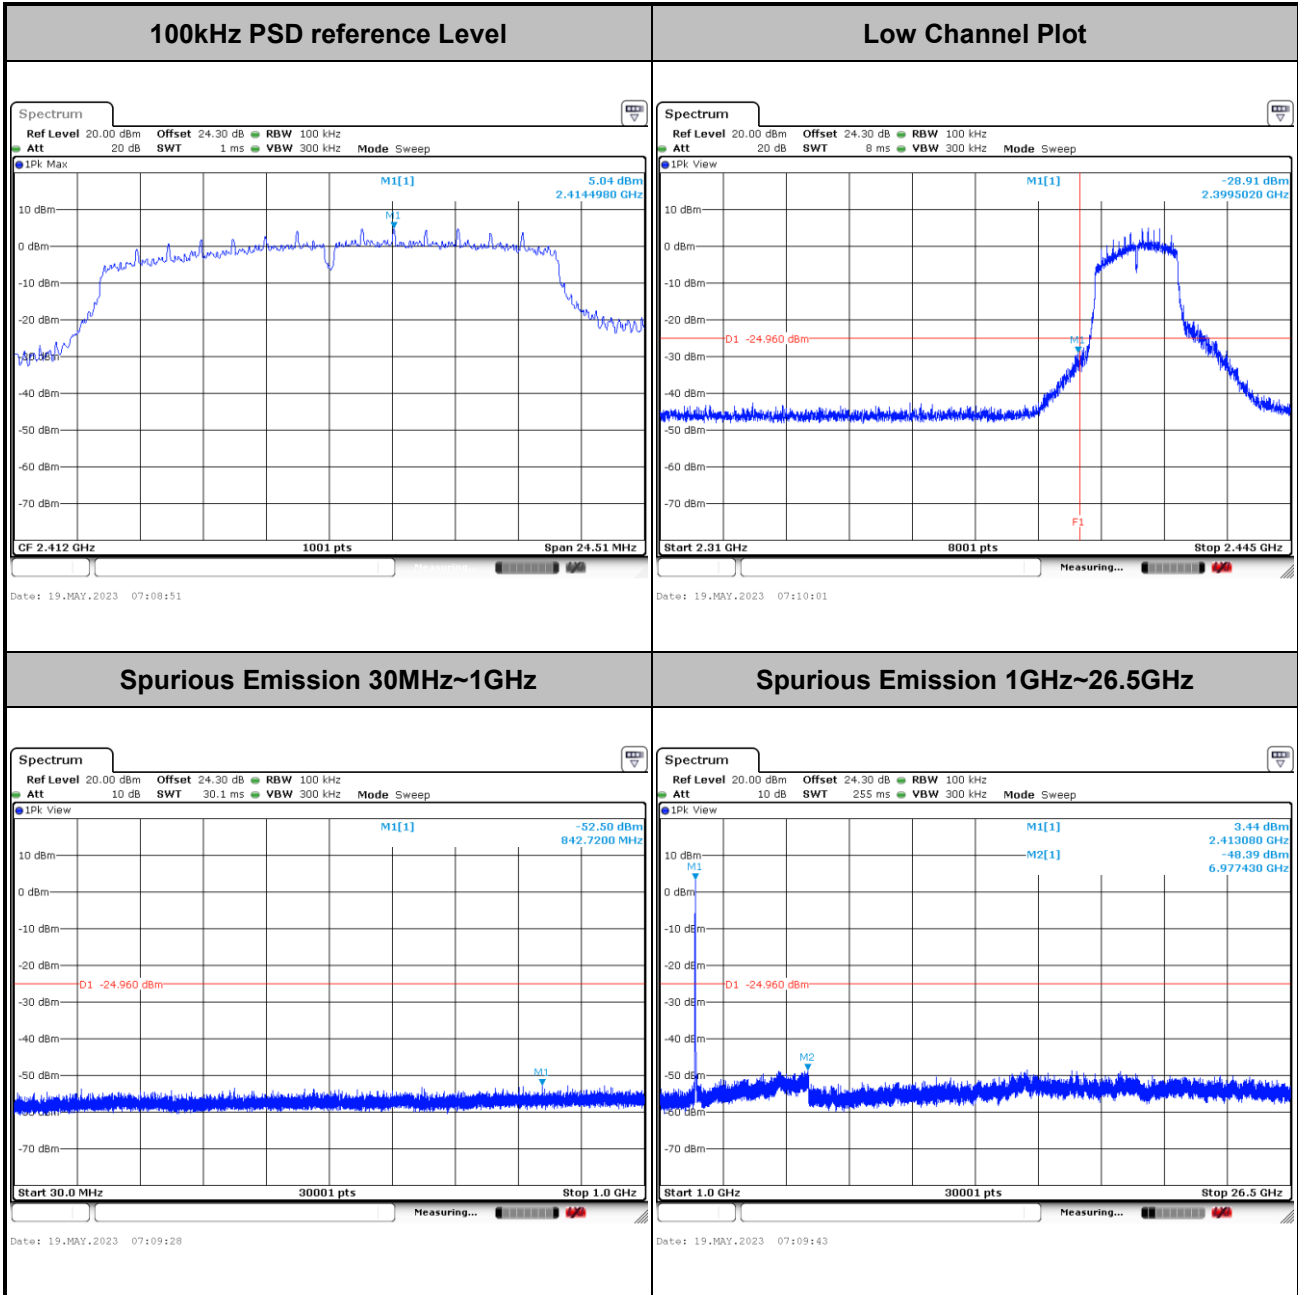




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level	Mid Channel Plot
-----------------------------------	-------------------------

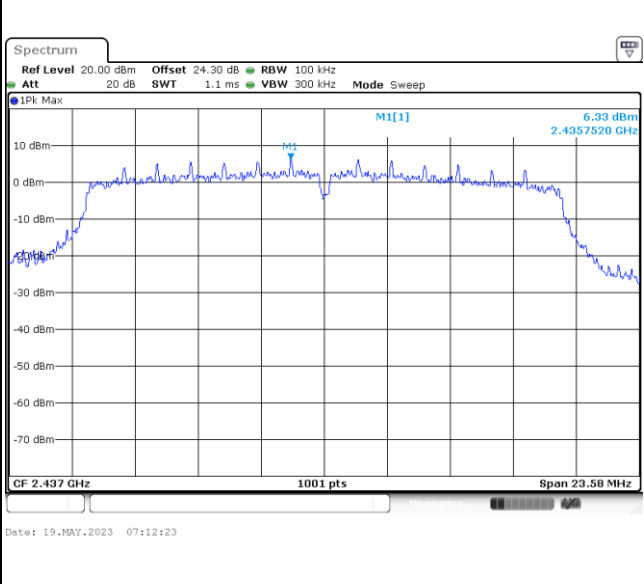

Spurious Emission 30MHz~1GHz

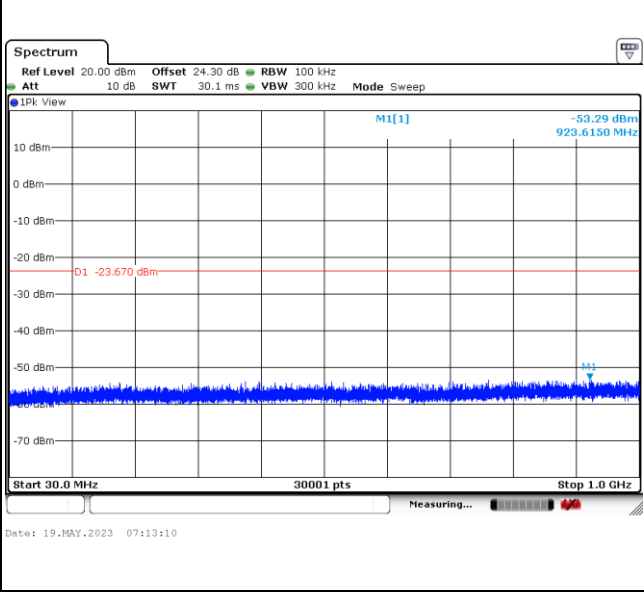


Spurious Emission 1GHz~26.5GHz

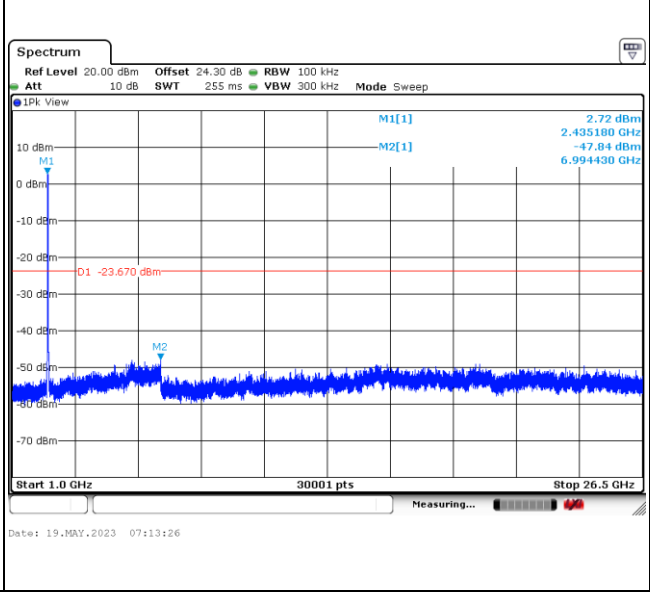



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

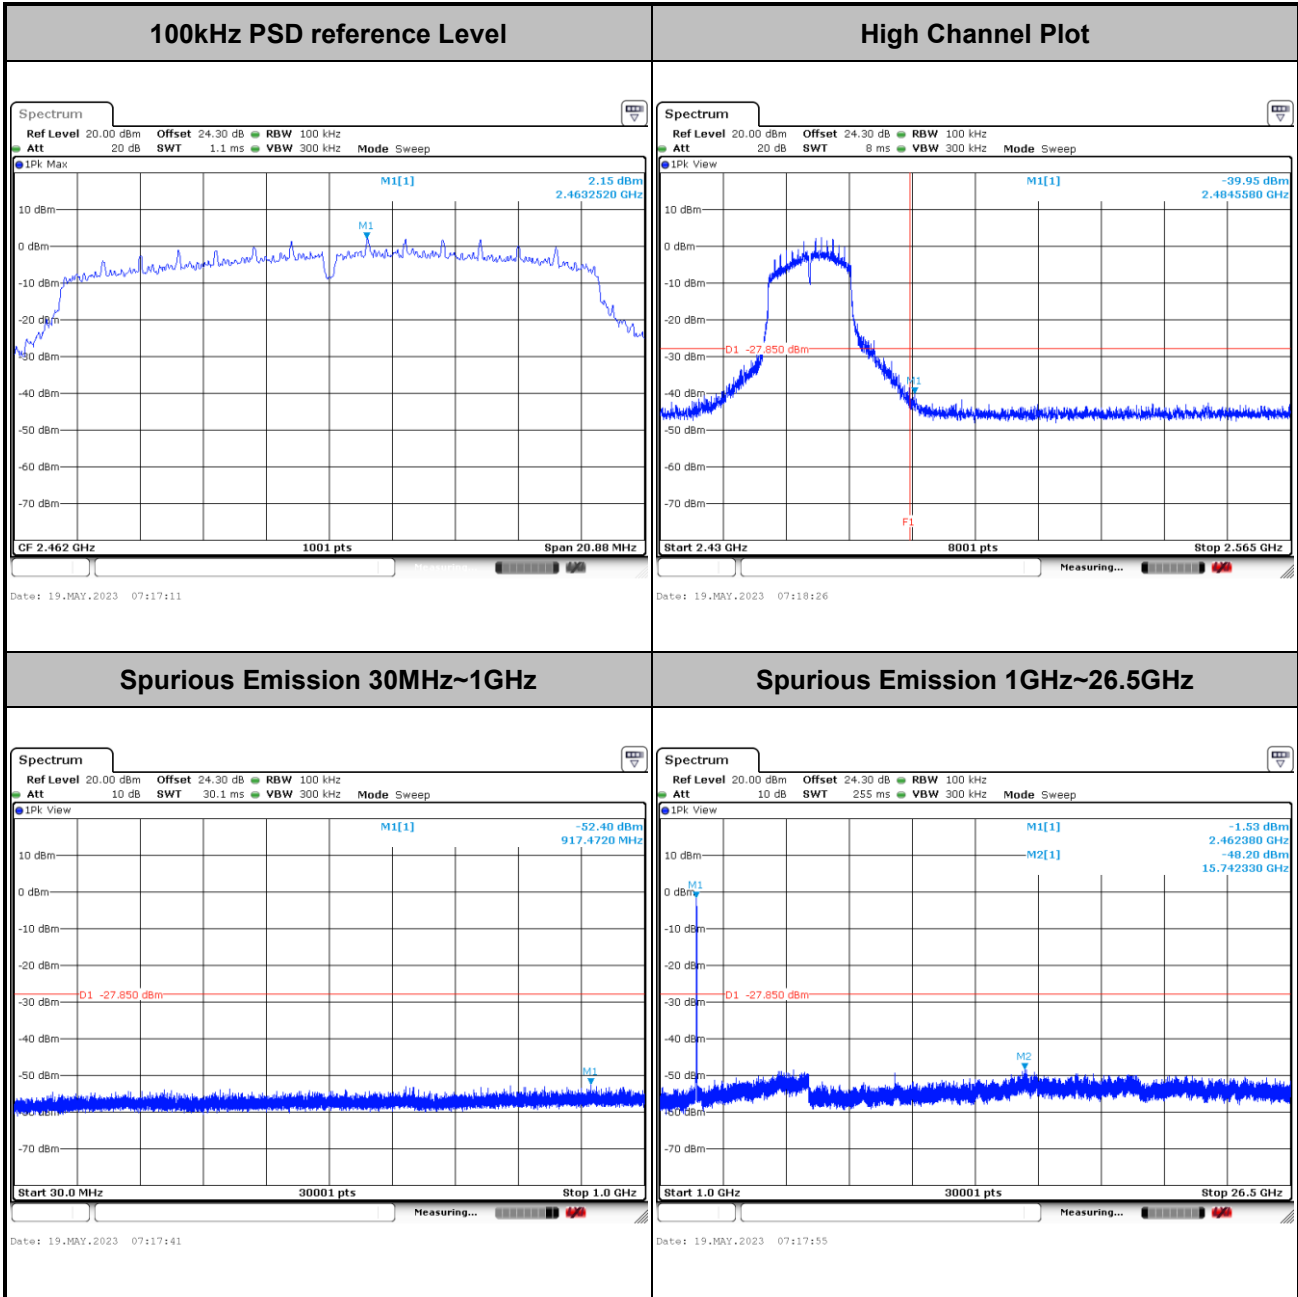




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	20.2~23°C
		Relative Humidity :	65.8~72.4%

EUT Information

Report NO : 333113
 Test Mode : Mode 3
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

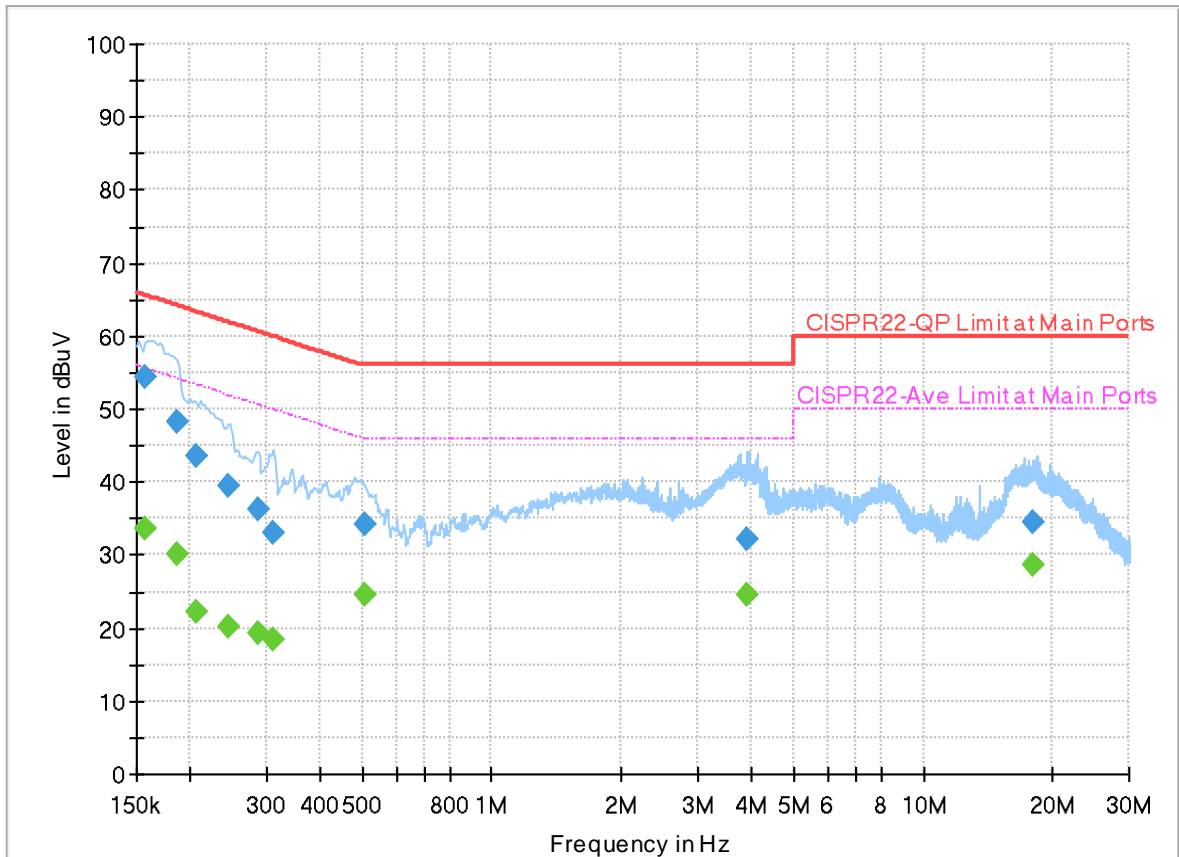


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	33.77	55.63	21.86	L1	OFF	19.9
0.156750	54.24	---	65.63	11.39	L1	OFF	19.9
0.186000	---	30.06	54.21	24.15	L1	OFF	19.9
0.186000	48.12	---	64.21	16.09	L1	OFF	19.9
0.207240	---	22.29	53.32	31.03	L1	OFF	20.0
0.207240	43.50	---	63.32	19.82	L1	OFF	20.0
0.244500	---	20.21	51.94	31.73	L1	OFF	20.0
0.244500	39.60	---	61.94	22.34	L1	OFF	20.0
0.286260	---	19.43	50.63	31.20	L1	OFF	20.0
0.286260	36.28	---	60.63	24.35	L1	OFF	20.0
0.311730	---	18.40	49.92	31.52	L1	OFF	20.0
0.311730	33.15	---	59.92	26.77	L1	OFF	20.0
0.506130	---	24.45	46.00	21.55	L1	OFF	20.0
0.506130	34.27	---	56.00	21.73	L1	OFF	20.0
3.891750	---	24.44	46.00	21.56	L1	OFF	20.0
3.891750	32.10	---	56.00	23.90	L1	OFF	20.0
18.033090	---	28.68	50.00	21.32	L1	OFF	20.2
18.033090	34.40	---	60.00	25.60	L1	OFF	20.2

EUT Information

Report NO : 333113
 Test Mode : Mode 3
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

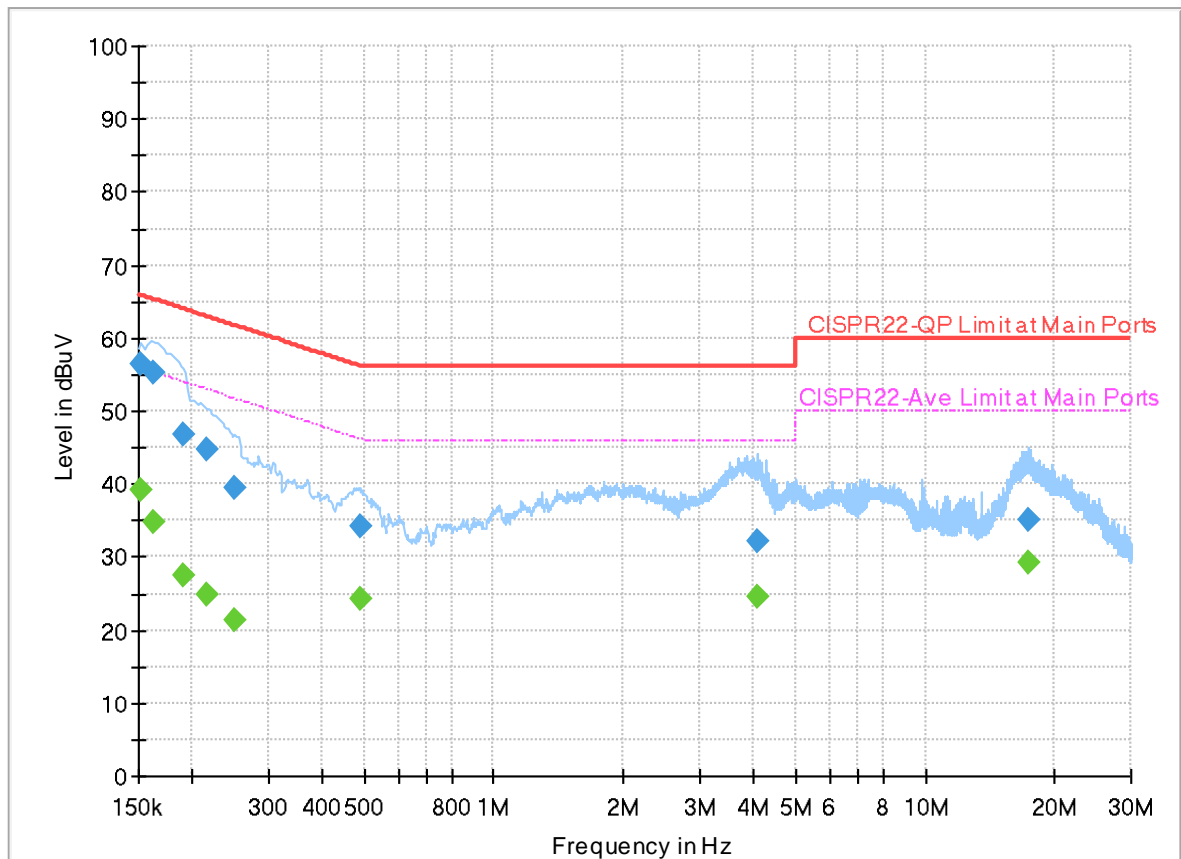

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.151215	---	39.24	55.93	16.69	N	OFF	20.0
0.151215	56.52	---	65.93	9.41	N	OFF	20.0
0.163140	---	34.67	55.30	20.63	N	OFF	20.0
0.163140	55.38	---	65.30	9.92	N	OFF	20.0
0.190590	---	27.50	54.01	26.51	N	OFF	20.0
0.190590	46.72	---	64.01	17.29	N	OFF	20.0
0.215250	---	24.93	53.00	28.07	N	OFF	20.0
0.215250	44.63	---	63.00	18.37	N	OFF	20.0
0.250530	---	21.42	51.74	30.32	N	OFF	20.0
0.250530	39.47	---	61.74	22.27	N	OFF	20.0
0.491730	---	24.28	46.14	21.86	N	OFF	20.0
0.491730	34.16	---	56.14	21.98	N	OFF	20.0
4.076790	---	24.45	46.00	21.55	N	OFF	20.0
4.076790	32.04	---	56.00	23.96	N	OFF	20.0
17.346300	---	29.11	50.00	20.89	N	OFF	20.2
17.346300	35.19	---	60.00	24.81	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Fan, Tim Lee and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11b CH 01 2412MHz		2385.495	58.32	-15.68	74	47.75	27.31	16.75	33.49	170	254	P	H	
		2387.28	51.28	-2.72	54	40.69	27.32	16.76	33.49	170	254	A	H	
	*	2412	111.93	-	-	101.16	27.47	16.8	33.5	170	254	P	H	
	*	2412	108.82	-	-	98.05	27.47	16.8	33.5	170	254	A	H	
													H	
														H
			2387.28	57.43	-16.57	74	46.84	27.32	16.76	33.49	399	46	P	V
			2387.28	49.42	-4.58	54	38.83	27.32	16.76	33.49	399	46	A	V
	*		2412	109.6	-	-	98.83	27.47	16.8	33.5	399	46	P	V
	*		2412	106.49	-	-	95.72	27.47	16.8	33.5	399	46	A	V
														V
														V
802.11b CH 06 2437MHz		2346.68	55.56	-18.44	74	45.25	27.1	16.68	33.47	197	243	P	H	
		2389.8	44.36	-9.64	54	33.75	27.34	16.76	33.49	197	243	A	H	
	*	2437	109.47	-	-	98.53	27.62	16.84	33.52	197	243	P	H	
	*	2437	106.39	-	-	95.45	27.62	16.84	33.52	197	243	A	H	
			2496.85	56.4	-17.6	74	45.11	27.89	16.95	33.55	197	243	P	H
			2489.01	45.16	-8.84	54	33.9	27.86	16.94	33.54	197	243	A	H
			2329.18	55.31	-18.69	74	45.02	27.1	16.65	33.46	393	45	P	V
			2389.94	44.33	-9.67	54	33.72	27.34	16.76	33.49	393	45	A	V
	*		2437	106.76	-	-	95.82	27.62	16.84	33.52	393	45	P	V
	*		2437	103.67	-	-	92.73	27.62	16.84	33.52	393	45	A	V
			2497.76	55.55	-18.45	74	44.26	27.89	16.95	33.55	393	45	P	V
			2487.96	45.06	-8.94	54	33.82	27.85	16.93	33.54	393	45	A	V



802.11b CH 11 2462MHz	*	2462	108.15	-	-	97.04	27.75	16.89	33.53	157	252	P	H
	*	2462	105.25	-	-	94.14	27.75	16.89	33.53	157	252	A	H
		2487.6	57.54	-16.46	74	46.3	27.85	16.93	33.54	157	252	P	H
		2488.64	49.06	-4.94	54	37.81	27.85	16.94	33.54	157	252	A	H
													H
													H
	*	2462	104.59	-	-	93.48	27.75	16.89	33.53	379	49	P	V
	*	2462	101.65	-	-	90.54	27.75	16.89	33.53	379	49	A	V
		2484.96	56.72	-17.28	74	45.49	27.84	16.93	33.54	379	49	P	V
		2488.56	47.15	-6.85	54	35.91	27.85	16.93	33.54	379	49	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 01 2412MHz		4824	53.47	-20.53	74	76.92	32.44	10.91	66.8	135	330	P	H	
		4824	51.17	-2.83	54	74.62	32.44	10.91	66.8	135	330	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4824	52.29	-21.71	74	75.74	32.44	10.91	66.8	311	103	P	V
			4824	49.66	-4.34	54	73.11	32.44	10.91	66.8	311	103	A	V
														V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 06 2437MHz		4874	52.79	-21.21	74	75.86	32.65	11.01	66.73	131	271	P	H
		4874	50.74	-3.26	54	73.81	32.65	11.01	66.73	131	271	A	H
		7311	45.28	-28.72	74	60.15	36.98	13.53	65.38	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4874	51.37	-22.63	74	74.44	32.65	11.01	66.73	288	100	P
		4874	49.03	-4.97	54	72.1	32.65	11.01	66.73	288	100	A	V
		7311	45.03	-28.97	74	59.9	36.98	13.53	65.38	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 11 2462MHz		4924	52.95	-21.05	74	75.69	32.8	11.12	66.66	107	270	P	H	
		4924	50.7	-3.3	54	73.44	32.8	11.12	66.66	107	270	A	H	
		7386	45.87	-28.13	74	61.03	36.68	13.63	65.47	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4924	51.47	-22.53	74	74.21	32.8	11.12	66.66	296	96	P	V
			4924	49.07	-4.93	54	71.81	32.8	11.12	66.66	296	96	A	V
			7386	45.56	-28.44	74	60.72	36.68	13.63	65.47	-	-	P	V
														V
														V
														V
														V
														V
														V
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11g CH 01 2412MHz		2389.8	64.98	-9.02	74	54.37	27.34	16.76	33.49	112	157	P	H	
		2390	50.82	-3.18	54	40.21	27.34	16.76	33.49	112	157	A	H	
	*	2412	110.09	-	-	99.32	27.47	16.8	33.5	112	157	P	H	
	*	2412	102.1	-	-	91.33	27.47	16.8	33.5	112	157	A	H	
													H	
														H
			2390	61.68	-12.32	74	51.07	27.34	16.76	33.49	400	309	P	V
			2389.905	48.36	-5.64	54	37.75	27.34	16.76	33.49	400	309	A	V
	*		2412	107.84	-	-	97.07	27.47	16.8	33.5	400	309	P	V
	*		2412	99.49	-	-	88.72	27.47	16.8	33.5	400	309	A	V
														V
														V
802.11g CH 06 2437MHz		2389.94	56.74	-17.26	74	46.13	27.34	16.76	33.49	130	160	P	H	
		2389.8	47.99	-6.01	54	37.38	27.34	16.76	33.49	130	160	A	H	
	*	2437	112.4	-	-	101.46	27.62	16.84	33.52	130	160	P	H	
	*	2437	104.91	-	-	93.97	27.62	16.84	33.52	130	160	A	H	
			2483.83	58.86	-15.14	74	47.63	27.84	16.93	33.54	130	160	P	H
			2483.76	47.85	-6.15	54	36.62	27.84	16.93	33.54	130	160	A	H
			2365.86	54.25	-19.75	74	43.81	27.2	16.72	33.48	392	309	P	V
			2389.8	45.23	-8.77	54	34.62	27.34	16.76	33.49	392	309	A	V
	*		2437	110.82	-	-	99.88	27.62	16.84	33.52	392	309	P	V
	*		2437	103.08	-	-	92.14	27.62	16.84	33.52	392	309	A	V
			2484.95	54.93	-19.07	74	43.7	27.84	16.93	33.54	392	309	P	V
			2483.76	46.02	-7.98	54	34.79	27.84	16.93	33.54	392	309	A	V



802.11g CH 11 2462MHz	*	2462	105.27	-	-	94.16	27.75	16.89	33.53	101	160	P	H
	*	2462	97.36	-	-	86.25	27.75	16.89	33.53	101	160	A	H
		2483.68	63.89	-10.11	74	52.67	27.83	16.93	33.54	101	160	P	H
		2483.64	51.16	-2.84	54	39.94	27.83	16.93	33.54	101	160	A	H
													H
													H
	*	2462	102.91	-	-	91.8	27.75	16.89	33.53	382	311	P	V
	*	2462	95.24	-	-	84.13	27.75	16.89	33.53	382	311	A	V
		2483.68	64.29	-9.71	74	53.07	27.83	16.93	33.54	382	311	P	V
		2483.52	49.54	-4.46	54	38.32	27.83	16.93	33.54	382	311	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	43.99	-30.01	74	67.44	32.44	10.91	66.8	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4824	41.89	-32.11	74	65.34	32.44	10.91	66.8	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11g CH 06 2437MHz		4874	54.93	-19.07	74	78	32.65	11.01	66.73	110	272	P	H	
		4874	45.69	-8.31	54	68.76	32.65	11.01	66.73	110	272	A	H	
		7311	45.01	-28.99	74	59.88	36.98	13.53	65.38	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4874	52.18	-21.82	74	75.25	32.65	11.01	66.73	324	100	P	V
			4874	44.25	-9.75	54	67.32	32.65	11.01	66.73	324	100	A	V
			7311	45.96	-28.04	74	60.83	36.98	13.53	65.38	-	-	P	V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 11 2462MHz		4924	42.5	-31.5	74	65.24	32.8	11.12	66.66	-	-	P	H
		7386	45.27	-28.73	74	60.43	36.68	13.63	65.47	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4924	41.75	-32.25	74	64.49	32.8	11.12	66.66	-	-	P
		7386	45.92	-28.08	74	61.08	36.68	13.63	65.47	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 01 2412MHz		2389.8	64.12	-9.88	74	53.51	27.34	16.76	33.49	197	243	P	H	
		2390	50.53	-3.47	54	39.92	27.34	16.76	33.49	197	243	A	H	
	*	2412	106.77	-	-	96	27.47	16.8	33.5	197	243	P	H	
	*	2412	99.25	-	-	88.48	27.47	16.8	33.5	197	243	A	H	
													H	
														H
			2389.905	61.19	-12.81	74	50.58	27.34	16.76	33.49	399	43	P	V
			2389.905	48.09	-5.91	54	37.48	27.34	16.76	33.49	399	43	A	V
		*	2412	105.27	-	-	94.5	27.47	16.8	33.5	399	43	P	V
		*	2412	97.7	-	-	86.93	27.47	16.8	33.5	399	43	A	V
													V	
													V	
802.11n HT20 CH 06 2437MHz		2389.66	59.09	-14.91	74	48.48	27.34	16.76	33.49	224	245	P	H	
		2389.8	47.71	-6.29	54	37.1	27.34	16.76	33.49	224	245	A	H	
	*	2437	110.78	-	-	99.84	27.62	16.84	33.52	224	245	P	H	
	*	2437	103.22	-	-	92.28	27.62	16.84	33.52	224	245	A	H	
			2484.39	59.84	-14.16	74	48.61	27.84	16.93	33.54	224	245	P	H
			2483.69	48.1	-5.9	54	36.88	27.83	16.93	33.54	224	245	A	H
			2389.24	55.42	-18.58	74	44.81	27.34	16.76	33.49	393	47	P	V
			2387.98	48.94	-5.06	54	38.34	27.33	16.76	33.49	393	47	A	V
		*	2437	109.97	-	-	99.03	27.62	16.84	33.52	393	47	P	V
		*	2437	102.34	-	-	91.4	27.62	16.84	33.52	393	47	A	V
		2484.53	59.27	-14.73	74	48.04	27.84	16.93	33.54	393	47	P	V	
		2483.55	46.31	-7.69	54	35.09	27.83	16.93	33.54	393	47	A	V	



802.11n HT20 CH 11 2462MHz	*	2462	103.89	-	-	92.78	27.75	16.89	33.53	100	255	P	H
	*	2462	96.24	-	-	85.13	27.75	16.89	33.53	100	255	A	H
		2483.76	65.99	-8.01	74	54.76	27.84	16.93	33.54	100	255	P	H
		2483.52	51.71	-2.29	54	40.49	27.83	16.93	33.54	100	255	A	H
													H
													H
	*	2462	100.89	-	-	89.78	27.75	16.89	33.53	372	5	P	V
	*	2462	93.21	-	-	82.1	27.75	16.89	33.53	372	5	A	V
		2483.52	61.69	-12.31	74	50.47	27.83	16.93	33.54	372	5	P	V
		2483.52	48.79	-5.21	54	37.57	27.83	16.93	33.54	372	5	A	V
													V
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 01 2412MHz		4824	43.44	-30.56	74	66.89	32.44	10.91	66.8	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
			4824	41.59	-32.41	74	65.04	32.44	10.91	66.8	-	-	P	V
														V
														V
														V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 06 2437MHz		4874	55.88	-18.12	74	78.95	32.65	11.01	66.73	100	272	P	H	
		4874	46.92	-7.08	54	69.99	32.65	11.01	66.73	100	272	A	H	
		7311	46.16	-27.84	74	61.03	36.98	13.53	65.38	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4874	53.35	-20.65	74	76.42	32.65	11.01	66.73	308	111	P	V
			4874	44.75	-9.25	54	67.82	32.65	11.01	66.73	308	111	A	V
			7311	46.36	-27.64	74	61.23	36.98	13.53	65.38	-	-	P	V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 11 2462MHz		4924	41.67	-32.33	74	64.41	32.8	11.12	66.66	-	-	P	H
		7386	44.7	-29.3	74	59.86	36.68	13.63	65.47	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	802.11n HT20 CH 11 2462MHz		4924	41.76	-32.24	74	64.5	32.8	11.12	66.66	-	-	P
		7386	45.23	-28.77	74	60.39	36.68	13.63	65.47	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Emission above 18GHz

2.4GHz WIFI 802.11n HT20 (SHF)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 SHF		21840.6	38.26	-35.74	74	41.56	38.14	11.76	53.2	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			23128.2	38.82	-35.18	74	40.57	38.9	12.52	53.17	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11n HT20 LF		30.97	24.74	-15.26	40	29.36	24.52	0.61	29.75	-	-	P	H	
		169.68	28.26	-15.24	43.5	40.28	15.83	1.86	29.71	-	-	P	H	
		308.39	29.58	-16.42	46	37.08	19.37	2.58	29.45	-	-	P	H	
		839.95	36.94	-9.06	46	32.13	29.1	4.29	28.58	-	-	P	H	
		886.51	37.25	-8.75	46	32.11	29.13	4.52	28.51	-	-	P	H	
		954.41	36.92	-9.08	46	29.31	31.19	4.66	28.24	-	-	P	H	
														H
														H
														H
														H
														H
			30.97	33.07	-6.93	40	37.69	24.52	0.61	29.75	-	-	P	V
			163.86	28.41	-15.09	43.5	39.91	16.33	1.84	29.67	-	-	P	V
			514.03	33.78	-12.22	46	35.32	24.2	3.36	29.1	-	-	P	V
			761.38	33.59	-12.41	46	29.69	28.4	4.06	28.56	-	-	P	V
			859.35	34.56	-11.44	46	29.26	29.5	4.37	28.57	-	-	P	V
			948.59	36.29	-9.71	46	28.85	31.04	4.65	28.25	-	-	P	V
														V
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Fan, Tim Lee and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%



Note symbol

-L	Low channel location
-R	High channel location





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_02114 VERTICAL - DRAW:XXXXXXXXXX- USW:XXXXXXXXXX- CMT:Auto</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_02114 VERTICAL - DRAW:XXXXXXXXXX- USW:XXXXXXXXXX- CMT:Auto</p>
Avg.	<p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_02114 VERTICAL - DRAW:XXXXXXXXXX- USW:XXXXXXXXXX- CMT:Auto</p>	<p>Site : 03CH12-HY Condition : AVG_54 3m HORN_91200_02114 VERTICAL - DRAW:XXXXXXXXXX- USW:XXXXXXXXXX- CMT:Auto</p>




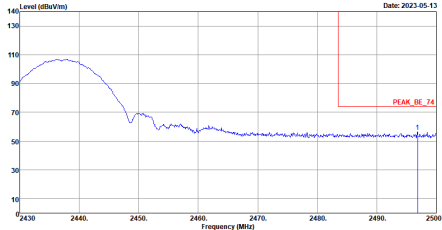


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH12-1HY Condition : PEAK_BE_74 3m HORN_9120D_02114 HORIZONTAL - BW=1000000Hz+ VBW=3000Hz+ SM=1.0Hz</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH12-1HY Condition : AVG_BE_54 3m HORN_9120D_02114 HORIZONTAL - BW=1000000Hz+ VBW=3000Hz+ SM=1.0Hz</p>	<p>Left blank</p>

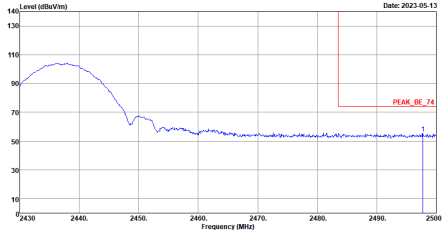





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH12-1HY Condition : PEAK_BE_74 3m HORN_9120D_02114 VERTICAL - BW=1000000Hz+ VBW=3000Hz+ SM=4000</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH12-1HY Condition : AVG_BE_54 3m HORN_9120D_02114 VERTICAL - BW=1000000Hz+ VBW=3000Hz+ SM=4000</p>	<p>Left blank</p>

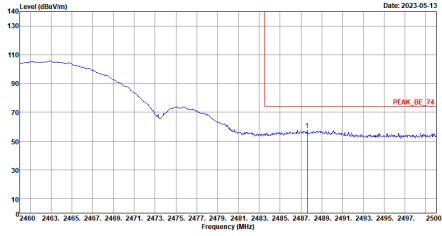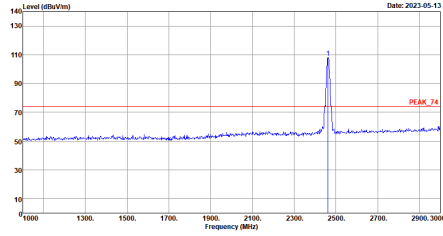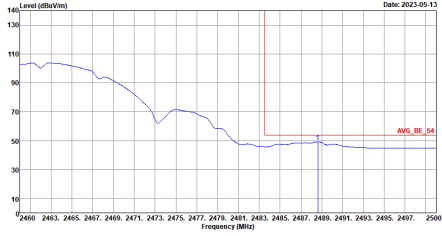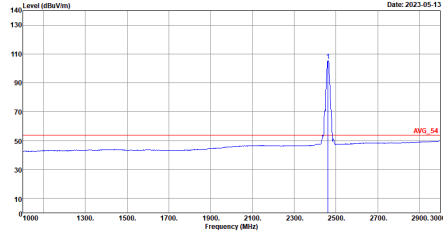

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 <p>Date: 2023-05-13</p> <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_02114 HORIZONTAL - BW: 1000000Hz - VM: 3000 Counts - SM: Auto</p>	 <p>Date: 2023-05-13</p> <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_02114 HORIZONTAL - BW: 1000000Hz - VM: 3000 Counts - SM: Auto</p>
Avg.	 <p>Date: 2023-05-13</p> <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_02114 HORIZONTAL - BW: 1000000Hz - VM: 3000 Counts - SM: Auto</p>	 <p>Date: 2023-05-13</p> <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_91200_02114 HORIZONTAL - BW: 1000000Hz - VM: 3000 Counts - SM: Auto</p>







2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

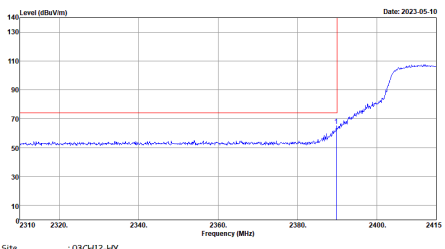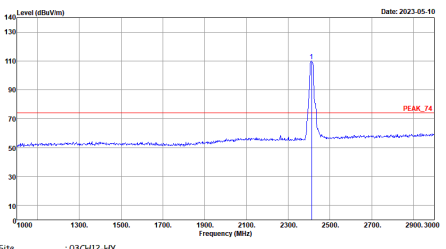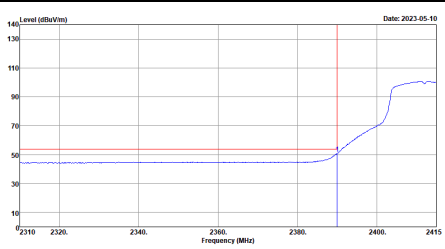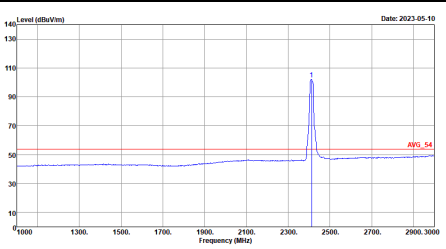WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_02114 HORIZONTAL - BW:1000000Hz - VAR:3000 - SMT:Auto</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_02114 HORIZONTAL - BW:1000000Hz - VAR:3000 - SMT:Auto</p>
Avg.	 <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_02114 HORIZONTAL - BW:1000000Hz - VAR:1000000 - SMT:Auto</p>	 <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_91200_02114 HORIZONTAL - BW:1000000Hz - VAR:1000000 - SMT:Auto</p>





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH12-1HY Condition : PEAK_BE_74 3m HORN_91200_02114 HORIZONTAL - BW=1000000Hz+ VBW=3000Hz+ SM=1.000</p>	Left blank
Avg.	<p>Site : 03CH12-1HY Condition : AVG_BE_54 3m HORN_91200_02114 HORIZONTAL - BW=1000000Hz+ VBW=3000Hz+ SM=1.000</p>	Left blank

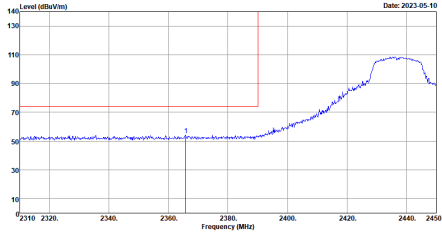
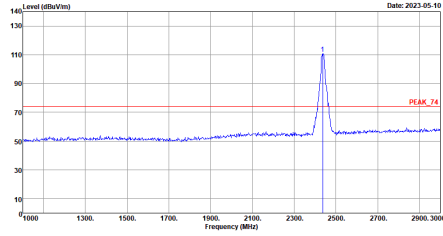
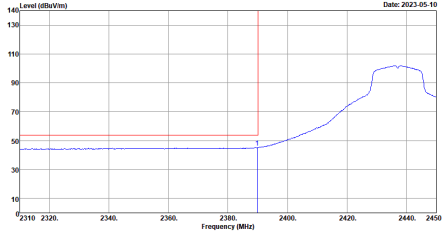
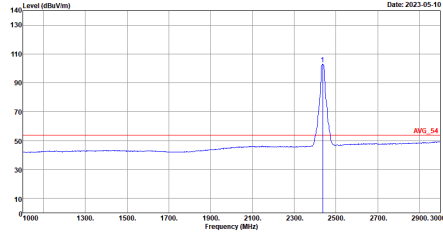


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_02114 VERTICAL - BW: 1000000Hz - VM: 3000 - CM: 4.0m</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_02114 VERTICAL - BW: 1000000Hz - VM: 3000 - CM: 4.0m</p>
Avg.	 <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_02114 VERTICAL - BW: 1000000Hz - VM: 3000 - CM: 4.0m</p>	 <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_91200_02114 VERTICAL - BW: 1000000Hz - VM: 3000 - CM: 4.0m</p>

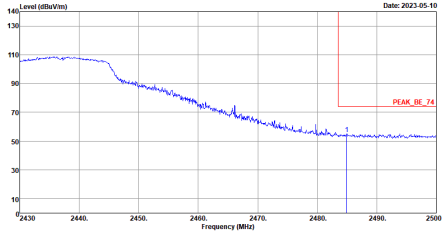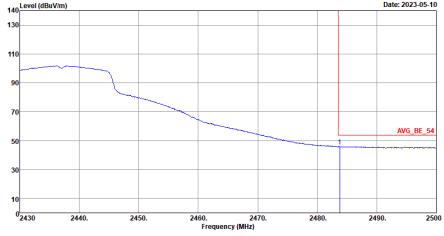





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	 <p data-bbox="391 689 662 728"> Site : 03CH12-1HY Condition : PEAK_BE_74 3m HORN_9120D_02114 VERTICAL - BW=100000000+ VBW=3000+ SMT=Auto </p>	Left Blank
Avg.	 <p data-bbox="391 1368 662 1406"> Site : 03CH12-1HY Condition : AVG_BE_54 3m HORN_9120D_02114 VERTICAL - BW=100000000+ VBW=3000+ SMT=Auto </p>	Left Blank

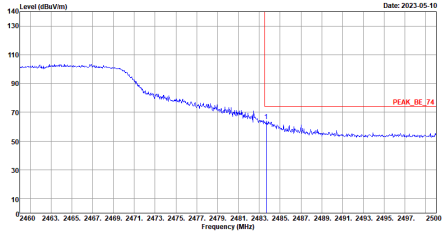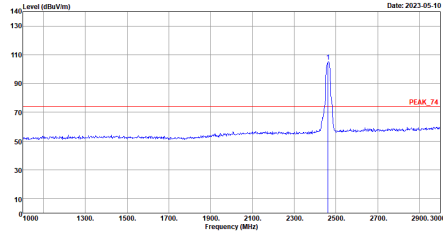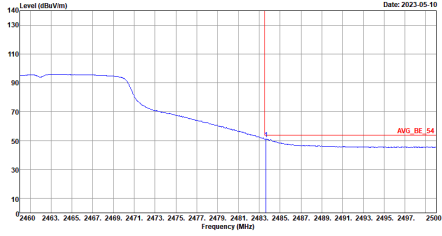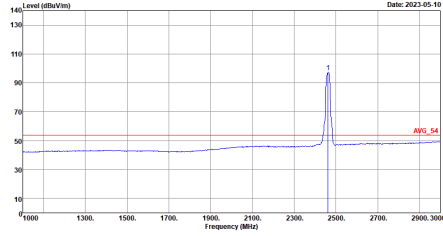

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 <p>Date: 2023-05-10</p> <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_02114 HORIZONTAL - BW: 1000000Hz - VM: 5000 Counts - SM: Auto</p>	 <p>Date: 2023-05-10</p> <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_02114 HORIZONTAL - BW: 1000000Hz - VM: 5000 Counts - SM: Auto</p>
Avg.	 <p>Date: 2023-05-10</p> <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_02114 HORIZONTAL - BW: 1000000Hz - VM: 5000 Counts - SM: Auto</p>	 <p>Date: 2023-05-10</p> <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_91200_02114 HORIZONTAL - BW: 1000000Hz - VM: 5000 Counts - SM: Auto</p>



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

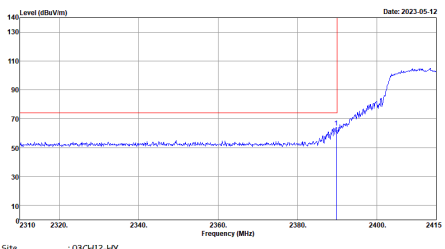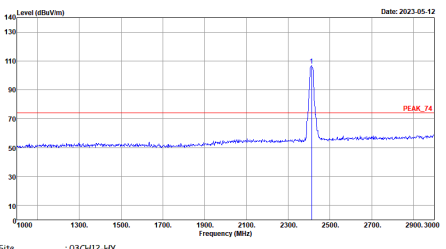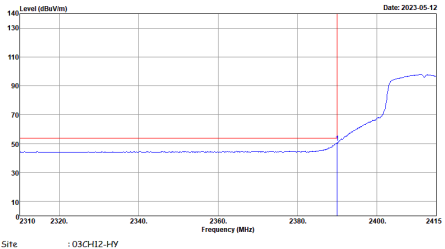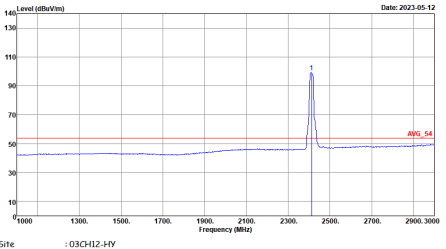WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_02114 HORIZONTAL - DRW/1000/000004+VRW/1000000+CMUT-Auto</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_02114 HORIZONTAL - DRW/1000/000004+VRW/1000000+CMUT-Auto</p>
Avg.	 <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_02114 HORIZONTAL - DRW/1000/000004+VRW/1000000+CMUT-Auto</p>	 <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_91200_02114 HORIZONTAL - DRW/1000/000004+VRW/1000000+CMUT-Auto</p>





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH12-1HY Condition : PEAK_BE_24 3m HORN_9120D_02114 HORIZONTAL - BW=100000000+ VBW=30000000+ SM=1+ A=1</p>	Left blank
Avg.	<p>Site : 03CH12-1HY Condition : AVG_BE_54 3m HORN_9120D_02114 HORIZONTAL - BW=100000000+ VBW=30000000+ SM=1+ A=1</p>	Left blank



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91200_02114 VERTICAL - BW: 100000000 Hz - VM: 5000 - CM: 4.0m</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_91200_02114 VERTICAL - BW: 100000000 Hz - VM: 5000 - CM: 4.0m</p>
Avg.	<p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91200_02114 VERTICAL - BW: 100000000 Hz - VM: 5000 - CM: 4.0m</p>	<p>Site : 03CH12-HY Condition : AVG_54 3m HORN_91200_02114 VERTICAL - BW: 100000000 Hz - VM: 5000 - CM: 4.0m</p>

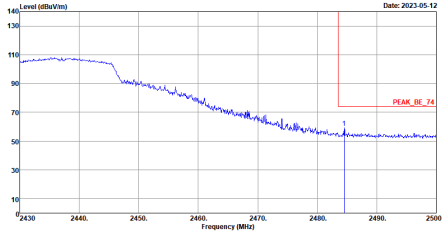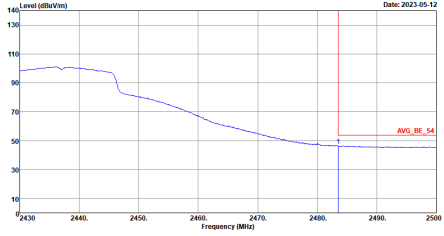





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH12-1HY Condition : PEAK_BE_74 3m HORN_91200_02114 VERTICAL - BW=100000000+ VBW=30000000+ SM=1+ CM=1</p>	<p>Left Blank</p>
<p>Avg.</p>	 <p>Site : 03CH12-1HY Condition : AVG_BE_54 3m HORN_91200_02114 VERTICAL - BW=100000000+ VBW=30000000+ SM=1+ CM=1</p>	<p>Left Blank</p>





2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 VERTICAL</p>

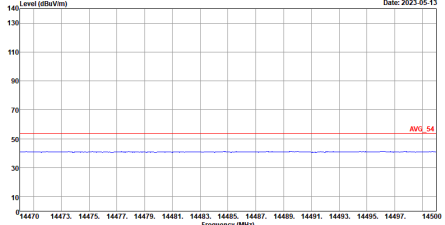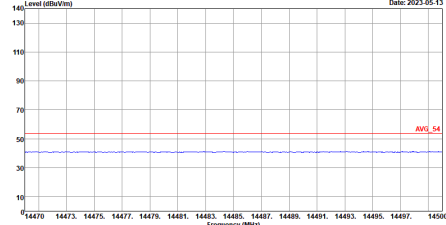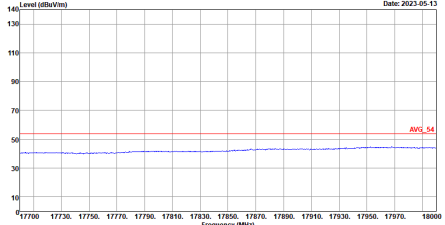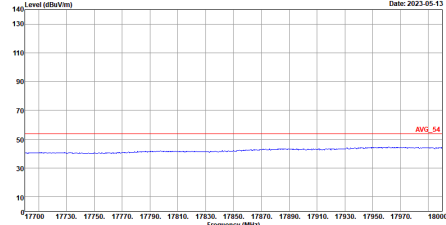

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
<p>14.47G ~14.5G Avg.</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
<p>17.7G ~18G Avg</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>

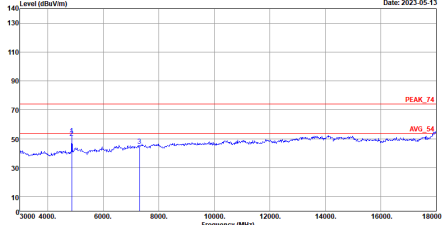
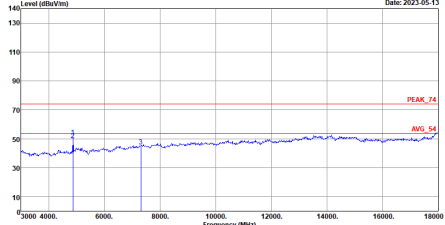


WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 VERTICAL</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
17.7G ~18G Avg		

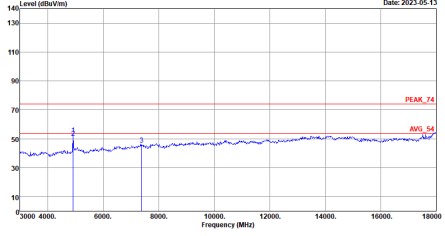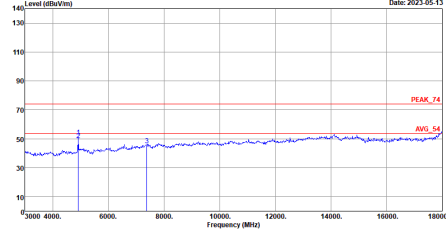

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak		
Avg.		



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
17.7G ~18G Avg		



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 VERTICAL</p>







WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 VERTICAL</p>

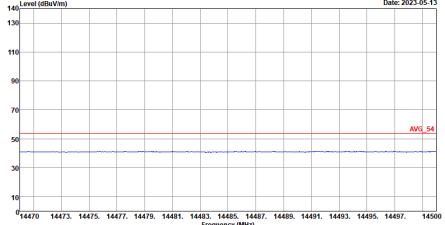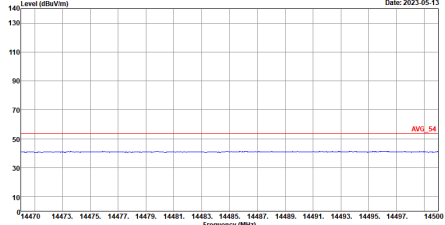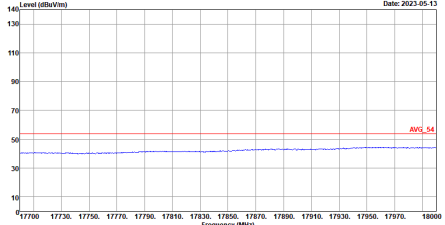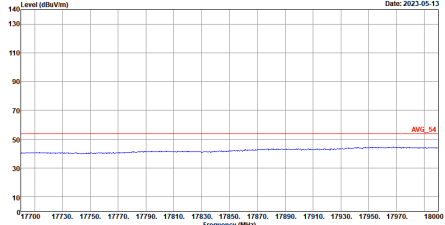

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1	Horizontal	Vertical
<p>14.47G ~14.5G Avg.</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
<p>17.7G ~18G Avg</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 VERTICAL</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
17.7G ~18G Avg		



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_02114 VERTICAL</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
17.7G ~18G Avg		



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH2-HY Condition : PEAK_74 3m HORN_9120D_02114 HORIZONTAL</p>	<p>Site : 03CH2-HY Condition : PEAK_74 3m HORN_9120D_02114 VERTICAL</p>







WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	<p>Date: 2023-05-13</p> <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Date: 2023-05-13</p> <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
	<p>Date: 2023-05-13</p> <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	<p>Date: 2023-05-13</p> <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
17.7G ~18G Avg		



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
Peak	<p>Site : 03CH2-HY Condition : PEAK_74 3m HORN_9120D_02114 HORIZONTAL</p>	<p>Site : 03CH2-HY Condition : PEAK_74 3m HORN_9120D_02114 VERTICAL</p>
Avg.		

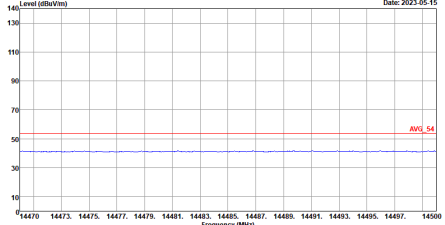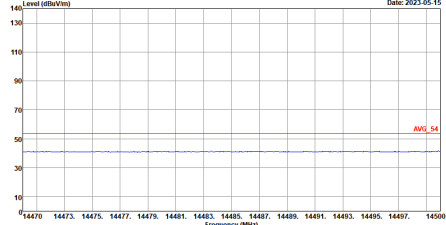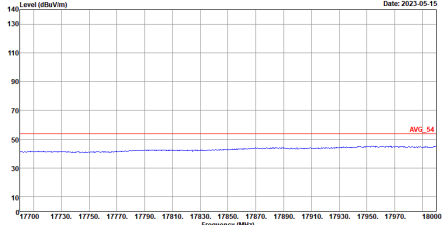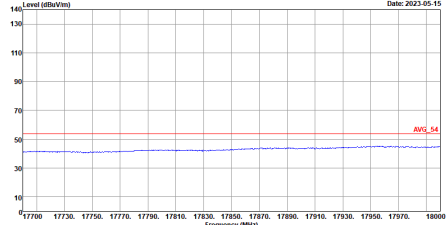

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
<p>14.47G ~14.5G Avg.</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>
<p>17.7G ~18G Avg</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 HORIZONTAL</p>	 <p>Site : 03CH12-HY Condition : AV6_54 3m HORN_91200_02114 VERTICAL</p>



Emission above 18GHz
2.4GHz WIFI 802.11n HT20 (SHF @ 1m)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot showing Level (dBu/1m) vs Frequency (MHz) with Peak and Avg values. Includes site and condition details for both orientations.



Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11n HT20 LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH12-HY Condition : QP 3m 81L06_6111D_37059 HORIZONTAL</p>	<p>Site : 03CH12-HY Condition : QP 3m 81L06_6111D_37059 VERTICAL</p>



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	99.52	-	-	10Hz
802.11g	96.86	1390	0.72	1kHz
2.4GHz 802.11n HT20	96.65	0.77	1kHz	

