FCC RADIO TEST REPORT

FCC ID	:	**HLZA24001**
Equipment	:	**Tablet PC**
Brand Name	:	**acer**
Model Name	:	**A24001**
Applicant	:	**Acer Incorporated** **8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)**
Manufacturer	:	**Acer Incorporated** **8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)**
Standard	:	**FCC Part 15 Subpart C §15.247**

The product was received on Dec. 28, 2023 and testing was performed from Jan. 11, 2024 to Feb. 23, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

Table of Contents

History of this test report

Report No.	Version	Description	Issue Date
FR3D2701C	01	Initial issue of report	Mar. 14, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	3.62 dB under the limit at 87.51 MHz
3.6	15.207	AC Conducted Emission	Pass	5.44 dB under the limit at 13.08 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Lewis Ho
Report Producer: Ming Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Sample 1	With PCB 1, Camera 1, DDR 1
Sample 2	With PCB 2, Camera 2, DDR 2
Sample 3	With PCB 2, Camera 1, DDR 1
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.
Antenna Type	WLAN: FPC Antenna Bluetooth: FPC Antenna GPS / Glonass / BDS: PIFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	1.78

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	**Sporton Site No.**
	TH05-HY, CO07-HY, 03CH22-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

The final test modes include the worst data rates for each modulation shown in the table below.

Single Antenna

Modulation	Data Rate
802.11b	**1 Mbps**
802.11g	**6 Mbps**
802.11n HT20	**MCS0**

Test Cases	
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Earphone + USB Cable (Charging from AC Adapter) for Sample 1 Mode 2: Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Earphone + USB Cable (Charging from AC Adapter) for Sample 2 Mode 3 Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Earphone + USB Cable (Charging from AC Adapter) for Sample 3
Remark: The worst case of Conducted Emission is mode 2; only the test data of it was reported.	

<Sample 1>

Ch. #	2400-2483.5 MHz		
	802.11b	802.11g	802.11n HT20
Low	01	01	01
Middle	06	06	06
High	11	11	11

<Sample 2>

Ch. #	2400-2483.5 MHz
	802.11b
Low	-
Middle	-
High	11

<Sample 3>

Ch. #	2400-2483.5 MHz
	802.11b
Low	-
Middle	-
High	11

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

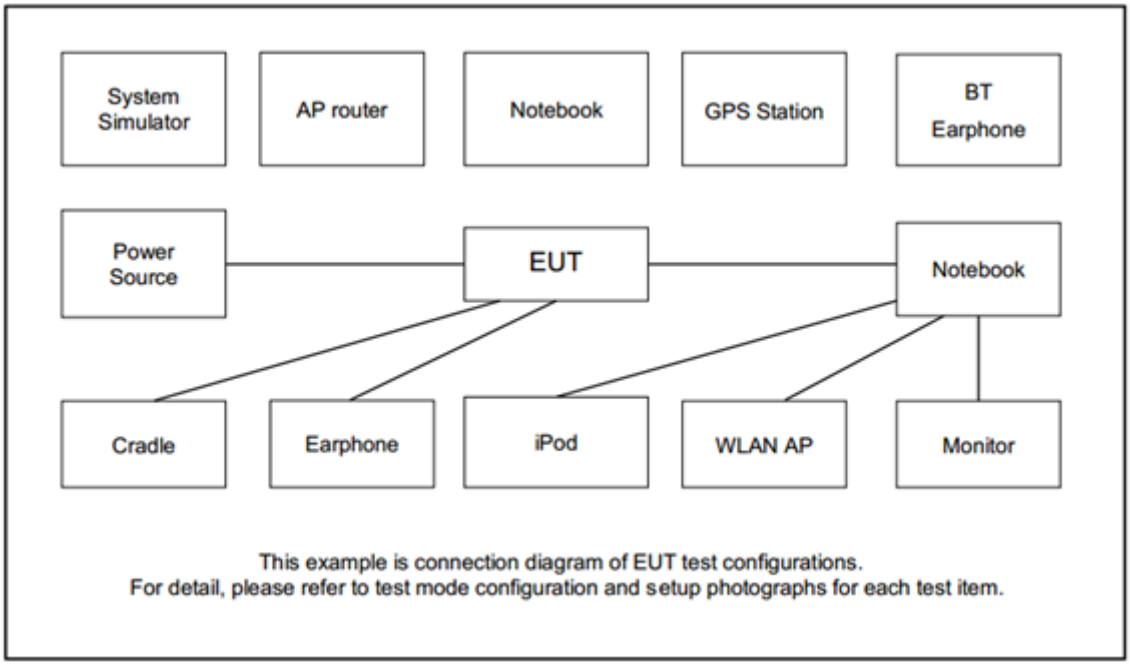

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
2.	WLAN AP	ASUS	RT-AC52	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded, 1.8 m	N/A
5.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Acer_AV0U0_P11-11_0.004.03_PAPAP_GEN1” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The RF test items, utility “Acer_AV0U0_P11-11_0.004.03_PAPAP_GEN1” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

Example:
The spectrum analyzer offset is derived from RF cable loss and attenuator factor.
Offset = RF cable loss + attenuator factor.
Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).
= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

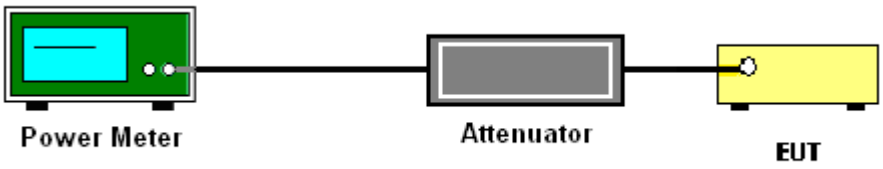

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.

7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".
8. Use the following spectrum analyzer settings:
   (1) Span shall wide enough to fully capture the emission being measured;
   (2) Set RBW = 100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
   (3) Set RBW = 1 MHz, VBW= 3 MHz for f ≥ 1 GHz for peak measurement.
   For average measurement:
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup

For radiated emissions below 30MHz

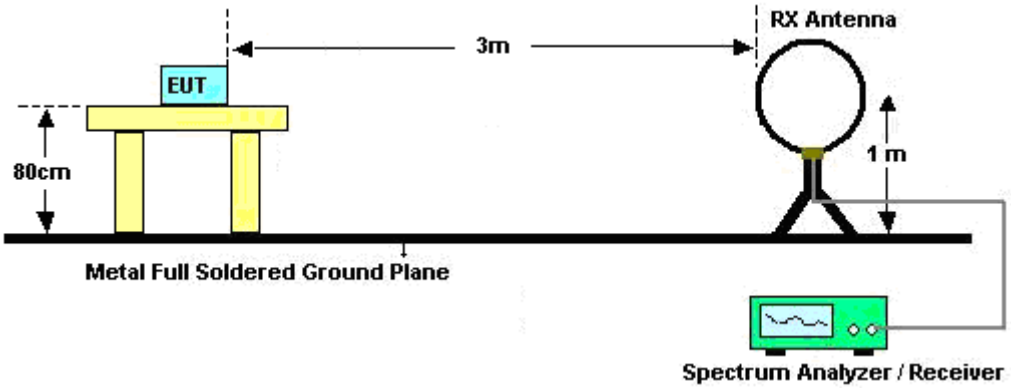

For radiated emissions from 30MHz to 1GHz

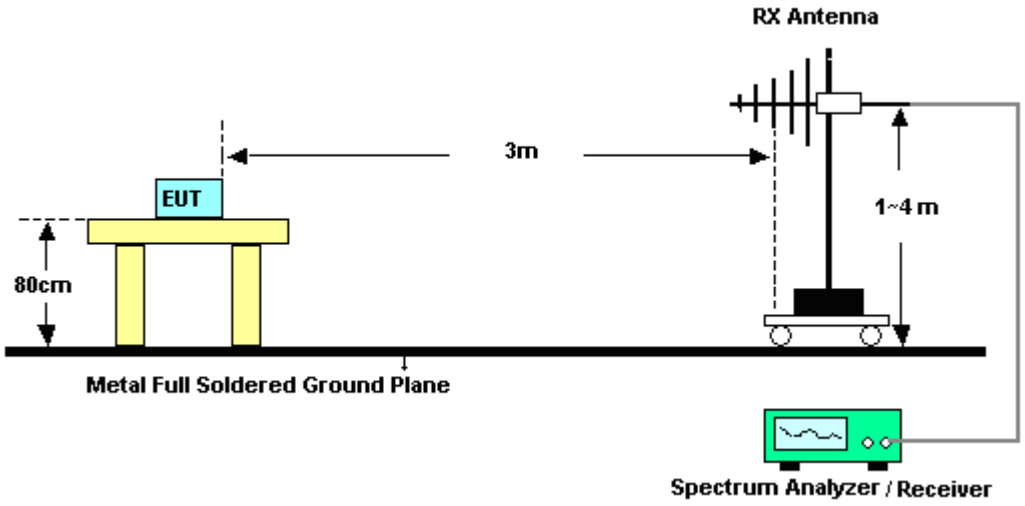

For radiated test from 1GHz to 18GHz

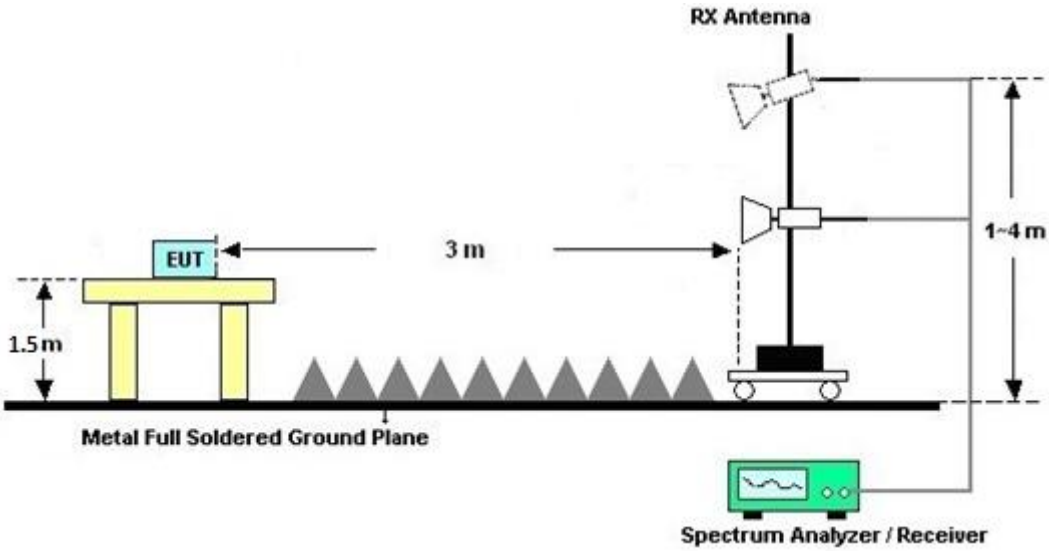

For radiated test above 18GHz

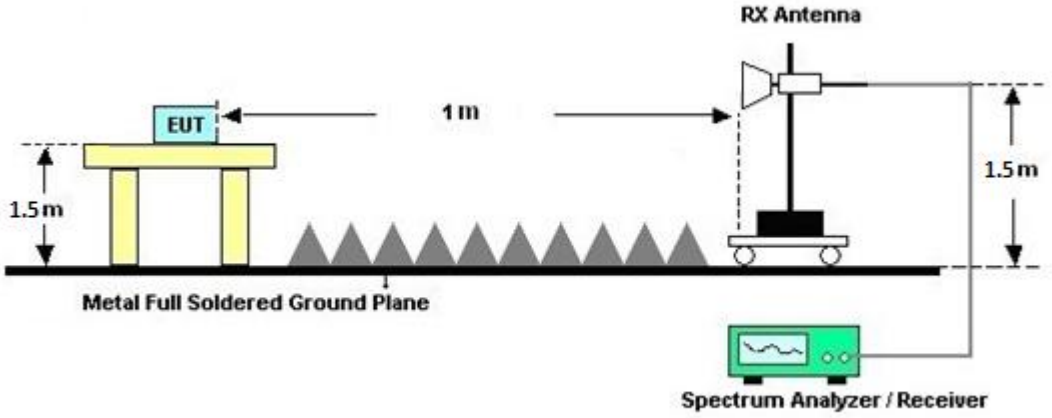

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

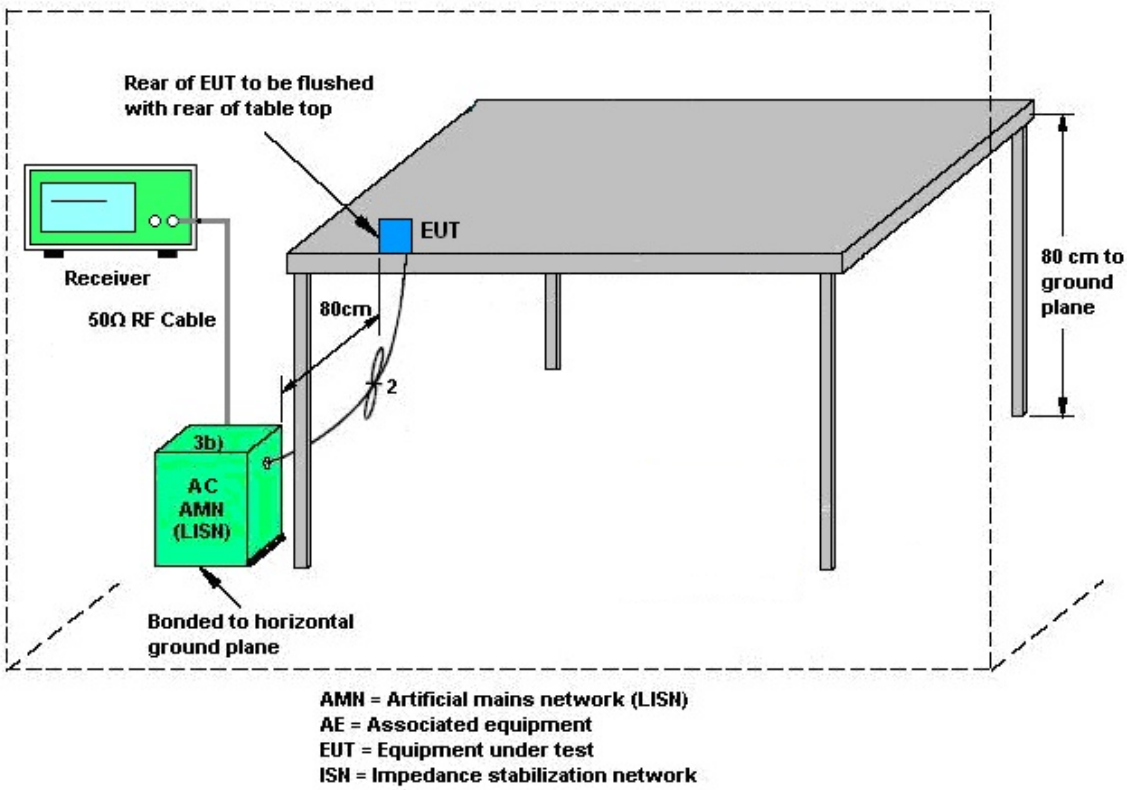

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jan. 11, 2024~ Feb. 21, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Jun. 05, 2023	Jan. 11, 2024~ Feb. 21, 2024	Jun. 04, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	Jan. 11, 2024~ Feb. 21, 2024	Aug. 22, 2024	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Feb. 02, 2024~ Feb. 07, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 02, 2024~ Feb. 07, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2023	Feb. 02, 2024~ Feb. 07, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 15, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 14, 2024	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 05, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 04, 2024	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 13, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 12, 2024	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Feb. 02, 2024~ Feb. 07, 2024	Sep. 19, 2024	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz~30MHz	Feb. 28, 2023	Feb. 03, 2024~ Feb. 23, 2024	Feb. 27, 2024	Radiation (03CH22-HY)
Bilog Antenna with 6dB	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Oct. 15, 2023	Feb. 03, 2024~ Feb. 23, 2024	Oct. 14, 2024	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 15, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jul. 14, 2024	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18EN	1GHz~18GHz	Jul. 12, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jul. 11, 2024	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz-40GHz	Jul. 10, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jul. 09, 2024	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 28, 2023	Feb. 03, 2024~ Feb. 23, 2024	Sep. 27, 2024	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060801	18-40GHz	Jun. 27, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jun. 26, 2024	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY60241058	10Hz~44GHz	Jul. 06, 2023	Feb. 03, 2024~ Feb. 23, 2024	Jul. 05, 2024	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Jan. 03, 2024	Feb. 03, 2024~ Feb. 23, 2024	Jan. 02, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 03, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Feb. 03, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Feb. 03, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_20191 22	RK-002347	N/A	N/A	Feb. 03, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 07, 2023	Feb. 03, 2024~ Feb. 23, 2024	Mar. 06, 2024	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,8046 11/2,804615/2	N/A	Oct. 24, 2023	Feb. 03, 2024~ Feb. 23, 2024	Oct. 23, 2024	Radiation (03CH22-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**3.44 dB**

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**6.50 dB**

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**4.50 dB**

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**4.50 dB**

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**5.40 dB**

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou and Henry Ke	Temperature:	21~25	°C
Test Date:	2024/1/11~2024/2/21	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	12.89	-	8.06	-	0.50	Pass
11b	1Mbps	1	6	2437	12.99	-	8.06	-	0.50	Pass
11b	1Mbps	1	11	2462	12.94	-	8.00	-	0.50	Pass
11g	6Mbps	1	1	2412	16.78	-	15.30	-	0.50	Pass
11g	6Mbps	1	6	2437	16.78	-	15.06	-	0.50	Pass
11g	6Mbps	1	11	2462	16.73	-	15.31	-	0.50	Pass
HT20	MCS0	1	1	2412	17.68	-	15.12	-	0.50	Pass
HT20	MCS0	1	6	2437	17.83	-	15.32	-	0.50	Pass
HT20	MCS0	1	11	2462	17.73	-	15.12	-	0.50	Pass

Report Number : FR3D2701C

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	14.80	-		30.00	-	1.78	-	16.58	-	36.00	-	Pass
11b	1Mbps	1	6	2437	14.60	-		30.00	-	1.78	-	16.38	-	36.00	-	Pass
11b	1Mbps	1	11	2462	14.80	-		30.00	-	1.78	-	16.58	-	36.00	-	Pass
11g	6Mbps	1	1	2412	14.70	-		30.00	-	1.78	-	16.48	-	36.00	-	Pass
11g	6Mbps	1	6	2437	14.90	-		30.00	-	1.78	-	16.68	-	36.00	-	Pass
11g	6Mbps	1	11	2462	14.70	-		30.00	-	1.78	-	16.48	-	36.00	-	Pass
HT20	MCS0	1	1	2412	14.60	-		30.00	-	1.78	-	16.38	-	36.00	-	Pass
HT20	MCS0	1	6	2437	14.80	-		30.00	-	1.78	-	16.58	-	36.00	-	Pass
HT20	MCS0	1	11	2462	14.60	-		30.00	-	1.78	-	16.38	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

Report Number : FR3D2701C

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-8.14	-		1.78	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-7.82	-		1.78	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-8.01	-		1.78	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-10.37	-		1.78	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-10.75	-		1.78	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-10.65	-		1.78	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-11.47	-		1.78	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-11.21	-		1.78	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-11.51	-		1.78	-	8.00	-	Pass
Measured power density (dBm) has offset with cable loss.													

6dB and 99% Occupied Bandwidth

<802.11b>

6dB Bandwidth	99% Occupied Bandwidth
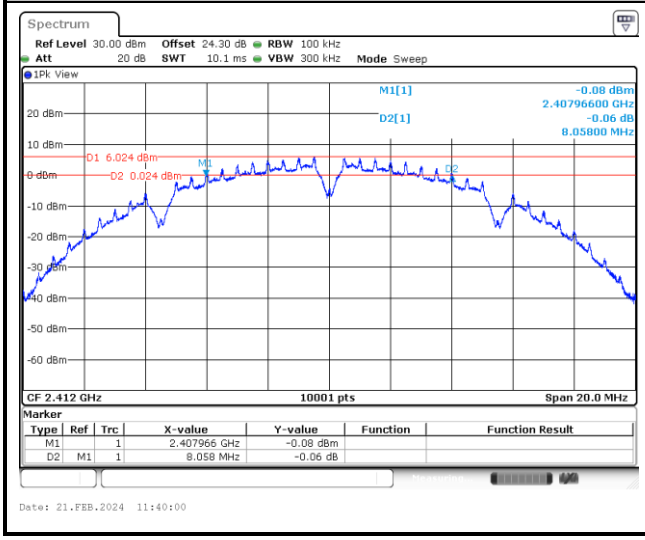	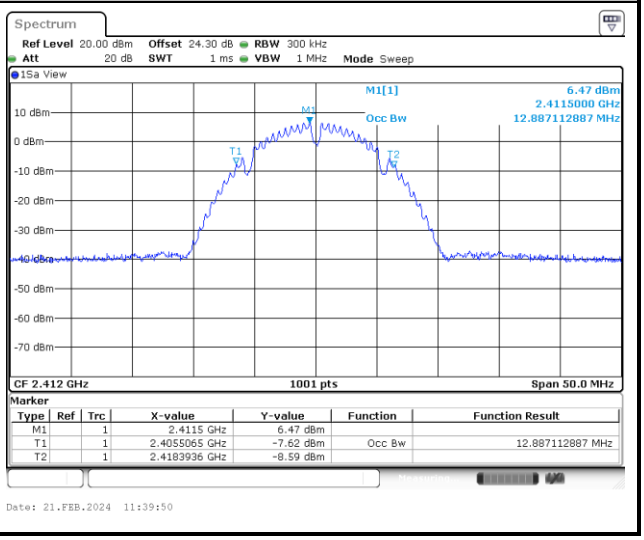

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11g>

6dB Bandwidth	99% Occupied Bandwidth
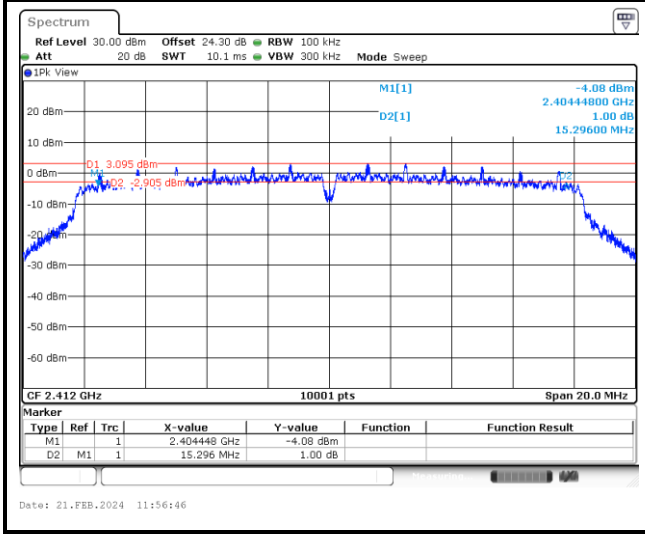	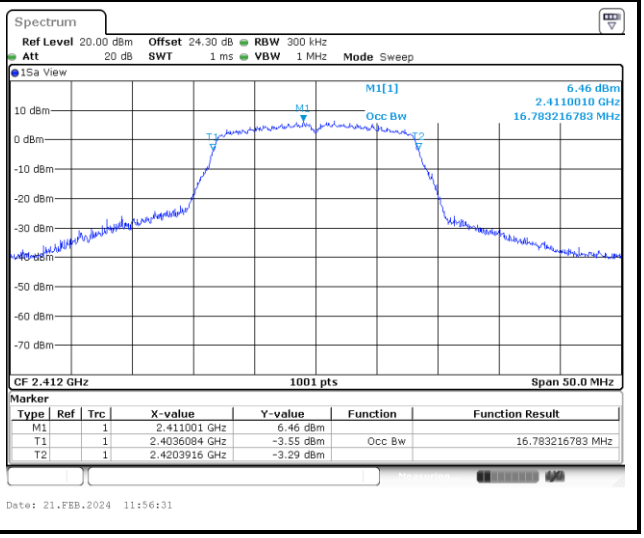

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11n HT20>

6dB Bandwidth	99% Occupied Bandwidth
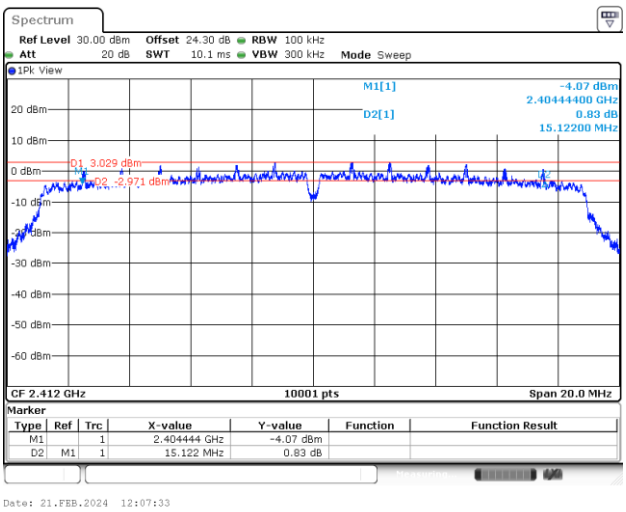	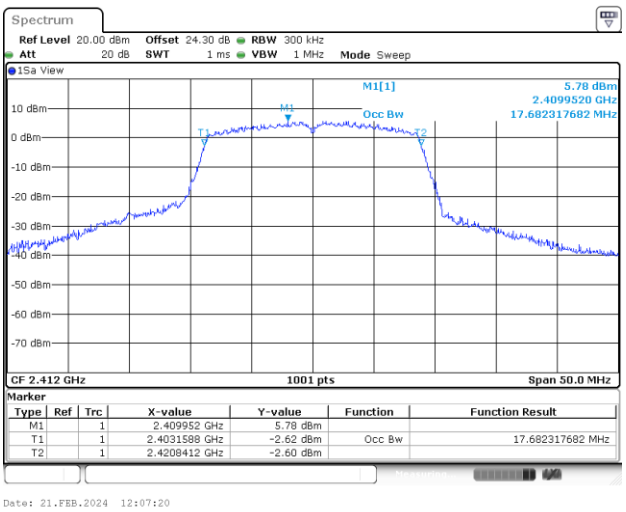

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

Power Spectral Density(dBm/3kHz)

<802.11b>

Worst Case Power Density (dBm/3kHz)

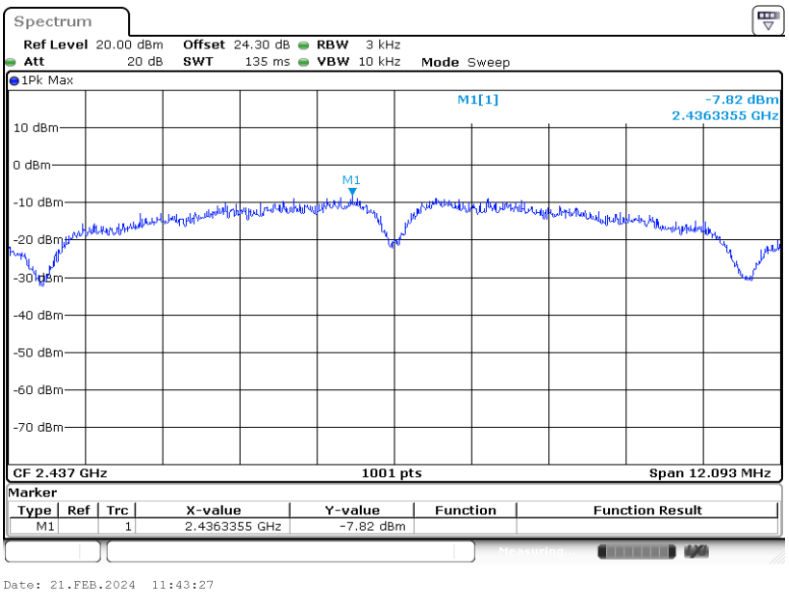

<802.11g>

Worst Case Power Density (dBm/3kHz)

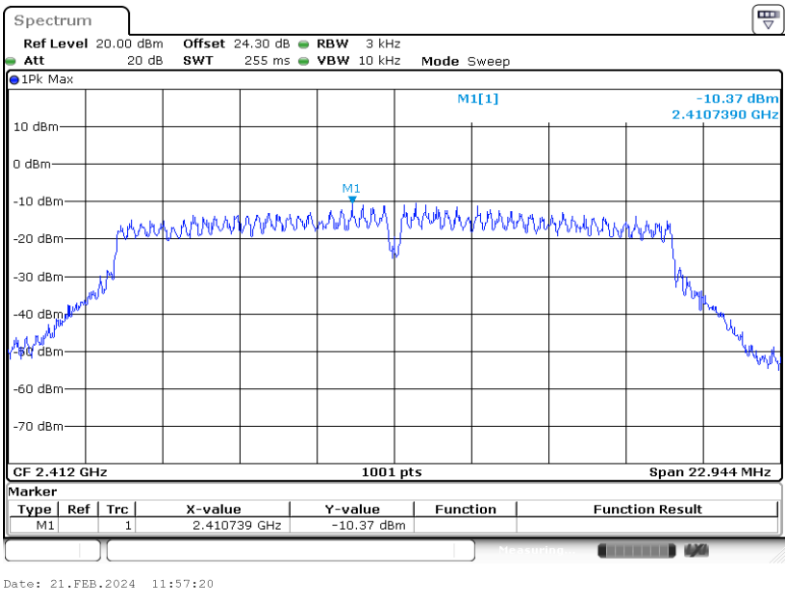

<802.11n HT20>

Worst Case Power Density (dBm/3kHz)

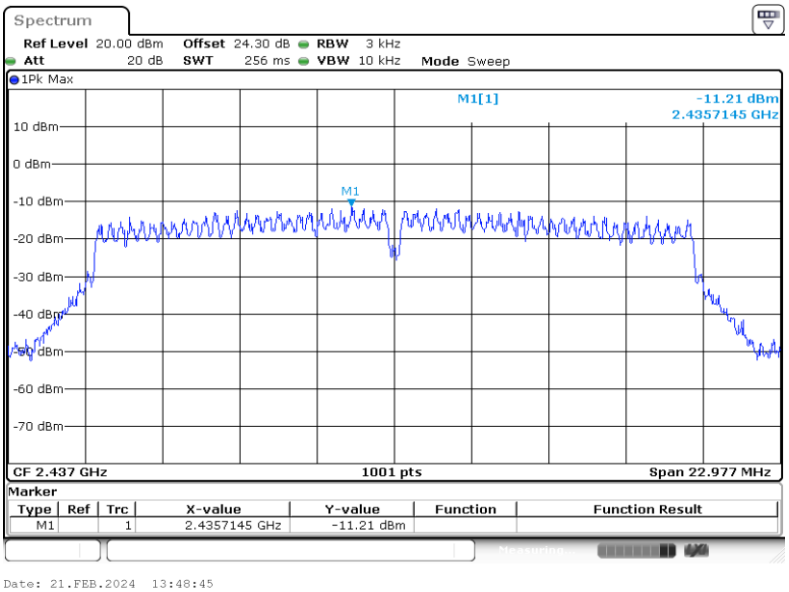

Band Edges and Spurious Emission

Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01

100kHz PSD reference Level

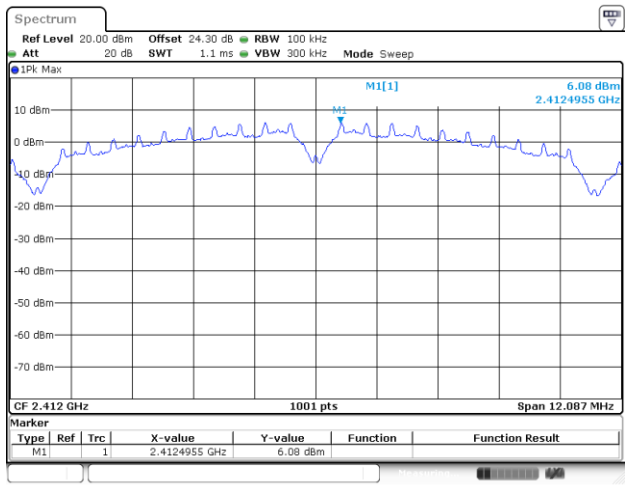

Low Channel Plot

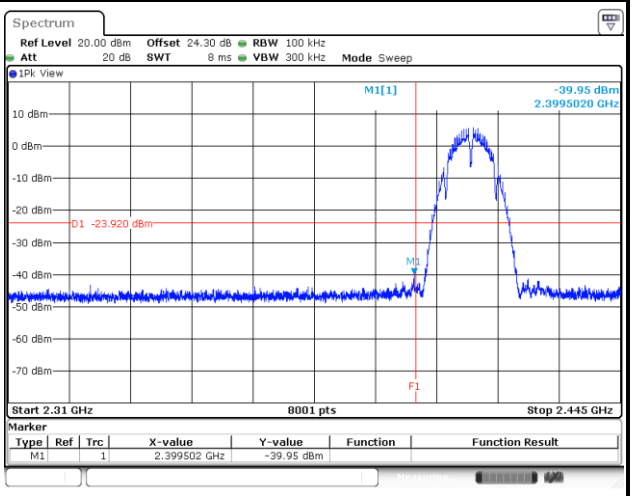

Spurious Emission 30MHz~1GHz

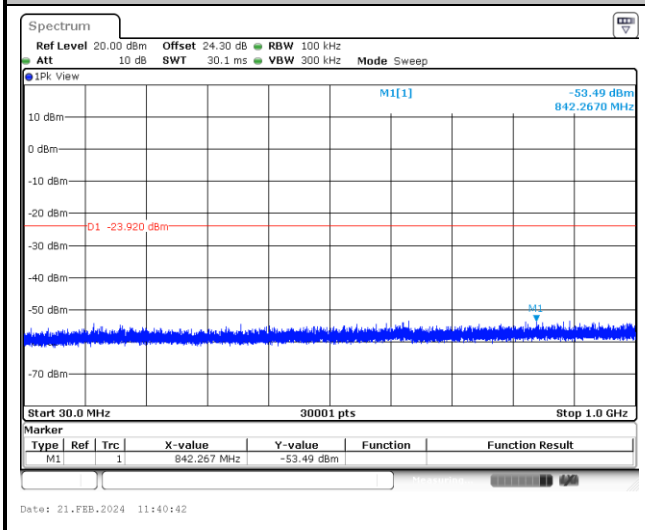

Spurious Emission 1GHz~26.5GHz

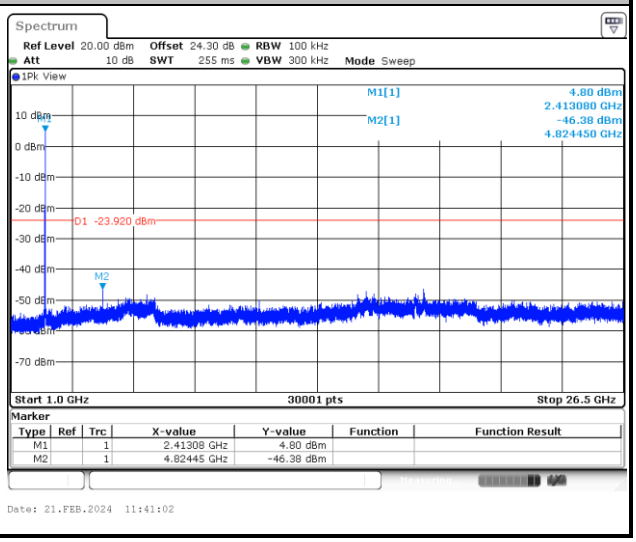

Test Mode :	802.11b	Test Channel :	06

100kHz PSD reference Level	Middle Channel Plot
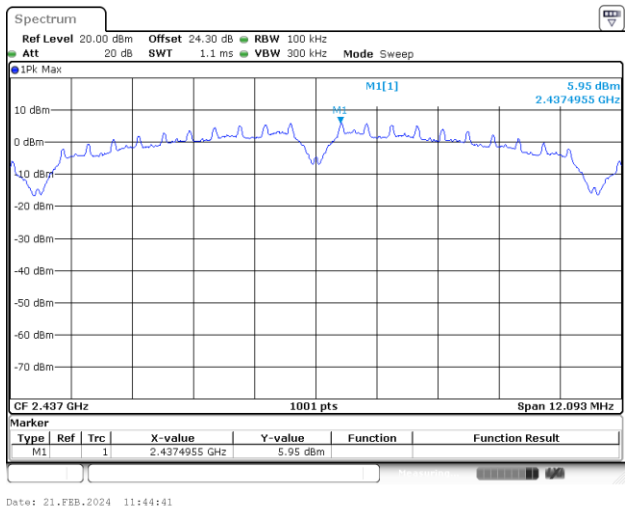	

Spurious Emission 30MHz~1GHz	Spurious Emission 1GHz~26.5GHz
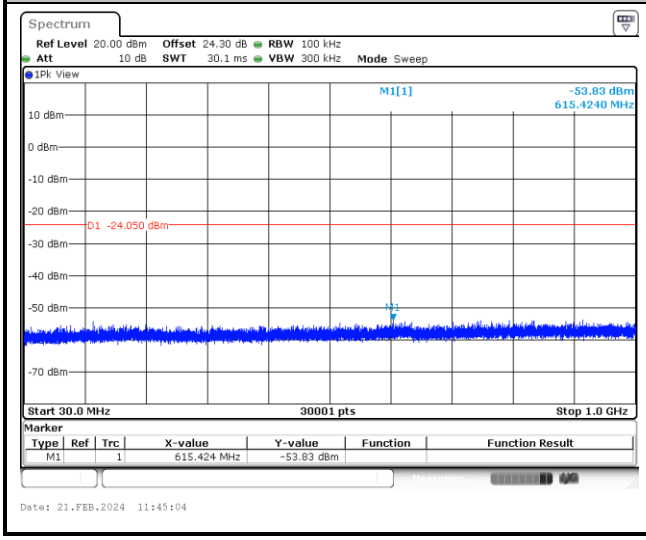	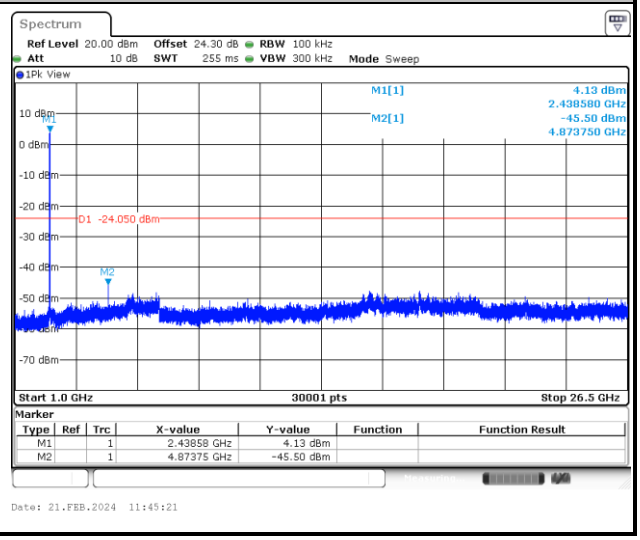

Test Mode :	802.11b	Test Channel :	11

100kHz PSD reference Level	High Channel Plot
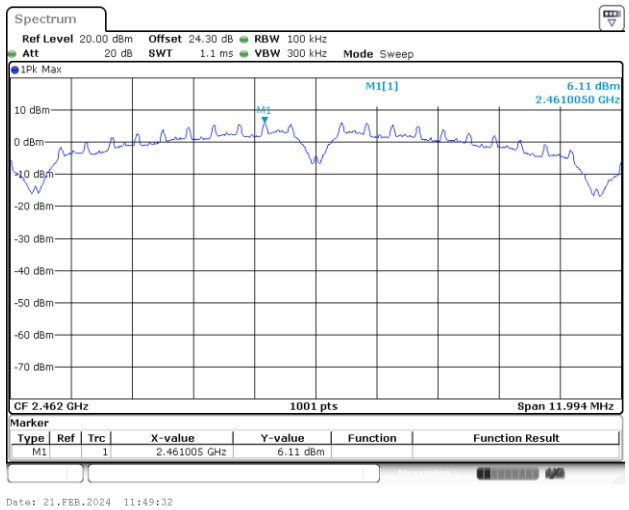	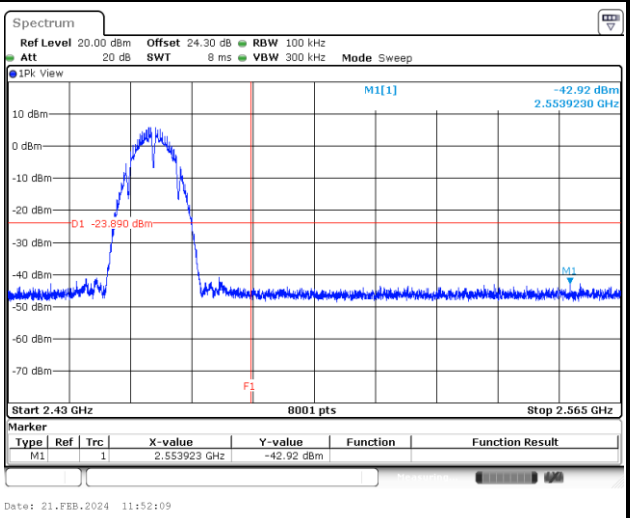
Spurious Emission 30MHz~1GHz	**Spurious Emission 1GHz~26.5GHz**
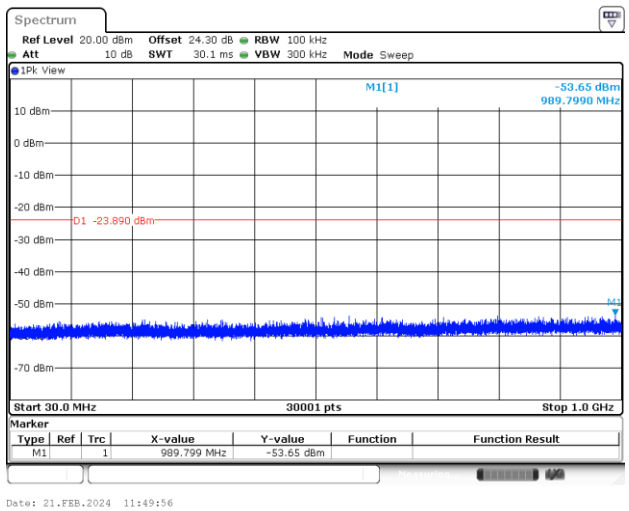	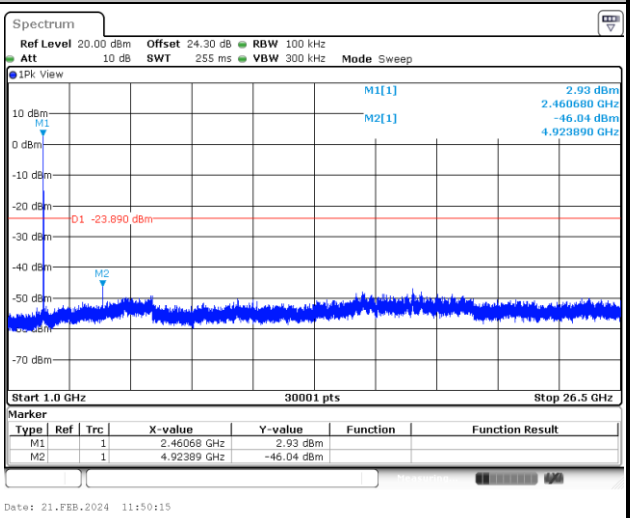

Test Mode :	802.11g	Test Channel :	01

100kHz PSD reference Level	Low Channel Plot
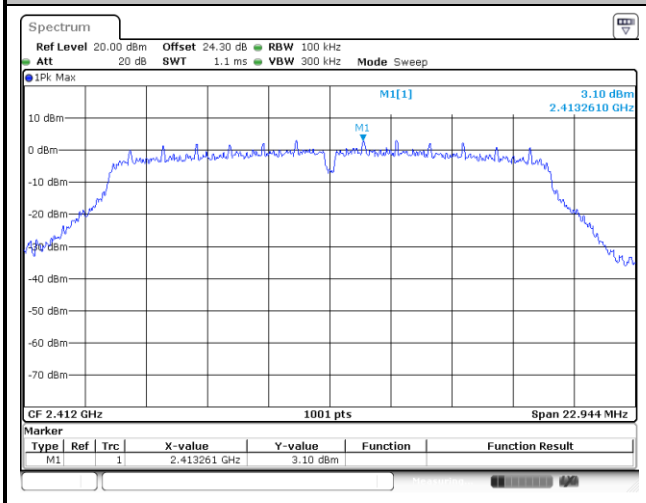	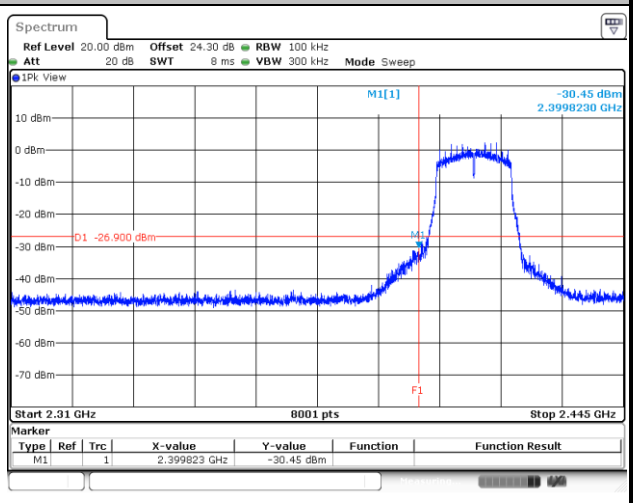
Spurious Emission 30MHz~1GHz	**Spurious Emission 1GHz~26.5GHz**
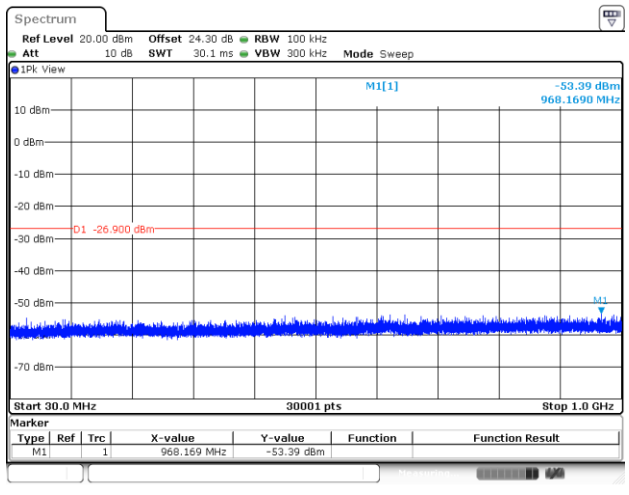	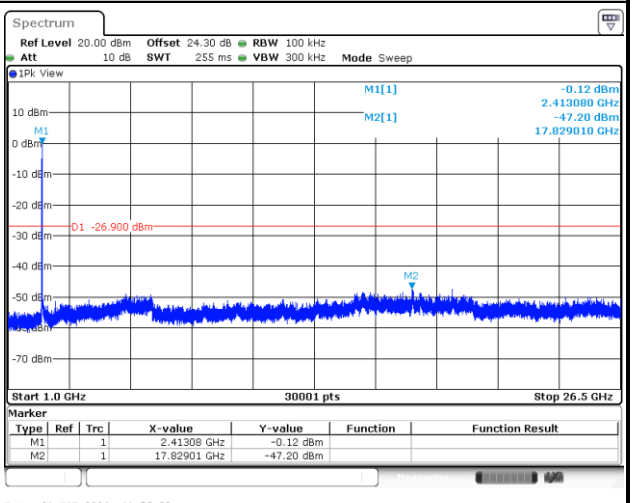

Test Mode :	802.11g	Test Channel :	06

100kHz PSD reference Level	Middle Channel Plot
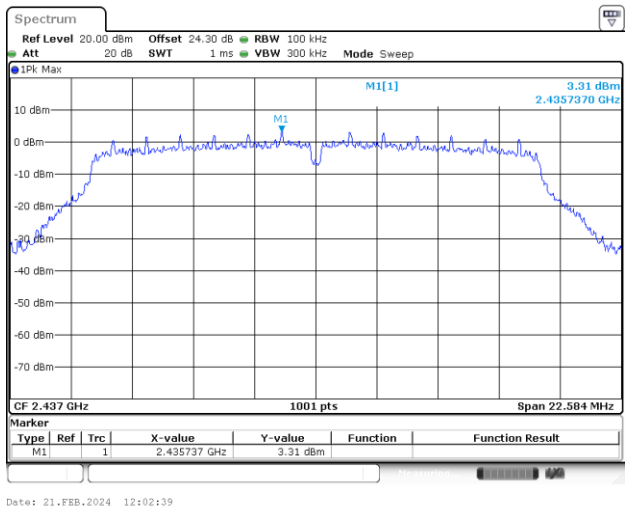	

Spurious Emission 30MHz~1GHz	Spurious Emission 1GHz~26.5GHz
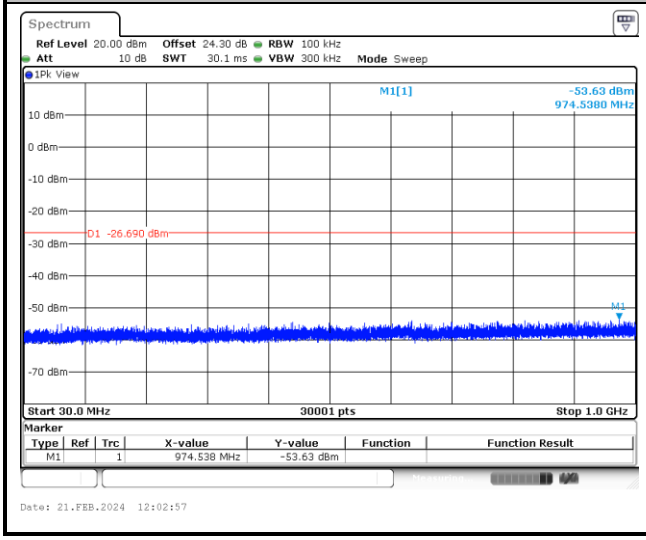	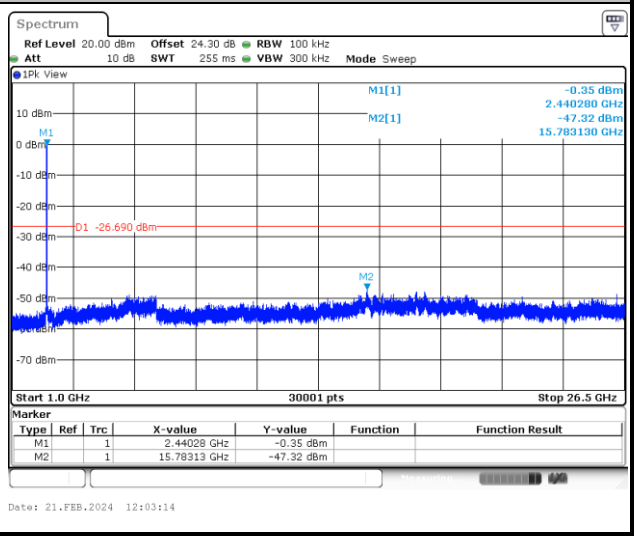

Test Mode :	802.11g	Test Channel :	11

100kHz PSD reference Level	High Channel Plot
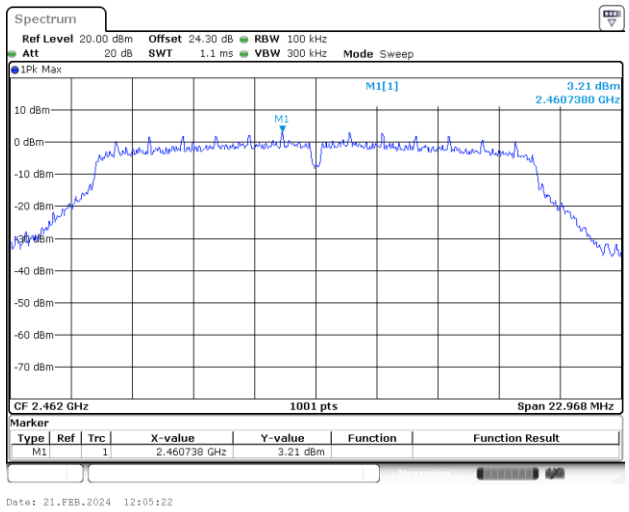	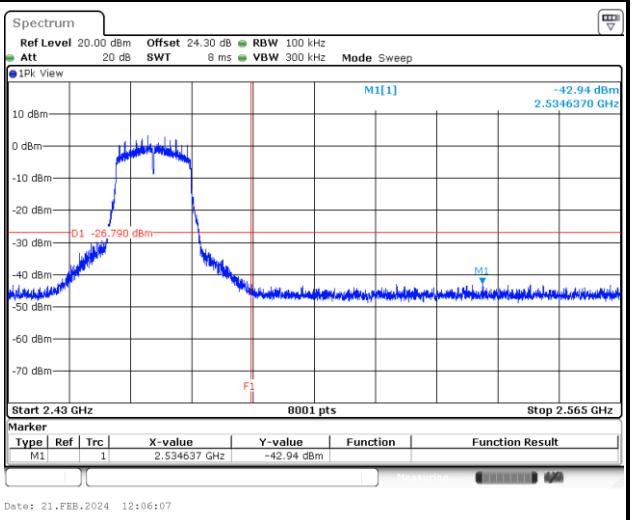
Spurious Emission 30MHz~1GHz	**Spurious Emission 1GHz~26.5GHz**
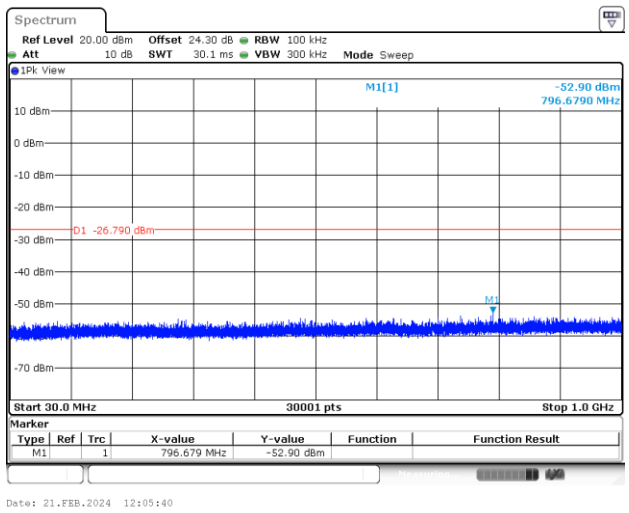	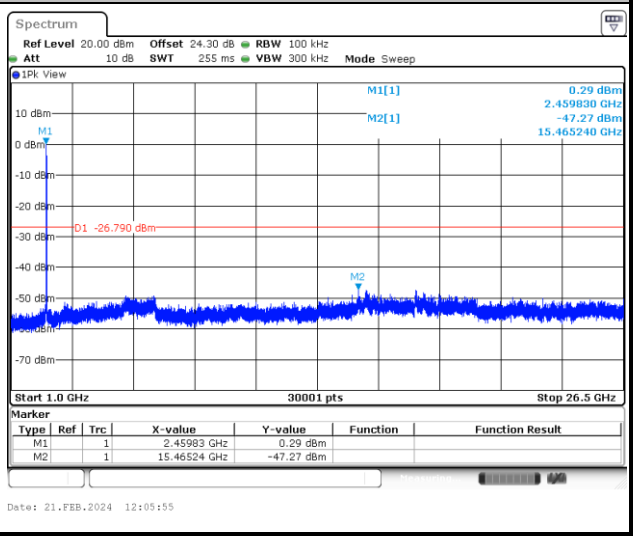

Test Mode :	802.11n HT20	Test Channel :	01

100kHz PSD reference Level	Low Channel Plot
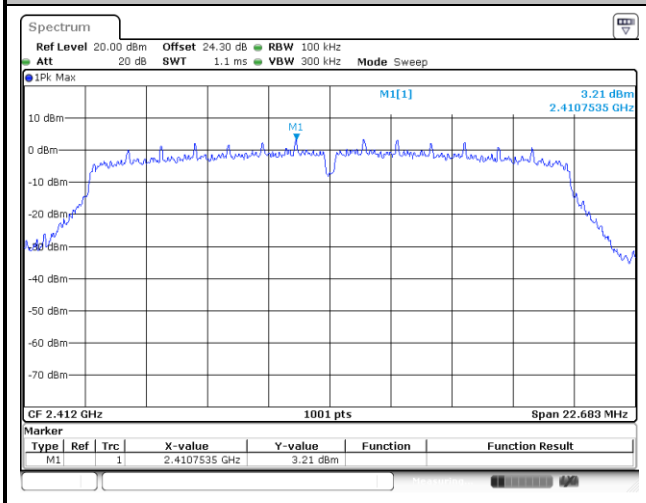	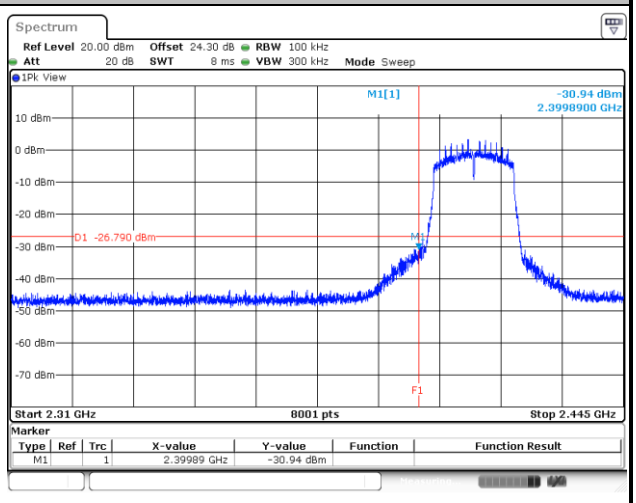
Spurious Emission 30MHz~1GHz	**Spurious Emission 1GHz~26.5GHz**
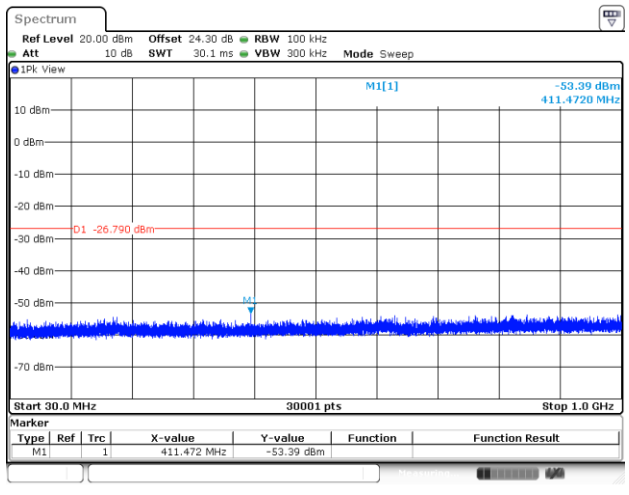	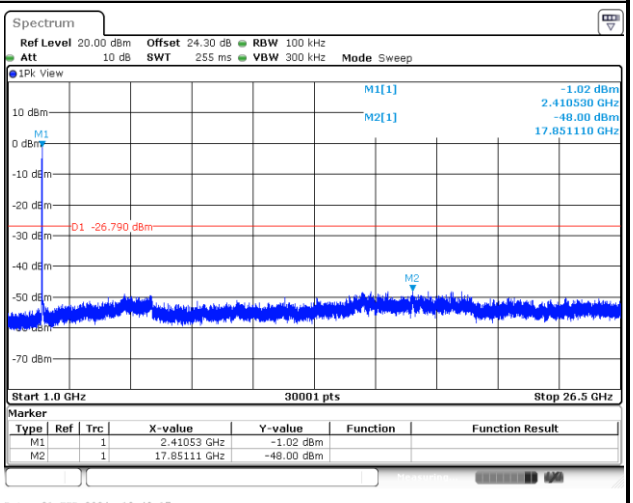

Test Mode :	802.11n HT20	Test Channel :	06

100kHz PSD reference Level	Middle Channel Plot
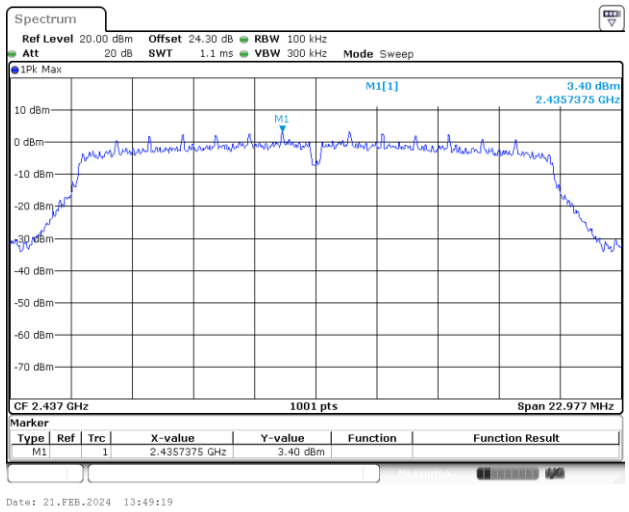	

Spurious Emission 30MHz~1GHz	Spurious Emission 1GHz~26.5GHz
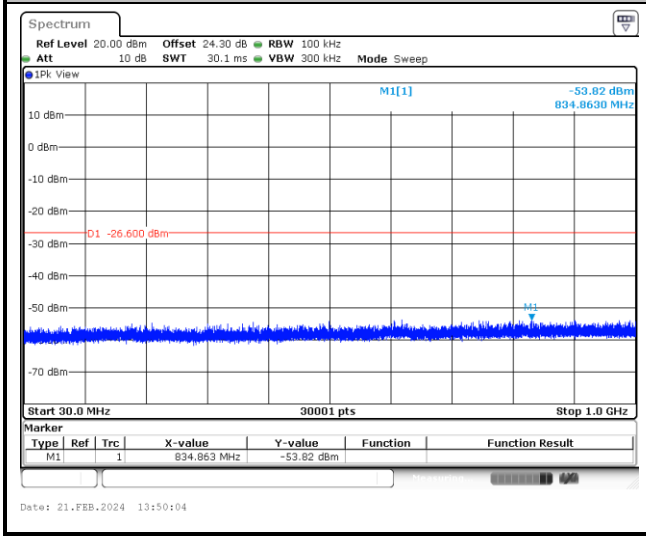	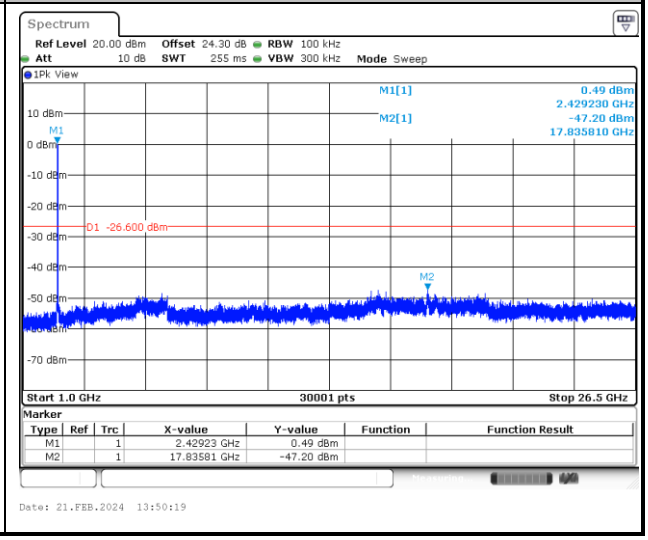

Test Mode :	802.11n HT20	Test Channel :	11

100kHz PSD reference Level	High Channel Plot
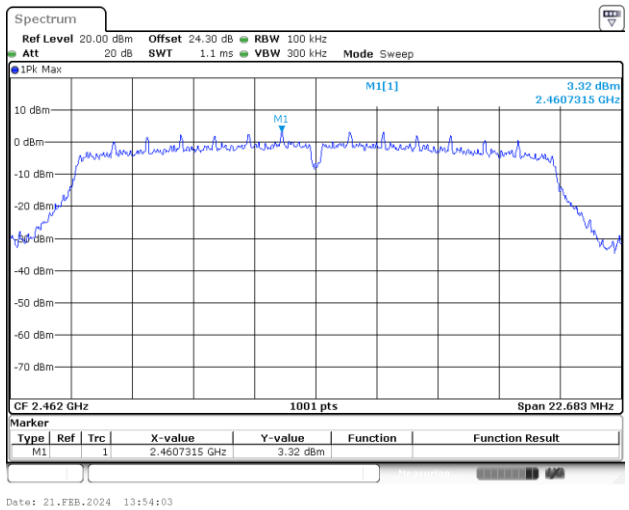	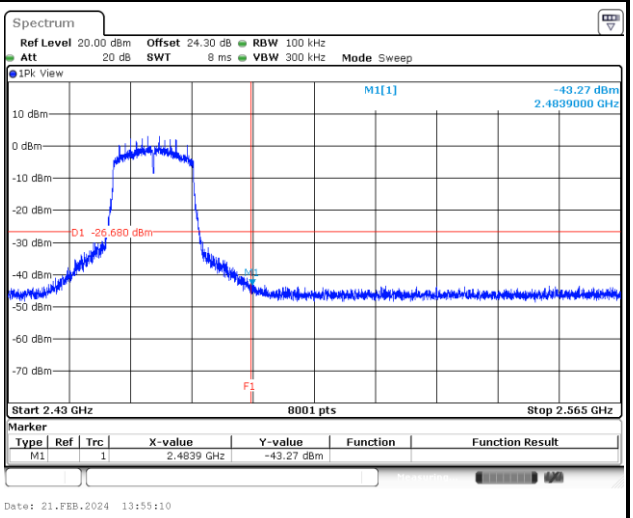
Spurious Emission 30MHz~1GHz	**Spurious Emission 1GHz~26.5GHz**
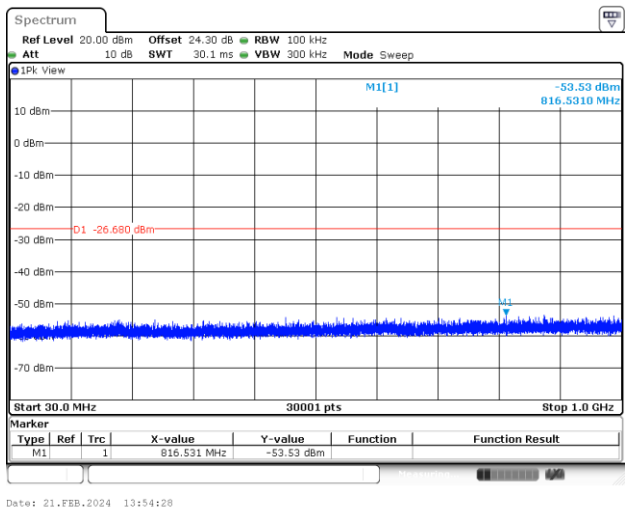	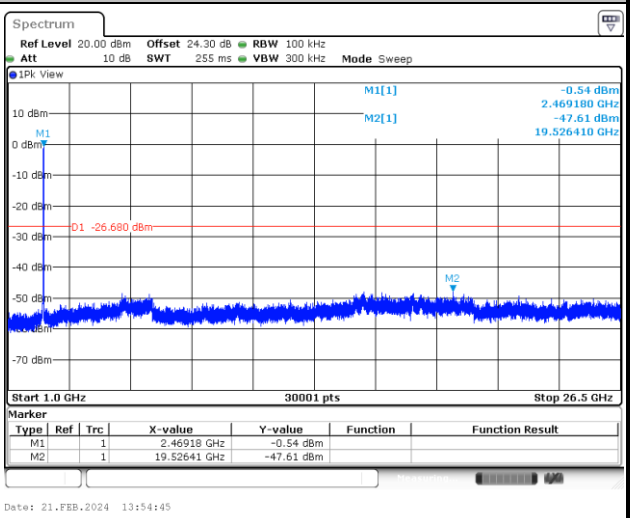

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	**Temperature :**	18.8~24.2℃
		Relative Humidity :	50.2~60.4%

EUT Information

Report NO :	3D2701
Test Mode :	Mode 2
Test Voltage :	120Vac/60Hz
Phase :	Line

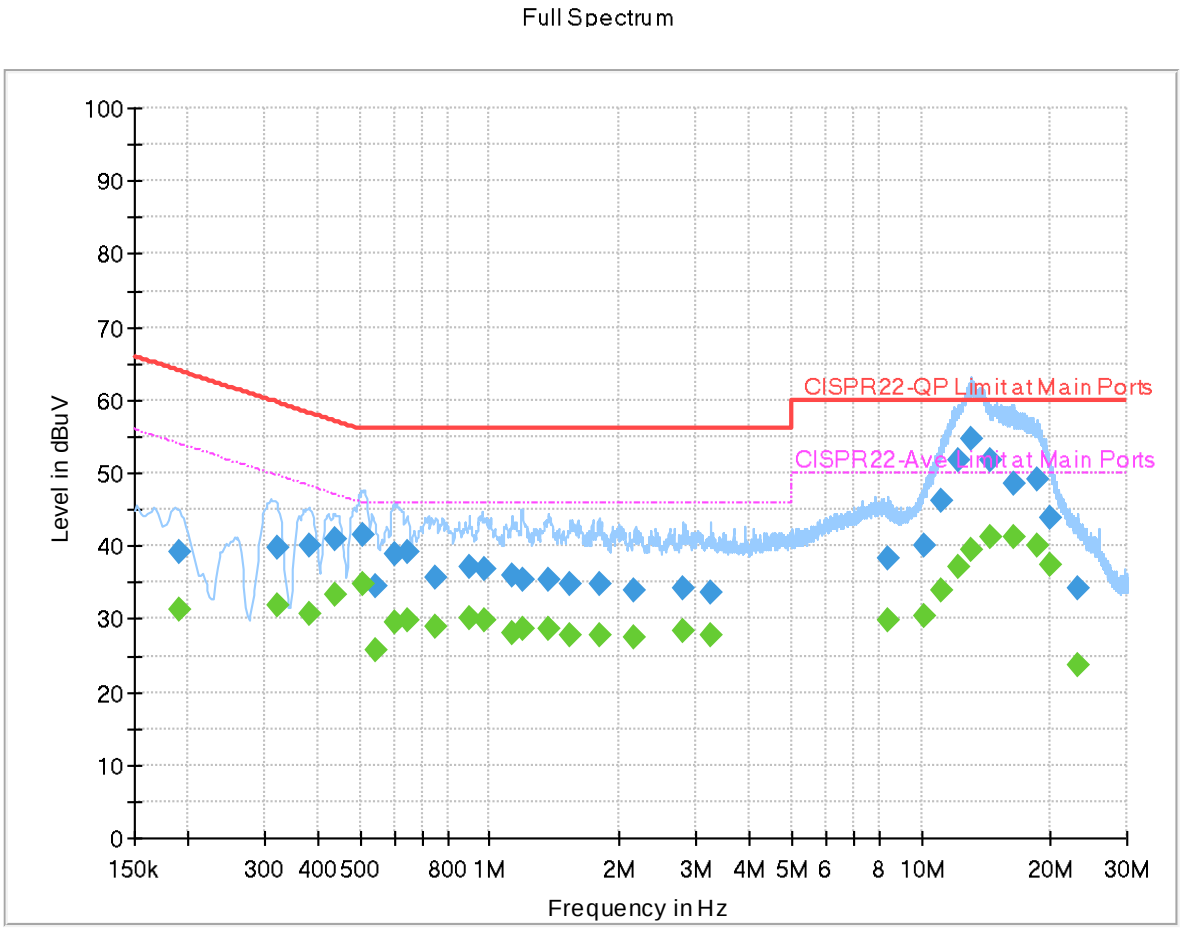

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.189960	---	31.28	54.04	22.76	L1	OFF	19.9
0.189960	39.15	---	64.04	24.89	L1	OFF	19.9
0.320010	---	31.78	49.71	17.93	L1	OFF	19.9
0.320010	39.82	---	59.71	19.89	L1	OFF	19.9
0.382290	---	30.61	48.23	17.62	L1	OFF	19.9
0.382290	40.02	---	58.23	18.21	L1	OFF	19.9
0.435660	---	33.36	47.14	13.78	L1	OFF	19.9
0.435660	40.83	---	57.14	16.31	L1	OFF	19.9
0.505500	---	34.90	46.00	11.10	L1	OFF	19.9
0.505500	41.48	---	56.00	14.52	L1	OFF	19.9
0.541500	---	25.76	46.00	20.24	L1	OFF	19.9
0.541500	34.38	---	56.00	21.62	L1	OFF	19.9
0.602430	---	29.51	46.00	16.49	L1	OFF	19.9
0.602430	38.78	---	56.00	17.22	L1	OFF	19.9
0.644370	---	29.86	46.00	16.14	L1	OFF	19.9
0.644370	39.11	---	56.00	16.89	L1	OFF	19.9
0.744090	---	28.84	46.00	17.16	L1	OFF	19.9
0.744090	35.81	---	56.00	20.19	L1	OFF	19.9
0.899250	---	30.11	46.00	15.89	L1	OFF	19.9

0.899250	37.11	---	56.00	18.89	L1	OFF	19.9
0.971250	---	29.69	46.00	16.31	L1	OFF	19.9
0.971250	36.90	---	56.00	19.10	L1	OFF	19.9
1.128750	---	27.99	46.00	18.01	L1	OFF	20.0
1.128750	35.92	---	56.00	20.08	L1	OFF	20.0
1.191570	---	28.64	46.00	17.36	L1	OFF	20.0
1.191570	35.50	---	56.00	20.50	L1	OFF	20.0
1.364370	---	28.58	46.00	17.42	L1	OFF	20.0
1.364370	35.52	---	56.00	20.48	L1	OFF	20.0
1.541760	---	27.85	46.00	18.15	L1	OFF	20.0
1.541760	34.78	---	56.00	21.22	L1	OFF	20.0
1.792590	---	27.88	46.00	18.12	L1	OFF	20.0
1.792590	34.85	---	56.00	21.15	L1	OFF	20.0
2.169690	---	27.40	46.00	18.60	L1	OFF	20.0
2.169690	33.95	---	56.00	22.05	L1	OFF	20.0
2.810850	---	28.47	46.00	17.53	L1	OFF	20.0
2.810850	34.26	---	56.00	21.74	L1	OFF	20.0
3.258780	---	27.80	46.00	18.20	L1	OFF	20.0
3.258780	33.68	---	56.00	22.32	L1	OFF	20.0
8.380500	---	29.88	50.00	20.12	L1	OFF	20.0
8.380500	38.25	---	60.00	21.75	L1	OFF	20.0
10.132170	---	30.44	50.00	19.56	L1	OFF	20.1
10.132170	40.03	---	60.00	19.97	L1	OFF	20.1
11.184000	---	33.78	50.00	16.22	L1	OFF	20.1
11.184000	46.27	---	60.00	13.73	L1	OFF	20.1
12.146190	---	37.14	50.00	12.86	L1	OFF	20.1
12.146190	51.61	---	60.00	8.39	L1	OFF	20.1
13.082550	---	39.34	50.00	10.66	L1	OFF	20.1
13.082550	54.56	---	60.00	5.44	L1	OFF	20.1
14.463060	---	41.30	50.00	8.70	L1	OFF	20.1
14.463060	51.85	---	60.00	8.15	L1	OFF	20.1
16.364040	---	41.20	50.00	8.80	L1	OFF	20.1
16.364040	48.60	---	60.00	11.40	L1	OFF	20.1
18.521250	---	40.09	50.00	9.91	L1	OFF	20.1
18.521250	49.09	---	60.00	10.91	L1	OFF	20.1
19.965750	---	37.48	50.00	12.52	L1	OFF	20.1
19.965750	43.88	---	60.00	16.12	L1	OFF	20.1
23.193060	---	23.76	50.00	26.24	L1	OFF	20.2
23.193060	34.29	---	60.00	25.71	L1	OFF	20.2

EUT Information

Report NO :	3D2701
Test Mode :	Mode 2
Test Voltage :	120Vac/60Hz
Phase :	Neutral

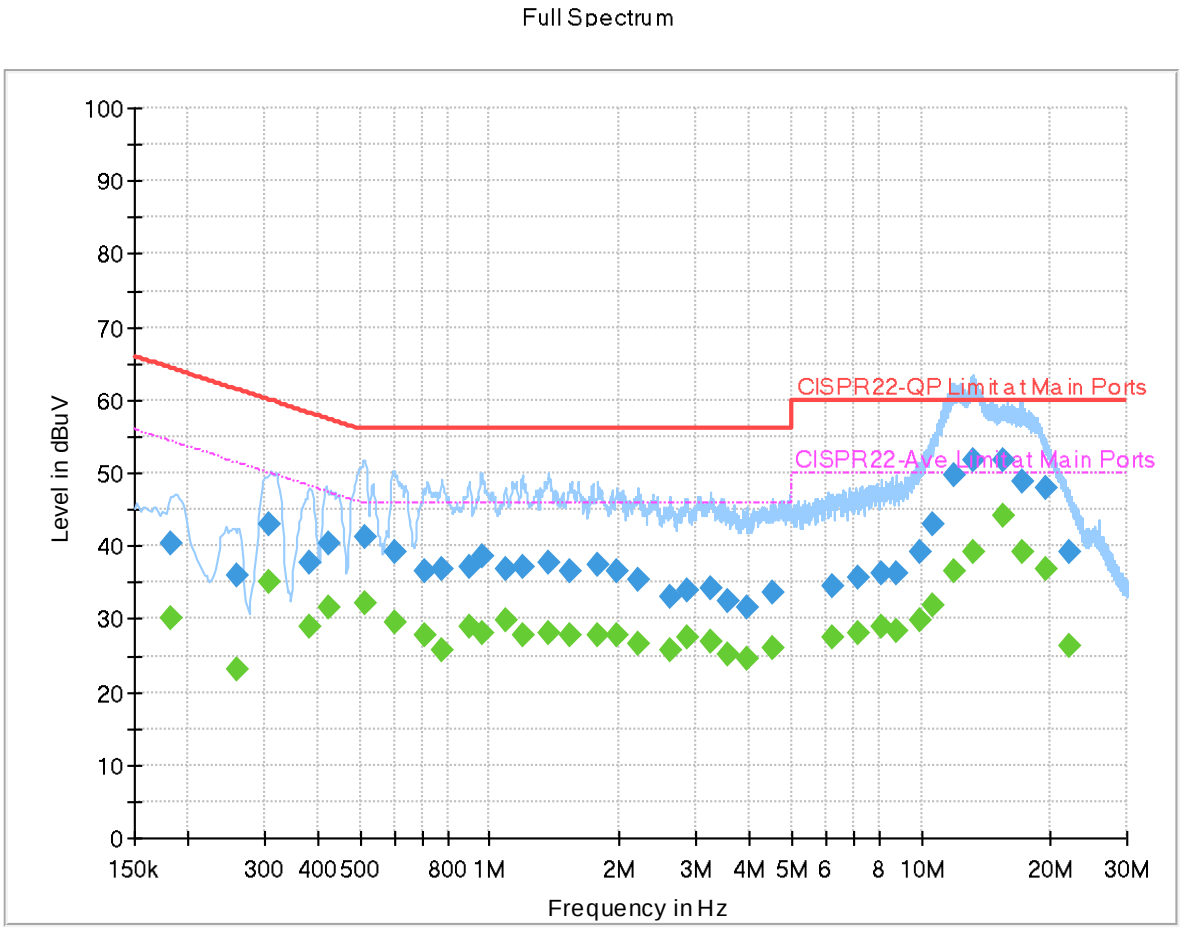

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.182760	40.27	---	64.36	24.09	N	OFF	19.9
0.182760	---	30.10	54.36	24.26	N	OFF	19.9
0.260430	36.07	---	61.42	25.35	N	OFF	19.9
0.260430	---	23.09	51.42	28.33	N	OFF	19.9
0.309210	42.92	---	59.99	17.07	N	OFF	19.9
0.309210	---	35.08	49.99	14.91	N	OFF	19.9
0.381930	37.70	---	58.24	20.54	N	OFF	19.9
0.381930	---	28.93	48.24	19.31	N	OFF	19.9
0.424500	40.47	---	57.36	16.89	N	OFF	19.9
0.424500	---	31.60	47.36	15.76	N	OFF	19.9
0.512700	41.14	---	56.00	14.86	N	OFF	19.9
0.512700	---	32.17	46.00	13.83	N	OFF	19.9
0.604500	39.19	---	56.00	16.81	N	OFF	19.9
0.604500	---	29.49	46.00	16.51	N	OFF	19.9
0.710250	36.63	---	56.00	19.37	N	OFF	19.9
0.710250	---	27.70	46.00	18.30	N	OFF	19.9
0.774420	36.84	---	56.00	19.16	N	OFF	19.9
0.774420	---	25.71	46.00	20.29	N	OFF	19.9
0.899250	37.11	---	56.00	18.89	N	OFF	19.9

0.899250	---	29.04	46.00	16.96	N	OFF	19.9
0.955500	38.50	---	56.00	17.50	N	OFF	19.9
0.955500	---	28.02	46.00	17.98	N	OFF	19.9
1.084470	36.96	---	56.00	19.04	N	OFF	20.0
1.084470	---	29.71	46.00	16.29	N	OFF	20.0
1.191480	37.12	---	56.00	18.88	N	OFF	20.0
1.191480	---	27.67	46.00	18.33	N	OFF	20.0
1.364280	37.69	---	56.00	18.31	N	OFF	20.0
1.364280	---	28.13	46.00	17.87	N	OFF	20.0
1.538250	36.58	---	56.00	19.42	N	OFF	20.0
1.538250	---	27.92	46.00	18.08	N	OFF	20.0
1.782960	37.34	---	56.00	18.66	N	OFF	20.0
1.782960	---	27.89	46.00	18.11	N	OFF	20.0
1.964220	36.63	---	56.00	19.37	N	OFF	20.0
1.964220	---	27.68	46.00	18.32	N	OFF	20.0
2.211000	35.51	---	56.00	20.49	N	OFF	20.0
2.211000	---	26.58	46.00	19.42	N	OFF	20.0
2.628150	33.16	---	56.00	22.84	N	OFF	20.0
2.628150	---	25.86	46.00	20.14	N	OFF	20.0
2.867820	33.96	---	56.00	22.04	N	OFF	20.0
2.867820	---	27.49	46.00	18.51	N	OFF	20.0
3.255990	34.24	---	56.00	21.76	N	OFF	20.0
3.255990	---	26.95	46.00	19.05	N	OFF	20.0
3.576750	32.57	---	56.00	23.43	N	OFF	20.0
3.576750	---	25.27	46.00	20.73	N	OFF	20.0
3.948000	31.45	---	56.00	24.55	N	OFF	20.0
3.948000	---	24.53	46.00	21.47	N	OFF	20.0
4.530750	33.51	---	56.00	22.49	N	OFF	20.0
4.530750	---	26.07	46.00	19.93	N	OFF	20.0
6.216000	34.44	---	60.00	25.56	N	OFF	20.0
6.216000	---	27.36	50.00	22.64	N	OFF	20.0
7.104750	35.80	---	60.00	24.20	N	OFF	20.0
7.104750	---	28.00	50.00	22.00	N	OFF	20.0
8.117160	36.22	---	60.00	23.78	N	OFF	20.0
8.117160	---	28.86	50.00	21.14	N	OFF	20.0
8.751300	36.24	---	60.00	23.76	N	OFF	20.0
8.751300	---	28.47	50.00	21.53	N	OFF	20.0
9.891330	39.20	---	60.00	20.80	N	OFF	20.0
9.891330	---	29.83	50.00	20.17	N	OFF	20.0
10.672080	43.04	---	60.00	16.96	N	OFF	20.1
10.672080	---	31.96	50.00	18.04	N	OFF	20.1
11.915430	49.72	---	60.00	10.28	N	OFF	20.1
11.915430	---	36.56	50.00	13.44	N	OFF	20.1
13.184250	51.82	---	60.00	8.18	N	OFF	20.1
13.184250	---	39.29	50.00	10.71	N	OFF	20.1
15.508950	51.63	---	60.00	8.37	N	OFF	20.1
15.508950	---	44.19	50.00	5.81	N	OFF	20.1
17.164500	48.84	---	60.00	11.16	N	OFF	20.2
17.164500	---	39.13	50.00	10.87	N	OFF	20.2
19.502250	48.05	---	60.00	11.95	N	OFF	20.2
19.502250	---	36.86	50.00	13.14	N	OFF	20.2
22.092630	39.11	---	60.00	20.89	N	OFF	20.2
22.092630	---	26.27	50.00	23.73	N	OFF	20.2

Appendix C. Radiated Spurious Emission

Test Engineer :	BANK Lin, Ken Kuo and Lucifer Jian	**Temperature :**	20~23°C
		Relative Humidity :	42~55%

<Sample 1>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2387.91	51.76	-22.24	74	38.83	26.92	18.36	32.35	170	25	P	H
		2386.965	41.17	-12.83	54	28.23	26.93	18.36	32.35	170	25	A	H
	*	2412	106.53	-	-	93.52	26.98	18.4	32.37	170	25	P	H
	*	2412	103.42	-	-	90.41	26.98	18.4	32.37	170	25	A	H
													H
													H
		2389.695	51.45	-22.55	74	38.54	26.9	18.36	32.35	353	212	P	V
		2387.07	40.28	-13.72	54	27.34	26.93	18.36	32.35	353	212	A	V
	*	2412	103.49	-	-	90.48	26.98	18.4	32.37	353	212	P	V
	*	2412	100.37	-	-	87.36	26.98	18.4	32.37	353	212	A	V
													V
													V
802.11b CH 06 2437MHz		2385.84	50.96	-23.04	74	38.02	26.94	18.35	32.35	115	20	P	H
		2389.84	40.47	-13.53	54	27.56	26.9	18.36	32.35	115	20	A	H
	*	2437	106.94	-	-	94.07	26.8	18.45	32.38	115	20	P	H
	*	2437	103.81	-	-	90.94	26.8	18.45	32.38	115	20	A	H
		2496.96	50.92	-23.08	74	37.82	26.97	18.55	32.42	115	20	P	H
		2483.6	40.25	-13.75	54	27.23	26.9	18.53	32.41	115	20	A	H
		2388.88	51.47	-22.53	74	38.55	26.91	18.36	32.35	393	211	P	V
		2390	39.5	-14.5	54	26.59	26.9	18.36	32.35	393	211	A	V
	*	2437	103.74	-	-	90.87	26.8	18.45	32.38	393	211	P	V
	*	2437	100.58	-	-	87.71	26.8	18.45	32.38	393	211	A	V
		2486.8	50.98	-23.02	74	37.95	26.9	18.54	32.41	393	211	P	V
		2485.04	39.56	-14.44	54	26.54	26.9	18.53	32.41	393	211	A	V

802.11b CH 11 2462MHz	*	2462	105.52	-	-	92.63	26.8	18.49	32.4	116	23	P	H
	*	2462	102.39	-	-	89.5	26.8	18.49	32.4	116	23	A	H
		2486.64	51.65	-22.35	74	38.62	26.9	18.54	32.41	116	23	P	H
		2488.32	40.75	-13.25	54	27.72	26.9	18.54	32.41	116	23	A	H
													H
													H
	*	2462	103.77	-	-	90.88	26.8	18.49	32.4	379	213	P	V
	*	2462	100.65	-	-	87.76	26.8	18.49	32.4	379	213	A	V
		2494.44	50.96	-23.04	74	37.89	26.94	18.55	32.42	379	213	P	V
		2488.52	40.38	-13.62	54	27.35	26.9	18.54	32.41	379	213	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	50.66	-23.34	74	38.71	32.4	13.05	33.5	114	62	P	H
		4824	46.5	-7.5	54	34.55	32.4	13.05	33.5	114	62	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4824	52.02	-21.98	74	40.07	32.4	13.05	33.5	344	168	P	V
		4824	47.98	-6.02	54	36.03	32.4	13.05	33.5	344	168	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4874	51.47	-22.53	74	39.34	32.55	13.07	33.49	100	59	P	H
		4874	46.71	-7.29	54	34.58	32.55	13.07	33.49	100	59	A	H
		7311	50.57	-23.43	74	32.91	37.5	16	35.84	-	-	P	H
		7311	39.97	-14.03	54	22.31	37.5	16	35.84	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11b CH 06 2437MHz		4874	51.62	-22.38	74	39.49	32.55	13.07	33.49	361	171	P	V
		4874	47.54	-6.46	54	35.41	32.55	13.07	33.49	361	171	A	V
		7311	49.54	-24.46	74	31.88	37.5	16	35.84	-	-	P	V
		7311	39.96	-14.04	54	22.3	37.5	16	35.84	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4924	51.62	-22.38	74	39.35	32.65	13.1	33.48	100	56	P	H
		4924	47.34	-6.66	54	35.07	32.65	13.1	33.48	100	56	A	H
		7386	50.31	-23.69	74	32.68	37.43	16.09	35.89	-	-	P	H
		7386	39.85	-14.15	54	22.22	37.43	16.09	35.89	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11b CH 11 2462MHz		4924	53.3	-20.7	74	41.03	32.65	13.1	33.48	375	170	P	V
		4924	49.73	-4.27	54	37.46	32.65	13.1	33.48	375	170	A	V
		7386	49.96	-24.04	74	32.33	37.43	16.09	35.89	-	-	P	V
		7386	39.83	-14.17	54	22.2	37.43	16.09	35.89	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2390	61.32	-12.68	74	48.41	26.9	18.36	32.35	114	25	P	H
		2389.905	47.6	-6.4	54	34.69	26.9	18.36	32.35	114	25	A	H
	*	2412	107.5	-	-	94.49	26.98	18.4	32.37	114	25	P	H
	*	2412	99.78	-	-	86.77	26.98	18.4	32.37	114	25	A	H
													H
													H
		2389.8	59.44	-14.56	74	46.53	26.9	18.36	32.35	359	212	P	V
		2390	45.75	-8.25	54	32.84	26.9	18.36	32.35	359	212	A	V
	*	2412	104.2	-	-	91.19	26.98	18.4	32.37	359	212	P	V
	*	2412	96.61	-	-	83.6	26.98	18.4	32.37	359	212	A	V
													V
													V
802.11g CH 06 2437MHz		2387.76	52.04	-21.96	74	39.11	26.92	18.36	32.35	114	20	P	H
		2390	42.33	-11.67	54	29.42	26.9	18.36	32.35	114	20	A	H
	*	2437	108.69	-	-	95.82	26.8	18.45	32.38	114	20	P	H
	*	2437	101.03	-	-	88.16	26.8	18.45	32.38	114	20	A	H
		2484.56	51.98	-22.02	74	38.96	26.9	18.53	32.41	114	20	P	H
		2483.52	41.75	-12.25	54	28.73	26.9	18.53	32.41	114	20	A	H
		2373.52	50.61	-23.39	74	37.62	27	18.33	32.34	395	211	P	V
		2389.68	40.52	-13.48	54	27.61	26.9	18.36	32.35	395	211	A	V
	*	2437	106.17	-	-	93.3	26.8	18.45	32.38	395	211	P	V
	*	2437	98.01	-	-	85.14	26.8	18.45	32.38	395	211	A	V
		2490.56	50.97	-23.03	74	37.93	26.91	18.54	32.41	395	211	P	V
		2484	40.62	-13.38	54	27.6	26.9	18.53	32.41	395	211	A	V

802.11g CH 11 2462MHz	*	2462	106.38	-	-	93.49	26.8	18.49	32.4	100	29	P	H
	*	2462	98.77	-	-	85.88	26.8	18.49	32.4	100	29	A	H
		2483.52	60.44	-13.56	74	47.42	26.9	18.53	32.41	100	29	P	H
		2483.52	46.47	-7.53	54	33.45	26.9	18.53	32.41	100	29	A	H
													H
													H
	*	2462	104.16	-	-	91.27	26.8	18.49	32.4	333	211	P	V
	*	2462	96.47	-	-	83.58	26.8	18.49	32.4	333	211	A	V
		2483.52	59.8	-14.2	74	46.78	26.9	18.53	32.41	333	211	P	V
		2483.52	45.69	-8.31	54	32.67	26.9	18.53	32.41	333	211	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4824	44.93	-29.07	74	32.98	32.4	13.05	33.5	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
802.11g CH 01 2412MHz													H
		4824	45.57	-28.43	74	33.62	32.4	13.05	33.5	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4874	46.22	-27.78	74	34.09	32.55	13.07	33.49	-	-	P	H
		7311	49.8	-24.2	74	32.14	37.5	16	35.84	-	-	P	H
		7311	39.93	-14.07	54	22.27	37.5	16	35.84	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11g CH 06 2437MHz													H
		4874	46.52	-27.48	74	34.39	32.55	13.07	33.49	-	-	P	V
		7311	50.3	-23.7	74	32.64	37.5	16	35.84	-	-	P	V
		7311	40.04	-13.96	54	22.38	37.5	16	35.84	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4924	45.78	-28.22	74	33.51	32.65	13.1	33.48	-	-	P	H
		7386	49.62	-24.38	74	31.99	37.43	16.09	35.89	-	-	P	H
		7386	39.75	-14.25	54	22.12	37.43	16.09	35.89	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11g CH 11 2462MHz													H
		4924	45.67	-28.33	74	33.4	32.65	13.1	33.48	-	-	P	V
		7386	49.72	-24.28	74	32.09	37.43	16.09	35.89	-	-	P	V
		7386	39.89	-14.11	54	22.26	37.43	16.09	35.89	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		2389.905	63.79	-10.21	74	50.88	26.9	18.36	32.35	114	24	P	H
		2390	49.35	-4.65	54	36.44	26.9	18.36	32.35	114	24	A	H
	*	2412	107.16	-	-	94.15	26.98	18.4	32.37	114	24	P	H
	*	2412	99.37	-	-	86.36	26.98	18.4	32.37	114	24	A	H
802.11n													H
HT20													H
CH 01		2389.485	61.67	-12.33	74	48.75	26.91	18.36	32.35	361	211	P	V
2412MHz		2390	46.97	-7.03	54	34.06	26.9	18.36	32.35	361	211	A	V
	*	2412	104.09	-	-	91.08	26.98	18.4	32.37	361	211	P	V
	*	2412	95.89	-	-	82.88	26.98	18.4	32.37	361	211	A	V
													V
													V
		2388.72	52.35	-21.65	74	39.43	26.91	18.36	32.35	113	20	P	H
		2389.68	42.19	-11.81	54	29.28	26.9	18.36	32.35	113	20	A	H
	*	2437	108.7	-	-	95.83	26.8	18.45	32.38	113	20	P	H
	*	2437	100.77	-	-	87.9	26.8	18.45	32.38	113	20	A	H
802.11n		2484	51.71	-22.29	74	38.69	26.9	18.53	32.41	113	20	P	H
HT20		2483.84	41.9	-12.1	54	28.88	26.9	18.53	32.41	113	20	A	H
CH 06		2359.44	51.33	-22.67	74	38.37	27	18.3	32.34	394	210	P	V
2437MHz		2389.84	40.57	-13.43	54	27.66	26.9	18.36	32.35	394	210	A	V
	*	2437	105.25	-	-	92.38	26.8	18.45	32.38	394	210	P	V
	*	2437	97.71	-	-	84.84	26.8	18.45	32.38	394	210	A	V
		2489.92	51.17	-22.83	74	38.14	26.9	18.54	32.41	394	210	P	V
		2486.8	40.62	-13.38	54	27.59	26.9	18.54	32.41	394	210	A	V

	*	2462	106.54	-	-	93.65	26.8	18.49	32.4	105	21	P	H
	*	2462	98.93	-	-	86.04	26.8	18.49	32.4	105	21	A	H
		2483.8	63.93	-10.07	74	50.91	26.9	18.53	32.41	105	21	P	H
		2483.52	48.82	-5.18	54	35.8	26.9	18.53	32.41	105	21	A	H
802.11n													H
HT20													H
CH 11	*	2462	103.7	-	-	90.81	26.8	18.49	32.4	334	210	P	V
2462MHz	*	2462	96.06	-	-	83.17	26.8	18.49	32.4	334	210	A	V
		2483.96	62.77	-11.23	74	49.75	26.9	18.53	32.41	334	210	P	V
		2483.52	46.97	-7.03	54	33.95	26.9	18.53	32.41	334	210	A	V
													V
													V

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4824	45.05	-28.95	74	33.1	32.4	13.05	33.5	-	-	P	H
													H
													H
													H
802.11n													H
HT20													H
CH 01		4824	46.48	-27.52	74	34.53	32.4	13.05	33.5	-	-	P	V
2412MHz													V
													V
													V
													V
													V

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4874	45.06	-28.94	74	32.93	32.55	13.07	33.49	-	-	P	H
		7311	49.79	-24.21	74	32.13	37.5	16	35.84	-	-	P	H
		7311	39.75	-14.25	54	22.09	37.5	16	35.84	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 06		4874	45.52	-28.48	74	33.39	32.55	13.07	33.49	-	-	P	V
2437MHz		7311	50.32	-23.68	74	32.66	37.5	16	35.84	-	-	P	V
		7311	39.79	-14.21	54	22.13	37.5	16	35.84	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4924	45.66	-28.34	74	33.39	32.65	13.1	33.48	-	-	P	H
		7386	49.7	-24.3	74	32.07	37.43	16.09	35.89	-	-	P	H
		7386	40.04	-13.96	54	22.41	37.43	16.09	35.89	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 11		4924	46.08	-27.92	74	33.81	32.65	13.1	33.48	-	-	P	V
2462MHz		7386	49.09	-24.91	74	31.46	37.43	16.09	35.89	-	-	P	V
		7386	39.93	-14.07	54	22.3	37.43	16.09	35.89	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission above 18GHz

2.4GHz WIFI 802.11b (SHF)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b SHF		22403	27.54	-46.46	74	31.83	38.31	18.16	60.76	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		22403	27.16	-46.84	74	31.45	38.31	18.16	60.76	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz 802.11b LF		31.62	25.22	-14.78	40	32.9	24.16	0.91	32.75	-	-	P	H
		87.51	36.17	-3.83	40	52.57	14.65	1.67	32.72	400	199	Q	H
		230.61	31.56	-14.44	46	45.37	16.15	2.71	32.67	-	-	P	H
		268.95	32.95	-13.05	46	43.51	19.2	2.92	32.68	-	-	P	H
		400.8	34.56	-11.44	46	41.94	21.78	3.55	32.71	-	-	P	H
		953.8	35.24	-10.76	46	30.08	30.97	5.56	31.37	-	-	P	H
													H
													H
													H
													H
													H
													H
		32.43	33.72	-6.28	40	41.71	23.84	0.92	32.75	100	270	Q	V
		40.26	32.88	-7.12	40	44.69	19.87	1.06	32.74	100	109	Q	V
		87.51	36.38	-3.62	40	52.78	14.65	1.67	32.72	100	44	Q	V
		224.67	25.88	-20.12	46	40.32	15.56	2.67	32.67	-	-	P	V
		415.5	32.21	-13.79	46	38.79	22.5	3.64	32.72	-	-	P	V
		947.5	35.03	-10.97	46	30.11	30.82	5.53	31.43	-	-	P	V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

<Sample 2>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz	*	2462	107.15	-	-	94.26	26.8	18.49	32.4	137	21	P	H
	*	2462	104.04	-	-	91.15	26.8	18.49	32.4	137	21	A	H
		2487.68	52.09	-21.91	74	39.06	26.9	18.54	32.41	137	21	P	H
		2487.68	41.07	-12.93	54	28.04	26.9	18.54	32.41	137	21	A	H
													H
													H
	*	2462	103.84	-	-	90.95	26.8	18.49	32.4	387	222	P	V
	*	2462	100.76	-	-	87.87	26.8	18.49	32.4	387	222	A	V
		2492.08	51.59	-22.41	74	38.54	26.92	18.55	32.42	387	222	P	V
		2487.52	40.47	-13.53	54	27.44	26.9	18.54	32.41	387	222	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz		4924	53.46	-20.54	74	41.19	32.65	13.1	33.48	106	64	P	H
		4924	49.23	-4.77	54	36.96	32.65	13.1	33.48	106	64	A	H
		7386	50.06	-23.94	74	32.43	37.43	16.09	35.89	-	-	P	H
		7386	40.26	-13.74	54	22.63	37.43	16.09	35.89	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		4924	51.59	-22.41	74	39.32	32.65	13.1	33.48	100	130	P	V
		4924	46.42	-7.58	54	34.15	32.65	13.1	33.48	100	130	A	V
		7386	49.87	-24.13	74	32.24	37.43	16.09	35.89	-	-	P	V
		7386	40.07	-13.93	54	22.44	37.43	16.09	35.89	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission above 18GHz

2.4GHz WIFI 802.11b (SHF)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz 802.11b SHF		22403	27.39	-46.61	74	31.68	38.31	18.16	60.76	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		22403	27.48	-46.52	74	31.77	38.31	18.16	60.76	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz 802.11b LF		74.01	32.49	-7.51	40	50.65	13.04	1.53	32.73	-	-	P	H
		88.32	31.02	-12.48	43.5	47.29	14.77	1.68	32.72	-	-	P	H
		159.06	32.16	-11.34	43.5	46	16.63	2.25	32.72	-	-	P	H
		175.53	37.15	-6.35	43.5	52.1	15.31	2.42	32.68	-	-	P	H
		226.29	33.23	-12.77	46	47.52	15.7	2.68	32.67	-	-	P	H
		948.2	35.34	-10.66	46	30.37	30.86	5.54	31.43	-	-	P	H
													H
													H
													H
													H
													H
													H
		30.27	33.01	-6.99	40	40.28	24.61	0.88	32.76	100	276	Q	V
		40.26	34.31	-5.69	40	46.12	19.87	1.06	32.74	100	118	Q	V
		88.59	35.44	-8.06	43.5	51.68	14.8	1.68	32.72	-	-	P	V
		171.48	32.14	-11.36	43.5	46.79	15.66	2.38	32.69	-	-	P	V
		224.67	27.05	-18.95	46	41.49	15.56	2.67	32.67	-	-	P	V
		960.1	35.24	-18.76	54	29.91	31.05	5.58	31.3	-	-	P	V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

<Sample 3>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz	*	2462	107.29	-	-	94.4	26.8	18.49	32.4	160	24	P	H
	*	2462	104.18	-	-	91.29	26.8	18.49	32.4	160	24	A	H
		2487.24	51.83	-22.17	74	38.8	26.9	18.54	32.41	160	24	P	H
		2483.52	41.09	-12.91	54	28.07	26.9	18.53	32.41	160	24	A	H
													H
													H
	*	2462	102.97	-	-	90.08	26.8	18.49	32.4	344	234	P	V
	*	2462	99.86	-	-	86.97	26.8	18.49	32.4	344	234	A	V
		2487.52	51.74	-22.26	74	38.71	26.9	18.54	32.41	344	234	P	V
		2483.52	40.03	-13.97	54	27.01	26.9	18.53	32.41	344	234	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz		4924	51.69	-22.31	74	39.42	32.65	13.1	33.48	108	11	P	H
		4924	47.3	-6.7	54	35.03	32.65	13.1	33.48	108	11	A	H
		7386	49.86	-24.14	74	32.23	37.43	16.09	35.89	-	-	P	H
		7386	39.83	-14.17	54	22.2	37.43	16.09	35.89	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		4924	49.51	-24.49	74	37.24	32.65	13.1	33.48	306	181	P	V
		4924	43.48	-10.52	54	31.21	32.65	13.1	33.48	306	181	A	V
		7386	48.77	-25.23	74	31.14	37.43	16.09	35.89	-	-	P	V
		7386	39.8	-14.2	54	22.17	37.43	16.09	35.89	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission above 18GHz

2.4GHz WIFI 802.11b (SHF)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b SHF		22403	26.89	-47.11	74	31.18	38.31	18.16	60.76	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		22403	27.34	-46.66	74	31.63	38.31	18.16	60.76	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz 802.11b LF		74.01	29.69	-10.31	40	47.85	13.04	1.53	32.73	-	-	P	H
		96.42	30.45	-13.05	43.5	45.79	15.63	1.76	32.73	-	-	P	H
		181.74	35.63	-7.87	43.5	50.95	14.88	2.47	32.67	-	-	P	H
		223.86	33.36	-12.64	46	47.87	15.49	2.67	32.67	-	-	P	H
		400.8	34.47	-11.53	46	41.85	21.78	3.55	32.71	-	-	P	H
		717.9	34.61	-11.39	46	35.49	27.09	4.78	32.75	-	-	P	H
													H
													H
													H
													H
													H
													H
		34.05	32.02	-7.98	40	40.99	22.83	0.94	32.74	100	267	Q	V
		40.53	33.6	-6.4	40	45.55	19.72	1.07	32.74	100	111	Q	V
		46.2	32	-8	40	46.83	16.72	1.17	32.72	100	143	Q	V
		96.42	30.76	-12.74	43.5	46.1	15.63	1.76	32.73	-	-	P	V
		152.31	29.32	-14.18	43.5	42.94	16.9	2.19	32.71	-	-	P	V
		227.64	27.37	-18.63	46	41.53	15.82	2.69	32.67	-	-	P	V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

Note symbol

*	**Fundamental Frequency** which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is **Margin** line.
P/A	**P**eak or **A**verage
H/V	**H**orizontal or **V**ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

Appendix D. Radiated Spurious Emission Plots

Test Engineer :	BANK Lin, Ken Kuo and Lucifer Jian	**Temperature :**	20~23°C
		Relative Humidity :	42~55%

Note symbol

-L	**Low channel location**
-R	**High channel location**

<Sample 1>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Fundamental
Peak	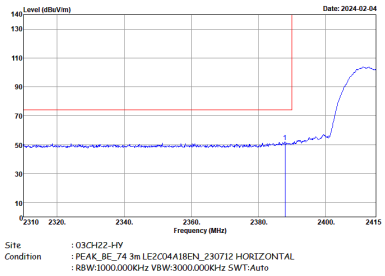	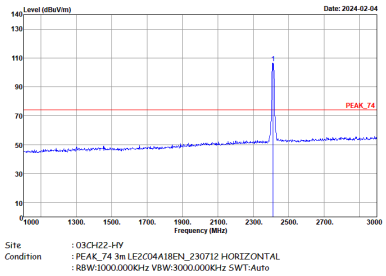
Avg.	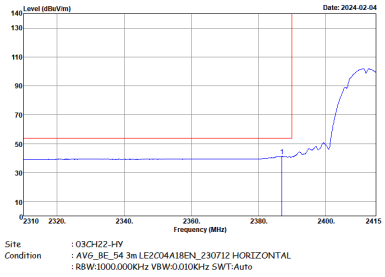	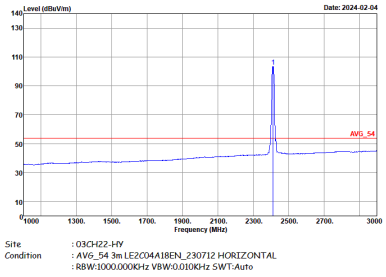

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Vertical	Fundamental
Peak	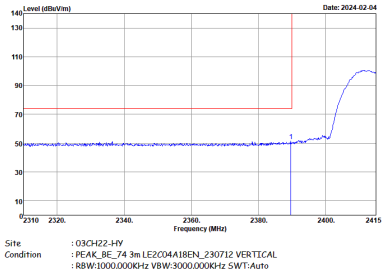 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	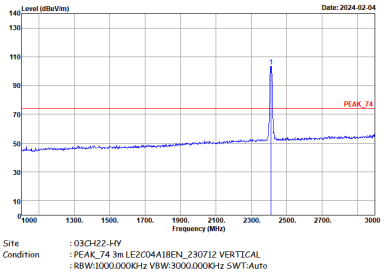 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	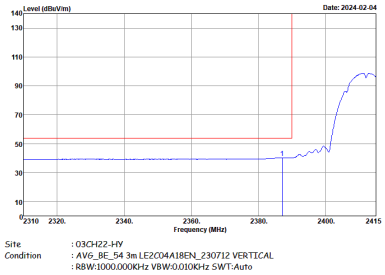 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	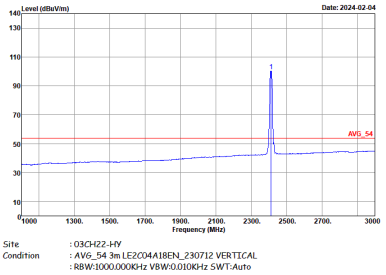 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	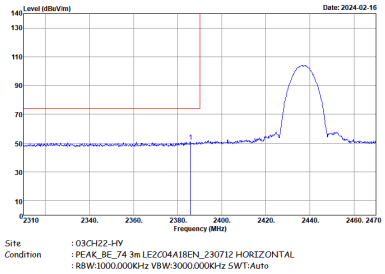 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	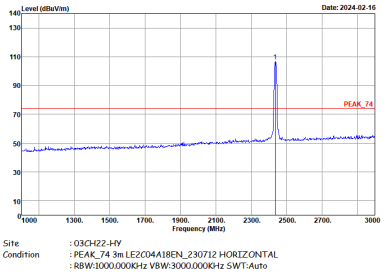 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	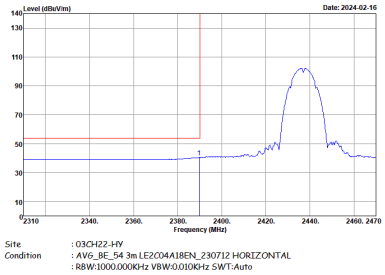 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	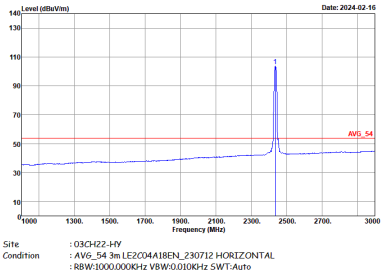 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	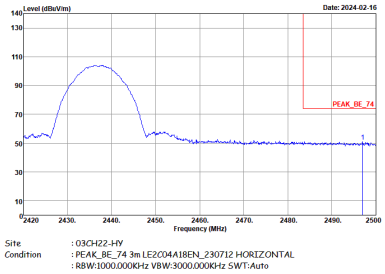	Left blank
Avg.	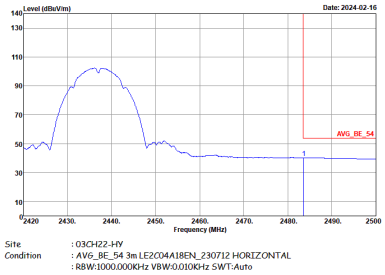	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	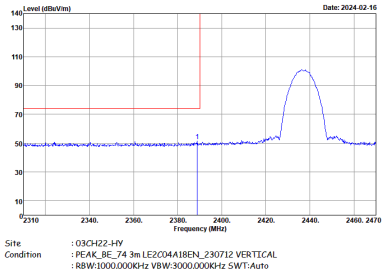	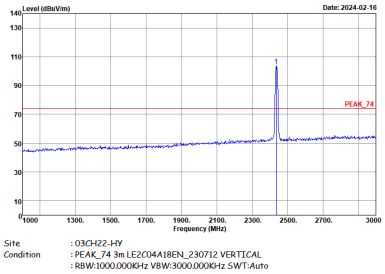
Avg.	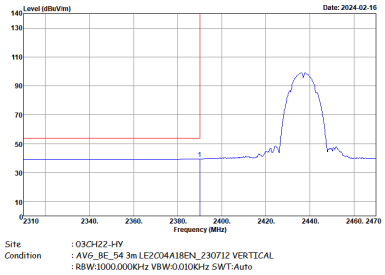	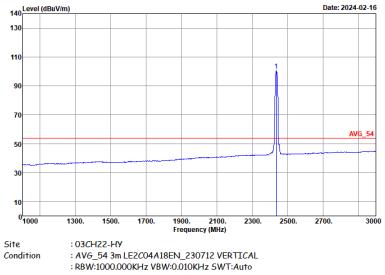

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	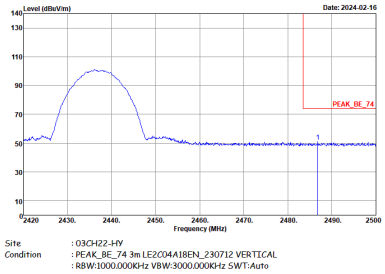	Left blank
Avg.	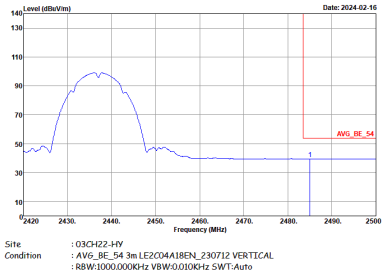	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Fundamental
Peak	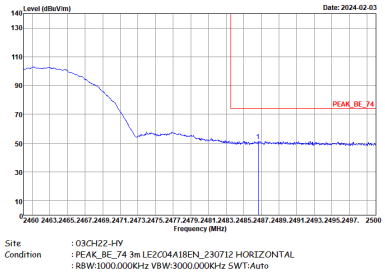 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	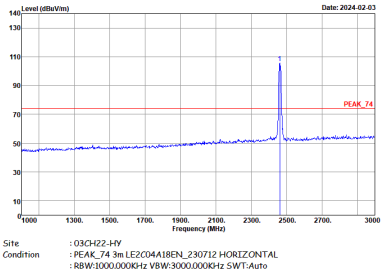 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	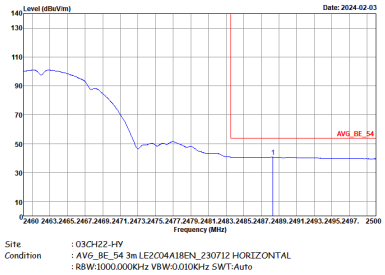 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	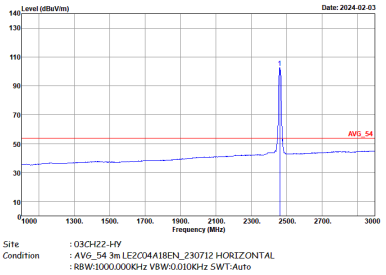 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Vertical	Fundamental
Peak	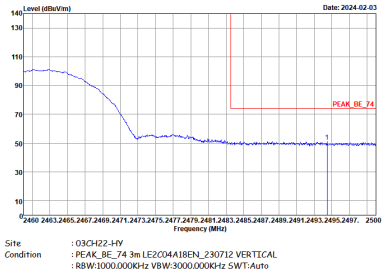 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	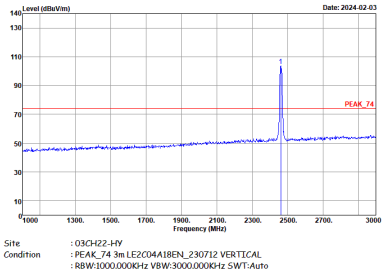 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	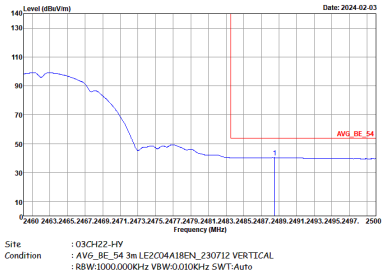 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	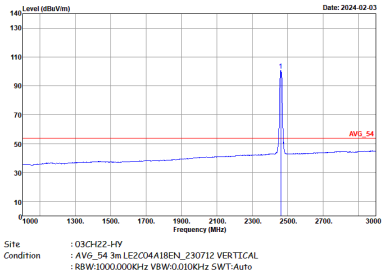 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Fundamental
Peak	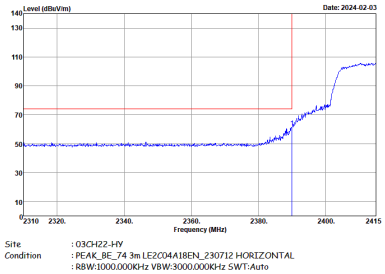	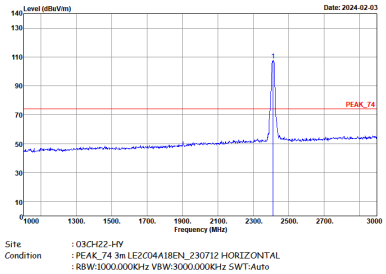
Avg.	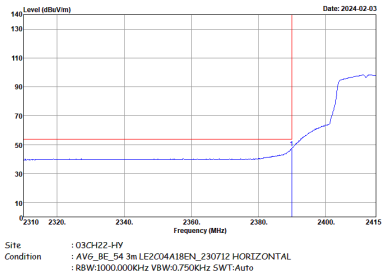	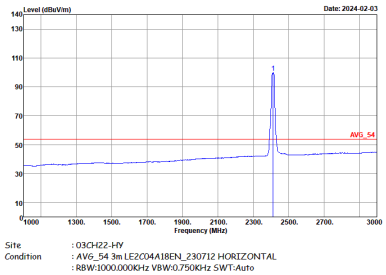

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1	Vertical	Fundamental
Peak	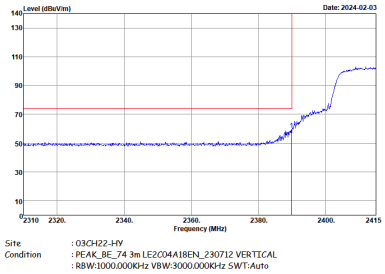	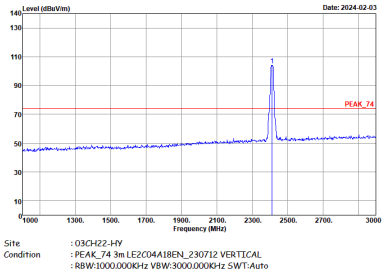
Avg.	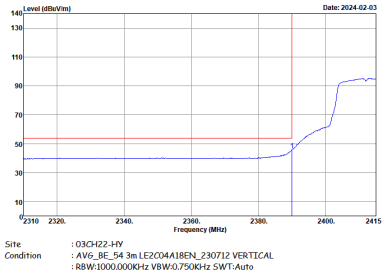	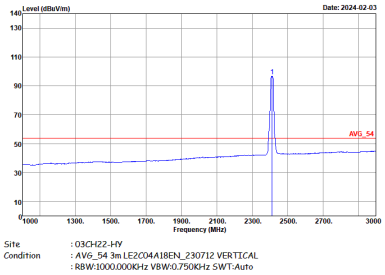

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	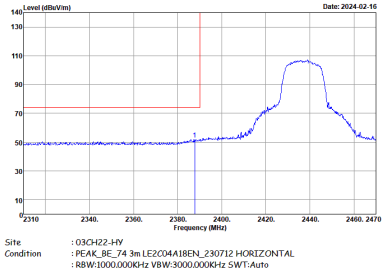 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	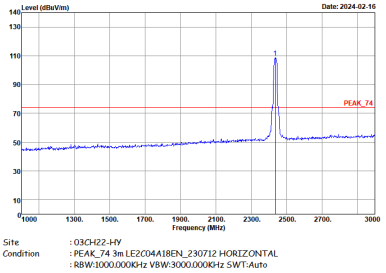 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	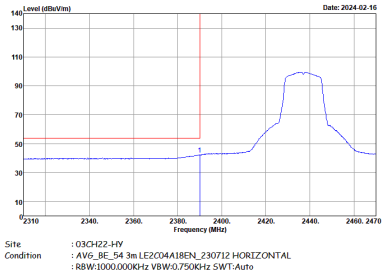 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto	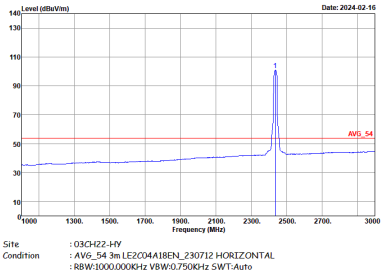 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	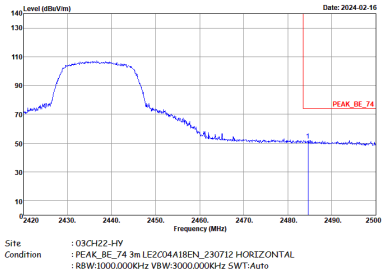	Left blank
Avg.	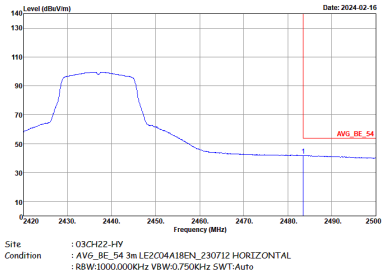	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	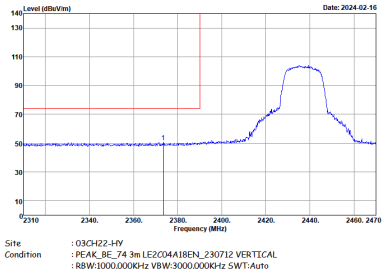 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	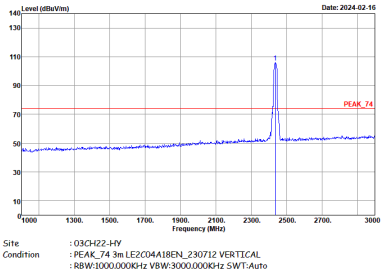 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	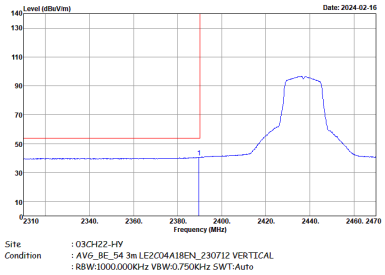 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto	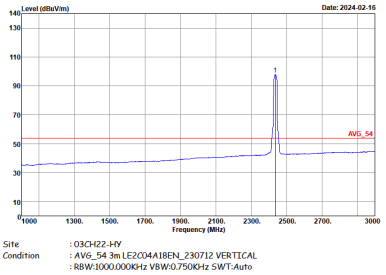 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	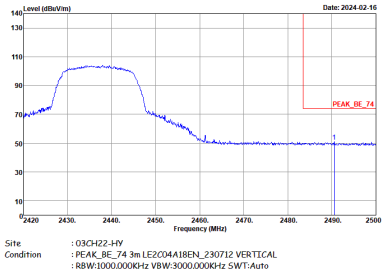	Left Blank
Avg.	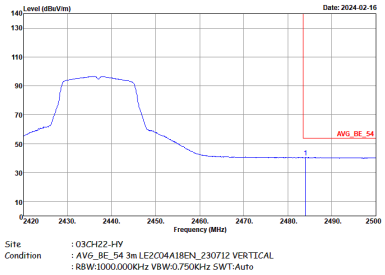	Left Blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Fundamental
Peak	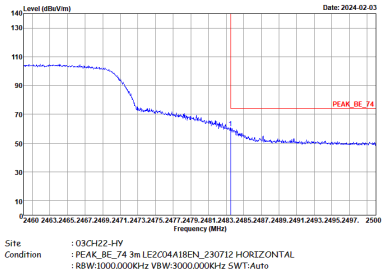 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	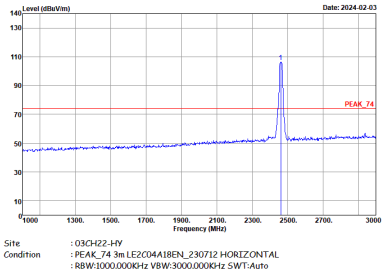 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	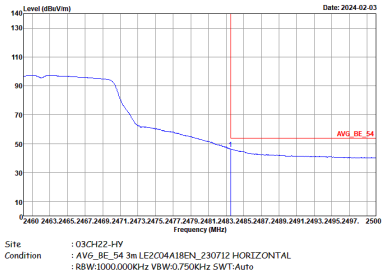 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto	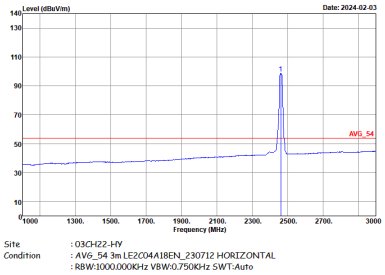 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Vertical	Fundamental
Peak	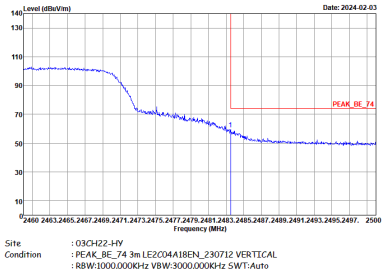 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	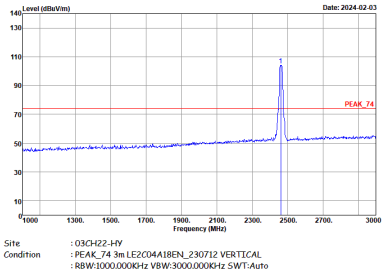 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	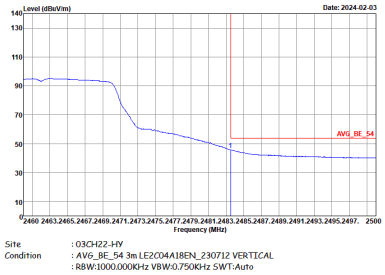 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto	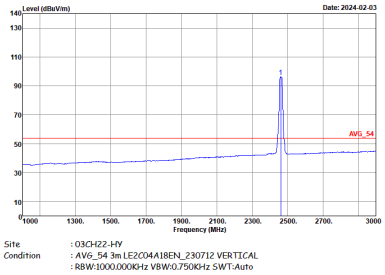 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Fundamental
Peak	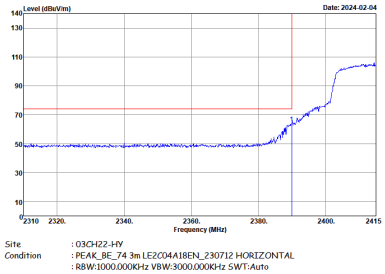	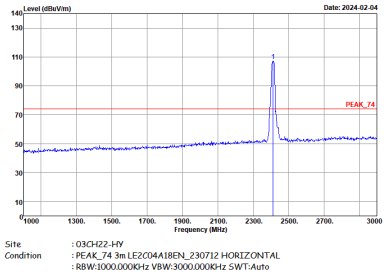
Avg.	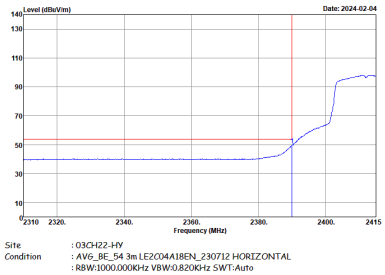	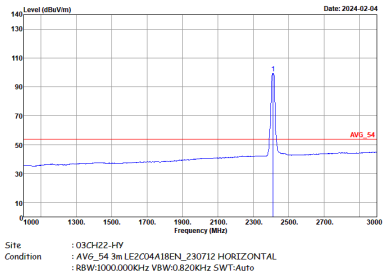

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Vertical	Fundamental
Peak	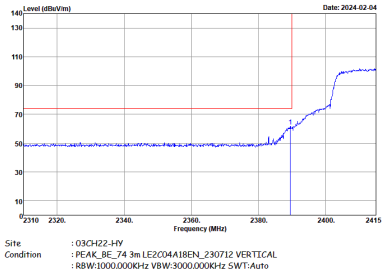	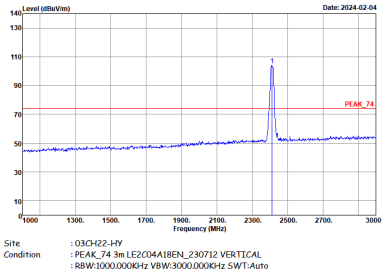
Avg.	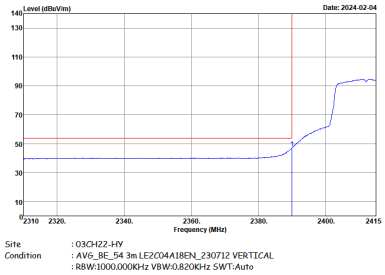	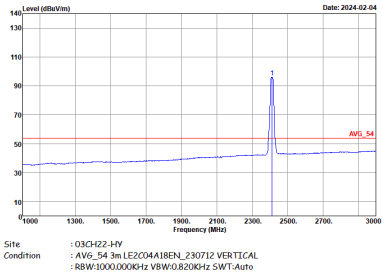

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	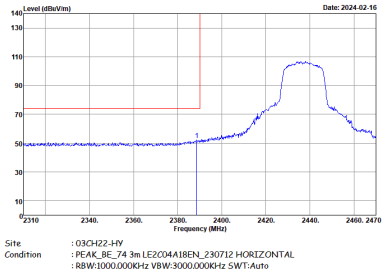 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	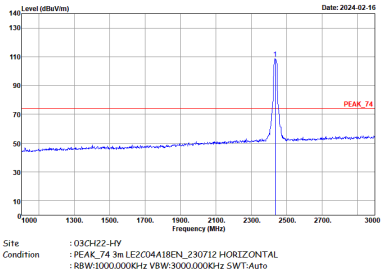 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	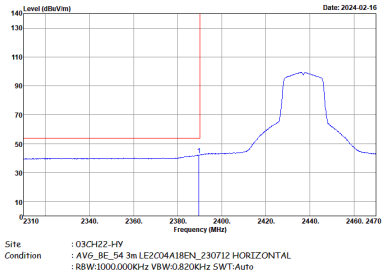 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto	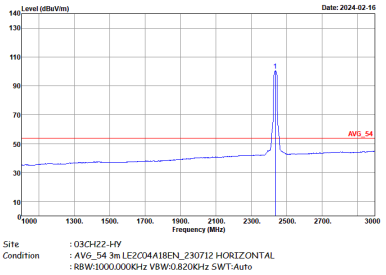 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	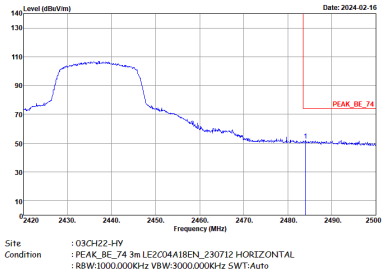 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	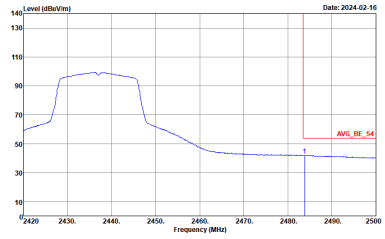 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	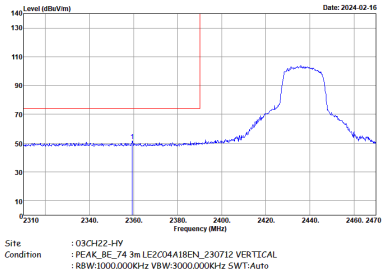	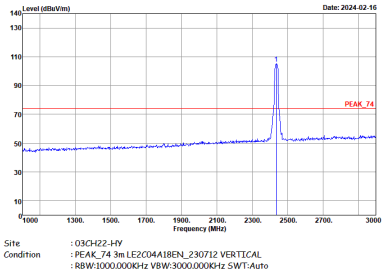
Avg.	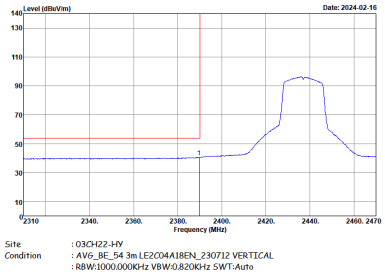	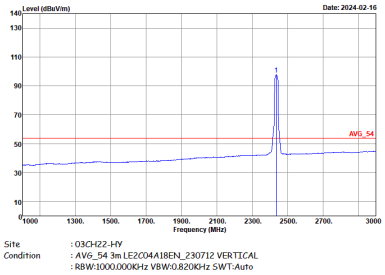

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	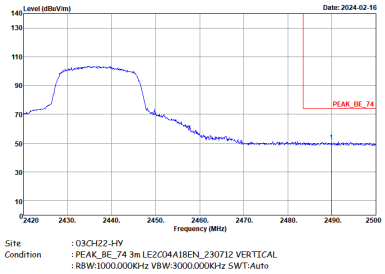	Left Blank
Avg.	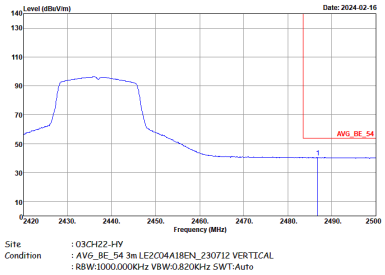	Left Blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Fundamental
Peak	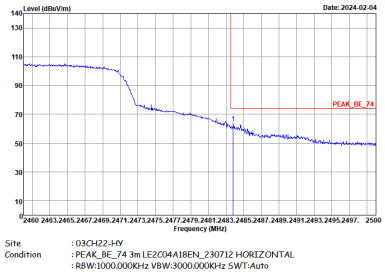 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	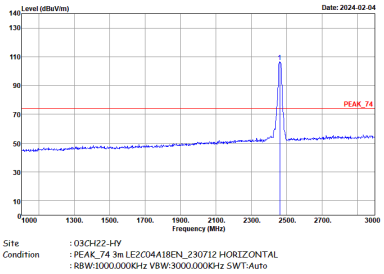 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	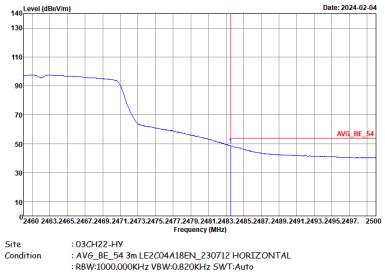 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto	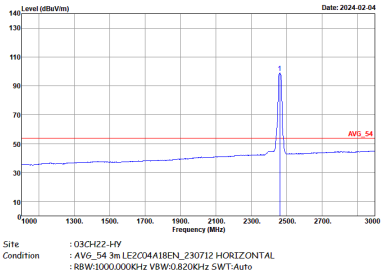 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Vertical	Fundamental
Peak	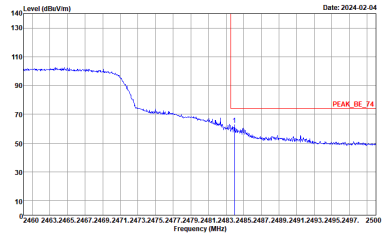 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	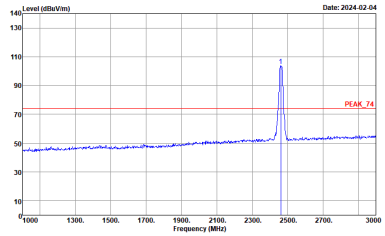 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	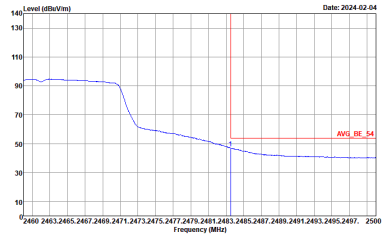 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto	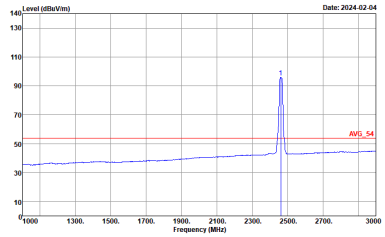 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	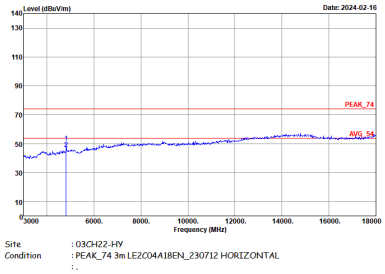	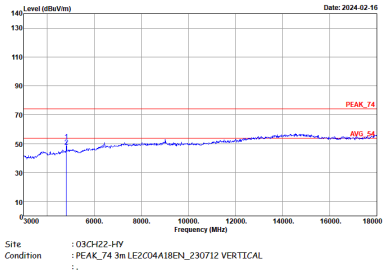

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	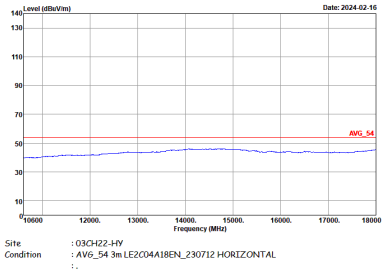	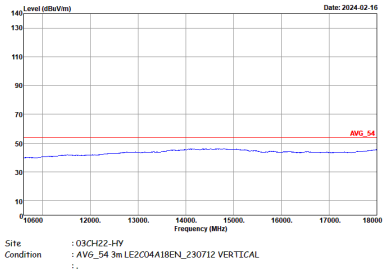

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	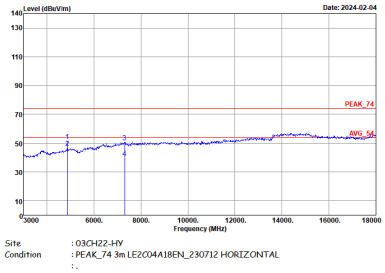	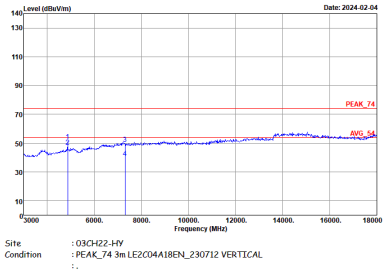

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	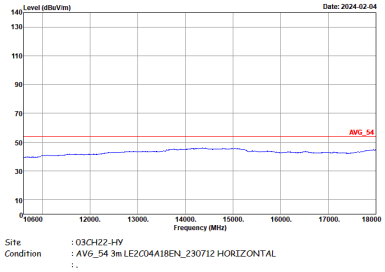	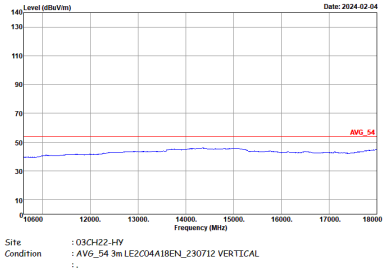

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	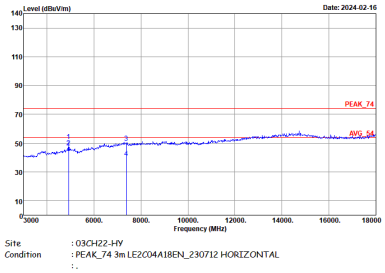	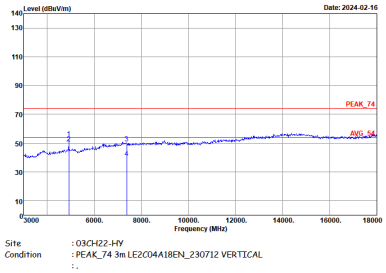

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	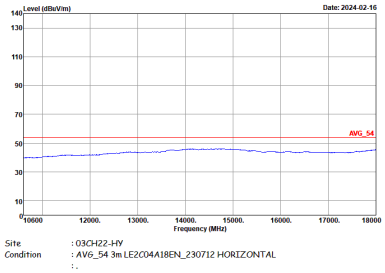	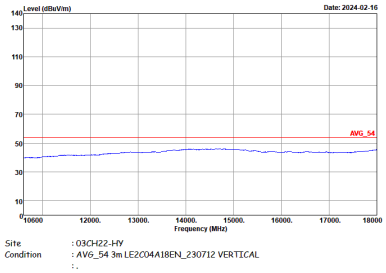

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	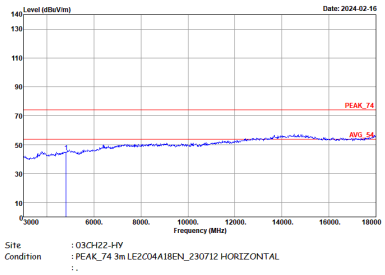	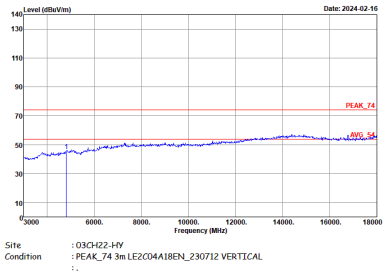

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	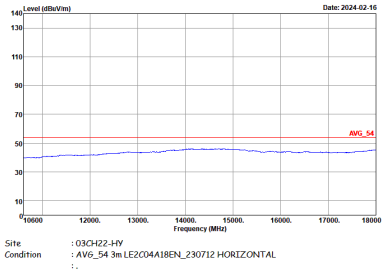	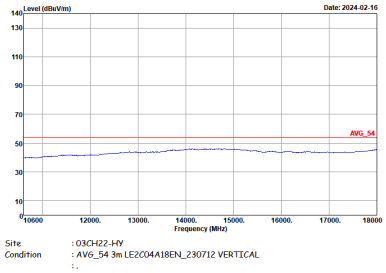

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	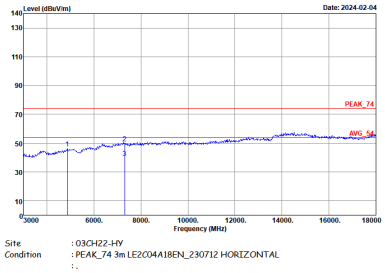	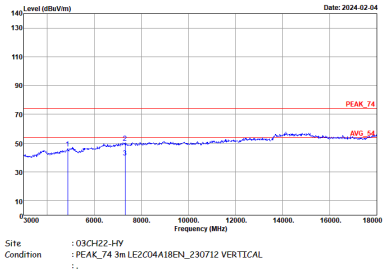

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	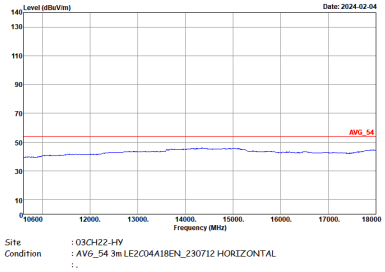	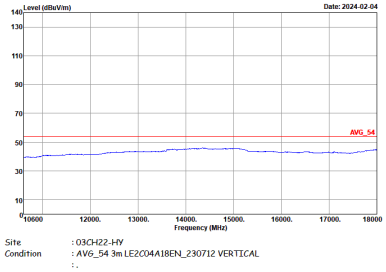

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	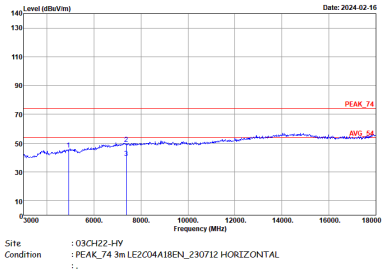	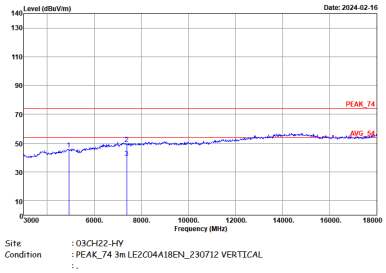

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	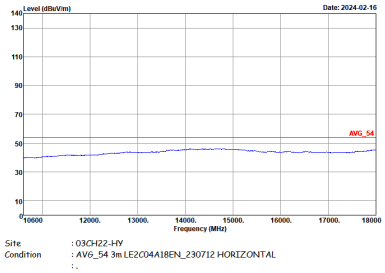	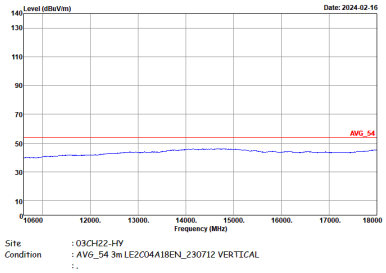

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	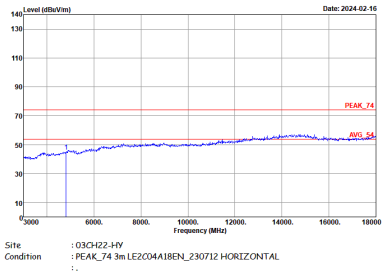	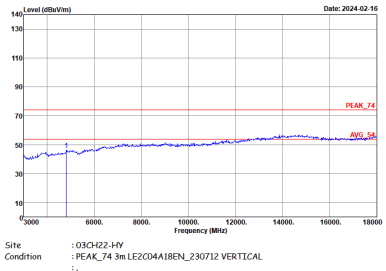

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	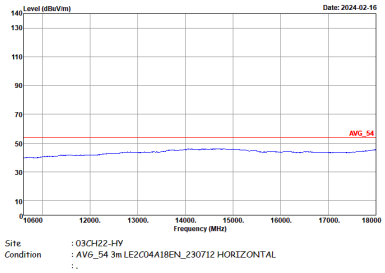	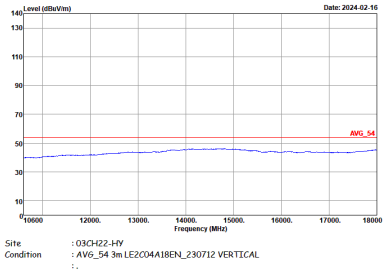

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	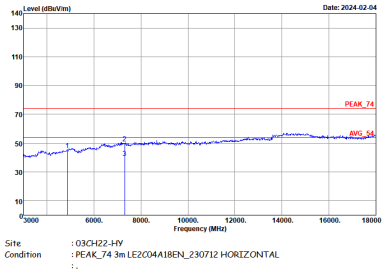	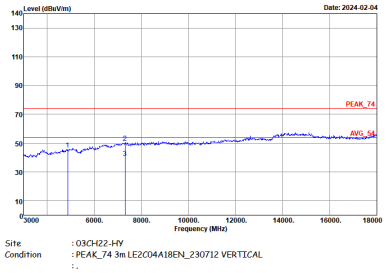

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	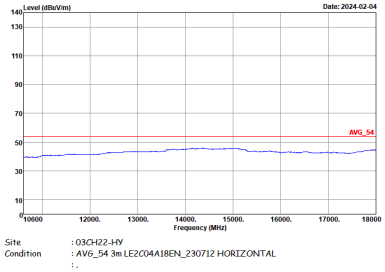	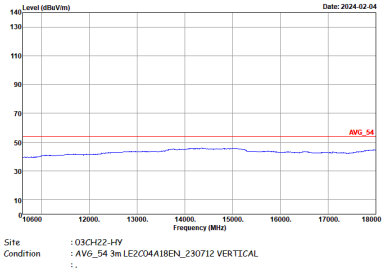

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	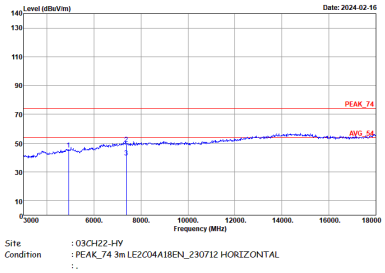	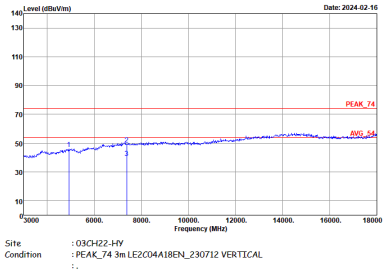

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	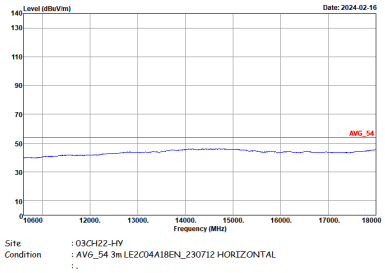	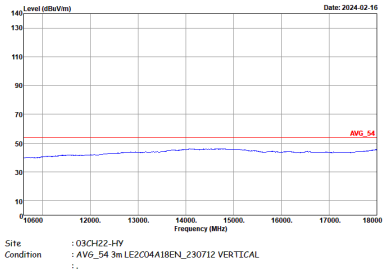

Emission above 18GHz

2.4GHz WIFI 802.11b (SHF @ 1m)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b SHF	
1	Horizontal	Vertical
Peak Avg.	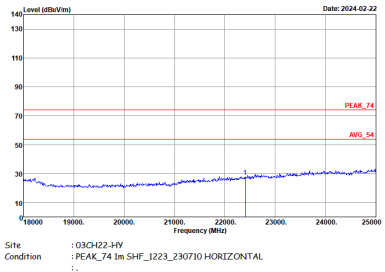	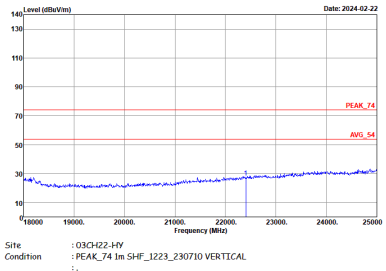

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
1	Horizontal	Vertical
QP / Peak	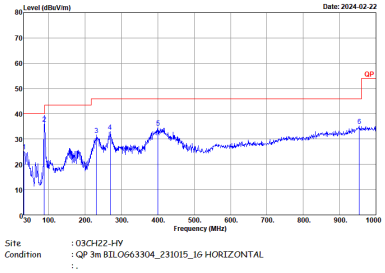	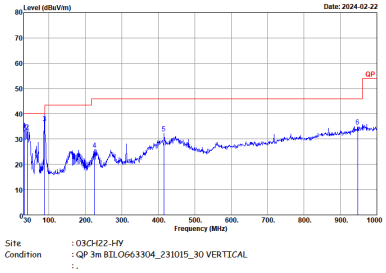

<Sample 2>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Fundamental
Peak	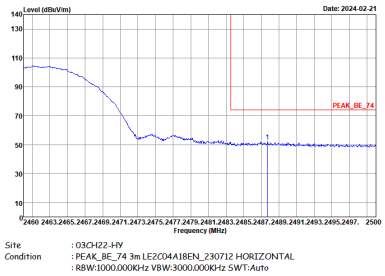	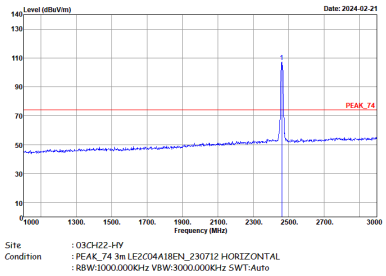
Avg.	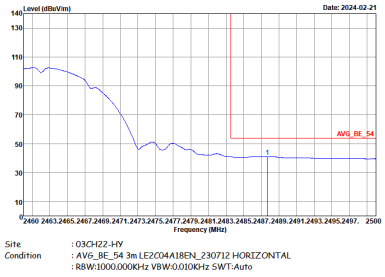	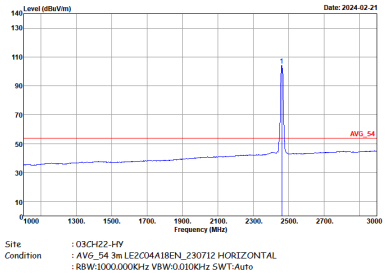

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Vertical	Fundamental
Peak	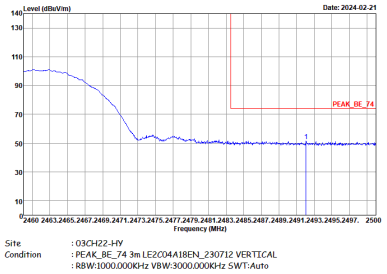 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	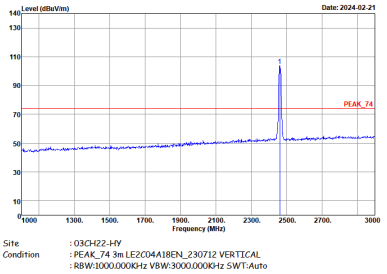 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	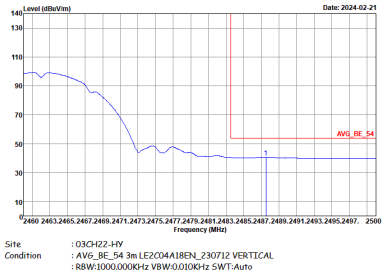 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	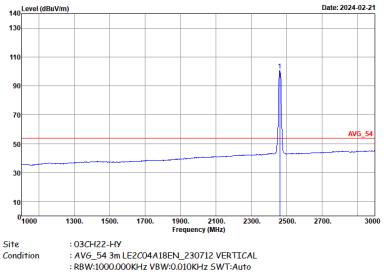 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	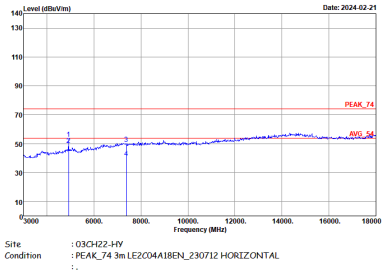	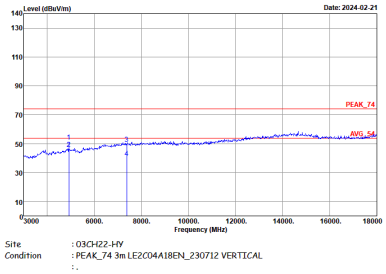

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	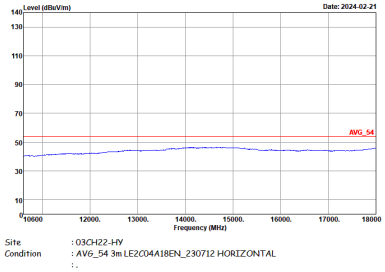	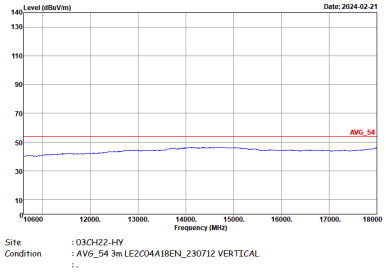

Emission above 18GHz

2.4GHz WIFI 802.11b (SHF @ 1m)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b SHF	
1	Horizontal	Vertical
Peak Avg.	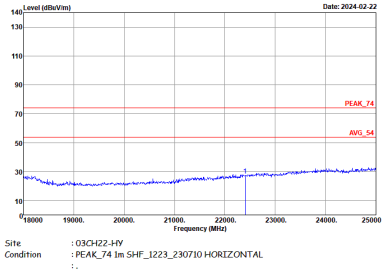	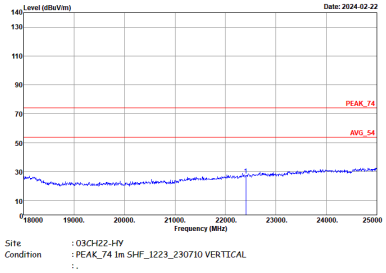

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
1	Horizontal	Vertical
QP / Peak	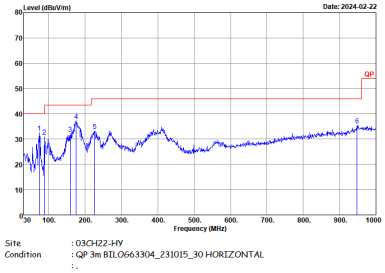	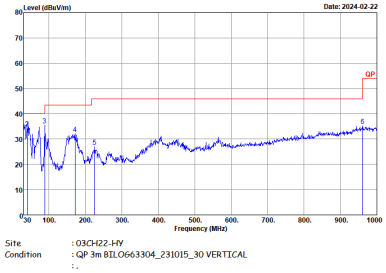

<Sample 3>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Fundamental
Peak	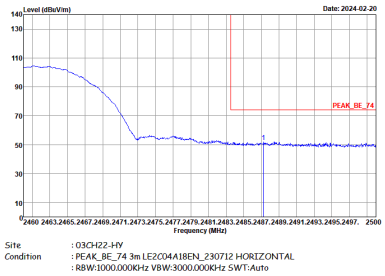	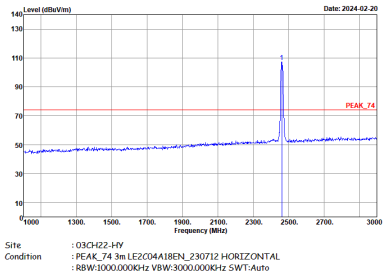
Avg.	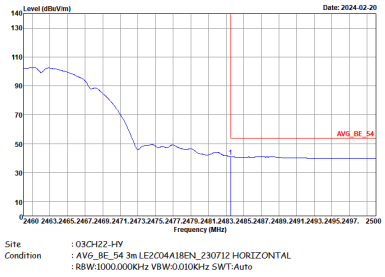	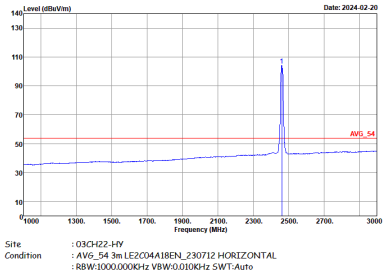

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Vertical	Fundamental
Peak	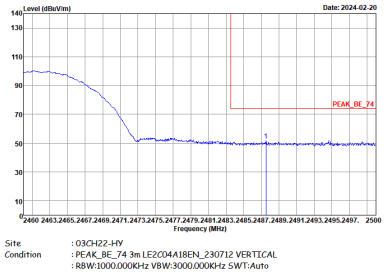 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	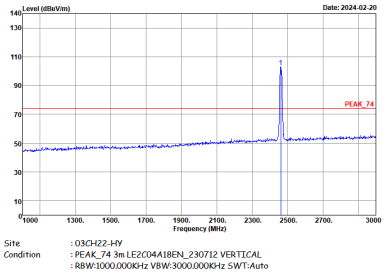 Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	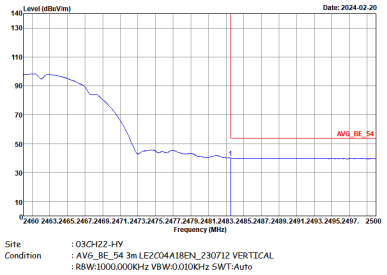 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	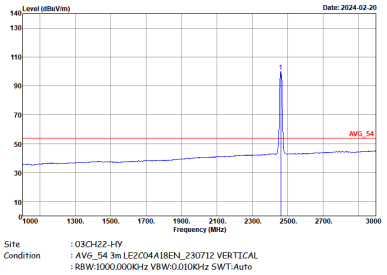 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	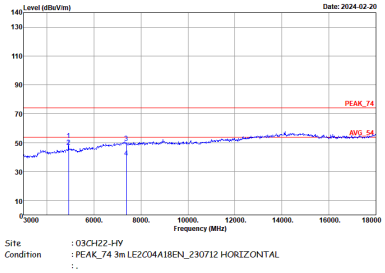	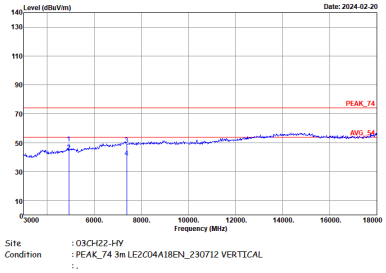

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
10.6G ~18G Avg.	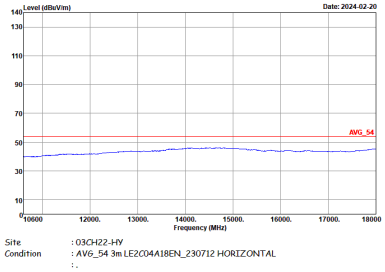	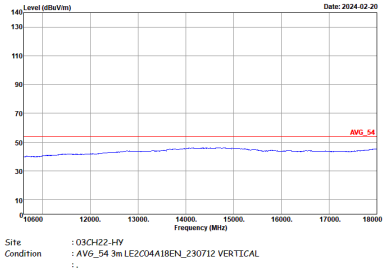

Emission above 18GHz

2.4GHz WIFI 802.11b (SHF @ 1m)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b SHF	
1	Horizontal	Vertical
Peak Avg.	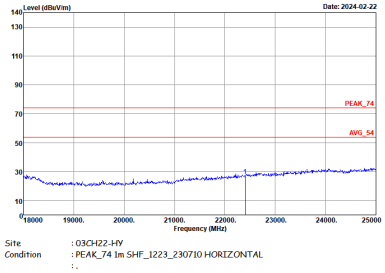	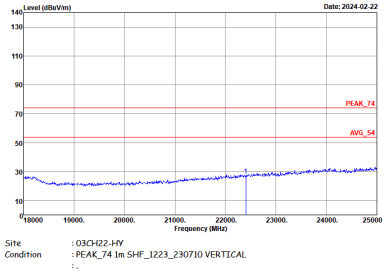

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
1	Horizontal	Vertical
QP / Peak	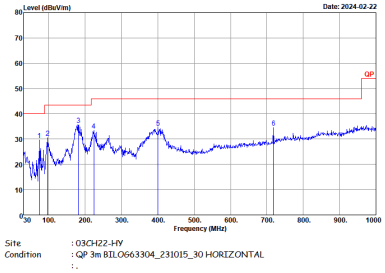	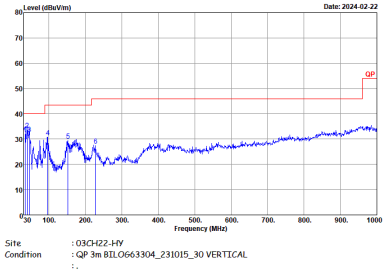

Appendix E. Duty Cycle Plots

<Sample 1>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	100.00	-	-	10Hz
802.11g	97.54	1390	0.72	750Hz
2.4GHz 802.11n HT20	97.01	1300	0.77	820Hz

802.11b

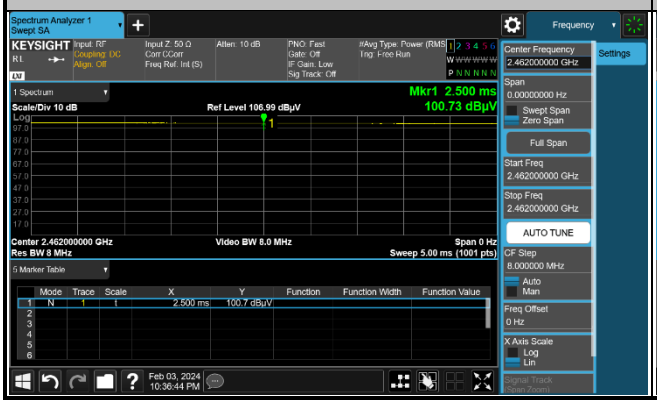

802.11g

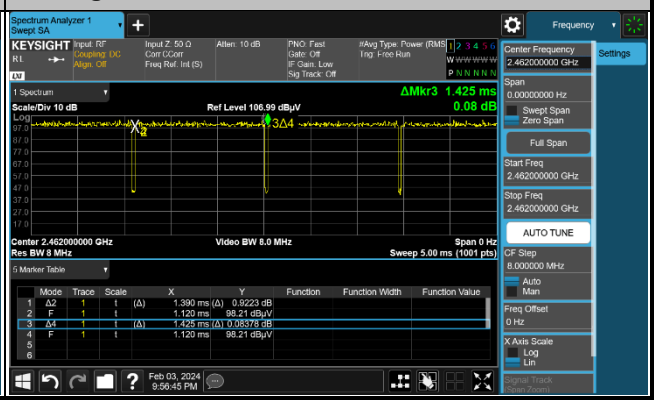

802.11n HT20

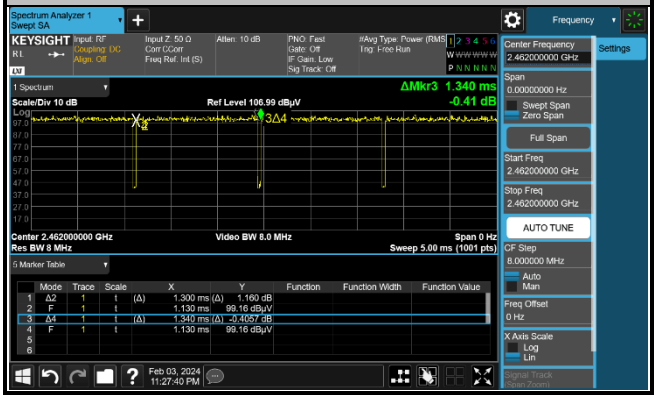

<Sample 2>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	100.00	-	-	10Hz

802.11b

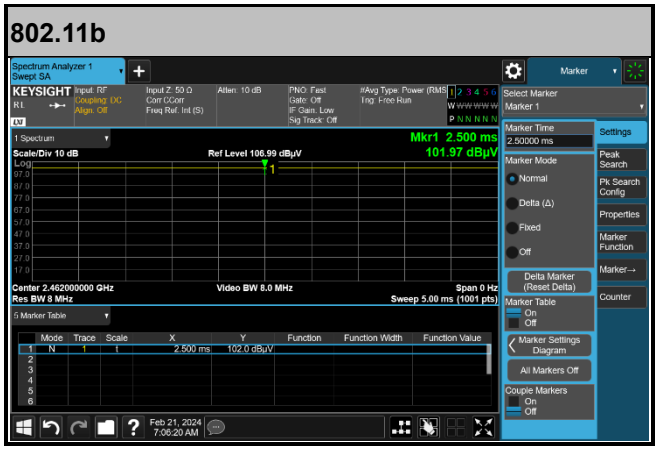

<Sample 3>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	100.00	-	-	10Hz

802.11b