

Product Number:TLT5326-P11

Product Name:Mobile Phone Antenna

---

# SHENZHEN TLT COMMUNICATION CO.,LTD

Building 1, Rooms 108-109, Shanghai Science and Innovation Park, Zhongyu Guan Avenue, Longhua New District, Shenzhen City

## P11 antenna The Product Recognition Letter

<b>The Customer</b>	<b>yanghua</b>	<b>Band range</b>	<b>2.4/5.8/GPS</b>
<b>Model</b>	<b>P11</b>	<b>Version</b>	<b>Latest version</b>
<b>Project code name</b>	<b>TLT 5326</b>	<b>Approval</b>	
<b>RF Designer</b>	<b>Mao Hangzhou</b>	<b>RD Designer</b>	<b>Tang Chunzheng</b>
<b>Date of this</b>	<b>2024-3-1</b>	<b>Date of this</b>	<b>2024-3-1</b>
<b>Customer Information:</b>			

# Metric

## 1.Antenna parameters

### 1.1 Electrical parameters

#### 1.1.1 Electrical Performance Assessment

#### 1.1.2 distribution circuit diagram

### 1.2 Structural parameters

#### 1.2.1 antenna assembly

#### 1.2.2 Performance test requirements

## 2.The test

### 2.1 Voltage standing wave ratio test

#### 2.1.1 test connection

#### 2.1.2 voltage standing to wave ratio

### 2.2 Gain and power tests

#### 2.2.1 test environment

#### 2.2.2 Test Equipment

## 3.Summary

## 4.Attachment diagram

### 4.1 Parameter diagram of return loss and voltage standing wave ratio

## 5.WIFI & GPS graphics and test data

### 5.1.1 WIFI field test

### 5.1.2 WIFI throughput test

### 5.2 Gain and efficiency tests

### 5.3 GPS field test

## 6.Antenna assembly and processing drawing file

## 7.Antenna 2D profile

## 1.Antenna parameters

This report mainly provides test conditions and results for various electrical and structural properties in device tests,

An antenna designed by TLT.

Electrical parameters

### 1.1.1 Electrical Performance Assessment

The band range of the antenna is 2400MHz-2500MHz and 5000MHz~5800MHz. below are the basic parameters of the electrical performance of the antenna. This is designed antenna and produced by Tian Lu Tong.

### 1.1.2 distribution circuit diagram

Use the original matching circuit diagram on the PCB board

## 1.2 Structural parameters

### 1.2.1 antenna assembly

Antennas generally consisted of plastic supports and hardware pieces.

### 1.2.2 can test the requirements

Test item	description	Acceptance criteria
1. cryotemperature test	temperature:-20°C Time: 24 hours	The 1. had no obvious damage The 2. electrical performance meets the standard
The 2. high-temperature test	temperature.: 80°C Time: 24 hours	The 1. had no obvious damage The 2. electrical performance meets the standard
3. salt fog test	5 ± 0.1% salt mist PH-value: 6.5-7.2 temperature: 35±1°C Time: 24 hours	1.No color was changed 2.There are no obvious cracks in the appearance
4. environmental adaptability test	Total value of Pb, Hg, Cr+6, Cd in packing materials is smaller than 50PPM Pb, Hg, Cr+6, PBBs, PBDEs in components are smaller than 500PPM, Cd is smaller than 50PPM	

## 2.The test

Antenna are installed in a customer provided phone for testing. describes the antenna in mobile) for the equipment (electrical performance test.

### 2.1The VSWR test

Test the connection

Test VSWR order of device connections: Agilent E8753 network analyzer → test cable → customer-provided machine

#### 2.1.2 VSWR

The table below describes the values of the voltage resident wave ratio of the antenna at the two endpoints of the frequency band, involving drawings about the return impairment and resident wave ratio, please refer .

	GPS	WIFI-2.4G		WIFI-5.0G	
Frequency (MHz)	1.575G	2.4G	2.48G	5.15G	5.85G
VSWR	1.25	1.39	1.37	2.01	2.35
Return Loss	-19.2	-15.7	-16.0	-9.49	-7.8

### GAIN TO EFFCIENCY

Frequency (GHz)	1.575G	2.40G	2.48G	5.20G	5.70G
Gain (dBi)	1.35	0.67	1.02	0.96	0.67
Efficiency (%)	40.1	38.2	40.2	40.1	39.1

#### 2.2.1 test environment

Skyway microwave dark chamber: The test frequency range from 800MHz to 6GHz, in a 50cm diameter spherical area, and the dark chamber is reflected less than-50 dB. from 800MHz—6GHz

#### 2.2.2 Test the equipment

Agilent 8960 ((5515C) Wireless Communication Test Device, Dipole antenna, French Sa t imo Antenna Test System, Printer, etc.

## 3. summary

The antenna is designed according to the machine samples provided by the customer, and the electrical parameters and result performance of the antenna meet the standard, and we are sure to

make you satisfied.

## 4. Attachment diagram

### 4.1 Parameter diagram of return loss and voltage standing wave ratio



## 5. WIFI & GPS graphics and test data


5.1.1WIFI field test: Test environment: open environment, 15 meters away from our router. The test is as follows:




2.4G-WIFI display -42DBM , full signal



5G-WIFI display -46DBM , full signal

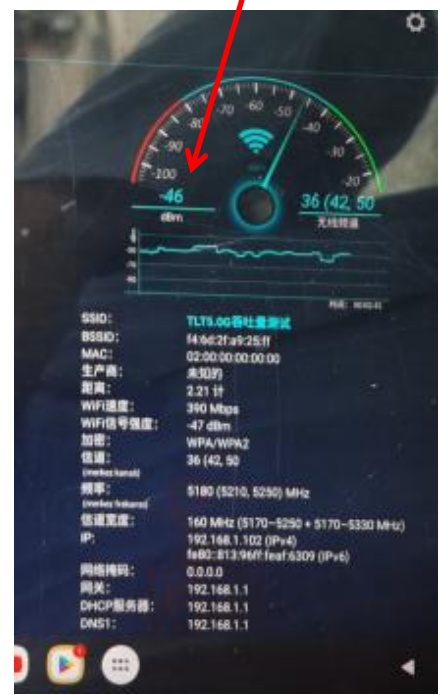


## 5.1.2 WIFI throughput test:

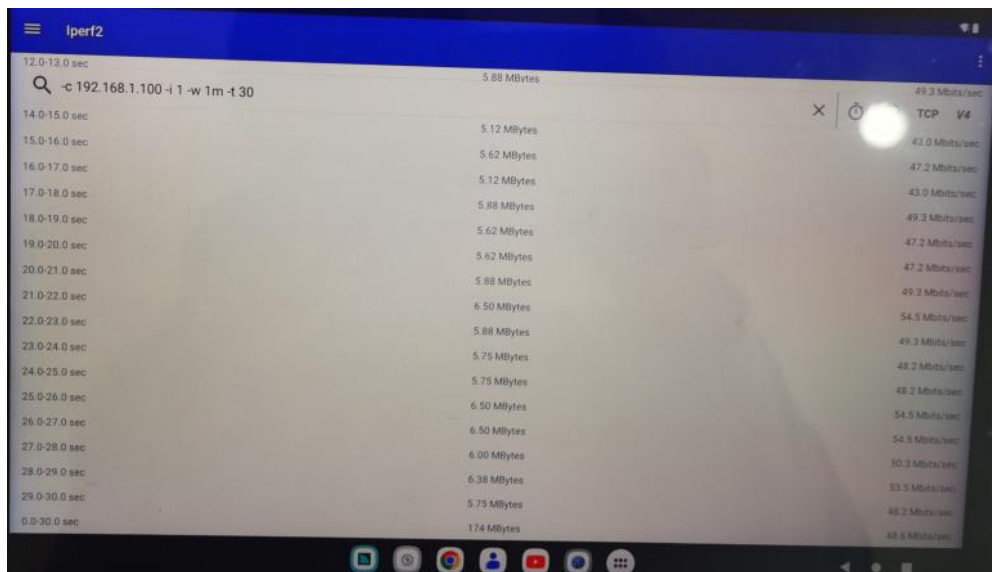


2.4G RX: 48.6M


Product Number:TLT5326-P11  
Product Name:Mobile Phone Antenna

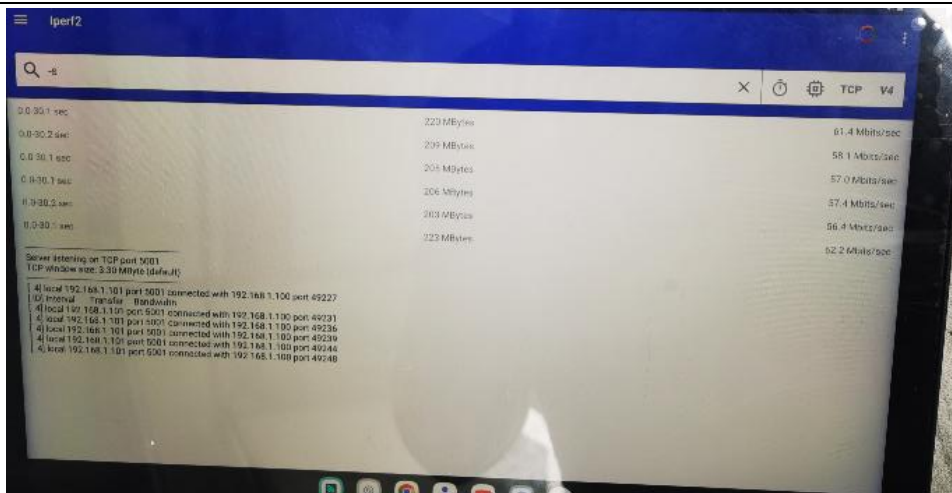

2.4G TX: 52.2M

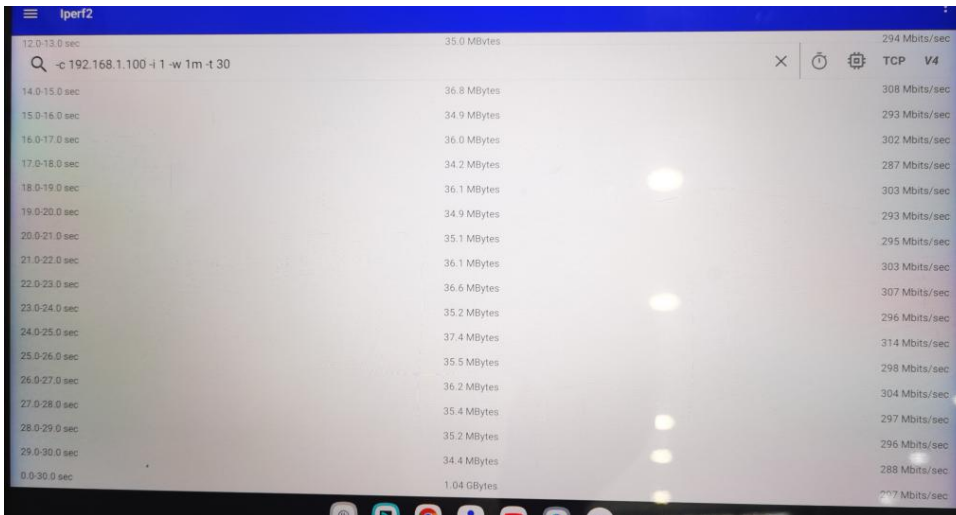


5G RX: 297M

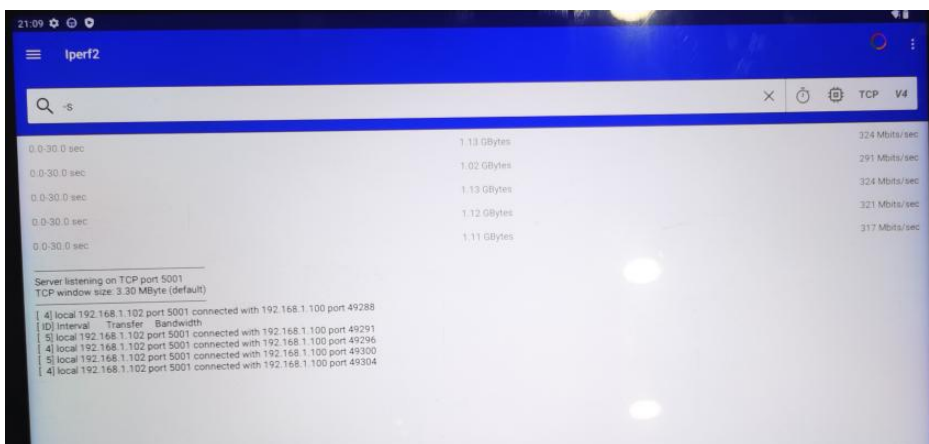


5G TX: 317M

5.2 WIFI gain and efficiency test:


Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)	Directivity (dBi)	Efficiency (%)	Efficiency (dB)
1	2400.0	2400.00	0.67	4.85	38.2%	-4.18
2	2405.0	2405.00	0.10	4.81	39.8%	-4.01
3	2410.0	2410.00	1.09	4.74	43.2%	-3.64
4	2415.0	2415.00	0.96	4.75	41.8%	-3.79
5	2420.0	2420.00	0.11	4.77	34.2%	-4.66
6	2425.0	2425.00	0.47	4.69	37.9%	-4.22
7	2430.0	2430.00	1.25	4.67	45.4%	-3.43
8	2435.0	2435.00	0.79	4.72	40.5%	-3.93
9	2440.0	2440.00	-0.01	4.74	33.5%	-4.75
10	2445.0	2445.00	-0.15	4.74	32.4%	-4.89
11	2450.0	2450.00	-0.40	4.76	45.5%	-3.36
12	2455.0	2455.00	0.58	4.83	37.6%	-4.25
13	2460.0	2460.00	1.78	4.85	49.4%	-3.07
14	2465.0	2465.00	0.39	4.83	36.0%	-4.44
15	2470.0	2470.00	-0.61	4.86	38.4%	-4.27
16	2475.0	2475.00	0.20	4.92	33.7%	-4.72
17	2480.0	2480.00	1.02	4.98	40.2%	-3.96
18	2485.0	2485.00	1.03	4.96	40.5%	-3.93
19	2490.0	2490.00	0.94	4.96	39.6%	-4.03
20	2495.0	2495.00	1.19	5.00	41.6%	-3.81
21	2500.0	2500.00	1.18	5.12	40.4%	-3.93
22	5150.0	5150.00	0.35	4.68	36.9%	-4.33
23	5200.0	5200.00	0.96	4.92	40.1%	-3.97
24	5250.0	5250.00	-1.34	5.43	41.1%	-3.77
25	5300.0	5300.00	0.59	5.06	35.7%	-4.47
26	5350.0	5350.00	-2.07	4.58	41.6%	-3.82
27	5400.0	5400.00	1.36	5.00	43.2%	-3.64
28	5450.0	5450.00	0.42	5.67	39.9%	-4.25
29	5500.0	5500.00	-0.43	5.84	37.6%	-4.30
30	5550.0	5550.00	1.34	5.60	37.5%	-4.26
31	5600.0	5600.00	0.02	5.38	39.1%	-4.36
32	5650.0	5650.00	0.75	5.84	31.0%	-5.09
33	5700.0	5700.00	0.67	6.03	39.1%	-4.36
34	5750.0	5750.00	-0.06	5.87	35.5%	-4.93
35	5800.0	5800.00	0.63	5.08	35.9%	-4.45




2.4G




2.45G




2.48G



5.2G



5.5G



5.8G



5.3 GPS field test:

