FCC RADIO TEST REPORT

FCC ID	:	**HLZA24001**
Equipment	:	**Tablet PC**
Brand Name	:	**acer**
Model Name	:	**A24001**
Applicant	:	**Acer Incorporated** **8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)**
Manufacturer	:	**Acer Incorporated** **8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22181, Taiwan (R.O.C)**
Standard	:	**FCC Part 15 Subpart E §15.407**

The product was received on Dec. 28, 2023 and testing was performed from Jan. 11, 2024 to Feb. 23, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

Table of Contents

History of this test report

Report No.	Version	Description	Issue Date
FR3D2701D	01	Initial issue of report	Mar. 14, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i)	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	3.13 dB under the limit at 5149.60 MHz
3.5	15.207	AC Conducted Emission	Pass	5.56 dB under the limit at 13.10 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Lewis Ho

Report Producer: Mila Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Sample 1	With PCB 1, Camera 1, DDR 1
Sample 2	With PCB 2, Camera 2, DDR 2
Sample 3	With PCB 2, Camera 1, DDR 1
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.
Antenna Type	WLAN: FPC Antenna Bluetooth: FPC Antenna GPS / Glonass / BDS: PIFA Antenna

Antenna information		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	0.96
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	0.59
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	1.34

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	**Sporton Site No.**
	TH05-HY, CO07-HY, 03CH22-HY

Note: The test site complies with ANSI C63.4 2014 requirement.
FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

2.2 Test Mode

The power for 802.11ac mode is smaller than 802.11n mode, so all other conducted and radiated test is covered by 802.11n mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11a	**6 Mbps**
802.11n HT20	**MCS0**
802.11n HT40	**MCS0**
802.11ac VHT20 (Covered by HT20)	**MCS0**
802.11ac VHT40 (Covered by HT40)	**MCS0**
802.11ac VHT80	**MCS0**

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + MPEG4 + Earphone + USB Cable (Charging from Adapter) for Sample 1 Mode 2 : Bluetooth Link + WLAN (5GHz) Link + MPEG4 + Earphone + USB Cable (Charging from Adapter) for Sample 2 Mode 3 : Bluetooth Link + WLAN (5GHz) Link + MPEG4 + Earphone + USB Cable (Charging from Adapter) for Sample 3
Remark: The worst case of Conducted Emission is mode 3; only the test data of it was reported.	

<Sample 1>

Ch. #		Band I：5150-5250 MHz	Band II：5250-5350 MHz	Band III：5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I：5150-5250 MHz	Band II：5250-5350 MHz	Band III：5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I：5150-5250 MHz	Band II：5250-5350 MHz	Band III：5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

Ch. #		Band I：5150-5250 MHz	Band II：5250-5350 MHz	Band III：5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-

<Sample 2>

Ch. #		Band I：5150-5250 MHz
		802.11ac VHT80
L	Low	-
M	Middle	42
H	High	-

<Sample 3>

Ch. #		Band I：5150-5250 MHz
		802.11ac VHT80
L	Low	-
M	Middle	42
H	High	-

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

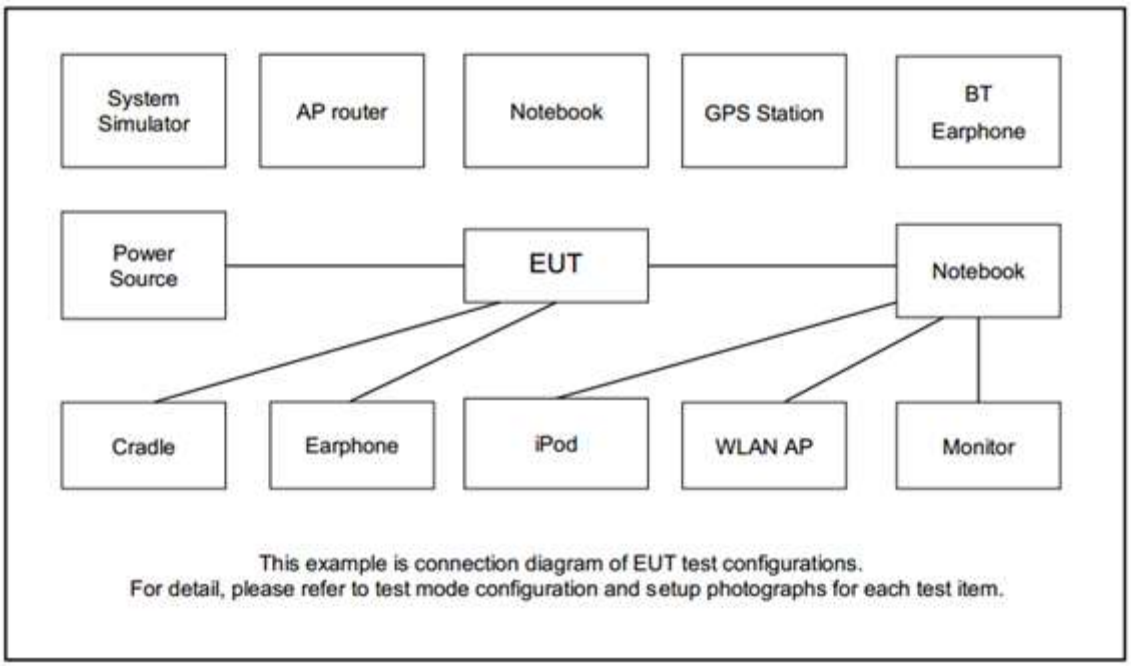

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded, 1.8 m	N/A
5.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Acer_AV0U0_P11-11_0.004.03_PAPAP_GEN1” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
8. Measure and record the results in the test report.

3.1.4 Test Setup

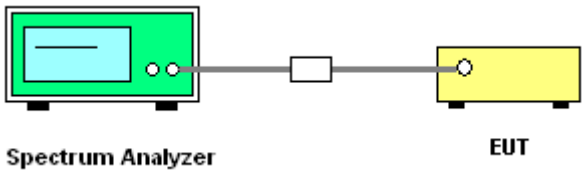

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

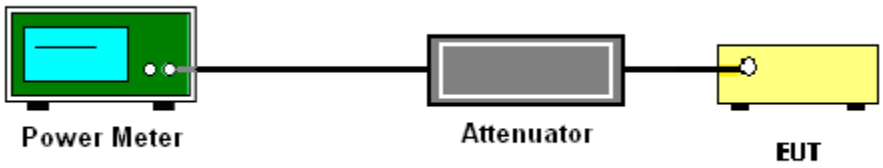

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW ≥ 3 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

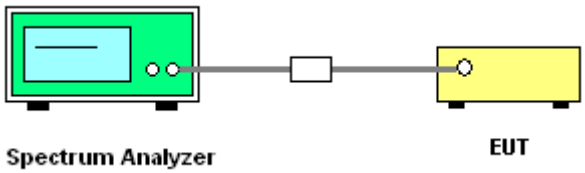

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of –27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E=\frac{1000000\sqrt{30P}}{3}$$ μV/m, where P is the eirp (Watts)

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of −27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".

3.4.4 Test Setup

For radiated emissions below 30MHz

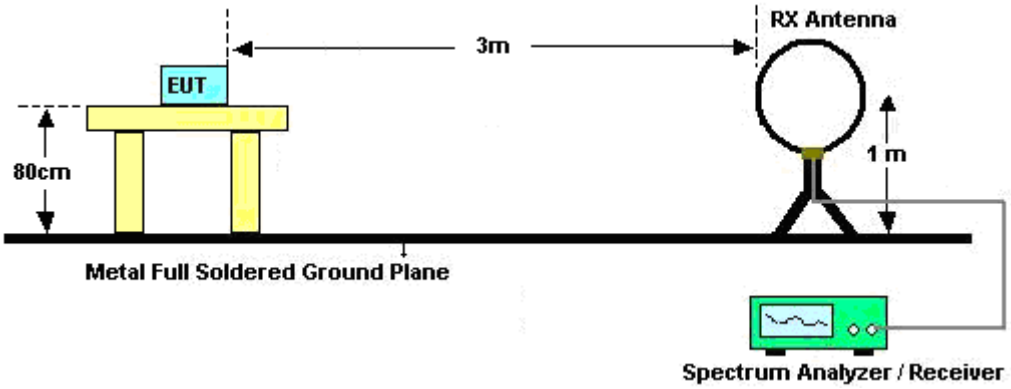

For radiated emissions from 30MHz to 1GHz

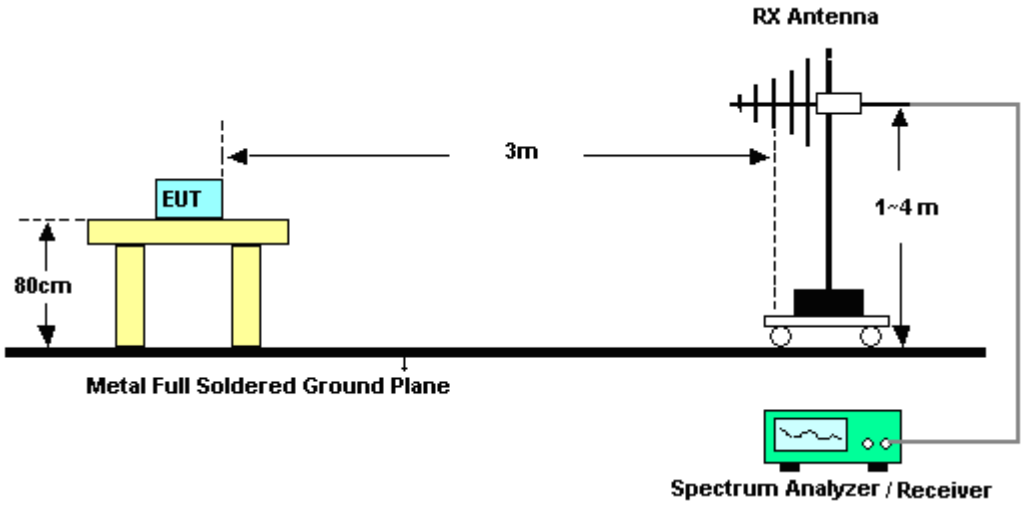

For radiated test from 1GHz to 18GHz

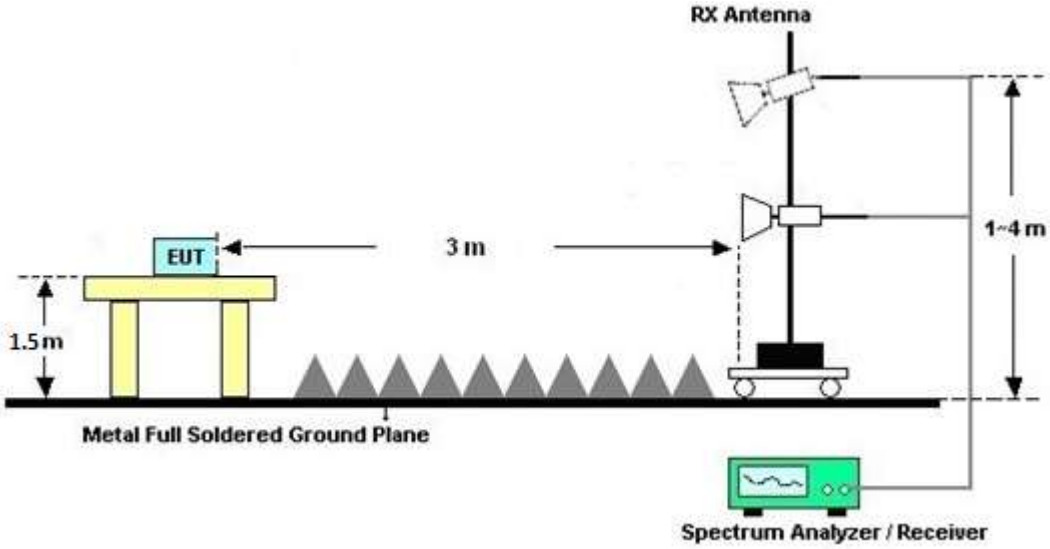

For radiated test above 18GHz

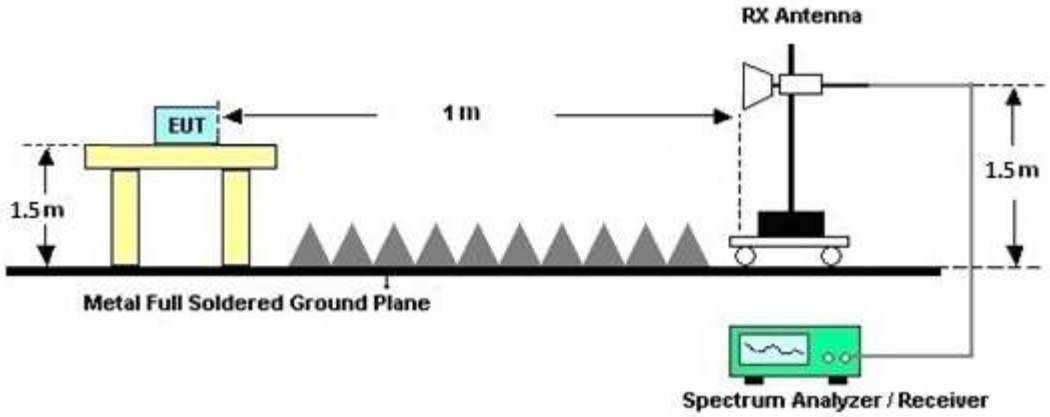

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

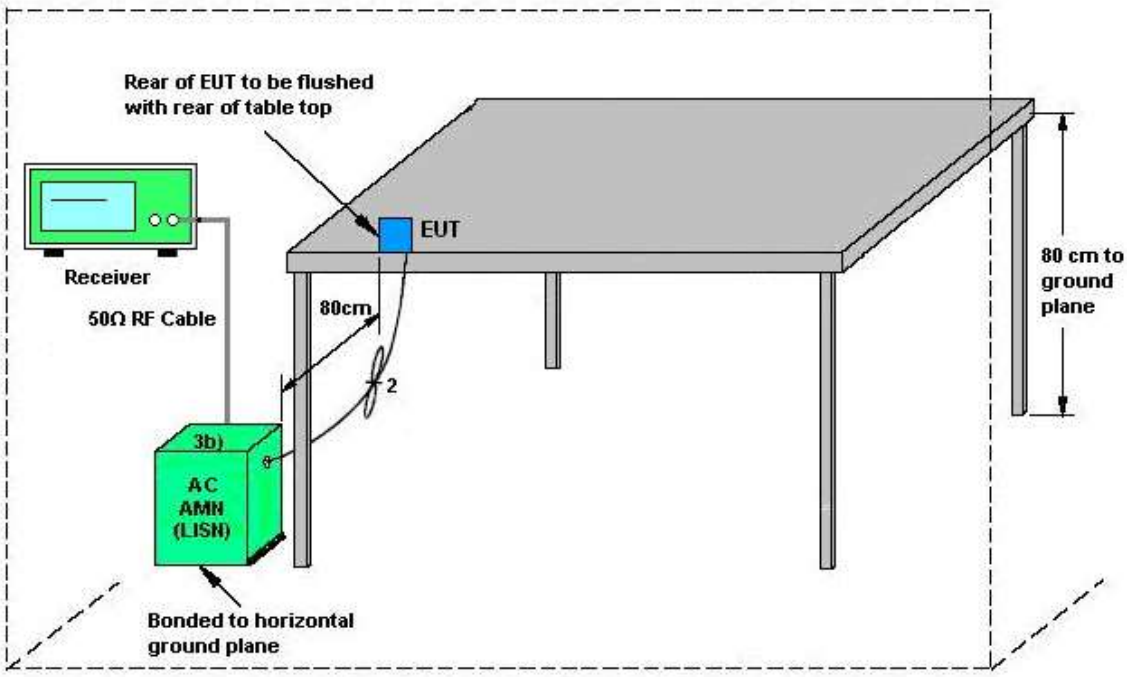

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Feb. 02, 2024~ Feb. 07, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 02, 2024~ Feb. 07, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2023	Feb. 02, 2024~ Feb. 07, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 15, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 14, 2024	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 05, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 04, 2024	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 13, 2023	Feb. 02, 2024~ Feb. 07, 2024	Mar. 12, 2024	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Feb. 02, 2024~ Feb. 07, 2024	Sep. 19, 2024	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz~30MHz	Feb. 28, 2023	Feb. 04, 2024~ Feb. 23, 2024	Feb. 27, 2024	Radiation (03CH22-HY)
Bilog Antenna with 6dB	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Oct. 15, 2023	Feb. 04, 2024~ Feb. 23, 2024	Oct. 14, 2024	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 15, 2023	Feb. 04, 2024~ Feb. 23, 2024	Jul. 14, 2024	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18EN	1GHz~18GHz	Jul. 12, 2023	Feb. 04, 2024~ Feb. 23, 2024	Jul. 11, 2024	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz-40GHz	Jul. 10, 2023	Feb. 04, 2024~ Feb. 23, 2024	Jul. 09, 2024	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 28, 2023	Feb. 04, 2024~ Feb. 23, 2024	Sep. 27, 2024	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060801	18-40GHz	Jun. 27, 2023	Feb. 04, 2024~ Feb. 23, 2024	Jun. 26, 2024	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY60241058	10Hz~44GHz	Jul. 06, 2023	Feb. 04, 2024~ Feb. 23, 2024	Jul. 05, 2024	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Jan. 03, 2024	Feb. 04, 2024~ Feb. 23, 2024	Jan. 02, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 04, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Feb. 04, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Feb. 04, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_20191 22	RK-002347	N/A	N/A	Feb. 04, 2024~ Feb. 23, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 07, 2023	Feb. 04, 2024~ Feb. 23, 2024	Mar. 06, 2024	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,8046 11/2,804615/2	N/A	Oct. 24, 2023	Feb. 04, 2024~ Feb. 23, 2024	Oct. 23, 2024	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jan. 11, 2024~ Feb. 21, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 36 (NO:35)	10MHz~6GHz	Aug. 23, 2023	Jan. 11, 2024~ Feb. 21, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101564	10Hz ~ 40GHz	Sep. 12, 2023	Jan. 11, 2024~ Feb. 21, 2024	Sep. 11, 2024	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**3.44 dB**

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**6.5 dB**

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**4.5 dB**

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**4.5 dB**

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**5.4 dB**

Appendix A. Test Result of Conducted Test items

Test Engineer:	Junyu Jhou and Henry Ke	Temperature:	21~25	°C
Test Date:	2024/1/11~2024/2/21	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	16.68	-	20.14	-	-		22.22	-		
11a	6Mbps	1	44	5220	16.68	-	20.11	-	-		22.22	-		
11a	6Mbps	1	48	5240	16.68	-	20.17	-	-		22.22	-		
HT20	MCS0	1	36	5180	17.68	-	20.46	-	-		22.48	-		
HT20	MCS0	1	44	5220	17.73	-	20.41	-	-		22.49	-	-	
HT20	MCS0	1	48	5240	17.73	-	20.60	-	-		22.49	-		
HT40	MCS0	1	38	5190	36.56	-	41.65	-	-		23.01	-		
HT40	MCS0	1	46	5230	36.56	-	41.49	-	-		23.01	-		
VHT80	MCS0	1	42	5210	75.28	-	81.34	-	-		23.01	-		

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna													
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	11.70	-	-	24.00	-	0.96	-	-	Pass
11a	6Mbps	1	44	5220	11.70	-		24.00	-	0.96	-		Pass
11a	6Mbps	1	48	5240	11.60	-		24.00	-	0.96	-		Pass
HT20	MCS0	1	36	5180	11.60	-		24.00	-	0.96	-		Pass
HT20	MCS0	1	44	5220	11.60	-		24.00	-	0.96	-		Pass
HT20	MCS0	1	48	5240	11.50	-		24.00	-	0.96	-		Pass
HT40	MCS0	1	38	5190	11.70	-		24.00	-	0.96	-		Pass
HT40	MCS0	1	46	5230	11.60	-		24.00	-	0.96	-		Pass
VHT20	MCS0	1	36	5180	11.50	-		24.00	-	0.96	-		Pass
VHT20	MCS0	1	44	5220	11.50	-		24.00	-	0.96	-		Pass
VHT20	MCS0	1	48	5240	11.40	-		24.00	-	0.96	-		Pass
VHT40	MCS0	1	38	5190	11.60	-		24.00	-	0.96	-		Pass
VHT40	MCS0	1	46	5230	11.50	-		24.00	-	0.96	-		Pass
VHT80	MCS0	1	42	5210	11.80	-		24.00	-	0.96	-		Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna															
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	0.10	-	0.28	-		11.00	-	0.96	-		Pass
11a	6Mbps	1	44	5220	0.10	-	0.13	-		11.00	-	0.96	-		Pass
11a	6Mbps	1	48	5240	0.10	-	0.65	-		11.00	-	0.96	-		Pass
HT20	MCS0	1	36	5180	0.12	-	-0.12	-		11.00	-	0.96	-		Pass
HT20	MCS0	1	44	5220	0.12	-	-0.24	-	-	11.00	-	0.96	-	-	Pass
HT20	MCS0	1	48	5240	0.12	-	-0.11	-		11.00	-	0.96	-		Pass
HT40	MCS0	1	38	5190	0.23	-	-3.01	-		11.00	-	0.96	-		Pass
HT40	MCS0	1	46	5230	0.23	-	-2.61	-		11.00	-	0.96	-		Pass
VHT80	MCS0	1	42	5210	0.46	-	-5.86	-		11.00	-	0.96	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna															
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	16.68	-	20.09	-	23.22	-	29.22	-	23.98	-	
11a	6Mbps	1	60	5300	16.68	-	19.98	-	23.22	-	29.22	-	23.98	-	
11a	6Mbps	1	64	5320	16.78	-	20.24	-	23.25	-	29.25	-	23.98	-	
HT20	MCS0	1	52	5260	17.73	-	20.46	-	23.49	-	29.49	-	23.98	-	
HT20	MCS0	1	60	5300	17.68	-	20.48	-	23.48	-	29.48	-	23.98	-	-
HT20	MCS0	1	64	5320	17.73	-	20.51	-	23.49	-	29.49	-	23.98	-	
HT40	MCS0	1	54	5270	36.46	-	41.55	-	23.98	-	30.00	-	23.98	-	
HT40	MCS0	1	62	5310	36.36	-	41.65	-	23.98	-	30.00	-	23.98	-	
VHT80	MCS0	1	58	5290	75.16	-	80.86	-	23.98	-	30.00	-	23.98	-	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna														
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	11.50	-		23.98	-	0.59	-	26.99	Pass
11a	6Mbps	1	60	5300	11.90	-		23.98	-	0.59	-	26.99	Pass
11a	6Mbps	1	64	5320	11.70	-		23.98	-	0.59	-	26.99	Pass
HT20	MCS0	1	52	5260	11.80	-		23.98	-	0.59	-	26.99	Pass
HT20	MCS0	1	60	5300	11.80	-		23.98	-	0.59	-	26.99	Pass
HT20	MCS0	1	64	5320	11.70	-		23.98	-	0.59	-	26.99	Pass
HT40	MCS0	1	54	5270	11.70	-		23.98	-	0.59	-	26.99	Pass
HT40	MCS0	1	62	5310	12.00	-	-	23.98	-	0.59	-	26.99	Pass
VHT20	MCS0	1	52	5260	11.70	-		23.98	-	0.59	-	26.99	Pass
VHT20	MCS0	1	60	5300	11.70	-		23.98	-	0.59	-	26.99	Pass
VHT20	MCS0	1	64	5320	11.60	-		23.98	-	0.59	-	26.99	Pass
VHT40	MCS0	1	54	5270	11.60	-		23.98	-	0.59	-	26.99	Pass
VHT40	MCS0	1	62	5310	11.90	-		23.98	-	0.59	-	26.99	Pass
VHT80	MCS0	1	58	5290	11.90	-		23.98	-	0.59	-	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna															
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	0.10	-	-0.12	-		11.00	-	0.59	-		Pass
11a	6Mbps	1	60	5300	0.10	-	0.29	-		11.00	-	0.59	-		Pass
11a	6Mbps	1	64	5320	0.10	-	0.15	-		11.00	-	0.59	-		Pass
HT20	MCS0	1	52	5260	0.12	-	0.32	-		11.00	-	0.59	-		Pass
HT20	MCS0	1	60	5300	0.12	-	0.30	-	-	11.00	-	0.59	-	-	Pass
HT20	MCS0	1	64	5320	0.12	-	0.25	-		11.00	-	0.59	-		Pass
HT40	MCS0	1	54	5270	0.23	-	-2.33	-		11.00	-	0.59	-		Pass
HT40	MCS0	1	62	5310	0.23	-	-1.98	-		11.00	-	0.59	-		Pass
VHT80	MCS0	1	58	5290	0.46	-	-5.01	-		11.00	-	0.59	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	100	5500	16.68	-	20.30	-	23.22	-	29.22	-	23.98	-	----	----
11a	6Mbps	1	116	5580	16.73	-	20.22	-	23.24	-	29.24	-	23.98	-	----	----
11a	6Mbps	1	140	5700	16.73	-	20.18	-	23.24	-	29.24	-	23.98	-	----	----
HT20	MCS0	1	100	5500	17.68	-	20.53	-	23.48	-	29.48	-	23.98	-	----	----
HT20	MCS0	1	116	5580	17.73	-	20.46	-	23.49	-	29.49	-	23.98	-	----	----
HT20	MCS0	1	140	5700	17.68	-	20.55	-	23.48	-	29.48	-	23.98	-	----	----
HT40	MCS0	1	102	5510	36.36	-	41.86	-	23.98	-	30.00	-	23.98	-	----	----
HT40	MCS0	1	110	5550	36.26	-	41.46	-	23.98	-	30.00	-	23.98	-	----	----
HT40	MCS0	1	134	5670	36.46	-	41.49	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	106	5530	75.16	-	81.34	-	23.98	-	30.00	-	23.98	-	----	----

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna													
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	11.50	-	-	23.98	-	1.34	-	26.99	Pass
11a	6Mbps	1	116	5580	11.80	-		23.98	-	1.34	-	26.99	Pass
11a	6Mbps	1	140	5700	11.80	-		23.98	-	1.34	-	26.99	Pass
HT20	MCS0	1	100	5500	11.70	-		23.98	-	1.34	-	26.99	Pass
HT20	MCS0	1	116	5580	11.70	-		23.98	-	1.34	-	26.99	Pass
HT20	MCS0	1	140	5700	11.60	-		23.98	-	1.34	-	26.99	Pass
HT40	MCS0	1	102	5510	11.70	-		23.98	-	1.34	-	26.99	Pass
HT40	MCS0	1	110	5550	11.40	-		23.98	-	1.34	-	26.99	Pass
HT40	MCS0	1	134	5670	11.40	-		23.98	-	1.34	-	26.99	Pass
VHT20	MCS0	1	100	5500	11.60	-		23.98	-	1.34	-	26.99	Pass
VHT20	MCS0	1	116	5580	11.60	-		23.98	-	1.34	-	26.99	Pass
VHT20	MCS0	1	140	5700	11.50	-		23.98	-	1.34	-	26.99	Pass
VHT40	MCS0	1	102	5510	11.60	-		23.98	-	1.34	-	26.99	Pass
VHT40	MCS0	1	110	5550	11.30	-		23.98	-	1.34	-	26.99	Pass
VHT40	MCS0	1	134	5670	11.30	-		23.98	-	1.34	-	26.99	Pass
VHT80	MCS0	1	106	5530	11.30	-		23.98	-	1.34	-	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna															
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	0.10	-	-0.11	-		11.00	-	1.34	-		Pass
11a	6Mbps	1	116	5580	0.10	-	0.29	-		11.00	-	1.34	-		Pass
11a	6Mbps	1	140	5700	0.10	-	0.14	-		11.00	-	1.34	-		Pass
HT20	MCS0	1	100	5500	0.12	-	-0.01	-		11.00	-	1.34	-		Pass
HT20	MCS0	1	116	5580	0.12	-	0.32	-		11.00	-	1.34	-		Pass
HT20	MCS0	1	140	5700	0.12	-	0.35	-	-	11.00	-	1.34	-	-	Pass
HT40	MCS0	1	102	5510	0.23	-	-2.34	-		11.00	-	1.34	-		Pass
HT40	MCS0	1	110	5550	0.23	-	-2.42	-		11.00	-	1.34	-		Pass
HT40	MCS0	1	134	5670	0.23	-	-2.43	-		11.00	-	1.34	-		Pass
VHT80	MCS0	1	106	5530	0.46	-	-5.56	-		11.00	-	1.34	-		Pass

Test Result of 26dB & 99% Occupied Bandwidth

<802.11a>

26dB Bandwidth	99% Occupied Bandwidth
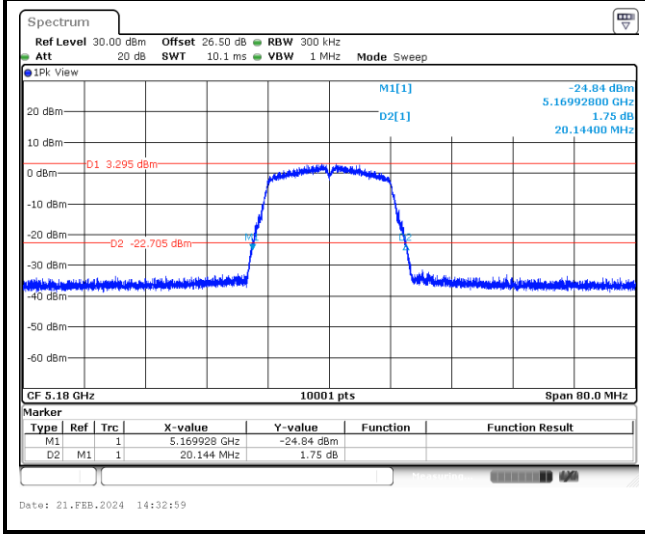	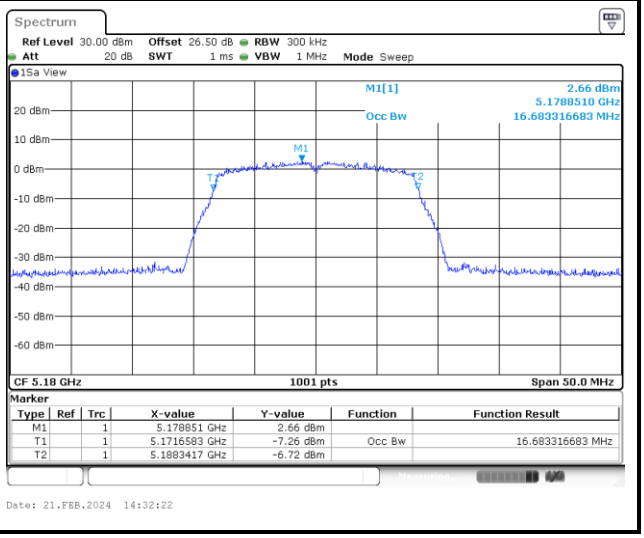

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11n HT20>

26dB Bandwidth	99% Occupied Bandwidth
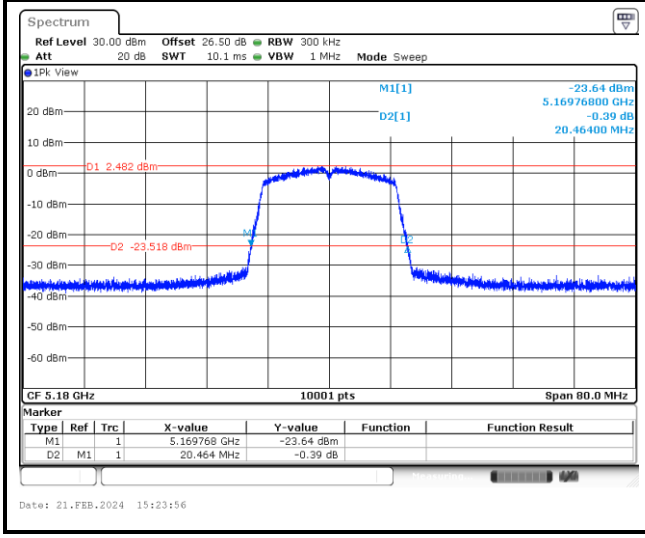	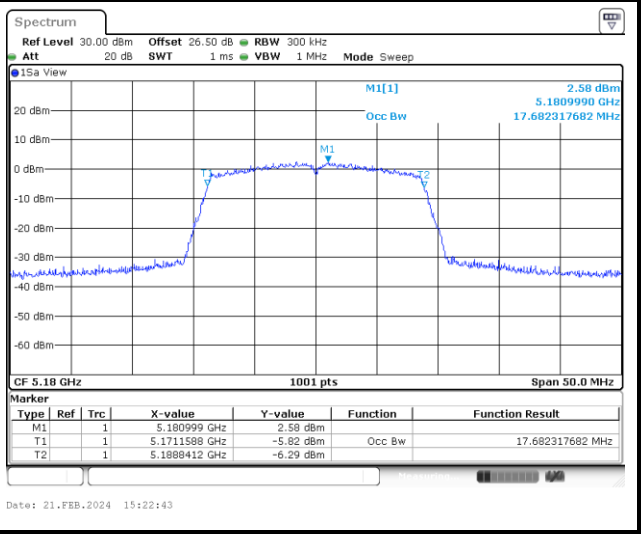

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11n HT40>

26dB Bandwidth	99% Occupied Bandwidth
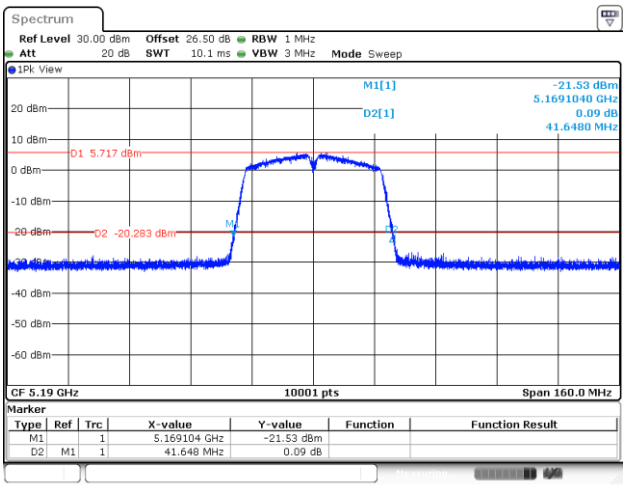	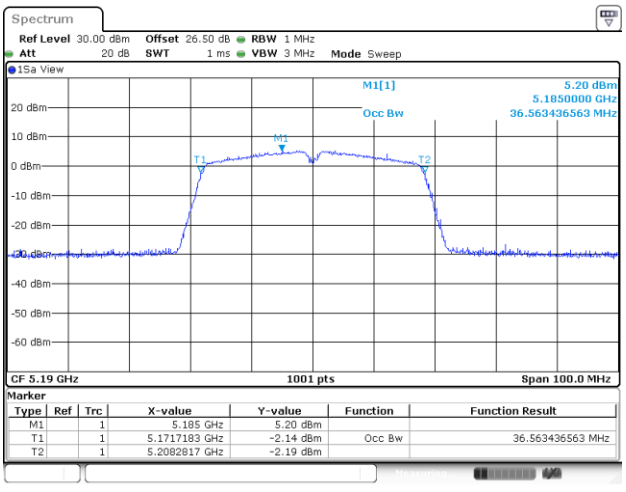

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11ac VHT80>

26dB Bandwidth	99% Occupied Bandwidth
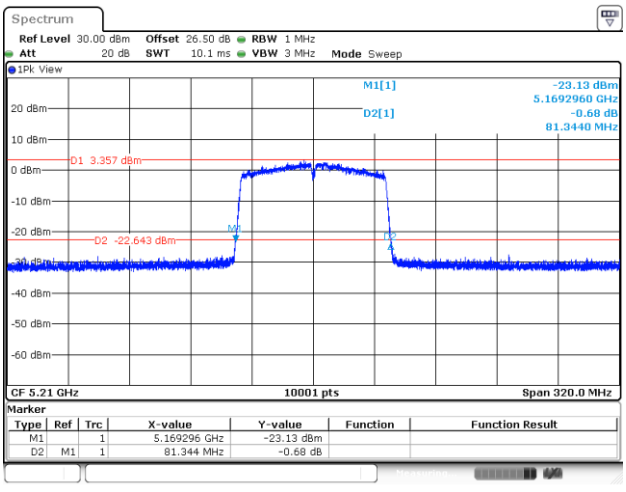	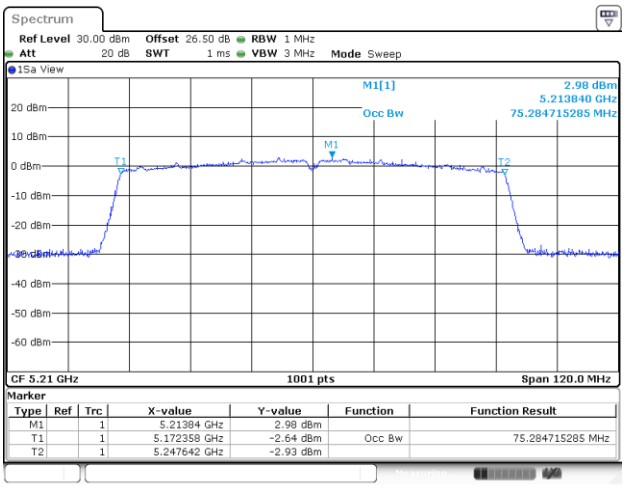

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

Test Result of Power Spectral Density

<802.11a>

Maximum Power Density Plot (dBm/MHz)

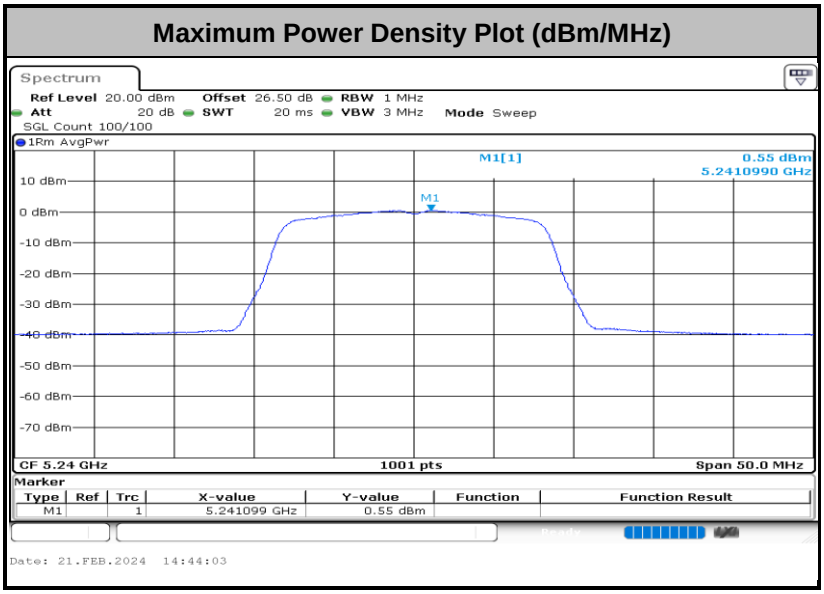

<802.11n HT20>

Maximum Power Density Plot (dBm/MHz)

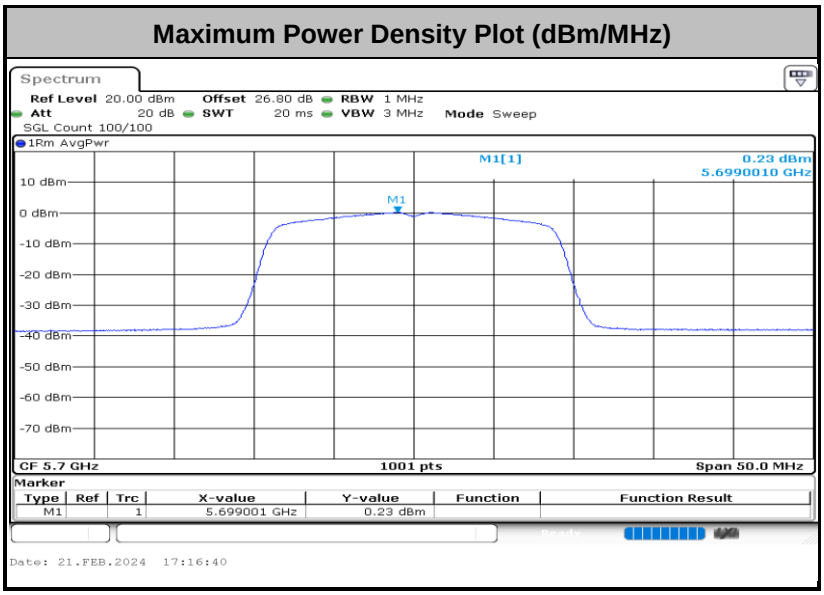

<802.11n HT40>

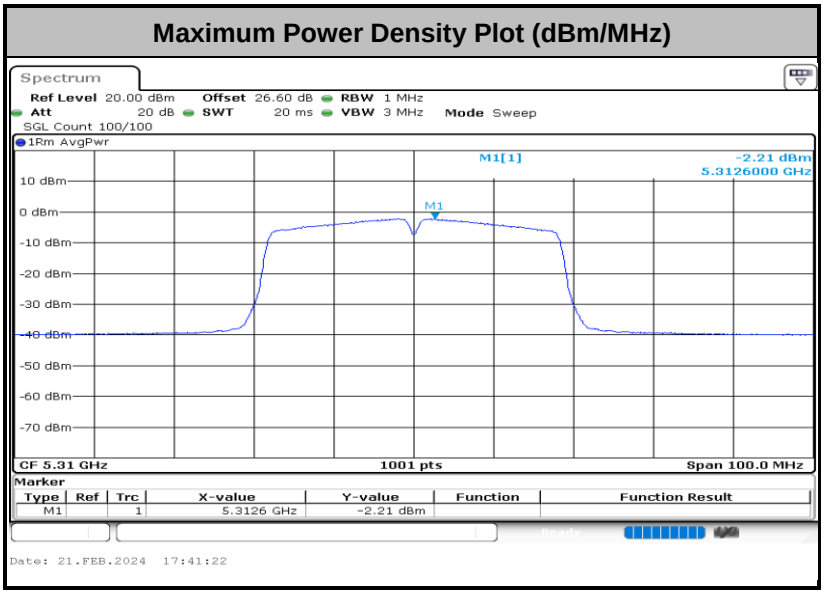

<802.11ac VHT80>

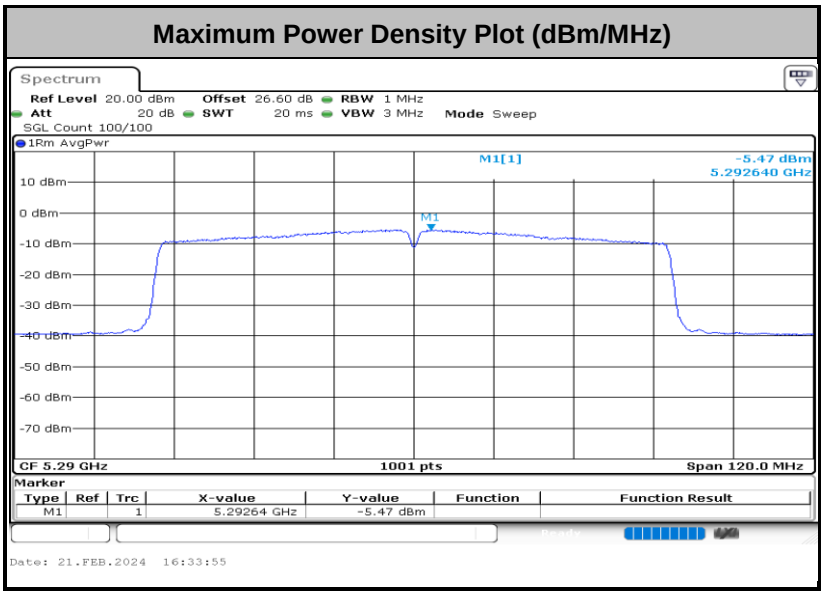

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	**Temperature :**	18.8~24.2℃
		Relative Humidity :	50.2~60.4%

EUT Information

Report NO :	3D2701
Test Mode :	Mode 3
Test Voltage :	120Vac/60Hz
Phase :	Line

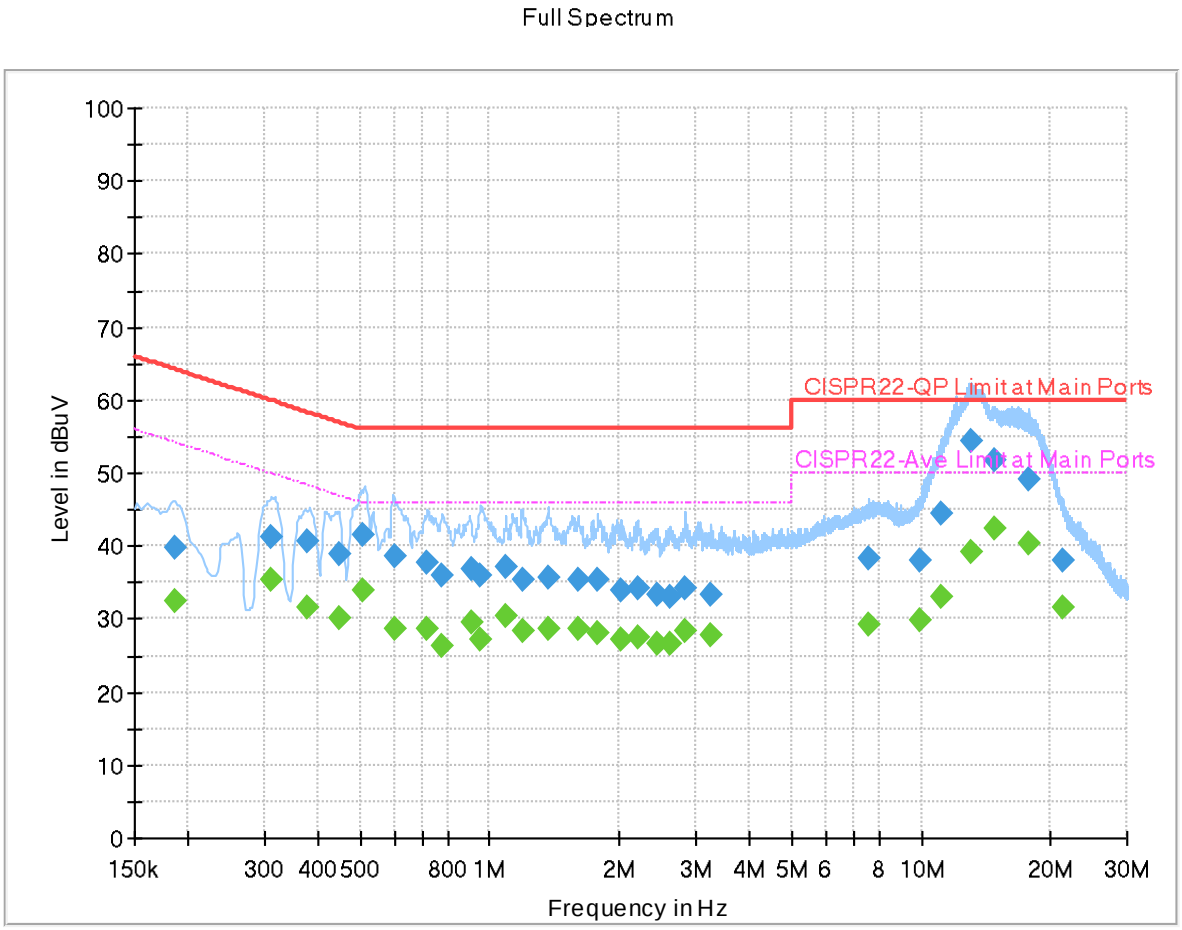

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.185820	---	32.31	54.22	21.91	L1	OFF	19.9
0.185820	39.72	---	64.22	24.50	L1	OFF	19.9
0.312000	---	35.35	49.92	14.57	L1	OFF	19.9
0.312000	41.31	---	59.92	18.61	L1	OFF	19.9
0.379500	---	31.46	48.29	16.83	L1	OFF	19.9
0.379500	40.61	---	58.29	17.68	L1	OFF	19.9
0.447720	---	30.00	46.92	16.92	L1	OFF	19.9
0.447720	38.88	---	56.92	18.04	L1	OFF	19.9
0.510000	---	34.03	46.00	11.97	L1	OFF	19.9
0.510000	41.46	---	56.00	14.54	L1	OFF	19.9
0.600720	---	28.68	46.00	17.32	L1	OFF	19.9
0.600720	38.58	---	56.00	17.42	L1	OFF	19.9
0.716010	---	28.53	46.00	17.47	L1	OFF	19.9
0.716010	37.59	---	56.00	18.41	L1	OFF	19.9
0.776940	---	26.46	46.00	19.54	L1	OFF	19.9
0.776940	35.97	---	56.00	20.03	L1	OFF	19.9
0.903750	---	29.67	46.00	16.33	L1	OFF	19.9
0.903750	36.74	---	56.00	19.26	L1	OFF	19.9
0.949110	---	27.30	46.00	18.70	L1	OFF	19.9

0.949110	36.00	---	56.00	20.00	L1	OFF	19.9
1.092840	---	30.48	46.00	15.52	L1	OFF	20.0
1.092840	37.00	---	56.00	19.00	L1	OFF	20.0
1.187790	---	28.43	46.00	17.57	L1	OFF	20.0
1.187790	35.48	---	56.00	20.52	L1	OFF	20.0
1.367250	---	28.56	46.00	17.44	L1	OFF	20.0
1.367250	35.69	---	56.00	20.31	L1	OFF	20.0
1.597290	---	28.60	46.00	17.40	L1	OFF	20.0
1.597290	35.35	---	56.00	20.65	L1	OFF	20.0
1.779000	---	28.11	46.00	17.89	L1	OFF	20.0
1.779000	35.51	---	56.00	20.49	L1	OFF	20.0
2.017500	---	27.15	46.00	18.85	L1	OFF	20.0
2.017500	33.82	---	56.00	22.18	L1	OFF	20.0
2.196600	---	27.38	46.00	18.62	L1	OFF	20.0
2.196600	34.28	---	56.00	21.72	L1	OFF	20.0
2.436000	---	26.70	46.00	19.30	L1	OFF	20.0
2.436000	33.35	---	56.00	22.65	L1	OFF	20.0
2.619420	---	26.59	46.00	19.41	L1	OFF	20.0
2.619420	33.16	---	56.00	22.84	L1	OFF	20.0
2.845500	---	28.45	46.00	17.55	L1	OFF	20.0
2.845500	34.18	---	56.00	21.82	L1	OFF	20.0
3.259770	---	27.64	46.00	18.36	L1	OFF	20.0
3.259770	33.45	---	56.00	22.55	L1	OFF	20.0
7.533420	---	29.27	50.00	20.73	L1	OFF	20.0
7.533420	38.31	---	60.00	21.69	L1	OFF	20.0
9.921750	---	29.80	50.00	20.20	L1	OFF	20.0
9.921750	38.06	---	60.00	21.94	L1	OFF	20.0
11.087070	---	32.92	50.00	17.08	L1	OFF	20.1
11.087070	44.52	---	60.00	15.48	L1	OFF	20.1
13.100910	---	39.08	50.00	10.92	L1	OFF	20.1
13.100910	54.44	---	60.00	5.56	L1	OFF	20.1
14.853750	---	42.34	50.00	7.66	L1	OFF	20.1
14.853750	51.79	---	60.00	8.21	L1	OFF	20.1
17.855250	---	40.29	50.00	9.71	L1	OFF	20.1
17.855250	49.10	---	60.00	10.90	L1	OFF	20.1
21.369300	---	31.72	50.00	18.28	L1	OFF	20.1
21.369300	38.10	---	60.00	21.90	L1	OFF	20.1

EUT Information

Report NO :	3D2701
Test Mode :	Mode 3
Test Voltage :	120Vac/60Hz
Phase :	Neutral

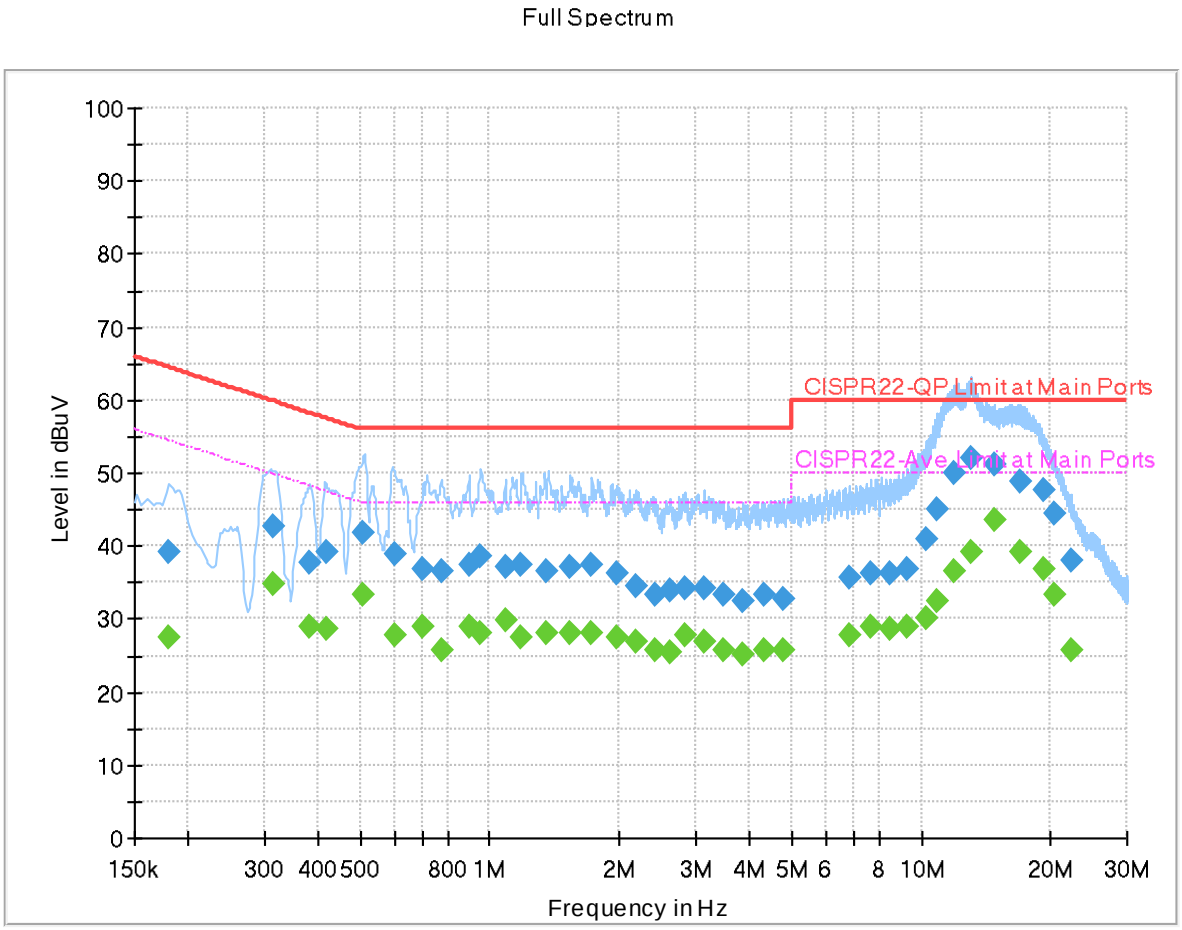

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.179880	---	27.43	54.49	27.06	N	OFF	19.9
0.179880	39.12	---	64.49	25.37	N	OFF	19.9
0.314250	---	34.81	49.86	15.05	N	OFF	19.9
0.314250	42.80	---	59.86	17.06	N	OFF	19.9
0.381750	---	28.83	48.24	19.41	N	OFF	19.9
0.381750	37.80	---	58.24	20.44	N	OFF	19.9
0.418740	---	28.56	47.47	18.91	N	OFF	19.9
0.418740	39.30	---	57.47	18.17	N	OFF	19.9
0.507570	---	33.40	46.00	12.60	N	OFF	19.9
0.507570	41.69	---	56.00	14.31	N	OFF	19.9
0.600000	---	27.86	46.00	18.14	N	OFF	19.9
0.600000	39.02	---	56.00	16.98	N	OFF	19.9
0.699000	---	28.94	46.00	17.06	N	OFF	19.9
0.699000	36.90	---	56.00	19.10	N	OFF	19.9
0.771000	---	25.69	46.00	20.31	N	OFF	19.9
0.771000	36.52	---	56.00	19.48	N	OFF	19.9
0.897000	---	29.01	46.00	16.99	N	OFF	19.9
0.897000	37.37	---	56.00	18.63	N	OFF	19.9
0.953250	---	27.93	46.00	18.07	N	OFF	19.9

0.953250	38.72	---	56.00	17.28	N	OFF	19.9
1.084200	---	29.89	46.00	16.11	N	OFF	20.0
1.084200	37.23	---	56.00	18.77	N	OFF	20.0
1.185540	---	27.58	46.00	18.42	N	OFF	20.0
1.185540	37.29	---	56.00	18.71	N	OFF	20.0
1.358610	---	28.18	46.00	17.82	N	OFF	20.0
1.358610	36.51	---	56.00	19.49	N	OFF	20.0
1.538250	---	27.94	46.00	18.06	N	OFF	20.0
1.538250	37.08	---	56.00	18.92	N	OFF	20.0
1.725720	---	28.06	46.00	17.94	N	OFF	20.0
1.725720	37.43	---	56.00	18.57	N	OFF	20.0
1.959540	---	27.57	46.00	18.43	N	OFF	20.0
1.959540	36.39	---	56.00	19.61	N	OFF	20.0
2.186070	---	26.82	46.00	19.18	N	OFF	20.0
2.186070	34.64	---	56.00	21.36	N	OFF	20.0
2.422500	---	25.81	46.00	20.19	N	OFF	20.0
2.422500	33.41	---	56.00	22.59	N	OFF	20.0
2.616000	---	25.54	46.00	20.46	N	OFF	20.0
2.616000	33.79	---	56.00	22.21	N	OFF	20.0
2.845140	---	27.73	46.00	18.27	N	OFF	20.0
2.845140	34.31	---	56.00	21.69	N	OFF	20.0
3.135570	---	26.99	46.00	19.01	N	OFF	20.0
3.135570	34.13	---	56.00	21.87	N	OFF	20.0
3.466680	---	25.69	46.00	20.31	N	OFF	20.0
3.466680	33.29	---	56.00	22.71	N	OFF	20.0
3.864660	---	25.16	46.00	20.84	N	OFF	20.0
3.864660	32.37	---	56.00	23.63	N	OFF	20.0
4.321500	---	25.68	46.00	20.32	N	OFF	20.0
4.321500	33.22	---	56.00	22.78	N	OFF	20.0
4.800750	---	25.73	46.00	20.27	N	OFF	20.0
4.800750	32.61	---	56.00	23.39	N	OFF	20.0
6.836550	---	27.75	50.00	22.25	N	OFF	20.0
6.836550	35.79	---	60.00	24.21	N	OFF	20.0
7.662750	---	28.81	50.00	21.19	N	OFF	20.0
7.662750	36.21	---	60.00	23.79	N	OFF	20.0
8.502900	---	28.67	50.00	21.33	N	OFF	20.0
8.502900	36.20	---	60.00	23.80	N	OFF	20.0
9.271500	---	28.98	50.00	21.02	N	OFF	20.0
9.271500	36.82	---	60.00	23.18	N	OFF	20.0
10.295250	---	30.16	50.00	19.84	N	OFF	20.1
10.295250	40.84	---	60.00	19.16	N	OFF	20.1
10.935600	---	32.51	50.00	17.49	N	OFF	20.1
10.935600	45.09	---	60.00	14.91	N	OFF	20.1
11.929650	---	36.42	50.00	13.58	N	OFF	20.1
11.929650	50.12	---	60.00	9.88	N	OFF	20.1
13.101000	---	39.12	50.00	10.88	N	OFF	20.1
13.101000	52.04	---	60.00	7.96	N	OFF	20.1
14.800920	---	43.51	50.00	6.49	N	OFF	20.1
14.800920	51.13	---	60.00	8.87	N	OFF	20.1
16.882980	---	39.17	50.00	10.83	N	OFF	20.2
16.882980	48.73	---	60.00	11.27	N	OFF	20.2
19.162500	---	36.73	50.00	13.27	N	OFF	20.2
19.162500	47.72	---	60.00	12.28	N	OFF	20.2
20.438250	---	33.46	50.00	16.54	N	OFF	20.2
20.438250	44.34	---	60.00	15.66	N	OFF	20.2
22.256430	---	25.74	50.00	24.26	N	OFF	20.2
22.256430	38.12	---	60.00	21.88	N	OFF	20.2

Appendix C. Radiated Spurious Emission

Test Engineer :	Bank Lin, Ken Kuo, and Lucifer Jiang	Temperature :	20~23°C
		Relative Humidity :	42~55%

<Sample 1>

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5108.16	52.25	-21.75	74	40.63	32.58	12.67	33.63	241	115	P	H
		5148.98	42.52	-11.48	54	30.96	32.5	12.75	33.69	241	115	A	H
	*	5180	100.65	-	-	89.02	32.56	12.81	33.74	241	115	P	H
	*	5180	93.32	-	-	81.69	32.56	12.81	33.74	241	115	A	H
													H
													H
		5140.4	51.56	-22.44	74	39.99	32.52	12.73	33.68	284	260	P	V
		5149.5	42.85	-11.15	54	31.29	32.5	12.75	33.69	284	260	A	V
	*	5180	102.31	-	-	90.68	32.56	12.81	33.74	284	260	P	V
	*	5180	95.3	-	-	83.67	32.56	12.81	33.74	284	260	A	V
													V
													V
802.11a CH 44 5220MHz		5095.16	51.86	-22.14	74	40.24	32.59	12.64	33.61	299	126	P	H
		5131.3	41.67	-12.33	54	30.08	32.54	12.71	33.66	299	126	A	H
	*	5220	101.7	-	-	90.02	32.6	12.88	33.8	299	126	P	H
	*	5220	94.87	-	-	83.19	32.6	12.88	33.8	299	126	A	H
		5458.39	49.71	-24.29	74	38.05	32.65	13.19	34.18	299	126	P	H
		5457.31	39.57	-14.43	54	27.91	32.64	13.19	34.17	299	126	A	H
		5084.24	51.33	-22.67	74	39.73	32.57	12.62	33.59	302	320	P	V
		5118.82	42.07	-11.93	54	30.47	32.56	12.69	33.65	302	320	A	V
	*	5220	101.4	-	-	89.72	32.6	12.88	33.8	302	320	P	V
	*	5220	94.33	-	-	82.65	32.6	12.88	33.8	302	320	A	V
		5451.91	48.51	-25.49	74	36.88	32.61	13.18	34.16	302	320	P	V
		5459.74	39.51	-14.49	54	27.84	32.66	13.19	34.18	302	320	A	V

802.11a CH 48 5240MHz		5115.7	51.54	-22.46	74	39.93	32.57	12.68	33.64	296	124	P	H
		5109.46	41.63	-12.37	54	30.01	32.58	12.67	33.63	296	124	A	H
	*	5240	100.57	-	-	88.9	32.6	12.9	33.83	296	124	P	H
	*	5240	93.97	-	-	82.3	32.6	12.9	33.83	296	124	A	H
		5405.2	48.27	-25.73	74	36.72	32.51	13.13	34.09	296	124	P	H
		5451.64	39.55	-14.45	54	27.92	32.61	13.18	34.16	296	124	A	H
		5105.82	51.45	-22.55	74	39.83	32.59	12.66	33.63	274	252	P	V
		5108.94	41.77	-12.23	54	30.15	32.58	12.67	33.63	274	252	A	V
	*	5240	102.13	-	-	90.46	32.6	12.9	33.83	274	252	P	V
	*	5240	94.97	-	-	83.3	32.6	12.9	33.83	274	252	A	V
		5458.93	49.79	-24.21	74	38.13	32.65	13.19	34.18	274	252	P	V
		5410.06	39.6	-14.4	54	28.05	32.52	13.13	34.1	274	252	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	48.75	-19.45	68.2	31.42	37.46	19.01	39.14	-	-	P	H
		15540	53.28	-20.72	74	32.88	41.26	23.44	44.3	-	-	P	H
		15540	44.53	-9.47	54	24.13	41.26	23.44	44.3	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		10360	49.63	-18.57	68.2	32.3	37.46	19.01	39.14	-	-	P	V
		15540	53.81	-20.19	74	33.41	41.26	23.44	44.3	-	-	P	V
		15540	44.6	-9.4	54	24.2	41.26	23.44	44.3	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10440	48.96	-19.24	68.2	31.89	37.22	19.1	39.25	-	-	P	H
		15660	54.91	-19.09	74	34.66	41.22	23.55	44.52	-	-	P	H
		15660	44.98	-9.02	54	24.73	41.22	23.55	44.52	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11a CH 44 5220MHz													H
		10440	49.46	-18.74	68.2	32.39	37.22	19.1	39.25	-	-	P	V
		15660	54.94	-19.06	74	34.69	41.22	23.55	44.52	-	-	P	V
		15660	45.86	-8.14	54	25.61	41.22	23.55	44.52	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10480	48.95	-19.25	68.2	31.91	37.2	19.14	39.3	-	-	P	H
		15720	53.34	-20.66	74	32.99	41.38	23.6	44.63	-	-	P	H
		15720	46.46	-7.54	54	26.11	41.38	23.6	44.63	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11a CH 48 5240MHz													H
		10480	48.7	-19.5	68.2	31.66	37.2	19.14	39.3	-	-	P	V
		15720	55.12	-18.88	74	34.77	41.38	23.6	44.63	-	-	P	V
		15720	47.09	-6.91	54	26.74	41.38	23.6	44.63	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5085.02	51.31	-22.69	74	39.71	32.57	12.62	33.59	228	117	P	H
		5149.76	42.76	-11.24	54	31.2	32.5	12.75	33.69	228	117	A	H
	*	5180	100.25	-	-	88.62	32.56	12.81	33.74	228	117	P	H
	*	5180	93.18	-	-	81.55	32.56	12.81	33.74	228	117	A	H
802.11n													H
HT20													H
CH 36		5124.28	52.12	-21.88	74	40.52	32.55	12.7	33.65	295	259	P	V
5180MHz		5150	42.96	-11.04	54	31.4	32.5	12.75	33.69	295	259	A	V
	*	5180	101.68	-	-	90.05	32.56	12.81	33.74	295	259	P	V
	*	5180	94.73	-	-	83.1	32.56	12.81	33.74	295	259	A	V
													V
													V
		5040.82	51.58	-22.42	74	40.03	32.54	12.53	33.52	297	125	P	H
		5137.02	41.66	-12.34	54	30.08	32.53	12.72	33.67	297	125	A	H
	*	5220	101.92	-	-	90.24	32.6	12.88	33.8	297	125	P	H
	*	5220	94.68	-	-	83	32.6	12.88	33.8	297	125	A	H
802.11n		5415.73	48.77	-25.23	74	37.21	32.53	13.14	34.11	297	125	P	H
HT20		5455.96	39.47	-14.53	54	27.81	32.64	13.19	34.17	297	125	A	H
CH 44		5067.6	51.69	-22.31	74	40.13	32.54	12.59	33.57	305	320	P	V
5220MHz		5128.7	42.04	-11.96	54	30.45	32.54	12.71	33.66	305	320	A	V
	*	5220	101.24	-	-	89.56	32.6	12.88	33.8	305	320	P	V
	*	5220	94.37	-	-	82.69	32.6	12.88	33.8	305	320	A	V
		5405.47	49.05	-24.95	74	37.5	32.51	13.13	34.09	305	320	P	V
		5425.72	39.38	-14.62	54	27.8	32.55	13.15	34.12	305	320	A	V

		5138.58	51.21	-22.79	74	39.64	32.52	12.73	33.68	295	125	P	H
		5086.32	41.66	-12.34	54	30.06	32.57	12.62	33.59	295	125	A	H
	*	5240	101.03	-	-	89.36	32.6	12.9	33.83	295	125	P	H
	*	5240	93.79	-	-	82.12	32.6	12.9	33.83	295	125	A	H
802.11n		5425.45	48.58	-25.42	74	37	32.55	13.15	34.12	295	125	P	H
HT20		5453.26	39.51	-14.49	54	27.87	32.62	13.19	34.17	295	125	A	H
CH 48		5121.42	51.38	-22.62	74	39.78	32.56	12.69	33.65	281	256	P	V
5240MHz		5127.92	41.89	-12.11	54	30.3	32.54	12.71	33.66	281	256	A	V
	*	5240	101.56	-	-	89.89	32.6	12.9	33.83	281	256	P	V
	*	5240	94.63	-	-	82.96	32.6	12.9	33.83	281	256	A	V
		5457.04	49.28	-24.72	74	37.62	32.64	13.19	34.17	281	256	P	V
		5459.47	39.73	-14.27	54	28.06	32.66	13.19	34.18	281	256	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10360	49.47	-18.73	68.2	32.14	37.46	19.01	39.14	-	-	P	H
		15540	54.93	-19.07	74	34.53	41.26	23.44	44.3	-	-	P	H
		15540	46.79	-7.21	54	26.39	41.26	23.44	44.3	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 36		10360	48.94	-19.26	68.2	31.61	37.46	19.01	39.14	-	-	P	V
5180MHz		15540	55.82	-18.18	74	35.42	41.26	23.44	44.3	-	-	P	V
		15540	48.22	-5.78	54	27.82	41.26	23.44	44.3	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10440	49.05	-19.15	68.2	31.98	37.22	19.1	39.25	-	-	P	H
		15660	56.53	-17.47	74	36.28	41.22	23.55	44.52	-	-	P	H
		15660	45	-9	54	24.75	41.22	23.55	44.52	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 44		10440	50.57	-17.63	68.2	33.5	37.22	19.1	39.25	-	-	P	V
5220MHz		15660	54.09	-19.91	74	33.84	41.22	23.55	44.52	-	-	P	V
		15660	46	-8	54	25.75	41.22	23.55	44.52	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10480	48.6	-19.6	68.2	31.56	37.2	19.14	39.3	-	-	P	H
		15720	54.75	-19.25	74	34.4	41.38	23.6	44.63	-	-	P	H
		15720	46.14	-7.86	54	25.79	41.38	23.6	44.63	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 48		10480	49.59	-18.61	68.2	32.55	37.2	19.14	39.3	-	-	P	V
5240MHz		15720	54.3	-19.7	74	33.95	41.38	23.6	44.63	-	-	P	V
		15720	46.99	-7.01	54	26.64	41.38	23.6	44.63	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5147.94	56.03	-17.97	74	44.47	32.5	12.75	33.69	305	125	P	H
		5150.02	44.33	-105.67	150	32.77	32.5	12.75	33.69	305	125	A	H
	*	5190	97.41	-	-	85.76	32.58	12.83	33.76	305	125	P	H
	*	5190	90.33	-	-	78.68	32.58	12.83	33.76	305	125	A	H
		5419.51	49.23	-24.77	74	37.66	32.54	13.14	34.11	305	125	P	H
		5457.31	40.02	-13.98	54	28.36	32.64	13.19	34.17	305	125	A	H
		5149.5	59.71	-14.29	74	48.15	32.5	12.75	33.69	307	265	P	V
		5149.24	45.1	-8.9	54	33.54	32.5	12.75	33.69	307	265	A	V
	*	5190	98.41	-	-	86.76	32.58	12.83	33.76	307	265	P	V
	*	5190	91.5	-	-	79.85	32.58	12.83	33.76	307	265	A	V
		5437.06	49.23	-24.77	74	37.63	32.57	13.17	34.14	307	265	P	V
		5452.72	39.9	-14.1	54	28.26	32.62	13.19	34.17	307	265	A	V
802.11n HT40 CH 46 5230MHz		5121.68	51.58	-22.42	74	39.98	32.56	12.69	33.65	288	152	P	H
		5119.6	42.12	-11.88	54	30.52	32.56	12.69	33.65	288	152	A	H
	*	5230	98.9	-	-	87.23	32.6	12.89	33.82	288	152	P	H
	*	5230	91.85	-	-	80.18	32.6	12.89	33.82	288	152	A	H
		5446.78	48.78	-25.22	74	37.17	32.59	13.18	34.16	288	152	P	H
		5447.05	40.08	-13.92	54	28.47	32.59	13.18	34.16	288	152	A	H
		5128.44	51.85	-22.15	74	40.26	32.54	12.71	33.66	303	295	P	V
		5139.1	42.37	-11.63	54	30.8	32.52	12.73	33.68	303	295	A	V
	*	5230	98.37	-	-	86.7	32.6	12.89	33.82	303	295	P	V
	*	5230	91.47	-	-	79.8	32.6	12.89	33.82	303	295	A	V
		5352.28	49.13	-24.87	74	37.58	32.5	13.06	34.01	303	295	P	V
		5459.2	39.94	-14.06	54	28.27	32.66	13.19	34.18	303	295	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10380	49.86	-18.34	68.2	32.62	37.38	19.03	39.17	-	-	P	H
		15570	53.26	-20.74	74	32.94	41.2	23.47	44.35	-	-	P	H
		15570	44.07	-9.93	54	23.75	41.2	23.47	44.35	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT40													H
CH 38		10380	48.72	-19.48	68.2	31.48	37.38	19.03	39.17	-	-	P	V
5190MHz		15570	53.04	-20.96	74	32.72	41.2	23.47	44.35	-	-	P	V
		15570	44.12	-9.88	54	23.8	41.2	23.47	44.35	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10460	49.66	-18.54	68.2	32.62	37.2	19.12	39.28	-	-	P	H
		15690	53.3	-20.7	74	33.03	41.28	23.57	44.58	-	-	P	H
		15690	45.36	-8.64	54	25.09	41.28	23.57	44.58	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT40													H
CH 46		10460	48.02	-20.18	68.2	30.98	37.2	19.12	39.28	-	-	P	V
5230MHz		15690	53.58	-20.42	74	33.31	41.28	23.57	44.58	-	-	P	V
		15690	45.89	-8.11	54	25.62	41.28	23.57	44.58	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5148.92	61.12	-12.88	74	49.56	32.5	12.75	33.69	191	118	P	H
		5146.88	50.8	-3.2	54	39.24	32.51	12.74	33.69	191	118	A	H
	*	5210	94.91	-	-	83.24	32.6	12.86	33.79	191	118	P	H
	*	5210	88.15	-	-	76.48	32.6	12.86	33.79	191	118	A	H
		5383.82	48.72	-25.28	74	37.18	32.5	13.1	34.06	191	118	P	H
		5457.66	40.32	-13.68	54	28.65	32.65	13.19	34.17	191	118	A	H
		5148.24	59.31	-14.69	74	47.75	32.5	12.75	33.69	299	269	P	V
		5149.6	50.87	-3.13	54	39.31	32.5	12.75	33.69	299	269	A	V
	*	5210	97.12	-	-	85.45	32.6	12.86	33.79	299	269	P	V
	*	5210	88.64	-	-	76.97	32.6	12.86	33.79	299	269	A	V
		5430.62	49.91	-24.09	74	38.32	32.56	13.16	34.13	299	269	P	V
		5436.34	40.86	-13.14	54	29.26	32.57	13.17	34.14	299	269	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10420	48.81	-19.39	68.2	31.7	37.26	19.07	39.22	-	-	P	H
		15630	52.98	-21.02	74	32.72	41.2	23.52	44.46	-	-	P	H
		15630	44.91	-9.09	54	24.65	41.2	23.52	44.46	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11ac VHT80 CH 42 5210MHz													H
		10420	48	-20.2	68.2	30.89	37.26	19.07	39.22	-	-	P	V
		15630	53.57	-20.43	74	33.31	41.2	23.52	44.46	-	-	P	V
		15630	45.38	-8.62	54	25.12	41.2	23.52	44.46	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		5006.12	51.13	-22.87	74	39.46	32.68	12.46	33.47	305	152	P	H
		5144.84	41.63	-12.37	54	30.07	32.51	12.74	33.69	305	152	A	H
	*	5260	100.8	-	-	89.16	32.58	12.93	33.87	305	152	P	H
	*	5260	94.01	-	-	82.37	32.58	12.93	33.87	305	152	A	H
		5358.72	49.51	-24.49	74	37.97	32.5	13.06	34.02	305	152	P	H
		5449.92	39.48	-14.52	54	27.86	32.6	13.18	34.16	305	152	A	H
		5109.48	50.77	-23.23	74	39.15	32.58	12.67	33.63	300	278	P	V
		5126.48	41.8	-12.2	54	30.21	32.55	12.7	33.66	300	278	A	V
	*	5260	100.64	-	-	89	32.58	12.93	33.87	300	278	P	V
	*	5260	93.91	-	-	82.27	32.58	12.93	33.87	300	278	A	V
		5445.12	48.83	-25.17	74	37.21	32.59	13.18	34.15	300	278	P	V
		5426.64	39.52	-14.48	54	27.95	32.55	13.15	34.13	300	278	A	V
802.11a CH 60 5300MHz		5130.56	51.13	-22.87	74	39.54	32.54	12.71	33.66	299	126	P	H
		5138.72	41.59	-12.41	54	30.02	32.52	12.73	33.68	299	126	A	H
	*	5300	100.85	-	-	89.29	32.5	12.99	33.93	299	126	P	H
	*	5300	93.88	-	-	82.32	32.5	12.99	33.93	299	126	A	H
		5408.4	49.32	-24.68	74	37.77	32.52	13.13	34.1	299	126	P	H
		5459.04	39.68	-14.32	54	28.02	32.65	13.19	34.18	299	126	A	H
		5055.76	51.45	-22.55	74	39.93	32.51	12.56	33.55	253	250	P	V
		5132.94	41.71	-12.29	54	30.13	32.53	12.72	33.67	253	250	A	V
	*	5300	102.09	-	-	90.52	32.51	12.98	33.92	253	250	P	V
	*	5300	94.93	-	-	83.36	32.51	12.98	33.92	253	250	A	V
		5382.48	49.23	-24.77	74	37.69	32.5	13.1	34.06	253	250	P	V
		5352.96	40.02	-13.98	54	28.47	32.5	13.06	34.01	253	250	A	V

802.11a CH 64 5320MHz	*	5320	101.5	-	-	89.95	32.5	13.01	33.96	295	70	P	H
	*	5320	94.41	-	-	82.86	32.5	13.01	33.96	295	70	A	H
		5365.28	50.16	-23.84	74	38.62	32.5	13.07	34.03	295	70	P	H
		5350.24	40.86	-13.14	54	29.32	32.5	13.05	34.01	295	70	A	H
													H
													H
	*	5320	101.56	-	-	90.01	32.5	13.01	33.96	307	278	P	V
	*	5320	94.45	-	-	82.9	32.5	13.01	33.96	307	278	A	V
		5354.08	50.29	-23.71	74	38.74	32.5	13.06	34.01	307	278	P	V
		5350.24	40.83	-13.17	54	29.29	32.5	13.05	34.01	307	278	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	48.5	-19.7	68.2	31.43	37.24	19.17	39.34	-	-	P	H
		15780	54.24	-19.76	74	33.84	41.5	23.65	44.75	-	-	P	H
		15780	46.47	-7.53	54	26.07	41.5	23.65	44.75	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		10520	48.49	-19.71	68.2	31.42	37.24	19.17	39.34	-	-	P	V
		15780	54.38	-19.62	74	33.98	41.5	23.65	44.75	-	-	P	V
		15780	47.33	-6.67	54	26.93	41.5	23.65	44.75	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10600	50.32	-23.68	74	33.06	37.4	19.25	39.39	-	-	P	H
		10600	40.68	-13.32	54	23.42	37.4	19.25	39.39	-	-	A	H
		15900	54.7	-19.3	74	34.62	41.3	23.75	44.97	-	-	P	H
		15900	45.49	-8.51	54	25.41	41.3	23.75	44.97	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11a CH 60 5300MHz													H
		10600	49.64	-24.36	74	32.38	37.4	19.25	39.39	-	-	P	V
		10600	40.54	-13.46	54	23.28	37.4	19.25	39.39	-	-	A	V
		15900	54.96	-19.04	74	34.88	41.3	23.75	44.97	-	-	P	V
		15900	43.36	-10.64	54	23.28	41.3	23.75	44.97	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10640	50.08	-23.92	74	32.73	37.48	19.29	39.42	-	-	P	H
		10640	40.53	-13.47	54	23.18	37.48	19.29	39.42	-	-	A	H
		15960	53.94	-20.06	74	33.99	41.22	23.81	45.08	-	-	P	H
		15960	45.51	-8.49	54	25.56	41.22	23.81	45.08	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11a CH 64 5320MHz													H
		10640	50.57	-23.43	74	33.22	37.48	19.29	39.42	-	-	P	V
		10640	40.64	-13.36	54	23.29	37.48	19.29	39.42	-	-	A	V
		15960	55.86	-18.14	74	35.91	41.22	23.81	45.08	-	-	P	V
		15960	46.4	-7.6	54	26.45	41.22	23.81	45.08	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		5149.26	50.85	-23.15	74	39.29	32.5	12.75	33.69	302	153	P	H
		5134.3	41.74	-12.26	54	30.16	32.53	12.72	33.67	302	153	A	H
	*	5260	101.08	-	-	89.44	32.58	12.93	33.87	302	153	P	H
	*	5260	94.31	-	-	82.67	32.58	12.93	33.87	302	153	A	H
		5362.8	48.75	-25.25	74	37.21	32.5	13.07	34.03	302	153	P	H
		5457.12	39.59	-14.41	54	27.93	32.64	13.19	34.17	302	153	A	H
		5105.74	51.81	-22.19	74	40.18	32.59	12.66	33.62	299	278	P	V
		5146.54	42.11	-11.89	54	30.55	32.51	12.74	33.69	299	278	A	V
	*	5260	100.88	-	-	89.24	32.58	12.93	33.87	299	278	P	V
	*	5260	94.12	-	-	82.48	32.58	12.93	33.87	299	278	A	V
		5362.8	50.24	-23.76	74	38.7	32.5	13.07	34.03	299	278	P	V
		5457.84	39.82	-14.18	54	28.15	32.65	13.19	34.17	299	278	A	V
802.11n HT20 CH 60 5300MHz		5058.82	50.96	-23.04	74	39.42	32.52	12.57	33.55	248	246	P	V
		5100.3	41.69	-12.31	54	30.06	32.6	12.65	33.62	248	246	A	V
	*	5300	101.43	-	-	89.87	32.5	12.99	33.93	248	246	P	V
	*	5300	94.32	-	-	82.76	32.5	12.99	33.93	248	246	A	V
		5437.68	49.16	-24.84	74	37.55	32.58	13.17	34.14	248	246	P	V
		5350.32	39.96	-14.04	54	28.42	32.5	13.05	34.01	248	246	A	V
		5061.88	51.05	-22.95	74	39.52	32.52	12.57	33.56	294	121	P	H
		5132.6	41.68	-12.32	54	30.1	32.53	12.72	33.67	294	121	A	H
	*	5300	101.42	-	-	89.85	32.51	12.98	33.92	294	121	P	H
	*	5300	94.71	-	-	83.14	32.51	12.98	33.92	294	121	A	H
		5413.2	49.08	-24.92	74	37.51	32.53	13.14	34.1	294	121	P	H
		5352.24	40.07	-13.93	54	28.52	32.5	13.06	34.01	294	121	A	H

	*	5320	101.37	-	-	89.82	32.5	13.01	33.96	290	71	P	H
	*	5320	94.1	-	-	82.55	32.5	13.01	33.96	290	71	A	H
		5351.2	52.52	-21.48	74	40.98	32.5	13.05	34.01	290	71	P	H
		5350.4	41.44	-12.56	54	29.9	32.5	13.05	34.01	290	71	A	H
802.11n													H
HT20													H
CH 64	*	5320	100.81	-	-	89.26	32.5	13.01	33.96	305	279	P	V
5320MHz	*	5320	94.01	-	-	82.46	32.5	13.01	33.96	305	279	A	V
		5350.24	52.03	-21.97	74	40.49	32.5	13.05	34.01	305	279	P	V
		5350.24	41.34	-12.66	54	29.8	32.5	13.05	34.01	305	279	A	V
													V
													V

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.

Band 2 5250~5350MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10520	49.33	-18.87	68.2	32.26	37.24	19.17	39.34	-	-	P	H
		15780	54.47	-19.53	74	34.07	41.5	23.65	44.75	-	-	P	H
		15780	44.02	-9.98	54	23.62	41.5	23.65	44.75	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 52		10520	48.86	-19.34	68.2	31.79	37.24	19.17	39.34	-	-	P	V
5260MHz		15780	54.49	-19.51	74	34.09	41.5	23.65	44.75	-	-	P	V
		15780	44.18	-9.82	54	23.78	41.5	23.65	44.75	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10600	50.2	-23.8	74	32.94	37.4	19.25	39.39	-	-	P	H
		10600	40.5	-13.5	54	23.24	37.4	19.25	39.39	-	-	A	H
		15900	54.7	-19.3	74	34.62	41.3	23.75	44.97	-	-	P	H
		15900	45.15	-8.85	54	25.07	41.3	23.75	44.97	-	-	A	H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 60		10600	50.79	-23.21	74	33.53	37.4	19.25	39.39	-	-	P	V
5300MHz		10600	40.59	-13.41	54	23.33	37.4	19.25	39.39	-	-	A	V
		15900	53.59	-20.41	74	33.51	41.3	23.75	44.97	-	-	P	V
		15900	45.54	-8.46	54	25.46	41.3	23.75	44.97	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10640	51.53	-22.47	74	34.18	37.48	19.29	39.42	-	-	P	H
		10640	40.24	-13.76	54	22.89	37.48	19.29	39.42	-	-	A	H
		15960	55.15	-18.85	74	35.2	41.22	23.81	45.08	-	-	P	H
		15960	44	-10	54	24.05	41.22	23.81	45.08	-	-	A	H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 64		10640	51.47	-22.53	74	34.12	37.48	19.29	39.42	-	-	P	V
5320MHz		10640	40.15	-13.85	54	22.8	37.48	19.29	39.42	-	-	A	V
		15960	55.04	-18.96	74	35.09	41.22	23.81	45.08	-	-	P	V
		15960	44.1	-9.9	54	24.15	41.22	23.81	45.08	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		5116.28	51.48	-22.52	74	39.87	32.57	12.68	33.64	294	119	P	H
		5110.84	42.05	-11.95	54	30.43	32.58	12.67	33.63	294	119	A	H
	*	5270	97.84	-	-	86.22	32.56	12.94	33.88	294	119	P	H
	*	5270	91.14	-	-	79.52	32.56	12.94	33.88	294	119	A	H
		5436.72	49.1	-24.9	74	37.5	32.57	13.17	34.14	294	119	P	H
		5353.68	39.88	-14.12	54	28.33	32.5	13.06	34.01	294	119	A	H
		5021.42	51.1	-22.9	74	39.49	32.61	12.49	33.49	282	267	P	V
		5099.28	42.22	-11.78	54	30.58	32.6	12.65	33.61	282	267	A	V
	*	5270	98.75	-	-	87.11	32.57	12.94	33.87	282	267	P	V
	*	5270	91.61	-	-	79.97	32.57	12.94	33.87	282	267	A	V
		5373.12	49.27	-24.73	74	37.73	32.5	13.08	34.04	282	267	P	V
		5352.72	40.07	-13.93	54	28.52	32.5	13.06	34.01	282	267	A	V
802.11n HT40 CH 62 5310MHz		5017	50.38	-23.62	74	38.76	32.63	12.48	33.49	289	117	P	H
		5133.96	41.91	-12.09	54	30.33	32.53	12.72	33.67	289	117	A	H
	*	5310	97.82	-	-	86.26	32.5	13	33.94	289	117	P	H
	*	5310	91.59	-	-	80.03	32.5	13	33.94	289	117	A	H
		5350.08	56.24	-17.76	74	44.7	32.5	13.05	34.01	289	117	P	H
		5350.08	43.98	-10.02	54	32.44	32.5	13.05	34.01	289	117	A	H
		5113.22	50.94	-23.06	74	39.33	32.57	12.68	33.64	294	275	P	V
		5111.52	42.19	-11.81	54	30.57	32.58	12.67	33.63	294	275	A	V
	*	5310	99.79	-	-	88.23	32.5	13	33.94	294	275	P	V
	*	5310	92.97	-	-	81.41	32.5	13	33.94	294	275	A	V
		5359.2	54.07	-19.93	74	42.53	32.5	13.06	34.02	294	275	P	V
		5350.32	45	-9	54	33.46	32.5	13.05	34.01	294	275	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10540	49.32	-18.88	68.2	32.2	37.28	19.19	39.35	-	-	P	H
		15810	55.49	-18.51	74	35.13	41.48	23.68	44.8	-	-	P	H
		15810	44.8	-9.2	54	24.44	41.48	23.68	44.8	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT40													H
CH 54		10540	48.96	-19.24	68.2	31.84	37.28	19.19	39.35	-	-	P	V
5270MHz		15810	55.88	-18.12	74	35.52	41.48	23.68	44.8	-	-	P	V
		15810	44.68	-9.32	54	24.32	41.48	23.68	44.8	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10620	51.69	-22.31	74	34.38	37.44	19.27	39.4	-	-	P	H
		10620	40.38	-13.62	54	23.07	37.44	19.27	39.4	-	-	A	H
		15930	55.36	-18.64	74	35.37	41.24	23.78	45.03	-	-	P	H
		15930	44.33	-9.67	54	24.34	41.24	23.78	45.03	-	-	A	H
													H
													H
													H
													H
													H
													H
802.11n													H
HT40													H
CH 62		10620	51.76	-22.24	74	34.45	37.44	19.27	39.4	-	-	P	V
5310MHz		10620	40.44	-13.56	54	23.13	37.44	19.27	39.4	-	-	A	V
		15930	55.44	-18.56	74	35.45	41.24	23.78	45.03	-	-	P	V
		15930	44.39	-9.61	54	24.4	41.24	23.78	45.03	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5106.8	51.72	-22.28	74	40.1	32.59	12.66	33.63	328	126	P	H
		5099.6	42.45	-11.55	54	30.82	32.6	12.65	33.62	328	126	A	H
	*	5290	93.91	-	-	82.33	32.52	12.97	33.91	328	126	P	H
	*	5290	86.74	-	-	75.16	32.52	12.97	33.91	328	126	A	H
		5352.72	56.73	-17.27	74	45.18	32.5	13.06	34.01	328	126	P	H
		5350.32	47.5	-6.5	54	35.96	32.5	13.05	34.01	328	126	A	H
		5127.5	51.3	-22.7	74	39.72	32.54	12.7	33.66	284	220	P	V
		5119.7	42.59	-11.41	54	30.99	32.56	12.69	33.65	284	220	A	V
	*	5290	95.18	-	-	83.6	32.52	12.97	33.91	284	220	P	V
	*	5290	87.9	-	-	76.32	32.52	12.97	33.91	284	220	A	V
		5351.04	57.14	-16.86	74	45.6	32.5	13.05	34.01	284	220	P	V
		5350.32	49.14	-4.86	54	37.6	32.5	13.05	34.01	284	220	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10580	49.1	-19.1	68.2	31.89	37.36	19.23	39.38	-	-	P	H
		15870	55.36	-18.64	74	35.19	41.36	23.73	44.92	-	-	P	H
		15870	45.44	-8.56	54	25.27	41.36	23.73	44.92	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11ac VHT80 CH 58 5290MHz													H
		10580	49.21	-18.99	68.2	32	37.36	19.23	39.38	-	-	P	V
		15870	55.56	-18.44	74	35.39	41.36	23.73	44.92	-	-	P	V
		15870	45.66	-8.34	54	25.49	41.36	23.73	44.92	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		5452.08	49.77	-24.23	74	38.14	32.61	13.19	34.17	280	70	P	H
		5470	50.71	-17.49	68.2	38.97	32.72	13.21	34.19	280	70	P	H
		5459.76	40.59	-13.41	54	28.92	32.66	13.19	34.18	280	70	A	H
	*	5500	103.4	-	-	91.5	32.9	13.24	34.24	280	70	P	H
	*	5500	96	-	-	84.1	32.9	13.24	34.24	280	70	A	H
													H
		5449.68	49.56	-24.44	74	37.94	32.6	13.18	34.16	100	241	P	V
		5465.2	50.36	-17.84	68.2	38.66	32.69	13.2	34.19	100	241	P	V
		5458.16	40.49	-13.51	54	28.82	32.65	13.19	34.17	100	241	A	V
	*	5500	104	-	-	92.1	32.9	13.24	34.24	100	241	P	V
	*	5500	96.69	-	-	84.79	32.9	13.24	34.24	100	241	A	V
													V
802.11a CH 116 5580MHz		5355.04	48.83	-25.17	74	37.28	32.5	13.06	34.01	113	72	P	H
		5468.08	49.99	-18.21	68.2	38.26	32.71	13.21	34.19	113	72	P	H
		5453.44	39.72	-14.28	54	28.08	32.62	13.19	34.17	113	72	A	H
	*	5580	104.64	-	-	92.39	33.2	13.35	34.3	113	72	P	H
	*	5580	97.74	-	-	85.49	33.2	13.35	34.3	113	72	A	H
		5758.07	50.77	-17.43	68.2	37.6	34	13.61	34.44	113	72	P	H
		5412.4	49.41	-24.59	74	37.85	32.52	13.14	34.1	137	261	P	V
		5462.32	49.38	-18.82	68.2	37.69	32.67	13.2	34.18	137	261	P	V
		5455.84	39.81	-14.19	54	28.15	32.64	13.19	34.17	137	261	A	V
	*	5580	104.32	-	-	92.07	33.2	13.35	34.3	137	261	P	V
	*	5580	97.14	-	-	84.89	33.2	13.35	34.3	137	261	A	V
		5739.17	50.9	-17.3	68.2	37.8	33.94	13.58	34.42	137	261	P	V

802.11a CH 140 5700MHz	*	5700	104.79	-	-	91.96	33.7	13.52	34.39	100	67	P	H
	*	5700	97.5	-	-	84.67	33.7	13.52	34.39	100	67	A	H
		5725.72	53.41	-14.79	68.2	40.41	33.85	13.56	34.41	100	67	P	H
													H
													H
													H
	*	5700	103.57	-	-	90.74	33.7	13.52	34.39	216	259	P	V
	*	5700	96.52	-	-	83.69	33.7	13.52	34.39	216	259	A	V
		5728.12	54.41	-13.79	68.2	41.39	33.87	13.56	34.41	216	259	P	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	51.37	-22.63	74	33.45	37.9	19.66	39.64	-	-	P	H
		11000	40.3	-13.7	54	22.38	37.9	19.66	39.64	-	-	A	H
		16500	54	-14.2	68.2	34.27	41.2	24.19	45.66	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		11000	51.62	-22.38	74	33.7	37.9	19.66	39.64	-	-	P	V
		11000	40.28	-13.72	54	22.36	37.9	19.66	39.64	-	-	A	V
		16500	54.06	-14.14	68.2	34.33	41.2	24.19	45.66	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11160	50.54	-23.46	74	32.14	38.34	19.81	39.75	-	-	P	H
		11160	41.59	-12.41	54	23.19	38.34	19.81	39.75	-	-	A	H
		16740	55.19	-13.01	68.2	35.69	40.98	24.35	45.83	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11a CH 116 5580MHz													H
		11160	51.69	-22.31	74	33.29	38.34	19.81	39.75	-	-	P	V
		11160	41.47	-12.53	54	23.07	38.34	19.81	39.75	-	-	A	V
		16740	53.28	-14.92	68.2	33.78	40.98	24.35	45.83	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11400	54.02	-19.98	74	34.89	39	20.04	39.91	-	-	P	H
		11400	41.31	-12.69	54	22.18	39	20.04	39.91	-	-	A	H
		17100	54.07	-14.13	68.2	34.89	40.7	24.61	46.13	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11a CH 140 5700MHz													H
		11400	52.04	-21.96	74	32.91	39	20.04	39.91	-	-	P	V
		11400	41.33	-12.67	54	22.2	39	20.04	39.91	-	-	A	V
		17100	53.65	-14.55	68.2	34.47	40.7	24.61	46.13	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												

Band 3 - 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5419.76	50.45	-23.55	74	38.88	32.54	13.14	34.11	283	70	P	H
		5469.36	51.21	-16.99	68.2	39.47	32.72	13.21	34.19	283	70	P	H
		5459.92	41.11	-12.89	54	29.44	32.66	13.19	34.18	283	70	A	H
	*	5500	103.4	-	-	91.5	32.9	13.24	34.24	283	70	P	H
802.11n	*	5500	96.07	-	-	84.17	32.9	13.24	34.24	283	70	A	H
HT20													H
CH 100		5440.72	51.4	-22.6	74	39.8	32.58	13.17	34.15	100	241	P	V
5500MHz		5469.04	51.69	-16.51	68.2	39.96	32.71	13.21	34.19	100	241	P	V
		5459.6	41.19	-12.81	54	29.52	32.66	13.19	34.18	100	241	A	V
	*	5500	104.17	-	-	92.27	32.9	13.24	34.24	100	241	P	V
	*	5500	96.85	-	-	84.95	32.9	13.24	34.24	100	241	A	V
													V
		5452.96	48.73	-25.27	74	37.09	32.62	13.19	34.17	100	64	P	H
		5466.88	48.85	-19.35	68.2	37.14	32.7	13.2	34.19	100	64	P	H
		5456.56	40.07	-13.93	54	28.41	32.64	13.19	34.17	100	64	A	H
	*	5580	106.33	-	-	94.08	33.2	13.35	34.3	100	64	P	H
802.11n	*	5580	99.08	-	-	86.83	33.2	13.35	34.3	100	64	A	H
HT20		5750.195	51.22	-16.98	68.2	38.05	34	13.6	34.43	100	64	P	H
CH 116		5453.2	48.74	-25.26	74	37.1	32.62	13.19	34.17	104	220	P	V
5580MHz		5464	48.67	-19.53	68.2	36.97	32.68	13.2	34.18	104	220	P	V
		5456.56	39.73	-14.27	54	28.07	32.64	13.19	34.17	104	220	A	V
	*	5580	104.17	-	-	91.92	33.2	13.35	34.3	104	220	P	V
	*	5580	97.2	-	-	84.95	33.2	13.35	34.3	104	220	A	V
		5729.72	51.14	-17.06	68.2	38.11	33.88	13.56	34.41	104	220	P	V

	*	5700	105.75	-	-	92.92	33.7	13.52	34.39	329	60	P	H
	*	5700	98.5	-	-	85.67	33.7	13.52	34.39	329	60	A	H
		5725.4	62.2	-6	68.2	49.2	33.85	13.56	34.41	329	60	P	H
													H
802.11n													H
HT20													H
CH 140	*	5700	103.32	-	-	90.49	33.7	13.52	34.39	215	259	P	V
5700MHz	*	5700	96.22	-	-	83.39	33.7	13.52	34.39	215	259	A	V
		5725.08	60.73	-7.47	68.2	47.73	33.85	13.56	34.41	215	259	P	V
													V
													V
													V

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.

Band 3 - 5470~5725MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11000	51.59	-22.41	74	33.67	37.9	19.66	39.64	-	-	P	H
		11000	40.37	-13.63	54	22.45	37.9	19.66	39.64	-	-	A	H
		16500	54.19	-14.01	68.2	34.46	41.2	24.19	45.66	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 100		11000	51.91	-22.09	74	33.99	37.9	19.66	39.64	-	-	P	V
5500MHz		11000	40.55	-13.45	54	22.63	37.9	19.66	39.64	-	-	A	V
		16500	53.56	-14.64	68.2	33.83	41.2	24.19	45.66	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11160	50.14	-23.86	74	31.74	38.34	19.81	39.75	-	-	P	H
		11160	41.54	-12.46	54	23.14	38.34	19.81	39.75	-	-	A	H
		16740	54.21	-13.99	68.2	34.71	40.98	24.35	45.83	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 116		11160	51.06	-22.94	74	32.66	38.34	19.81	39.75	-	-	P	V
5580MHz		11160	41.46	-12.54	54	23.06	38.34	19.81	39.75	-	-	A	V
		16740	53.88	-14.32	68.2	34.38	40.98	24.35	45.83	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11400	51.21	-22.79	74	32.62	39	19.5	39.91	-	-	P	H
		11400	41.35	-12.65	54	22.76	39	19.5	39.91	-	-	A	H
		17100	52.67	-15.53	68.2	34.12	40.7	23.98	46.13	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT20													H
CH 140		11400	51.12	-22.88	74	32.53	39	19.5	39.91	-	-	P	V
5700MHz		11400	41.57	-12.43	54	22.98	39	19.5	39.91	-	-	A	V
		17100	52.28	-15.92	68.2	33.73	40.7	23.98	46.13	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 3 - 5470~5725MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5459.2	50.85	-23.15	74	39.18	32.66	13.19	34.18	284	71	P	H
		5470	52.22	-15.98	68.2	40.48	32.72	13.21	34.19	284	71	P	H
		5458.96	42.5	-11.5	54	30.84	32.65	13.19	34.18	284	71	A	H
	*	5510	100.93	-	-	88.96	32.96	13.26	34.25	284	71	P	H
	*	5510	93.47	-	-	81.5	32.96	13.26	34.25	284	71	A	H
		5754.92	49.93	-18.27	68.2	36.76	34	13.6	34.43	284	71	P	H
		5439.76	51.47	-22.53	74	39.87	32.58	13.17	34.15	237	273	P	V
		5469.52	52.02	-16.18	68.2	40.28	32.72	13.21	34.19	237	273	P	V
		5459.44	42.63	-11.37	54	30.96	32.66	13.19	34.18	237	273	A	V
	*	5510	99.45	-	-	87.48	32.96	13.26	34.25	237	273	P	V
	*	5510	93.25	-	-	81.28	32.96	13.26	34.25	237	273	A	V
		5728.775	50.22	-17.98	68.2	37.2	33.87	13.56	34.41	237	273	P	V
802.11n HT40 CH 110 5550MHz		5445.28	49.2	-24.8	74	37.58	32.59	13.18	34.15	100	69	P	H
		5467.6	49.11	-19.09	68.2	37.39	32.71	13.2	34.19	100	69	P	H
		5457.04	40.66	-13.34	54	29	32.64	13.19	34.17	100	69	A	H
	*	5550	102.11	-	-	89.88	33.2	13.31	34.28	100	69	P	H
	*	5550	94.91	-	-	82.68	33.2	13.31	34.28	100	69	A	H
		5745.155	51.2	-17	68.2	38.07	33.97	13.59	34.43	100	69	P	H
		5358.16	49.3	-24.7	74	37.76	32.5	13.06	34.02	100	258	P	V
		5466.16	49.17	-19.03	68.2	37.46	32.7	13.2	34.19	100	258	P	V
		5459.68	40.68	-13.32	54	29.01	32.66	13.19	34.18	100	258	A	V
	*	5550	101.1	-	-	88.87	33.2	13.31	34.28	100	258	P	V
	*	5550	93.85	-	-	81.62	33.2	13.31	34.28	100	258	A	V
		5734.76	51.48	-16.72	68.2	38.42	33.91	13.57	34.42	100	258	P	V

		5446.25	49.27	-24.73	74	37.66	32.59	13.18	34.16	341	64	P	H
		5460.6	48.1	-20.1	68.2	36.42	32.66	13.2	34.18	341	64	P	H
		5455.7	40	-14	54	28.35	32.63	13.19	34.17	341	64	A	H
	*	5670	102.54	-	-	89.85	33.58	13.48	34.37	341	64	P	H
802.11n	*	5670	95.63	-	-	82.94	33.58	13.48	34.37	341	64	A	H
HT40		5728.075	51.47	-16.73	68.2	38.45	33.87	13.56	34.41	341	64	P	H
CH 134		5456.05	48.28	-25.72	74	36.62	32.64	13.19	34.17	287	269	P	V
5670MHz		5469.7	48.53	-19.67	68.2	36.79	32.72	13.21	34.19	287	269	P	V
		5456.05	39.89	-14.11	54	28.23	32.64	13.19	34.17	287	269	A	V
	*	5670	97.92	-	-	85.23	33.58	13.48	34.37	287	269	P	V
	*	5670	92.49	-	-	79.8	33.58	13.48	34.37	287	269	A	V
		5725.8	51.92	-16.28	68.2	38.92	33.85	13.56	34.41	287	269	P	V

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.

Band 3 - 5470~5725MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11020	50.49	-23.51	74	33	37.98	19.16	39.65	-	-	P	H
		11020	40.46	-13.54	54	22.97	37.98	19.16	39.65	-	-	A	H
		16530	52.81	-15.39	68.2	33.69	41.2	23.6	45.68	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT40													H
CH 102		11020	49.6	-24.4	74	32.11	37.98	19.16	39.65	-	-	P	V
5510MHz		11020	40.59	-13.41	54	23.1	37.98	19.16	39.65	-	-	A	V
		16530	53.1	-15.1	68.2	33.98	41.2	23.6	45.68	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11100	50.24	-23.76	74	32.52	38.2	19.23	39.71	-	-	P	H
		11100	40.76	-13.24	54	23.04	38.2	19.23	39.71	-	-	A	H
		16650	52.48	-15.72	68.2	33.67	40.9	23.68	45.77	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT40													H
CH 110		11100	49.99	-24.01	74	32.27	38.2	19.23	39.71	-	-	P	V
5550MHz		11100	40.67	-13.33	54	22.95	38.2	19.23	39.71	-	-	A	V
		16650	52.61	-15.59	68.2	33.8	40.9	23.68	45.77	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11340	51.02	-22.98	74	32.57	38.88	19.44	39.87	-	-	P	H
		11340	41.17	-12.83	54	22.72	38.88	19.44	39.87	-	-	A	H
		17010	52.1	-16.1	68.2	33.34	40.88	23.91	46.03	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
802.11n													H
HT40													H
CH 134		11340	50.96	-23.04	74	32.51	38.88	19.44	39.87	-	-	P	V
5670MHz		11340	41.15	-12.85	54	22.7	38.88	19.44	39.87	-	-	A	V
		17010	52.11	-16.09	68.2	33.35	40.88	23.91	46.03	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5457.1	51.55	-22.45	74	39.89	32.64	13.19	34.17	386	67	P	H
		5469.35	54.04	-14.16	68.2	42.3	32.72	13.21	34.19	386	67	P	H
		5457.8	44.27	-9.73	54	32.6	32.65	13.19	34.17	386	67	A	H
	*	5530	97.65	-	-	85.55	33.08	13.28	34.26	386	67	P	H
	*	5530	90.43	-	-	78.33	33.08	13.28	34.26	386	67	A	H
		5757.755	51.23	-16.97	68.2	38.06	34	13.61	34.44	386	67	P	H
		5457.45	52.29	-21.71	74	40.63	32.64	13.19	34.17	100	250	P	V
		5469	53.17	-15.03	68.2	41.44	32.71	13.21	34.19	100	250	P	V
		5457.45	44.72	-9.28	54	33.06	32.64	13.19	34.17	100	250	A	V
	*	5530	98.47	-	-	86.37	33.08	13.28	34.26	100	250	P	V
	*	5530	91.05	-	-	78.95	33.08	13.28	34.26	100	250	A	V
		5752.4	50.81	-17.39	68.2	37.64	34	13.6	34.43	100	250	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		11060	50.16	-23.84	74	32.53	38.12	19.19	39.68	-	-	P	H
		11060	40.75	-13.25	54	23.12	38.12	19.19	39.68	-	-	A	H
		16590	52.68	-15.52	68.2	33.64	41.12	23.64	45.72	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11ac													H
VHT80													H
CH 106		11060	50.29	-23.71	74	32.66	38.12	19.19	39.68	-	-	P	V
5530MHz		11060	40.59	-13.41	54	22.96	38.12	19.19	39.68	-	-	A	V
		16590	53.15	-15.05	68.2	34.11	41.12	23.64	45.72	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Emission above 18GHz

5GHz WIFI 802.11ac VHT80 (SHF@ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		22998.24	27	-47	74	30.53	38.7	18.47	60.7	-	-	P	H
		35100	41.47	-26.73	68.2	35.04	41.8	25.65	61.02	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
5GHz													H
802.11ac													H
VHT80		22998.24	28.01	-45.99	74	31.54	38.7	18.47	60.7	-	-	P	V
SHF		35100	42.43	-25.77	68.2	36	41.8	25.65	61.02	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		87.51	31.85	-8.15	40	48.25	14.65	1.67	32.72	-	-	P	H
		98.31	36.32	-7.18	43.5	51.39	15.87	1.78	32.72	-	-	P	H
		182.28	31.83	-11.67	43.5	47.17	14.86	2.47	32.67	-	-	P	H
		235.74	39.43	-6.57	46	52.66	16.69	2.75	32.67	-	-	P	H
		289.2	35.1	-10.9	46	45.79	19	3.02	32.71	-	-	P	H
		418.3	39.61	-6.39	46	46.09	22.59	3.65	32.72	-	-	P	H
													H
													H
													H
													H
5GHz													H
802.11ac													H
VHT80		32.43	36.33	-3.67	40	44.32	23.84	0.92	32.75	100	269	Q	V
LF		40.53	34.41	-5.59	40	46.36	19.72	1.07	32.74	100	117	Q	V
		70.23	31.29	-8.71	40	49.95	12.6	1.47	32.73	-	-	P	V
		98.31	36.95	-6.55	43.5	52.02	15.87	1.78	32.72	-	-	P	V
		148.8	34.52	-8.98	43.5	47.95	17.12	2.16	32.71	-	-	P	V
		231.42	34.65	-11.35	46	48.35	16.25	2.72	32.67	-	-	P	V
		407.8	39.07	-6.93	46	46.07	22.12	3.6	32.72	-	-	P	V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

<Sample 2>

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		5146.54	57.22	-16.78	74	45.66	32.51	12.74	33.69	100	14	P	H
		5149.6	49.9	-4.1	54	38.34	32.5	12.75	33.69	100	14	A	H
	*	5210	99.04	-	-	87.37	32.6	12.86	33.79	100	14	P	H
	*	5210	92.21	-	-	80.54	32.6	12.86	33.79	100	14	A	H
		5376.02	49.46	-24.54	74	37.92	32.5	13.09	34.05	100	14	P	H
		5357.04	40.78	-13.22	54	29.24	32.5	13.06	34.02	100	14	A	H
		5147.22	55.2	-18.8	74	43.64	32.51	12.74	33.69	330	163	P	V
		5149.6	46.78	-7.22	54	35.22	32.5	12.75	33.69	330	163	A	V
	*	5210	93.67	-	-	82	32.6	12.86	33.79	330	163	P	V
	*	5210	86.6	-	-	74.93	32.6	12.86	33.79	330	163	A	V
		5406.96	49.22	-24.78	74	37.67	32.51	13.13	34.09	330	163	P	V
		5442.58	40.34	-13.66	54	28.73	32.59	13.17	34.15	330	163	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10420	48.91	-19.29	68.2	31.8	37.26	19.07	39.22	-	-	P	H
		15630	53.65	-20.35	74	33.39	41.2	23.52	44.46	-	-	P	H
		15630	44.06	-9.94	54	23.8	41.2	23.52	44.46	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
802.11ac VHT80 CH 42 5210MHz													H
		10420	48.31	-19.89	68.2	31.2	37.26	19.07	39.22	-	-	P	V
		15630	53.06	-20.94	74	32.8	41.2	23.52	44.46	-	-	P	V
		15630	44.65	-9.35	54	24.39	41.2	23.52	44.46	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission above 18GHz

5GHz WIFI 802.11ac VHT80 (SHF@ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		22501.62	26.64	-47.36	74	30.62	38.41	18.21	60.6	-	-	P	H
		36598	42.75	-25.45	68.2	34.94	43.3	26.49	61.98	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
5GHz													H
802.11ac													H
VHT80		22501.62	26.49	-47.51	74	30.47	38.41	18.21	60.6	-	-	P	V
SHF		36598	42.91	-25.29	68.2	35.1	43.3	26.49	61.98	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		39.99	25.68	-14.32	40	37.33	20.03	1.06	32.74	-	-	P	H
		88.59	36.78	-6.72	43.5	53.02	14.8	1.68	32.72	-	-	P	H
		172.83	23.89	-19.61	43.5	38.67	15.52	2.39	32.69	-	-	P	H
		225.21	29.88	-16.12	46	44.26	15.61	2.68	32.67	-	-	P	H
		422.5	30.01	-15.99	46	36.39	22.67	3.68	32.73	-	-	P	H
		952.4	35.4	-10.6	46	30.31	30.92	5.55	31.38	-	-	P	H
													H
													H
													H
													H
5GHz													H
802.11ac													H
VHT80		31.35	32.9	-7.1	40	40.56	24.19	0.9	32.75	100	251	Q	V
LF		39.99	34.67	-5.33	40	46.32	20.03	1.06	32.74	100	115	Q	V
		88.59	34.76	-8.74	43.5	51	14.8	1.68	32.72	-	-	P	V
		227.1	26.58	-19.42	46	40.79	15.77	2.69	32.67	-	-	P	V
		649.3	28.56	-17.44	46	30.41	26.41	4.55	32.81	-	-	P	V
		979	35.44	-18.56	54	30.18	30.68	5.67	31.09	-	-	P	V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

<Sample 3>

Band 1 - 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5149.26	53.41	-20.59	74	41.85	32.5	12.75	33.69	100	29	P	H
		5149.94	45.38	-8.62	54	33.82	32.5	12.75	33.69	100	29	A	H
	*	5210	94.54	-	-	82.87	32.6	12.86	33.79	100	29	P	H
	*	5210	87.05	-	-	75.38	32.6	12.86	33.79	100	29	A	H
		5385.38	49.14	-24.86	74	37.6	32.5	13.1	34.06	100	29	P	H
		5420.22	40.58	-13.42	54	29.01	32.54	13.15	34.12	100	29	A	H
		5149.6	55.43	-18.57	74	43.87	32.5	12.75	33.69	347	212	P	V
		5149.94	47.17	-6.83	54	35.61	32.5	12.75	33.69	347	212	A	V
	*	5210	95.75	-	-	84.08	32.6	12.86	33.79	347	212	P	V
	*	5210	88.06	-	-	76.39	32.6	12.86	33.79	347	212	A	V
		5450.38	49.2	-24.8	74	37.58	32.6	13.18	34.16	347	212	P	V
		5356.52	40.71	-13.29	54	29.17	32.5	13.06	34.02	347	212	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		10420	48.81	-19.39	68.2	31.7	37.26	19.07	39.22	-	-	P	H
		15630	52.59	-21.41	74	32.33	41.2	23.52	44.46	-	-	P	H
		15630	43.59	-10.41	54	23.33	41.2	23.52	44.46	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
802.11ac													H
VHT80													H
CH 42		10420	48.39	-19.81	68.2	31.28	37.26	19.07	39.22	-	-	P	V
5210MHz		15630	53.56	-20.44	74	33.3	41.2	23.52	44.46	-	-	P	V
		15630	44.56	-9.44	54	24.3	41.2	23.52	44.46	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission above 18GHz

5GHz WIFI 802.11ac VHT80 (SHF@ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		23502.87	28.73	-39.47	68.2	31.21	38.72	18.9	60.1	-	-	P	H
		35394	42.43	-25.77	68.2	35.5	42.2	25.81	61.08	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
5GHz													H
802.11ac													H
VHT80		23502.87	28.42	-39.78	68.2	30.9	38.72	18.9	60.1	-	-	P	V
SHF		35394	42.4	-25.8	68.2	35.47	42.2	25.81	61.08	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		40.53	26.25	-13.75	40	38.2	19.72	1.07	32.74	-	-	P	H
		97.5	29.81	-13.69	43.5	44.99	15.77	1.77	32.72	-	-	P	H
		164.46	28.45	-15.05	43.5	42.64	16.22	2.3	32.71	-	-	P	H
		229.8	32.11	-13.89	46	46.01	16.06	2.71	32.67	-	-	P	H
		266.25	34.75	-11.25	46	44.83	19.69	2.91	32.68	-	-	P	H
		958.7	35.67	-10.33	46	30.34	31.06	5.58	31.31	-	-	P	H
													H
													H
													H
													H
5GHz													H
802.11ac													H
VHT80		33.51	32.58	-7.42	40	41.24	23.15	0.94	32.75	100	247	Q	V
LF		41.34	32.18	-7.82	40	44.55	19.28	1.08	32.73	100	111	Q	V
		145.02	30.82	-12.68	43.5	44.08	17.32	2.13	32.71	-	-	P	V
		230.07	28.96	-17.04	46	42.83	16.09	2.71	32.67	-	-	P	V
		560.4	31.49	-14.51	46	33.71	26.38	4.28	32.88	-	-	P	V
		973.4	35.72	-18.28	54	30.39	30.84	5.64	31.15	-	-	P	V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

Note symbol

*	**Fundamental Frequency** which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is **Margin** line.
P/A	**P**eak or **A**verage
H/V	**H**orizontal or **V**ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5150	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		5150	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 5150MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Margin (dB)

= Leve(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 5150MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54 (dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Bank Lin, Ken Kuo, and Lucifer Jiang	**Temperature :**	20~23°C
		Relative Humidity :	42~55%

Note symbol

-L	**Low channel location**
-R	**High channel location**

<Sample 1>

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
	Horizontal	Fundamental
Peak	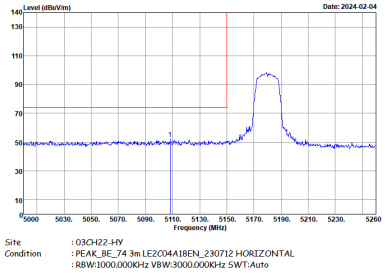	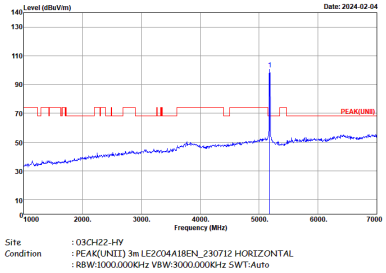
Avg.	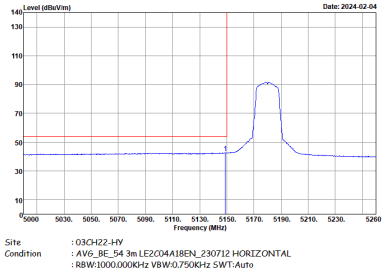	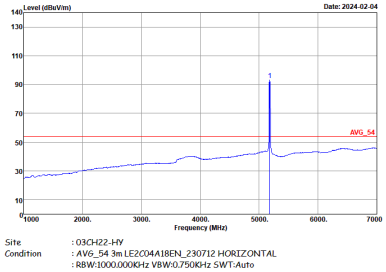

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
	Vertical	Fundamental
Peak	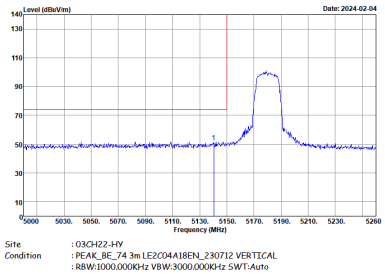	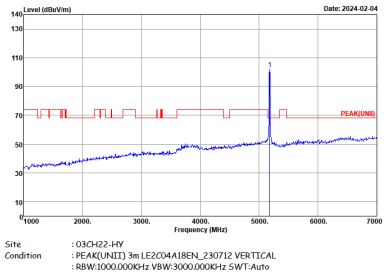
Avg.	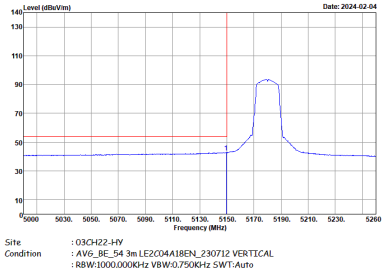	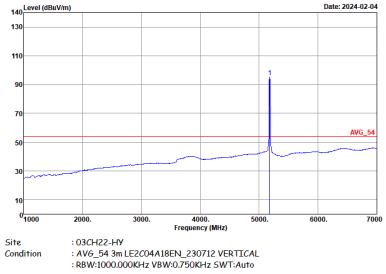

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
	Horizontal	Fundamental
Peak	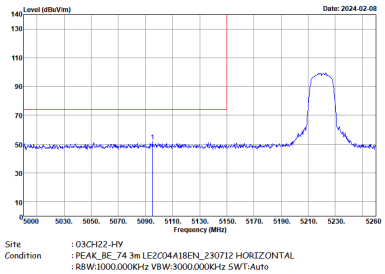	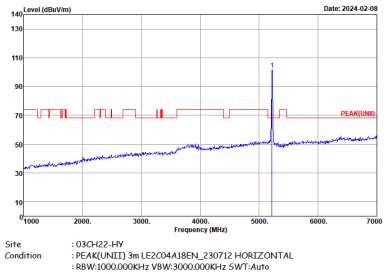
Avg.	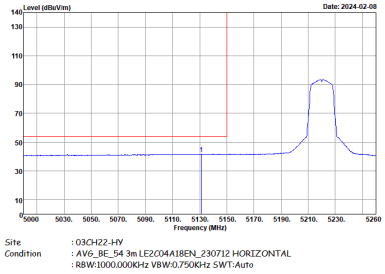	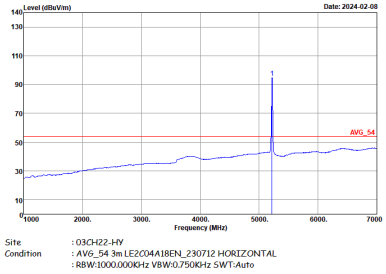

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
	Horizontal	Fundamental
Peak	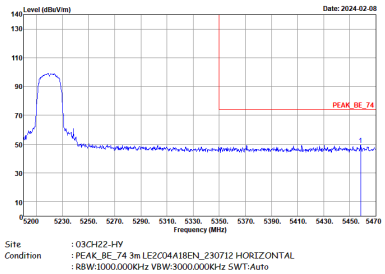	Left blank
Avg.	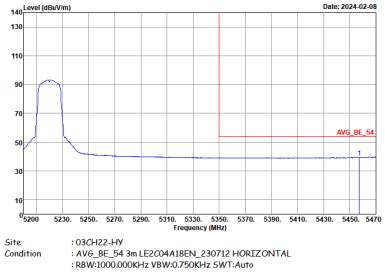	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
	Vertical	Fundamental
Peak	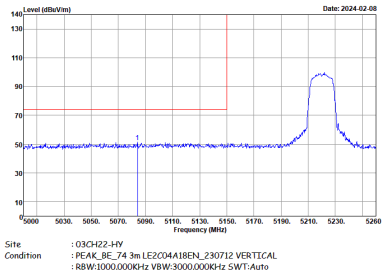	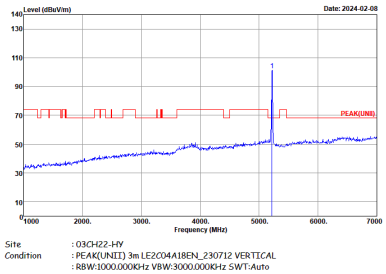
Avg.	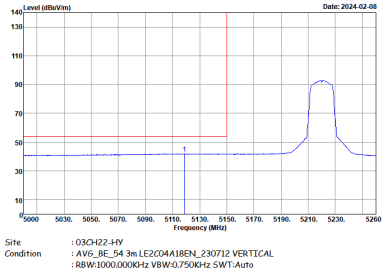	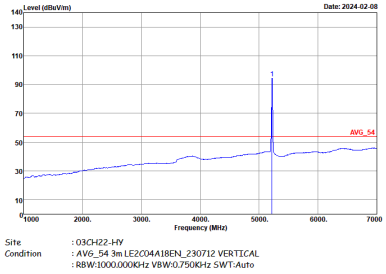

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
	Vertical	Fundamental
Peak	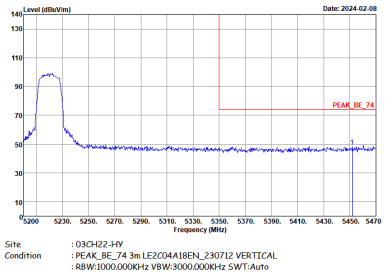	Left blank
Avg.	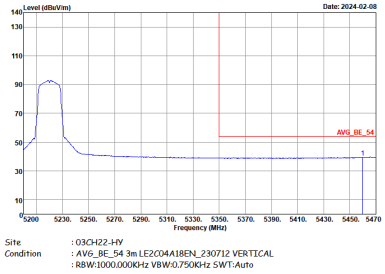	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
	Horizontal	Fundamental
Peak	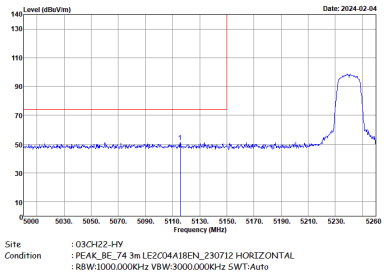	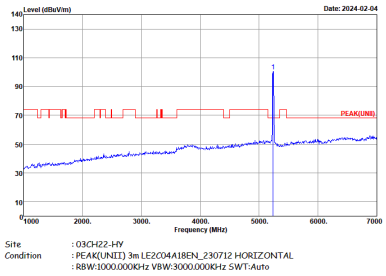
Avg.	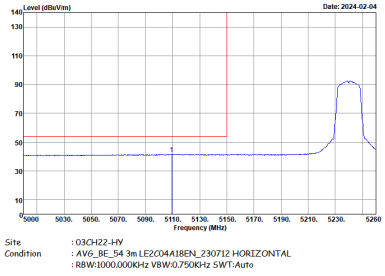	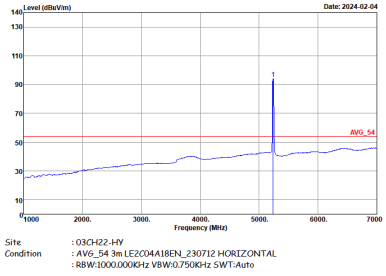

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
	Horizontal	Fundamental
Peak	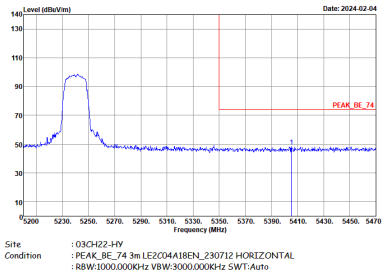	Left blank
Avg.	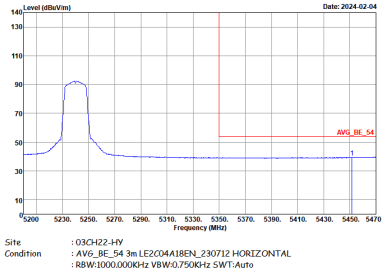	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
	Vertical	Fundamental
Peak	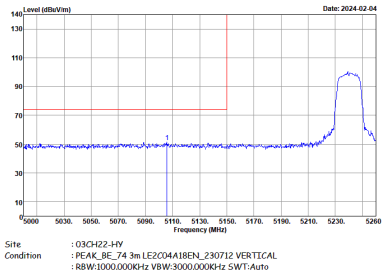	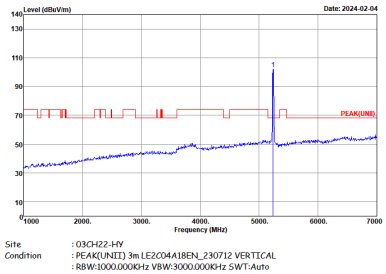
Avg.	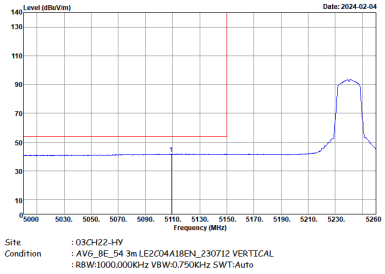	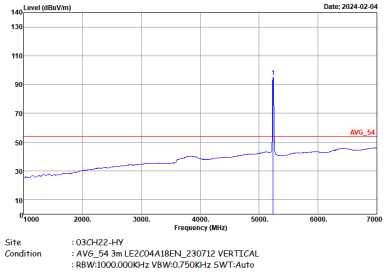

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
	Vertical	Fundamental
Peak	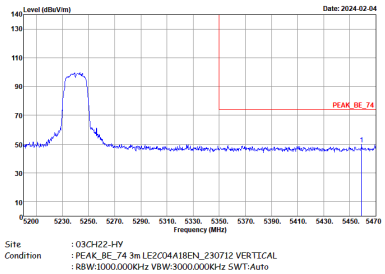	Left blank
Avg.	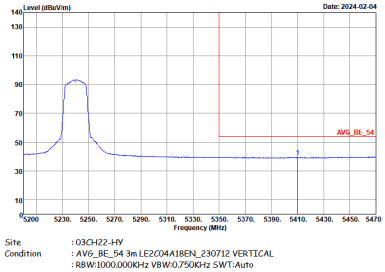	Left blank

Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
	Horizontal	Fundamental
Peak	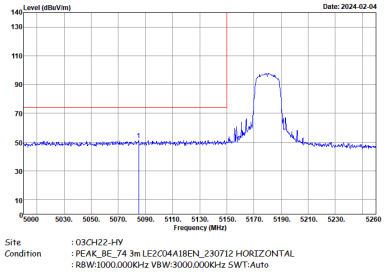	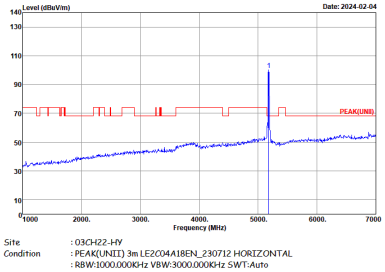
Avg.	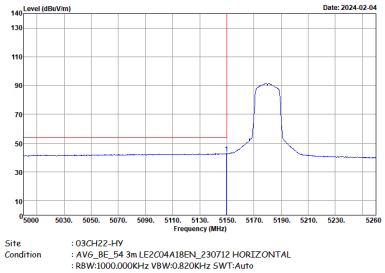	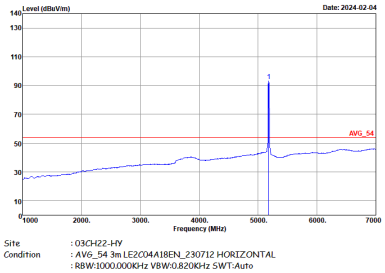

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
	Vertical	Fundamental
Peak	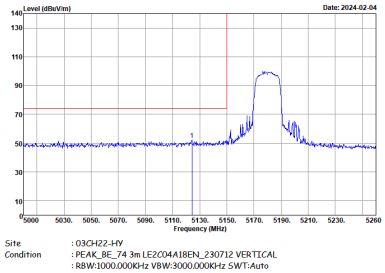	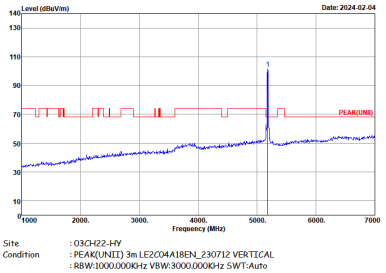
Avg.	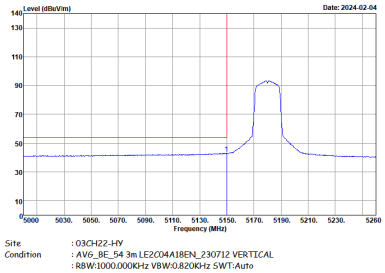	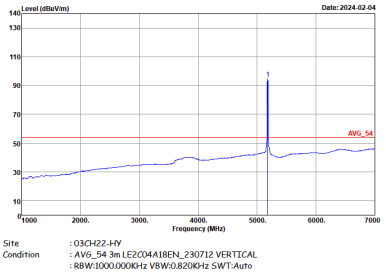

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - L	
	Horizontal	Fundamental
Peak	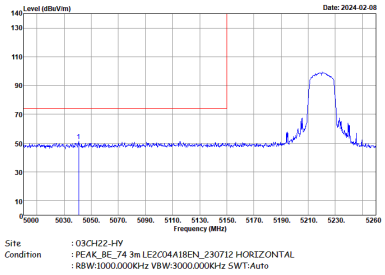	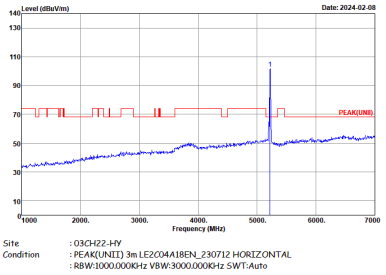
Avg.	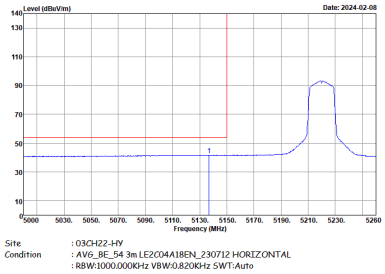	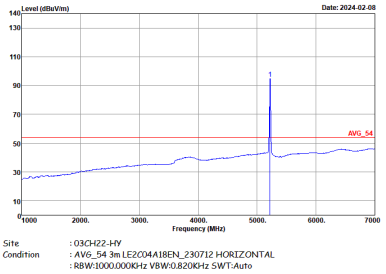

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - R	
	Horizontal	Fundamental
Peak	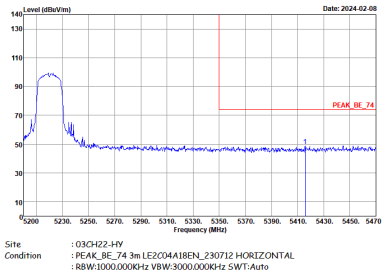	Left blank
Avg.	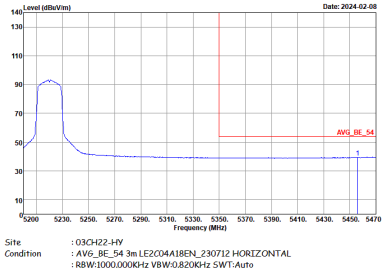	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - L	
	Vertical	Fundamental
Peak	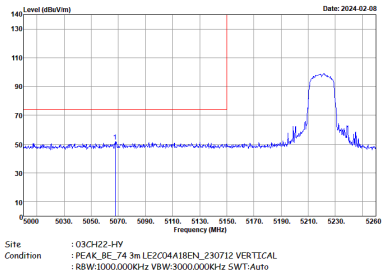	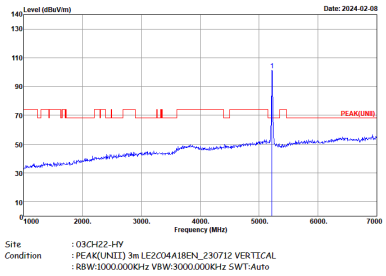
Avg.	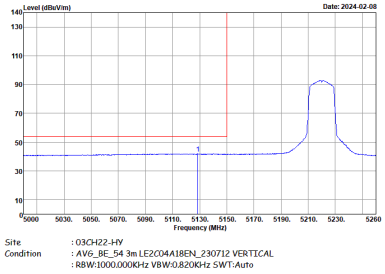	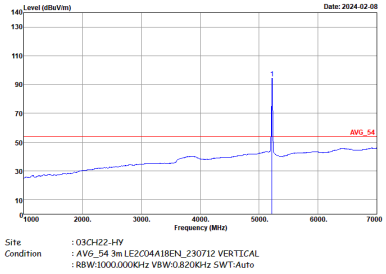

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - R	
	Vertical	Fundamental
Peak	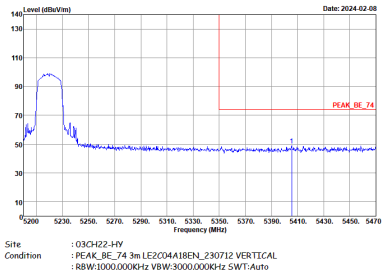	Left blank
Avg.	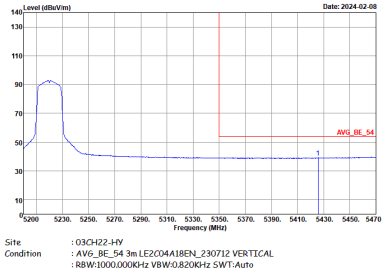	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - L	
	Horizontal	Fundamental
Peak	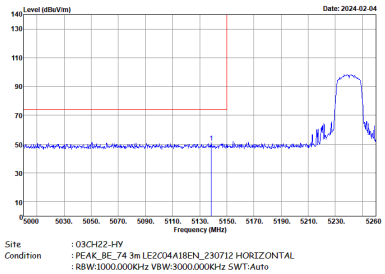 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	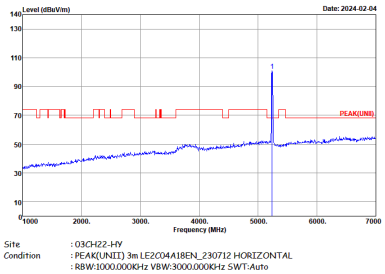 Site : 03CH22-HY Condition : PEAK(UNII) 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	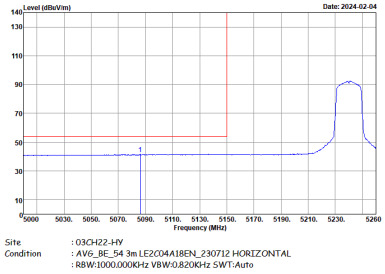 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto	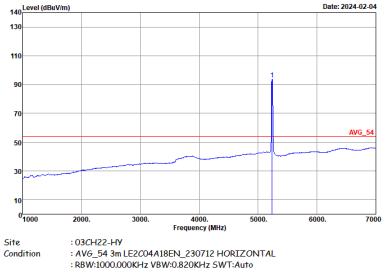 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - R	
	Horizontal	Fundamental
Peak	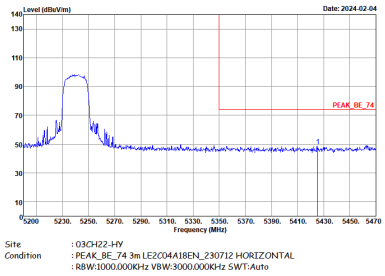	Left blank
Avg.	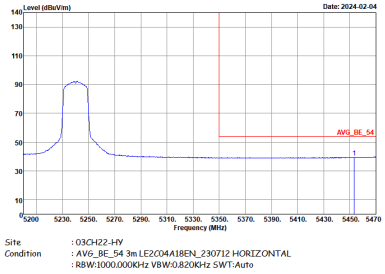	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - L	
	Vertical	Fundamental
Peak	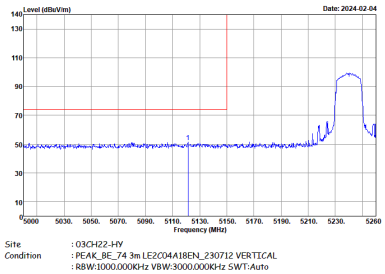 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	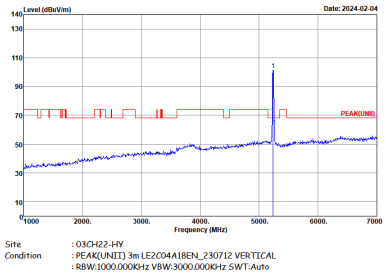 Site : 03CH22-HY Condition : PEAK(UNII) 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	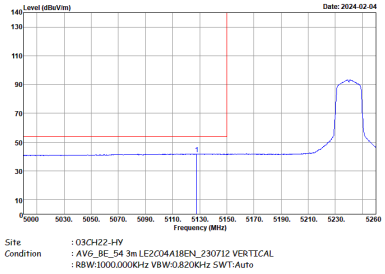 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto	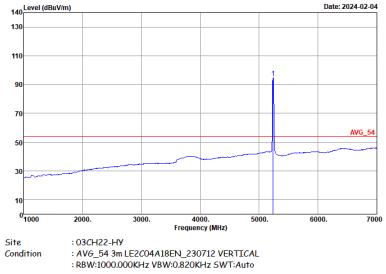 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - R	
	Vertical	Fundamental
Peak	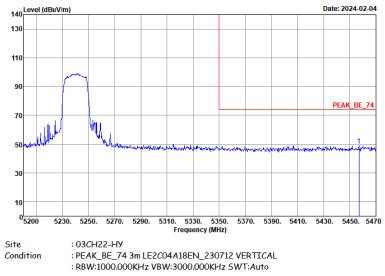	Left blank
Avg.	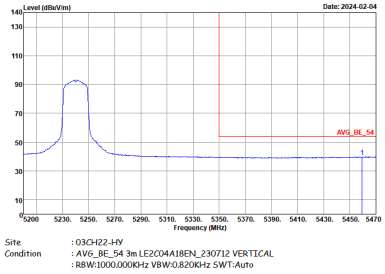	Left blank

Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - L	
	Horizontal	Fundamental
Peak	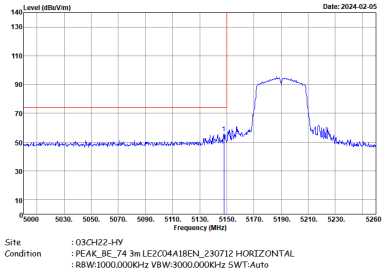	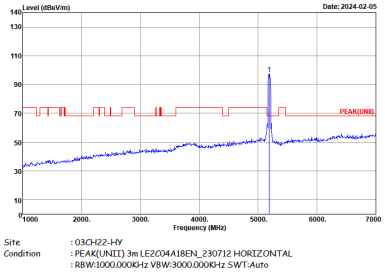
Avg.	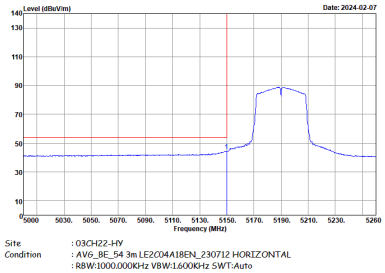	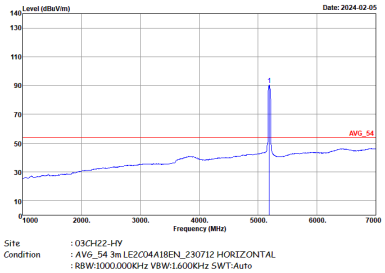

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
	Horizontal	Fundamental
Peak	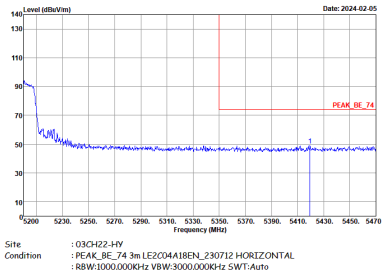	Left blank
Avg.	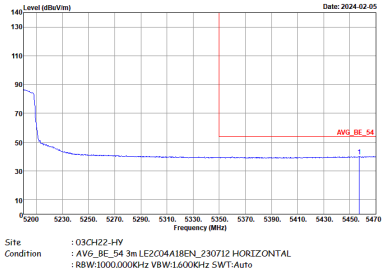	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - L	
	Vertical	Fundamental
Peak	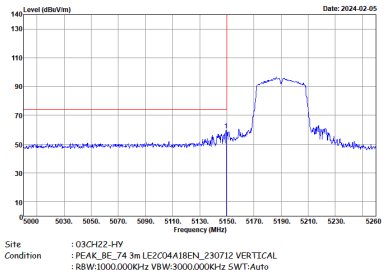 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	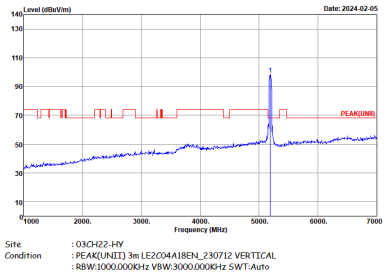 Site : 03CH22-HY Condition : PEAK(UNII) 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	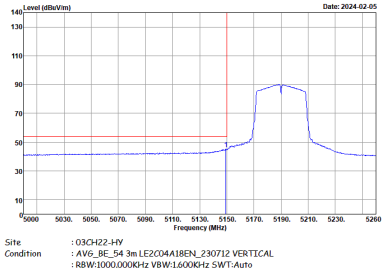 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:1.600KHz SWT:Auto	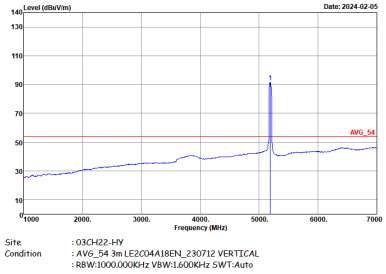 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 VERTICAL : RBW:1000.000KHz VBW:1.600KHz SWT:Auto

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
	Vertical	Fundamental
Peak	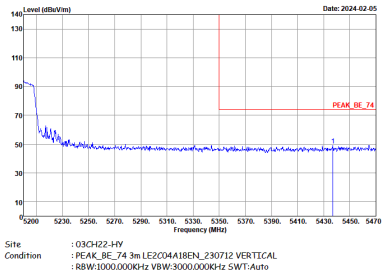	Left blank
Avg.	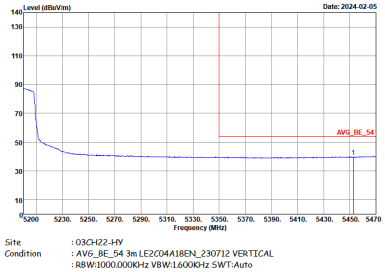	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - L	
	Horizontal	Fundamental
Peak	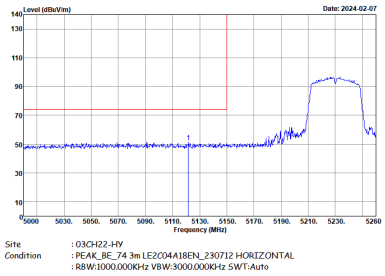	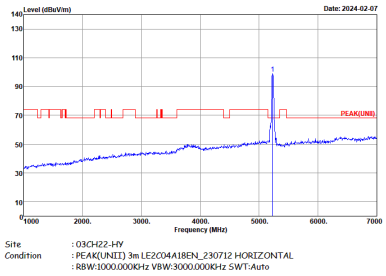
Avg.	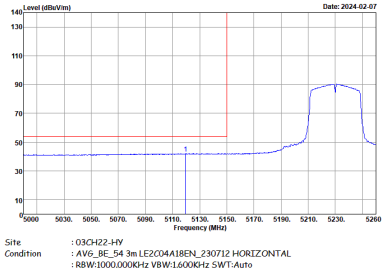	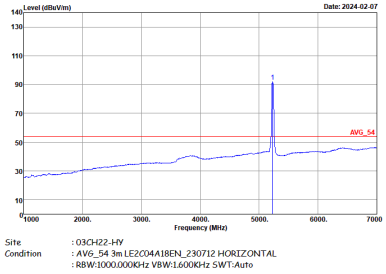

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - R	
	Horizontal	Fundamental
Peak	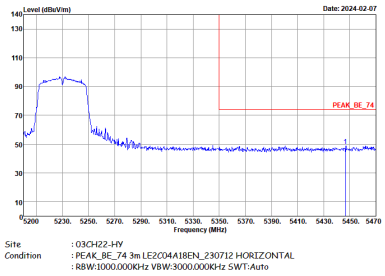	Left blank
Avg.	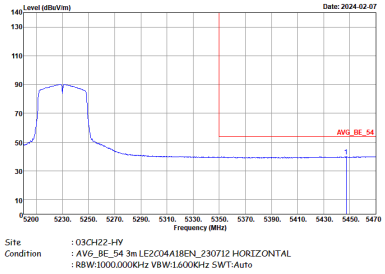	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - L	
	Vertical	Fundamental
Peak	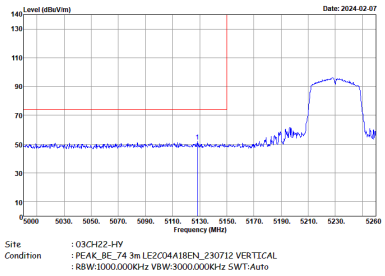	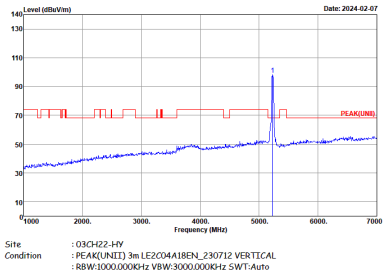
Avg.	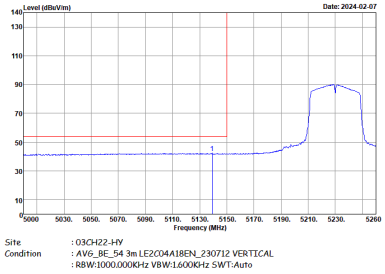	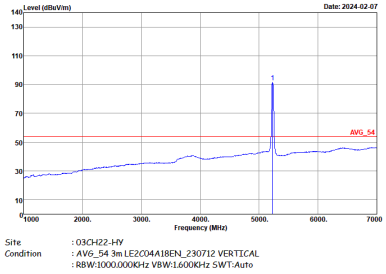

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - R	
	Vertical	Fundamental
Peak	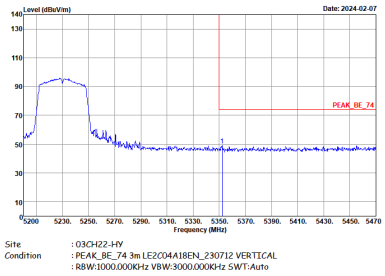	Left blank
Avg.	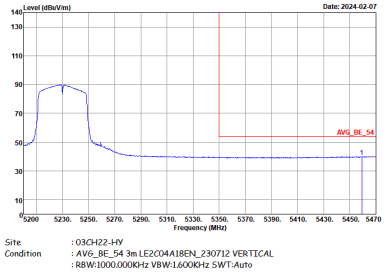	Left blank

Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - L	
	Horizontal	Fundamental
Peak	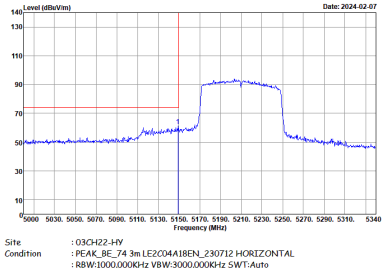	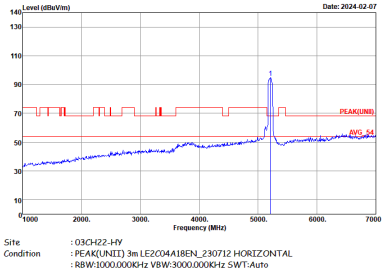
Avg.	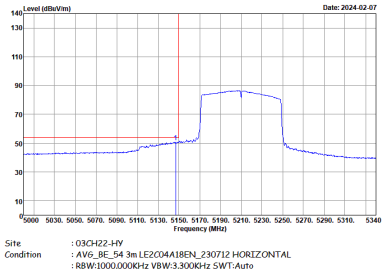	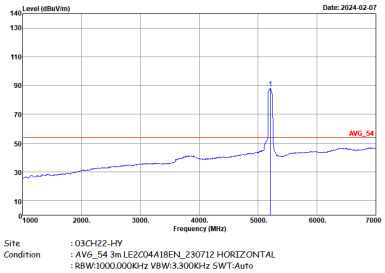

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - R	
	Horizontal	Fundamental
Peak	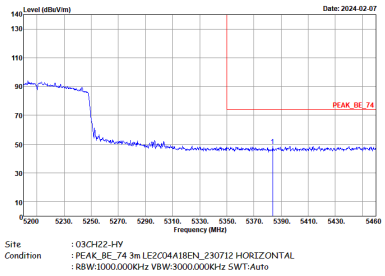	Left blank
Avg.	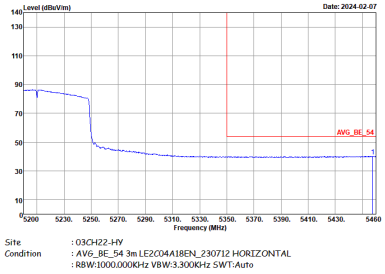	Left blank

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - L	
	Vertical	Fundamental
Peak	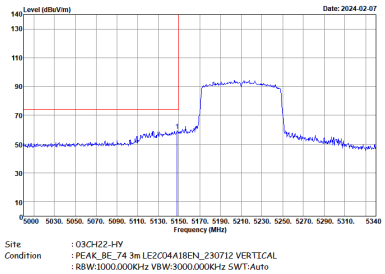	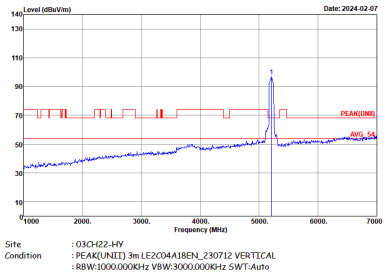
Avg.	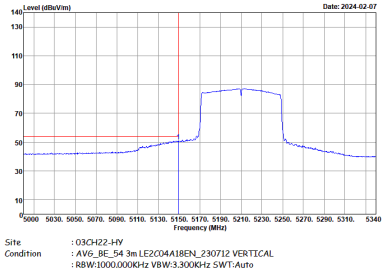	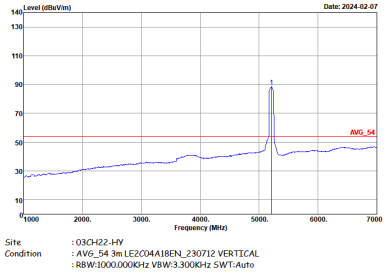

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - R	
	Vertical	Fundamental
Peak	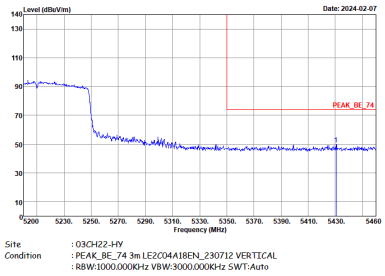	Left blank
Avg.	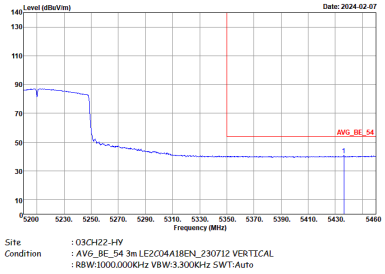	Left blank

Band 1 - 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH36 5180MHz	
	Horizontal	Vertical
Peak Avg.	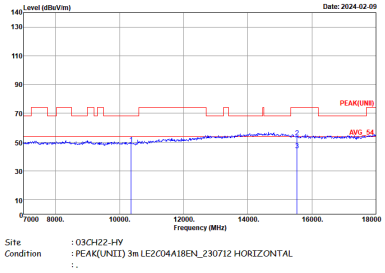	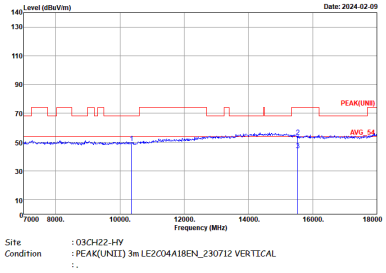

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH36 5180MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	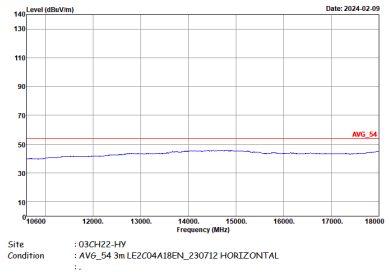	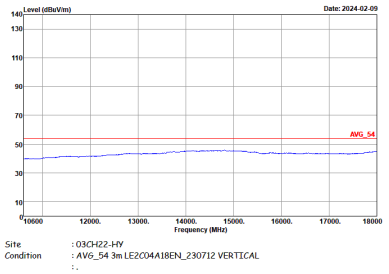

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH44 5220MHz	
	Horizontal	Vertical
Peak Avg.	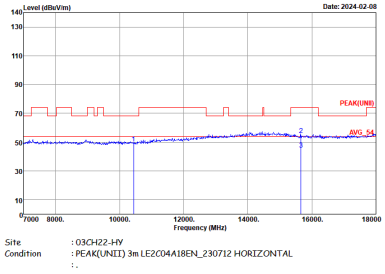	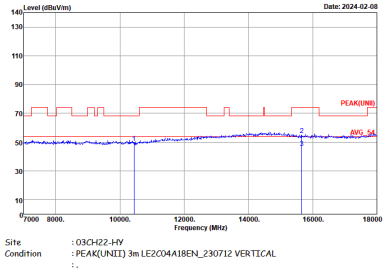

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH44 5220MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	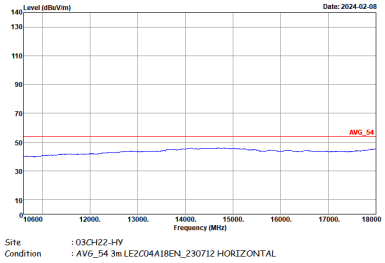	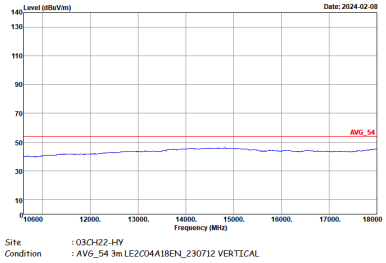

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH48 5240MHz	
	Horizontal	Vertical
Peak Avg.	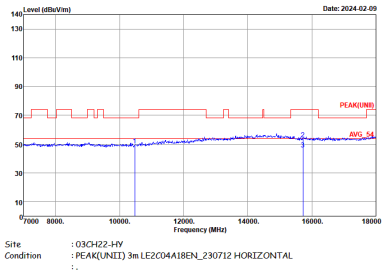	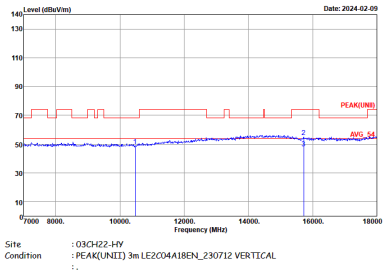

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH48 5240MHz	
	Horizontal	Vertical
10.6G ~18G Avg.		

Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
	Horizontal	Vertical
Peak Avg.	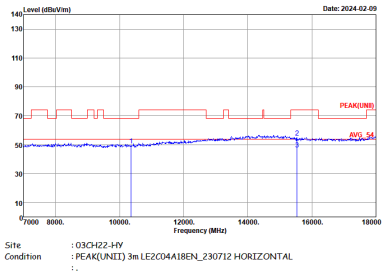	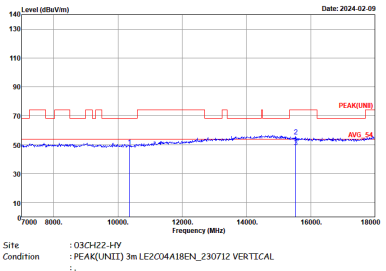

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
	Horizontal	Vertical
10.6G ~18G Avg.		

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH44 5220MHz	
	Horizontal	Vertical
Peak Avg.	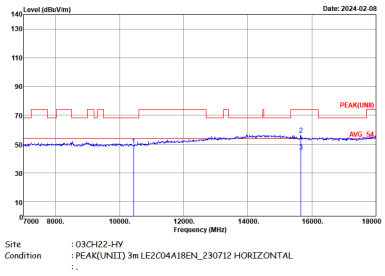	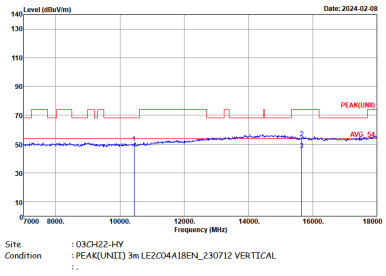

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH44 5220MHz	
	Horizontal	Vertical
10.6G ~18G Avg.		

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH48 5240MHz	
	Horizontal	Vertical
Peak Avg.	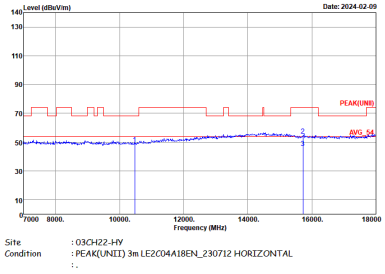	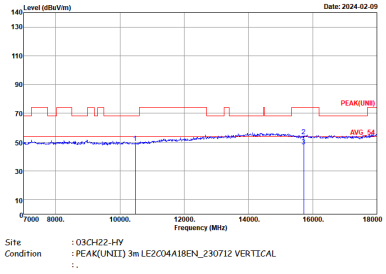

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH48 5240MHz	
	Horizontal	Vertical
10.6G ~18G Avg.		

Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH38 5190MHz	
	Horizontal	Vertical
Peak Avg.	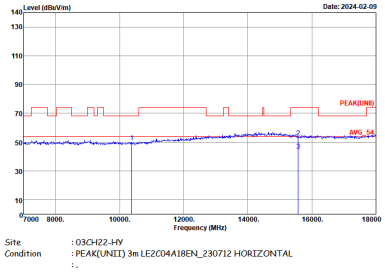	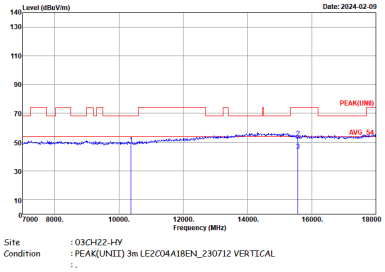

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH38 5190MHz	
	Horizontal	Vertical
10.6G ~18G Avg.		

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH46 5230MHz	
	Horizontal	Vertical
Peak Avg.	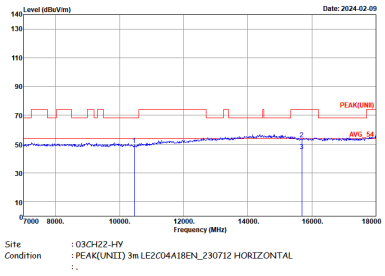	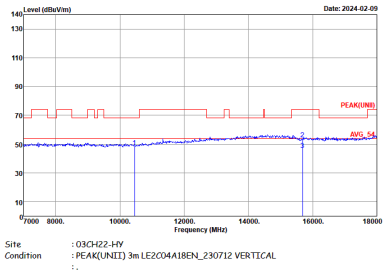

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH46 5230MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	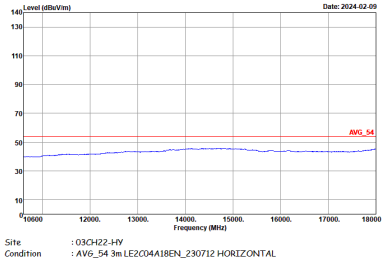	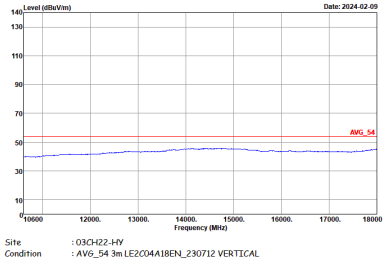

Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz	
	Horizontal	Vertical
Peak Avg.	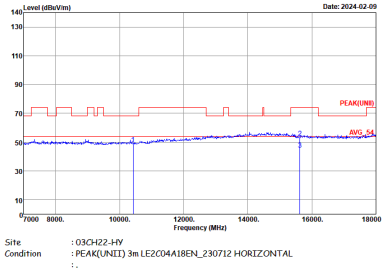	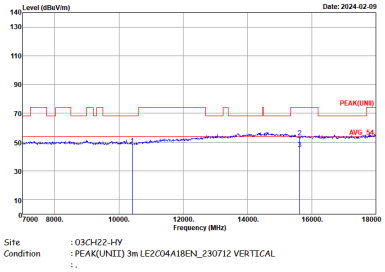

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	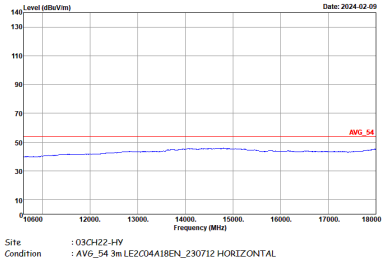	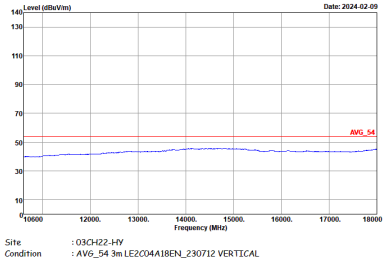

Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH52 5260MHz - L	
	Horizontal	Fundamental
Peak	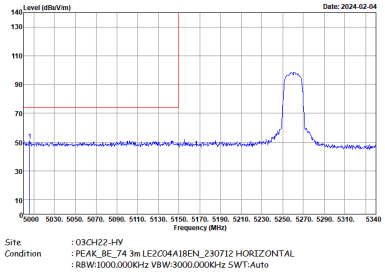	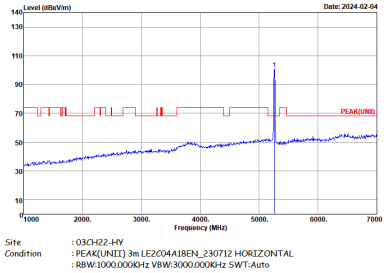
Avg.	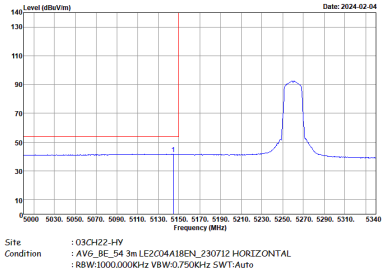	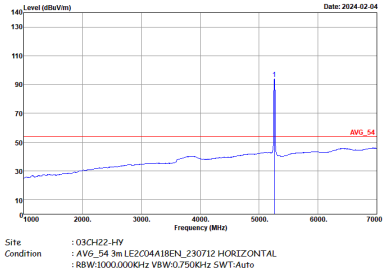

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH52 5260MHz - R	
	Horizontal	Fundamental
Peak	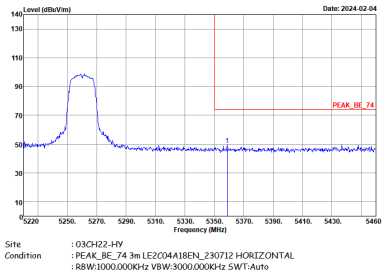	Left blank
Avg.	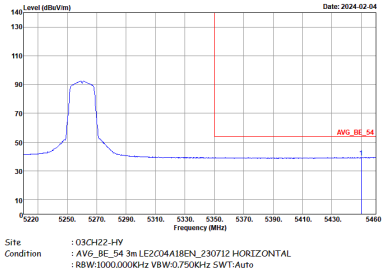	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH52 5260MHz - L	
	Vertical	Fundamental
Peak	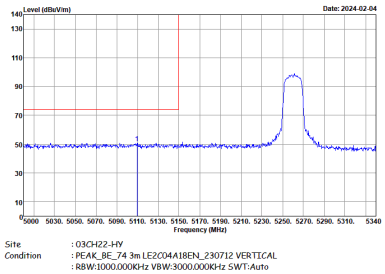	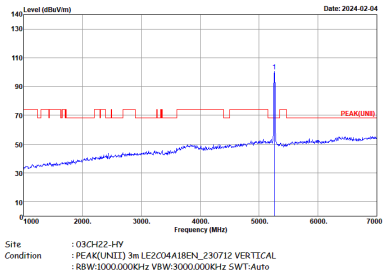
Avg.	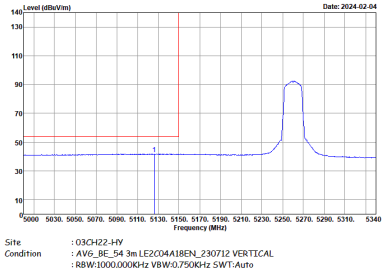	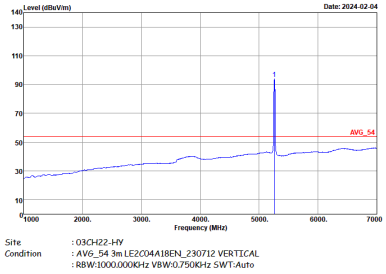

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH52 5260MHz - R	
	Vertical	Fundamental
Peak	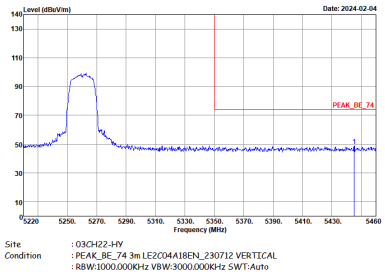	Left blank
Avg.	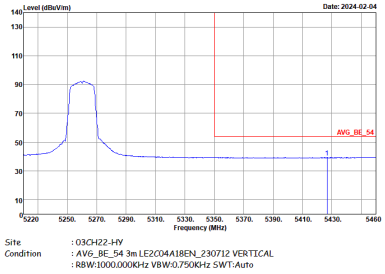	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH60 5300MHz - L	
	Horizontal	Fundamental
Peak	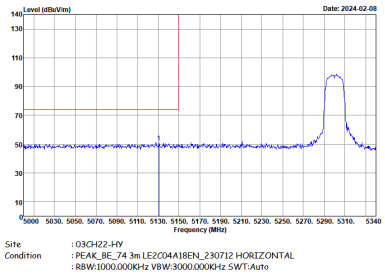	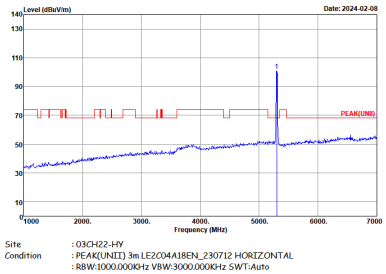
Avg.	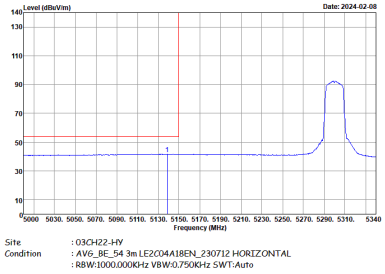	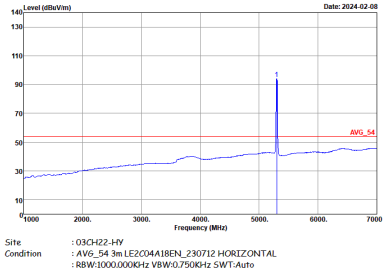

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH60 5300MHz - R	
	Horizontal	Fundamental
Peak	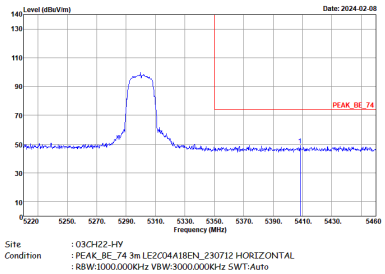	Left blank
Avg.	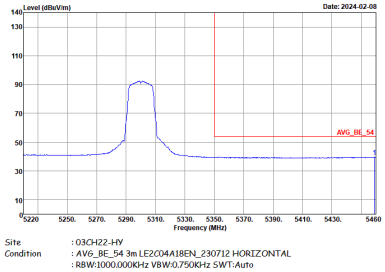	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH60 5300MHz - L	
	Vertical	Fundamental
Peak	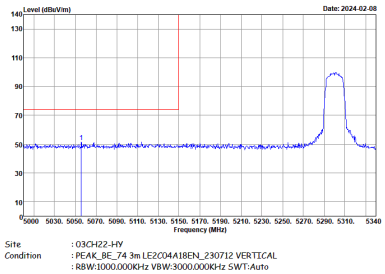	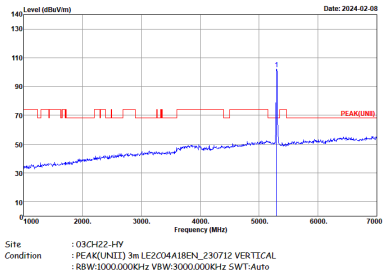
Avg.	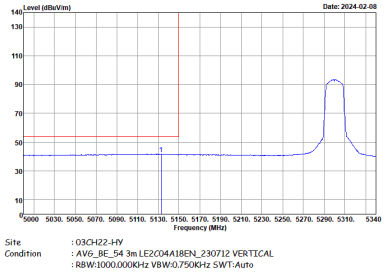	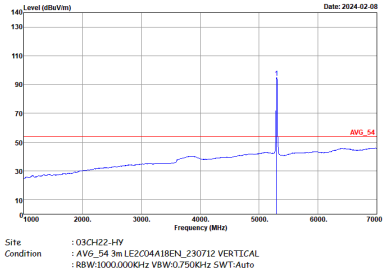

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH60 5300MHz - R	
	Vertical	Fundamental
Peak	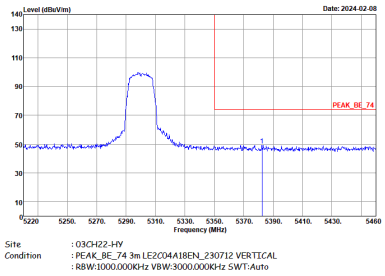	Left blank
Avg.	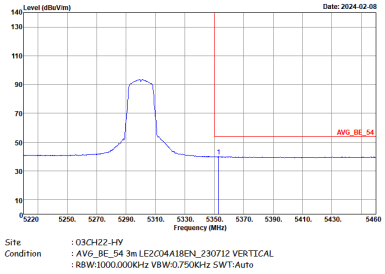	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH64 5320MHz	
	Horizontal	Fundamental
Peak	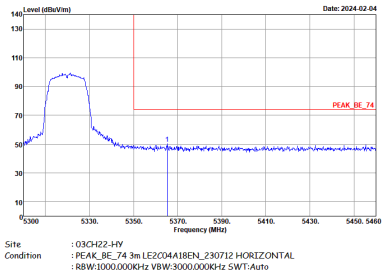 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	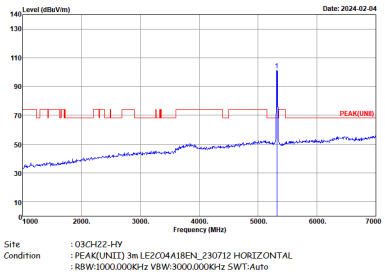 Site : 03CH22-HY Condition : PEAK(UNII) 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	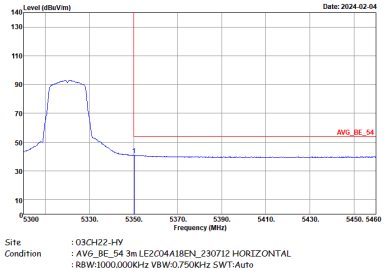 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto	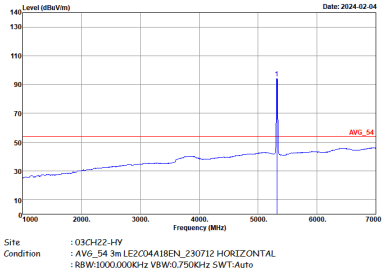 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.750KHz SWT:Auto

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11a CH64 5320MHz	
	Vertical	Fundamental
Peak	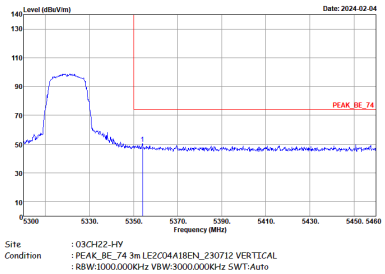	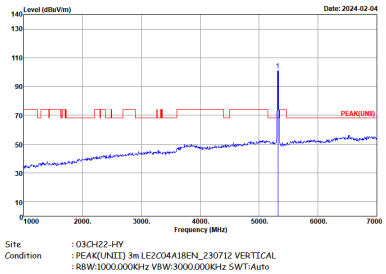
Avg.	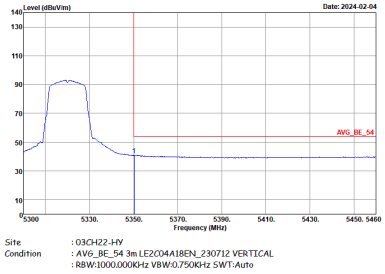	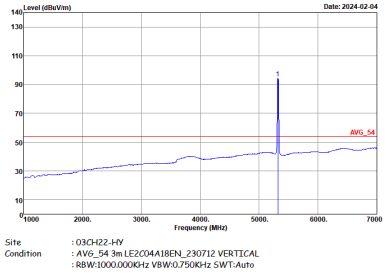

Band 2 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH52 5260MHz - L	
	Horizontal	Fundamental
Peak	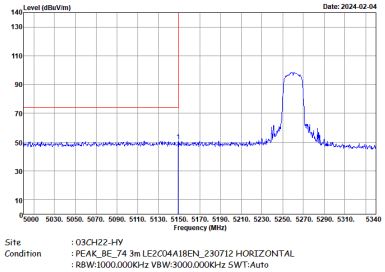	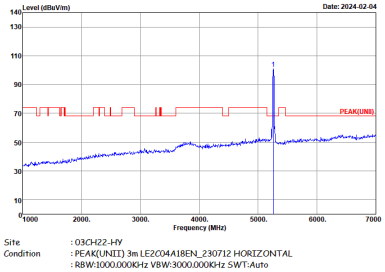
Avg.	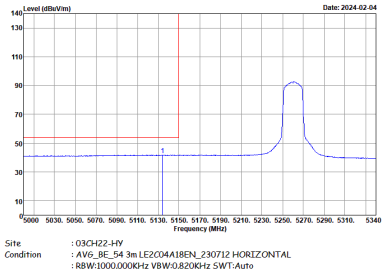	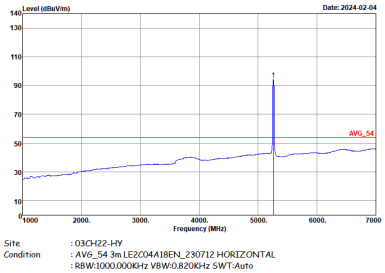

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH52 5260MHz - R	
	Horizontal	Fundamental
Peak	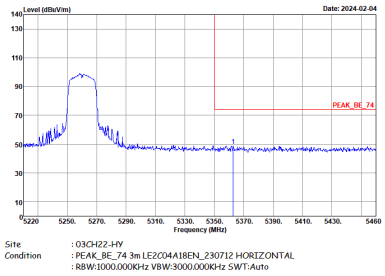	Left blank
Avg.	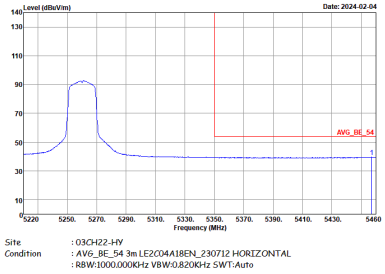	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH52 5260MHz - L	
	Vertical	Fundamental
Peak	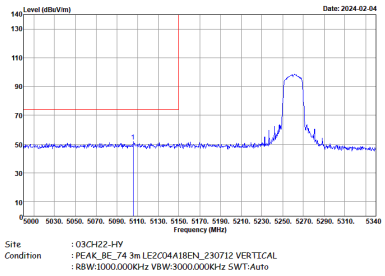	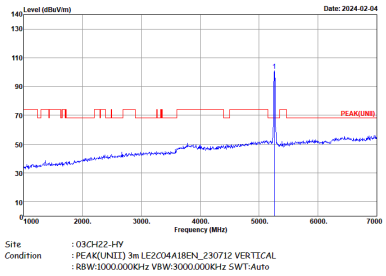
Avg.	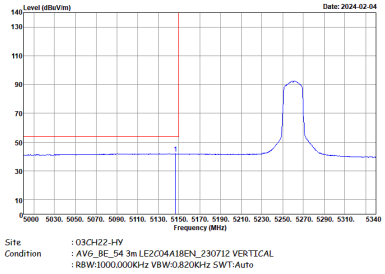	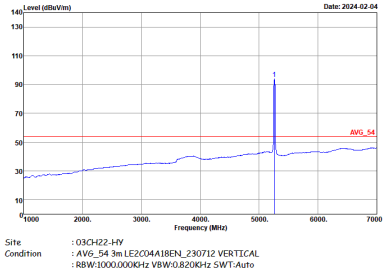

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH52 5260MHz - R	
	Vertical	Fundamental
Peak	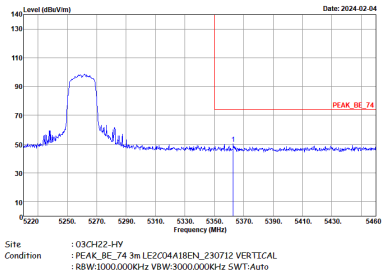	Left blank
Avg.	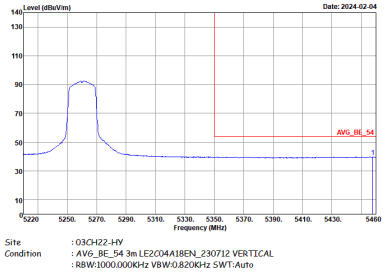	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH60 5300MHz - L	
	Horizontal	Fundamental
Peak	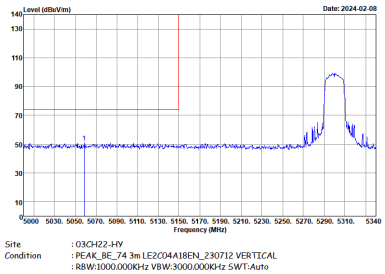	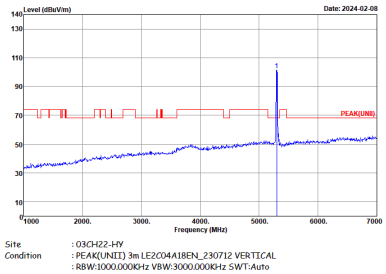
Avg.	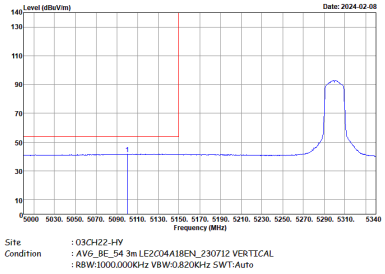	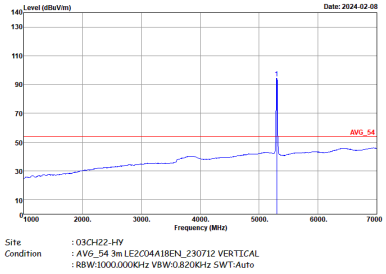

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH60 5300MHz - R	
	Horizontal	Vertical
Peak	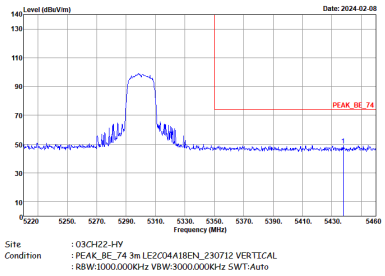	Left blank
Avg.	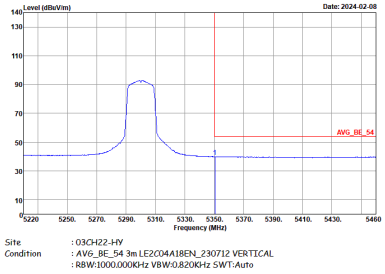	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH60 5300MHz - L	
	Vertical	Fundamental
Peak	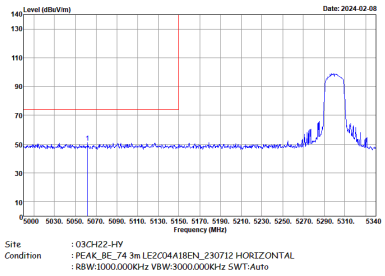	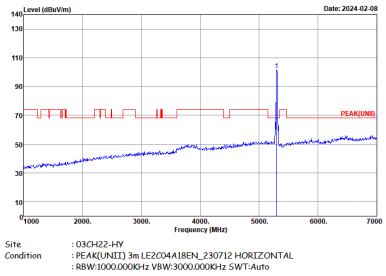
Avg.	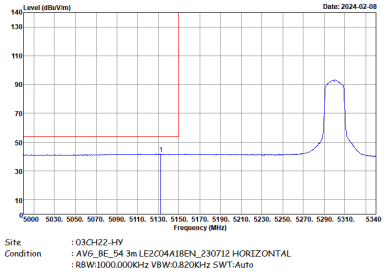	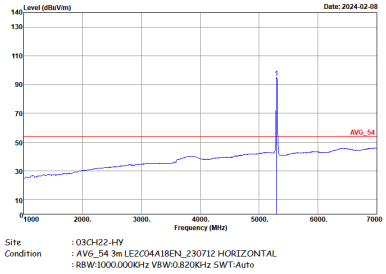

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH60 5300MHz - R	
	Vertical	Fundamental
Peak	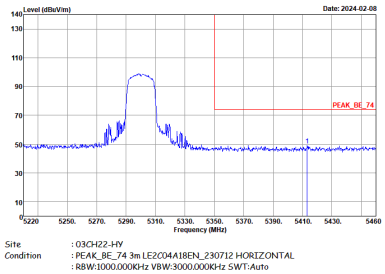	Left blank
Avg.	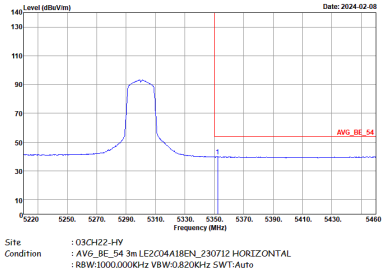	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH64 5320MHz	
	Horizontal	Fundamental
Peak	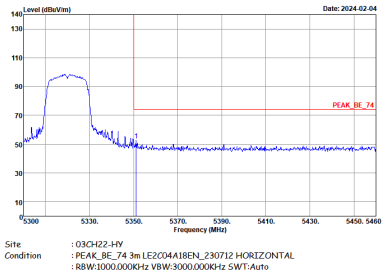 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	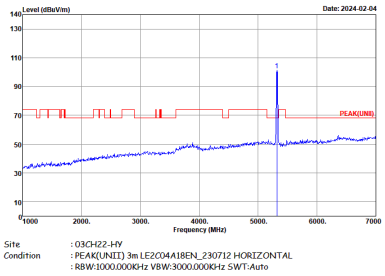 Site : 03CH22-HY Condition : PEAK(UNII) 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	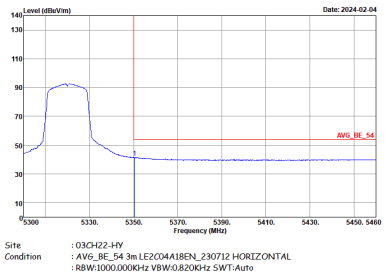 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto	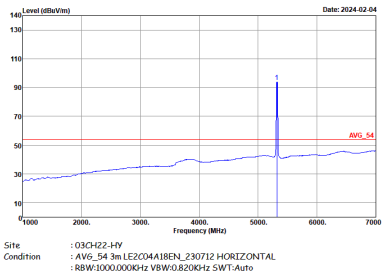 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:0.820KHz SWT:Auto

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT20 CH64 5320MHz	
	Vertical	Fundamental
Peak	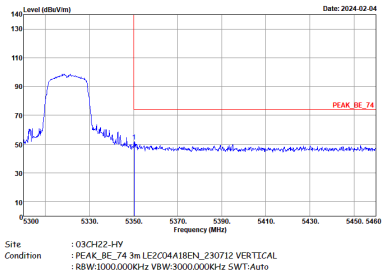	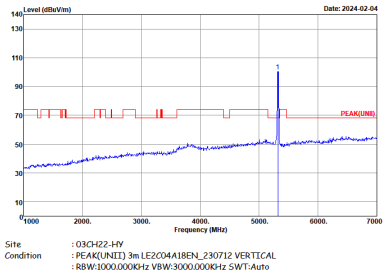
Avg.	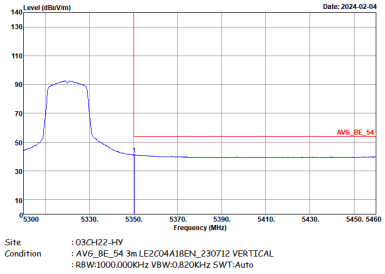	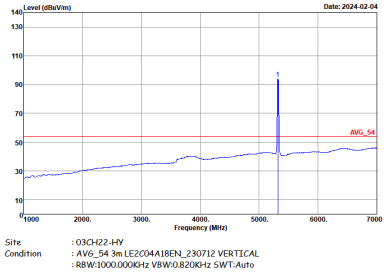

Band 2 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH54 5270 - L	
	Horizontal	Fundamental
Peak	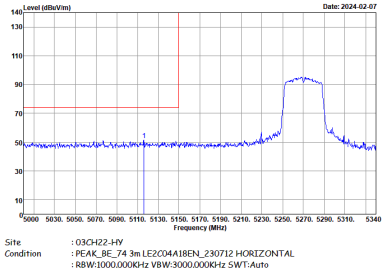	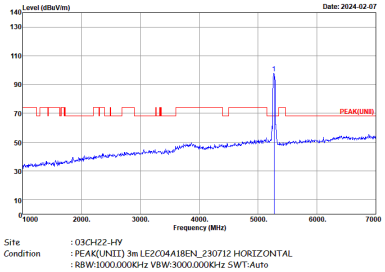
Avg.	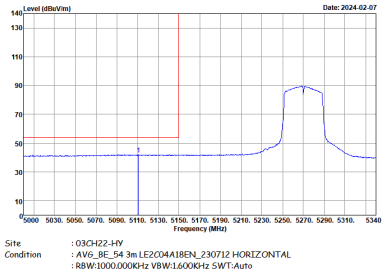	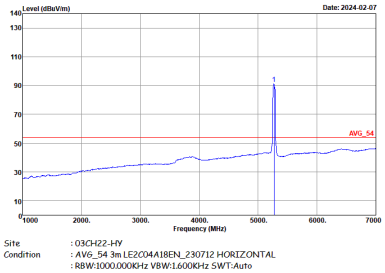

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH54 5270 - R	
	Horizontal	Fundamental
Peak	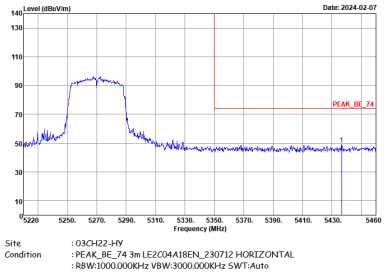	Left blank
Avg.	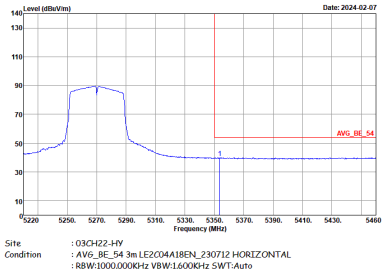	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH54 5270 - L	
	Vertical	Vertical
Peak	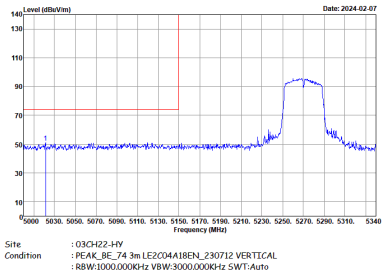	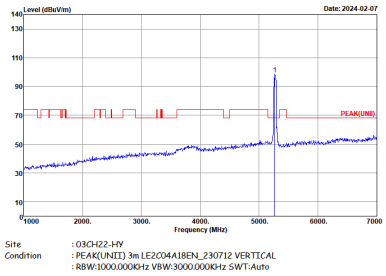
Avg.	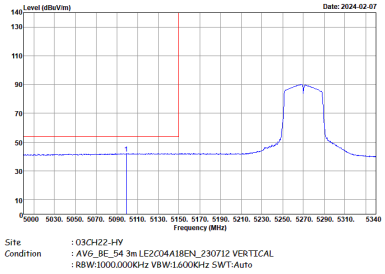	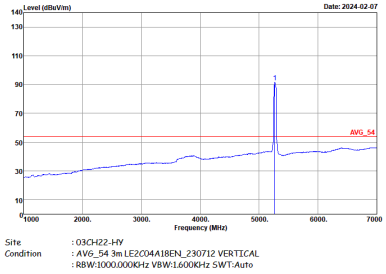

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH54 5270 - R	
	Vertical	Vertical
Peak	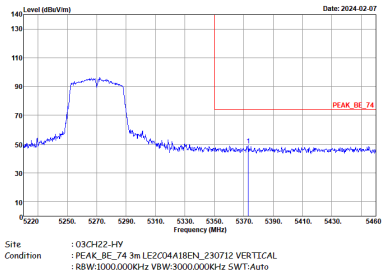	Left blank
Avg.	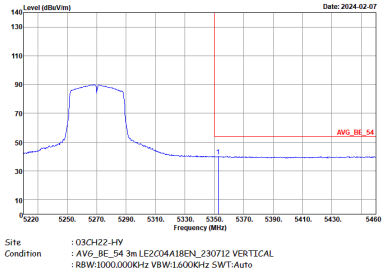	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310 - L	
	Horizontal	Fundamental
Peak	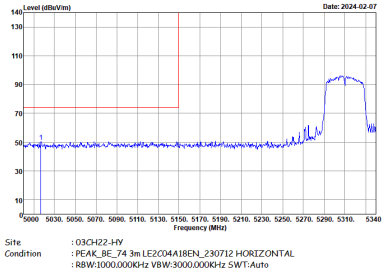 Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	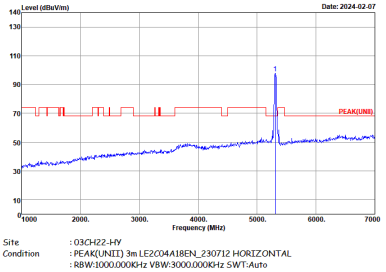 Site : 03CH22-HY Condition : PEAK(UNII) 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	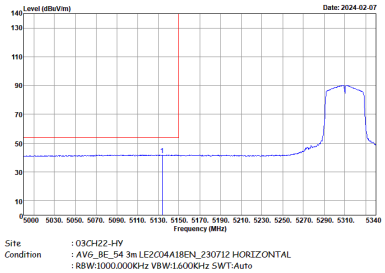 Site : 03CH22-HY Condition : AVG_BE_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:1600KHz SWT:Auto	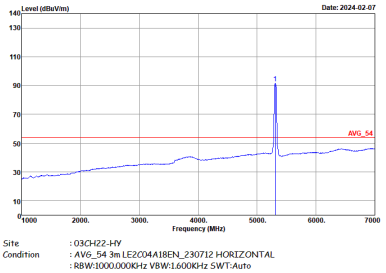 Site : 03CH22-HY Condition : AVG_54 3m LE2C04A18EN_230712 HORIZONTAL : RBW:1000.000KHz VBW:1600KHz SWT:Auto

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310 - R	
	Horizontal	Fundamental
Peak	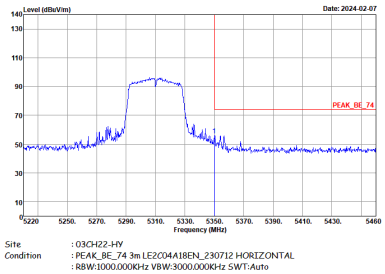	Left blank
Avg.	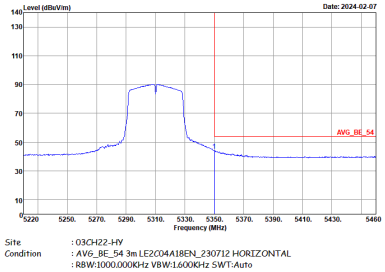	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310 - L	
	Vertical	Fundamental
Peak	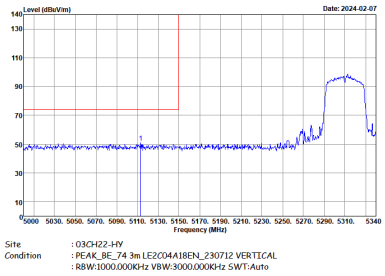	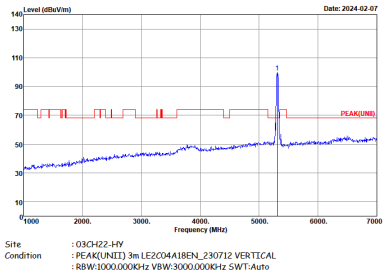
Avg.	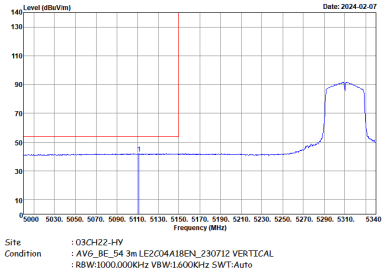	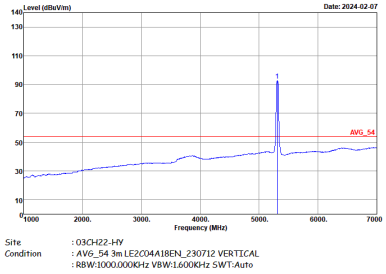

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310 - R	
	Vertical	Fundamental
Peak	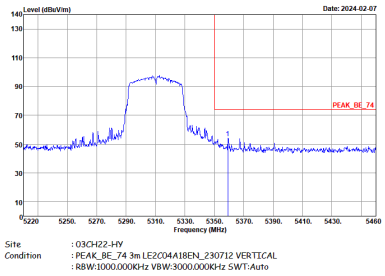	Left blank
Avg.	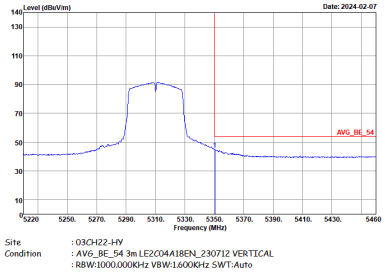	Left blank

Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH58 5290MHz - L	
	Horizontal	Fundamental
Peak	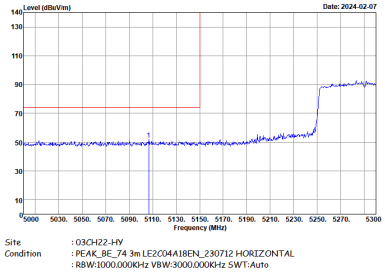	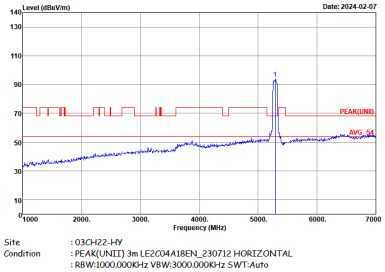
Avg.	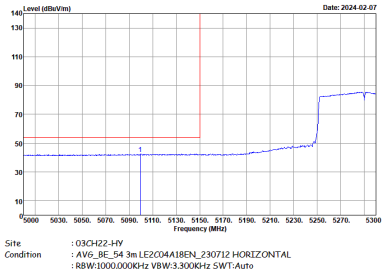	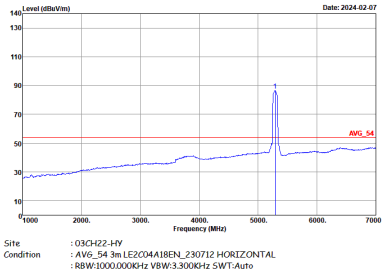

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH58 5290MHz - R	
	Horizontal	Fundamental
Peak	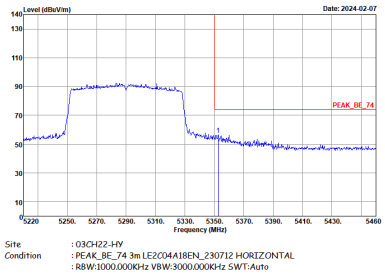	Left blank
Avg.	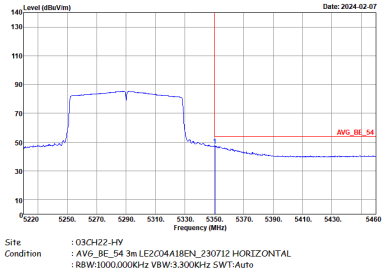	Left blank

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH58 5290MHz - L	
	Vertical	Fundamental
Peak	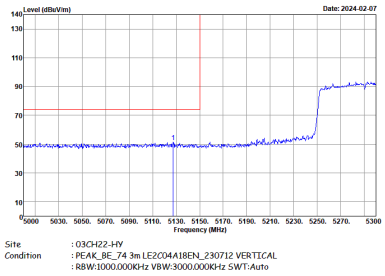	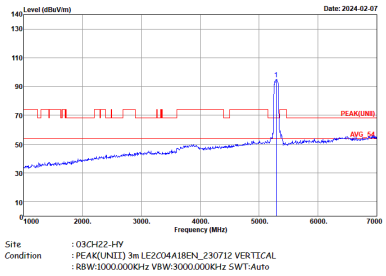
Avg.	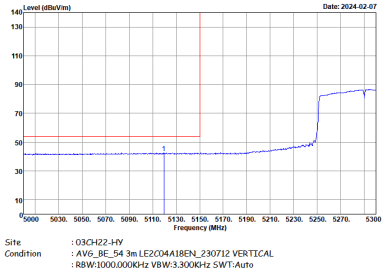	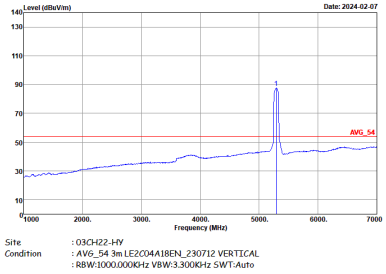

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH58 5290MHz - R	
	Vertical	Fundamental
Peak	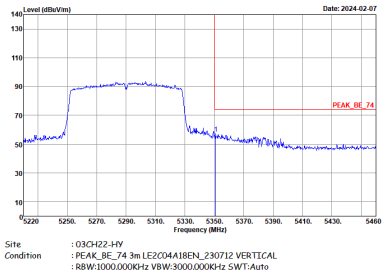	Left blank
Avg.	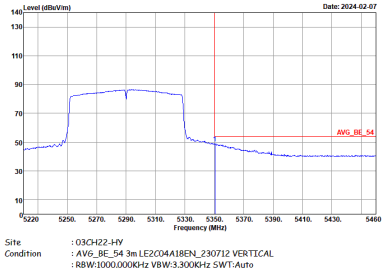	Left blank

Band 2 - 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11a CH52 5260MHz	
	Horizontal	Vertical
Peak Avg.	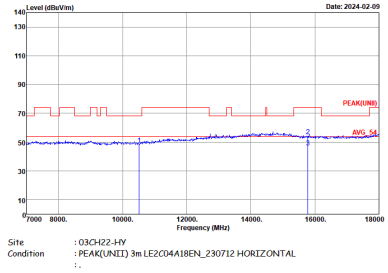	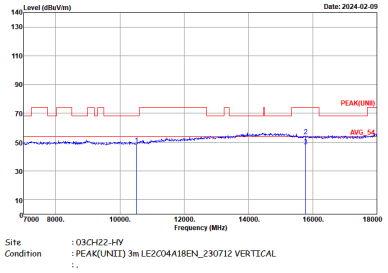

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11a CH52 5260MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	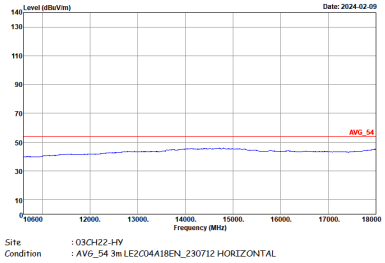	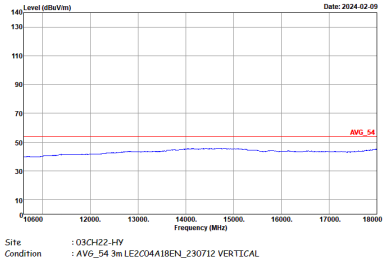

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11a CH60 5300MHz	
	Horizontal	Vertical
Peak Avg.	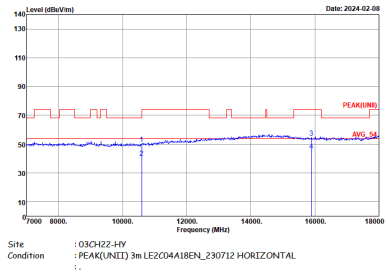	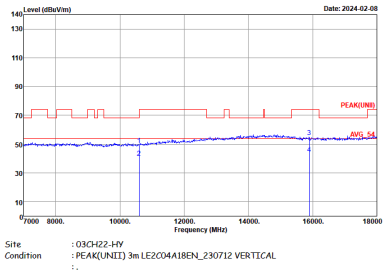

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11a CH60 5300MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	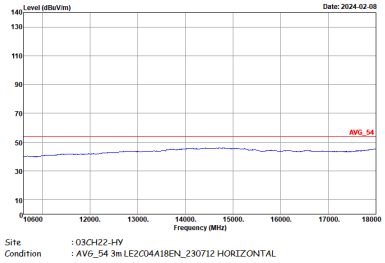	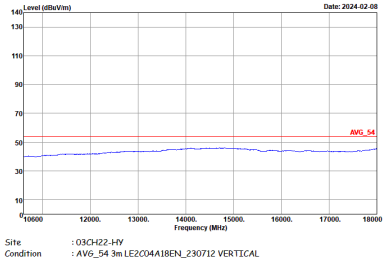

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11a CH64 5320MHz	
	Horizontal	Vertical
Peak Avg.	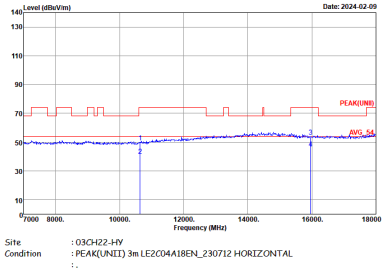	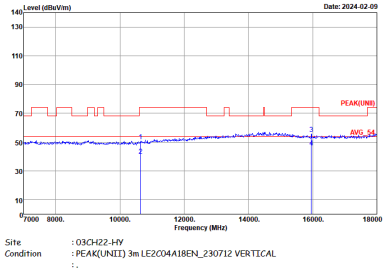

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11a CH64 5320MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	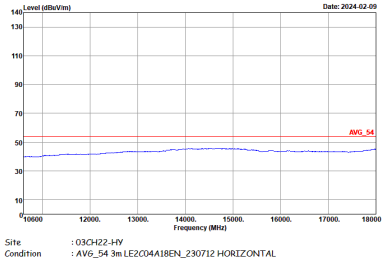	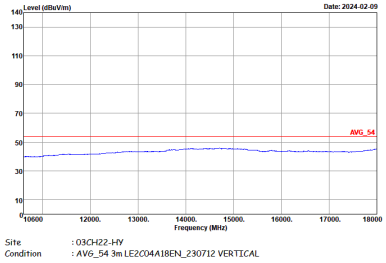

Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT20 CH52 5260MHz	
	Horizontal	Vertical
Peak Avg.	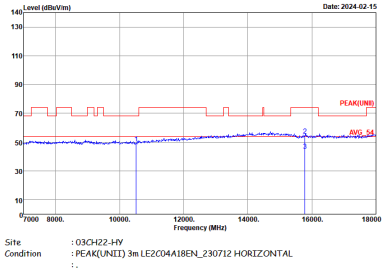	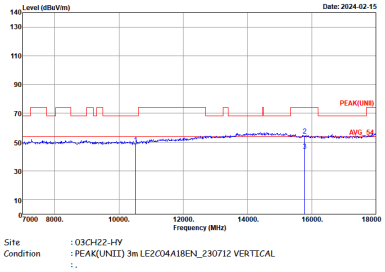

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT20 CH52 5260MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	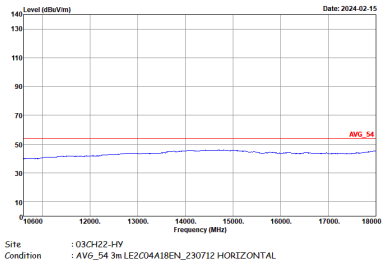	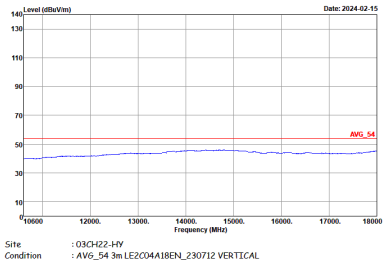

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT20 CH60 5300MHz	
	Horizontal	Vertical
Peak Avg.	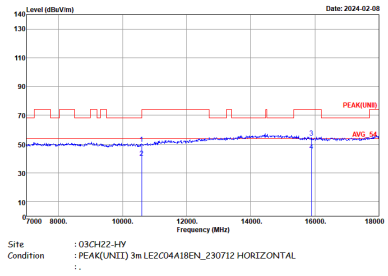	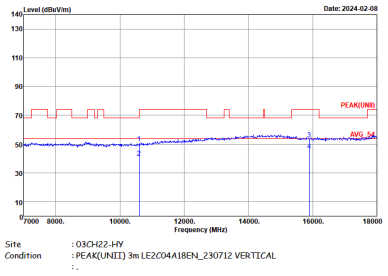

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT20 CH60 5300MHz	
	Horizontal	Vertical
10.6G ~18G Avg.		

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT20 CH64 5320MHz	
	Horizontal	Vertical
Peak Avg.	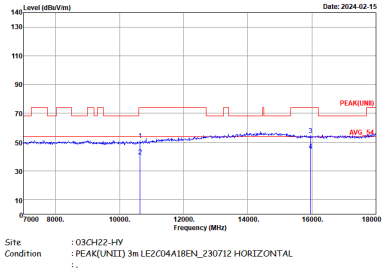	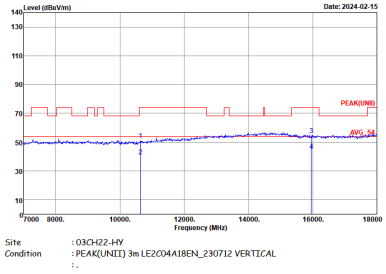

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT20 CH64 5320MHz	
	Horizontal	Vertical
10.6G ~18G Avg.		

Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT40 CH54 5270	
	Horizontal	Vertical
Peak Avg.	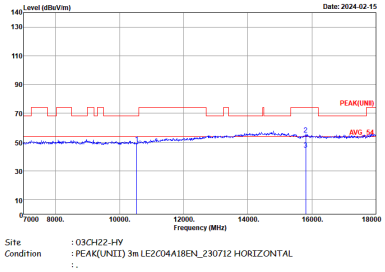	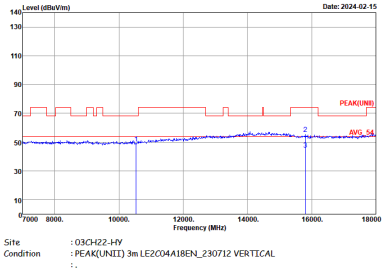

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT40 CH54 5270	
	Horizontal	Vertical
10.6G ~18G Avg.	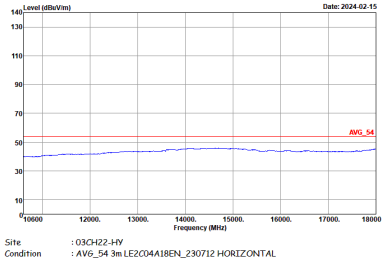	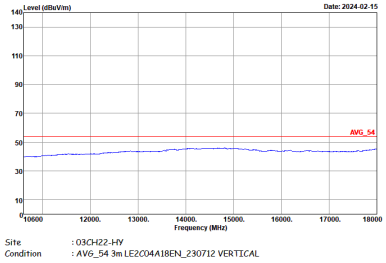

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT40 CH62 5310	
	Horizontal	Vertical
Peak Avg.	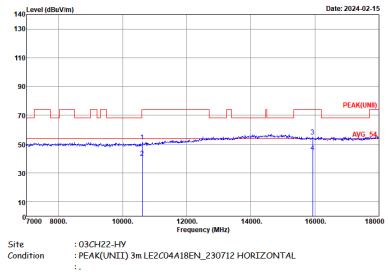	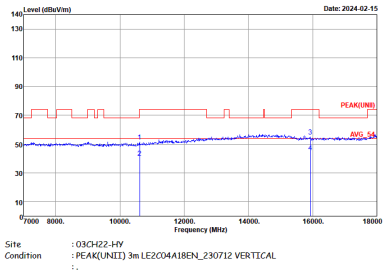

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT40 CH62 5310	
	Horizontal	Vertical
10.6G ~18G Avg.	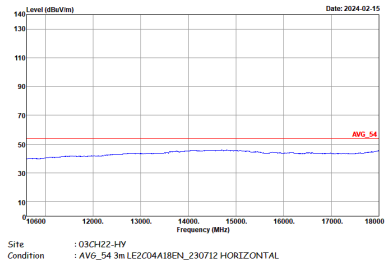	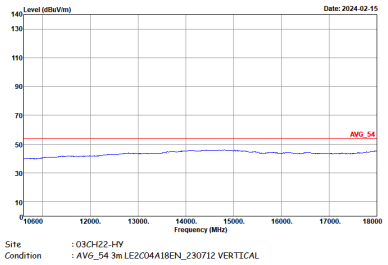

Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH58 5290MHz	
	Horizontal	Vertical
Peak Avg.	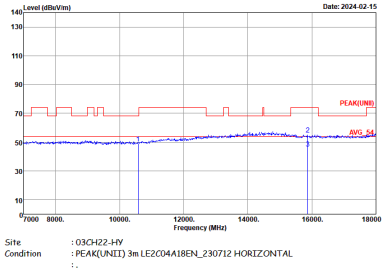	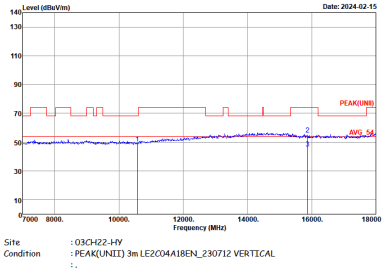

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH58 5290MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	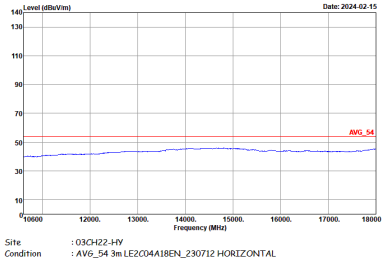	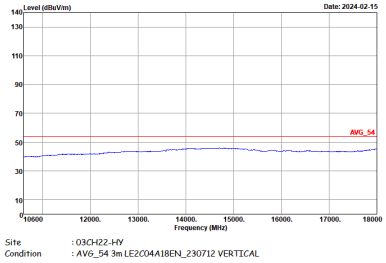

Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 3 5470~5725MHz Band Edge @ 3m	
ANT	802.11a CH100 5500MHz	
	Horizontal	Fundamental
Peak	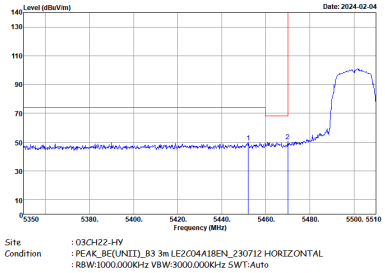	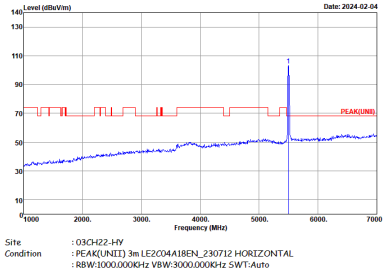
Avg.	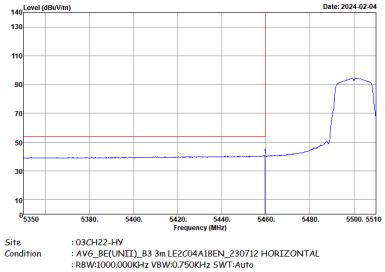	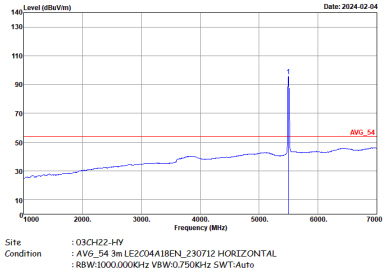

WIFI	Band 3 5470~5725MHz Band Edge @ 3m	
ANT	802.11a CH100 5500MHz	
	Vertical	Fundamental
Peak	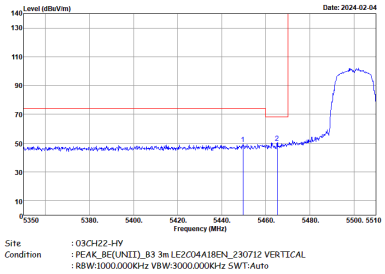	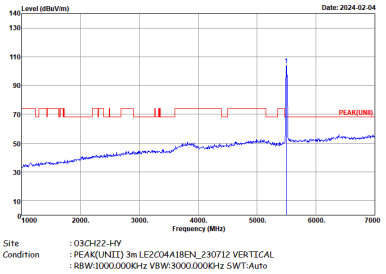
Avg.