

### #01\_WLAN2.4GHz\_802.11b 1Mbps\_Edge 1\_0mm\_Ch1


Communication System: 802.11b; Frequency: 2412.000 MHz  
Medium: HSL\_2450\_240421 Medium parameters used:  $f=2412.000$  MHz;  $\sigma=1.80$  S/m;  $\epsilon_r=39.1$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.59, 7.41, 8.57); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

**Area Scan (60.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.080 W/kg; SAR (10g) = 0.032 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm  
Power Drift = -0.07 dB  
SAR (1g) = 0.083 W/kg; SAR (8g) = 0.032 W/kg; SAR (10g) = 0.029 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.5 mm  
Ratio of SAR at M2 to SAR at M1 = 59.9 %

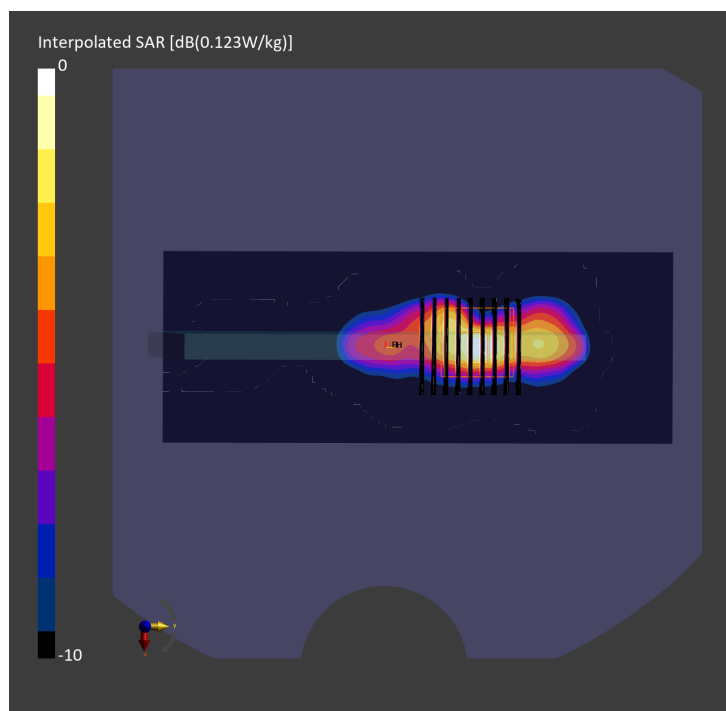

### #02\_WLAN5GHz\_802.11n-HT40 MCS0\_Edge 1\_0mm\_Ch54


Communication System: 802.11n; Frequency: 5270.000 MHz  
Medium: HSL\_5250\_240421 Medium parameters used:  $f=5270.000$  MHz;  $\sigma=4.61$  S/m;  $\epsilon_r=36.1$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.84, 5.74, 6.7); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

**Area Scan (60.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 1.08 W/kg; SAR (10g) = 0.248 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.00 dB  
SAR (1g) = 1.01 W/kg; SAR (8g) = 0.258 W/kg; SAR (10g) = 0.213 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.4 mm  
Ratio of SAR at M2 to SAR at M1 = 59.9 %

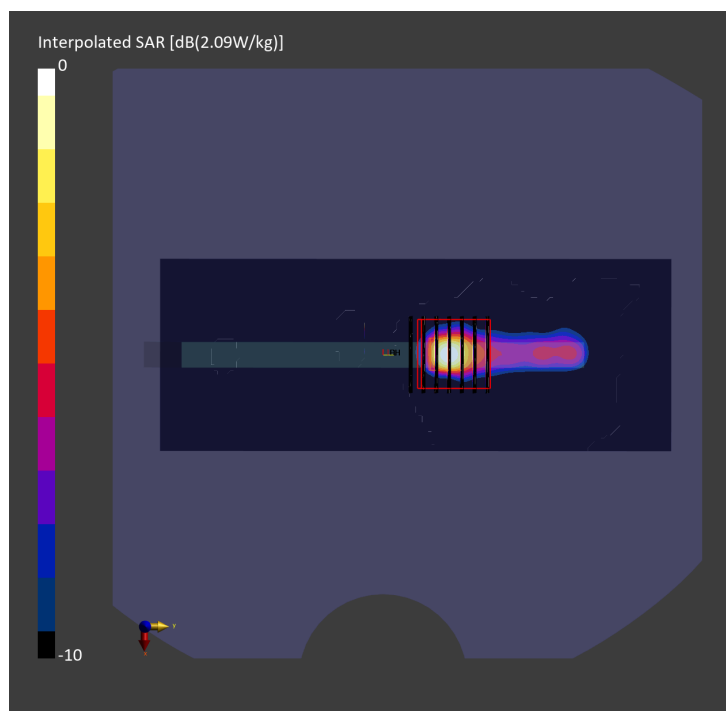

### #03\_WLAN5GHz\_802.11n-HT40 MCS0\_Edge 1\_0mm\_Ch110


Communication System: 802.11n; Frequency: 5550.000 MHz  
Medium: HSL\_5600\_240421 Medium parameters used:  $f=5550.000$  MHz;  $\sigma=4.89$  S/m;  $\epsilon_r=35.7$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.09, 4.94, 5.73); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

**Area Scan (60.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.795 W/kg; SAR (10g) = 0.183 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.16 dB  
SAR (1g) = 0.782 W/kg; SAR (8g) = 0.198 W/kg; SAR (10g) = 0.164 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.0 mm  
Ratio of SAR at M2 to SAR at M1 = 55.2 %

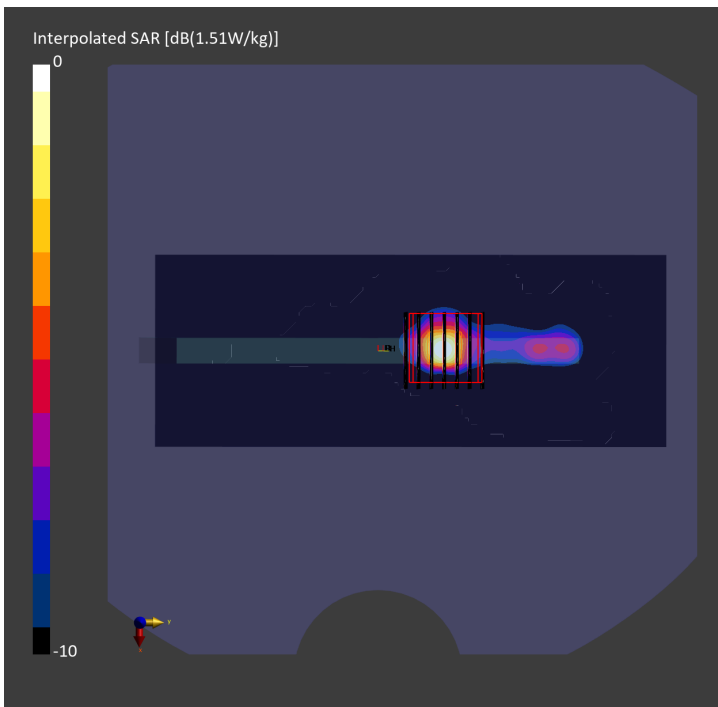

### #04\_WLAN5GHz\_802.11n-HT40 MCS0\_Edge 1\_0mm\_Ch151


Communication System: 802.11n; Frequency: 5755.000 MHz  
Medium: HSL\_5750\_240421 Medium parameters used:  $f=5755.000$  MHz;  $\sigma=5.08$  S/m;  $\epsilon_r=35.4$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.23, 5.12, 5.97); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

**Area Scan (60.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.972 W/kg; SAR (10g) = 0.251 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.19 dB  
SAR (1g) = 0.932 W/kg; SAR (8g) = 0.226 W/kg; SAR (10g) = 0.227 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.4 mm  
Ratio of SAR at M2 to SAR at M1 = 53.4 %

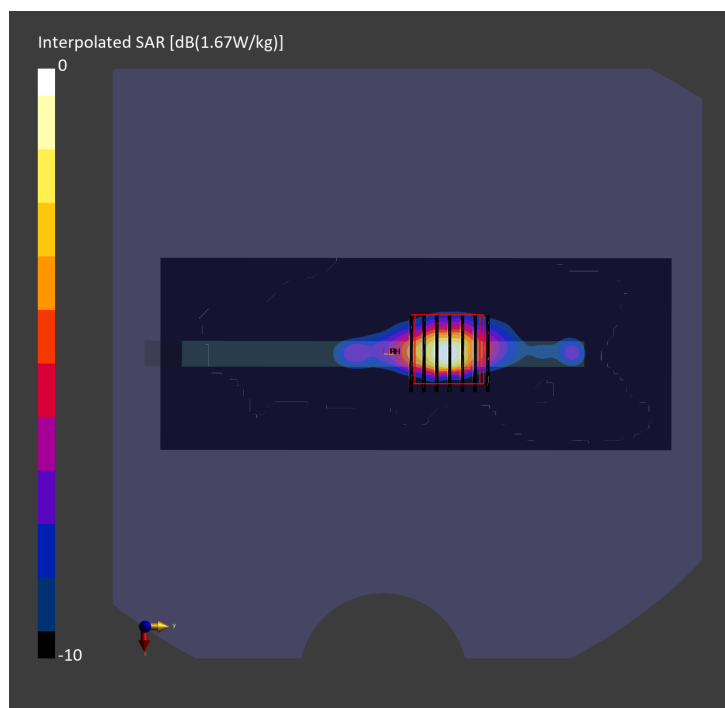

## #05\_Bluetooth\_1Mbps\_Edge 1\_0mm\_Ch39

Communication System: Bluetooth; Frequency: 2441.000 MHz  
Medium: HSL\_2450\_240421 Medium parameters used:  $f=2441.000$  MHz;  $\sigma=1.82$  S/m;  $\epsilon_r=39.0$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.59, 7.41, 8.57); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

**Area Scan (60.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.140 W/kg; SAR (10g) = 0.057 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm  
Power Drift = -0.16 dB  
SAR (1g) = 0.144 W/kg; SAR (8g) = 0.056 W/kg; SAR (10g) = 0.050 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.2 mm  
Ratio of SAR at M2 to SAR at M1 = 60.5 %

