

Date: 2024-08-28

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0mm_Ch1


Communication System: IEEE 802.11b WiFi 2.4 GHz ; Frequency: 2412.000 MHz
Medium: HSL_2450_240828 Medium parameters used: $f=2412.000$ MHz; $\sigma=1.80$ S/m; $\epsilon_r=39.5$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.34, 7.31, 8.07); Calibrated: 2024-06-04
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2023-12-07
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.06 W/kg; SAR (10g) = 0.418 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 1.06 W/kg; SAR (8g) = 0.465 W/kg; SAR (10g) = 0.413 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

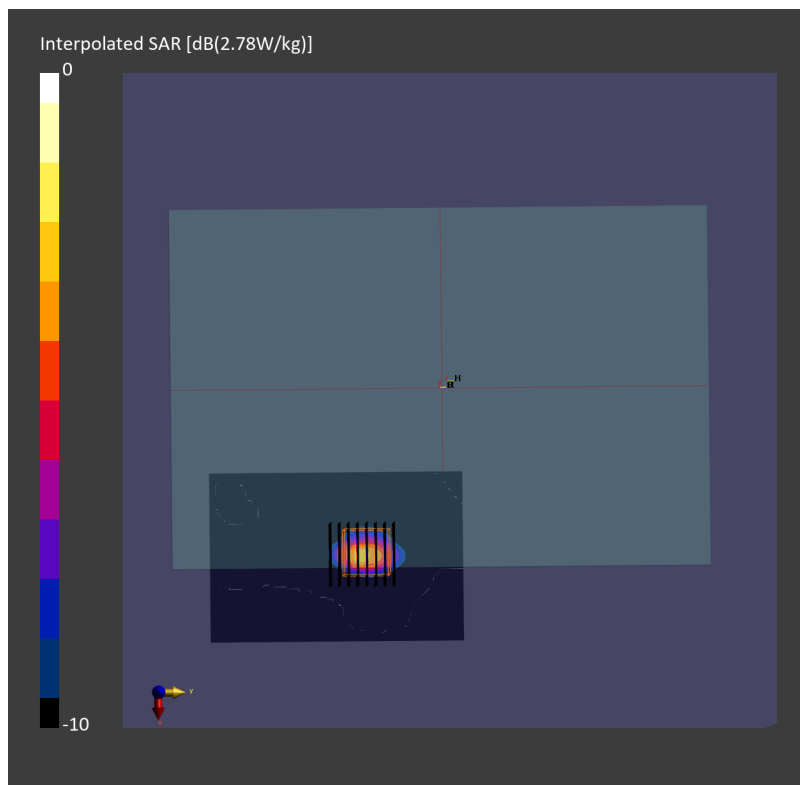

Date: 2024-08-21

#02_WLAN5GHz_802.11n-HT40 MCS0_Edge 1_0mm_Ch54

Communication System: IEEE 802.11n; Frequency: 5270.000 MHz

Medium: HSL_5G_240821 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.66$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.1, 5.1, 5.1); Calibrated: 2024-03-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2023-12-06
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.528 W/kg; SAR (10g) = 0.150 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.760 W/kg; SAR (8g) = 0.186 W/kg; SAR (10g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.5 %

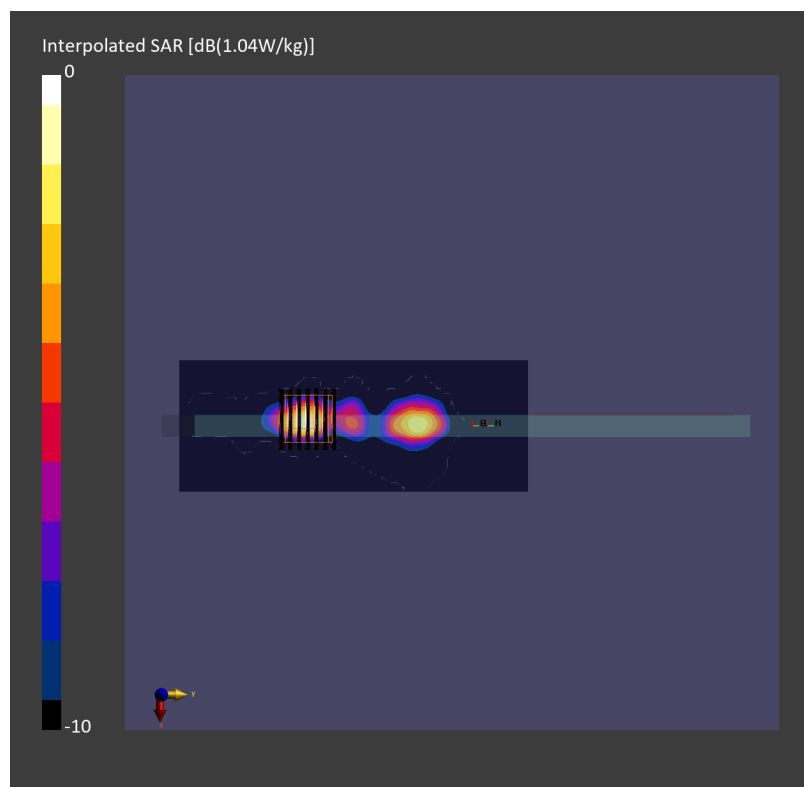

Date: 2024-08-21

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face _0mm_Ch106

Communication System: IEEE 802.11ac WiFi; Frequency: 5530.000 MHz

Medium: HSL_5G_240821 Medium parameters used: $f = 5530.000$ MHz; $\sigma = 4.96$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.3, 4.3, 4.3); Calibrated: 2024-03-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2023-12-06
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10626-AAD

Area Scan (60.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.902 W/kg; SAR (10g) = 0.261 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm

Power Drift = 0.10 dB

SAR (1g) = 0.866 W/kg; SAR (8g) = 0.264 W/kg; SAR (10g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.6 %

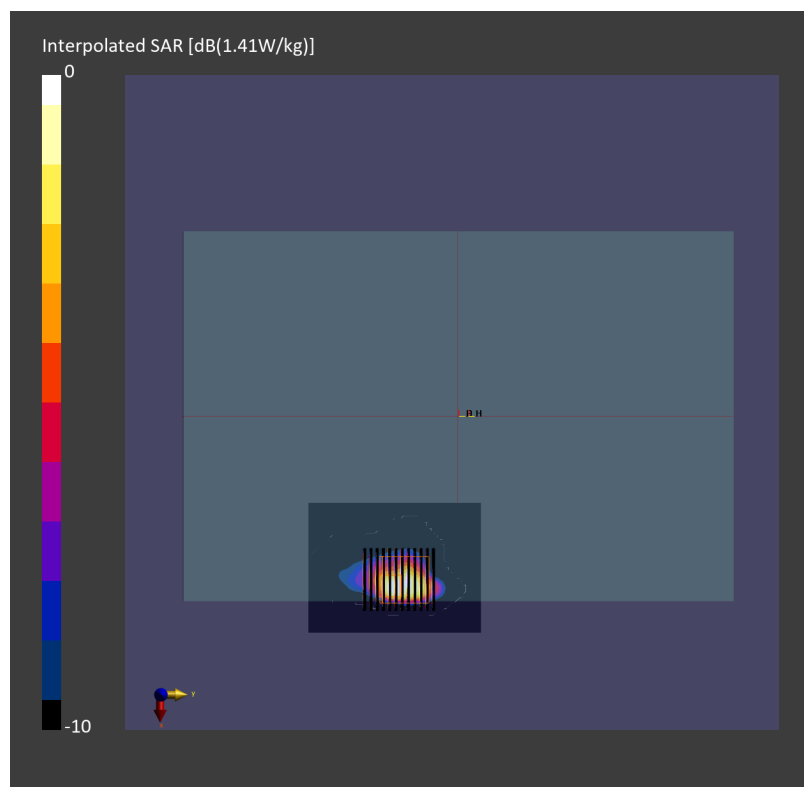

Date: 2024-08-21

#04_WLAN5GHz_802.11n-HT40 MCS0_Bottom Face_0mm_Ch151

Communication System: IEEE 802.11n; Frequency: 5755.000 MHz

Medium: HSL_5G_240821 Medium parameters used: $f = 5755.000$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.46, 4.46, 4.46); Calibrated: 2024-03-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2023-12-06
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

Area Scan (60.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.818 W/kg; SAR (10g) = 0.232 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm

Power Drift = 0.02 dB

SAR (1g) = 0.803 W/kg; SAR (8g) = 0.229 W/kg; SAR (10g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 61.5 %

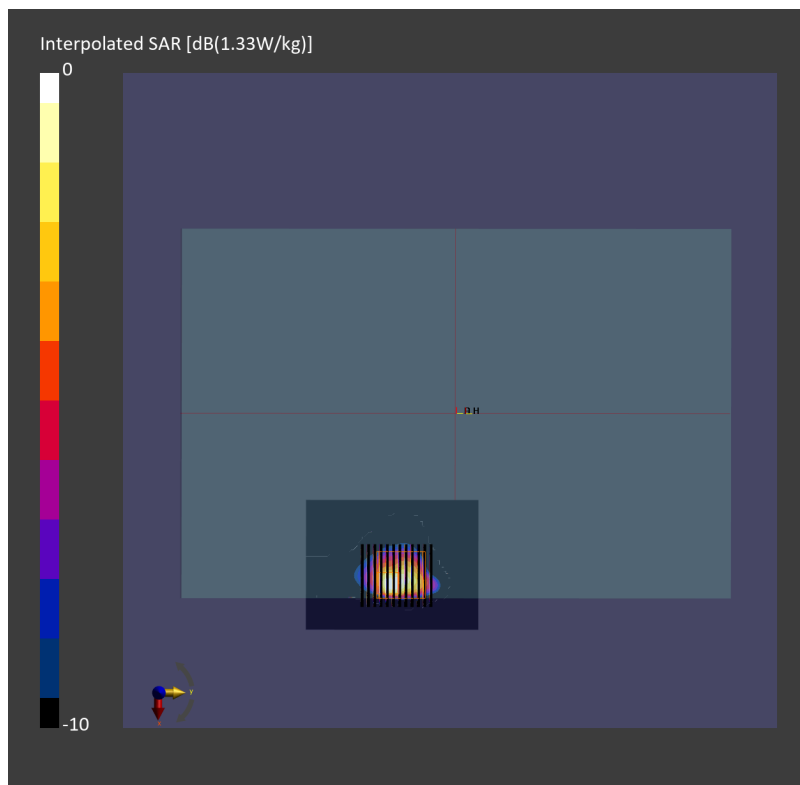

Date: 2024-08-21

#05_Bluetooth_1Mbps_Bottom Face_0mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz
Medium: HSL_2450_240821 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.39, 7.39, 7.39); Calibrated: 2024-03-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2023-12-06
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2155_for 0mm; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (60.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.664 W/kg; SAR (10g) = 0.265 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.657 W/kg; SAR (8g) = 0.279 W/kg; SAR (10g) = 0.247 W/kg
Smallest distance from peaks to all points 3 dB below = 5.5 mm
Ratio of SAR at M2 to SAR at M1 = 71.0 %

