



		28																																																																																	
Mode	Band Edge - L																																																																																		
	U-NII-2C_5.15-5.25_802.11ac VHT80_CH106_5530MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.54 62.81 74.00 -11.19</td> <td>52.07</td> <td>32.98</td> <td>10.60</td> <td>32.84</td> <td>0.00</td> <td>123</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>2 5461.06 64.26 68.20 -3.94</td> <td>53.51</td> <td>32.98</td> <td>10.61</td> <td>32.84</td> <td>0.00</td> <td>123</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg		1 5458.54 62.81 74.00 -11.19	52.07	32.98	10.60	32.84	0.00	123	62	PEAK	2 5461.06 64.26 68.20 -3.94	53.51	32.98	10.61	32.84	0.00	123	62	PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 97.39</td> <td>86.66</td> <td>32.90</td> <td>10.68</td> <td>32.85</td> <td>0.00</td> <td>123</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg		1 5530.00 97.39	86.66	32.90	10.68	32.85	0.00	123	62	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5458.54 62.81 74.00 -11.19	52.07	32.98	10.60	32.84	0.00	123	62	PEAK																																																																											
2 5461.06 64.26 68.20 -3.94	53.51	32.98	10.61	32.84	0.00	123	62	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5530.00 97.39	86.66	32.90	10.68	32.85	0.00	123	62	PEAK																																																																											
Avg	<p>Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.64 51.49 54.00 -2.51</td> <td>40.75</td> <td>32.90</td> <td>10.60</td> <td>32.84</td> <td>0.00</td> <td>123</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg		1 5457.64 51.49 54.00 -2.51	40.75	32.90	10.60	32.84	0.00	123	62	AVERAGE	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 90.54</td> <td>79.81</td> <td>32.90</td> <td>10.68</td> <td>32.85</td> <td>0.00</td> <td>123</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg		1 5530.00 90.54	79.81	32.90	10.68	32.85	0.00	123	62	AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5457.64 51.49 54.00 -2.51	40.75	32.90	10.60	32.84	0.00	123	62	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5530.00 90.54	79.81	32.90	10.68	32.85	0.00	123	62	AVERAGE																																																																											



Mode	28																																														
	Band Edge - R																																														
	U-NII-2C_5.15-5.25_802.11ac VHT80_CH106_5530MHz																																														
ANT	1																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Site : 03CH11-HY          Condition: PEAK_BE(U-NII)_B3 3m 91200_01620_230817 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5728.34</td> <td>51.63</td> <td>68.20</td> <td>-16.57</td> <td>40.11</td> <td>33.61</td> <td>10.82</td> <td>32.91</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>123 62 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5728.34	51.63	68.20	-16.57	40.11	33.61	10.82	32.91	0.00									123 62 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5728.34	51.63	68.20	-16.57	40.11	33.61	10.82	32.91	0.00																																							
								123 62 PEAK																																							



		28																																																																																	
Mode	Band Edge - L																																																																																		
	U-NII-2C_5.15-5.25_802.11ac VHT80_CH106_5530MHz																																																																																		
ANT	1																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE(UNII)_B3 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5451.34 62.09 74.00 -11.91</td> <td>51.33</td> <td>33.00</td> <td>10.60</td> <td>32.84</td> <td>0.00</td> <td>100</td> <td>199</td> <td>PEAK</td> </tr> <tr> <td>2 5467.18 63.88 68.20 -4.32</td> <td>53.14</td> <td>32.97</td> <td>10.61</td> <td>32.84</td> <td>0.00</td> <td>100</td> <td>199</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg		1 5451.34 62.09 74.00 -11.91	51.33	33.00	10.60	32.84	0.00	100	199	PEAK	2 5467.18 63.88 68.20 -4.32	53.14	32.97	10.61	32.84	0.00	100	199	PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 96.05</td> <td>-----</td> <td>85.33</td> <td>32.90</td> <td>10.67</td> <td>32.85</td> <td>0.00</td> <td>100</td> <td>199 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg		1 5530.00 96.05	-----	85.33	32.90	10.67	32.85	0.00	100	199 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5451.34 62.09 74.00 -11.91	51.33	33.00	10.60	32.84	0.00	100	199	PEAK																																																																											
2 5467.18 63.88 68.20 -4.32	53.14	32.97	10.61	32.84	0.00	100	199	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5530.00 96.05	-----	85.33	32.90	10.67	32.85	0.00	100	199 PEAK																																																																											
Avg	<p>Site : 03CH11-HY Condition: AVG_BE(UNII)_B3 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.26 50.53 54.00 -3.47</td> <td>39.78</td> <td>32.90</td> <td>10.61</td> <td>32.84</td> <td>0.00</td> <td>100</td> <td>199</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg		1 5459.26 50.53 54.00 -3.47	39.78	32.90	10.61	32.84	0.00	100	199	AVERAGE	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 89.35</td> <td>-----</td> <td>78.62</td> <td>32.90</td> <td>10.68</td> <td>32.85</td> <td>0.00</td> <td>100</td> <td>199 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg		1 5530.00 89.35	-----	78.62	32.90	10.68	32.85	0.00	100	199 AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5459.26 50.53 54.00 -3.47	39.78	32.90	10.61	32.84	0.00	100	199	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dBuV/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5530.00 89.35	-----	78.62	32.90	10.68	32.85	0.00	100	199 AVERAGE																																																																											



Mode	28																																			
	Band Edge - R																																			
	U-NII-2C_5.15-5.25_802.11ac VHT80_CH106_5530MHz																																			
ANT	1																																			
Pol.	Vertical	Fundamental																																		
Peak	<p>Site : 03CH11-HY          Condition: PEAK_BE(U-NII)_B3 3m 91200_01620_230817 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5743.38</td> <td>52.93</td> <td>68.20</td> <td>-15.27</td> <td>41.36</td> <td>33.67</td> <td>10.82</td> <td>32.92</td> <td>0.00</td> <td>100</td> <td>199</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5743.38	52.93	68.20	-15.27	41.36	33.67	10.82	32.92	0.00	100	199	PEAK	Blank
Freq	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																									
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																										
1 5743.38	52.93	68.20	-15.27	41.36	33.67	10.82	32.92	0.00	100	199	PEAK																									



Mode	28																																																																																																													
	Harmonic																																																																																																													
	U-NII-2C_5.15-5.25_802.11ac VHT80_CH106_5530MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>51.21</td> <td>38.70</td> <td>17.79</td> <td>61.66</td> <td>0.29</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>47.19</td> <td>68.20</td> <td>-21.01</td> <td>46.00</td> <td>38.10</td> <td>22.54</td> <td>59.77</td> <td>0.32</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11060.00	46.33	74.00	-27.67	51.21	38.70	17.79	61.66	0.29	--	--	PEAK	2	16590.00	47.19	68.20	-21.01	46.00	38.10	22.54	59.77	0.32	--	--	PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>47.22</td> <td>74.00</td> <td>-26.78</td> <td>52.10</td> <td>38.70</td> <td>17.79</td> <td>61.66</td> <td>0.29</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>47.94</td> <td>68.20</td> <td>-20.26</td> <td>46.75</td> <td>38.10</td> <td>22.54</td> <td>59.77</td> <td>0.32</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11060.00	47.22	74.00	-26.78	52.10	38.70	17.79	61.66	0.29	--	--	PEAK	2	16590.00	47.94	68.20	-20.26	46.75	38.10	22.54	59.77	0.32	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11060.00	46.33	74.00	-27.67	51.21	38.70	17.79	61.66	0.29	--	--	PEAK																																																																																																		
2	16590.00	47.19	68.20	-21.01	46.00	38.10	22.54	59.77	0.32	--	--	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11060.00	47.22	74.00	-26.78	52.10	38.70	17.79	61.66	0.29	--	--	PEAK																																																																																																		
2	16590.00	47.94	68.20	-20.26	46.75	38.10	22.54	59.77	0.32	--	--	PEAK																																																																																																		







	28	
<b>Mode</b>	<b>Harmonic</b>	
	<b>U-NII-2C_5.15-5.25_802.11ac VHT80_CH106_5530MHz</b>	
<b>ANT</b>	1	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>14.47G</b> <b>~14.5G</b> <b>Avg</b>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL</p>
	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL</p>



Mode	29																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																																																																																																																																							
ANT	1																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH11-HY Condition: QP 3m Bilog_35414_231007 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>31.56</td><td>40.00</td><td>-8.44</td><td>39.68</td><td>23.69</td><td>0.48</td><td>32.45</td><td>0.16</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>208.48</td><td>23.55</td><td>43.50</td><td>-19.95</td><td>38.94</td><td>15.01</td><td>1.72</td><td>32.33</td><td>0.21</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>229.02</td><td>25.31</td><td>46.00</td><td>-20.69</td><td>39.55</td><td>15.97</td><td>1.03</td><td>32.24</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>490.51</td><td>23.79</td><td>46.00</td><td>-22.21</td><td>29.47</td><td>23.69</td><td>2.86</td><td>32.46</td><td>0.23</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>753.62</td><td>29.84</td><td>46.00</td><td>-16.16</td><td>29.43</td><td>28.02</td><td>3.58</td><td>31.53</td><td>0.34</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>959.26</td><td>31.71</td><td>46.00</td><td>-14.29</td><td>27.00</td><td>30.96</td><td>4.10</td><td>30.89</td><td>0.46</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	30.97	31.56	40.00	-8.44	39.68	23.69	0.48	32.45	0.16	--	--	Peak	2	208.48	23.55	43.50	-19.95	38.94	15.01	1.72	32.33	0.21	--	--	Peak	3	229.02	25.31	46.00	-20.69	39.55	15.97	1.03	32.24	0.20	--	--	Peak	4	490.51	23.79	46.00	-22.21	29.47	23.69	2.86	32.46	0.23	--	--	Peak	5	753.62	29.84	46.00	-16.16	29.43	28.02	3.58	31.53	0.34	--	--	Peak	6	959.26	31.71	46.00	-14.29	27.00	30.96	4.10	30.89	0.46	--	--	Peak	<p>Site : 03CH11-HY Condition: QP 3m Bilog_35414_231007 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>39.70</td><td>31.94</td><td>40.00</td><td>-8.06</td><td>43.99</td><td>19.64</td><td>0.50</td><td>32.33</td><td>0.14</td><td>100</td><td>273</td><td>QP</td></tr> <tr><td>2</td><td>90.14</td><td>26.00</td><td>43.50</td><td>-16.70</td><td>43.36</td><td>14.70</td><td>0.96</td><td>32.42</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>229.02</td><td>21.36</td><td>46.00</td><td>-24.64</td><td>35.60</td><td>15.97</td><td>1.03</td><td>32.24</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>468.44</td><td>24.48</td><td>46.00</td><td>-21.52</td><td>30.29</td><td>23.28</td><td>2.76</td><td>32.00</td><td>0.23</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>756.53</td><td>31.15</td><td>46.00</td><td>-14.85</td><td>30.71</td><td>28.04</td><td>3.59</td><td>31.53</td><td>0.34</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>959.26</td><td>33.82</td><td>46.00</td><td>-12.18</td><td>29.19</td><td>30.96</td><td>4.10</td><td>30.89</td><td>0.46</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	39.70	31.94	40.00	-8.06	43.99	19.64	0.50	32.33	0.14	100	273	QP	2	90.14	26.00	43.50	-16.70	43.36	14.70	0.96	32.42	0.20	--	--	Peak	3	229.02	21.36	46.00	-24.64	35.60	15.97	1.03	32.24	0.20	--	--	Peak	4	468.44	24.48	46.00	-21.52	30.29	23.28	2.76	32.00	0.23	--	--	Peak	5	756.53	31.15	46.00	-14.85	30.71	28.04	3.59	31.53	0.34	--	--	Peak	6	959.26	33.82	46.00	-12.18	29.19	30.96	4.10	30.89	0.46	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	30.97	31.56	40.00	-8.44	39.68	23.69	0.48	32.45	0.16	--	--	Peak																																																																																																																																																																												
2	208.48	23.55	43.50	-19.95	38.94	15.01	1.72	32.33	0.21	--	--	Peak																																																																																																																																																																												
3	229.02	25.31	46.00	-20.69	39.55	15.97	1.03	32.24	0.20	--	--	Peak																																																																																																																																																																												
4	490.51	23.79	46.00	-22.21	29.47	23.69	2.86	32.46	0.23	--	--	Peak																																																																																																																																																																												
5	753.62	29.84	46.00	-16.16	29.43	28.02	3.58	31.53	0.34	--	--	Peak																																																																																																																																																																												
6	959.26	31.71	46.00	-14.29	27.00	30.96	4.10	30.89	0.46	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	39.70	31.94	40.00	-8.06	43.99	19.64	0.50	32.33	0.14	100	273	QP																																																																																																																																																																												
2	90.14	26.00	43.50	-16.70	43.36	14.70	0.96	32.42	0.20	--	--	Peak																																																																																																																																																																												
3	229.02	21.36	46.00	-24.64	35.60	15.97	1.03	32.24	0.20	--	--	Peak																																																																																																																																																																												
4	468.44	24.48	46.00	-21.52	30.29	23.28	2.76	32.00	0.23	--	--	Peak																																																																																																																																																																												
5	756.53	31.15	46.00	-14.85	30.71	28.04	3.59	31.53	0.34	--	--	Peak																																																																																																																																																																												
6	959.26	33.82	46.00	-12.18	29.19	30.96	4.10	30.89	0.46	--	--	Peak																																																																																																																																																																												

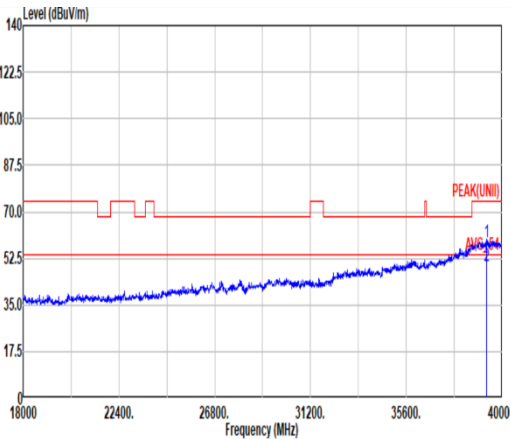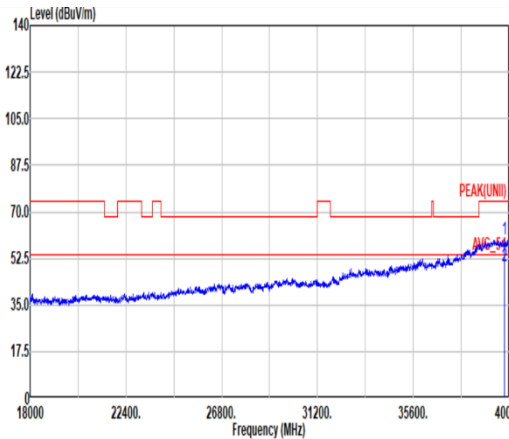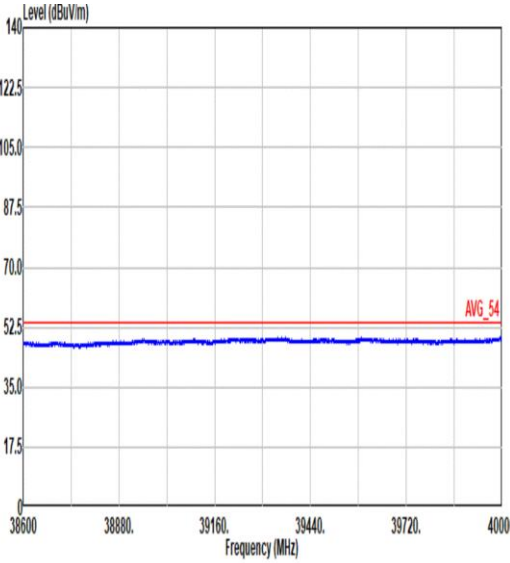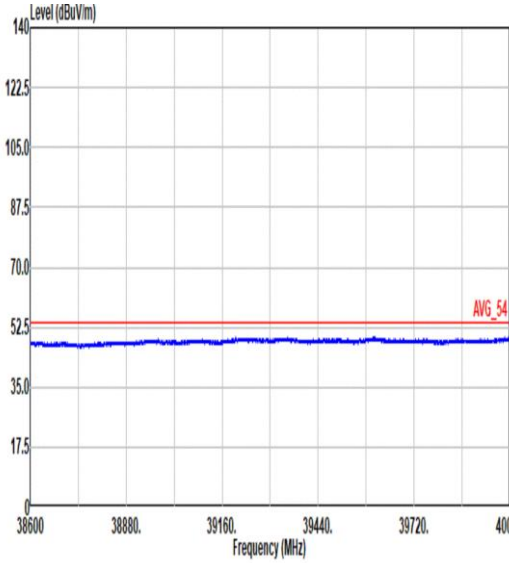

Mode	41																																																																																																									
	SHF																																																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak	 <p>Site : 03CH11-HY Condition: PEAK(UNII) 1m SHF_00993_231124 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>39288.83</td> <td>58.70</td> <td>74.00</td> <td>-15.30</td> <td>38.01</td> <td>44.77</td> <td>36.23</td> <td>50.77</td> <td>-9.54</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>39288.83</td> <td>49.89</td> <td>54.00</td> <td>-4.11</td> <td>29.20</td> <td>44.77</td> <td>36.23</td> <td>50.77</td> <td>-9.54</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	39288.83	58.70	74.00	-15.30	38.01	44.77	36.23	50.77	-9.54	--	PEAK	2	39288.83	49.89	54.00	-4.11	29.20	44.77	36.23	50.77	-9.54	--	AVERAGE	 <p>Site : 03CH11-HY Condition: PEAK(UNII) 1m SHF_00993_231124 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>39772.01</td> <td>59.85</td> <td>74.00</td> <td>-14.15</td> <td>39.18</td> <td>44.47</td> <td>35.69</td> <td>49.95</td> <td>-9.54</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>39772.01</td> <td>49.50</td> <td>54.00</td> <td>-4.50</td> <td>28.83</td> <td>44.47</td> <td>35.69</td> <td>49.95</td> <td>-9.54</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	39772.01	59.85	74.00	-14.15	39.18	44.47	35.69	49.95	-9.54	--	PEAK	2	39772.01	49.50	54.00	-4.50	28.83	44.47	35.69	49.95	-9.54	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	39288.83	58.70	74.00	-15.30	38.01	44.77	36.23	50.77	-9.54	--	PEAK																																																																																															
2	39288.83	49.89	54.00	-4.11	29.20	44.77	36.23	50.77	-9.54	--	AVERAGE																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	39772.01	59.85	74.00	-14.15	39.18	44.47	35.69	49.95	-9.54	--	PEAK																																																																																															
2	39772.01	49.50	54.00	-4.50	28.83	44.47	35.69	49.95	-9.54	--	AVERAGE																																																																																															
38.6G ~40G Avg	 <p>Site : 03CH11-HY Condition: AVG_54 1m SHF_00993_231124 HORIZONTAL</p>	 <p>Site : 03CH11-HY Condition: AVG_54 1m SHF_00993_231124 Vertical</p>																																																																																																								







# Appendix D. Duty Cycle Plots

<For Radiated Spurious Emission test>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	96.86	1390	0.719	820Hz
1	5GHz 802.11n HT20	96.28	1295	0.772	820Hz
1	5GHz 802.11n HT40	93.64	648	1.543	1.6kHz
1	5GHz 802.11ac VHT80	87.80	324	3.086	3.3KHz

<Ant. 1>

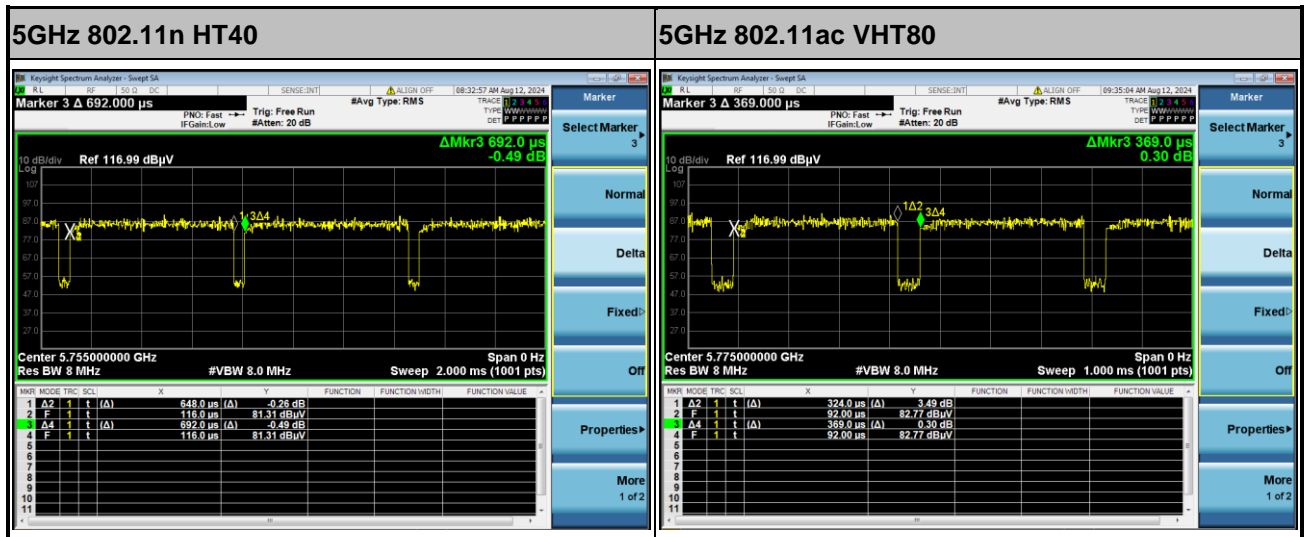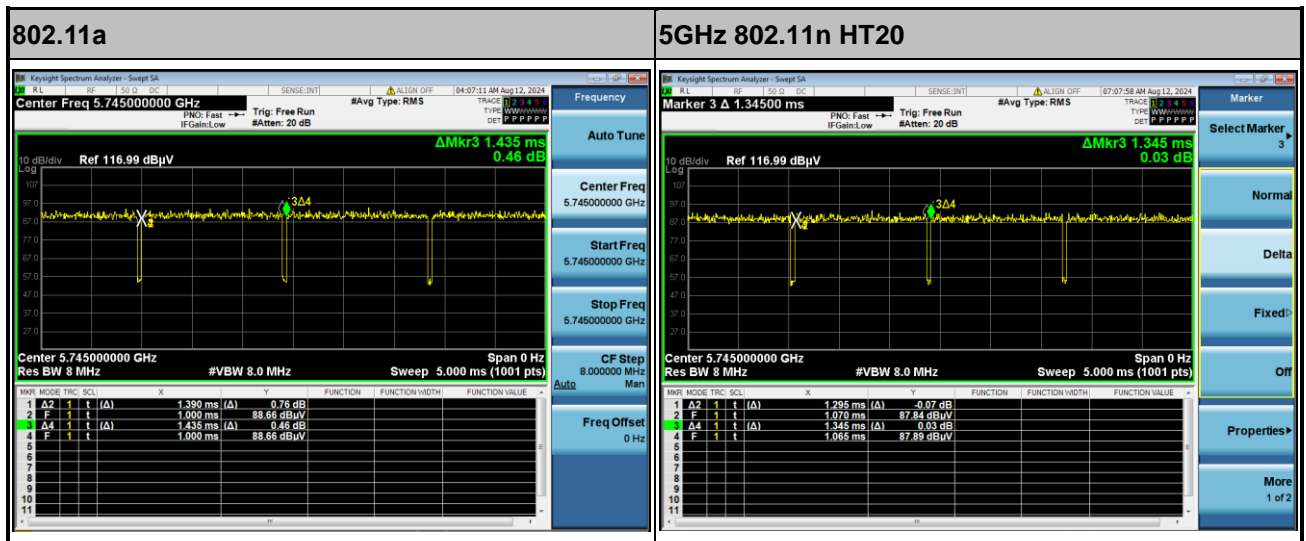



<For Conducted test>

Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
1	802.11a	96.67	1392	0.15
1	5GHz 802.11n HT20	97.02	1304	0.13
1	5GHz 802.11n HT40	93.53	650	0.29
1	5GHz 802.11ac VHT80	88.04	324	0.54

<Ant. 1>

