



Mode	36																																																																																											
	Harmonic																																																																																											
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11510.00</td> <td>47.09</td> <td>74.00 -26.91</td> <td>51.46</td> <td>38.98</td> <td>18.27</td> <td>61.92</td> <td>0.30</td> <td>-- -- PEAK</td> </tr> <tr> <td>2 17265.00</td> <td>47.09</td> <td>68.20 -21.11</td> <td>43.23</td> <td>38.47</td> <td>23.19</td> <td>58.16</td> <td>0.36</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11510.00	47.09	74.00 -26.91	51.46	38.98	18.27	61.92	0.30	-- -- PEAK	2 17265.00	47.09	68.20 -21.11	43.23	38.47	23.19	58.16	0.36	-- -- PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11510.00</td> <td>47.10</td> <td>74.00 -26.90</td> <td>51.47</td> <td>38.98</td> <td>18.27</td> <td>61.92</td> <td>0.30</td> <td>-- -- PEAK</td> </tr> <tr> <td>2 17265.00</td> <td>47.48</td> <td>68.20 -20.72</td> <td>43.62</td> <td>38.47</td> <td>23.19</td> <td>58.16</td> <td>0.36</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11510.00	47.10	74.00 -26.90	51.47	38.98	18.27	61.92	0.30	-- -- PEAK	2 17265.00	47.48	68.20 -20.72	43.62	38.47	23.19	58.16	0.36	-- -- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 11510.00	47.09	74.00 -26.91	51.46	38.98	18.27	61.92	0.30	-- -- PEAK																																																																																				
2 17265.00	47.09	68.20 -21.11	43.23	38.47	23.19	58.16	0.36	-- -- PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																						
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1 11510.00	47.10	74.00 -26.90	51.47	38.98	18.27	61.92	0.30	-- -- PEAK																																																																																				
2 17265.00	47.48	68.20 -20.72	43.62	38.47	23.19	58.16	0.36	-- -- PEAK																																																																																				



<b>Mode</b>	36	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
<b>ANT</b>	1	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>14.47G</b> <b>~14.5G</b> <b>Avg</b>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_230817 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_230817 VERTICAL</p>
	<p>Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_230817 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_230817 VERTICAL</p>



Mode	37																																																																																											
	Band Edge - L																																																																																											
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE(B4)_16-24 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5649.53</td> <td>51.74</td> <td>68.20</td> <td>-16.46</td> <td>40.75</td> <td>33.10</td> <td>10.78</td> <td>32.09</td> <td>0.00</td> <td>292 146 PEAK</td> </tr> <tr> <td>2 5650.90</td> <td>50.08</td> <td>68.87</td> <td>-18.79</td> <td>39.08</td> <td>33.11</td> <td>10.78</td> <td>32.09</td> <td>0.00</td> <td>292 146 PEAK</td> </tr> <tr> <td>3 5701.21</td> <td>51.17</td> <td>105.54</td> <td>-54.37</td> <td>39.76</td> <td>33.50</td> <td>10.81</td> <td>32.90</td> <td>0.00</td> <td>292 146 PEAK</td> </tr> <tr> <td>4 5720.12</td> <td>49.73</td> <td>111.07</td> <td>-61.34</td> <td>38.25</td> <td>33.58</td> <td>10.81</td> <td>32.91</td> <td>0.00</td> <td>292 146 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1 5649.53	51.74	68.20	-16.46	40.75	33.10	10.78	32.09	0.00	292 146 PEAK	2 5650.90	50.08	68.87	-18.79	39.08	33.11	10.78	32.09	0.00	292 146 PEAK	3 5701.21	51.17	105.54	-54.37	39.76	33.50	10.81	32.90	0.00	292 146 PEAK	4 5720.12	49.73	111.07	-61.34	38.25	33.58	10.81	32.91	0.00	292 146 PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>100.90</td> <td>-----</td> <td>89.09</td> <td>33.90</td> <td>10.85</td> <td>32.94</td> <td>0.00</td> <td>292</td> <td>146 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1 5795.00	100.90	-----	89.09	33.90	10.85	32.94	0.00	292	146 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																			
1 5649.53	51.74	68.20	-16.46	40.75	33.10	10.78	32.09	0.00	292 146 PEAK																																																																																			
2 5650.90	50.08	68.87	-18.79	39.08	33.11	10.78	32.09	0.00	292 146 PEAK																																																																																			
3 5701.21	51.17	105.54	-54.37	39.76	33.50	10.81	32.90	0.00	292 146 PEAK																																																																																			
4 5720.12	49.73	111.07	-61.34	38.25	33.58	10.81	32.91	0.00	292 146 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																			
1 5795.00	100.90	-----	89.09	33.90	10.85	32.94	0.00	292	146 PEAK																																																																																			
Avg	Blank	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>93.95</td> <td>-----</td> <td>82.15</td> <td>33.88</td> <td>10.85</td> <td>32.93</td> <td>0.00</td> <td>292</td> <td>146 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1 5795.00	93.95	-----	82.15	33.88	10.85	32.93	0.00	292	146 AVERAGE																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																			
1 5795.00	93.95	-----	82.15	33.88	10.85	32.93	0.00	292	146 AVERAGE																																																																																			



Mode	37																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																				
ANT	1																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<p>Site : 03CH11-HY          Condition: PEAK_BE(B4)_16-24 3m 91200_01620_230817 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>54.75</td> <td>110.83</td> <td>-56.08</td> <td>42.81</td> <td>34.02</td> <td>10.87</td> <td>32.95</td> <td>0.00</td> <td>292</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.12</td> <td>54.98</td> <td>105.73</td> <td>-50.75</td> <td>42.97</td> <td>34.09</td> <td>10.88</td> <td>32.96</td> <td>0.00</td> <td>292</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.72</td> <td>52.55</td> <td>69.88</td> <td>-17.33</td> <td>40.39</td> <td>34.25</td> <td>10.89</td> <td>32.98</td> <td>0.00</td> <td>292</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5936.98</td> <td>51.79</td> <td>68.20</td> <td>-16.41</td> <td>39.60</td> <td>34.27</td> <td>10.90</td> <td>32.98</td> <td>0.00</td> <td>292</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.99	54.75	110.83	-56.08	42.81	34.02	10.87	32.95	0.00	292	146	PEAK	2	5873.12	54.98	105.73	-50.75	42.97	34.09	10.88	32.96	0.00	292	146	PEAK	3	5922.72	52.55	69.88	-17.33	40.39	34.25	10.89	32.98	0.00	292	146	PEAK	4	5936.98	51.79	68.20	-16.41	39.60	34.27	10.90	32.98	0.00	292	146	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.99	54.75	110.83	-56.08	42.81	34.02	10.87	32.95	0.00	292	146	PEAK																																																																									
2	5873.12	54.98	105.73	-50.75	42.97	34.09	10.88	32.96	0.00	292	146	PEAK																																																																									
3	5922.72	52.55	69.88	-17.33	40.39	34.25	10.89	32.98	0.00	292	146	PEAK																																																																									
4	5936.98	51.79	68.20	-16.41	39.60	34.27	10.90	32.98	0.00	292	146	PEAK																																																																									



Mode	37																																																																																											
	Band Edge - L																																																																																											
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE(B4)_16-24 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5602.54</td> <td>51.48</td> <td>68.20</td> <td>-16.72</td> <td>40.58</td> <td>33.01</td> <td>10.76</td> <td>32.07</td> <td>0.00</td> <td>400 143 PEAK</td> </tr> <tr> <td>2 5650.31</td> <td>49.83</td> <td>68.43</td> <td>-18.60</td> <td>38.84</td> <td>33.10</td> <td>10.78</td> <td>32.89</td> <td>0.00</td> <td>400 143 PEAK</td> </tr> <tr> <td>3 5700.43</td> <td>50.92</td> <td>105.32</td> <td>-54.40</td> <td>39.51</td> <td>33.50</td> <td>10.81</td> <td>32.90</td> <td>0.00</td> <td>400 143 PEAK</td> </tr> <tr> <td>4 5720.12</td> <td>50.48</td> <td>111.07</td> <td>-60.59</td> <td>39.00</td> <td>33.58</td> <td>10.81</td> <td>32.91</td> <td>0.00</td> <td>400 143 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1 5602.54	51.48	68.20	-16.72	40.58	33.01	10.76	32.07	0.00	400 143 PEAK	2 5650.31	49.83	68.43	-18.60	38.84	33.10	10.78	32.89	0.00	400 143 PEAK	3 5700.43	50.92	105.32	-54.40	39.51	33.50	10.81	32.90	0.00	400 143 PEAK	4 5720.12	50.48	111.07	-60.59	39.00	33.58	10.81	32.91	0.00	400 143 PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>93.04</td> <td>-----</td> <td>81.24</td> <td>33.88</td> <td>10.85</td> <td>32.93</td> <td>0.00</td> <td>400</td> <td>143 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1 5795.00	93.04	-----	81.24	33.88	10.85	32.93	0.00	400	143 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																			
1 5602.54	51.48	68.20	-16.72	40.58	33.01	10.76	32.07	0.00	400 143 PEAK																																																																																			
2 5650.31	49.83	68.43	-18.60	38.84	33.10	10.78	32.89	0.00	400 143 PEAK																																																																																			
3 5700.43	50.92	105.32	-54.40	39.51	33.50	10.81	32.90	0.00	400 143 PEAK																																																																																			
4 5720.12	50.48	111.07	-60.59	39.00	33.58	10.81	32.91	0.00	400 143 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																			
1 5795.00	93.04	-----	81.24	33.88	10.85	32.93	0.00	400	143 PEAK																																																																																			
Avg	Blank	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5795.00</td> <td>85.22</td> <td>-----</td> <td>73.42</td> <td>33.88</td> <td>10.85</td> <td>32.93</td> <td>0.00</td> <td>400</td> <td>143 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1 5795.00	85.22	-----	73.42	33.88	10.85	32.93	0.00	400	143 AVERAGE																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																			
1 5795.00	85.22	-----	73.42	33.88	10.85	32.93	0.00	400	143 AVERAGE																																																																																			







Mode	37																																																																					
	Band Edge - R																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																					
ANT	1																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<p>Site : 03CH11-HY          Condition: PEAK_BE(B4)_16-24 3m 91200_01620_230817 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.99</td> <td>52.65</td> <td>110.83</td> <td>-58.18</td> <td>40.71</td> <td>34.02</td> <td>10.87</td> <td>32.95</td> <td>0.00</td> <td>400</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>2 5874.83</td> <td>51.55</td> <td>105.25</td> <td>-53.70</td> <td>39.53</td> <td>34.10</td> <td>10.88</td> <td>32.96</td> <td>0.00</td> <td>400</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>3 5924.58</td> <td>50.66</td> <td>68.51</td> <td>-17.85</td> <td>38.50</td> <td>34.25</td> <td>10.89</td> <td>32.98</td> <td>0.00</td> <td>400</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>4 5939.93</td> <td>53.16</td> <td>68.20</td> <td>-15.04</td> <td>40.96</td> <td>34.28</td> <td>10.90</td> <td>32.98</td> <td>0.00</td> <td>400</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 5854.99	52.65	110.83	-58.18	40.71	34.02	10.87	32.95	0.00	400	143	PEAK	2 5874.83	51.55	105.25	-53.70	39.53	34.10	10.88	32.96	0.00	400	143	PEAK	3 5924.58	50.66	68.51	-17.85	38.50	34.25	10.89	32.98	0.00	400	143	PEAK	4 5939.93	53.16	68.20	-15.04	40.96	34.28	10.90	32.98	0.00	400	143	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1 5854.99	52.65	110.83	-58.18	40.71	34.02	10.87	32.95	0.00	400	143	PEAK																																																											
2 5874.83	51.55	105.25	-53.70	39.53	34.10	10.88	32.96	0.00	400	143	PEAK																																																											
3 5924.58	50.66	68.51	-17.85	38.50	34.25	10.89	32.98	0.00	400	143	PEAK																																																											
4 5939.93	53.16	68.20	-15.04	40.96	34.28	10.90	32.98	0.00	400	143	PEAK																																																											



Mode	37																																																																																																											
	Harmonic																																																																																																											
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>47.08</td> <td>74.00</td> <td>-26.92</td> <td>51.81</td> <td>38.74</td> <td>18.35</td> <td>62.12</td> <td>0.30</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17385.00</td> <td>46.49</td> <td>68.20</td> <td>-21.71</td> <td>42.04</td> <td>38.67</td> <td>23.26</td> <td>57.85</td> <td>0.37</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	11590.00	47.08	74.00	-26.92	51.81	38.74	18.35	62.12	0.30	--	--	PEAK	2	17385.00	46.49	68.20	-21.71	42.04	38.67	23.26	57.85	0.37	--	--	PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>47.30</td> <td>74.00</td> <td>-26.70</td> <td>52.03</td> <td>38.74</td> <td>18.35</td> <td>62.12</td> <td>0.30</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17385.00</td> <td>46.14</td> <td>68.20</td> <td>-22.06</td> <td>41.69</td> <td>38.67</td> <td>23.26</td> <td>57.85</td> <td>0.37</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	11590.00	47.30	74.00	-26.70	52.03	38.74	18.35	62.12	0.30	--	--	PEAK	2	17385.00	46.14	68.20	-22.06	41.69	38.67	23.26	57.85	0.37	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																				
1	11590.00	47.08	74.00	-26.92	51.81	38.74	18.35	62.12	0.30	--	--	PEAK																																																																																																
2	17385.00	46.49	68.20	-21.71	42.04	38.67	23.26	57.85	0.37	--	--	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																				
1	11590.00	47.30	74.00	-26.70	52.03	38.74	18.35	62.12	0.30	--	--	PEAK																																																																																																
2	17385.00	46.14	68.20	-22.06	41.69	38.67	23.26	57.85	0.37	--	--	PEAK																																																																																																

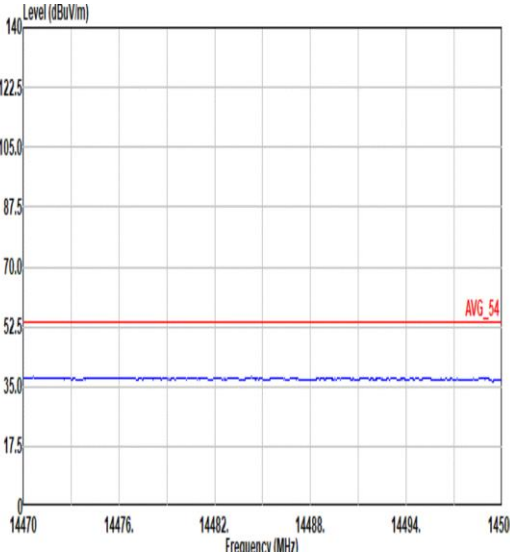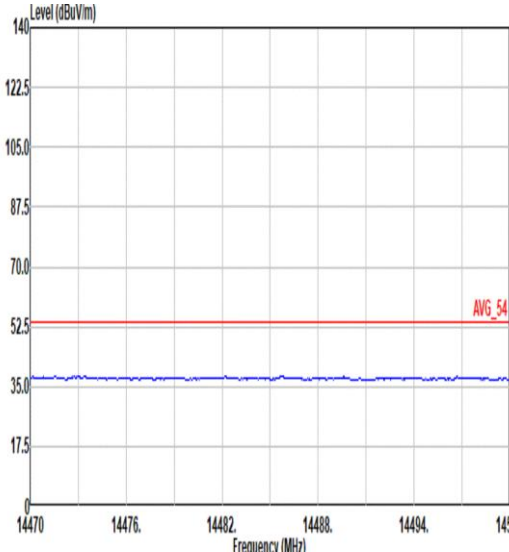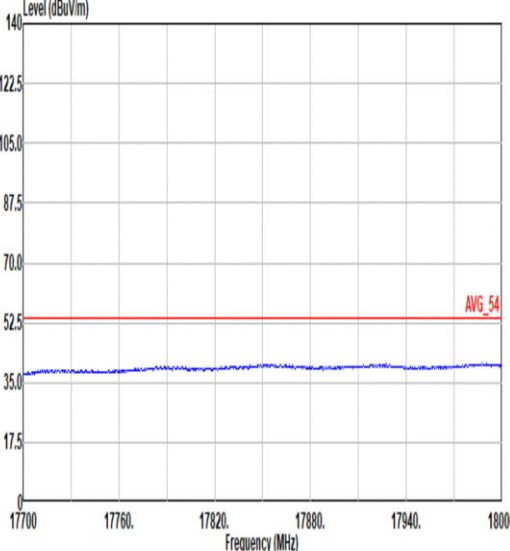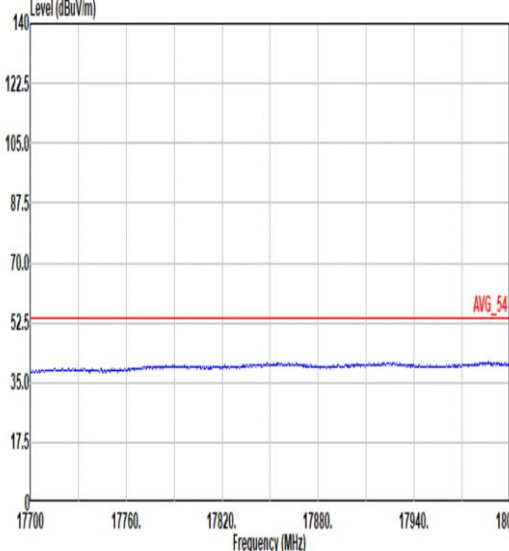

Mode	37	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
ANT	1	
Pol.	Horizontal	Vertical
<p><b>14.47G</b> ~14.5G Avg</p>	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL</p>
<p><b>17.7G</b> ~18G Avg</p>	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL</p>





Mode	38																																																																																																																									
	Band Edge - L																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																																								
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE(B4)_16-24 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.15</td> <td>52.00</td> <td>68.20</td> <td>-16.20</td> <td>41.02</td> <td>33.09</td> <td>10.78</td> <td>32.09</td> <td>0.00</td> <td>300</td> <td>151 PEAK</td> </tr> <tr> <td>2</td> <td>5658.75</td> <td>50.66</td> <td>68.76</td> <td>-18.10</td> <td>39.66</td> <td>33.11</td> <td>10.78</td> <td>32.89</td> <td>0.00</td> <td>300</td> <td>151 PEAK</td> </tr> <tr> <td>3</td> <td>5782.55</td> <td>59.23</td> <td>105.92</td> <td>-46.69</td> <td>47.81</td> <td>33.51</td> <td>10.81</td> <td>32.90</td> <td>0.00</td> <td>300</td> <td>151 PEAK</td> </tr> <tr> <td>4</td> <td>5728.05</td> <td>61.36</td> <td>110.91</td> <td>-49.55</td> <td>49.88</td> <td>33.58</td> <td>10.81</td> <td>32.91</td> <td>0.00</td> <td>300</td> <td>151 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5645.15	52.00	68.20	-16.20	41.02	33.09	10.78	32.09	0.00	300	151 PEAK	2	5658.75	50.66	68.76	-18.10	39.66	33.11	10.78	32.89	0.00	300	151 PEAK	3	5782.55	59.23	105.92	-46.69	47.81	33.51	10.81	32.90	0.00	300	151 PEAK	4	5728.05	61.36	110.91	-49.55	49.88	33.58	10.81	32.91	0.00	300	151 PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>96.32</td> <td>84.65</td> <td>33.76</td> <td>10.83</td> <td>32.92</td> <td>0.00</td> <td>300</td> <td>151 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	96.32	84.65	33.76	10.83	32.92	0.00	300	151 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5645.15	52.00	68.20	-16.20	41.02	33.09	10.78	32.09	0.00	300	151 PEAK																																																																																																															
2	5658.75	50.66	68.76	-18.10	39.66	33.11	10.78	32.89	0.00	300	151 PEAK																																																																																																															
3	5782.55	59.23	105.92	-46.69	47.81	33.51	10.81	32.90	0.00	300	151 PEAK																																																																																																															
4	5728.05	61.36	110.91	-49.55	49.88	33.58	10.81	32.91	0.00	300	151 PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5775.00	96.32	84.65	33.76	10.83	32.92	0.00	300	151 PEAK																																																																																																																	
Avg	Blank	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>89.00</td> <td>77.31</td> <td>33.78</td> <td>10.84</td> <td>32.93</td> <td>0.00</td> <td>300</td> <td>151 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	89.00	77.31	33.78	10.84	32.93	0.00	300	151 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5775.00	89.00	77.31	33.78	10.84	32.93	0.00	300	151 AVERAGE																																																																																																																	



Mode	38																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																				
ANT	1																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<p>Site : 03CH11-HY            Condition: PEAK_BE(B4)_16-24 3m 91200_01620_230817 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.50</td> <td>56.83</td> <td>114.05</td> <td>-57.22</td> <td>44.90</td> <td>34.01</td> <td>10.87</td> <td>32.95</td> <td>0.00</td> <td>300</td> <td>151</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5867.40</td> <td>56.92</td> <td>107.33</td> <td>-50.41</td> <td>44.94</td> <td>34.07</td> <td>10.87</td> <td>32.96</td> <td>0.00</td> <td>300</td> <td>151</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.93</td> <td>52.07</td> <td>68.99</td> <td>-16.92</td> <td>39.91</td> <td>34.25</td> <td>10.89</td> <td>32.98</td> <td>0.00</td> <td>300</td> <td>151</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5933.03</td> <td>52.32</td> <td>68.20</td> <td>-15.88</td> <td>40.13</td> <td>34.27</td> <td>10.90</td> <td>32.98</td> <td>0.00</td> <td>300</td> <td>151</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.50	56.83	114.05	-57.22	44.90	34.01	10.87	32.95	0.00	300	151	PEAK	2	5867.40	56.92	107.33	-50.41	44.94	34.07	10.87	32.96	0.00	300	151	PEAK	3	5923.93	52.07	68.99	-16.92	39.91	34.25	10.89	32.98	0.00	300	151	PEAK	4	5933.03	52.32	68.20	-15.88	40.13	34.27	10.90	32.98	0.00	300	151	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5853.50	56.83	114.05	-57.22	44.90	34.01	10.87	32.95	0.00	300	151	PEAK																																																																									
2	5867.40	56.92	107.33	-50.41	44.94	34.07	10.87	32.96	0.00	300	151	PEAK																																																																									
3	5923.93	52.07	68.99	-16.92	39.91	34.25	10.89	32.98	0.00	300	151	PEAK																																																																									
4	5933.03	52.32	68.20	-15.88	40.13	34.27	10.90	32.98	0.00	300	151	PEAK																																																																									



Mode	38																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE(B4)_16-24 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5602.63</td> <td>51.36</td> <td>68.20 -16.84</td> <td>40.46</td> <td>33.01</td> <td>10.76</td> <td>32.07</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>50.54</td> <td>68.24 -17.70</td> <td>39.55</td> <td>33.10</td> <td>10.78</td> <td>32.89</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.98</td> <td>54.33</td> <td>105.47 -51.14</td> <td>42.92</td> <td>33.50</td> <td>10.81</td> <td>32.90</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>54.62</td> <td>111.71 -57.09</td> <td>43.14</td> <td>33.58</td> <td>10.81</td> <td>32.91</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5602.63	51.36	68.20 -16.84	40.46	33.01	10.76	32.07	0.00	188	146	PEAK	2	5650.05	50.54	68.24 -17.70	39.55	33.10	10.78	32.89	0.00	188	146	PEAK	3	5700.98	54.33	105.47 -51.14	42.92	33.50	10.81	32.90	0.00	188	146	PEAK	4	5720.40	54.62	111.71 -57.09	43.14	33.58	10.81	32.91	0.00	188	146	PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>89.55</td> <td>-----</td> <td>77.81</td> <td>33.83</td> <td>10.84</td> <td>32.93</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	89.55	-----	77.81	33.83	10.84	32.93	0.00	188	146	PEAK
Peak	Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	5602.63	51.36	68.20 -16.84	40.46	33.01	10.76	32.07	0.00	188	146	PEAK																																																																																																			
2	5650.05	50.54	68.24 -17.70	39.55	33.10	10.78	32.89	0.00	188	146	PEAK																																																																																																			
3	5700.98	54.33	105.47 -51.14	42.92	33.50	10.81	32.90	0.00	188	146	PEAK																																																																																																			
4	5720.40	54.62	111.71 -57.09	43.14	33.58	10.81	32.91	0.00	188	146	PEAK																																																																																																			
Peak	Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	5775.00	89.55	-----	77.81	33.83	10.84	32.93	0.00	188	146	PEAK																																																																																																			
Avg	Blank	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>82.42</td> <td>-----</td> <td>70.73</td> <td>33.78</td> <td>10.84</td> <td>32.93</td> <td>0.00</td> <td>188</td> <td>146</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	82.42	-----	70.73	33.78	10.84	32.93	0.00	188	146	AVERAGE																																																																								
Peak	Freq	Level	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	5775.00	82.42	-----	70.73	33.78	10.84	32.93	0.00	188	146	AVERAGE																																																																																																			



Mode	38																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																				
ANT	1																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<p>Site : 03CH11-HY            Condition: PEAK_BE(B4)_16-24 3m 91200_01620_230817 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.90</td> <td>53.20</td> <td>110.06</td> <td>-57.58</td> <td>41.34</td> <td>34.02</td> <td>10.87</td> <td>32.95</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5872.30</td> <td>51.33</td> <td>105.95</td> <td>-54.62</td> <td>39.32</td> <td>34.09</td> <td>10.88</td> <td>32.96</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>51.25</td> <td>68.35</td> <td>-17.10</td> <td>39.09</td> <td>34.25</td> <td>10.89</td> <td>32.98</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5949.83</td> <td>53.04</td> <td>68.20</td> <td>-15.16</td> <td>40.82</td> <td>34.30</td> <td>10.90</td> <td>32.98</td> <td>0.00</td> <td>188</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.90	53.20	110.06	-57.58	41.34	34.02	10.87	32.95	0.00	188	146	PEAK	2	5872.30	51.33	105.95	-54.62	39.32	34.09	10.88	32.96	0.00	188	146	PEAK	3	5924.80	51.25	68.35	-17.10	39.09	34.25	10.89	32.98	0.00	188	146	PEAK	4	5949.83	53.04	68.20	-15.16	40.82	34.30	10.90	32.98	0.00	188	146	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.90	53.20	110.06	-57.58	41.34	34.02	10.87	32.95	0.00	188	146	PEAK																																																																									
2	5872.30	51.33	105.95	-54.62	39.32	34.09	10.88	32.96	0.00	188	146	PEAK																																																																									
3	5924.80	51.25	68.35	-17.10	39.09	34.25	10.89	32.98	0.00	188	146	PEAK																																																																									
4	5949.83	53.04	68.20	-15.16	40.82	34.30	10.90	32.98	0.00	188	146	PEAK																																																																									



Mode	38																																																																																																											
	Harmonic																																																																																																											
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.68</td> <td>74.00</td> <td>-26.32</td> <td>52.19</td> <td>38.90</td> <td>18.31</td> <td>62.02</td> <td>0.30</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>46.22</td> <td>68.20</td> <td>-21.98</td> <td>42.12</td> <td>38.50</td> <td>23.23</td> <td>58.00</td> <td>0.37</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11550.00	47.68	74.00	-26.32	52.19	38.90	18.31	62.02	0.30	--	--	PEAK	2	17325.00	46.22	68.20	-21.98	42.12	38.50	23.23	58.00	0.37	--	--	PEAK	<p>Site : 03CH11-HY Condition: PEAK(UNII) 3m 91200_01620_230817 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.37</td> <td>74.00</td> <td>-26.63</td> <td>51.80</td> <td>38.90</td> <td>18.31</td> <td>62.02</td> <td>0.30</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>47.45</td> <td>68.20</td> <td>-20.75</td> <td>43.35</td> <td>38.50</td> <td>23.23</td> <td>58.00</td> <td>0.37</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11550.00	47.37	74.00	-26.63	51.80	38.90	18.31	62.02	0.30	--	--	PEAK	2	17325.00	47.45	68.20	-20.75	43.35	38.50	23.23	58.00	0.37	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11550.00	47.68	74.00	-26.32	52.19	38.90	18.31	62.02	0.30	--	--	PEAK																																																																																																
2	17325.00	46.22	68.20	-21.98	42.12	38.50	23.23	58.00	0.37	--	--	PEAK																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11550.00	47.37	74.00	-26.63	51.80	38.90	18.31	62.02	0.30	--	--	PEAK																																																																																																
2	17325.00	47.45	68.20	-20.75	43.35	38.50	23.23	58.00	0.37	--	--	PEAK																																																																																																







Mode	38	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_230817 HORIZONTAL</p>



Mode	39																																																																																																																																																																																																																			
	LF																																																																																																																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																																																																																																																			
ANT	1																																																																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																																																																		
QP/ Peak	<p>Site : 03CH11-HY Condition: QP 3m Bilog_35414_231007 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.97</td> <td>28.90</td> <td>40.00</td> <td>-11.10</td> <td>37.02</td> <td>23.69</td> <td>0.48</td> <td>32.45</td> <td>0.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>208.48</td> <td>23.04</td> <td>43.50</td> <td>-20.46</td> <td>38.43</td> <td>15.01</td> <td>1.72</td> <td>32.33</td> <td>0.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>229.82</td> <td>24.89</td> <td>46.00</td> <td>-21.11</td> <td>39.13</td> <td>15.97</td> <td>1.83</td> <td>32.24</td> <td>0.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>288.99</td> <td>26.12</td> <td>46.00</td> <td>-19.88</td> <td>36.73</td> <td>18.91</td> <td>2.07</td> <td>31.88</td> <td>0.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>748.77</td> <td>29.26</td> <td>46.00</td> <td>-16.74</td> <td>28.91</td> <td>27.98</td> <td>3.57</td> <td>31.53</td> <td>0.33</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>952.47</td> <td>31.90</td> <td>46.00</td> <td>-14.10</td> <td>27.60</td> <td>30.72</td> <td>4.08</td> <td>30.97</td> <td>0.47</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	30.97	28.90	40.00	-11.10	37.02	23.69	0.48	32.45	0.16	--	--	Peak	2	208.48	23.04	43.50	-20.46	38.43	15.01	1.72	32.33	0.21	--	--	Peak	3	229.82	24.89	46.00	-21.11	39.13	15.97	1.83	32.24	0.20	--	--	Peak	4	288.99	26.12	46.00	-19.88	36.73	18.91	2.07	31.88	0.29	--	--	Peak	5	748.77	29.26	46.00	-16.74	28.91	27.98	3.57	31.53	0.33	--	--	Peak	6	952.47	31.90	46.00	-14.10	27.60	30.72	4.08	30.97	0.47	--	--	Peak	<p>Site : 03CH11-HY Condition: QP 3m Bilog_35414_231007 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>39.70</td> <td>31.06</td> <td>40.00</td> <td>-8.14</td> <td>43.91</td> <td>19.64</td> <td>0.50</td> <td>32.33</td> <td>0.14</td> <td>100</td> <td>302</td> <td>QP</td> </tr> <tr> <td>2</td> <td>98.87</td> <td>26.47</td> <td>43.50</td> <td>-17.03</td> <td>41.86</td> <td>15.72</td> <td>1.00</td> <td>32.37</td> <td>0.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>229.82</td> <td>21.43</td> <td>46.00</td> <td>-24.57</td> <td>35.67</td> <td>15.97</td> <td>1.83</td> <td>32.24</td> <td>0.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>507.24</td> <td>24.62</td> <td>46.00</td> <td>-21.38</td> <td>30.20</td> <td>23.79</td> <td>2.89</td> <td>32.50</td> <td>0.24</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>757.50</td> <td>30.22</td> <td>46.00</td> <td>-15.78</td> <td>29.79</td> <td>28.03</td> <td>3.59</td> <td>31.53</td> <td>0.34</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>956.35</td> <td>33.57</td> <td>46.00</td> <td>-12.43</td> <td>29.02</td> <td>30.92</td> <td>4.09</td> <td>30.92</td> <td>0.46</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	39.70	31.06	40.00	-8.14	43.91	19.64	0.50	32.33	0.14	100	302	QP	2	98.87	26.47	43.50	-17.03	41.86	15.72	1.00	32.37	0.18	--	--	Peak	3	229.82	21.43	46.00	-24.57	35.67	15.97	1.83	32.24	0.20	--	--	Peak	4	507.24	24.62	46.00	-21.38	30.20	23.79	2.89	32.50	0.24	--	--	Peak	5	757.50	30.22	46.00	-15.78	29.79	28.03	3.59	31.53	0.34	--	--	Peak	6	956.35	33.57	46.00	-12.43	29.02	30.92	4.09	30.92	0.46	--	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	30.97	28.90	40.00	-11.10	37.02	23.69	0.48	32.45	0.16	--	--	Peak																																																																																																																																																																																																								
2	208.48	23.04	43.50	-20.46	38.43	15.01	1.72	32.33	0.21	--	--	Peak																																																																																																																																																																																																								
3	229.82	24.89	46.00	-21.11	39.13	15.97	1.83	32.24	0.20	--	--	Peak																																																																																																																																																																																																								
4	288.99	26.12	46.00	-19.88	36.73	18.91	2.07	31.88	0.29	--	--	Peak																																																																																																																																																																																																								
5	748.77	29.26	46.00	-16.74	28.91	27.98	3.57	31.53	0.33	--	--	Peak																																																																																																																																																																																																								
6	952.47	31.90	46.00	-14.10	27.60	30.72	4.08	30.97	0.47	--	--	Peak																																																																																																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																												
1	39.70	31.06	40.00	-8.14	43.91	19.64	0.50	32.33	0.14	100	302	QP																																																																																																																																																																																																								
2	98.87	26.47	43.50	-17.03	41.86	15.72	1.00	32.37	0.18	--	--	Peak																																																																																																																																																																																																								
3	229.82	21.43	46.00	-24.57	35.67	15.97	1.83	32.24	0.20	--	--	Peak																																																																																																																																																																																																								
4	507.24	24.62	46.00	-21.38	30.20	23.79	2.89	32.50	0.24	--	--	Peak																																																																																																																																																																																																								
5	757.50	30.22	46.00	-15.78	29.79	28.03	3.59	31.53	0.34	--	--	Peak																																																																																																																																																																																																								
6	956.35	33.57	46.00	-12.43	29.02	30.92	4.09	30.92	0.46	--	--	Peak																																																																																																																																																																																																								

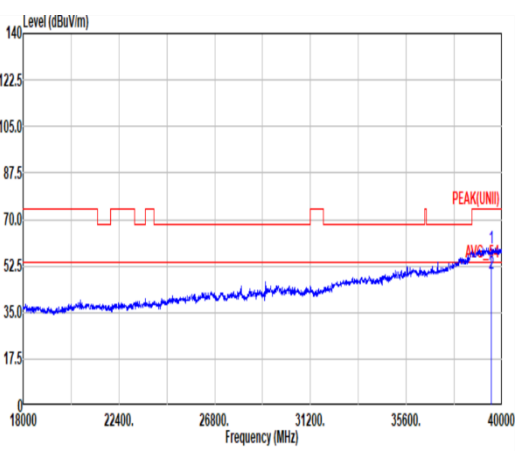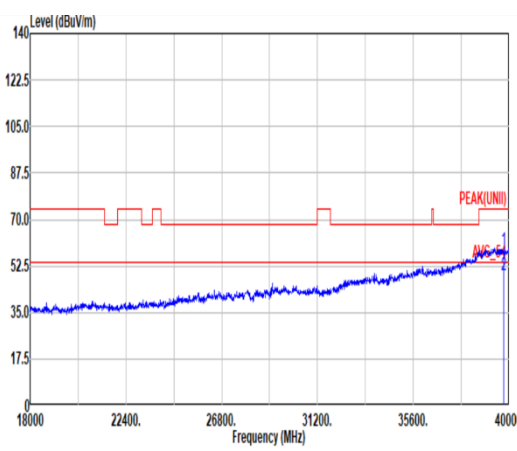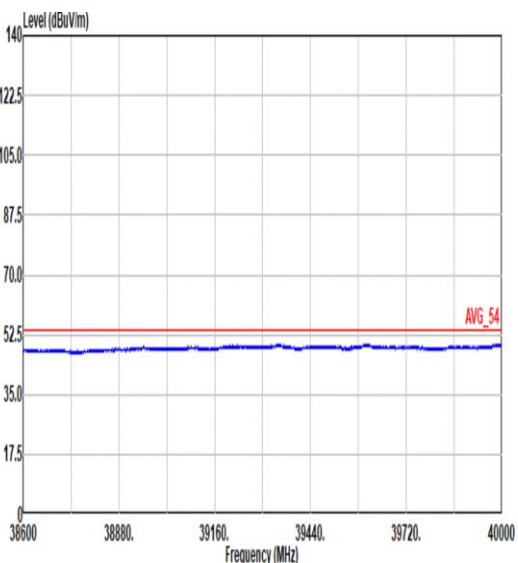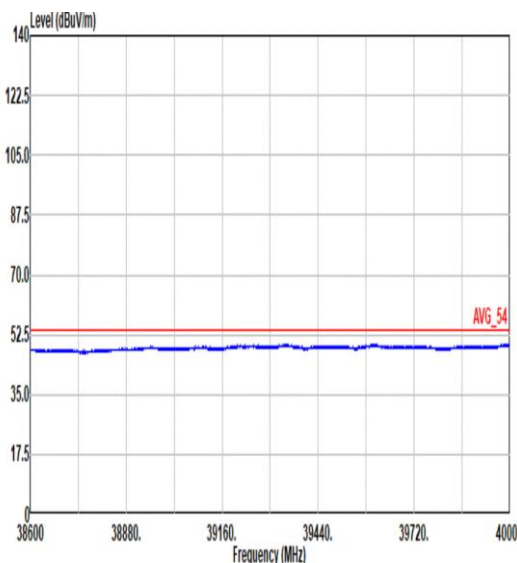

Mode	42																																																																																	
	SHF																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	 <p>Site : 03CH11-HY Condition: PEAK(UNII) 1m SHF_00993_231124 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 39516.80</td> <td>59.22</td> <td>74.00</td> <td>-14.78</td> <td>38.64</td> <td>44.70</td> <td>35.98</td> <td>50.56</td> <td>-9.54</td> <td>-- -- PEAK</td> </tr> <tr> <td>2 39516.80</td> <td>49.78</td> <td>54.00</td> <td>-4.22</td> <td>29.20</td> <td>44.70</td> <td>35.98</td> <td>50.56</td> <td>-9.54</td> <td>-- -- AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg		1 39516.80	59.22	74.00	-14.78	38.64	44.70	35.98	50.56	-9.54	-- -- PEAK	2 39516.80	49.78	54.00	-4.22	29.20	44.70	35.98	50.56	-9.54	-- -- AVERAGE	 <p>Site : 03CH11-HY Condition: PEAK(UNII) 1m SHF_00993_231124 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 39768.35</td> <td>58.84</td> <td>74.00</td> <td>-15.16</td> <td>38.15</td> <td>44.49</td> <td>35.70</td> <td>49.96</td> <td>-9.54</td> <td>-- -- PEAK</td> </tr> <tr> <td>2 39768.35</td> <td>48.98</td> <td>54.00</td> <td>-5.02</td> <td>28.29</td> <td>44.49</td> <td>35.70</td> <td>49.96</td> <td>-9.54</td> <td>-- -- AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg		1 39768.35	58.84	74.00	-15.16	38.15	44.49	35.70	49.96	-9.54	-- -- PEAK	2 39768.35	48.98	54.00	-5.02	28.29	44.49	35.70	49.96	-9.54	-- -- AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
1 39516.80	59.22	74.00	-14.78	38.64	44.70	35.98	50.56	-9.54	-- -- PEAK																																																																									
2 39516.80	49.78	54.00	-4.22	29.20	44.70	35.98	50.56	-9.54	-- -- AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
1 39768.35	58.84	74.00	-15.16	38.15	44.49	35.70	49.96	-9.54	-- -- PEAK																																																																									
2 39768.35	48.98	54.00	-5.02	28.29	44.49	35.70	49.96	-9.54	-- -- AVERAGE																																																																									
38.6G ~40G Avg	 <p>Site : 03CH11-HY Condition: AVG_54 1m SHF_00993_231124 Horizontal</p>	 <p>Site : 03CH11-HY Condition: AVG_54 1m SHF_00993_231124 Vertical</p>																																																																																







# Appendix D. Duty Cycle Plots

<For Radiated Spurious Emission test>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	90.59	1390	0.769	820Hz
1	5GHz 802.11n HT20	96.28	1295	0.772	820Hz
1	5GHz 802.11n HT40	93.64	648	1.543	1.6kHz
1	5GHz 802.11ac VHT80	87.80	324	3.086	3.3KHz

<Ant. 1>

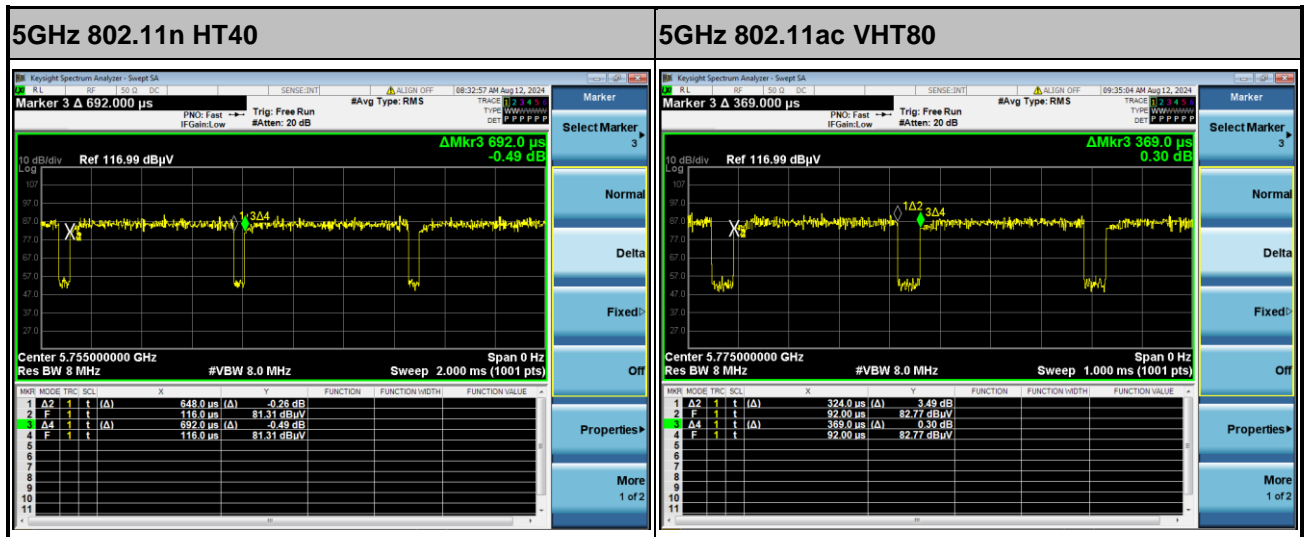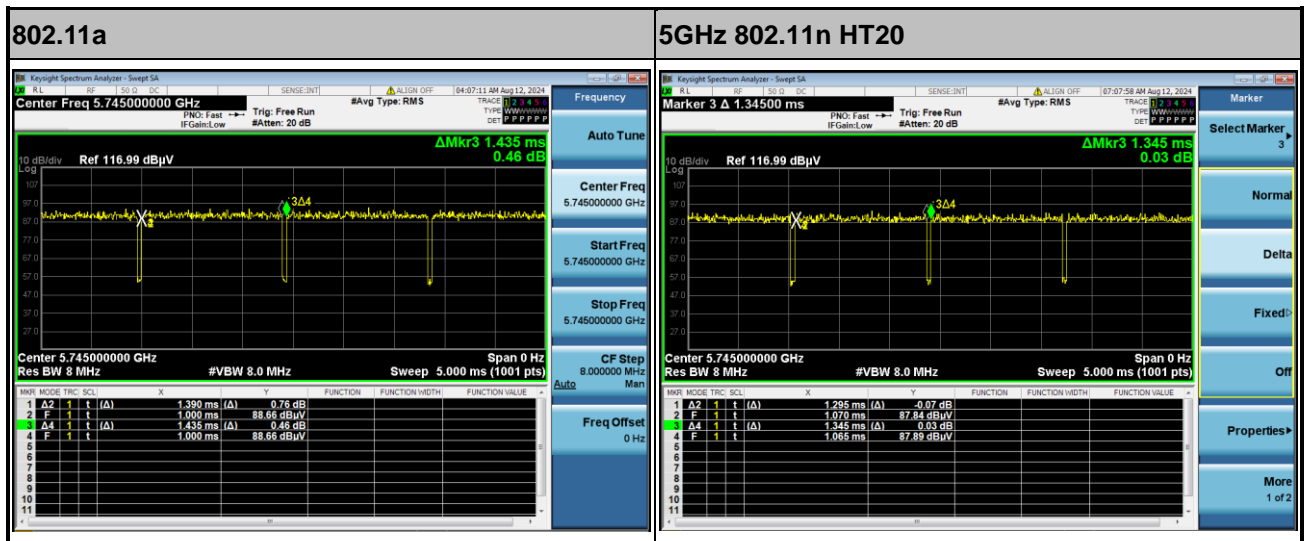



<For Conducted test>

Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
1	802.11a	96.67	1392	0.15
1	5GHz 802.11n HT20	97.02	1304	0.13
1	5GHz 802.11n HT40	93.53	650	0.29
1	5GHz 802.11ac VHT80	88.04	324	0.55

<Ant. 1>

