



	32																																																																																												
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																												
ANT	1																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.44</td> <td>49.17</td> <td>74.00</td> <td>-24.83</td> <td>42.62</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>108</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.83</td> <td>48.77</td> <td>68.20</td> <td>-19.43</td> <td>42.20</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>100</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5448.44	49.17	74.00	-24.83	42.62	33.10	10.31	36.86	0.00	100	108	PEAK	2	5469.83	48.77	68.20	-19.43	42.20	33.10	10.31	36.84	0.00	100	108	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>102.60</td> <td>-----</td> <td>-----</td> <td>96.10</td> <td>33.02</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>100</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	102.60	-----	-----	96.10	33.02	10.32	36.84	0.00	100	108	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5448.44	49.17	74.00	-24.83	42.62	33.10	10.31	36.86	0.00	100	108	PEAK																																																																																	
2	5469.83	48.77	68.20	-19.43	42.20	33.10	10.31	36.84	0.00	100	108	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	102.60	-----	-----	96.10	33.02	10.32	36.84	0.00	100	108	PEAK																																																																																	
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.71</td> <td>39.17</td> <td>54.00</td> <td>-14.83</td> <td>32.61</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>100</td> <td>108</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.71	39.17	54.00	-14.83	32.61	33.10	10.31	36.85	0.00	100	108	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>95.23</td> <td>-----</td> <td>-----</td> <td>88.72</td> <td>33.03</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>100</td> <td>108</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	95.23	-----	-----	88.72	33.03	10.32	36.84	0.00	100	108	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5459.71	39.17	54.00	-14.83	32.61	33.10	10.31	36.85	0.00	100	108	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	95.23	-----	-----	88.72	33.03	10.32	36.84	0.00	100	108	AVERAGE																																																																																	



Mode	32																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5745.39</td> <td>50.47</td> <td>68.20</td> <td>-17.73</td> <td>43.00</td> <td>33.87</td> <td>10.48</td> <td>36.88</td> <td>0.00</td> <td>100</td> <td>108 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5745.39	50.47	68.20	-17.73	43.00	33.87	10.48	36.88	0.00	100	108 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5745.39	50.47	68.20	-17.73	43.00	33.87	10.48	36.88	0.00	100	108 PEAK																															



32																																																					
Mode	Band Edge - L																																																				
U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																					
ANT	1																																																				
Pol.	Vertical																																																				
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5367.94</td> <td>48.83</td> <td>74.00</td> <td>-25.17</td> <td>42.34</td> <td>33.10</td> <td>10.30</td> <td>36.91</td> <td>0.00</td> <td>279</td> <td>250</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.45</td> <td>48.61</td> <td>68.20</td> <td>-19.59</td> <td>42.04</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>279</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5367.94	48.83	74.00	-25.17	42.34	33.10	10.30	36.91	0.00	279	250	PEAK	2	5468.45	48.61	68.20	-19.59	42.04	33.10	10.31	36.84	0.00	279	250	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5367.94	48.83	74.00	-25.17	42.34	33.10	10.30	36.91	0.00	279	250	PEAK																																									
2	5468.45	48.61	68.20	-19.59	42.04	33.10	10.31	36.84	0.00	279	250	PEAK																																									
Peak	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>102.26</td> <td>70.00</td> <td>32.26</td> <td>95.75</td> <td>33.03</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>279</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	102.26	70.00	32.26	95.75	33.03	10.32	36.84	0.00	279	250	PEAK													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5580.00	102.26	70.00	32.26	95.75	33.03	10.32	36.84	0.00	279	250	PEAK																																									
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.00</td> <td>39.15</td> <td>54.00</td> <td>-14.85</td> <td>32.59</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>279</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5448.00	39.15	54.00	-14.85	32.59	33.10	10.31	36.85	0.00	279	250	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5448.00	39.15	54.00	-14.85	32.59	33.10	10.31	36.85	0.00	279	250	AVERAGE																																									
Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>94.85</td> <td>52.50</td> <td>42.35</td> <td>88.34</td> <td>33.03</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>279</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	94.85	52.50	42.35	88.34	33.03	10.32	36.84	0.00	279	250	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5580.00	94.85	52.50	42.35	88.34	33.03	10.32	36.84	0.00	279	250	AVERAGE																																									



Mode	32																																			
	Band Edge - R																																			
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																			
ANT	1																																			
Pol.	Vertical	Fundamental																																		
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5753.53</td> <td>50.12</td> <td>68.20</td> <td>-18.08</td> <td>42.59</td> <td>33.92</td> <td>10.49</td> <td>36.88</td> <td>0.00</td> <td>279</td> <td>250 PEAK</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5753.53	50.12	68.20	-18.08	42.59	33.92	10.49	36.88	0.00	279	250 PEAK	Blank
Freq	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																									
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																										
1	5753.53	50.12	68.20	-18.08	42.59	33.92	10.49	36.88	0.00	279	250 PEAK																									



Mode	32																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.92</td> <td>74.00</td> <td>-28.08</td> <td>46.95</td> <td>38.82</td> <td>15.81</td> <td>56.21</td> <td>0.55</td> <td>-- PEAK</td> </tr> <tr> <td>2 16740.00</td> <td>45.00</td> <td>68.20</td> <td>-23.20</td> <td>42.23</td> <td>38.40</td> <td>19.38</td> <td>55.82</td> <td>0.81</td> <td>-- PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	cm	deg	1 11160.00	45.92	74.00	-28.08	46.95	38.82	15.81	56.21	0.55	-- PEAK	2 16740.00	45.00	68.20	-23.20	42.23	38.40	19.38	55.82	0.81	-- PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.25</td> <td>74.00</td> <td>-27.75</td> <td>47.28</td> <td>38.82</td> <td>15.81</td> <td>56.21</td> <td>0.55</td> <td>-- PEAK</td> </tr> <tr> <td>2 16740.00</td> <td>44.60</td> <td>68.20</td> <td>-23.60</td> <td>41.83</td> <td>38.40</td> <td>19.38</td> <td>55.82</td> <td>0.81</td> <td>-- PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	cm	deg	1 11160.00	46.25	74.00	-27.75	47.28	38.82	15.81	56.21	0.55	-- PEAK	2 16740.00	44.60	68.20	-23.60	41.83	38.40	19.38	55.82	0.81	-- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	cm	deg																																																																									
1 11160.00	45.92	74.00	-28.08	46.95	38.82	15.81	56.21	0.55	-- PEAK																																																																									
2 16740.00	45.00	68.20	-23.20	42.23	38.40	19.38	55.82	0.81	-- PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	cm	deg																																																																									
1 11160.00	46.25	74.00	-27.75	47.28	38.82	15.81	56.21	0.55	-- PEAK																																																																									
2 16740.00	44.60	68.20	-23.60	41.83	38.40	19.38	55.82	0.81	-- PEAK																																																																									






	32	
Mode	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>
	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>



	33																																																																															
Mode	Band Edge																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5726.59</td> <td>62.93</td> <td>68.20</td> <td>-5.27</td> <td>55.58</td> <td>33.76</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>116</td> <td>102 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5726.59	62.93	68.20	-5.27	55.58	33.76	10.46	36.87	0.00	116	102 PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>106.36</td> <td>-----</td> <td>-----</td> <td>99.27</td> <td>33.54</td> <td>10.42</td> <td>36.87</td> <td>0.00</td> <td>116</td> <td>102 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	106.36	-----	-----	99.27	33.54	10.42	36.87	0.00	116	102 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5726.59	62.93	68.20	-5.27	55.58	33.76	10.46	36.87	0.00	116	102 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5700.00	106.36	-----	-----	99.27	33.54	10.42	36.87	0.00	116	102 PEAK																																																																						
Avg	Blank	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.27</td> <td>-----</td> <td>-----</td> <td>91.13</td> <td>33.58</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>116</td> <td>102 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	98.27	-----	-----	91.13	33.58	10.43	36.87	0.00	116	102 AVERAGE																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5700.00	98.27	-----	-----	91.13	33.58	10.43	36.87	0.00	116	102 AVERAGE																																																																						

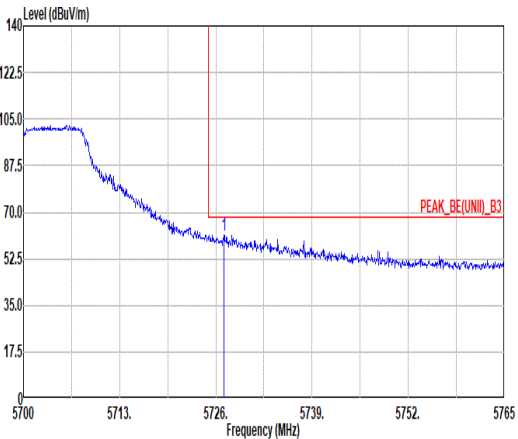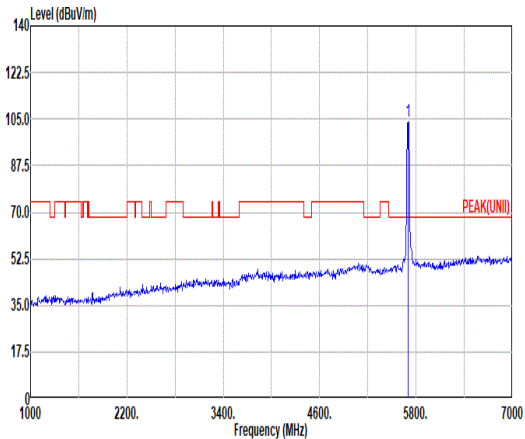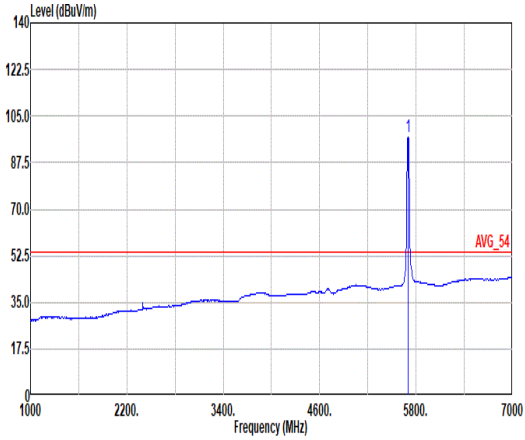

	33																																																																																			
Mode	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE(UNII)_B3</p> <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.11</td> <td>61.49</td> <td>68.20</td> <td>-6.71</td> <td>54.14</td> <td>33.76</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>300</td> <td>266</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5727.11	61.49	68.20	-6.71	54.14	33.76	10.46	36.87	0.00	300	266	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK(UNII)</p> <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>103.98</td> <td>-----</td> <td>-----</td> <td>96.75</td> <td>33.66</td> <td>10.44</td> <td>36.87</td> <td>0.00</td> <td>300</td> <td>266</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	103.98	-----	-----	96.75	33.66	10.44	36.87	0.00	300	266	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5727.11	61.49	68.20	-6.71	54.14	33.76	10.46	36.87	0.00	300	266	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	103.98	-----	-----	96.75	33.66	10.44	36.87	0.00	300	266	PEAK																																																																								
Avg	Blank	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.99</td> <td>-----</td> <td>-----</td> <td>89.81</td> <td>33.62</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>300</td> <td>266</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	96.99	-----	-----	89.81	33.62	10.43	36.87	0.00	300	266	AVERAGE																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	96.99	-----	-----	89.81	33.62	10.43	36.87	0.00	300	266	AVERAGE																																																																								







Mode	33																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.59</td> <td>74.00</td> <td>-28.41</td> <td>46.04</td> <td>39.10</td> <td>15.97</td> <td>56.08</td> <td>0.56</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>46.21</td> <td>68.20</td> <td>-21.99</td> <td>43.73</td> <td>38.40</td> <td>19.57</td> <td>56.29</td> <td>0.80</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	11400.00	45.59	74.00	-28.41	46.04	39.10	15.97	56.08	0.56	--	--	PEAK	2	17100.00	46.21	68.20	-21.99	43.73	38.40	19.57	56.29	0.80	--	--	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.78</td> <td>74.00</td> <td>-28.22</td> <td>46.23</td> <td>39.10</td> <td>15.97</td> <td>56.08</td> <td>0.56</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>46.16</td> <td>68.20</td> <td>-22.04</td> <td>43.68</td> <td>38.40</td> <td>19.57</td> <td>56.29</td> <td>0.80</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	11400.00	45.78	74.00	-28.22	46.23	39.10	15.97	56.08	0.56	--	--	PEAK	2	17100.00	46.16	68.20	-22.04	43.68	38.40	19.57	56.29	0.80	--	--	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																			
1	11400.00	45.59	74.00	-28.41	46.04	39.10	15.97	56.08	0.56	--	--	PEAK																																																																				
2	17100.00	46.21	68.20	-21.99	43.73	38.40	19.57	56.29	0.80	--	--	PEAK																																																																				
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																				
1	11400.00	45.78	74.00	-28.22	46.23	39.10	15.97	56.08	0.56	--	--	PEAK																																																																				
2	17100.00	46.16	68.20	-22.04	43.68	38.40	19.57	56.29	0.80	--	--	PEAK																																																																				



	33	
Mode	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>
	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>

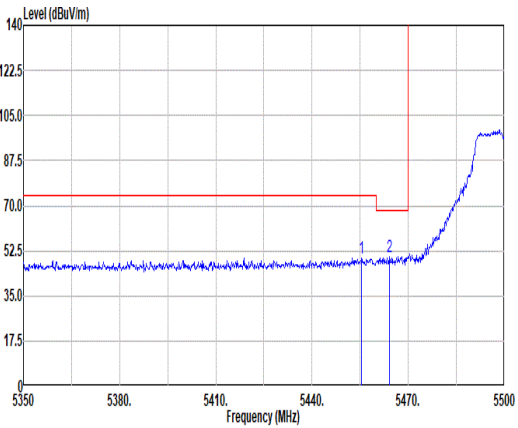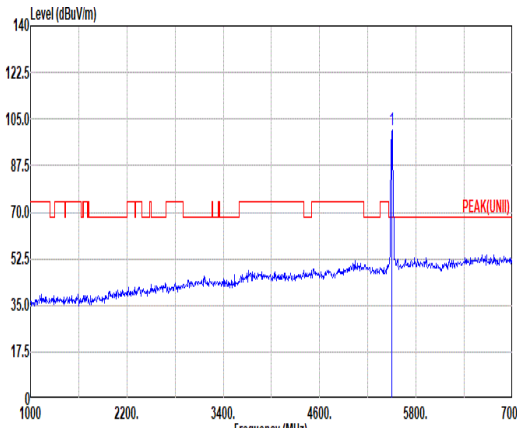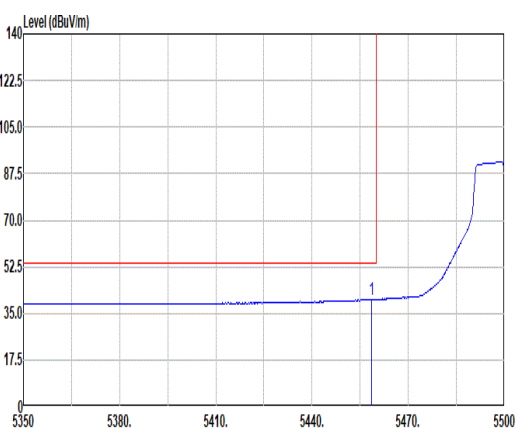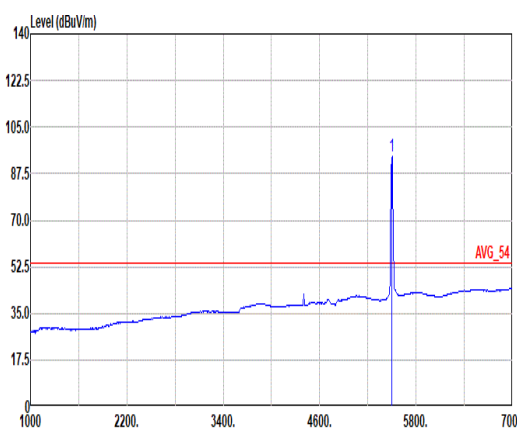

	34																																																																																													
Mode	Band Edge																																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal	Fundamental																																																																																												
Peak	 <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.45</td> <td>49.88</td> <td>74.00</td> <td>-24.12</td> <td>43.32</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>100</td> <td>92</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.15</td> <td>50.34</td> <td>68.20</td> <td>-17.86</td> <td>43.77</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>100</td> <td>92</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5455.45	49.88	74.00	-24.12	43.32	33.10	10.31	36.85	0.00	100	92	PEAK	2	5464.15	50.34	68.20	-17.86	43.77	33.10	10.31	36.84	0.00	100	92	PEAK	 <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>100.90</td> <td>-----</td> <td>94.30</td> <td>33.10</td> <td>10.32</td> <td>36.82</td> <td>0.00</td> <td>100</td> <td>92</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5500.00	100.90	-----	94.30	33.10	10.32	36.82	0.00	100	92	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																						
1	5455.45	49.88	74.00	-24.12	43.32	33.10	10.31	36.85	0.00	100	92	PEAK																																																																																		
2	5464.15	50.34	68.20	-17.86	43.77	33.10	10.31	36.84	0.00	100	92	PEAK																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																						
1	5500.00	100.90	-----	94.30	33.10	10.32	36.82	0.00	100	92	PEAK																																																																																			
Avg	 <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.60</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>33.71</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>100</td> <td>92</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5450.60	40.27	54.00	-13.73	33.71	33.10	10.31	36.85	0.00	100	92	AVERAGE	 <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>93.81</td> <td>-----</td> <td>87.21</td> <td>33.10</td> <td>10.32</td> <td>36.82</td> <td>0.00</td> <td>100</td> <td>92</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5500.00	93.81	-----	87.21	33.10	10.32	36.82	0.00	100	92	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																						
1	5450.60	40.27	54.00	-13.73	33.71	33.10	10.31	36.85	0.00	100	92	AVERAGE																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																						
1	5500.00	93.81	-----	87.21	33.10	10.32	36.82	0.00	100	92	AVERAGE																																																																																			



		34																																																																	
Mode	Band Edge																																																																		
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																		
ANT	1																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5442.10</td> <td>50.56</td> <td>74.00</td> <td>-23.44</td> <td>44.01</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>274</td> <td>222</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.70</td> <td>49.78</td> <td>68.20</td> <td>-18.42</td> <td>43.21</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>274</td> <td>222</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	Aux Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5442.10	50.56	74.00	-23.44	44.01	33.10	10.31	36.86	0.00	274	222	PEAK	2	5469.70	49.78	68.20	-18.42	43.21	33.10	10.31	36.84	0.00	274	222	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.44</td> <td>98.44</td> <td>0.00</td> <td>91.85</td> <td>33.10</td> <td>10.31</td> <td>36.82</td> <td>0.00</td> <td>274</td> <td>222</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	Aux Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5500.00	98.44	98.44	0.00	91.85	33.10	10.31	36.82	0.00	274	222	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	Aux Loss (dB)	APos (cm)	TPos (deg)	Remark																																																						
1	5442.10	50.56	74.00	-23.44	44.01	33.10	10.31	36.86	0.00	274	222	PEAK																																																							
2	5469.70	49.78	68.20	-18.42	43.21	33.10	10.31	36.84	0.00	274	222	PEAK																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	Aux Loss (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5500.00	98.44	98.44	0.00	91.85	33.10	10.31	36.82	0.00	274	222	PEAK																																																							
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.05</td> <td>40.13</td> <td>54.00</td> <td>-13.87</td> <td>33.57</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>274</td> <td>222</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	Aux Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5459.05	40.13	54.00	-13.87	33.57	33.10	10.31	36.85	0.00	274	222	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>91.32</td> <td>54.00</td> <td>37.32</td> <td>84.73</td> <td>33.10</td> <td>10.31</td> <td>36.82</td> <td>0.00</td> <td>274</td> <td>222</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	Aux Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5500.00	91.32	54.00	37.32	84.73	33.10	10.31	36.82	0.00	274	222	AVERAGE													
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	Aux Loss (dB)	APos (cm)	TPos (deg)	Remark																																																						
1	5459.05	40.13	54.00	-13.87	33.57	33.10	10.31	36.85	0.00	274	222	AVERAGE																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Factor (dB)	Cable Loss (dB)	Preamp Loss (dB)	Aux Loss (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5500.00	91.32	54.00	37.32	84.73	33.10	10.31	36.82	0.00	274	222	AVERAGE																																																							







Mode	34																																																																																											
	Harmonic																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>46.06</td> <td>74.00</td> <td>-27.94</td> <td>47.20</td> <td>38.90</td> <td>15.70</td> <td>56.29</td> <td>0.55</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2 16500.00</td> <td>45.15</td> <td>68.20</td> <td>-23.05</td> <td>41.99</td> <td>38.60</td> <td>19.28</td> <td>55.54</td> <td>0.82</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11000.00	46.06	74.00	-27.94	47.20	38.90	15.70	56.29	0.55	--	--	PEAK	2 16500.00	45.15	68.20	-23.05	41.99	38.60	19.28	55.54	0.82	--	--	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>46.06</td> <td>74.00</td> <td>-27.94</td> <td>47.20</td> <td>38.90</td> <td>15.70</td> <td>56.29</td> <td>0.55</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2 16500.00</td> <td>45.01</td> <td>68.20</td> <td>-23.19</td> <td>41.85</td> <td>38.60</td> <td>19.28</td> <td>55.54</td> <td>0.82</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11000.00	46.06	74.00	-27.94	47.20	38.90	15.70	56.29	0.55	--	--	PEAK	2 16500.00	45.01	68.20	-23.19	41.85	38.60	19.28	55.54	0.82	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1 11000.00	46.06	74.00	-27.94	47.20	38.90	15.70	56.29	0.55	--	--	PEAK																																																																																	
2 16500.00	45.15	68.20	-23.05	41.99	38.60	19.28	55.54	0.82	--	--	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1 11000.00	46.06	74.00	-27.94	47.20	38.90	15.70	56.29	0.55	--	--	PEAK																																																																																	
2 16500.00	45.01	68.20	-23.19	41.85	38.60	19.28	55.54	0.82	--	--	PEAK																																																																																	



	34	
Mode	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>

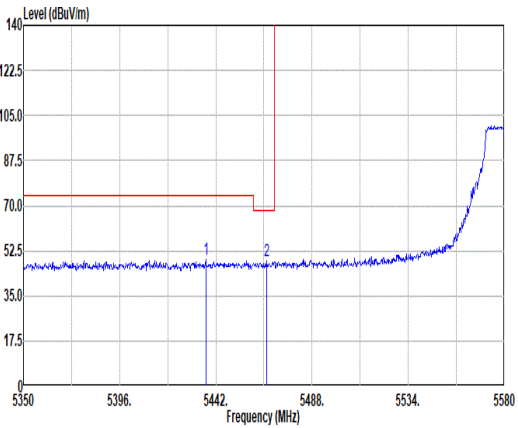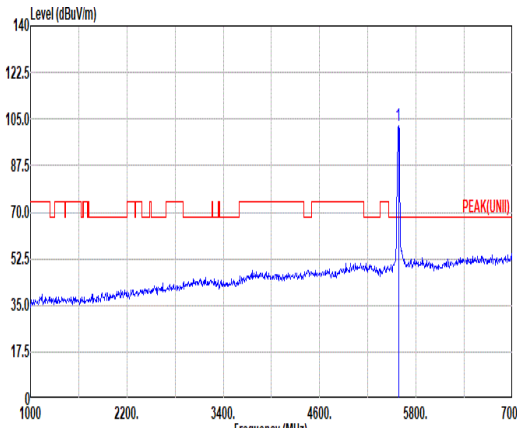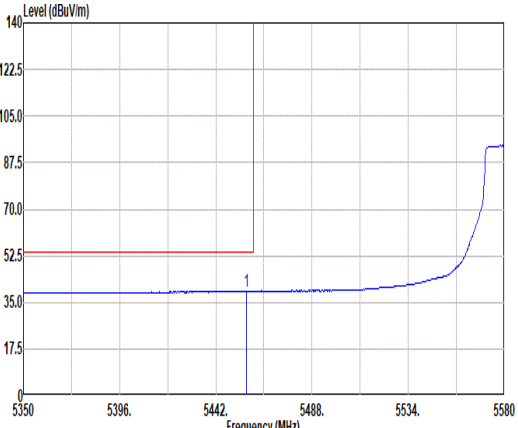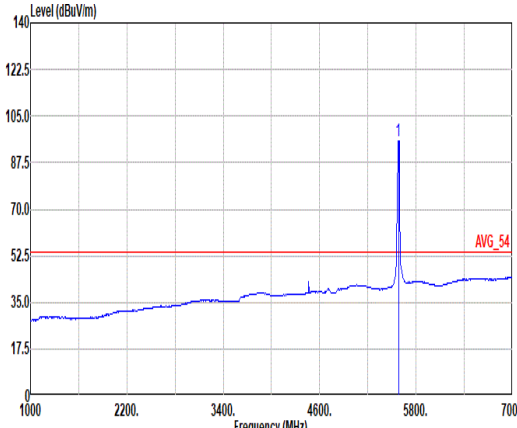

35																																																							
Mode	Band Edge - L																																																						
U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																							
ANT	1																																																						
Pol.	Horizontal																																																						
Peak	 <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5437.17</td> <td>49.19</td> <td>74.00</td> <td>-24.81</td> <td>42.64</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>105</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.38</td> <td>48.40</td> <td>68.20</td> <td>-19.80</td> <td>41.83</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>105</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5437.17	49.19	74.00	-24.81	42.64	33.10	10.31	36.86	0.00	105	90	PEAK	2	5466.38	48.40	68.20	-19.80	41.83	33.10	10.31	36.84	0.00	105	90	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5437.17	49.19	74.00	-24.81	42.64	33.10	10.31	36.86	0.00	105	90	PEAK																																											
2	5466.38	48.40	68.20	-19.80	41.83	33.10	10.31	36.84	0.00	105	90	PEAK																																											
 <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>102.29</td> <td>-----</td> <td>95.78</td> <td>33.03</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>105</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	102.29	-----	95.78	33.03	10.32	36.84	0.00	105	90	PEAK															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5580.00	102.29	-----	95.78	33.03	10.32	36.84	0.00	105	90	PEAK																																												
Avg	 <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.72</td> <td>39.31</td> <td>54.00</td> <td>-14.69</td> <td>32.75</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>105</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.72	39.31	54.00	-14.69	32.75	33.10	10.31	36.85	0.00	105	90	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5456.72	39.31	54.00	-14.69	32.75	33.10	10.31	36.85	0.00	105	90	AVERAGE																																											
 <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>95.71</td> <td>-----</td> <td>89.21</td> <td>33.02</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>105</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	95.71	-----	89.21	33.02	10.32	36.84	0.00	105	90	AVERAGE															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5580.00	95.71	-----	89.21	33.02	10.32	36.84	0.00	105	90	AVERAGE																																												



Mode	35																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5761.12</td> <td>50.93</td> <td>68.20</td> <td>-17.27</td> <td>43.34</td> <td>33.97</td> <td>10.50</td> <td>36.88</td> <td>0.00</td> <td>105</td> <td>90 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5761.12	50.93	68.20	-17.27	43.34	33.97	10.50	36.88	0.00	105	90 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5761.12	50.93	68.20	-17.27	43.34	33.97	10.50	36.88	0.00	105	90 PEAK																															



35																																																							
Mode	Band Edge - L																																																						
U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																							
ANT	1																																																						
Pol.	Vertical																																																						
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5427.05</td> <td>49.28</td> <td>74.00</td> <td>-24.72</td> <td>42.74</td> <td>33.10</td> <td>10.31</td> <td>36.87</td> <td>0.00</td> <td>279</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.24</td> <td>49.13</td> <td>68.20</td> <td>-19.07</td> <td>42.57</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>279</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5427.05	49.28	74.00	-24.72	42.74	33.10	10.31	36.87	0.00	279	255	PEAK	2	5462.24	49.13	68.20	-19.07	42.57	33.10	10.31	36.85	0.00	279	255	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5427.05	49.28	74.00	-24.72	42.74	33.10	10.31	36.87	0.00	279	255	PEAK																																											
2	5462.24	49.13	68.20	-19.07	42.57	33.10	10.31	36.85	0.00	279	255	PEAK																																											
Fundamental	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>103.31</td> <td>-----</td> <td>-----</td> <td>96.80</td> <td>33.03</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>279</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	103.31	-----	-----	96.80	33.03	10.32	36.84	0.00	279	255	PEAK													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5580.00	103.31	-----	-----	96.80	33.03	10.32	36.84	0.00	279	255	PEAK																																											
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.71</td> <td>39.23</td> <td>54.00</td> <td>-14.77</td> <td>32.67</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>279</td> <td>255</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.71	39.23	54.00	-14.77	32.67	33.10	10.31	36.85	0.00	279	255	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5459.71	39.23	54.00	-14.77	32.67	33.10	10.31	36.85	0.00	279	255	AVERAGE																																											
Avg_54	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>95.94</td> <td>-----</td> <td>-----</td> <td>89.44</td> <td>33.02</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>279</td> <td>255</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	95.94	-----	-----	89.44	33.02	10.32	36.84	0.00	279	255	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5580.00	95.94	-----	-----	89.44	33.02	10.32	36.84	0.00	279	255	AVERAGE																																											



Mode	35																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5762.97</td> <td>50.51</td> <td>68.20</td> <td>-17.69</td> <td>42.91</td> <td>33.98</td> <td>10.50</td> <td>36.88</td> <td>0.00</td> <td>279</td> <td>255 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5762.97	50.51	68.20	-17.69	42.91	33.98	10.50	36.88	0.00	279	255 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5762.97	50.51	68.20	-17.69	42.91	33.98	10.50	36.88	0.00	279	255 PEAK																															



Mode	35																																																																																																															
	Harmonic																																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>45.69</td> <td>74.00</td> <td>-28.31</td> <td>46.72</td> <td>38.82</td> <td>15.81</td> <td>56.21</td> <td>0.55</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>44.80</td> <td>68.20</td> <td>-23.40</td> <td>42.03</td> <td>38.40</td> <td>19.38</td> <td>55.82</td> <td>0.81</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	45.69	74.00	-28.31	46.72	38.82	15.81	56.21	0.55	--	PEAK	2	16740.00	44.80	68.20	-23.40	42.03	38.40	19.38	55.82	0.81	--	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>45.39</td> <td>74.00</td> <td>-28.61</td> <td>46.42</td> <td>38.82</td> <td>15.81</td> <td>56.21</td> <td>0.55</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>45.51</td> <td>68.20</td> <td>-22.69</td> <td>42.74</td> <td>38.40</td> <td>19.38</td> <td>55.82</td> <td>0.81</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	45.39	74.00	-28.61	46.42	38.82	15.81	56.21	0.55	--	PEAK	2	16740.00	45.51	68.20	-22.69	42.74	38.40	19.38	55.82	0.81	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	11160.00	45.69	74.00	-28.31	46.72	38.82	15.81	56.21	0.55	--	PEAK																																																																																																					
2	16740.00	44.80	68.20	-23.40	42.03	38.40	19.38	55.82	0.81	--	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	11160.00	45.39	74.00	-28.61	46.42	38.82	15.81	56.21	0.55	--	PEAK																																																																																																					
2	16740.00	45.51	68.20	-22.69	42.74	38.40	19.38	55.82	0.81	--	PEAK																																																																																																					






	35	
Mode	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>
	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>



	36																																																																																	
Mode	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.04</td> <td>62.76</td> <td>68.20</td> <td>-5.44</td> <td>55.41</td> <td>33.76</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>100</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5727.04	62.76	68.20	-5.44	55.41	33.76	10.46	36.87	0.00	100	102	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>103.92</td> <td>-----</td> <td>-----</td> <td>96.78</td> <td>33.58</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>100</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	103.92	-----	-----	96.78	33.58	10.43	36.87	0.00	100	102	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5727.04	62.76	68.20	-5.44	55.41	33.76	10.46	36.87	0.00	100	102	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	103.92	-----	-----	96.78	33.58	10.43	36.87	0.00	100	102	PEAK																																																																							
Avg	Blank	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.54</td> <td>-----</td> <td>-----</td> <td>89.36</td> <td>33.62</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>100</td> <td>102</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	96.54	-----	-----	89.36	33.62	10.43	36.87	0.00	100	102	AVERAGE																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	96.54	-----	-----	89.36	33.62	10.43	36.87	0.00	100	102	AVERAGE																																																																							

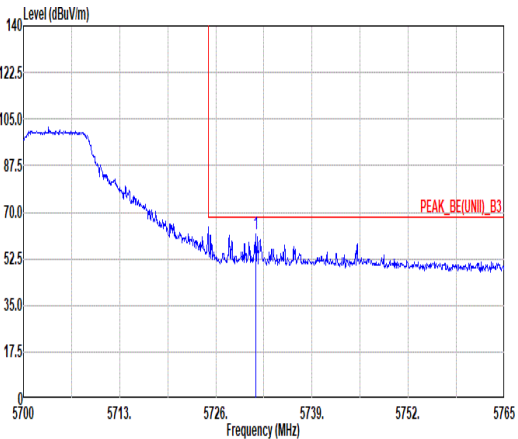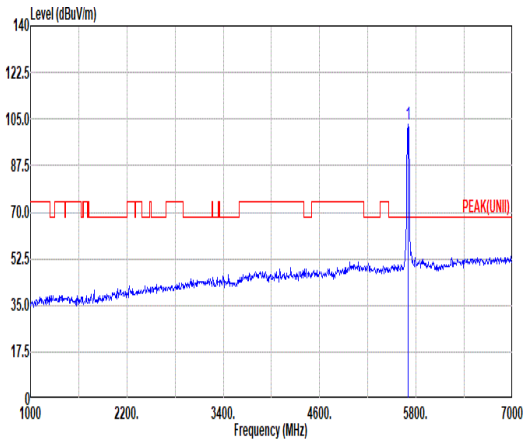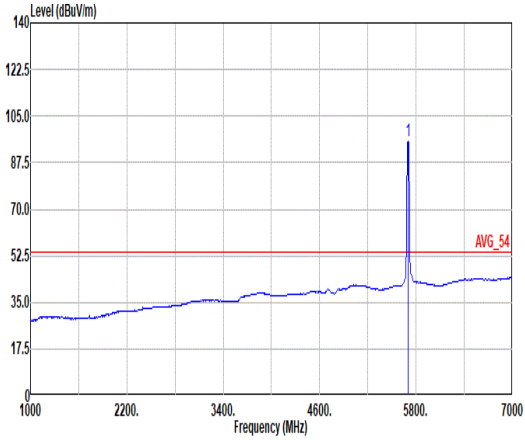

	36																																																																																			
Mode	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0</p> <p>5700 5713. 5726. 5739. 5752. 5765</p> <p>Frequency (MHz)</p> <p>PEAK_BE(UNII)_B3</p> <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5731.40</td> <td>61.98</td> <td>68.20</td> <td>-6.22</td> <td>54.61</td> <td>33.79</td> <td>10.46</td> <td>36.88</td> <td>0.00</td> <td>300</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5731.40	61.98	68.20	-6.22	54.61	33.79	10.46	36.88	0.00	300	257	PEAK	 <p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p>Frequency (MHz)</p> <p>PEAK(UNII)</p> <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.09</td> <td>-----</td> <td>-----</td> <td>95.71</td> <td>33.62</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>300</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	102.09	-----	-----	95.71	33.62	10.43	36.87	0.00	300	257	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5731.40	61.98	68.20	-6.22	54.61	33.79	10.46	36.88	0.00	300	257	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	102.09	-----	-----	95.71	33.62	10.43	36.87	0.00	300	257	PEAK																																																																								
Avg	Blank	 <p>Level (dBuV/m)</p> <p>140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>95.44</td> <td>-----</td> <td>-----</td> <td>88.26</td> <td>33.62</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>300</td> <td>257</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	95.44	-----	-----	88.26	33.62	10.43	36.87	0.00	300	257	AVERAGE																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	95.44	-----	-----	88.26	33.62	10.43	36.87	0.00	300	257	AVERAGE																																																																								



Mode	36																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.32</td> <td>74.00</td> <td>-27.68</td> <td>46.77</td> <td>39.10</td> <td>15.97</td> <td>56.08</td> <td>0.56</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>45.90</td> <td>68.20</td> <td>-22.30</td> <td>43.42</td> <td>38.40</td> <td>19.57</td> <td>56.29</td> <td>0.80</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	46.32	74.00	-27.68	46.77	39.10	15.97	56.08	0.56	--	--	PEAK	2	17100.00	45.90	68.20	-22.30	43.42	38.40	19.57	56.29	0.80	--	--	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.39</td> <td>74.00</td> <td>-27.61</td> <td>46.84</td> <td>39.10</td> <td>15.97</td> <td>56.08</td> <td>0.56</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>45.39</td> <td>68.20</td> <td>-22.81</td> <td>42.91</td> <td>38.40</td> <td>19.57</td> <td>56.29</td> <td>0.80</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	46.39	74.00	-27.61	46.84	39.10	15.97	56.08	0.56	--	--	PEAK	2	17100.00	45.39	68.20	-22.81	42.91	38.40	19.57	56.29	0.80	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	11400.00	46.32	74.00	-27.68	46.77	39.10	15.97	56.08	0.56	--	--	PEAK																																																																																																								
2	17100.00	45.90	68.20	-22.30	43.42	38.40	19.57	56.29	0.80	--	--	PEAK																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	11400.00	46.39	74.00	-27.61	46.84	39.10	15.97	56.08	0.56	--	--	PEAK																																																																																																								
2	17100.00	45.39	68.20	-22.81	42.91	38.40	19.57	56.29	0.80	--	--	PEAK																																																																																																								



	36	
Mode	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>
	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>



		37																																																																	
Mode	Band Edge - L																																																																		
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																		
ANT	1																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5459.28</th> <th>51.27</th> <th>74.00</th> <th>-22.73</th> <th>44.71</th> <th>33.10</th> <th>10.31</th> <th>36.85</th> <th>0.00</th> <th>100</th> <th>95</th> <th>PEAK</th> </tr> <tr> <th>2</th> <th>5468.72</th> <th>53.02</th> <th>68.20</th> <th>-15.18</th> <th>46.45</th> <th>33.10</th> <th>10.31</th> <th>36.84</th> <th>0.00</th> <th>100</th> <th>95</th> <th>PEAK</th> </tr> </thead> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	5459.28	51.27	74.00	-22.73	44.71	33.10	10.31	36.85	0.00	100	95	PEAK	2	5468.72	53.02	68.20	-15.18	46.45	33.10	10.31	36.84	0.00	100	95	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5510.00</th> <th>98.46</th> <th>-----</th> <th>-----</th> <th>91.86</th> <th>33.10</th> <th>10.32</th> <th>36.82</th> <th>0.00</th> <th>100</th> <th>95</th> <th>PEAK</th> </tr> </thead> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	5510.00	98.46	-----	-----	91.86	33.10	10.32	36.82	0.00	100	95	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																						
1	5459.28	51.27	74.00	-22.73	44.71	33.10	10.31	36.85	0.00	100	95	PEAK																																																							
2	5468.72	53.02	68.20	-15.18	46.45	33.10	10.31	36.84	0.00	100	95	PEAK																																																							
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																							
1	5510.00	98.46	-----	-----	91.86	33.10	10.32	36.82	0.00	100	95	PEAK																																																							
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5459.60</th> <th>42.16</th> <th>54.00</th> <th>-11.84</th> <th>35.60</th> <th>33.10</th> <th>10.31</th> <th>36.85</th> <th>0.00</th> <th>100</th> <th>95</th> <th>AVERAGE</th> </tr> </thead> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	5459.60	42.16	54.00	-11.84	35.60	33.10	10.31	36.85	0.00	100	95	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5510.00</th> <th>92.17</th> <th>-----</th> <th>-----</th> <th>85.50</th> <th>33.10</th> <th>10.32</th> <th>36.83</th> <th>0.00</th> <th>100</th> <th>95</th> <th>AVERAGE</th> </tr> </thead> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	5510.00	92.17	-----	-----	85.50	33.10	10.32	36.83	0.00	100	95	AVERAGE													
	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																						
1	5459.60	42.16	54.00	-11.84	35.60	33.10	10.31	36.85	0.00	100	95	AVERAGE																																																							
Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																							
1	5510.00	92.17	-----	-----	85.50	33.10	10.32	36.83	0.00	100	95	AVERAGE																																																							



Mode	37																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																							
ANT	1																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5734.15</td> <td>49.91</td> <td>68.20 -18.29</td> <td>42.52</td> <td>33.80</td> <td>10.47</td> <td>36.88</td> <td>0.00</td> <td>100</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5734.15	49.91	68.20 -18.29	42.52	33.80	10.47	36.88	0.00	100	95 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5734.15	49.91	68.20 -18.29	42.52	33.80	10.47	36.88	0.00	100	95 PEAK																															







37																																																							
Mode	Band Edge - L																																																						
U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																							
ANT	1																																																						
Pol.	Vertical																																																						
Peak	<p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>50.97</td> <td>74.00</td> <td>-23.03</td> <td>44.41</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>300</td> <td>222</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5460.08</td> <td>51.65</td> <td>68.20</td> <td>-16.55</td> <td>45.09</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>300</td> <td>222</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	50.97	74.00	-23.03	44.41	33.10	10.31	36.85	0.00	300	222	PEAK	2	5460.08	51.65	68.20	-16.55	45.09	33.10	10.31	36.85	0.00	300	222	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5459.92	50.97	74.00	-23.03	44.41	33.10	10.31	36.85	0.00	300	222	PEAK																																											
2	5460.08	51.65	68.20	-16.55	45.09	33.10	10.31	36.85	0.00	300	222	PEAK																																											
Fundamental	<p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>98.02</td> <td>-----</td> <td>-----</td> <td>91.43</td> <td>33.10</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>300</td> <td>222</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	98.02	-----	-----	91.43	33.10	10.32	36.83	0.00	300	222	PEAK													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5510.00	98.02	-----	-----	91.43	33.10	10.32	36.83	0.00	300	222	PEAK																																											
Avg	<p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>42.21</td> <td>54.00</td> <td>-11.79</td> <td>35.65</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>300</td> <td>222</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	42.21	54.00	-11.79	35.65	33.10	10.31	36.85	0.00	300	222	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5459.60	42.21	54.00	-11.79	35.65	33.10	10.31	36.85	0.00	300	222	AVERAGE																																											
Avg	<p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>91.14</td> <td>-----</td> <td>-----</td> <td>84.55</td> <td>33.10</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>300</td> <td>222</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	91.14	-----	-----	84.55	33.10	10.32	36.83	0.00	300	222	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5510.00	91.14	-----	-----	84.55	33.10	10.32	36.83	0.00	300	222	AVERAGE																																											



Mode	37																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																							
ANT	1																																							
Pol.	Vertical	Fundamental																																						
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5744.35</td> <td>49.89</td> <td>68.20 -18.31</td> <td>42.42</td> <td>33.87</td> <td>10.48</td> <td>36.88</td> <td>0.00</td> <td>300</td> <td>222 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5744.35	49.89	68.20 -18.31	42.42	33.87	10.48	36.88	0.00	300	222 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5744.35	49.89	68.20 -18.31	42.42	33.87	10.48	36.88	0.00	300	222 PEAK																															

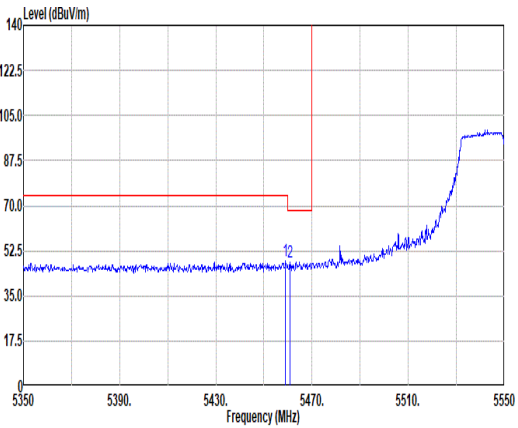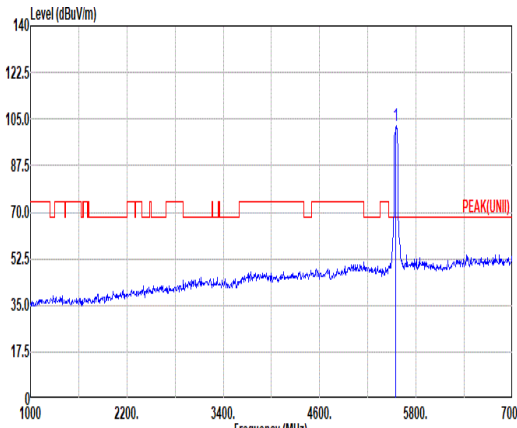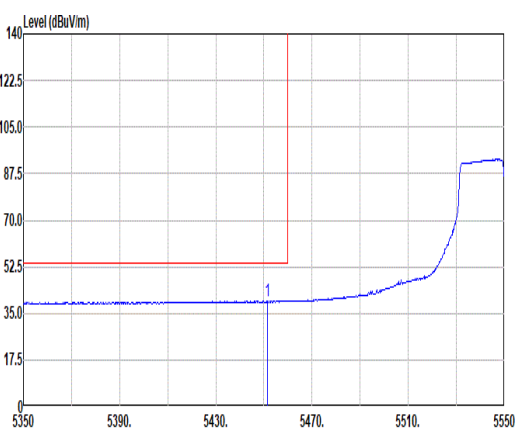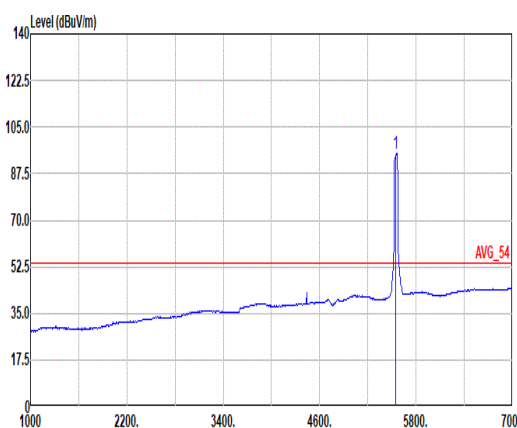

		38																																																																																																					
Mode	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak	 <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.00</td> <td>48.34</td> <td>74.00</td> <td>-25.66</td> <td>41.78</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>101</td> <td>94</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5460.80</td> <td>47.99</td> <td>68.20</td> <td>-20.21</td> <td>41.43</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>101</td> <td>94</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.00	48.34	74.00	-25.66	41.78	33.10	10.31	36.85	0.00	101	94	PEAK	2	5460.80	47.99	68.20	-20.21	41.43	33.10	10.31	36.85	0.00	101	94	PEAK	 <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>102.38</td> <td>-----</td> <td>-----</td> <td>95.81</td> <td>33.08</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>101</td> <td>94</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	102.38	-----	-----	95.81	33.08	10.32	36.83	0.00	101	94	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5459.00	48.34	74.00	-25.66	41.78	33.10	10.31	36.85	0.00	101	94	PEAK																																																																																											
2	5460.80	47.99	68.20	-20.21	41.43	33.10	10.31	36.85	0.00	101	94	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5550.00	102.38	-----	-----	95.81	33.08	10.32	36.83	0.00	101	94	PEAK																																																																																											
Avg	 <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.60</td> <td>39.63</td> <td>54.00</td> <td>-14.37</td> <td>33.07</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>101</td> <td>94</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5451.60	39.63	54.00	-14.37	33.07	33.10	10.31	36.85	0.00	101	94	AVERAGE	 <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>95.09</td> <td>-----</td> <td>-----</td> <td>88.54</td> <td>33.07</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>101</td> <td>94</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	95.09	-----	-----	88.54	33.07	10.32	36.84	0.00	101	94	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5451.60	39.63	54.00	-14.37	33.07	33.10	10.31	36.85	0.00	101	94	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5550.00	95.09	-----	-----	88.54	33.07	10.32	36.84	0.00	101	94	AVERAGE																																																																																											



Mode	38																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																							
ANT	1																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5751.89</td> <td>49.88</td> <td>68.20</td> <td>-18.32</td> <td>42.36</td> <td>33.91</td> <td>10.49</td> <td>36.88</td> <td>0.00</td> <td>101 94 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5751.89	49.88	68.20	-18.32	42.36	33.91	10.49	36.88	0.00	101 94 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5751.89	49.88	68.20	-18.32	42.36	33.91	10.49	36.88	0.00	101 94 PEAK																															



		38																																																																																	
Mode	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																		
ANT	1																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5447.00 48.59 74.00 -25.41</td> <td>42.04</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>300</td> <td>283</td> <td>PEAK</td> </tr> <tr> <td>2 5464.00 48.17 68.20 -20.03</td> <td>41.60</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>300</td> <td>283</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5447.00 48.59 74.00 -25.41	42.04	33.10	10.31	36.86	0.00	300	283	PEAK	2 5464.00 48.17 68.20 -20.03	41.60	33.10	10.31	36.84	0.00	300	283	PEAK	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5550.00 101.31</td> <td>94.74</td> <td>33.08</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>300</td> <td>283</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5550.00 101.31	94.74	33.08	10.32	36.83	0.00	300	283	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5447.00 48.59 74.00 -25.41	42.04	33.10	10.31	36.86	0.00	300	283	PEAK																																																																											
2 5464.00 48.17 68.20 -20.03	41.60	33.10	10.31	36.84	0.00	300	283	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5550.00 101.31	94.74	33.08	10.32	36.83	0.00	300	283	PEAK																																																																											
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5441.00 39.61 54.00 -14.39</td> <td>33.06</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>300</td> <td>283</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5441.00 39.61 54.00 -14.39	33.06	33.10	10.31	36.86	0.00	300	283	AVERAGE	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5550.00 94.00</td> <td>87.45</td> <td>33.07</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>300</td> <td>283</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5550.00 94.00	87.45	33.07	10.32	36.84	0.00	300	283	AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5441.00 39.61 54.00 -14.39	33.06	33.10	10.31	36.86	0.00	300	283	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5550.00 94.00	87.45	33.07	10.32	36.84	0.00	300	283	AVERAGE																																																																											



Mode	38																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5758.34</td> <td>49.76</td> <td>68.20</td> <td>-18.44</td> <td>42.20</td> <td>33.95</td> <td>10.49</td> <td>36.88</td> <td>0.00</td> <td>300</td> <td>283 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5758.34	49.76	68.20	-18.44	42.20	33.95	10.49	36.88	0.00	300	283 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5758.34	49.76	68.20	-18.44	42.20	33.95	10.49	36.88	0.00	300	283 PEAK																															



		39																																																																																																		
Mode	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																		
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.56</td> <td>48.60</td> <td>74.00</td> <td>-25.40</td> <td>42.04</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>100</td> <td>92 PEAK</td> </tr> <tr> <td>2</td> <td>5460.08</td> <td>47.80</td> <td>68.20</td> <td>-20.40</td> <td>41.24</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>100</td> <td>92 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5448.56	48.60	74.00	-25.40	42.04	33.10	10.31	36.85	0.00	100	92 PEAK	2	5460.08	47.80	68.20	-20.40	41.24	33.10	10.31	36.85	0.00	100	92 PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>101.52</td> <td>-----</td> <td>-----</td> <td>94.59</td> <td>33.39</td> <td>10.40</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>92 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	101.52	-----	-----	94.59	33.39	10.40	36.86	0.00	100	92 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5448.56	48.60	74.00	-25.40	42.04	33.10	10.31	36.85	0.00	100	92 PEAK																																																																																									
2	5460.08	47.80	68.20	-20.40	41.24	33.10	10.31	36.85	0.00	100	92 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5670.00	101.52	-----	-----	94.59	33.39	10.40	36.86	0.00	100	92 PEAK																																																																																									
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.96</td> <td>39.58</td> <td>54.00</td> <td>-14.42</td> <td>33.03</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>92 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5446.96	39.58	54.00	-14.42	33.03	33.10	10.31	36.86	0.00	100	92 AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>94.61</td> <td>-----</td> <td>-----</td> <td>87.57</td> <td>33.49</td> <td>10.41</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>92 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	94.61	-----	-----	87.57	33.49	10.41	36.86	0.00	100	92 AVERAGE												
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5446.96	39.58	54.00	-14.42	33.03	33.10	10.31	36.86	0.00	100	92 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5670.00	94.61	-----	-----	87.57	33.49	10.41	36.86	0.00	100	92 AVERAGE																																																																																									



Mode	39																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.00</td> <td>61.20</td> <td>68.20</td> <td>-7.00</td> <td>53.85</td> <td>33.76</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>100</td> <td>92 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5727.00	61.20	68.20	-7.00	53.85	33.76	10.46	36.87	0.00	100	92 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5727.00	61.20	68.20	-7.00	53.85	33.76	10.46	36.87	0.00	100	92 PEAK																															



		39																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical	Fundamental																																																																																											
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5436.72</td> <td>49.74</td> <td>74.00</td> <td>-24.26</td> <td>43.19</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>300</td> <td>259</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.60</td> <td>47.94</td> <td>68.20</td> <td>-20.26</td> <td>41.37</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>300</td> <td>259</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5436.72	49.74	74.00	-24.26	43.19	33.10	10.31	36.86	0.00	300	259	PEAK	2	5463.60	47.94	68.20	-20.26	41.37	33.10	10.31	36.84	0.00	300	259	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>98.70</td> <td>-----</td> <td>-----</td> <td>91.66</td> <td>33.49</td> <td>10.41</td> <td>36.86</td> <td>0.00</td> <td>300</td> <td>259</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	98.70	-----	-----	91.66	33.49	10.41	36.86	0.00	300	259	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5436.72	49.74	74.00	-24.26	43.19	33.10	10.31	36.86	0.00	300	259	PEAK																																																																																	
2	5463.60	47.94	68.20	-20.26	41.37	33.10	10.31	36.84	0.00	300	259	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5670.00	98.70	-----	-----	91.66	33.49	10.41	36.86	0.00	300	259	PEAK																																																																																	
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.00</td> <td>39.47</td> <td>54.00</td> <td>-14.53</td> <td>32.91</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>300</td> <td>259</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.00	39.47	54.00	-14.53	32.91	33.10	10.31	36.85	0.00	300	259	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>91.69</td> <td>-----</td> <td>-----</td> <td>84.65</td> <td>33.49</td> <td>10.41</td> <td>36.86</td> <td>0.00</td> <td>300</td> <td>259</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	91.69	-----	-----	84.65	33.49	10.41	36.86	0.00	300	259	AVERAGE													
Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5456.00	39.47	54.00	-14.53	32.91	33.10	10.31	36.85	0.00	300	259	AVERAGE																																																																																	
Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5670.00	91.69	-----	-----	84.65	33.49	10.41	36.86	0.00	300	259	AVERAGE																																																																																	



Mode	39																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.10</td> <td>57.33</td> <td>68.20</td> <td>-10.87</td> <td>49.98</td> <td>33.76</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>300</td> <td>259</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5727.10	57.33	68.20	-10.87	49.98	33.76	10.46	36.87	0.00	300	259	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5727.10	57.33	68.20	-10.87	49.98	33.76	10.46	36.87	0.00	300	259	PEAK																															



		40																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																												
ANT	1																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5439.28</td> <td>56.40</td> <td>74.00</td> <td>-17.60</td> <td>49.85</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>97</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.06</td> <td>57.00</td> <td>68.20</td> <td>-11.20</td> <td>50.44</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>100</td> <td>97</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5439.28	56.40	74.00	-17.60	49.85	33.10	10.31	36.86	0.00	100	97	PEAK	2	5461.06	57.00	68.20	-11.20	50.44	33.10	10.31	36.85	0.00	100	97	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>99.29</td> <td>70.00</td> <td>29.29</td> <td>92.70</td> <td>33.10</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>100</td> <td>97</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	99.29	70.00	29.29	92.70	33.10	10.32	36.83	0.00	100	97	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5439.28	56.40	74.00	-17.60	49.85	33.10	10.31	36.86	0.00	100	97	PEAK																																																																																	
2	5461.06	57.00	68.20	-11.20	50.44	33.10	10.31	36.85	0.00	100	97	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5530.00	99.29	70.00	29.29	92.70	33.10	10.32	36.83	0.00	100	97	PEAK																																																																																	
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.28</td> <td>44.97</td> <td>54.00</td> <td>-9.03</td> <td>38.42</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>97</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5448.28	44.97	54.00	-9.03	38.42	33.10	10.31	36.86	0.00	100	97	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>91.61</td> <td>52.50</td> <td>39.11</td> <td>85.04</td> <td>33.08</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>100</td> <td>97</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	91.61	52.50	39.11	85.04	33.08	10.32	36.83	0.00	100	97	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5448.28	44.97	54.00	-9.03	38.42	33.10	10.31	36.86	0.00	100	97	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5530.00	91.61	52.50	39.11	85.04	33.08	10.32	36.83	0.00	100	97	AVERAGE																																																																																	



Mode	40																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5755.13</td> <td>50.86</td> <td>68.20</td> <td>-17.34</td> <td>43.32</td> <td>33.93</td> <td>10.49</td> <td>36.88</td> <td>0.00</td> <td>100</td> <td>97 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5755.13	50.86	68.20	-17.34	43.32	33.93	10.49	36.88	0.00	100	97 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5755.13	50.86	68.20	-17.34	43.32	33.93	10.49	36.88	0.00	100	97 PEAK																															







		40																																																																	
Mode	Band Edge - L																																																																		
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																		
ANT	1																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5445.40</th> <th>58.23</th> <th>74.00</th> <th>-15.77</th> <th>51.68</th> <th>33.10</th> <th>10.31</th> <th>36.86</th> <th>0.00</th> <th>300</th> <th>227</th> <th>PEAK</th> </tr> <tr> <th>2</th> <th>5467.00</th> <th>54.28</th> <th>68.20</th> <th>-13.92</th> <th>47.71</th> <th>33.10</th> <th>10.31</th> <th>36.84</th> <th>0.00</th> <th>300</th> <th>227</th> <th>PEAK</th> </tr> </thead> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	5445.40	58.23	74.00	-15.77	51.68	33.10	10.31	36.86	0.00	300	227	PEAK	2	5467.00	54.28	68.20	-13.92	47.71	33.10	10.31	36.84	0.00	300	227	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5530.00</th> <th>97.45</th> <th>-----</th> <th>-----</th> <th>90.88</th> <th>33.08</th> <th>10.32</th> <th>36.83</th> <th>0.00</th> <th>300</th> <th>227</th> <th>PEAK</th> </tr> </thead> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	5530.00	97.45	-----	-----	90.88	33.08	10.32	36.83	0.00	300	227	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																						
1	5445.40	58.23	74.00	-15.77	51.68	33.10	10.31	36.86	0.00	300	227	PEAK																																																							
2	5467.00	54.28	68.20	-13.92	47.71	33.10	10.31	36.84	0.00	300	227	PEAK																																																							
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																							
1	5530.00	97.45	-----	-----	90.88	33.08	10.32	36.83	0.00	300	227	PEAK																																																							
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5448.02</th> <th>43.70</th> <th>54.00</th> <th>-10.30</th> <th>37.14</th> <th>33.10</th> <th>10.31</th> <th>36.85</th> <th>0.00</th> <th>300</th> <th>227</th> <th>AVERAGE</th> </tr> </thead> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	5448.02	43.70	54.00	-10.30	37.14	33.10	10.31	36.85	0.00	300	227	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5530.00</th> <th>90.53</th> <th>-----</th> <th>-----</th> <th>83.98</th> <th>33.07</th> <th>10.32</th> <th>36.84</th> <th>0.00</th> <th>300</th> <th>227</th> <th>AVERAGE</th> </tr> </thead> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	5530.00	90.53	-----	-----	83.98	33.07	10.32	36.84	0.00	300	227	AVERAGE													
	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																						
1	5448.02	43.70	54.00	-10.30	37.14	33.10	10.31	36.85	0.00	300	227	AVERAGE																																																							
Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																							
1	5530.00	90.53	-----	-----	83.98	33.07	10.32	36.84	0.00	300	227	AVERAGE																																																							



Mode	40																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(U-NII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5750.43</td> <td>49.94</td> <td>68.20</td> <td>-18.26</td> <td>42.43</td> <td>33.90</td> <td>10.49</td> <td>36.88</td> <td>0.00</td> <td>300</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5750.43	49.94	68.20	-18.26	42.43	33.90	10.49	36.88	0.00	300	227	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5750.43	49.94	68.20	-18.26	42.43	33.90	10.49	36.88	0.00	300	227	PEAK																															

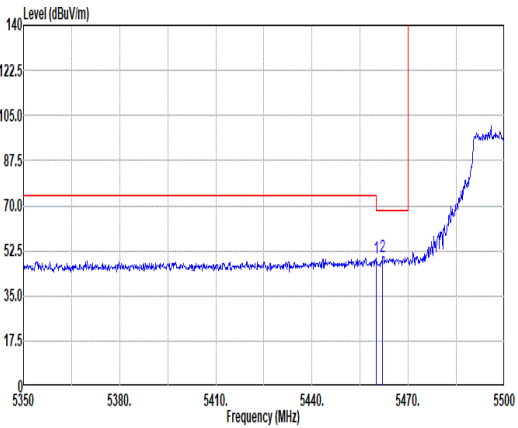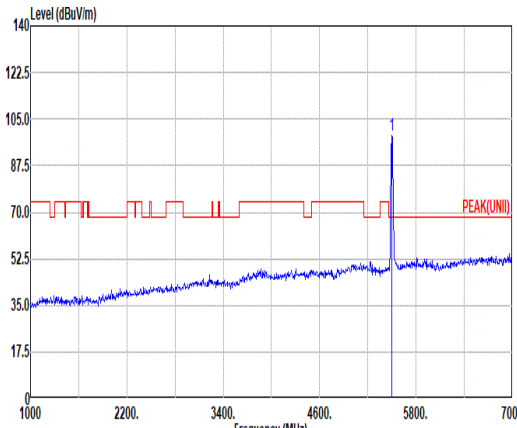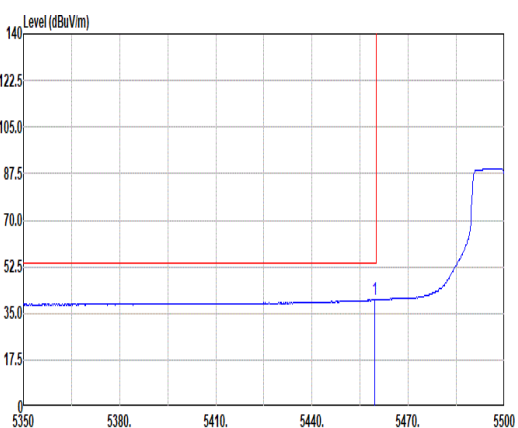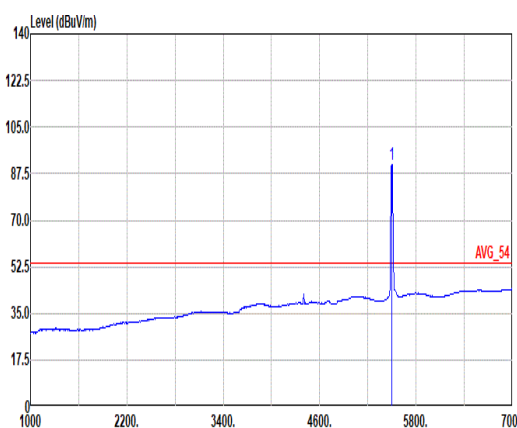

		41																																																																																	
Mode	Band Edge																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	 <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.95 49.90 74.00 -24.10</td> <td>43.34 33.10</td> <td>10.31 36.85</td> <td>0.00</td> <td>100</td> <td>85</td> <td>PEAK</td> <td></td> <td></td> </tr> <tr> <td>2 5462.05 50.29 68.20 -17.91</td> <td>43.73 33.10</td> <td>10.31 36.85</td> <td>0.00</td> <td>100</td> <td>85</td> <td>PEAK</td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5459.95 49.90 74.00 -24.10	43.34 33.10	10.31 36.85	0.00	100	85	PEAK			2 5462.05 50.29 68.20 -17.91	43.73 33.10	10.31 36.85	0.00	100	85	PEAK			 <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 98.79</td> <td>92.20 33.10</td> <td>10.31 36.82</td> <td>0.00</td> <td>100</td> <td>85</td> <td>PEAK</td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5500.00 98.79	92.20 33.10	10.31 36.82	0.00	100	85	PEAK		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5459.95 49.90 74.00 -24.10	43.34 33.10	10.31 36.85	0.00	100	85	PEAK																																																																													
2 5462.05 50.29 68.20 -17.91	43.73 33.10	10.31 36.85	0.00	100	85	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5500.00 98.79	92.20 33.10	10.31 36.82	0.00	100	85	PEAK																																																																													
Avg	 <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.65 40.11 54.00 -13.89</td> <td>33.55 33.10</td> <td>10.31 36.85</td> <td>0.00</td> <td>100</td> <td>85</td> <td>AVERAGE</td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5459.65 40.11 54.00 -13.89	33.55 33.10	10.31 36.85	0.00	100	85	AVERAGE			 <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 90.93</td> <td>84.33 33.10</td> <td>10.32 36.82</td> <td>0.00</td> <td>100</td> <td>85</td> <td>AVERAGE</td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5500.00 90.93	84.33 33.10	10.32 36.82	0.00	100	85	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5459.65 40.11 54.00 -13.89	33.55 33.10	10.31 36.85	0.00	100	85	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5500.00 90.93	84.33 33.10	10.32 36.82	0.00	100	85	AVERAGE																																																																													



		41																																																																	
Mode	Band Edge																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																		
ANT	1																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5454.10</th> <th>50.92</th> <th>74.00</th> <th>-23.08</th> <th>44.36</th> <th>33.10</th> <th>10.31</th> <th>36.85</th> <th>0.00</th> <th>363</th> <th>226</th> <th>PEAK</th> </tr> <tr> <th>2</th> <th>5469.85</th> <th>52.20</th> <th>68.20</th> <th>-16.00</th> <th>45.63</th> <th>33.10</th> <th>10.31</th> <th>36.84</th> <th>0.00</th> <th>363</th> <th>226</th> <th>PEAK</th> </tr> </thead> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark	1	5454.10	50.92	74.00	-23.08	44.36	33.10	10.31	36.85	0.00	363	226	PEAK	2	5469.85	52.20	68.20	-16.00	45.63	33.10	10.31	36.84	0.00	363	226	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5500.00</th> <th>98.77</th> <th>-----</th> <th>-----</th> <th>92.18</th> <th>33.10</th> <th>10.31</th> <th>36.82</th> <th>0.00</th> <th>363</th> <th>226</th> <th>PEAK</th> </tr> </thead> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark	1	5500.00	98.77	-----	-----	92.18	33.10	10.31	36.82	0.00	363	226	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																						
1	5454.10	50.92	74.00	-23.08	44.36	33.10	10.31	36.85	0.00	363	226	PEAK																																																							
2	5469.85	52.20	68.20	-16.00	45.63	33.10	10.31	36.84	0.00	363	226	PEAK																																																							
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																							
1	5500.00	98.77	-----	-----	92.18	33.10	10.31	36.82	0.00	363	226	PEAK																																																							
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5457.85</th> <th>40.78</th> <th>54.00</th> <th>-13.22</th> <th>34.22</th> <th>33.10</th> <th>10.31</th> <th>36.85</th> <th>0.00</th> <th>363</th> <th>226</th> <th>AVERAGE</th> </tr> </thead> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark	1	5457.85	40.78	54.00	-13.22	34.22	33.10	10.31	36.85	0.00	363	226	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5500.00</th> <th>90.65</th> <th>-----</th> <th>-----</th> <th>84.06</th> <th>33.10</th> <th>10.31</th> <th>36.82</th> <th>0.00</th> <th>363</th> <th>226</th> <th>AVERAGE</th> </tr> </thead> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark	1	5500.00	90.65	-----	-----	84.06	33.10	10.31	36.82	0.00	363	226	AVERAGE													
	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																						
1	5457.85	40.78	54.00	-13.22	34.22	33.10	10.31	36.85	0.00	363	226	AVERAGE																																																							
Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																							
1	5500.00	90.65	-----	-----	84.06	33.10	10.31	36.82	0.00	363	226	AVERAGE																																																							



Mode	41																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.76</td> <td>74.00</td> <td>-27.24</td> <td>47.90</td> <td>38.90</td> <td>15.70</td> <td>56.29</td> <td>0.55</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.39</td> <td>68.20</td> <td>-21.81</td> <td>43.23</td> <td>38.60</td> <td>19.28</td> <td>55.54</td> <td>0.82</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	46.76	74.00	-27.24	47.90	38.90	15.70	56.29	0.55	--	--	PEAK	2	16500.00	46.39	68.20	-21.81	43.23	38.60	19.28	55.54	0.82	--	--	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.75</td> <td>74.00</td> <td>-27.25</td> <td>47.89</td> <td>38.90</td> <td>15.70</td> <td>56.29</td> <td>0.55</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.33</td> <td>68.20</td> <td>-21.87</td> <td>43.17</td> <td>38.60</td> <td>19.28</td> <td>55.54</td> <td>0.82</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	46.75	74.00	-27.25	47.89	38.90	15.70	56.29	0.55	--	--	PEAK	2	16500.00	46.33	68.20	-21.87	43.17	38.60	19.28	55.54	0.82	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	11000.00	46.76	74.00	-27.24	47.90	38.90	15.70	56.29	0.55	--	--	PEAK																																																																																																								
2	16500.00	46.39	68.20	-21.81	43.23	38.60	19.28	55.54	0.82	--	--	PEAK																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	11000.00	46.75	74.00	-27.25	47.89	38.90	15.70	56.29	0.55	--	--	PEAK																																																																																																								
2	16500.00	46.33	68.20	-21.87	43.17	38.60	19.28	55.54	0.82	--	--	PEAK																																																																																																								



	41	
Mode	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>
	17.7G ~18G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>







		42																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full_5580MHz																																																																																												
ANT	1																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5439.47</td> <td>49.38</td> <td>74.00</td> <td>-24.62</td> <td>42.83</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>84</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.55</td> <td>48.37</td> <td>68.20</td> <td>-19.83</td> <td>41.81</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>100</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5439.47	49.38	74.00	-24.62	42.83	33.10	10.31	36.86	0.00	100	84	PEAK	2	5461.55	48.37	68.20	-19.83	41.81	33.10	10.31	36.85	0.00	100	84	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>102.21</td> <td>70.00</td> <td>32.21</td> <td>95.69</td> <td>33.04</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>100</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	102.21	70.00	32.21	95.69	33.04	10.32	36.84	0.00	100	84	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5439.47	49.38	74.00	-24.62	42.83	33.10	10.31	36.86	0.00	100	84	PEAK																																																																																	
2	5461.55	48.37	68.20	-19.83	41.81	33.10	10.31	36.85	0.00	100	84	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	102.21	70.00	32.21	95.69	33.04	10.32	36.84	0.00	100	84	PEAK																																																																																	
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.52</td> <td>38.98</td> <td>54.00</td> <td>-15.02</td> <td>32.43</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>84</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5447.52	38.98	54.00	-15.02	32.43	33.10	10.31	36.86	0.00	100	84	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>93.89</td> <td>54.00</td> <td>39.89</td> <td>87.39</td> <td>33.02</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>100</td> <td>84</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	93.89	54.00	39.89	87.39	33.02	10.32	36.84	0.00	100	84	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5447.52	38.98	54.00	-15.02	32.43	33.10	10.31	36.86	0.00	100	84	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	93.89	54.00	39.89	87.39	33.02	10.32	36.84	0.00	100	84	AVERAGE																																																																																	



Mode	42																																
	Band Edge - R																																
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full_5580MHz																																
ANT	1																																
Pol.	Horizontal	Fundamental																															
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5731.52</td> <td>51.01</td> <td>68.20</td> <td>-17.19</td> <td>43.64</td> <td>33.79</td> <td>10.46</td> <td>36.88</td> <td>0.00</td> <td>100</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	cm	deg		1	5731.52	51.01	68.20	-17.19	43.64	33.79	10.46	36.88	0.00	100	84	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	cm	deg																										
1	5731.52	51.01	68.20	-17.19	43.64	33.79	10.46	36.88	0.00	100	84	PEAK																					

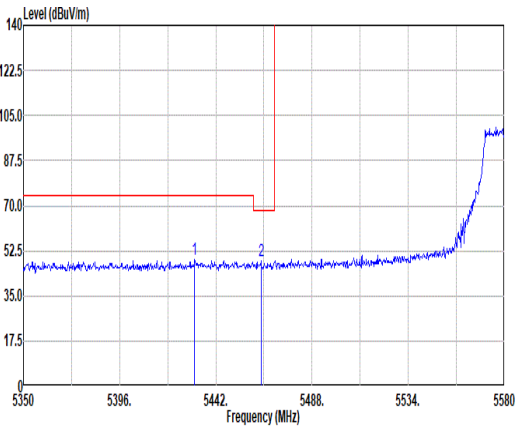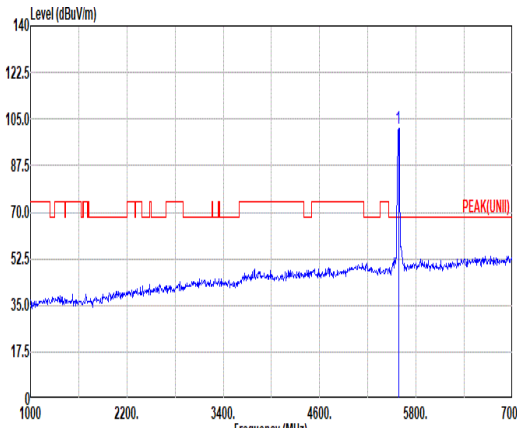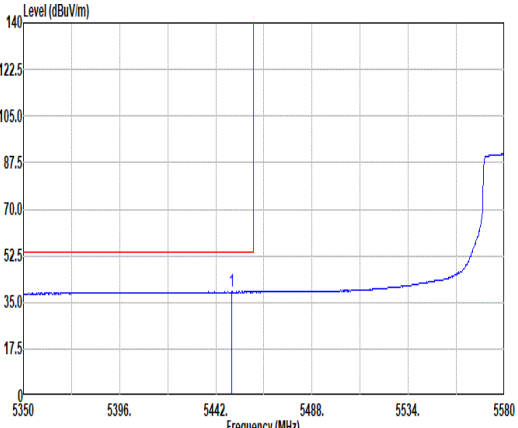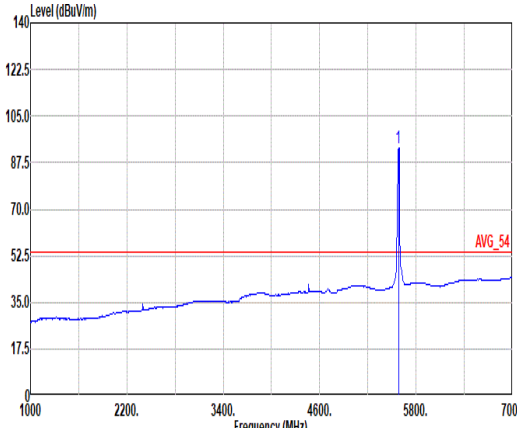

		42																																																																																	
Mode	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full_5580MHz																																																																																		
ANT	1																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5431.88 48.91 74.00 -25.09</td> <td>42.37</td> <td>33.10</td> <td>10.31</td> <td>36.87</td> <td>0.00</td> <td>377</td> <td>209</td> <td>PEAK</td> </tr> <tr> <td>2 5463.62 48.64 68.20 -19.56</td> <td>42.07</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>377</td> <td>209</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dB	dB	dB	dB	dB				1 5431.88 48.91 74.00 -25.09	42.37	33.10	10.31	36.87	0.00	377	209	PEAK	2 5463.62 48.64 68.20 -19.56	42.07	33.10	10.31	36.84	0.00	377	209	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5580.00 101.59</td> <td>95.08</td> <td>33.03</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>377</td> <td>209</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dB	dB	dB	dB	dB				1 5580.00 101.59	95.08	33.03	10.32	36.84	0.00	377	209	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dB	dB	dB	dB	dB																																																																														
1 5431.88 48.91 74.00 -25.09	42.37	33.10	10.31	36.87	0.00	377	209	PEAK																																																																											
2 5463.62 48.64 68.20 -19.56	42.07	33.10	10.31	36.84	0.00	377	209	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dB	dB	dB	dB	dB																																																																														
1 5580.00 101.59	95.08	33.03	10.32	36.84	0.00	377	209	PEAK																																																																											
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5449.59 39.04 54.00 -14.96</td> <td>32.48</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>377</td> <td>209</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dB	dB	dB	dB	dB				1 5449.59 39.04 54.00 -14.96	32.48	33.10	10.31	36.85	0.00	377	209	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5580.00 93.01</td> <td>86.51</td> <td>33.02</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>377</td> <td>209</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dB	dB	dB	dB	dB	dB				1 5580.00 93.01	86.51	33.02	10.32	36.84	0.00	377	209	AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dB	dB	dB	dB	dB																																																																														
1 5449.59 39.04 54.00 -14.96	32.48	33.10	10.31	36.85	0.00	377	209	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dB	dB	dB	dB	dB	dB																																																																														
1 5580.00 93.01	86.51	33.02	10.32	36.84	0.00	377	209	AVERAGE																																																																											



Mode	42																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full_5580MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5733.92</td> <td>50.26</td> <td>68.20</td> <td>-17.94</td> <td>42.87</td> <td>33.80</td> <td>10.47</td> <td>36.88</td> <td>0.00</td> <td>377</td> <td>209</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5733.92	50.26	68.20	-17.94	42.87	33.80	10.47	36.88	0.00	377	209	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5733.92	50.26	68.20	-17.94	42.87	33.80	10.47	36.88	0.00	377	209	PEAK																															



Mode	42																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full_5580MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>46.84</td> <td>74.00</td> <td>-27.16</td> <td>47.87</td> <td>38.82</td> <td>15.81</td> <td>56.21</td> <td>0.55</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>45.64</td> <td>68.20</td> <td>-22.56</td> <td>42.87</td> <td>38.40</td> <td>19.38</td> <td>55.82</td> <td>0.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	46.84	74.00	-27.16	47.87	38.82	15.81	56.21	0.55	--	--	PEAK	2	16740.00	45.64	68.20	-22.56	42.87	38.40	19.38	55.82	0.81	--	--	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91280_1326 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>46.99</td> <td>74.00</td> <td>-27.01</td> <td>48.02</td> <td>38.82</td> <td>15.81</td> <td>56.21</td> <td>0.55</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>46.10</td> <td>68.20</td> <td>-22.10</td> <td>43.33</td> <td>38.40</td> <td>19.38</td> <td>55.82</td> <td>0.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	46.99	74.00	-27.01	48.02	38.82	15.81	56.21	0.55	--	--	PEAK	2	16740.00	46.10	68.20	-22.10	43.33	38.40	19.38	55.82	0.81	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	11160.00	46.84	74.00	-27.16	47.87	38.82	15.81	56.21	0.55	--	--	PEAK																																																																																																								
2	16740.00	45.64	68.20	-22.56	42.87	38.40	19.38	55.82	0.81	--	--	PEAK																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	11160.00	46.99	74.00	-27.01	48.02	38.82	15.81	56.21	0.55	--	--	PEAK																																																																																																								
2	16740.00	46.10	68.20	-22.10	43.33	38.40	19.38	55.82	0.81	--	--	PEAK																																																																																																								






	42	
Mode	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL</p>
17.7G ~18G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL</p>



	43																																																																													
Mode	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.48</td> <td>61.15</td> <td>68.20</td> <td>-7.05</td> <td>53.81</td> <td>33.75</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>394 99 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.48	61.15	68.20	-7.05	53.81	33.75	10.46	36.87	0.00	394 99 PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>102.04</td> <td>-----</td> <td>-----</td> <td>94.86</td> <td>33.62</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>394 99 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	102.04	-----	-----	94.86	33.62	10.43	36.87	0.00	394 99 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5725.48	61.15	68.20	-7.05	53.81	33.75	10.46	36.87	0.00	394 99 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5700.00	102.04	-----	-----	94.86	33.62	10.43	36.87	0.00	394 99 PEAK																																																																					
Avg	Blank	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.87</td> <td>-----</td> <td>-----</td> <td>87.64</td> <td>33.66</td> <td>10.44</td> <td>36.87</td> <td>0.00</td> <td>394 99 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	94.87	-----	-----	87.64	33.66	10.44	36.87	0.00	394 99 AVERAGE																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5700.00	94.87	-----	-----	87.64	33.66	10.44	36.87	0.00	394 99 AVERAGE																																																																					

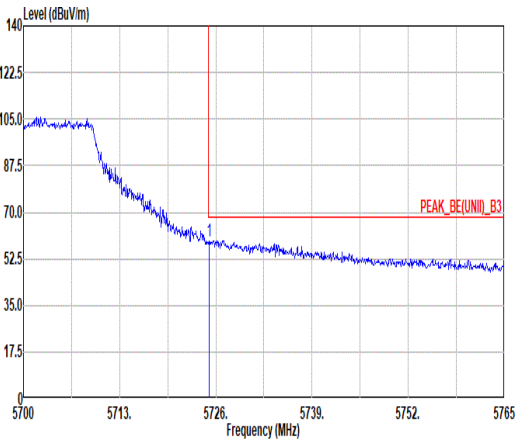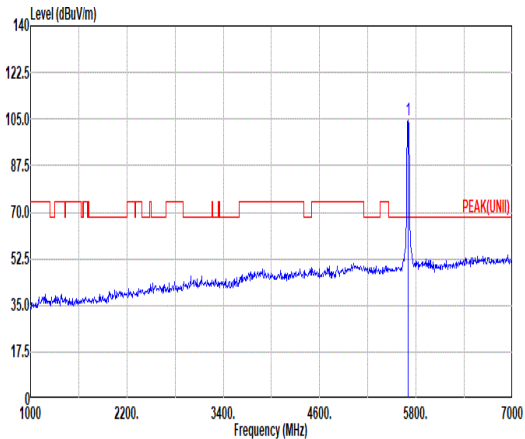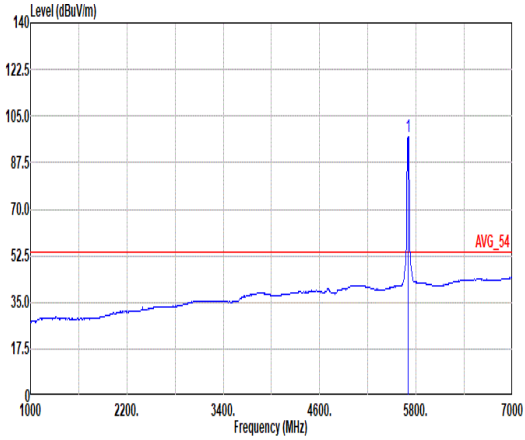

	43																																																																																			
Mode	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE(UNII)_B3</p> <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.09</td> <td>59.29</td> <td>68.20</td> <td>-8.91</td> <td>51.95</td> <td>33.75</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>315</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.09	59.29	68.20	-8.91	51.95	33.75	10.46	36.87	0.00	315	274	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK(UNII)</p> <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>104.63</td> <td>-----</td> <td>-----</td> <td>97.49</td> <td>33.58</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>315</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	104.63	-----	-----	97.49	33.58	10.43	36.87	0.00	315	274	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5725.09	59.29	68.20	-8.91	51.95	33.75	10.46	36.87	0.00	315	274	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	104.63	-----	-----	97.49	33.58	10.43	36.87	0.00	315	274	PEAK																																																																								
Avg	Blank	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>97.19</td> <td>-----</td> <td>-----</td> <td>90.01</td> <td>33.62</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>315</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	97.19	-----	-----	90.01	33.62	10.43	36.87	0.00	315	274	AVERAGE																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	97.19	-----	-----	90.01	33.62	10.43	36.87	0.00	315	274	AVERAGE																																																																								



Mode	43																																																																																													
	Harmonic																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal	Vertical																																																																																												
Peak Avg	<p>Site : 03CH13-HY Condition: PEAK (UNII) 3m HORN_91200_1326 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.03</td> <td>74.00</td> <td>-27.97</td> <td>46.48</td> <td>39.10</td> <td>15.97</td> <td>56.08</td> <td>0.56</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>46.76</td> <td>68.20</td> <td>-21.44</td> <td>44.28</td> <td>38.40</td> <td>19.57</td> <td>56.29</td> <td>0.80</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	11400.00	46.03	74.00	-27.97	46.48	39.10	15.97	56.08	0.56	--	--	PEAK	2	17100.00	46.76	68.20	-21.44	44.28	38.40	19.57	56.29	0.80	--	--	PEAK	<p>Site : 03CH13-HY Condition: PEAK (UNII) 3m HORN_91200_1326 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.90</td> <td>74.00</td> <td>-28.10</td> <td>46.35</td> <td>39.10</td> <td>15.97</td> <td>56.08</td> <td>0.56</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>46.11</td> <td>68.20</td> <td>-22.09</td> <td>43.63</td> <td>38.40</td> <td>19.57</td> <td>56.29</td> <td>0.80</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	11400.00	45.90	74.00	-28.10	46.35	39.10	15.97	56.08	0.56	--	--	PEAK	2	17100.00	46.11	68.20	-22.09	43.63	38.40	19.57	56.29	0.80	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
1	11400.00	46.03	74.00	-27.97	46.48	39.10	15.97	56.08	0.56	--	--	PEAK																																																																																		
2	17100.00	46.76	68.20	-21.44	44.28	38.40	19.57	56.29	0.80	--	--	PEAK																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
1	11400.00	45.90	74.00	-28.10	46.35	39.10	15.97	56.08	0.56	--	--	PEAK																																																																																		
2	17100.00	46.11	68.20	-22.09	43.63	38.40	19.57	56.29	0.80	--	--	PEAK																																																																																		



	43	
Mode	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>
17.7G ~18G Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL</p>



		44																																																																																	
Mode	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 5459.28 50.16 74.00 -23.84</td> <td>43.60</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>400</td> <td>103</td> <td>PEAK</td> </tr> <tr> <td>2 5469.20 51.69 68.20 -16.51</td> <td>45.12</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>400</td> <td>103</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	cm	deg	Remark	1 5459.28 50.16 74.00 -23.84	43.60	33.10	10.31	36.85	0.00	400	103	PEAK	2 5469.20 51.69 68.20 -16.51	45.12	33.10	10.31	36.84	0.00	400	103	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 5510.00 96.65</td> <td>90.06</td> <td>33.10</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>400</td> <td>103</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	cm	deg	Remark	1 5510.00 96.65	90.06	33.10	10.32	36.83	0.00	400	103	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																											
1 5459.28 50.16 74.00 -23.84	43.60	33.10	10.31	36.85	0.00	400	103	PEAK																																																																											
2 5469.20 51.69 68.20 -16.51	45.12	33.10	10.31	36.84	0.00	400	103	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																											
1 5510.00 96.65	90.06	33.10	10.32	36.83	0.00	400	103	PEAK																																																																											
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 5459.76 40.52 54.00 -13.48</td> <td>33.96</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>400</td> <td>103</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	cm	deg	Remark	1 5459.76 40.52 54.00 -13.48	33.96	33.10	10.31	36.85	0.00	400	103	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 5510.00 87.97</td> <td>81.38</td> <td>33.10</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>400</td> <td>103</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	cm	deg	Remark	1 5510.00 87.97	81.38	33.10	10.32	36.83	0.00	400	103	AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																											
1 5459.76 40.52 54.00 -13.48	33.96	33.10	10.31	36.85	0.00	400	103	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																																												
MHz dBuV/m dBuV/m dB	dBuV dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																											
1 5510.00 87.97	81.38	33.10	10.32	36.83	0.00	400	103	AVERAGE																																																																											



Mode	44																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5749.19</td> <td>51.14</td> <td>68.20</td> <td>-17.06</td> <td>43.64</td> <td>33.90</td> <td>10.48</td> <td>36.88</td> <td>0.00</td> <td>400</td> <td>103</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5749.19	51.14	68.20	-17.06	43.64	33.90	10.48	36.88	0.00	400	103	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5749.19	51.14	68.20	-17.06	43.64	33.90	10.48	36.88	0.00	400	103	PEAK																															



44																																																					
Mode	Band Edge - L																																																				
U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																																																					
ANT	1																																																				
Pol.	Vertical																																																				
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>52.13</td> <td>74.00</td> <td>-21.87</td> <td>45.57</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>310</td> <td>225</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.24</td> <td>53.16</td> <td>68.20</td> <td>-15.04</td> <td>46.59</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>310</td> <td>225</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.92	52.13	74.00	-21.87	45.57	33.10	10.31	36.85	0.00	310	225	PEAK	2	5468.24	53.16	68.20	-15.04	46.59	33.10	10.31	36.84	0.00	310	225	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																								
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5459.92	52.13	74.00	-21.87	45.57	33.10	10.31	36.85	0.00	310	225	PEAK																																									
2	5468.24	53.16	68.20	-15.04	46.59	33.10	10.31	36.84	0.00	310	225	PEAK																																									
Fundamental	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>97.07</td> <td>-----</td> <td>-----</td> <td>90.47</td> <td>33.10</td> <td>10.32</td> <td>36.82</td> <td>0.00</td> <td>310</td> <td>225</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	97.07	-----	-----	90.47	33.10	10.32	36.82	0.00	310	225	PEAK													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																									
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5510.00	97.07	-----	-----	90.47	33.10	10.32	36.82	0.00	310	225	PEAK																																									
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>41.68</td> <td>54.00</td> <td>-12.32</td> <td>35.12</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>310</td> <td>225</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.76	41.68	54.00	-12.32	35.12	33.10	10.31	36.85	0.00	310	225	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																								
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5459.76	41.68	54.00	-12.32	35.12	33.10	10.31	36.85	0.00	310	225	AVERAGE																																									
Avg	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>89.57</td> <td>-----</td> <td>-----</td> <td>82.98</td> <td>33.10</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>310</td> <td>225</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	89.57	-----	-----	82.98	33.10	10.32	36.83	0.00	310	225	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																									
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5510.00	89.57	-----	-----	82.98	33.10	10.32	36.83	0.00	310	225	AVERAGE																																									



Mode	44																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5758.37</td> <td>50.81</td> <td>68.20</td> <td>-17.39</td> <td>43.25</td> <td>33.95</td> <td>10.49</td> <td>36.88</td> <td>0.00</td> <td>310</td> <td>225</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5758.37	50.81	68.20	-17.39	43.25	33.95	10.49	36.88	0.00	310	225	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5758.37	50.81	68.20	-17.39	43.25	33.95	10.49	36.88	0.00	310	225	PEAK																															







		45																																																												
Mode	Band Edge - L																																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																																																													
ANT	1																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Loss (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>Aux Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.00</td> <td>49.12</td> <td>-24.88</td> <td>42.56</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>300</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.40</td> <td>49.10</td> <td>-19.10</td> <td>42.54</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>300</td> <td>158</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Loss (dB)	Cable Loss (dB)	Preamp Gain (dB)	Aux Gain (dB)	APos (cm)	TPos (deg)	Remark	1	5450.00	49.12	-24.88	42.56	33.10	10.31	36.85	0.00	300	158	PEAK	2	5461.40	49.10	-19.10	42.54	33.10	10.31	36.85	0.00	300	158	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Loss (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>Aux Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>97.98</td> <td>-----</td> <td>91.43</td> <td>33.07</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>300</td> <td>158</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Loss (dB)	Cable Loss (dB)	Preamp Gain (dB)	Aux Gain (dB)	APos (cm)	TPos (deg)	Remark	1	5550.00	97.98	-----	91.43	33.07	10.32	36.84	0.00	300	158	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Loss (dB)	Cable Loss (dB)	Preamp Gain (dB)	Aux Gain (dB)	APos (cm)	TPos (deg)	Remark																																																		
1	5450.00	49.12	-24.88	42.56	33.10	10.31	36.85	0.00	300	158	PEAK																																																			
2	5461.40	49.10	-19.10	42.54	33.10	10.31	36.85	0.00	300	158	PEAK																																																			
Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Loss (dB)	Cable Loss (dB)	Preamp Gain (dB)	Aux Gain (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5550.00	97.98	-----	91.43	33.07	10.32	36.84	0.00	300	158	PEAK																																																			
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Loss (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>Aux Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.00</td> <td>39.07</td> <td>-14.93</td> <td>32.51</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>300</td> <td>158</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Loss (dB)	Cable Loss (dB)	Preamp Gain (dB)	Aux Gain (dB)	APos (cm)	TPos (deg)	Remark	1	5457.00	39.07	-14.93	32.51	33.10	10.31	36.85	0.00	300	158	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Loss (dB)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>Aux Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>90.95</td> <td>-----</td> <td>84.40</td> <td>33.07</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>300</td> <td>158</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Loss (dB)	Cable Loss (dB)	Preamp Gain (dB)	Aux Gain (dB)	APos (cm)	TPos (deg)	Remark	1	5550.00	90.95	-----	84.40	33.07	10.32	36.84	0.00	300	158	AVERAGE												
Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Loss (dB)	Cable Loss (dB)	Preamp Gain (dB)	Aux Gain (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5457.00	39.07	-14.93	32.51	33.10	10.31	36.85	0.00	300	158	AVERAGE																																																			
Peak	Freq (MHz)	Level (dBuV/m)	Line Margin (dB)	Read Level (dBuV/m)	Ant Loss (dB)	Cable Loss (dB)	Preamp Gain (dB)	Aux Gain (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5550.00	90.95	-----	84.40	33.07	10.32	36.84	0.00	300	158	AVERAGE																																																			



Mode	45																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5764.14</td> <td>50.29</td> <td>68.20</td> <td>-17.91</td> <td>42.69</td> <td>33.98</td> <td>10.50</td> <td>36.88</td> <td>0.00</td> <td>300</td> <td>158 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5764.14	50.29	68.20	-17.91	42.69	33.98	10.50	36.88	0.00	300	158 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5764.14	50.29	68.20	-17.91	42.69	33.98	10.50	36.88	0.00	300	158 PEAK																															

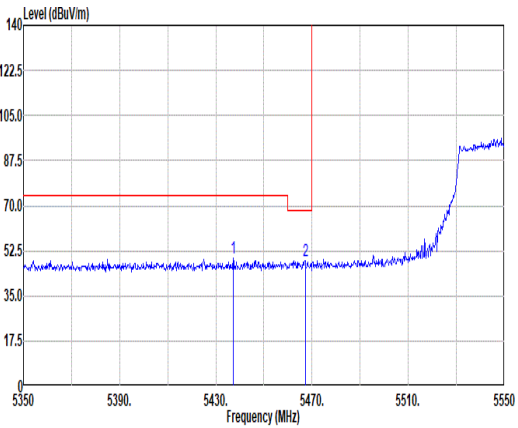
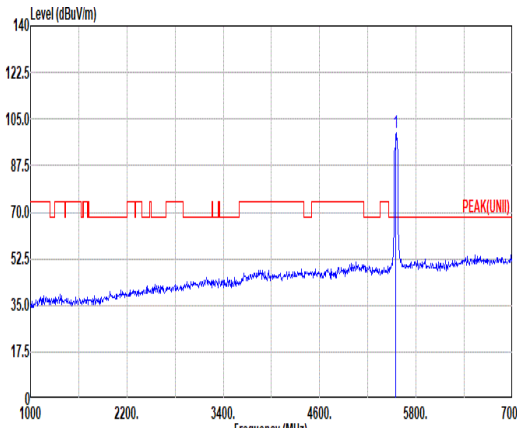
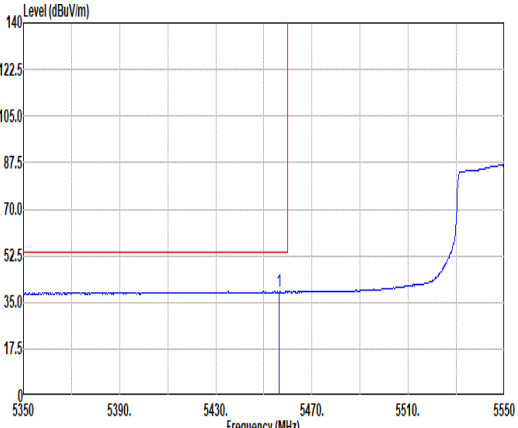
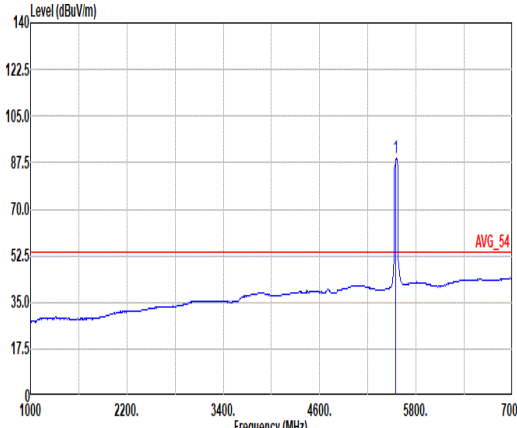


		45																																																																																	
Mode	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																																																																																		
ANT	1																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	 <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5437.20 49.46 74.00 -24.54</td> <td>42.91 33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>100</td> <td>245</td> <td>PEAK</td> <td></td> </tr> <tr> <td>2 5467.20 48.78 68.20 -19.42</td> <td>42.21 33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>100</td> <td>245</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5437.20 49.46 74.00 -24.54	42.91 33.10	10.31	36.86	0.00	100	245	PEAK		2 5467.20 48.78 68.20 -19.42	42.21 33.10	10.31	36.84	0.00	100	245	PEAK		 <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5550.00 99.69</td> <td>-----</td> <td>93.12 33.08</td> <td>10.32 36.83</td> <td>0.00</td> <td>100</td> <td>245</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5550.00 99.69	-----	93.12 33.08	10.32 36.83	0.00	100	245	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																														
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5437.20 49.46 74.00 -24.54	42.91 33.10	10.31	36.86	0.00	100	245	PEAK																																																																												
2 5467.20 48.78 68.20 -19.42	42.21 33.10	10.31	36.84	0.00	100	245	PEAK																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																														
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5550.00 99.69	-----	93.12 33.08	10.32 36.83	0.00	100	245	PEAK																																																																												
Avg	 <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5456.20 39.12 54.00 -14.88</td> <td>32.56 33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>100</td> <td>245</td> <td>AVERAGE</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5456.20 39.12 54.00 -14.88	32.56 33.10	10.31	36.85	0.00	100	245	AVERAGE		 <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5550.00 89.07</td> <td>-----</td> <td>82.50 33.08</td> <td>10.32 36.83</td> <td>0.00</td> <td>100</td> <td>245</td> <td>AVERAGE</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5550.00 89.07	-----	82.50 33.08	10.32 36.83	0.00	100	245	AVERAGE										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																														
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5456.20 39.12 54.00 -14.88	32.56 33.10	10.31	36.85	0.00	100	245	AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																														
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																												
1 5550.00 89.07	-----	82.50 33.08	10.32 36.83	0.00	100	245	AVERAGE																																																																												



Mode	45																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(U-NII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5754.25</td> <td>50.40</td> <td>68.20</td> <td>-17.80</td> <td>42.86</td> <td>33.93</td> <td>10.49</td> <td>36.88</td> <td>0.00</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5754.25	50.40	68.20	-17.80	42.86	33.93	10.49	36.88	0.00	100	245	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5754.25	50.40	68.20	-17.80	42.86	33.93	10.49	36.88	0.00	100	245	PEAK																															

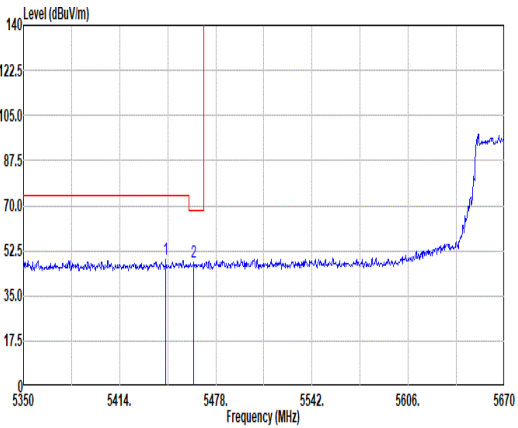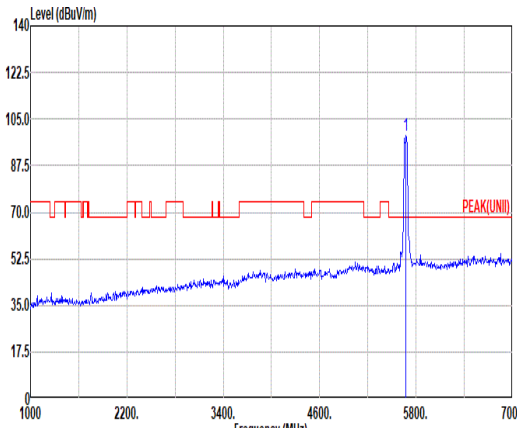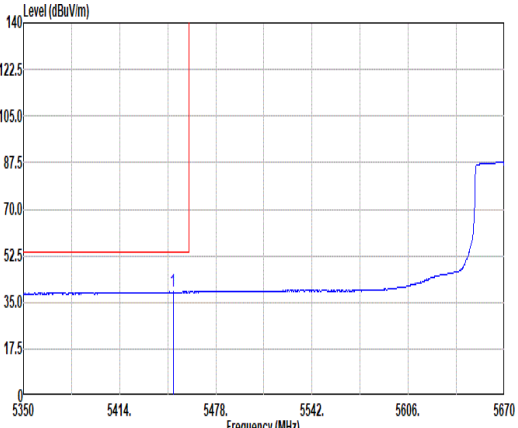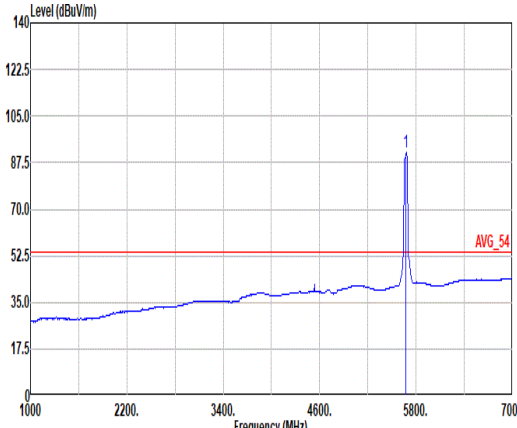

	46																																																																																															
Mode	Band Edge - L																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal	Fundamental																																																																																														
Peak	 <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5444.72</td> <td>48.94</td> <td>74.00</td> <td>-25.06</td> <td>42.39</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>400</td> <td>98</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.28</td> <td>48.12</td> <td>68.20</td> <td>-20.08</td> <td>41.55</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>400</td> <td>98</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5444.72	48.94	74.00	-25.06	42.39	33.10	10.31	36.86	0.00	400	98	PEAK	2	5463.28	48.12	68.20	-20.08	41.55	33.10	10.31	36.84	0.00	400	98	PEAK	 <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>98.65</td> <td>-----</td> <td>91.72</td> <td>33.39</td> <td>10.40</td> <td>36.86</td> <td>0.00</td> <td>400</td> <td>98</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	98.65	-----	91.72	33.39	10.40	36.86	0.00	400	98	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5444.72	48.94	74.00	-25.06	42.39	33.10	10.31	36.86	0.00	400	98	PEAK																																																																																				
2	5463.28	48.12	68.20	-20.08	41.55	33.10	10.31	36.84	0.00	400	98	PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5670.00	98.65	-----	91.72	33.39	10.40	36.86	0.00	400	98	PEAK																																																																																					
Avg	 <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.52</td> <td>38.92</td> <td>54.00</td> <td>-15.08</td> <td>32.36</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>400</td> <td>98</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5449.52	38.92	54.00	-15.08	32.36	33.10	10.31	36.85	0.00	400	98	AVERAGE	 <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>91.56</td> <td>-----</td> <td>84.52</td> <td>33.49</td> <td>10.41</td> <td>36.86</td> <td>0.00</td> <td>400</td> <td>98</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	91.56	-----	84.52	33.49	10.41	36.86	0.00	400	98	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5449.52	38.92	54.00	-15.08	32.36	33.10	10.31	36.85	0.00	400	98	AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5670.00	91.56	-----	84.52	33.49	10.41	36.86	0.00	400	98	AVERAGE																																																																																					



Mode	46																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.86</td> <td>57.39</td> <td>68.20</td> <td>-10.81</td> <td>50.03</td> <td>33.77</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>400</td> <td>98 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5727.86	57.39	68.20	-10.81	50.03	33.77	10.46	36.87	0.00	400	98 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5727.86	57.39	68.20	-10.81	50.03	33.77	10.46	36.87	0.00	400	98 PEAK																															







		46																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical	Fundamental																																																																																											
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5429.04</td> <td>49.49</td> <td>74.00</td> <td>-24.51</td> <td>42.95</td> <td>33.10</td> <td>10.31</td> <td>36.87</td> <td>0.00</td> <td>299</td> <td>275</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.00</td> <td>48.69</td> <td>68.20</td> <td>-19.51</td> <td>42.13</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>299</td> <td>275</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5429.04	49.49	74.00	-24.51	42.95	33.10	10.31	36.87	0.00	299	275	PEAK	2	5462.00	48.69	68.20	-19.51	42.13	33.10	10.31	36.85	0.00	299	275	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>100.02</td> <td>70.00</td> <td>30.02</td> <td>92.98</td> <td>33.49</td> <td>10.41</td> <td>36.86</td> <td>0.00</td> <td>299</td> <td>275</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	100.02	70.00	30.02	92.98	33.49	10.41	36.86	0.00	299	275	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5429.04	49.49	74.00	-24.51	42.95	33.10	10.31	36.87	0.00	299	275	PEAK																																																																																	
2	5462.00	48.69	68.20	-19.51	42.13	33.10	10.31	36.85	0.00	299	275	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5670.00	100.02	70.00	30.02	92.98	33.49	10.41	36.86	0.00	299	275	PEAK																																																																																	
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.20</td> <td>38.88</td> <td>54.00</td> <td>-15.12</td> <td>32.33</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>299</td> <td>275</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5447.20	38.88	54.00	-15.12	32.33	33.10	10.31	36.86	0.00	299	275	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>92.82</td> <td>54.00</td> <td>38.82</td> <td>85.78</td> <td>33.49</td> <td>10.41</td> <td>36.86</td> <td>0.00</td> <td>299</td> <td>275</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	92.82	54.00	38.82	85.78	33.49	10.41	36.86	0.00	299	275	AVERAGE													
	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5447.20	38.88	54.00	-15.12	32.33	33.10	10.31	36.86	0.00	299	275	AVERAGE																																																																																	
Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5670.00	92.82	54.00	38.82	85.78	33.49	10.41	36.86	0.00	299	275	AVERAGE																																																																																	



Mode	46																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.48</td> <td>55.74</td> <td>68.20</td> <td>-12.46</td> <td>48.40</td> <td>33.75</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>299</td> <td>275 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.48	55.74	68.20	-12.46	48.40	33.75	10.46	36.87	0.00	299	275 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5725.48	55.74	68.20	-12.46	48.40	33.75	10.46	36.87	0.00	299	275 PEAK																															

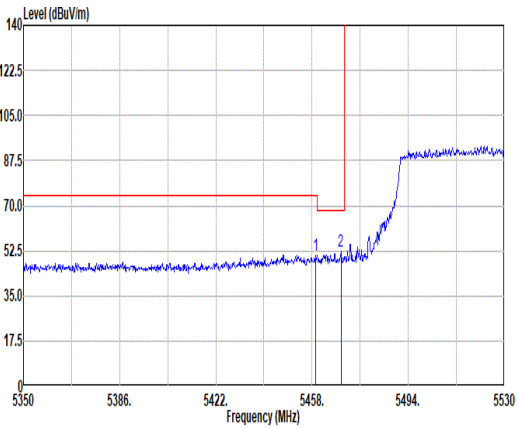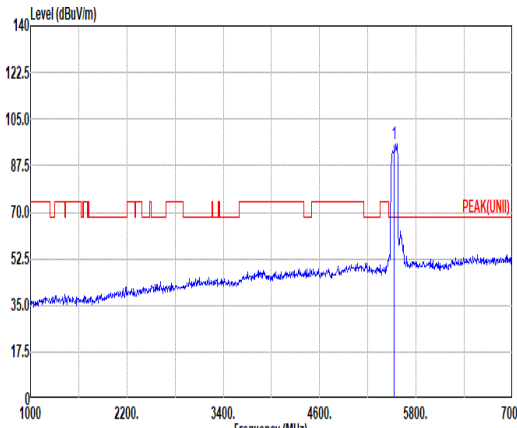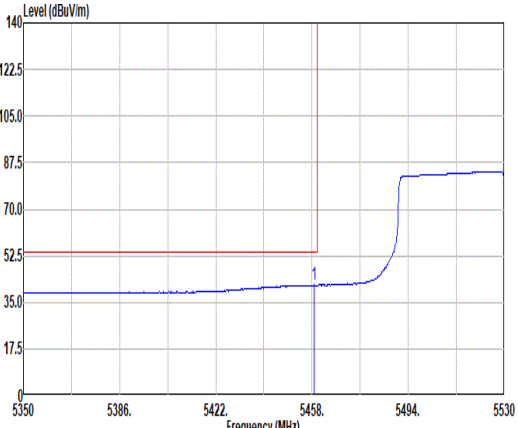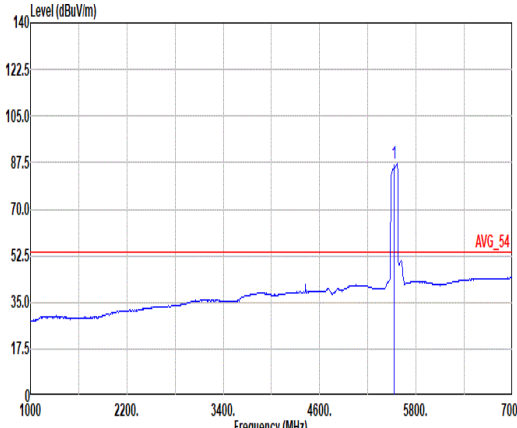

47																																																							
Mode	Band Edge - L																																																						
U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz																																																							
ANT	1																																																						
Pol.	Horizontal																																																						
Peak	 <p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>50.81</td> <td>74.00</td> <td>-23.19</td> <td>44.25</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>346</td> <td>102</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.80</td> <td>52.33</td> <td>68.20</td> <td>-15.87</td> <td>45.76</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>346</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.44	50.81	74.00	-23.19	44.25	33.10	10.31	36.85	0.00	346	102	PEAK	2	5468.80	52.33	68.20	-15.87	45.76	33.10	10.31	36.84	0.00	346	102	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5459.44	50.81	74.00	-23.19	44.25	33.10	10.31	36.85	0.00	346	102	PEAK																																											
2	5468.80	52.33	68.20	-15.87	45.76	33.10	10.31	36.84	0.00	346	102	PEAK																																											
Fundamental	 <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>95.85</td> <td>-----</td> <td>89.26</td> <td>33.10</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>346</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	95.85	-----	89.26	33.10	10.32	36.83	0.00	346	102	PEAK														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5530.00	95.85	-----	89.26	33.10	10.32	36.83	0.00	346	102	PEAK																																												
Avg	 <p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.90</td> <td>41.48</td> <td>54.00</td> <td>-12.52</td> <td>34.92</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>346</td> <td>102</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5450.90	41.48	54.00	-12.52	34.92	33.10	10.31	36.85	0.00	346	102	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5450.90	41.48	54.00	-12.52	34.92	33.10	10.31	36.85	0.00	346	102	AVERAGE																																											
Avg_54	 <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>86.91</td> <td>-----</td> <td>80.36</td> <td>33.07</td> <td>10.32</td> <td>36.84</td> <td>0.00</td> <td>346</td> <td>102</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	86.91	-----	80.36	33.07	10.32	36.84	0.00	346	102	AVERAGE														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5530.00	86.91	-----	80.36	33.07	10.32	36.84	0.00	346	102	AVERAGE																																												



Mode	47																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5761.24</td> <td>50.80</td> <td>68.20</td> <td>-17.40</td> <td>43.21</td> <td>33.97</td> <td>10.50</td> <td>36.88</td> <td>0.00</td> <td>346</td> <td>102 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5761.24	50.80	68.20	-17.40	43.21	33.97	10.50	36.88	0.00	346	102 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5761.24	50.80	68.20	-17.40	43.21	33.97	10.50	36.88	0.00	346	102 PEAK																															



		47																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical	Fundamental																																																																																											
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.32</td> <td>53.19</td> <td>74.00</td> <td>-20.81</td> <td>46.63</td> <td>33.10</td> <td>10.31</td> <td>36.85</td> <td>0.00</td> <td>300</td> <td>228</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.88</td> <td>54.21</td> <td>68.20</td> <td>-13.99</td> <td>47.64</td> <td>33.10</td> <td>10.31</td> <td>36.84</td> <td>0.00</td> <td>300</td> <td>228</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5453.32	53.19	74.00	-20.81	46.63	33.10	10.31	36.85	0.00	300	228	PEAK	2	5469.88	54.21	68.20	-13.99	47.64	33.10	10.31	36.84	0.00	300	228	PEAK	<p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>96.73</td> <td>-----</td> <td>-----</td> <td>90.14</td> <td>33.10</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>300</td> <td>228</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	96.73	-----	-----	90.14	33.10	10.32	36.83	0.00	300	228	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5453.32	53.19	74.00	-20.81	46.63	33.10	10.31	36.85	0.00	300	228	PEAK																																																																																	
2	5469.88	54.21	68.20	-13.99	47.64	33.10	10.31	36.84	0.00	300	228	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5530.00	96.73	-----	-----	90.14	33.10	10.32	36.83	0.00	300	228	PEAK																																																																																	
Avg	<p>Site : 03CH13-HY Condition: AVG_BE(UNII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.50</td> <td>41.71</td> <td>54.00</td> <td>-12.29</td> <td>35.16</td> <td>33.10</td> <td>10.31</td> <td>36.86</td> <td>0.00</td> <td>300</td> <td>228</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5445.50	41.71	54.00	-12.29	35.16	33.10	10.31	36.86	0.00	300	228	AVERAGE	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>88.15</td> <td>-----</td> <td>-----</td> <td>81.57</td> <td>33.09</td> <td>10.32</td> <td>36.83</td> <td>0.00</td> <td>300</td> <td>228</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	88.15	-----	-----	81.57	33.09	10.32	36.83	0.00	300	228	AVERAGE													
	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5445.50	41.71	54.00	-12.29	35.16	33.10	10.31	36.86	0.00	300	228	AVERAGE																																																																																	
Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5530.00	88.15	-----	-----	81.57	33.09	10.32	36.83	0.00	300	228	AVERAGE																																																																																	



Mode	47																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(U-NII)_B3 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5728.58</td> <td>52.23</td> <td>68.20</td> <td>-15.97</td> <td>44.87</td> <td>33.77</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>300</td> <td>228</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5728.58	52.23	68.20	-15.97	44.87	33.77	10.46	36.87	0.00	300	228	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5728.58	52.23	68.20	-15.97	44.87	33.77	10.46	36.87	0.00	300	228	PEAK																															



Mode	48																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																																																																																							
ANT	1																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH13-HY Condition: QP 3m BILOG_40103 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>23.59</td><td>40.00</td><td>-16.41</td><td>29.64</td><td>25.30</td><td>0.93</td><td>32.31</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>159.98</td><td>19.42</td><td>43.50</td><td>-24.08</td><td>33.10</td><td>16.50</td><td>1.90</td><td>32.19</td><td>0.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>262.00</td><td>21.75</td><td>46.00</td><td>-24.25</td><td>31.37</td><td>20.00</td><td>2.38</td><td>32.12</td><td>0.12</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>480.00</td><td>29.06</td><td>46.00</td><td>-16.94</td><td>34.38</td><td>23.00</td><td>3.15</td><td>32.18</td><td>0.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>718.70</td><td>34.04</td><td>46.00</td><td>-11.96</td><td>35.05</td><td>27.15</td><td>3.81</td><td>32.11</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>954.41</td><td>34.64</td><td>46.00</td><td>-11.36</td><td>30.10</td><td>31.00</td><td>4.29</td><td>30.95</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	23.59	40.00	-16.41	29.64	25.30	0.93	32.31	0.03	--	--	Peak	2	159.98	19.42	43.50	-24.08	33.10	16.50	1.90	32.19	0.11	--	--	Peak	3	262.00	21.75	46.00	-24.25	31.37	20.00	2.38	32.12	0.12	--	--	Peak	4	480.00	29.06	46.00	-16.94	34.38	23.00	3.15	32.18	0.11	--	--	Peak	5	718.70	34.04	46.00	-11.96	35.05	27.15	3.81	32.11	0.14	--	--	Peak	6	954.41	34.64	46.00	-11.36	30.10	31.00	4.29	30.95	0.20	--	--	Peak	<p>Site : 03CH13-HY Condition: QP 3m BILOG_40103 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>30.50</td><td>40.00</td><td>-9.50</td><td>37.02</td><td>24.81</td><td>0.94</td><td>32.32</td><td>0.05</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>162.09</td><td>19.03</td><td>43.50</td><td>-24.47</td><td>32.91</td><td>16.29</td><td>1.91</td><td>32.19</td><td>0.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>260.86</td><td>21.29</td><td>46.00</td><td>-24.71</td><td>30.93</td><td>20.00</td><td>2.37</td><td>32.13</td><td>0.12</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>502.39</td><td>27.76</td><td>46.00</td><td>-18.24</td><td>32.61</td><td>24.00</td><td>3.23</td><td>32.19</td><td>0.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>721.61</td><td>36.05</td><td>46.00</td><td>-9.95</td><td>36.94</td><td>27.26</td><td>3.81</td><td>32.10</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>944.71</td><td>36.05</td><td>46.00</td><td>-9.95</td><td>31.83</td><td>30.79</td><td>4.27</td><td>31.04</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	30.97	30.50	40.00	-9.50	37.02	24.81	0.94	32.32	0.05	--	--	Peak	2	162.09	19.03	43.50	-24.47	32.91	16.29	1.91	32.19	0.11	--	--	Peak	3	260.86	21.29	46.00	-24.71	30.93	20.00	2.37	32.13	0.12	--	--	Peak	4	502.39	27.76	46.00	-18.24	32.61	24.00	3.23	32.19	0.11	--	--	Peak	5	721.61	36.05	46.00	-9.95	36.94	27.26	3.81	32.10	0.14	--	--	Peak	6	944.71	36.05	46.00	-9.95	31.83	30.79	4.27	31.04	0.20	--	--	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																											
1	30.00	23.59	40.00	-16.41	29.64	25.30	0.93	32.31	0.03	--	--	Peak																																																																																																																																																																												
2	159.98	19.42	43.50	-24.08	33.10	16.50	1.90	32.19	0.11	--	--	Peak																																																																																																																																																																												
3	262.00	21.75	46.00	-24.25	31.37	20.00	2.38	32.12	0.12	--	--	Peak																																																																																																																																																																												
4	480.00	29.06	46.00	-16.94	34.38	23.00	3.15	32.18	0.11	--	--	Peak																																																																																																																																																																												
5	718.70	34.04	46.00	-11.96	35.05	27.15	3.81	32.11	0.14	--	--	Peak																																																																																																																																																																												
6	954.41	34.64	46.00	-11.36	30.10	31.00	4.29	30.95	0.20	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	30.97	30.50	40.00	-9.50	37.02	24.81	0.94	32.32	0.05	--	--	Peak																																																																																																																																																																												
2	162.09	19.03	43.50	-24.47	32.91	16.29	1.91	32.19	0.11	--	--	Peak																																																																																																																																																																												
3	260.86	21.29	46.00	-24.71	30.93	20.00	2.37	32.13	0.12	--	--	Peak																																																																																																																																																																												
4	502.39	27.76	46.00	-18.24	32.61	24.00	3.23	32.19	0.11	--	--	Peak																																																																																																																																																																												
5	721.61	36.05	46.00	-9.95	36.94	27.26	3.81	32.10	0.14	--	--	Peak																																																																																																																																																																												
6	944.71	36.05	46.00	-9.95	31.83	30.79	4.27	31.04	0.20	--	--	Peak																																																																																																																																																																												





Mode	49																																																																																																															
	SHF																																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak	<p>Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>24937.00</td> <td>47.94</td> <td>74.00</td> <td>-26.06</td> <td>64.50</td> <td>39.27</td> <td>6.95</td> <td>53.24</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>39835.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>59.13</td> <td>44.65</td> <td>9.13</td> <td>55.66</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24937.00	47.94	74.00	-26.06	64.50	39.27	6.95	53.24	-9.54	--	Peak	2	39835.00	47.71	74.00	-26.29	59.13	44.65	9.13	55.66	-9.54	--	Peak	<p>Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>24713.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>64.19</td> <td>39.25</td> <td>7.00</td> <td>53.37</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>39918.00</td> <td>47.00</td> <td>74.00</td> <td>-27.00</td> <td>58.33</td> <td>44.56</td> <td>9.19</td> <td>55.54</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24713.00	47.53	74.00	-26.47	64.19	39.25	7.00	53.37	-9.54	--	Peak	2	39918.00	47.00	74.00	-27.00	58.33	44.56	9.19	55.54	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	24937.00	47.94	74.00	-26.06	64.50	39.27	6.95	53.24	-9.54	--	Peak																																																																																																					
2	39835.00	47.71	74.00	-26.29	59.13	44.65	9.13	55.66	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	24713.00	47.53	74.00	-26.47	64.19	39.25	7.00	53.37	-9.54	--	Peak																																																																																																					
2	39918.00	47.00	74.00	-27.00	58.33	44.56	9.19	55.54	-9.54	--	Peak																																																																																																					




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	97.86	5475	0.18	300Hz
5GHz 802.11n HT20	92.10	5070	0.20	300Hz
5GHz 802.11n HT40	86.06	2470	0.40	1kHz
5GHz 802.11ac VHT80	96.18	4530	0.22	300Hz
5GHz 802.11ax HE20 Full RU	95.56	3870	0.26	300Hz
5GHz 802.11ax HE40 Full RU	90.23	3880	0.26	300Hz
5GHz 802.11ax HE80 Full RU	89.16	3700	0.27	300Hz

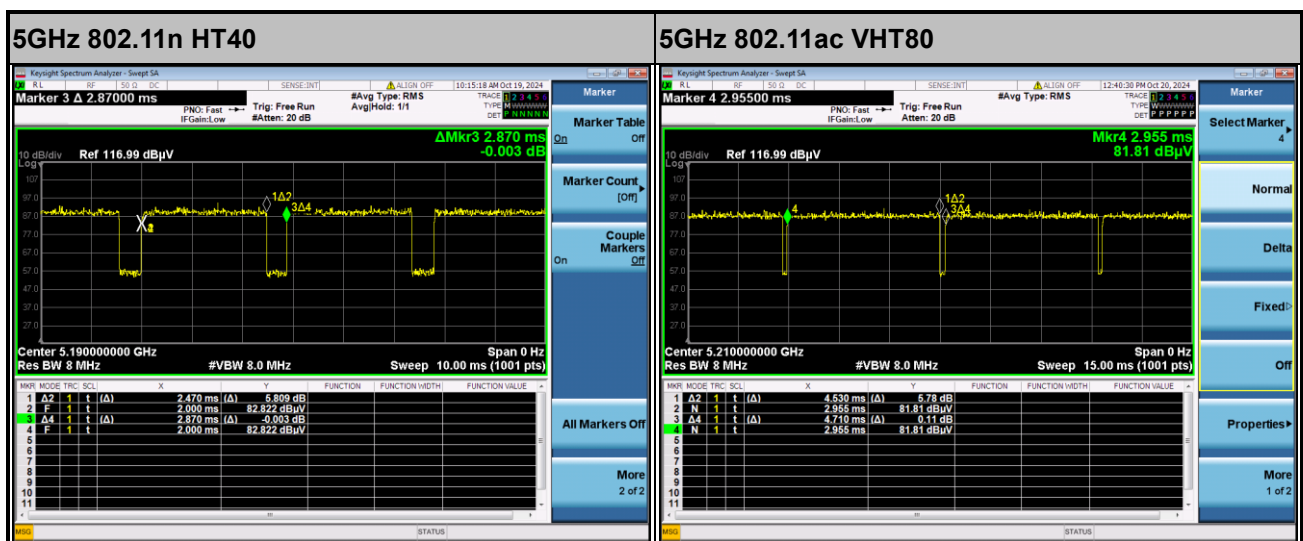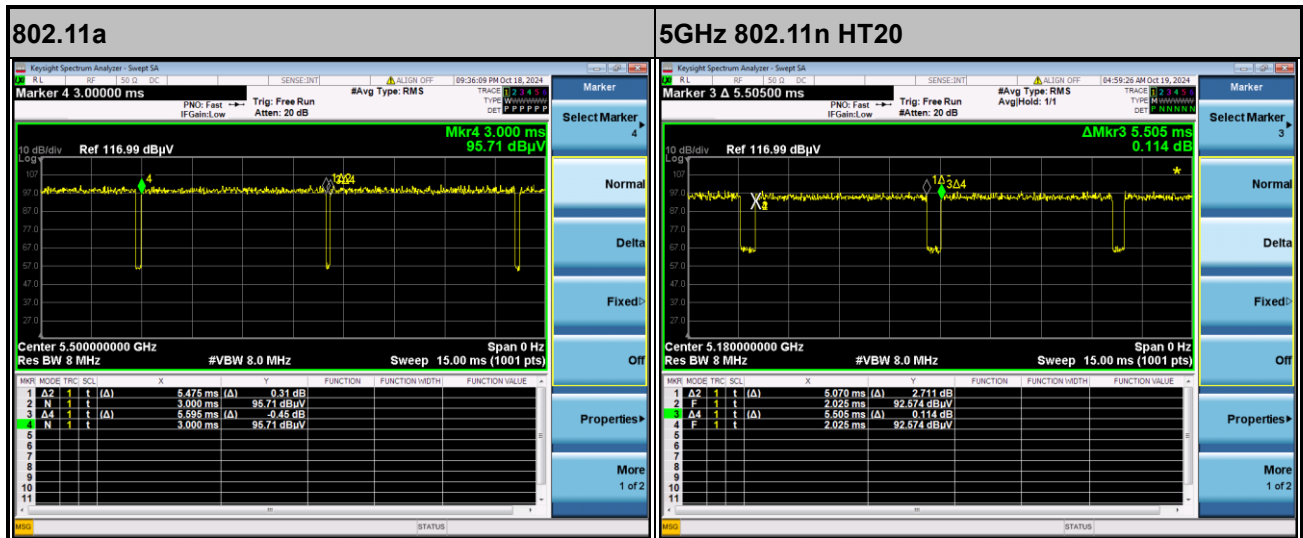




5GHz 802.11ax HE20 Full RU

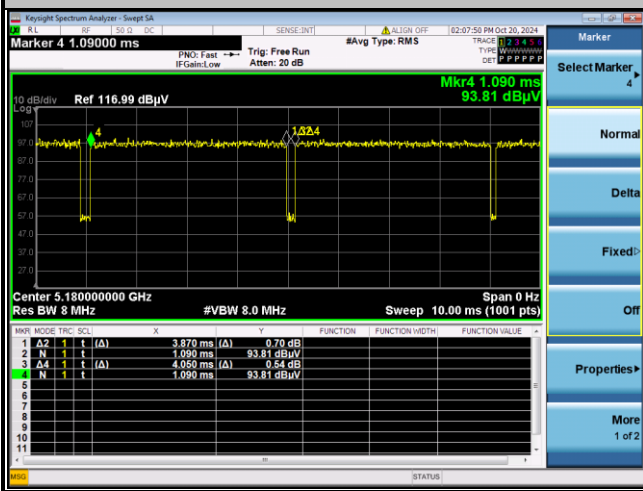

5GHz 802.11ax HE40 Full RU

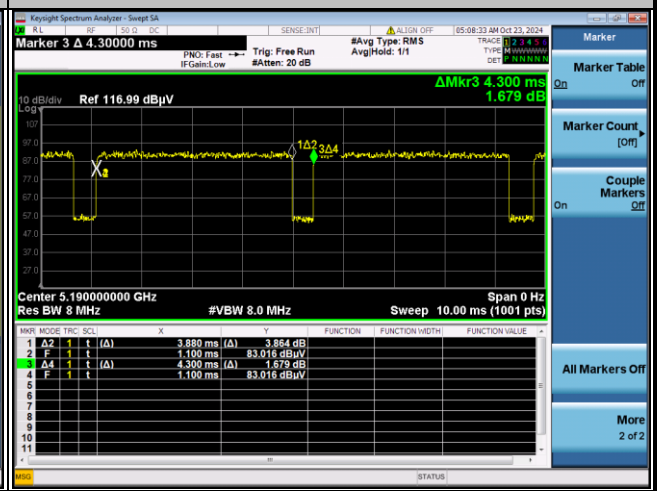

5GHz 802.11ax HE80 Full RU

