






Mode	14																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<p>Site : 03CH13-HY Condition: PEAK_BE(B4)_16-24 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.06</td> <td>49.37</td> <td>68.20</td> <td>-18.83</td> <td>42.75</td> <td>33.12</td> <td>10.35</td> <td>36.85</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.12</td> <td>48.04</td> <td>68.29</td> <td>-20.25</td> <td>41.32</td> <td>33.20</td> <td>10.38</td> <td>36.86</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.21</td> <td>48.58</td> <td>105.54</td> <td>-56.96</td> <td>41.41</td> <td>33.61</td> <td>10.43</td> <td>36.87</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.32</td> <td>47.85</td> <td>111.52</td> <td>-63.67</td> <td>40.55</td> <td>33.72</td> <td>10.45</td> <td>36.87</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5629.06	49.37	68.20	-18.83	42.75	33.12	10.35	36.85	0.00	290	254	PEAK	2	5650.12	48.04	68.29	-20.25	41.32	33.20	10.38	36.86	0.00	290	254	PEAK	3	5701.21	48.58	105.54	-56.96	41.41	33.61	10.43	36.87	0.00	290	254	PEAK	4	5720.32	47.85	111.52	-63.67	40.55	33.72	10.45	36.87	0.00	290	254	PEAK	<p>Site : 03CH13-HY Condition: PEAK(U-NII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>99.66</td> <td>-----</td> <td>-----</td> <td>91.81</td> <td>34.20</td> <td>10.54</td> <td>36.89</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5795.00	99.66	-----	-----	91.81	34.20	10.54	36.89	0.00	290	254	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5629.06	49.37	68.20	-18.83	42.75	33.12	10.35	36.85	0.00	290	254	PEAK																																																																																															
2	5650.12	48.04	68.29	-20.25	41.32	33.20	10.38	36.86	0.00	290	254	PEAK																																																																																															
3	5701.21	48.58	105.54	-56.96	41.41	33.61	10.43	36.87	0.00	290	254	PEAK																																																																																															
4	5720.32	47.85	111.52	-63.67	40.55	33.72	10.45	36.87	0.00	290	254	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5795.00	99.66	-----	-----	91.81	34.20	10.54	36.89	0.00	290	254	PEAK																																																																																															
Avg	Blank	<p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>91.44</td> <td>-----</td> <td>-----</td> <td>83.59</td> <td>34.20</td> <td>10.54</td> <td>36.89</td> <td>0.00</td> <td>290</td> <td>254</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5795.00	91.44	-----	-----	83.59	34.20	10.54	36.89	0.00	290	254	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5795.00	91.44	-----	-----	83.59	34.20	10.54	36.89	0.00	290	254	AVERAGE																																																																																															



Mode	14																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH13-HY          Condition: PEAK_BE(B4)_16-24 3m HORN_91200_1326 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.37</td> <td>52.79</td> <td>112.25</td> <td>-59.46</td> <td>44.02</td> <td>34.32</td> <td>10.56</td> <td>36.91</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.52</td> <td>49.13</td> <td>105.34</td> <td>-56.21</td> <td>41.07</td> <td>34.40</td> <td>10.57</td> <td>36.91</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.43</td> <td>50.33</td> <td>68.62</td> <td>-18.29</td> <td>42.16</td> <td>34.50</td> <td>10.59</td> <td>36.92</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.23</td> <td>50.94</td> <td>68.20</td> <td>-17.26</td> <td>42.77</td> <td>34.50</td> <td>10.59</td> <td>36.92</td> <td>0.00</td> <td>290</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.37	52.79	112.25	-59.46	44.02	34.32	10.56	36.91	0.00	290	254	PEAK	2	5874.52	49.13	105.34	-56.21	41.07	34.40	10.57	36.91	0.00	290	254	PEAK	3	5924.43	50.33	68.62	-18.29	42.16	34.50	10.59	36.92	0.00	290	254	PEAK	4	5929.23	50.94	68.20	-17.26	42.77	34.50	10.59	36.92	0.00	290	254	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.37	52.79	112.25	-59.46	44.02	34.32	10.56	36.91	0.00	290	254	PEAK																																																														
2	5874.52	49.13	105.34	-56.21	41.07	34.40	10.57	36.91	0.00	290	254	PEAK																																																														
3	5924.43	50.33	68.62	-18.29	42.16	34.50	10.59	36.92	0.00	290	254	PEAK																																																														
4	5929.23	50.94	68.20	-17.26	42.77	34.50	10.59	36.92	0.00	290	254	PEAK																																																														

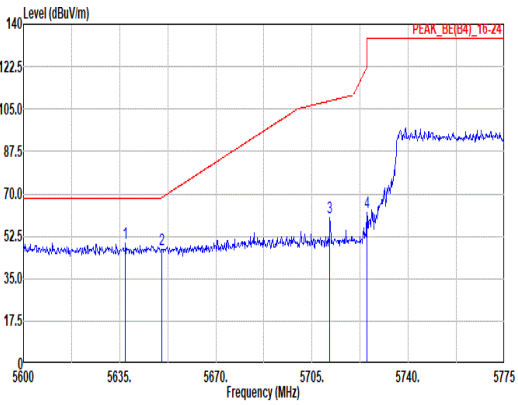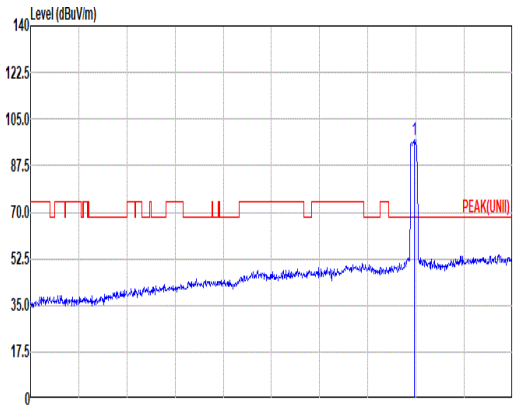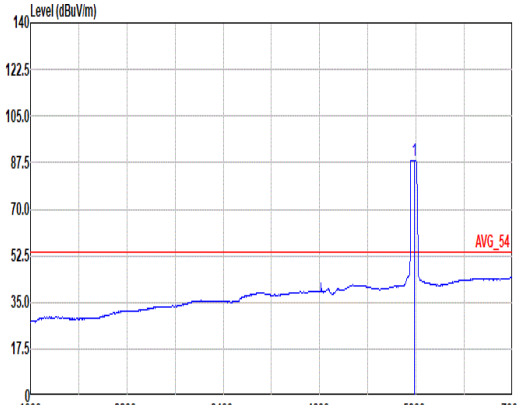

Mode	15																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	 <p>Site : 03CH13-HY Condition: PEAK_BE(B4)_16-24 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.10</td> <td>49.59</td> <td>68.20</td> <td>-18.61</td> <td>42.93</td> <td>33.15</td> <td>10.36</td> <td>36.85</td> <td>0.00</td> <td>110</td> <td>108</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.23</td> <td>47.24</td> <td>68.37</td> <td>-21.13</td> <td>40.52</td> <td>33.20</td> <td>10.38</td> <td>36.86</td> <td>0.00</td> <td>110</td> <td>108</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5711.48</td> <td>60.06</td> <td>108.42</td> <td>-48.36</td> <td>52.82</td> <td>33.67</td> <td>10.44</td> <td>36.87</td> <td>0.00</td> <td>110</td> <td>108</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5724.95</td> <td>62.50</td> <td>122.09</td> <td>-59.59</td> <td>55.16</td> <td>33.75</td> <td>10.46</td> <td>36.87</td> <td>0.00</td> <td>110</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5637.10	49.59	68.20	-18.61	42.93	33.15	10.36	36.85	0.00	110	108	PEAK	2	5650.23	47.24	68.37	-21.13	40.52	33.20	10.38	36.86	0.00	110	108	PEAK	3	5711.48	60.06	108.42	-48.36	52.82	33.67	10.44	36.87	0.00	110	108	PEAK	4	5724.95	62.50	122.09	-59.59	55.16	33.75	10.46	36.87	0.00	110	108	PEAK	 <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>97.20</td> <td>97.20</td> <td>0.00</td> <td>89.52</td> <td>34.06</td> <td>10.51</td> <td>36.89</td> <td>0.00</td> <td>110</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	97.20	97.20	0.00	89.52	34.06	10.51	36.89	0.00	110	108	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5637.10	49.59	68.20	-18.61	42.93	33.15	10.36	36.85	0.00	110	108	PEAK																																																																																																											
2	5650.23	47.24	68.37	-21.13	40.52	33.20	10.38	36.86	0.00	110	108	PEAK																																																																																																											
3	5711.48	60.06	108.42	-48.36	52.82	33.67	10.44	36.87	0.00	110	108	PEAK																																																																																																											
4	5724.95	62.50	122.09	-59.59	55.16	33.75	10.46	36.87	0.00	110	108	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	97.20	97.20	0.00	89.52	34.06	10.51	36.89	0.00	110	108	PEAK																																																																																																											
Avg	Blank	 <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>88.48</td> <td>88.48</td> <td>0.00</td> <td>81.05</td> <td>33.84</td> <td>10.47</td> <td>36.88</td> <td>0.00</td> <td>110</td> <td>108</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	88.48	88.48	0.00	81.05	33.84	10.47	36.88	0.00	110	108	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	88.48	88.48	0.00	81.05	33.84	10.47	36.88	0.00	110	108	AVERAGE																																																																																																											



Mode	15																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH13-HY          Condition: PEAK_BE(B4)_16-24 3m HORN_91200_1326 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>51.14</td> <td>110.06</td> <td>-59.72</td> <td>43.17</td> <td>34.32</td> <td>10.56</td> <td>36.91</td> <td>0.00</td> <td>110</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.93</td> <td>49.59</td> <td>105.22</td> <td>-55.63</td> <td>41.53</td> <td>34.40</td> <td>10.57</td> <td>36.91</td> <td>0.00</td> <td>110</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>50.00</td> <td>68.22</td> <td>-18.22</td> <td>41.83</td> <td>34.50</td> <td>10.59</td> <td>36.92</td> <td>0.00</td> <td>110</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5934.78</td> <td>51.03</td> <td>68.20</td> <td>-17.17</td> <td>42.06</td> <td>34.50</td> <td>10.59</td> <td>36.92</td> <td>0.00</td> <td>110</td> <td>100</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.98	51.14	110.06	-59.72	43.17	34.32	10.56	36.91	0.00	110	100	PEAK	2	5874.93	49.59	105.22	-55.63	41.53	34.40	10.57	36.91	0.00	110	100	PEAK	3	5924.98	50.00	68.22	-18.22	41.83	34.50	10.59	36.92	0.00	110	100	PEAK	4	5934.78	51.03	68.20	-17.17	42.06	34.50	10.59	36.92	0.00	110	100	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.98	51.14	110.06	-59.72	43.17	34.32	10.56	36.91	0.00	110	100	PEAK																																																														
2	5874.93	49.59	105.22	-55.63	41.53	34.40	10.57	36.91	0.00	110	100	PEAK																																																														
3	5924.98	50.00	68.22	-18.22	41.83	34.50	10.59	36.92	0.00	110	100	PEAK																																																														
4	5934.78	51.03	68.20	-17.17	42.06	34.50	10.59	36.92	0.00	110	100	PEAK																																																														



Mode	15																																																																																																																										
	Band Edge - L																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																																																																										
ANT	1																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																									
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE(B4)_16-24</p> <p>Site : 03CH13-HY Condition: PEAK_BE(B4)_16-24 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5633.95</td> <td>49.82</td> <td>68.20</td> <td>-18.38</td> <td>43.17</td> <td>33.14</td> <td>10.36</td> <td>36.85</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.58</td> <td>47.53</td> <td>68.63</td> <td>-21.10</td> <td>40.81</td> <td>33.20</td> <td>10.38</td> <td>36.86</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.68</td> <td>59.97</td> <td>109.59</td> <td>-49.62</td> <td>52.70</td> <td>33.69</td> <td>10.45</td> <td>36.87</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.50</td> <td>62.27</td> <td>116.50</td> <td>-54.23</td> <td>54.95</td> <td>33.74</td> <td>10.45</td> <td>36.87</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5633.95	49.82	68.20	-18.38	43.17	33.14	10.36	36.85	0.00	294	262	PEAK	2	5650.58	47.53	68.63	-21.10	40.81	33.20	10.38	36.86	0.00	294	262	PEAK	3	5715.68	59.97	109.59	-49.62	52.70	33.69	10.45	36.87	0.00	294	262	PEAK	4	5722.50	62.27	116.50	-54.23	54.95	33.74	10.45	36.87	0.00	294	262	PEAK	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK(UNII)</p> <p>Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>97.50</td> <td>-----</td> <td>-----</td> <td>90.07</td> <td>33.84</td> <td>10.47</td> <td>36.88</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	97.50	-----	-----	90.07	33.84	10.47	36.88	0.00	294	262	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5633.95	49.82	68.20	-18.38	43.17	33.14	10.36	36.85	0.00	294	262	PEAK																																																																																																															
2	5650.58	47.53	68.63	-21.10	40.81	33.20	10.38	36.86	0.00	294	262	PEAK																																																																																																															
3	5715.68	59.97	109.59	-49.62	52.70	33.69	10.45	36.87	0.00	294	262	PEAK																																																																																																															
4	5722.50	62.27	116.50	-54.23	54.95	33.74	10.45	36.87	0.00	294	262	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	97.50	-----	-----	90.07	33.84	10.47	36.88	0.00	294	262	PEAK																																																																																																															
Avg	Blank	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>88.86</td> <td>-----</td> <td>-----</td> <td>81.43</td> <td>33.84</td> <td>10.47</td> <td>36.88</td> <td>0.00</td> <td>294</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	88.86	-----	-----	81.43	33.84	10.47	36.88	0.00	294	262	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5775.00	88.86	-----	-----	81.43	33.84	10.47	36.88	0.00	294	262	AVERAGE																																																																																																															



Mode	15																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH13-HY          Condition: PEAK_BE(B4)_16-24 3m HORN_91200_1326 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>49.31</td> <td>111.65</td> <td>-62.34</td> <td>41.34</td> <td>34.32</td> <td>10.56</td> <td>36.91</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5872.30</td> <td>50.34</td> <td>105.95</td> <td>-55.61</td> <td>42.29</td> <td>34.39</td> <td>10.57</td> <td>36.91</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>48.70</td> <td>68.48</td> <td>-19.78</td> <td>40.53</td> <td>34.50</td> <td>10.59</td> <td>36.92</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5932.68</td> <td>50.99</td> <td>68.20</td> <td>-17.21</td> <td>42.82</td> <td>34.50</td> <td>10.59</td> <td>36.92</td> <td>0.00</td> <td>294</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.63	49.31	111.65	-62.34	41.34	34.32	10.56	36.91	0.00	294	262	PEAK	2	5872.30	50.34	105.95	-55.61	42.29	34.39	10.57	36.91	0.00	294	262	PEAK	3	5924.63	48.70	68.48	-19.78	40.53	34.50	10.59	36.92	0.00	294	262	PEAK	4	5932.68	50.99	68.20	-17.21	42.82	34.50	10.59	36.92	0.00	294	262	PEAK	Blank
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5854.63	49.31	111.65	-62.34	41.34	34.32	10.56	36.91	0.00	294	262	PEAK																																																																				
2	5872.30	50.34	105.95	-55.61	42.29	34.39	10.57	36.91	0.00	294	262	PEAK																																																																				
3	5924.63	48.70	68.48	-19.78	40.53	34.50	10.59	36.92	0.00	294	262	PEAK																																																																				
4	5932.68	50.99	68.20	-17.21	42.82	34.50	10.59	36.92	0.00	294	262	PEAK																																																																				



Mode	16																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full_5825MHz																																																																																																																																																																																							
ANT	1																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH13-HY Condition: QP 3m BILOG_40103 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>23.23</td><td>40.00</td><td>-16.77</td><td>29.28</td><td>25.30</td><td>0.93</td><td>32.31</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>211.39</td><td>28.03</td><td>43.50</td><td>-15.47</td><td>42.97</td><td>15.02</td><td>2.16</td><td>32.19</td><td>0.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>242.43</td><td>30.65</td><td>46.00</td><td>-15.35</td><td>42.75</td><td>17.64</td><td>2.30</td><td>32.15</td><td>0.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>325.85</td><td>32.37</td><td>46.00</td><td>-13.63</td><td>42.06</td><td>19.63</td><td>2.62</td><td>32.06</td><td>0.12</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>739.07</td><td>34.89</td><td>46.00</td><td>-11.11</td><td>35.01</td><td>27.98</td><td>3.83</td><td>32.07</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>945.68</td><td>34.74</td><td>46.00</td><td>-11.26</td><td>30.47</td><td>30.83</td><td>4.27</td><td>31.03</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	23.23	40.00	-16.77	29.28	25.30	0.93	32.31	0.03	--	--	Peak	2	211.39	28.03	43.50	-15.47	42.97	15.02	2.16	32.19	0.07	--	--	Peak	3	242.43	30.65	46.00	-15.35	42.75	17.64	2.30	32.15	0.11	--	--	Peak	4	325.85	32.37	46.00	-13.63	42.06	19.63	2.62	32.06	0.12	--	--	Peak	5	739.07	34.89	46.00	-11.11	35.01	27.98	3.83	32.07	0.14	--	--	Peak	6	945.68	34.74	46.00	-11.26	30.47	30.83	4.27	31.03	0.20	--	--	Peak	<p>Site : 03CH13-HY Condition: QP 3m BILOG_40103 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>42.61</td><td>33.04</td><td>40.00</td><td>-6.16</td><td>46.66</td><td>18.30</td><td>1.06</td><td>32.30</td><td>0.12</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>101.78</td><td>28.77</td><td>43.50</td><td>-14.73</td><td>43.19</td><td>16.20</td><td>1.58</td><td>32.28</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>233.70</td><td>26.65</td><td>46.00</td><td>-19.35</td><td>39.88</td><td>16.57</td><td>2.26</td><td>32.16</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>429.64</td><td>31.64</td><td>46.00</td><td>-14.36</td><td>37.91</td><td>22.80</td><td>2.98</td><td>32.15</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>716.76</td><td>36.37</td><td>46.00</td><td>-9.63</td><td>37.47</td><td>27.07</td><td>3.80</td><td>32.11</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>959.26</td><td>36.16</td><td>46.00</td><td>-9.84</td><td>31.56</td><td>31.00</td><td>4.30</td><td>30.91</td><td>0.21</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	42.61	33.04	40.00	-6.16	46.66	18.30	1.06	32.30	0.12	--	--	Peak	2	101.78	28.77	43.50	-14.73	43.19	16.20	1.58	32.28	0.08	--	--	Peak	3	233.70	26.65	46.00	-19.35	39.88	16.57	2.26	32.16	0.10	--	--	Peak	4	429.64	31.64	46.00	-14.36	37.91	22.80	2.98	32.15	0.10	--	--	Peak	5	716.76	36.37	46.00	-9.63	37.47	27.07	3.80	32.11	0.14	--	--	Peak	6	959.26	36.16	46.00	-9.84	31.56	31.00	4.30	30.91	0.21	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	30.00	23.23	40.00	-16.77	29.28	25.30	0.93	32.31	0.03	--	--	Peak																																																																																																																																																																												
2	211.39	28.03	43.50	-15.47	42.97	15.02	2.16	32.19	0.07	--	--	Peak																																																																																																																																																																												
3	242.43	30.65	46.00	-15.35	42.75	17.64	2.30	32.15	0.11	--	--	Peak																																																																																																																																																																												
4	325.85	32.37	46.00	-13.63	42.06	19.63	2.62	32.06	0.12	--	--	Peak																																																																																																																																																																												
5	739.07	34.89	46.00	-11.11	35.01	27.98	3.83	32.07	0.14	--	--	Peak																																																																																																																																																																												
6	945.68	34.74	46.00	-11.26	30.47	30.83	4.27	31.03	0.20	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	42.61	33.04	40.00	-6.16	46.66	18.30	1.06	32.30	0.12	--	--	Peak																																																																																																																																																																												
2	101.78	28.77	43.50	-14.73	43.19	16.20	1.58	32.28	0.08	--	--	Peak																																																																																																																																																																												
3	233.70	26.65	46.00	-19.35	39.88	16.57	2.26	32.16	0.10	--	--	Peak																																																																																																																																																																												
4	429.64	31.64	46.00	-14.36	37.91	22.80	2.98	32.15	0.10	--	--	Peak																																																																																																																																																																												
5	716.76	36.37	46.00	-9.63	37.47	27.07	3.80	32.11	0.14	--	--	Peak																																																																																																																																																																												
6	959.26	36.16	46.00	-9.84	31.56	31.00	4.30	30.91	0.21	--	--	Peak																																																																																																																																																																												



Mode	17																																																																																																															
	SHF																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full_5825MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak	<p>Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>18987.00</td> <td>46.73</td> <td>74.00</td> <td>-27.27</td> <td>67.68</td> <td>37.80</td> <td>6.10</td> <td>55.31</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>39745.00</td> <td>46.96</td> <td>74.00</td> <td>-27.04</td> <td>58.67</td> <td>44.58</td> <td>9.06</td> <td>55.81</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	18987.00	46.73	74.00	-27.27	67.68	37.80	6.10	55.31	-9.54	--	Peak	2	39745.00	46.96	74.00	-27.04	58.67	44.58	9.06	55.81	-9.54	--	Peak	<p>Site : 03CH13-HY Condition: PEAK_74 1m SHF_00993_231124 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>24699.00</td> <td>47.08</td> <td>74.00</td> <td>-26.92</td> <td>63.69</td> <td>39.30</td> <td>7.01</td> <td>53.38</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>39625.00</td> <td>47.26</td> <td>74.00</td> <td>-26.74</td> <td>59.14</td> <td>44.70</td> <td>8.96</td> <td>56.00</td> <td>-9.54</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24699.00	47.08	74.00	-26.92	63.69	39.30	7.01	53.38	-9.54	--	Peak	2	39625.00	47.26	74.00	-26.74	59.14	44.70	8.96	56.00	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	18987.00	46.73	74.00	-27.27	67.68	37.80	6.10	55.31	-9.54	--	Peak																																																																																																					
2	39745.00	46.96	74.00	-27.04	58.67	44.58	9.06	55.81	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	24699.00	47.08	74.00	-26.92	63.69	39.30	7.01	53.38	-9.54	--	Peak																																																																																																					
2	39625.00	47.26	74.00	-26.74	59.14	44.70	8.96	56.00	-9.54	--	Peak																																																																																																					





### Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	97.86	5475	0.18	300Hz
1	5GHz 802.11n HT20	92.10	5070	0.20	300Hz
1	5GHz 802.11n HT40	86.06	2470	0.40	1kHz
1	5GHz 802.11ac VHT80	96.18	4530	0.22	300Hz
1	5GHz 802.11ax HE20 Full RU	95.56	3870	0.26	300Hz
1	5GHz 802.11ax HE40 Full RU	90.23	3880	0.26	300Hz
1	5GHz 802.11ax HE80 Full RU	89.16	3700	0.27	300Hz

