

WiFi 802.11b -Body Rear Low CH1.....	2
WiFi 802.11b -Body Rear Middle CH6.....	3
WiFi 802.11b -Body Rear High CH11.....	4
WiFi 802.11b -Body Edge 1 High CH11.....	5
WiFi 802.11b -Body Edge 4 High CH11.....	6
WiFi 802.11n40 -Body Rear CH54.....	7
WiFi 802.11n40 -Body Rear CH62.....	8
WiFi 802.11n40 -Body Edge 1 CH62.....	9
WiFi 802.11n40 -Body Edge 4 CH62.....	10
WiFi 802.11n40-Body Rear CH102.....	11
WiFi 802.11n40-Body Rear CH110.....	12
WiFi 802.11n40-Body Rear CH134.....	13
WiFi 802.11n40 -Body Edge 1 CH110.....	14
WiFi 802.11n40 -Body Edge 4 CH110.....	15
WiFi 802.11n40-Body Rear CH151.....	16
WiFi 802.11n40-Body Rear CH159.....	17
WiFi 802.11n40 -Body Edge 1 CH151.....	18
WiFi 802.11n40 -Body Edge 4 CH151.....	19
WiFi 802.11n40 -Body Rear CH54 repeat.....	20
WiFi 802.11n40-Body Body Rear CH110 repeat.....	21
WiFi 802.11n40-Body Body Rear CH159 repeat.....	22
WiFi 802.11b -Body Rear Middle CH6.....	23
WiFi 802.11n40-Body Rear CH110.....	24

Test Laboratory: Compliance Certification Services Inc.

Date: 6/13/2017

WiFi 802.11b -Body Rear Low CH1

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.931 \text{ S/m}$; $\epsilon_r = 51.775$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Rear Low CH1/Area Scan (11x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.801 W/kg


WiFi/Body Rear Low CH1/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6710 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.941 W/kg

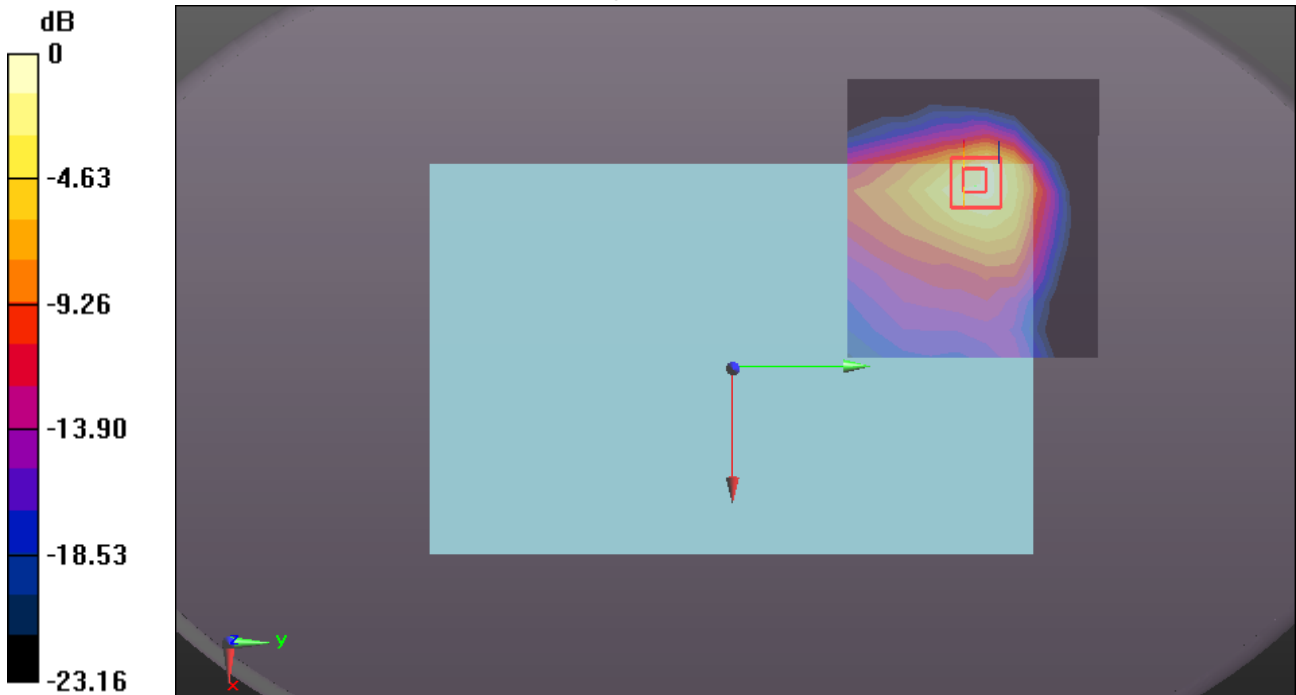

0 dB = 0.941 W/kg = -0.26 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/13/2017

WiFi 802.11b -Body Rear Middle CH6

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 51.722$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Rear Middle CH6/Area Scan (11x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.809 W/kg


WiFi/Body Rear Middle CH6/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8020 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.961 W/kg

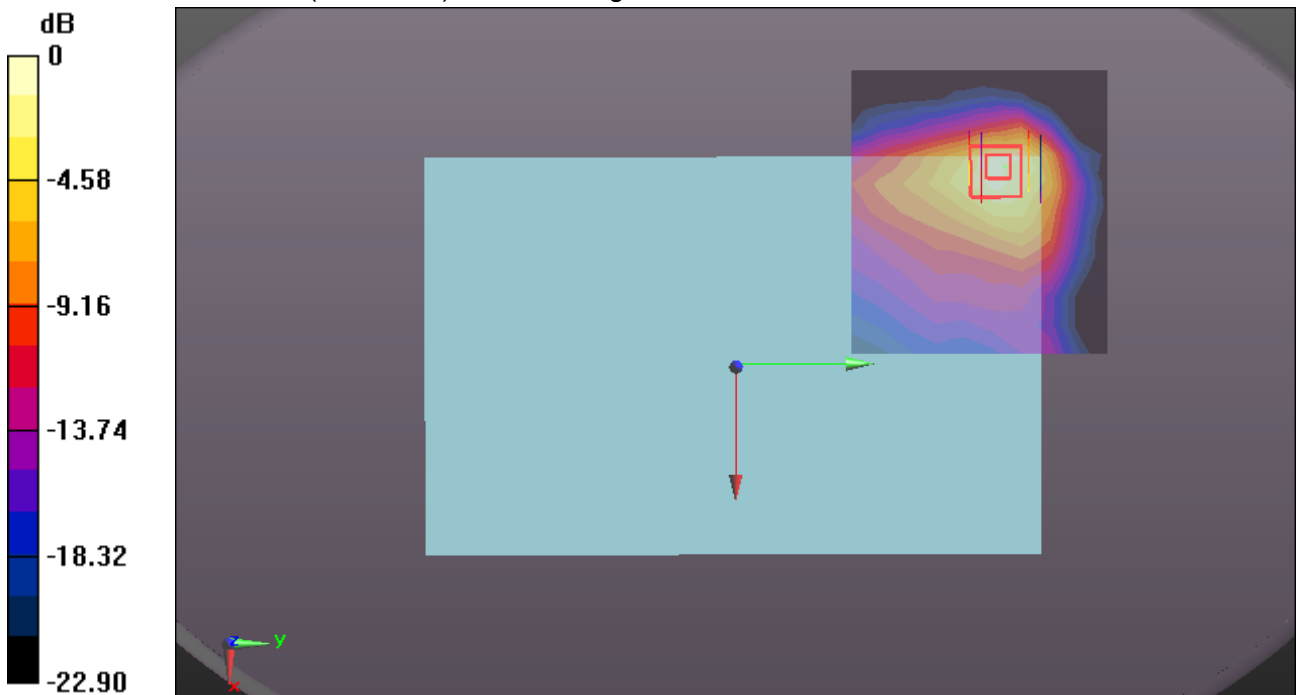

0 dB = 0.961 W/kg = -0.17 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/13/2017

WiFi 802.11b -Body Rear High CH11

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 51.635$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Rear High CH11/Area Scan (11x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.00 W/kg


WiFi/Body Rear High CH11/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8310 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.991 W/kg

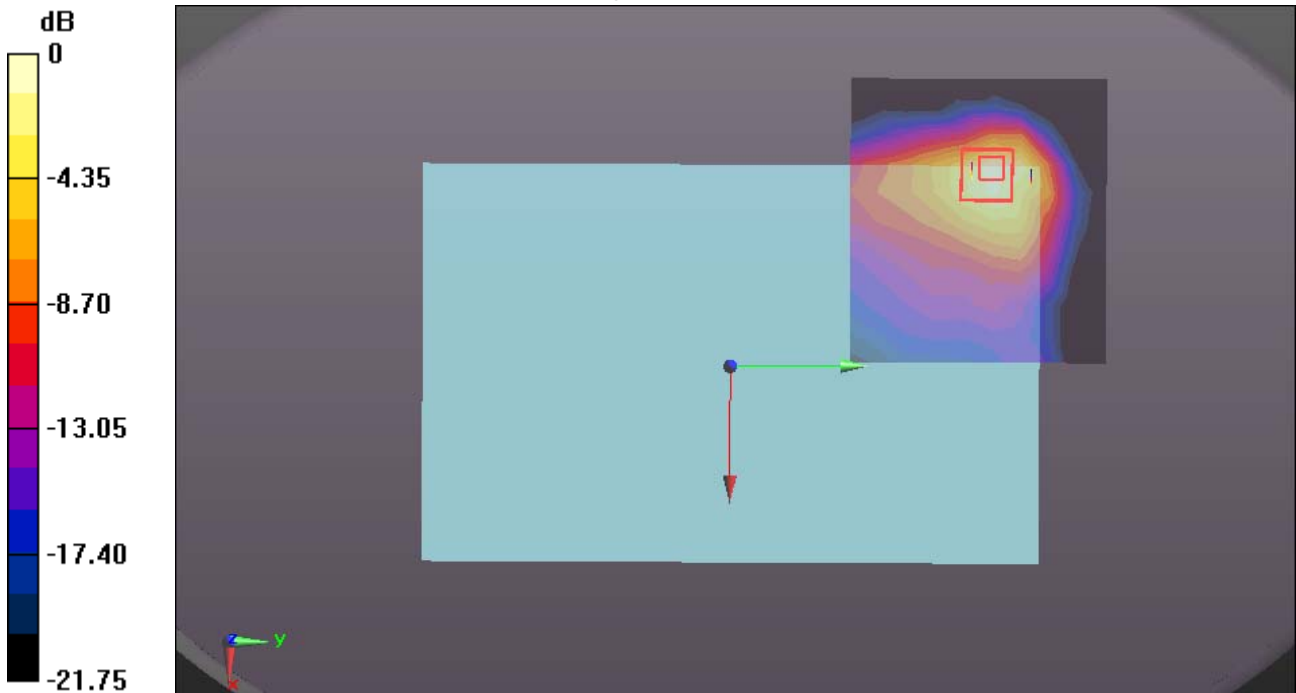

0 dB = 0.991 W/kg = -0.04 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/13/2017

WiFi 802.11b -Body Edge 1 High CH11

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.992 \text{ S/m}$; $\epsilon_r = 51.635$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Edge 1 High CH11/Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.492 W/kg


WiFi/Body Edge 1 High CH11/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.658 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 0.581 W/kg

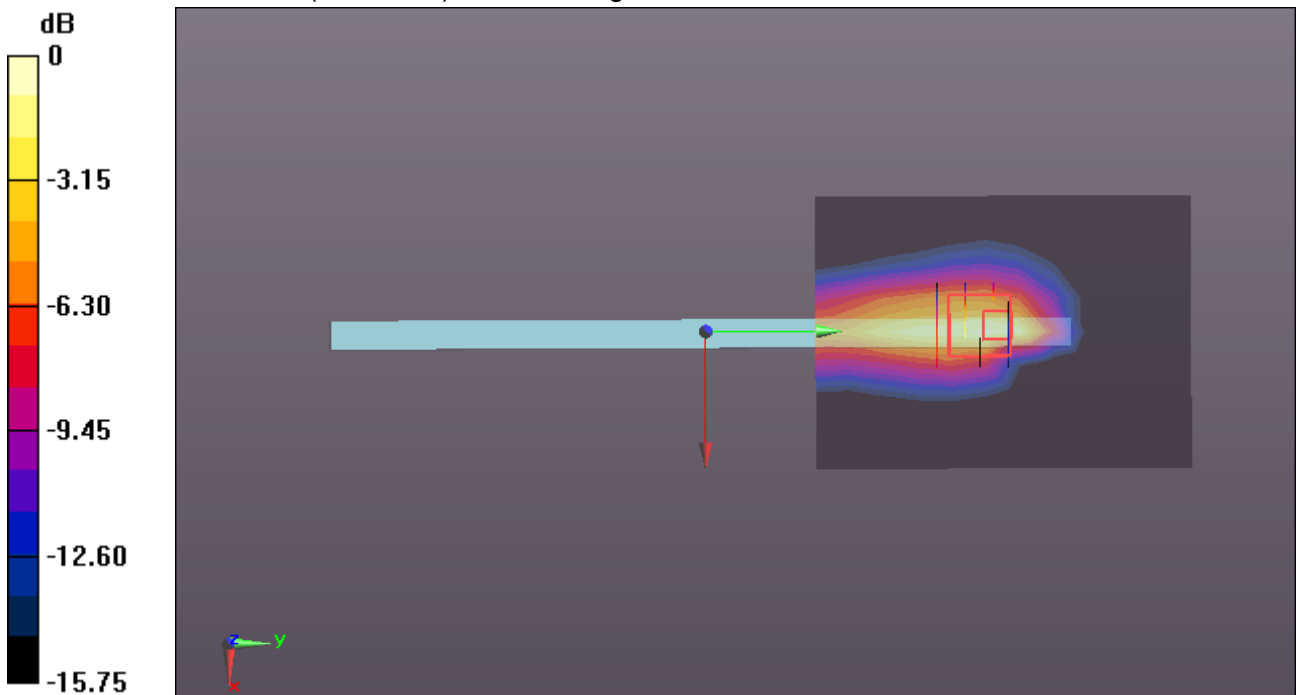

0 dB = 0.581 W/kg = -2.36 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/13/2017

WiFi 802.11b -Body Edge 4 High CH11

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 51.635$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Edge 4 High CH11/Area Scan (10x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.367 W/kg


WiFi/Body Edge 4 High CH11/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.631 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.434 W/kg

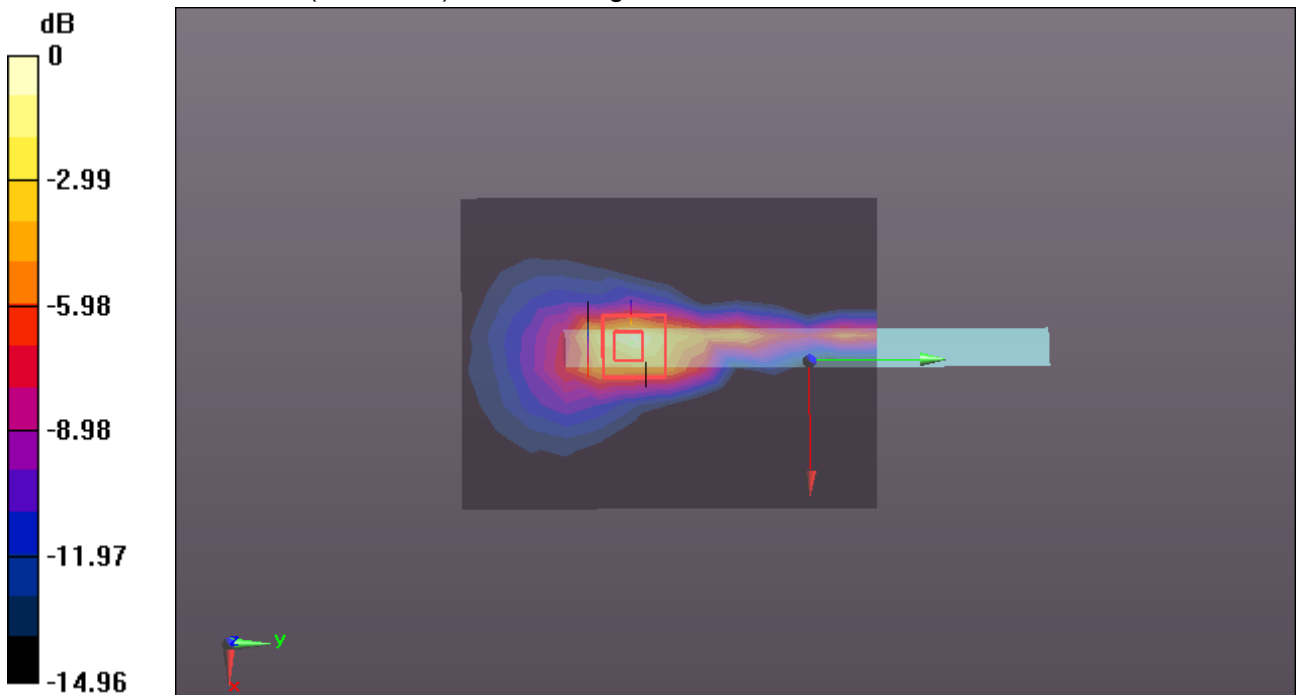

0 dB = 0.434 W/kg = -3.63 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40 -Body Rear CH54

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band II;

Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.432$ S/m; $\epsilon_r = 50.38$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Rear CH54/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.76 W/kg


WIFI/Body Rear CH54/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.3200 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.75 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 2.71 W/kg

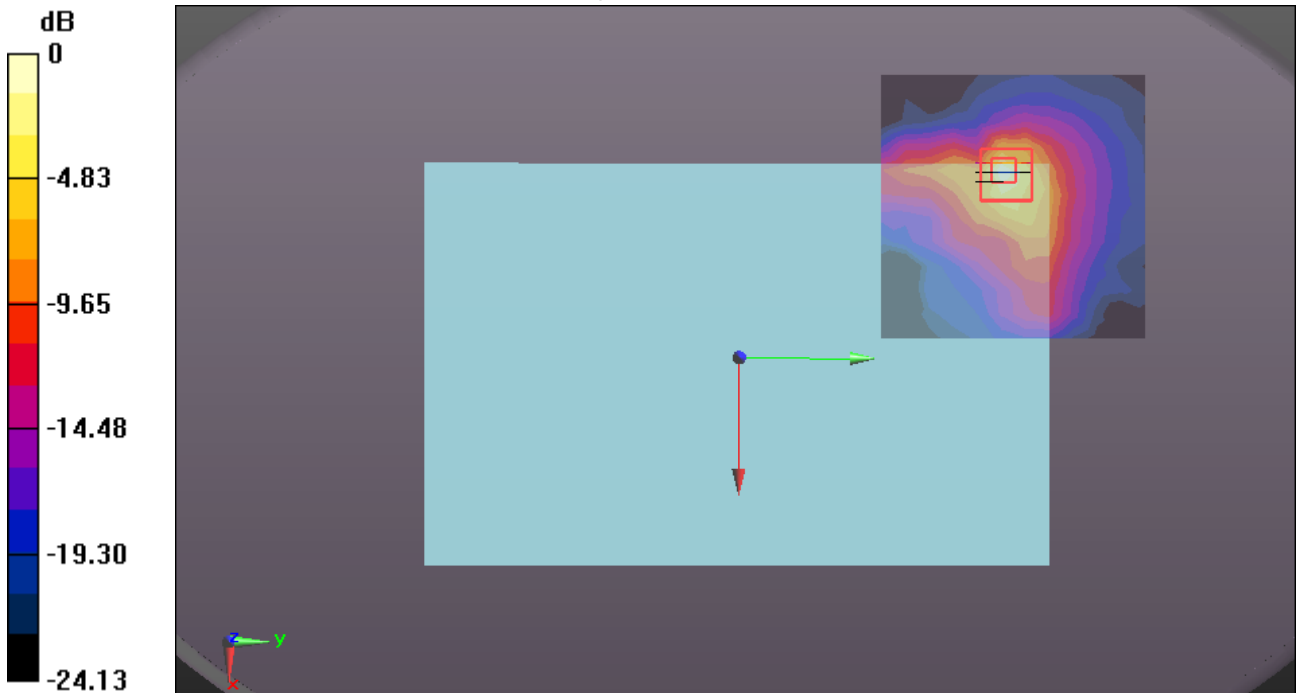

0 dB = 2.71 W/kg = 4.33 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40 -Body Rear CH62

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band II;

Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310 \text{ MHz}$; $\sigma = 5.482 \text{ S/m}$; $\epsilon_r = 50.666$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Rear CH62/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.30 W/kg


WIFI/Body Rear CH62/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5463 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.68 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 2.61 W/kg

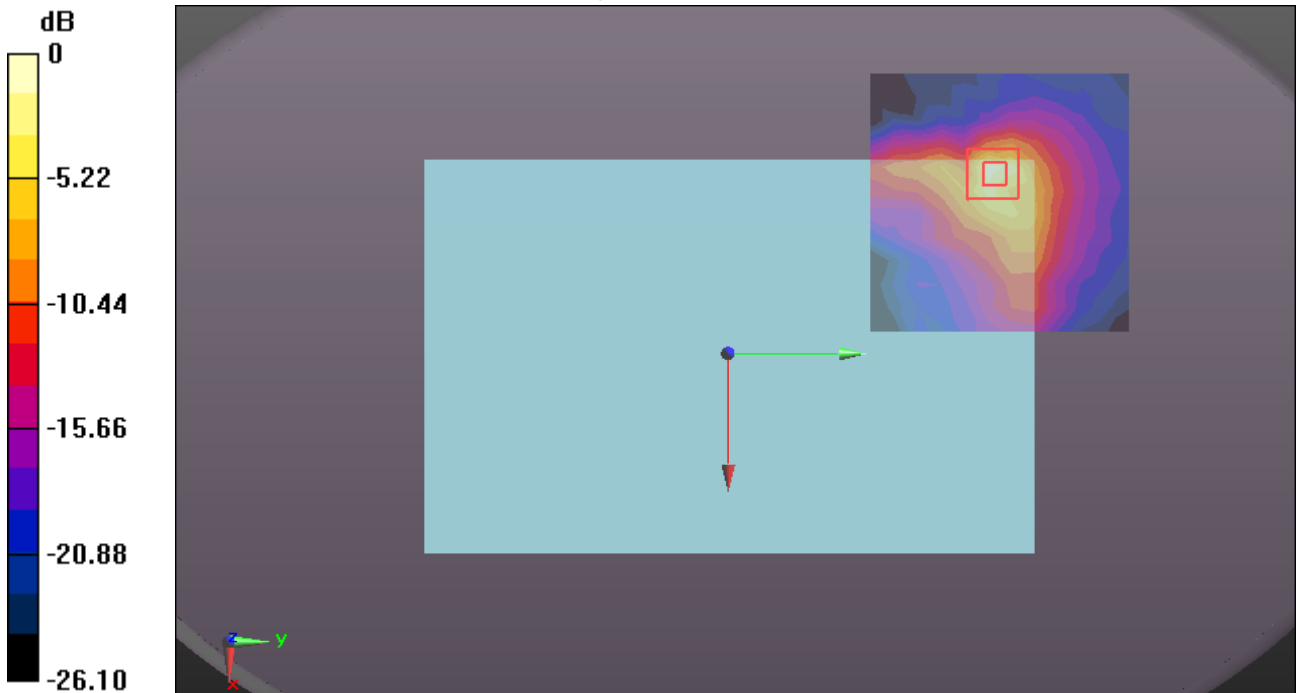

0 dB = 2.61 W/kg = 4.17 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WiFi 802.11n40 -Body Edge 1 CH62

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band II;

Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 5.482$ S/m; $\epsilon_r = 50.666$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Edge 1 CH62/Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.674 W/kg


WiFi/Body Edge 1 CH62/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.255 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

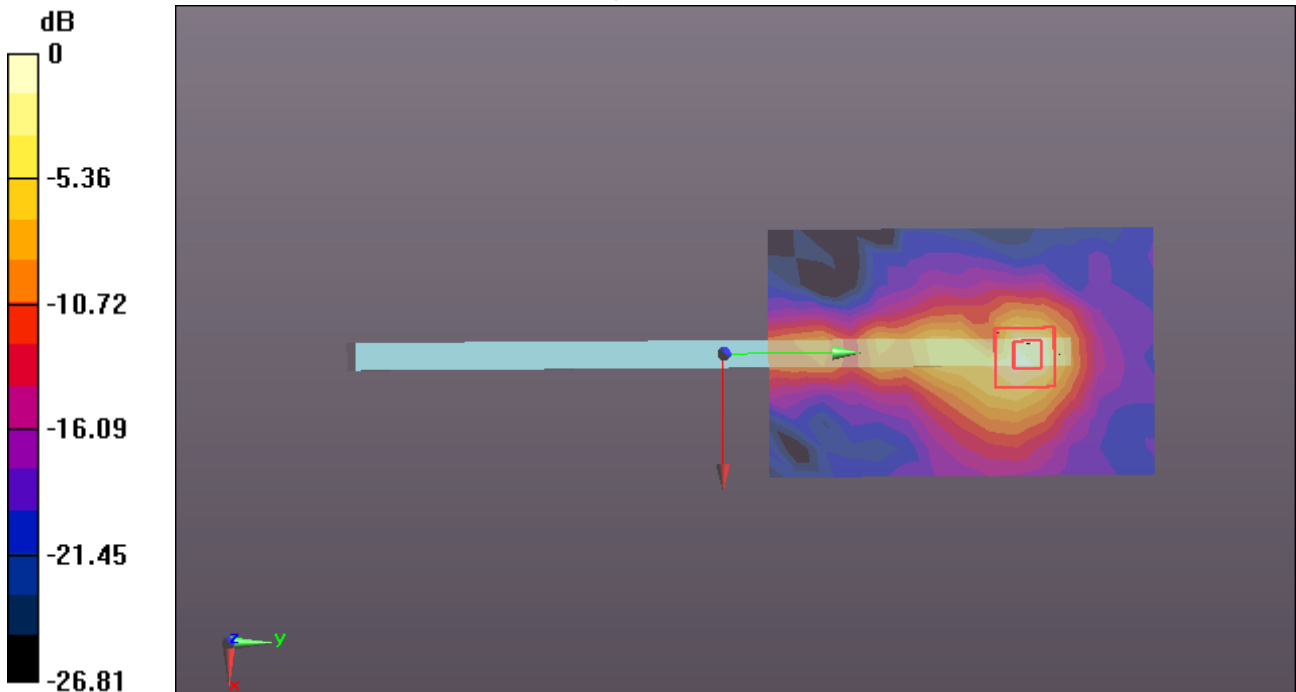

0 dB = 0.817 W/kg = -0.88 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WiFi 802.11n40 -Body Edge 4 CH62

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band II;

Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 5.482$ S/m; $\epsilon_r = 50.666$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Edge 4 CH62/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.939 W/kg


WiFi/Body Edge 4 CH62/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.385 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.996 W/kg

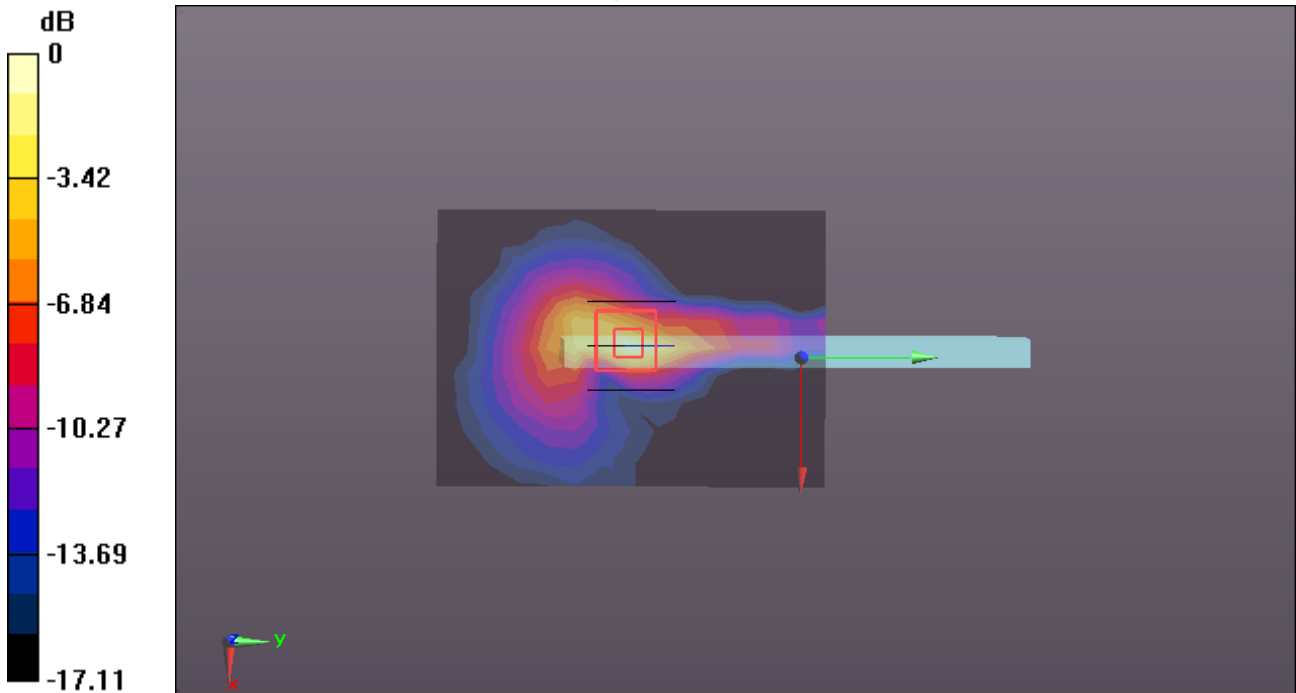

0 dB = 0.996 W/kg = -0.02 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40-Body Rear CH102

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5510$ MHz; $\sigma = 5.567$ S/m; $\epsilon_r = 50.452$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.23, 4.23, 4.23); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH102/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.49 W/kg


WIFI/IEEE802.11n40 Body Rear CH102/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.8411 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.33 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 2.84 W/kg

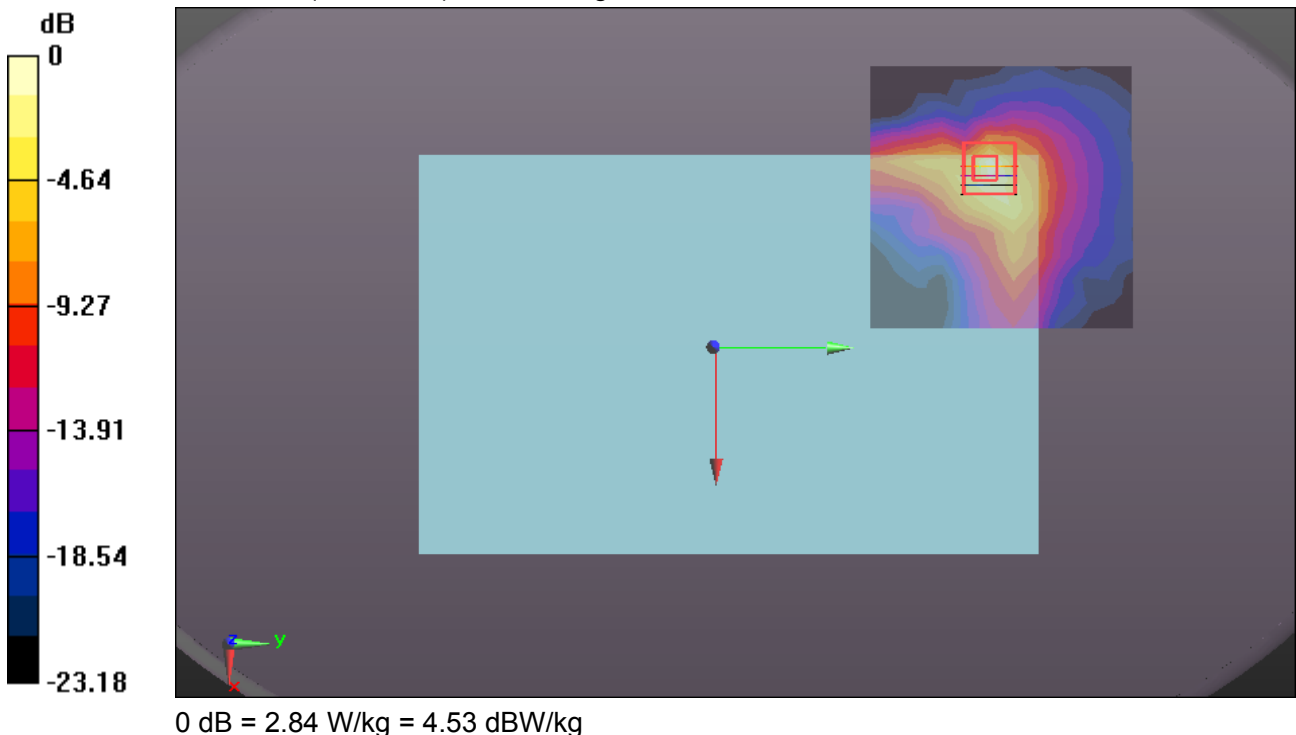

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40-Body Rear CH110

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5550$ MHz; $\sigma = 5.746$ S/m; $\epsilon_r = 49.791$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.23, 4.23, 4.23); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH110/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.22 W/kg


WIFI/IEEE802.11n40 Body Rear CH110/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6159 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 5.68 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.355 W/kg

Maximum value of SAR (measured) = 3.08 W/kg

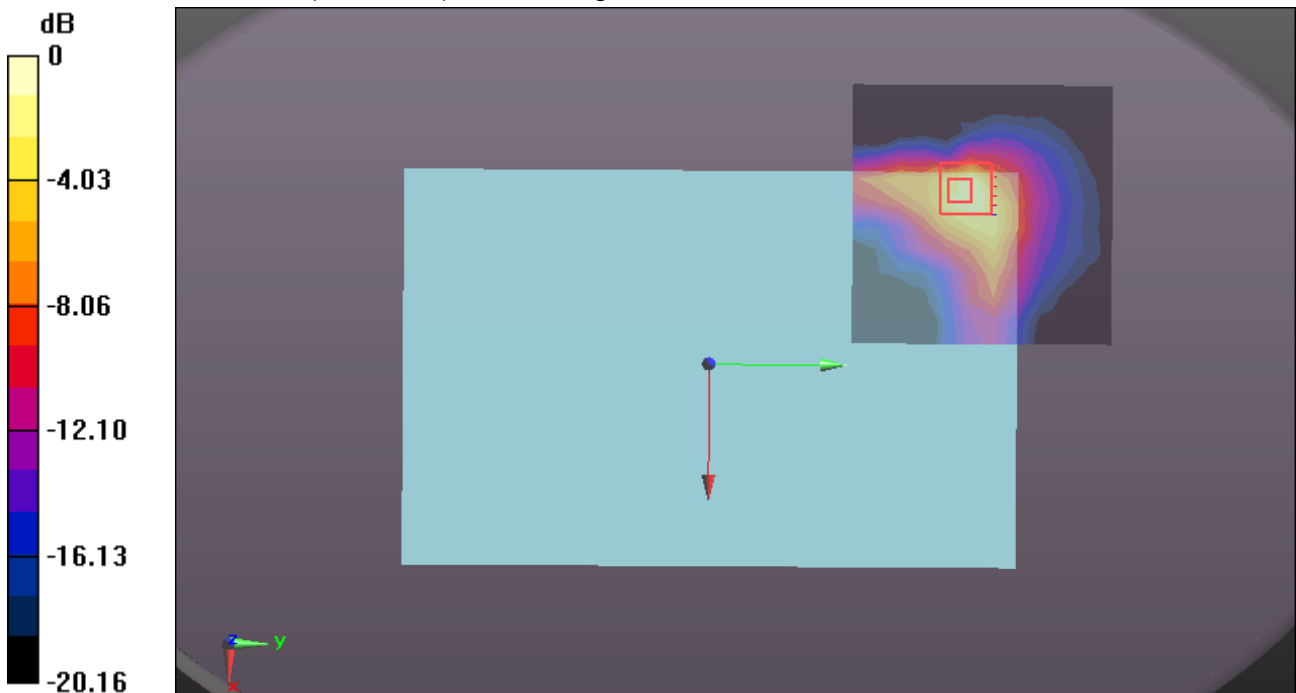

0 dB = 3.08 W/kg = 4.89 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40-Body Rear CH134

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.937$ S/m; $\epsilon_r = 49.872$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.18, 4.18, 4.18); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH134/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.14 W/kg


WIFI/IEEE802.11n40 Body Rear CH134/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6148 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 5.47 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 2.91 W/kg

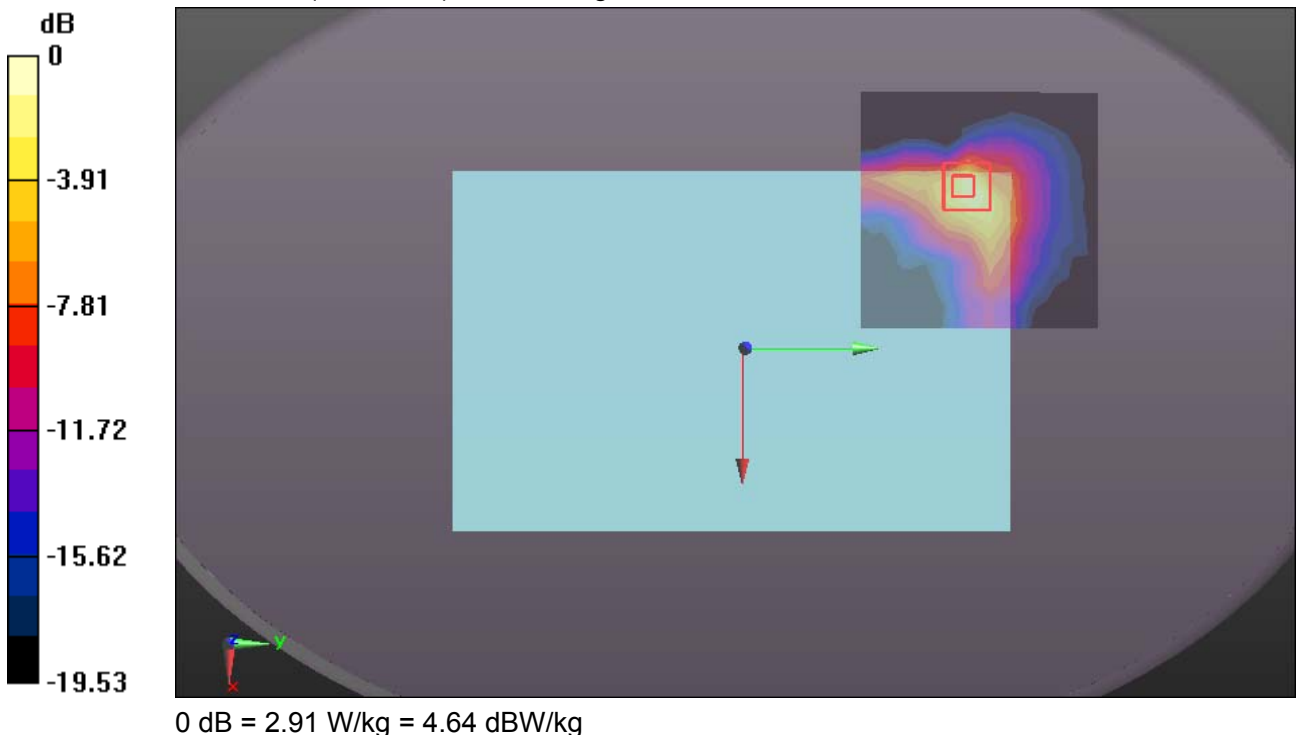

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WiFi 802.11n40 -Body Edge 1 CH110

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;

Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5550$ MHz; $\sigma = 5.746$ S/m; $\epsilon_r = 49.791$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.23, 4.23, 4.23); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Edge 1 CH110/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.05 W/kg


WiFi/Body Edge 1 CH110/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.418 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

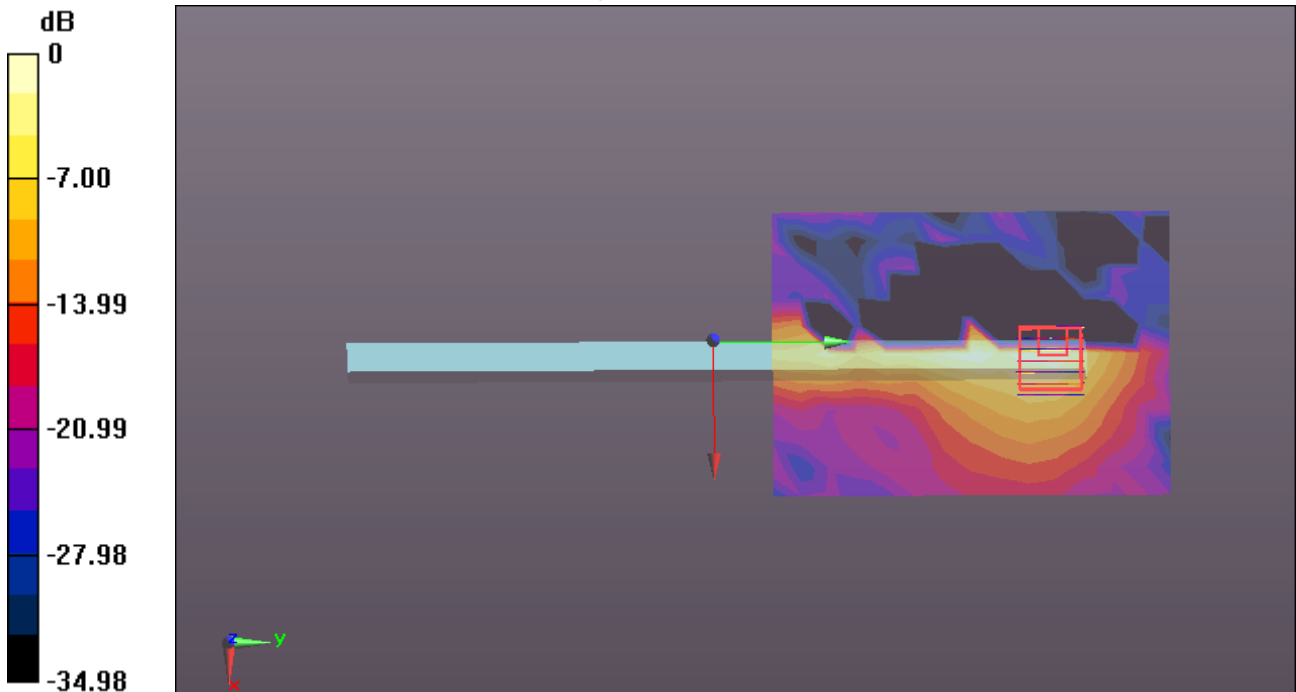

0 dB = 1.02 W/kg = 0.09 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WiFi 802.11n40 -Body Edge 4 CH110

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;

Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5550$ MHz; $\sigma = 5.746$ S/m; $\epsilon_r = 49.791$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.23, 4.23, 4.23); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Edge 4 CH110/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.66 W/kg


WiFi/Body Edge 4 CH110/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.699 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 1.67 W/kg

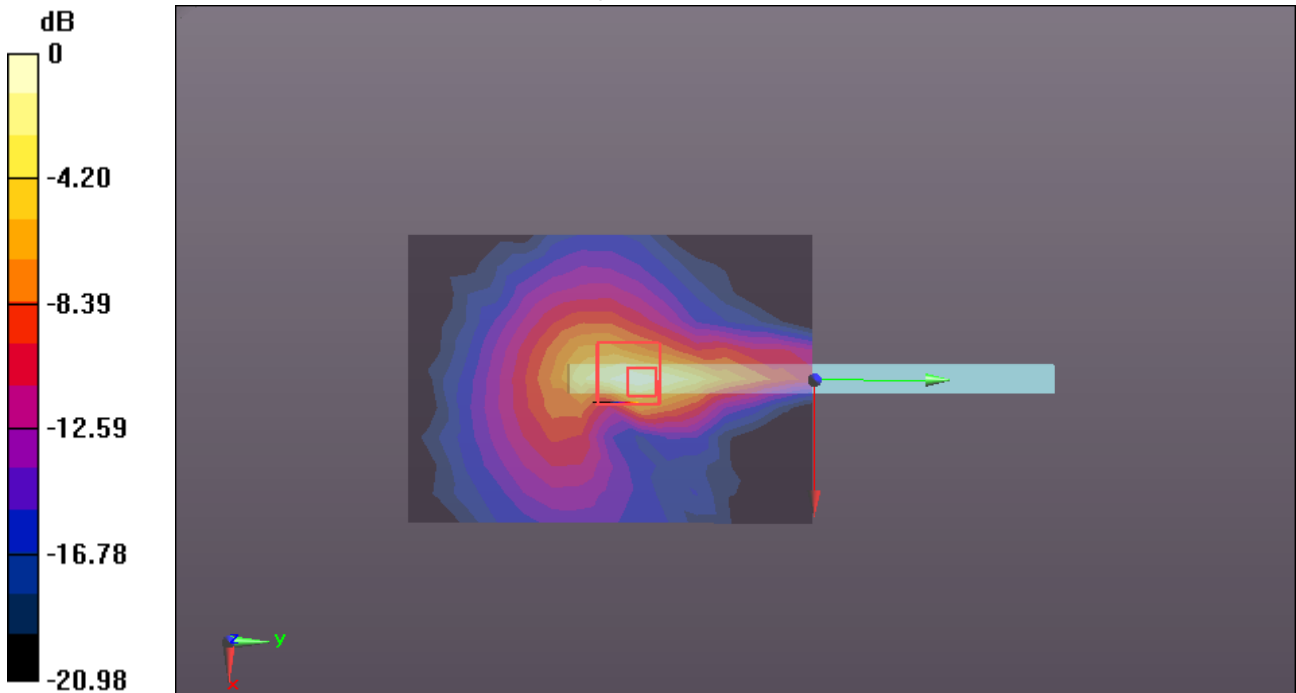

0 dB = 1.67 W/kg = 2.23 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40-Body Rear CH151

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band IV;
Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.956$ S/m; $\epsilon_r = 49.561$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH151/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.43 W/kg


WIFI/IEEE802.11n40 Body Rear CH151/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.021 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.33 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 2.29 W/kg

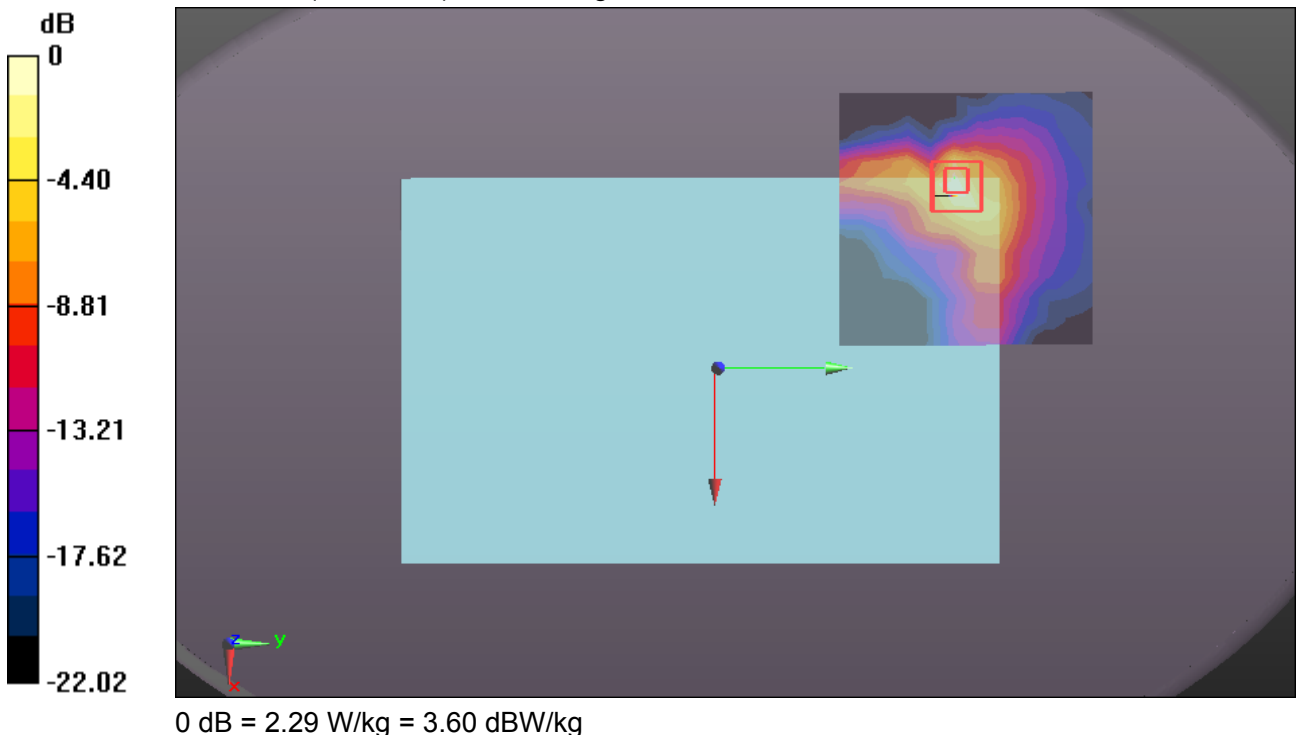

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40-Body Rear CH159

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band IV;
Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 6.18 \text{ S/m}$; $\epsilon_r = 50.085$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH159/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.28 W/kg


WIFI/IEEE802.11n40 Body Rear CH159/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6492 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.89 W/kg

SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

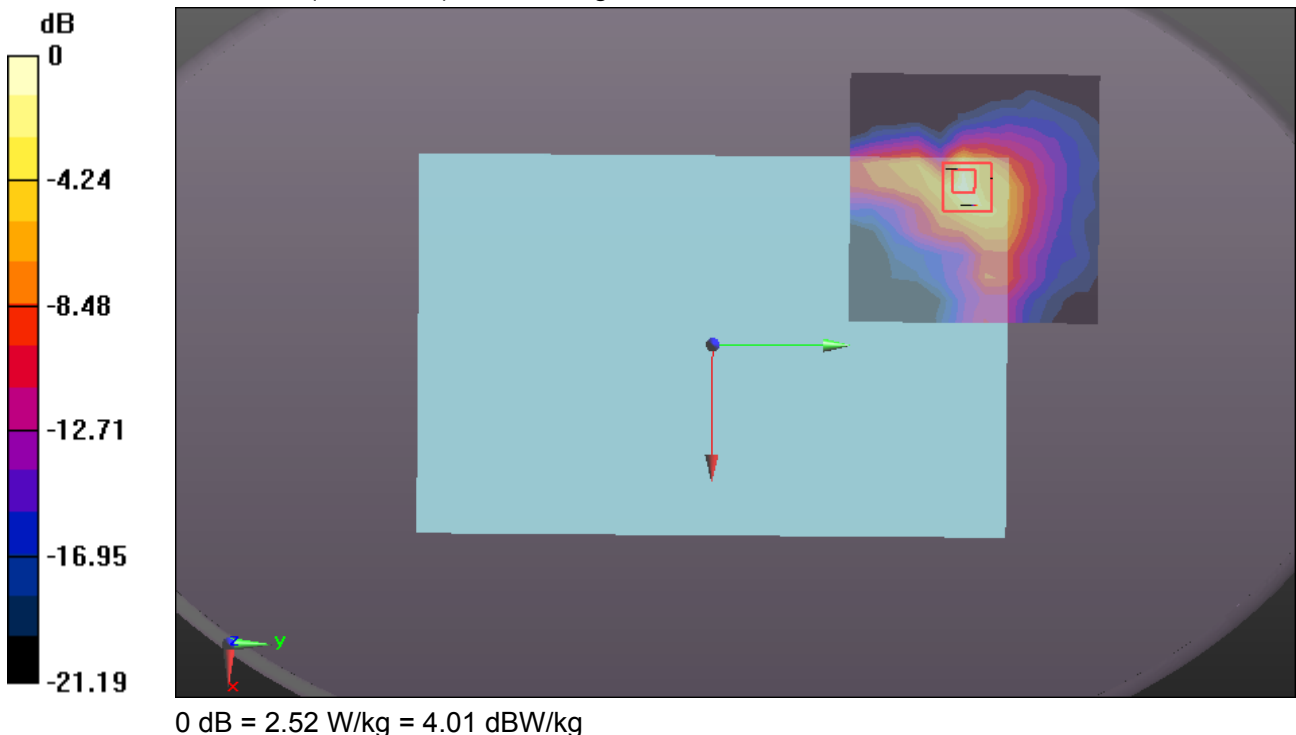

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WiFi 802.11n40 -Body Edge 1 CH151

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band IV;
Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5755 \text{ MHz}$; $\sigma = 5.956 \text{ S/m}$; $\epsilon_r = 49.561$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Edge 1 CH151/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.748 W/kg


WiFi/Body Edge 1 CH151/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.589 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

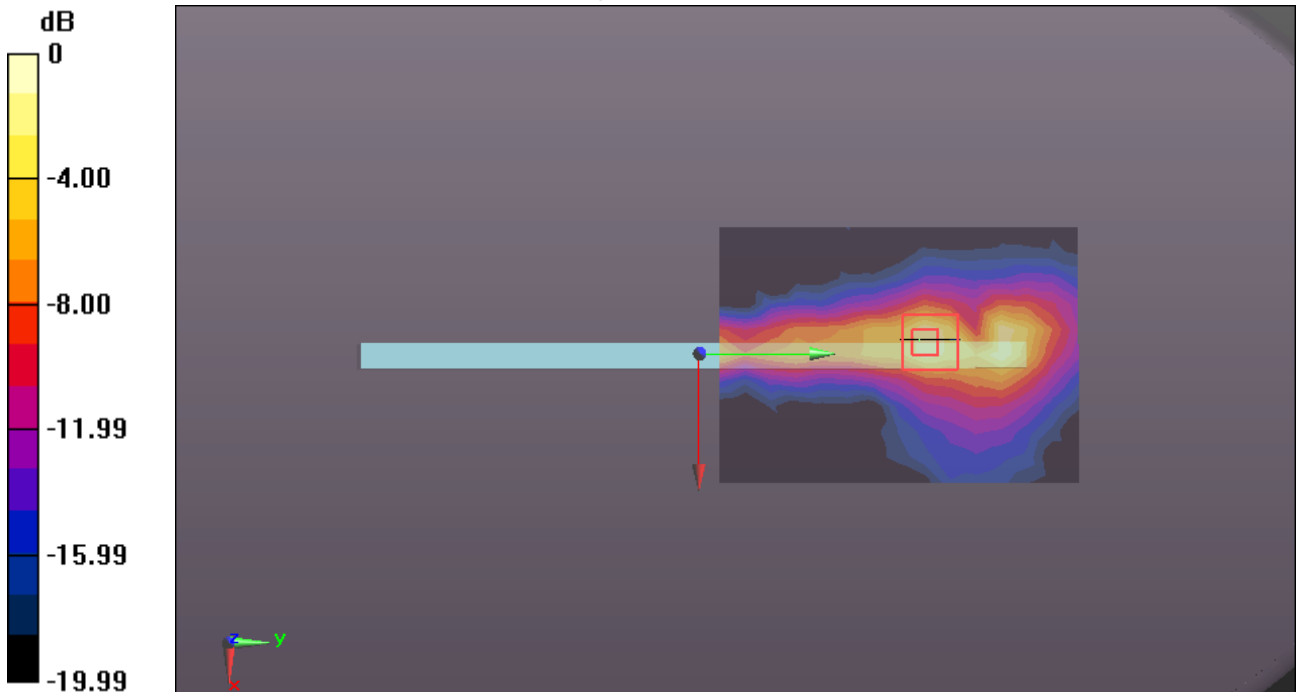

0 dB = 1.01 W/kg = 0.04 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WiFi 802.11n40 -Body Edge 4 CH151

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band IV;
Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.956$ S/m; $\epsilon_r = 49.561$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Edge 4 CH151/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.56 W/kg


WiFi/Body Edge 4 CH151/Zoom Scan (9x10x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.903 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 1.64 W/kg

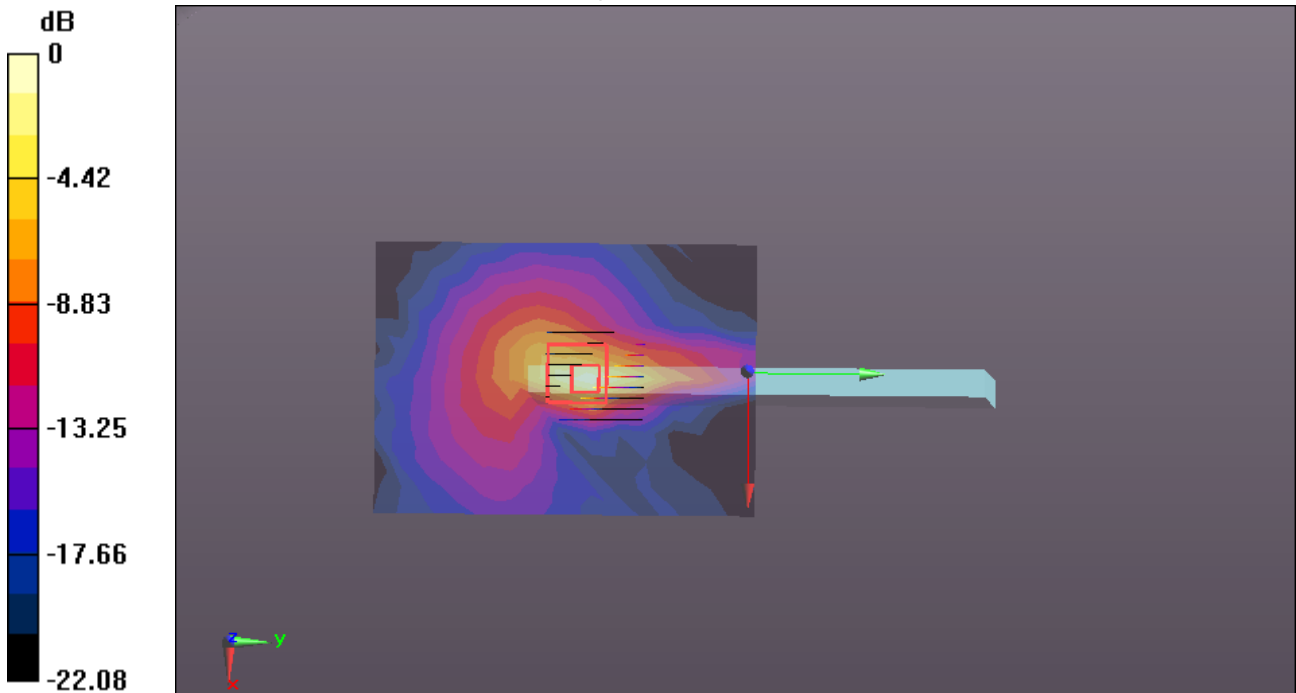

0 dB = 1.64 W/kg = 2.15 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40 -Body Rear CH54 repeat

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band II;

Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.432$ S/m; $\epsilon_r = 50.38$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.6, 4.6, 4.6); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body Rear CH54 repeat/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.09 W/kg


WIFI/Body Rear CH54 repeat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6211 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 5.29 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 2.91 W/kg

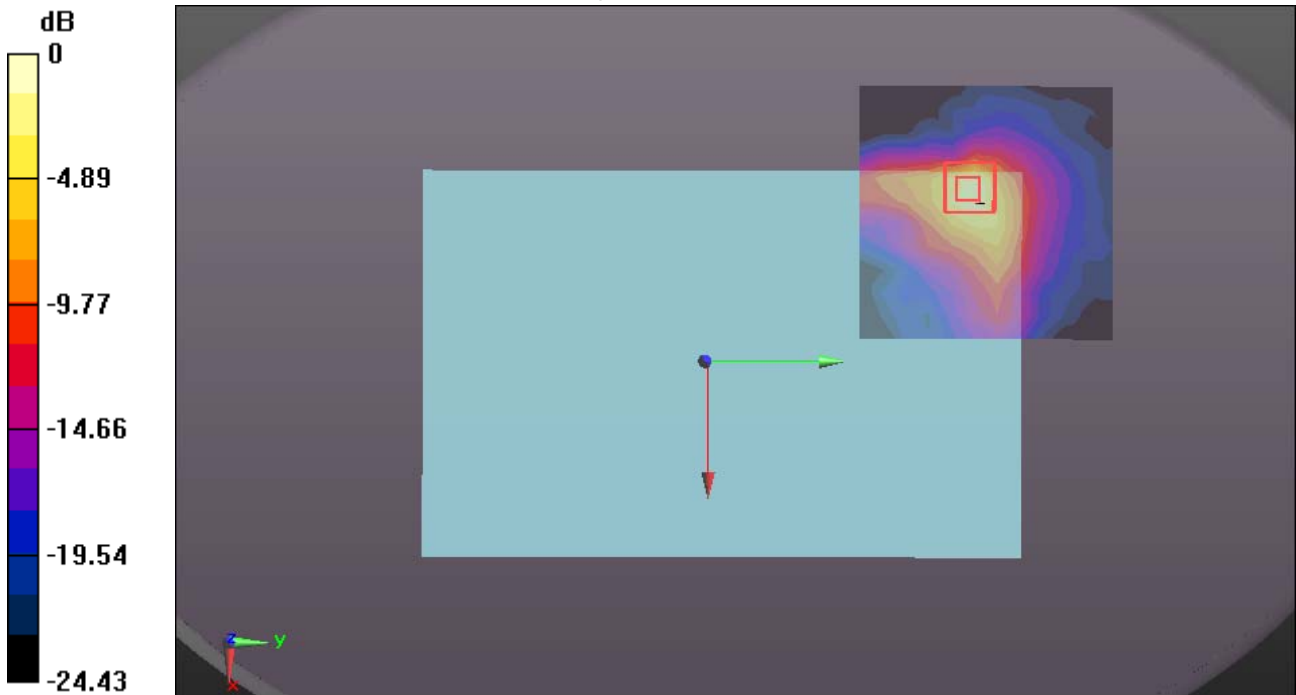

0 dB = 2.91 W/kg = 4.64 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40-Body Body Rear CH110 repeat

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5550$ MHz; $\sigma = 5.746$ S/m; $\epsilon_r = 49.791$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.23, 4.23, 4.23); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH110 repeat/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.35 W/kg


WIFI/IEEE802.11n40 Body Rear CH110 repeat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9151 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 5.48 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 2.88 W/kg

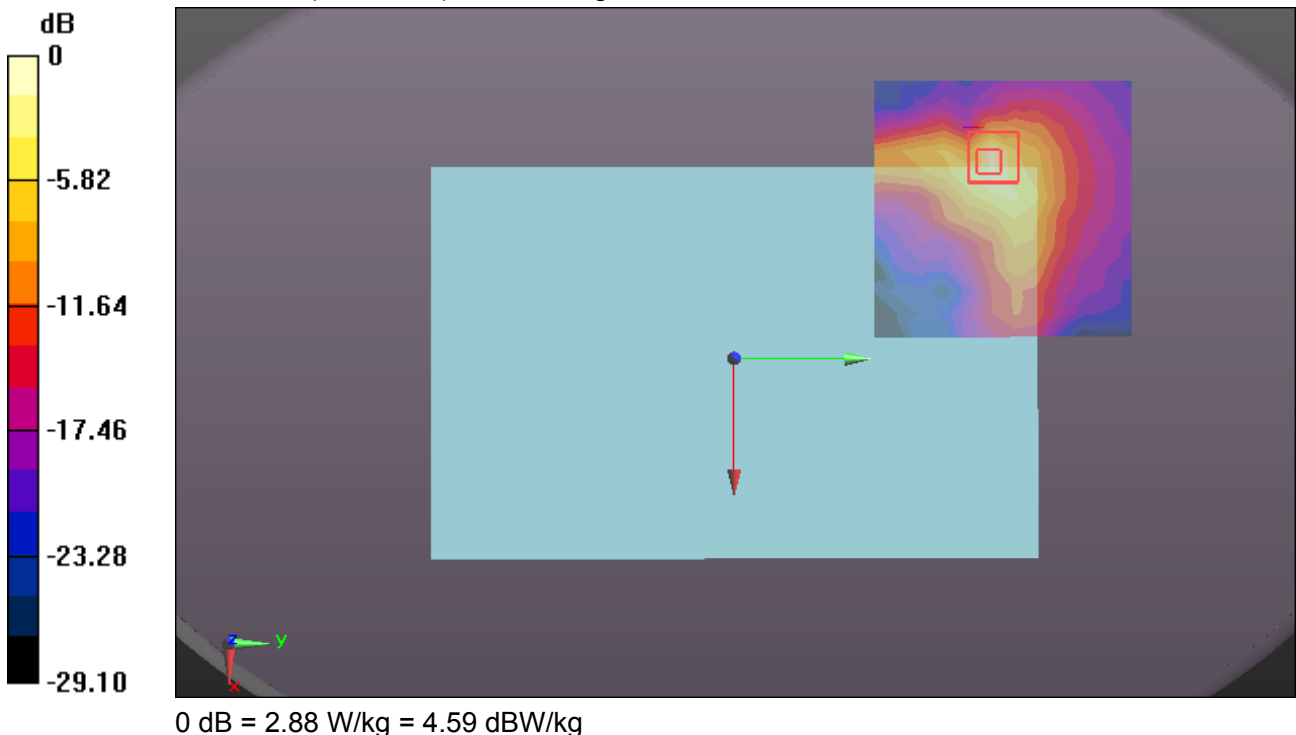

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40-Body Body Rear CH159 repeat

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band IV;
Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5795$ MHz; $\sigma = 6.18$ S/m; $\epsilon_r = 50.085$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.34, 4.34, 4.34); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH159 repeat/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.26 W/kg


WIFI/IEEE802.11n40 Body Rear CH159 repeat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.89 W/kg

SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 2.50 W/kg

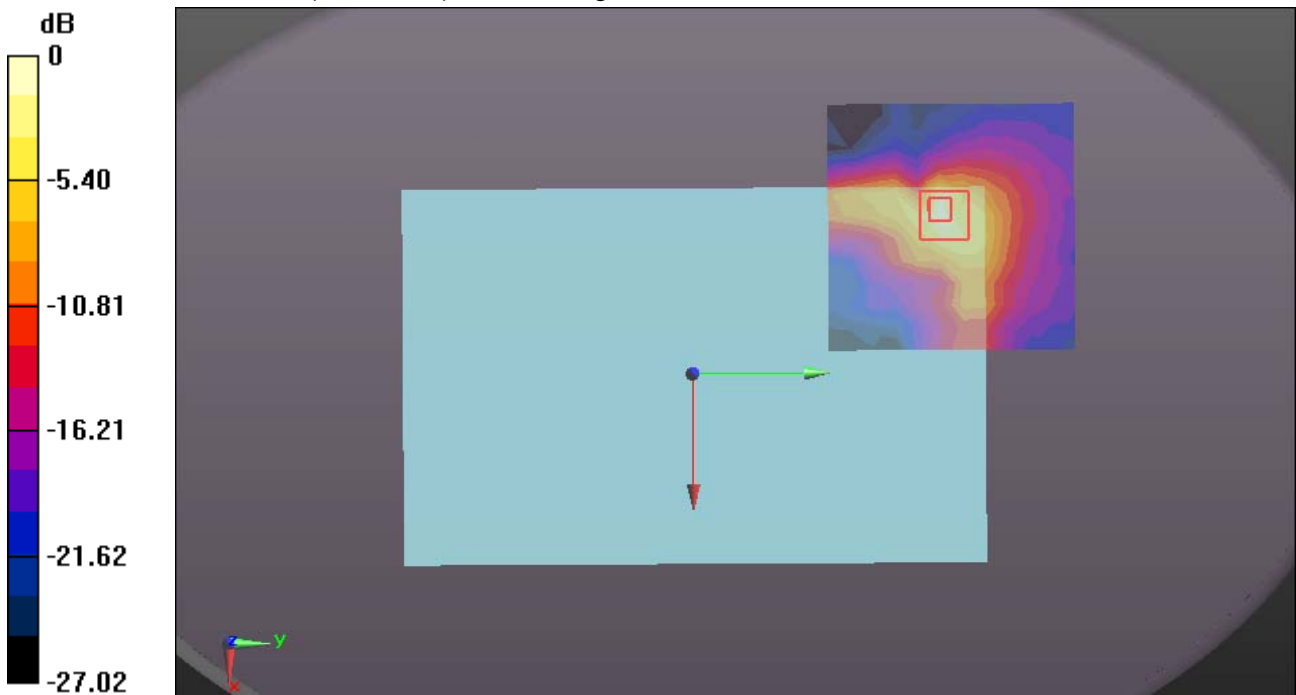

0 dB = 2.50 W/kg = 3.98 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/13/2017

WiFi 802.11b -Body Rear Middle CH6

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 51.722$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.07, 7.07, 7.07); Calibrated: 7/27/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Rear Middle CH6/Area Scan (11x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.781 W/kg


WiFi/Body Rear Middle CH6/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7192 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.890 W/kg

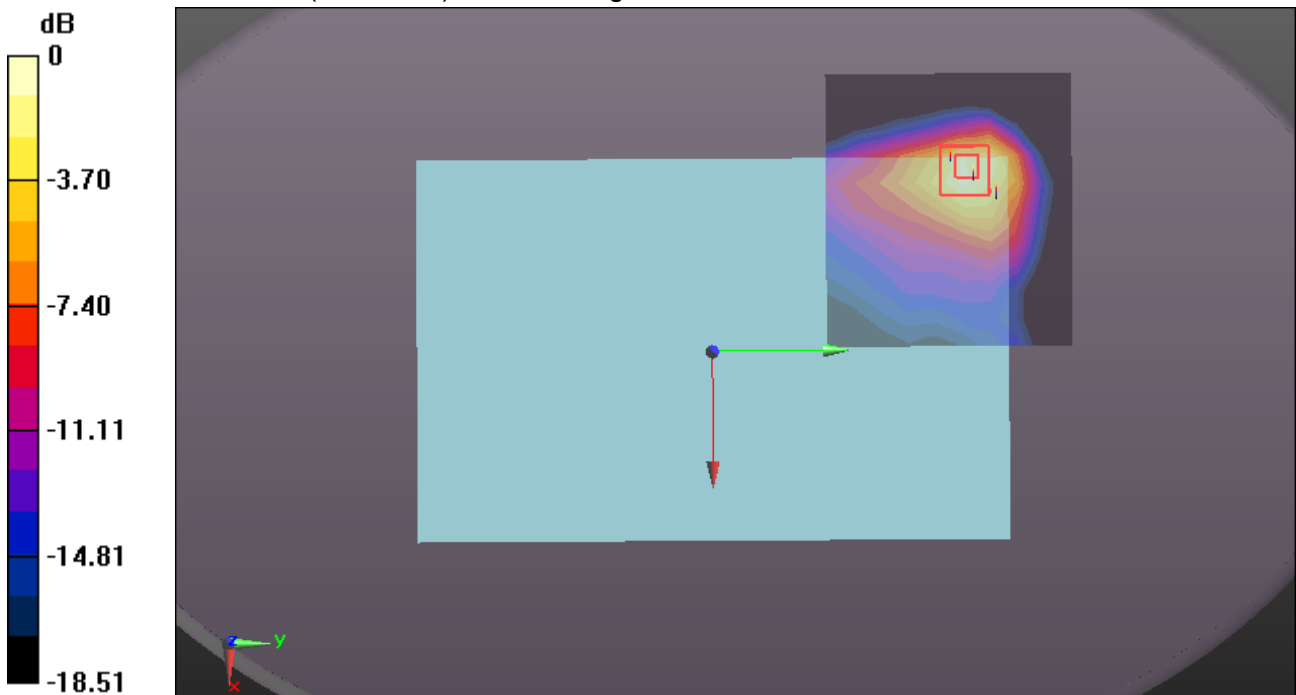

0 dB = 0.890 W/kg = -0.51 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/14/2017

WIFI 802.11n40-Body Rear CH110

DUT: Tablet Computer; Type: B3-A40FHD; Serial: N/A

Communication System: UID 0, IEEE802.11 n40 5G (0); Communication System Band: 5G Band III;
Frequency: 5550 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5550$ MHz; $\sigma = 5.746$ S/m; $\epsilon_r = 49.791$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.23, 4.23, 4.23); Calibrated: 7/27/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/26/2016
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/IEEE802.11n40 Body Rear CH110/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.01 W/kg


WIFI/IEEE802.11n40 Body Rear CH110/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9145 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 5.11 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

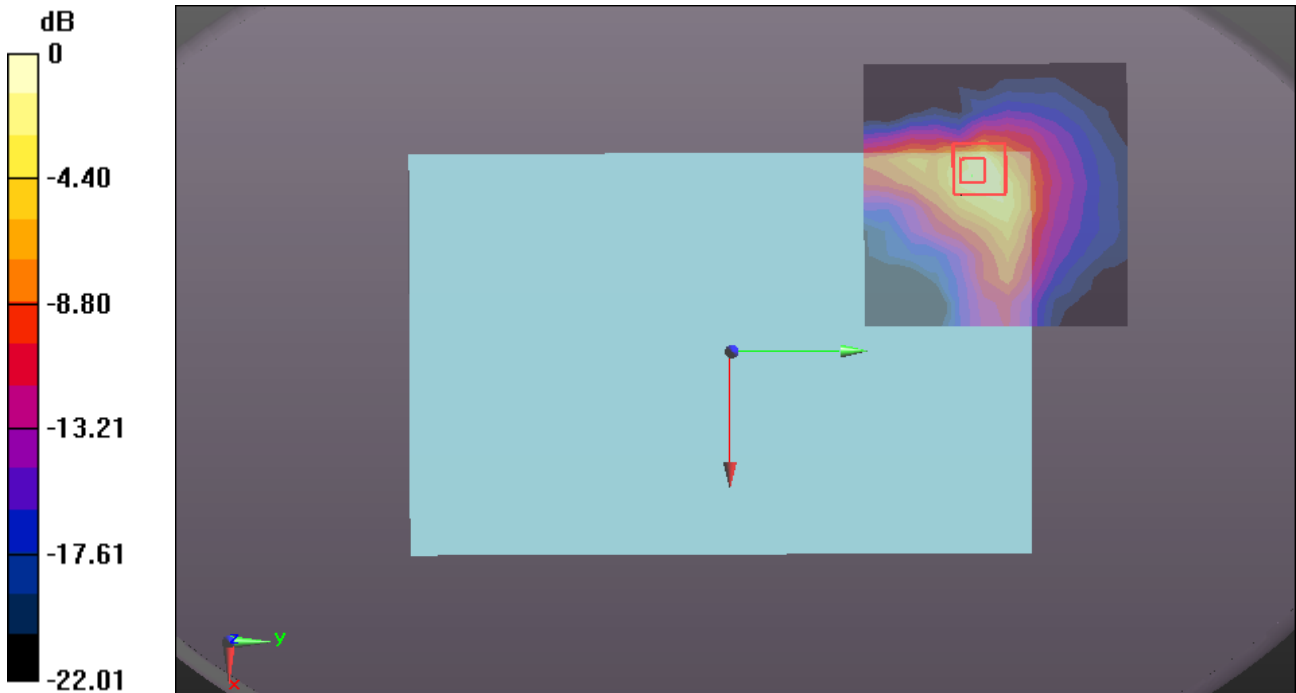

0 dB = 2.41 W/kg = 3.82 dBW/kg