



FCC 47 CFR PART 15 SUBPART C

for

Tablet Computer

Model: A8002

Marketing Name: B3-A50FHD

Brand: acer

Test Report Number:

C180326Z01-RP1-2

Issued for

Acer Incorporated

8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1, Mingkeda Logistics Park, No.18 Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: April 26, 2018



中国认可
国际互认
检测

TESTING

CNAS L4818



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test results in the report only apply to the tested sample.



Revision History

| Rev. | Issue Data | Revisions | Effect Page | Revised By |
|------|----------------|---------------|-------------|------------|
| 00 | April 26, 2018 | Initial Issue | ALL | Sinphy Xie |
| | | | | |
| | | | | |
| | | | | |



TABLE OF CONTENTS

1 TEST CERTIFICATION..... 4

2 TEST RESULT SUMMARY..... 5

3 EUT DESCRIPTION..... 6

4 TEST METHODOLOGY..... 8

4.1. DESCRIPTION OF TEST MODES..... 8

5 SETUP OF EQUIPMENT UNDER TEST..... 10

5.1. DESCRIPTION OF SUPPORT UNITS..... 10

5.2. CONFIGURATION OF SYSTEM UNDER TEST..... 10

6 FACILITIES AND ACCREDITATIONS..... 11

6.1. FACILITIES..... 11

6.2. ACCREDITATIONS..... 11

6.3. MEASUREMENT UNCERTAINTY..... 12

7 FCC PART 15.247 REQUIREMENTS..... 13

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT..... 13

7.2. SPURIOUS EMISSIONS MEASUREMENT..... 20

7.3. 6dB BANDWIDTH MEASUREMENT..... 38

7.4. ANTENNA GAIN..... 41

7.5. PEAK OUTPUT POWER..... 42

7.6. BAND EDGES MEASUREMENT..... 44

7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT..... 46



1 TEST CERTIFICATION

| | |
|-----------------------|--|
| Product | Tablet Computer |
| Model | A8002 |
| Marketing Name | B3-A50FHD |
| Brand | acer |
| Tested | March 26~April 26, 2018 |
| Applicant | Acer Incorporated 8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C |
| Manufacturer | Acer Incorporated 8F, 88, Sec 1, Xintai 5th Rd. Xizhi, New Taipei City 221 Taiwan, R.O.C |

APPLICABLE STANDARDS

| Standard | Test Type | Standard | Test Type |
|--------------|--------------------------------|------------------------------|---|
| 15.207(a) | Power Line Conducted Emissions | 15.247(d) 15.209(a) | <ul style="list-style-type: none"> ● Spurious Emissions ● Conducted Measurement ● Radiated Emissions |
| 15.247(a)(2) | 6dB Bandwidth Measurement | 15.247(b)(3) 15.247(b)(4) | Peak Power Measurement |
| 15.247(d) | Band Edges Measurement | 15.247(e) | Peak Power Spectral Density |

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Eve Wang
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Nancy Fu
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2 TEST RESULT SUMMARY

| APPLICABLE STANDARDS | | | |
|------------------------------|---|--------|--------------------------------|
| Standard | Test Type | Result | Remark |
| 15.247(a)(2) | 6dB Bandwidth Measurement | Pass | Meet the requirement of limit. |
| 15.247(b)(3) 15.247(b)(4) | Peak Power Measurement | Pass | Meet the requirement of limit. |
| 15.247(d) | Band Edges Measurement | Pass | Meet the requirement of limit. |
| 15.247(e) | Peak Power Spectral Density | Pass | Meet the requirement of limit. |
| 15.247(d) 15.209(a) | <ul style="list-style-type: none">● Spurious Emissions● Conducted Measurement● Radiated Emissions | Pass | Meet the requirement of limit. |
| 15.207(a) | Power line Conducted Emissions | Pass | Meet the requirement of limit. |

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

| | |
|---|---|
| Product | Tablet Computer |
| Model | A8002 |
| Marketing Name | B3-A50FHD |
| Brand | acer |
| Model Discrepancy | N/A |
| Identify Number | C180326Z01-RP1-2 |
| Received Date | March 26, 2018 |
| Power Supply | DC5.35V or DC5.2V supplied by the adapter or DC3.7V supplied by the battery |
| Adapter Specification | Adapter 1: DELTA ELECTRONICS, INC. MODEL: ADP-10HW A INPUT: 100-240Vac 0.4A 50/60Hz OUTPUT: 5.35Vdc 2A Adapter 2: LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD. MODEL: PA-1100-25 INPUT: 100-240Vac 0.3A 50/60Hz OUTPUT: 5.2Vdc 2.0A |
| Rechargeable Li-ion Polymer Battery Pack Specification | Battery 1: TCL Hyperpower Batteries Inc. Model: PR-279594N(1ICP3/95/94-2) Rating: 3.7V Charge Limited Voltage: 4.2V Rated Capacity: 6000mAh Rated Power: 22.2Wh Battery 2: Huizhou Highpower Technology Co.,LTD Model: HPP279594AB(1ICP3/95/94-2) Rating: 3.7V Charge Limited Voltage: 4.2V Rated Capacity/ Rated Power: Nominal 6100mAh/22.57Wh Minimum 6000mAh/22.20Wh |



| | |
|------------------------------|--|
| USB-Micro USB cable | Cable 1: Baisitai Unshielded, 0.80m Cable 2: Haoxin Unshielded, 0.80m |
| Frequency Range | 2402MHz ~2480MHz |
| Transmit Power | 3.69dBm |
| Modulation Technique | GFSK for 1Mbps |
| Number of Channels | 40 Channels |
| Antenna Specification | FPC antenna with 1.24dBi gain(Max.) |
| Temperature Range | 0°C ~ +35°C |
| Hardware Version | A10H3_MB_V1.2 |
| Software Version | Acer_AV000_B3-A50FHD_RV00RB00_WW_GEN1 |

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID:HLZA8002 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Used the “EngineerMode” software to control the EUT for staying in continuous transmitting and receiving mode is programmed.

| Test Item | Test mode | Worse mode |
|---|---|-------------------------------------|
| All test modes are tested in the following test environments [WiFi worst(2.4G/5G) Link +BT Link +GPS/Glonass Link] | | |
| Conducted Emission | Mode 1: Charge(Adapter 1+Cable 1+Battery 1)+Play Video (USB2.0)(AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 2: Charge(Adapter 1+Cable 2+Battery 1)+Play Video (USB2.0) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 3: Charge(Adapter 2+Cable 1+Battery 1)+Play Video(USB2.0)(AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 4: Charge(Adapter 2+Cable 2+Battery 1)+Play Video(USB2.0)(AC120V/60Hz) | <input checked="" type="checkbox"/> |
| | Mode 5: Charge(Adapter 1+Cable 1+Battery 1)+ Record Video(TF Card) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 6: Charge(Adapter 1+Cable 2+Battery 1)+ Record Video(TF Card) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 7: Charge(Adapter 2+Cable 1+Battery 1)+Record Video (TF Card) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 8: Charge(Adapter 2+Cable 2+Battery 1)+Record Video (TF Card) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 9: Charge(Adapter 1+Cable 1+Battery 2)+Play Video(USB2.0) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 10: Charge(Adapter 1+Cable 2+Battery 2)+Play Video(USB2.0) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 11: Charge(Adapter 2+Cable 1+Battery 2)+Play Video(USB2.0)(AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 12: Charge(Adapter 2+Cable 2+Battery 2)+Play Video(USB2.0)(AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 13: Charge(Adapter 1+Cable 1+Battery 2)+Record Video(TF Card) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 14: Charge(Adapter 1+Cable 2+Battery 2)+Record Video(TF Card) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 15: Charge(Adapter 2+Cable 1+ Battery 2)+ Record Video (TF Card) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 16: Charge(Adapter 2+Cable 2+ Battery 2)+ Record Video (TF Card) (AC120V/60Hz) | <input type="checkbox"/> |
| | Mode 17: Charge(Adapter 1+Cable 1+Battery 1)+Play Video (USB2.0)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 18: Charge(Adapter 1+Cable 2+Battery 1)+Play Video (USB2.0) (AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 19: Charge(Adapter 2+Cable 1+Battery 1)+Play Video(USB2.0)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 20: Charge(Adapter 2+Cable 2+Battery 1)+Play Video(USB2.0)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 21: Charge(Adapter 1+Cable 1+Battery 1)+ Record Video(TF Card)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 22: Charge(Adapter 1+Cable 2+Battery 1)+ Record Video(TF Card)(AC240V/50Hz) | <input checked="" type="checkbox"/> |
| | Mode 23: Charge(Adapter 2+Cable 1+Battery 1)+Record Video (TF Card)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 24: Charge(Adapter 2+Cable 2+Battery 1)+Record Video (TF Card)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 25: Charge(Adapter 1+Cable 1+Battery 2)+Play Video(USB2.0) (AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 26: Charge(Adapter 1+Cable 2+Battery 2)+Play Video(USB2.0) (AC240V/50Hz) | <input type="checkbox"/> |



| | | |
|--------------------|--|-------------------------------------|
| Conducted Emission | Mode 27: Charge(Adapter 2+Cable 1+Battery 2)+Play Video(USB2.0)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 28: Charge(Adapter 2+Cable 2+Battery 2)+Play Video(USB2.0)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 29: Charge(Adapter 1+Cable 1+Battery 2)+Record Video(TF Card)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 30: Charge(Adapter 1+Cable 2+Battery 2)+Record Video(TF Card)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 31: Charge(Adapter 2+Cable 1+ Battery 2)+ Record Video (TF Card)(AC240V/50Hz) | <input type="checkbox"/> |
| | Mode 32: Charge(Adapter 2+Cable 2+ Battery 2)+ Record Video (TF Card)(AC240V/50Hz) | <input type="checkbox"/> |
| Radiated Emission | Mode 1: Continuously Transmitting | <input checked="" type="checkbox"/> |

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No | Equipment | Model | Serial No. | FCC ID | Brand | Data Cable | Power Cord |
|----|-----------|-------------|------------|--------|---------|---------------------|--|
| 1 | TF Card | MB-MP 16DA | N/A | N/A | SAMSUNG | N/A | N/A |
| 2 | Earphone | G-3 | N/A | DoC | GSG | Unshielded 1.00m | N/A |
| 3 | Notebook | Thinkpad S2 | SL10K92342 | DoC | LENOVO | N/A | Unshielded 1.00m (AC cable) Shielded 1.80m (DC cable) |

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No. 10-1, Mingkeda Logistics Park, No.18 Huanguan South RD. Guan Lan Town, Baoan District, Shenzhen China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

| | |
|--------------|-------------|
| USA | A2LA |
| China | CNAS |

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

| | |
|---------------|--|
| USA | FCC |
| Japan | VCCI(C-4815, R-4320, T-2317, G-10624) |
| Canada | INDUSTRY CANADA |

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>



6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Parameter | Uncertainty |
|--|-------------|
| Radiated Emission, 30 to 200 MHz Test Site : 966(2) | +/-3.6880dB |
| Radiated Emission, 200 to 1000 MHz Test Site : 966(2) | +/-3.6695dB |
| Radiated Emission, 1 to 8 GHz | +/-5.1782dB |
| Radiated Emission, 8 to 18 GHz | +/-5.2173dB |
| Conducted Emissions | +/-3.6836dB |
| Band Width | 178kHz |
| Peak Output Power MU | +/-1.906dB |
| Band Edge MU | +/-0.182dB |
| Channel Separation MU | 416.178Hz |
| Duty Cycle MU | 0.054ms |
| Frequency Stability MU | 226Hz |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

| Conducted Emission Test Site | | | | | |
|------------------------------|---------------|--------------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| EMI TEST RECEIVER | ROHDE&SCHWARZ | ESCI | 100783 | 01/27/2018 | 01/26/2019 |
| LISN(EUT) | ROHDE&SCHWARZ | ENV216 | 101543-WX | 01/27/2018 | 01/26/2019 |
| LISN | EMCO | 3825/2 | 8901-1459 | 01/27/2018 | 01/26/2019 |
| Temp. / Humidity Meter | VICTOR | HTC-1 | N/A | 01/29/2018 | 01/28/2019 |
| Test S/W | FARAD | EZ-EMC/ CCS-3A1-CE | | | |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.




7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

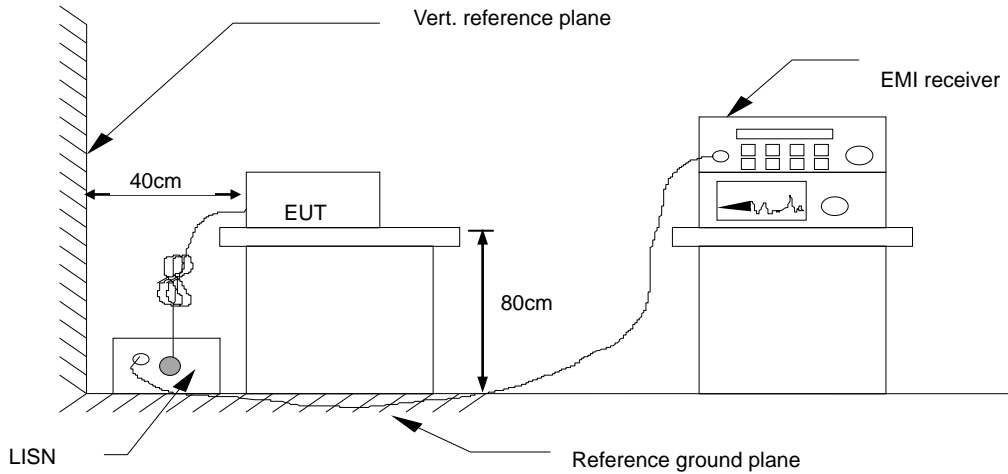

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| X.XXXX | 34.99 | 19.33 | 10.15 | 45.14 | 29.48 | 65.99 | 56.00 | -20.85 | -26.52 | Pass |


- Factor = Insertion loss of LISN + Cable Loss
- Result = Quasi-peak Reading/ Average Reading + Factor
- Limit = Limit stated in standard
- Margin = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

Test Data

| | | | |
|---------------------------------|---------------|------------------|--------|
| Model No. | A8002 | RBW,VBW | 9 kHz |
| Environmental Conditions | 22°C, 45% RH | Test Mode | Mode 4 |
| Tested by | Eason Nie | Line | L1 |
| Test Date | April 3, 2018 | | |

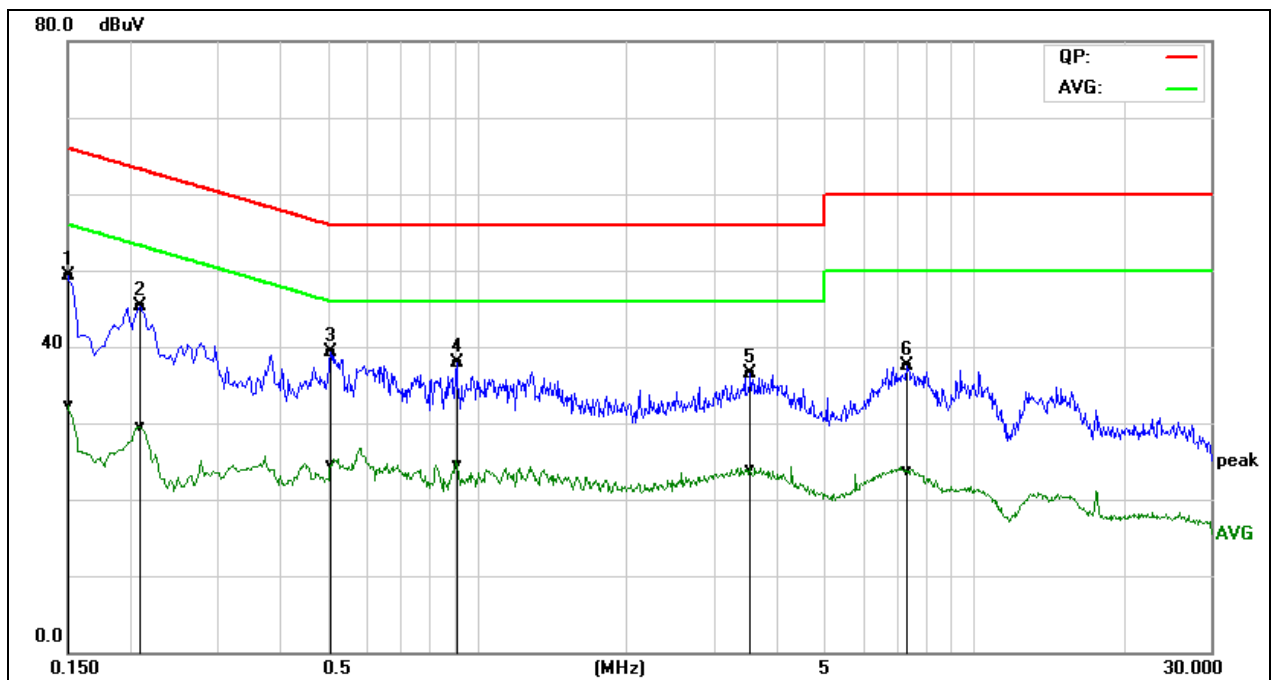


| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1500 | 29.60 | 12.73 | 19.62 | 49.22 | 32.35 | 65.99 | 56.00 | -16.77 | -23.65 | Pass |
| 0.2100 | 25.63 | 9.81 | 19.64 | 45.27 | 29.45 | 63.20 | 53.21 | -17.93 | -23.76 | Pass |
| 0.5100 | 19.68 | 4.91 | 19.53 | 39.21 | 24.44 | 56.00 | 46.00 | -16.79 | -21.56 | Pass |
| 0.9100 | 18.27 | 4.94 | 19.57 | 37.84 | 24.51 | 56.00 | 46.00 | -18.16 | -21.49 | Pass |
| 3.5620 | 16.73 | 4.14 | 19.73 | 36.46 | 23.87 | 56.00 | 46.00 | -19.54 | -22.13 | Pass |
| 7.3580 | 17.59 | 3.79 | 19.87 | 37.46 | 23.66 | 60.00 | 50.00 | -22.54 | -26.34 | Pass |

REMARKS: L1 = Line One (Live Line)



| | | | |
|---------------------------------|---------------|------------------|--------|
| Model No. | A8002 | RBW,VBW | 9 kHz |
| Environmental Conditions | 22°C, 45% RH | Test Mode | Mode 4 |
| Tested by | Eason Nie | Line | L2 |
| Test Date | April 3, 2018 | | |

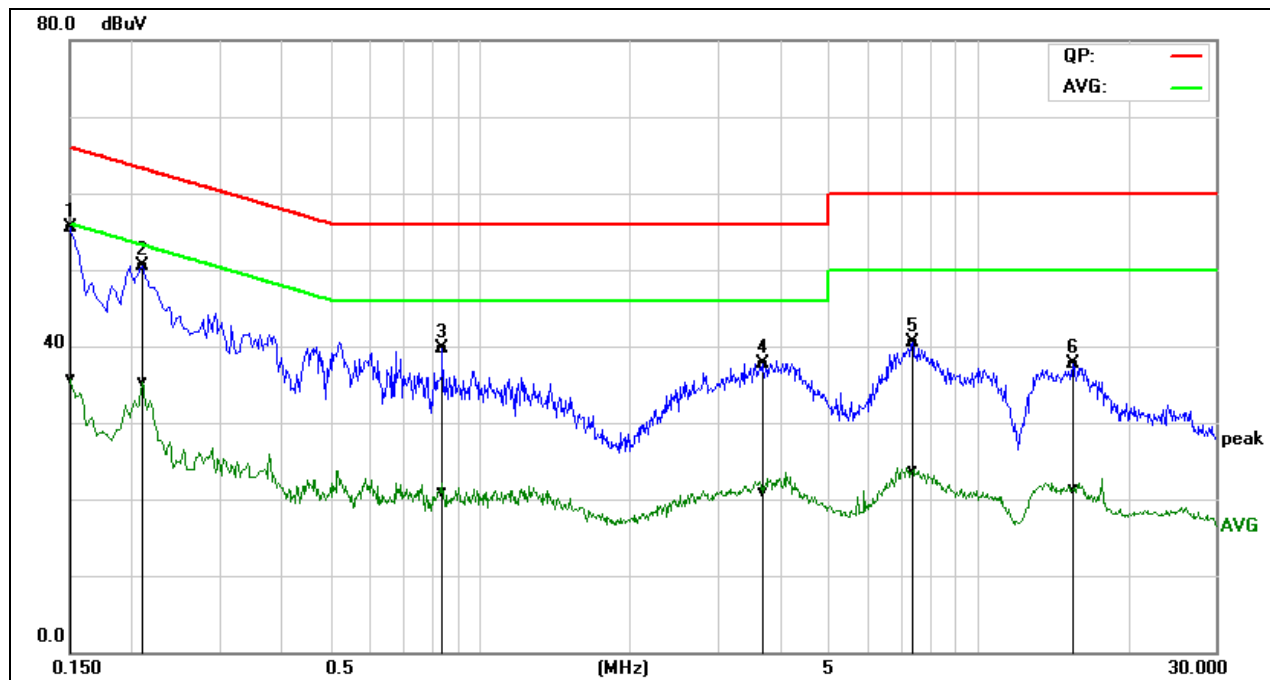


| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1500 | 36.03 | 16.17 | 19.52 | 55.55 | 35.69 | 65.99 | 56.00 | -10.44 | -20.31 | Pass |
| 0.2100 | 31.04 | 15.76 | 19.54 | 50.58 | 35.30 | 63.20 | 53.21 | -12.62 | -17.91 | Pass |
| 0.8420 | 20.17 | 1.41 | 19.58 | 39.75 | 20.99 | 56.00 | 46.00 | -16.25 | -25.01 | Pass |
| 3.6980 | 17.99 | 1.04 | 19.79 | 37.78 | 20.83 | 56.00 | 46.00 | -18.22 | -25.17 | Pass |
| 7.4020 | 20.57 | 3.89 | 19.87 | 40.44 | 23.76 | 60.00 | 50.00 | -19.56 | -26.24 | Pass |
| 15.4900 | 17.60 | 1.33 | 20.03 | 37.63 | 21.36 | 60.00 | 50.00 | -22.37 | -28.64 | Pass |

REMARKS: L2 = Line Two (Neutral Line)



| | | | |
|---------------------------------|---------------|---------------------|--------------|
| Model No. | A8002 | RBW,VBW | 9 kHz |
| Environmental Conditions | 22°C, 45% RH | Test Mode | Mode 22 |
| Tested by | Eason Nie | Line | L1 |
| Test Date | April 3, 2018 | Test Voltage | AC 240V/50Hz |

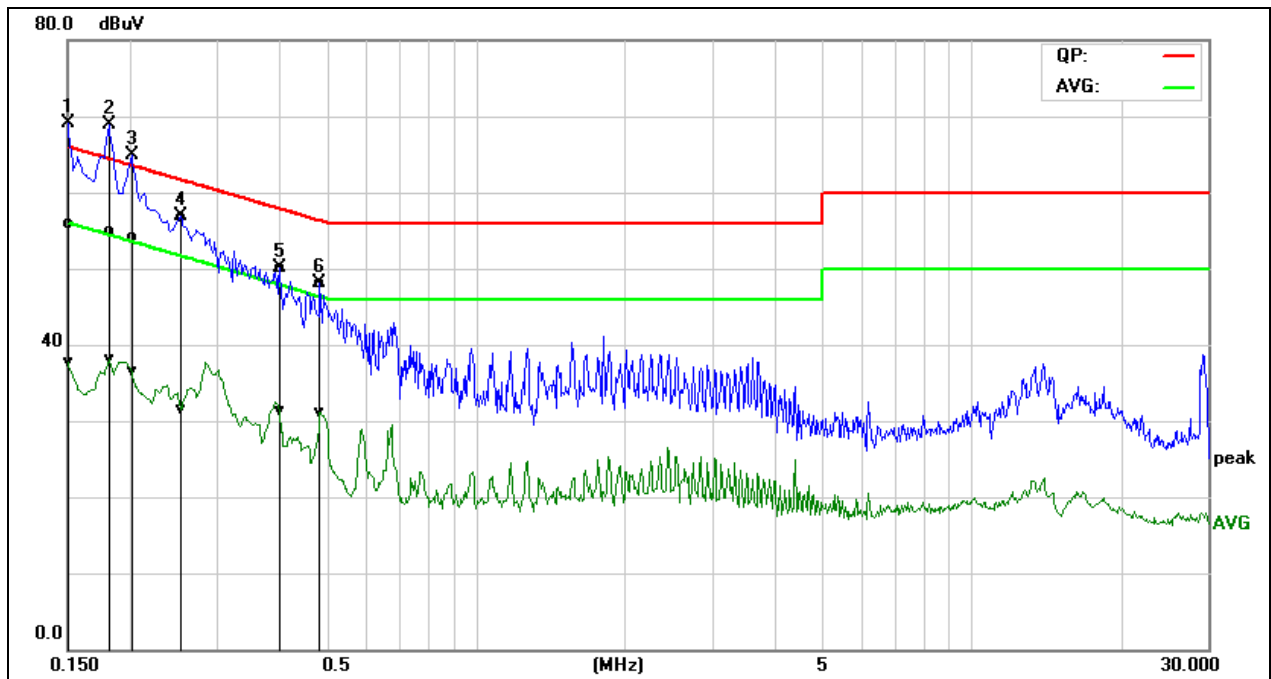


| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1500 | 36.28 | 18.12 | 19.62 | 55.90 | 37.74 | 65.99 | 56.00 | -10.09 | -18.26 | Pass |
| 0.1819 | 35.27 | 18.48 | 19.63 | 54.90 | 38.11 | 64.39 | 54.40 | -9.49 | -16.29 | Pass |
| 0.2020 | 34.46 | 16.79 | 19.64 | 54.10 | 36.43 | 63.52 | 53.53 | -9.42 | -17.10 | Pass |
| 0.2540 | 37.18 | 11.85 | 19.62 | 56.80 | 31.47 | 61.62 | 51.63 | -4.82 | -20.16 | Pass |
| 0.4020 | 30.54 | 11.83 | 19.56 | 50.10 | 31.39 | 57.81 | 47.81 | -7.71 | -16.42 | Pass |
| 0.4860 | 28.54 | 11.59 | 19.53 | 48.07 | 31.12 | 56.24 | 46.24 | -8.17 | -15.12 | Pass |

REMARKS: L1 = Line One (Live Line)



| | | | |
|---------------------------------|---------------|---------------------|--------------|
| Model No. | A8002 | RBW,VBW | 9 kHz |
| Environmental Conditions | 22°C, 45% RH | Test Mode | Mode 22 |
| Tested by | Eason Nie | Line | L2 |
| Test Date | April 3, 2018 | Test Voltage | AC 240V/50Hz |

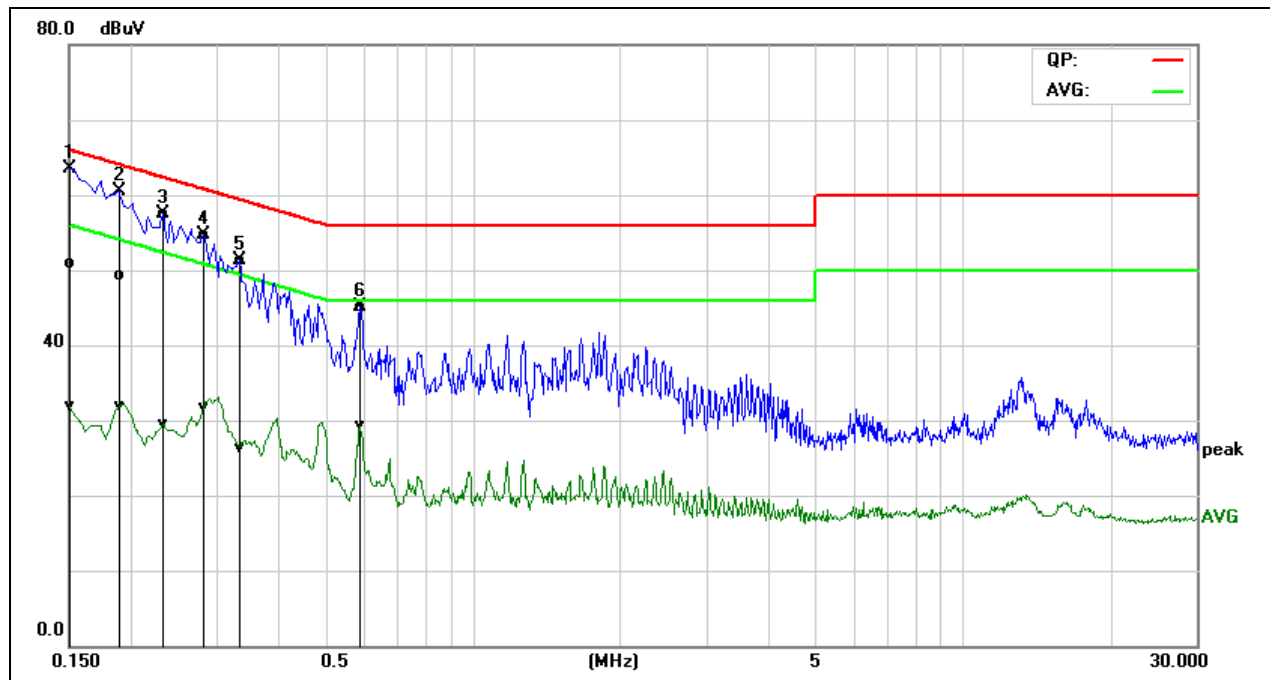

| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1500 | 31.48 | 12.45 | 19.52 | 51.00 | 31.97 | 65.99 | 56.00 | -14.99 | -24.03 | Pass |
| 0.1900 | 29.76 | 12.33 | 19.54 | 49.30 | 31.87 | 64.03 | 54.04 | -14.73 | -22.17 | Pass |
| 0.2340 | 37.96 | 9.97 | 19.54 | 57.50 | 29.51 | 62.30 | 52.31 | -4.80 | -22.80 | Pass |
| 0.2819 | 35.26 | 12.22 | 19.54 | 54.80 | 31.76 | 60.76 | 50.76 | -5.96 | -19.00 | Pass |
| 0.3339 | 31.73 | 6.86 | 19.54 | 51.27 | 26.40 | 59.35 | 49.35 | -8.08 | -22.95 | Pass |
| 0.5899 | 25.59 | 9.70 | 19.57 | 45.16 | 29.27 | 56.00 | 46.00 | -10.84 | -16.73 | Pass |

REMARKS: L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. CONDUCTED EMISSIONS MEASUREMENT

7.2.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.1.2. TEST INSTRUMENTS

| Name of Equipment | Manufacturer | Model | Serial Number | Last Calibration | Due Calibration |
|-------------------|--------------|--------|---------------|------------------|-----------------|
| Spectrum Analyzer | Agilent | N9010A | MY55370330 | 01/27/2018 | 01/26/2019 |

7.2.1.3. TEST PROCEDURE (please refer to measurement standard)



Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site. The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


Measurements are made over the 9kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.



7.2.1.4. TEST RESULTS


Test Plot

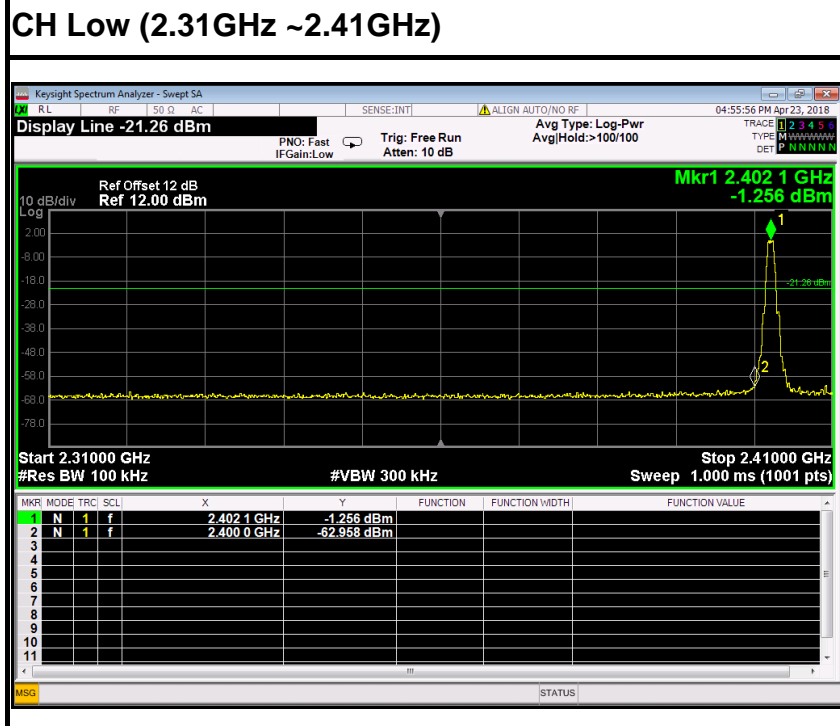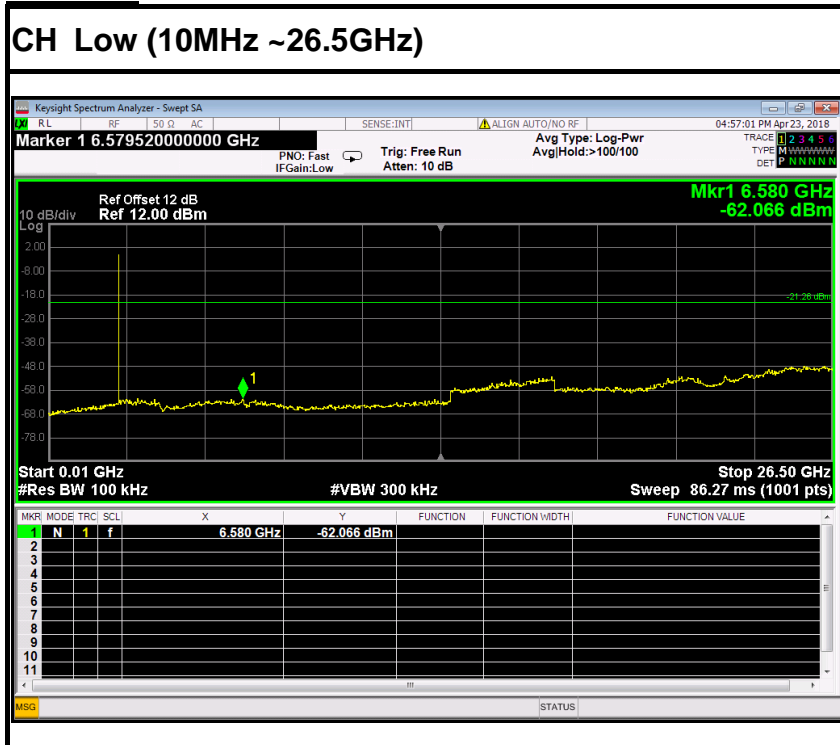

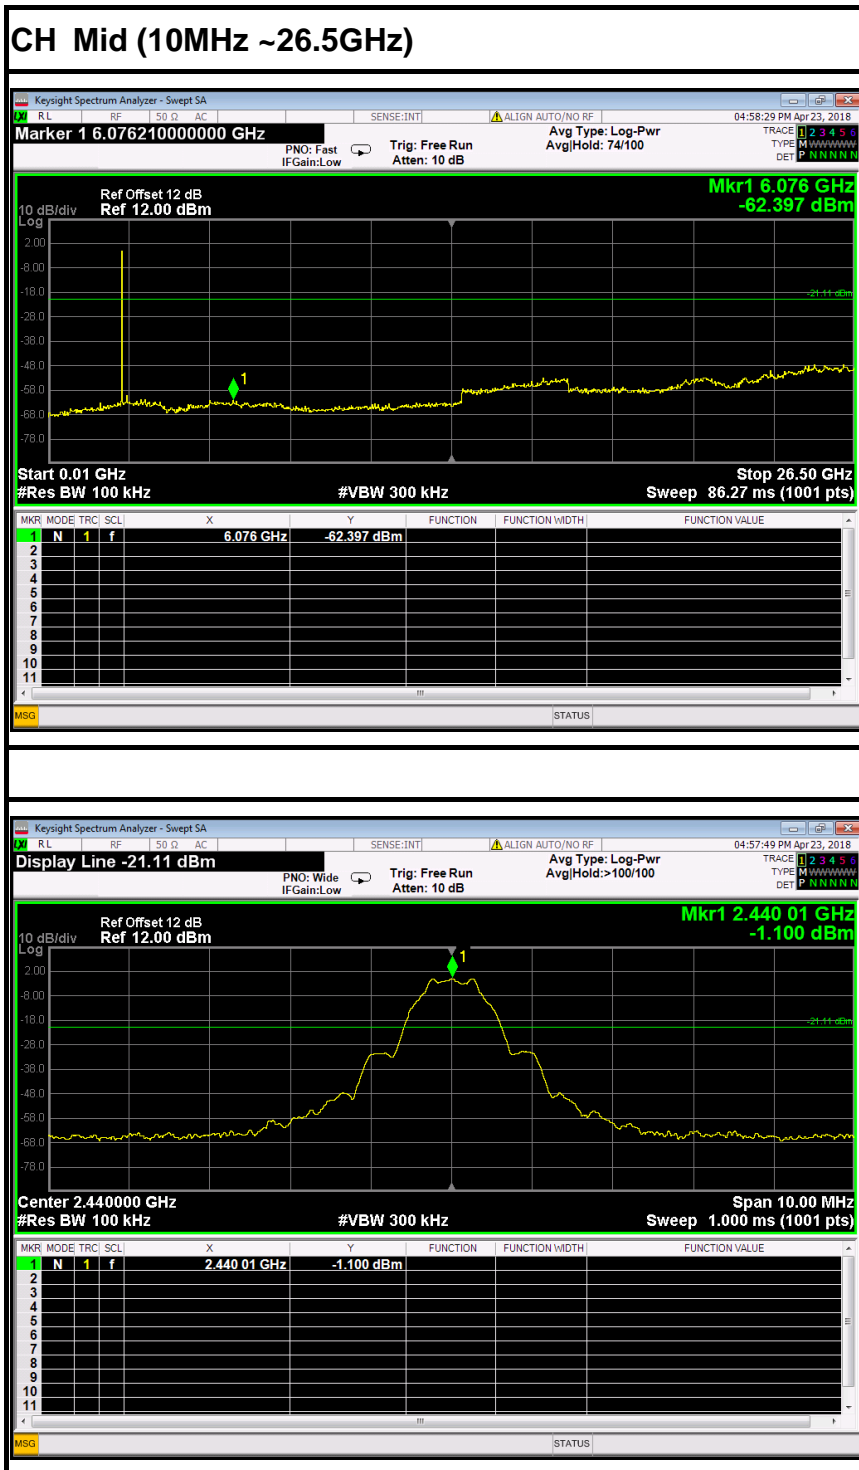




CH High (10MHz ~26.5GHz)

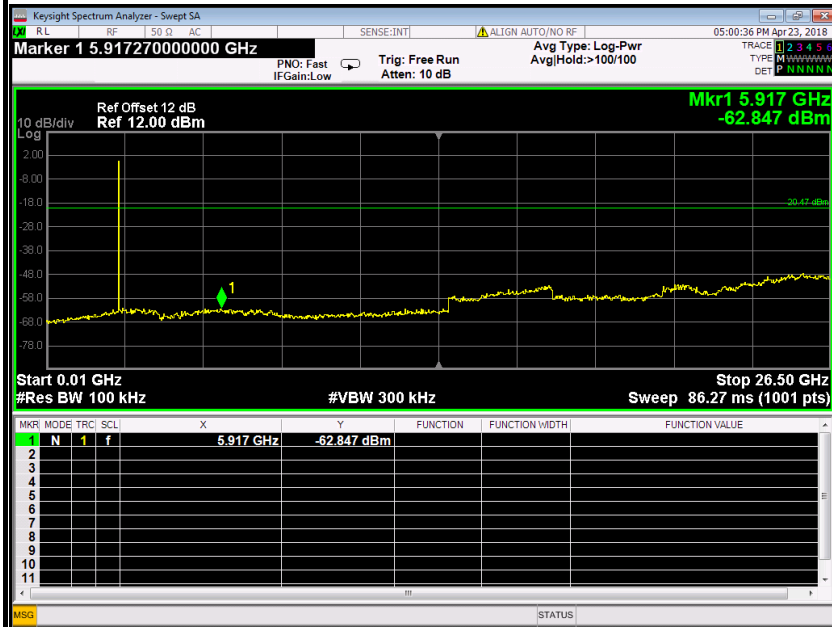

CH High(2.475GHz ~2.5GHz)

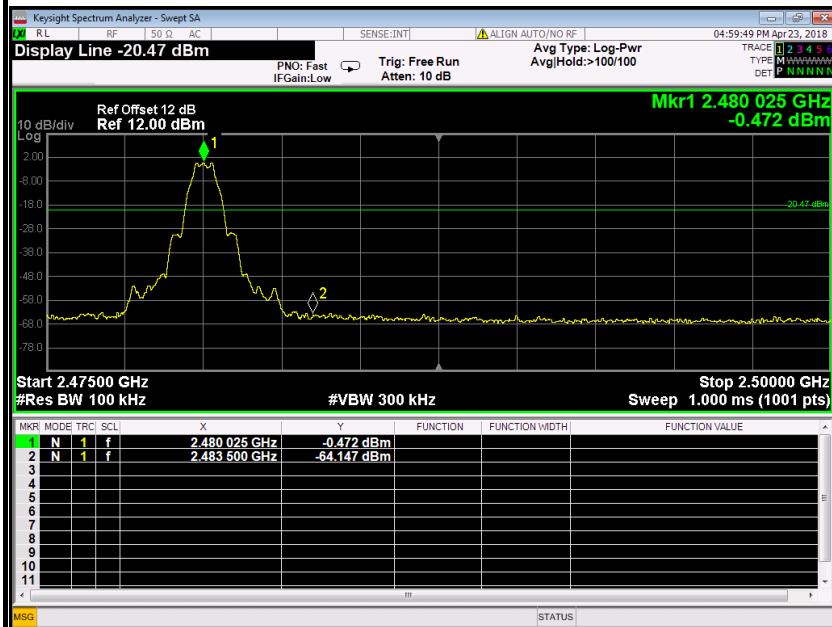



7.2.2. RADIATED EMISSIONS MEASUREMENT

7.2.2.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (mV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

| Frequency (MHz) | Field Strength ($\mu\text{V/m}$ at 3-meter) | Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter) |
|-----------------|--|---|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$).

**7.2.2.2. TEST INSTRUMENTS**

| Radiated Emission Test Site 966 (2) | | | | | |
|-------------------------------------|----------------|--------------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| PSA Series Spectrum Analyzer | Agilent | N9010A | MY52221469 | 01/27/2018 | 01/26/2019 |
| EMI TEST RECEIVER | ROHDE&SCHWARZ | ESCI | 100783 | 02/21/2018 | 02/20/2019 |
| Amplifier | EMEC | EM330 | 060661 | 03/18/2018 | 03/17/2019 |
| High Noise Amplifier | Agilent | 8449B | 3008A01838 | 02/21/2018 | 02/20/2019 |
| Loop Antenna | COM-POWER | AL-130 | 121044 | 09/25/2017 | 09/24/2018 |
| Bilog Antenna | SCHAFFNER | CBL6143 | 5082 | 02/21/2018 | 02/20/2019 |
| Horn Antenna | SCHWARZBECK | BBHA9120 | D286 | 02/27/2018 | 02/27/2019 |
| Board-Band Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-497 | 02/27/2018 | 02/27/2019 |
| Turn Table | N/A | N/A | N/A | N.C.R | N.C.R |
| Antenna Tower | SUNOL | TLT2 | N/A | N.C.R | N.C.R |
| Controller | Sunol Sciences | SC104V | 022310-1 | N.C.R | N.C.R |
| Controller | CT | N/A | N/A | N.C.R | N.C.R |
| Temp. / Humidity Meter | Anymetre | JR913 | N/A | 01/29/2018 | 01/28/2019 |
| Test S/W | FARAD | LZ-RF / CCS-SZ-3A2 | | | |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 101879.
3. N.C.R = No Calibration Required.



7.2.2.3. Measuring Instruments and Setting

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/ T for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/ T for Average |

| Receiver Parameter | Setting |
|------------------------|-----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP |

7.2.2.4. TEST PROCEDURE (please refer to measurement standard)

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the



maximum of all emissions

Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

Pre measurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:


--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.




7.2.2.5. TEST SETUP

Below 30MHz

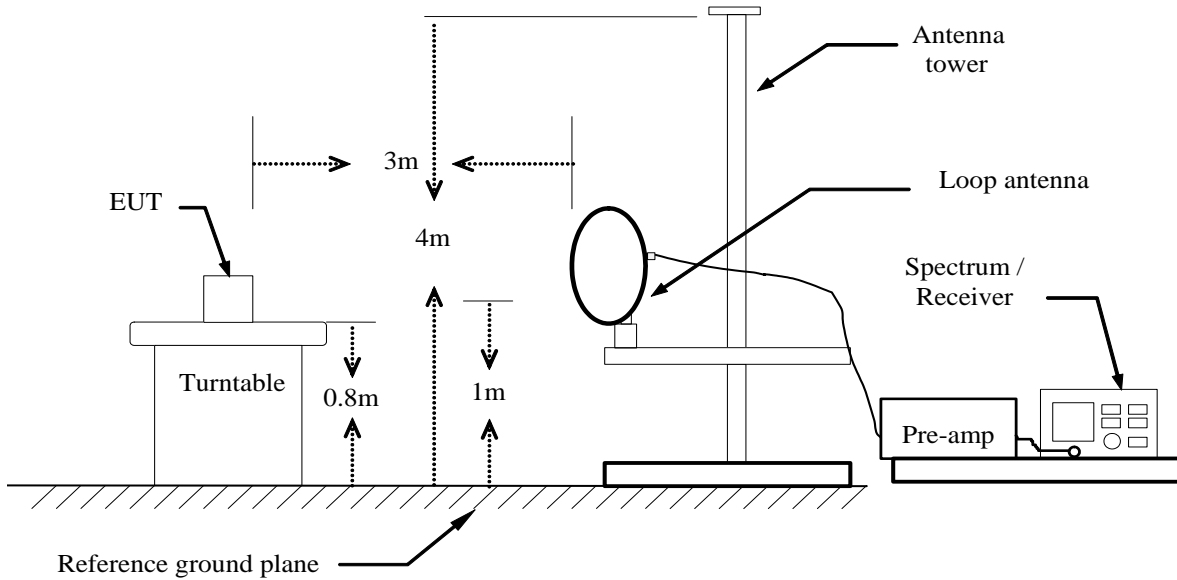


Below 1 GHz

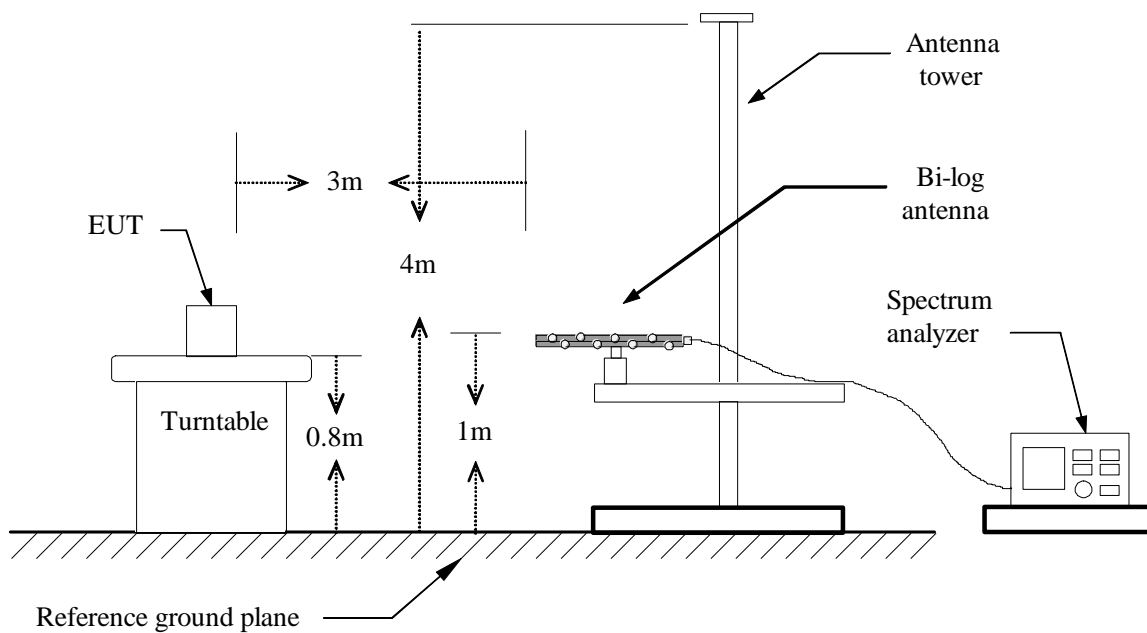



Above 1 GHz

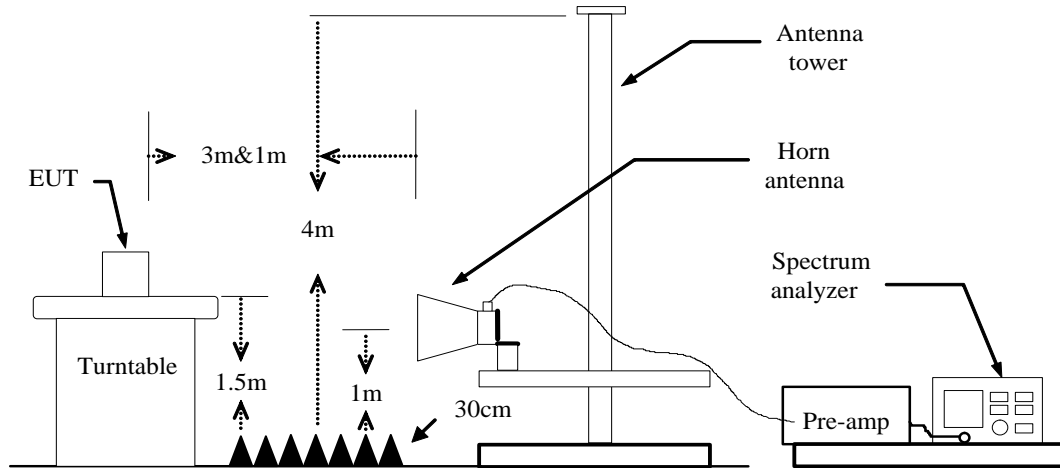

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.2.2.6. DATA SAMPLE

Below 1GHz

| Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------------------|--------|
| XXX.XXXX | 53.41 | -18.63 | 34.78 | 43.50 | -8.72 | V | QP |

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-peak Reading

Above 1GHz

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| XXXX.XXXX | 62.09 | -11.42 | 50.67 | 74.00 | -23.33 | V | Peak |
| XXXX.XXXX | 49.78 | -11.42 | 38.36 | 54.00 | -15.64 | V | AVG |

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Peak = Peak Reading
 AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)
 Result (dBuV/m) = Reading (dBuV) + Correction Factor



7.2.2.7. TEST RESULTS

Below 1 GHz

Test Mode: TX

Tested by: Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH

Date: April 11, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 46.4900 | 56.26 | -19.52 | 36.74 | 40.00 | -3.26 | V | QP |
| 196.8400 | 47.77 | -22.77 | 25.00 | 43.50 | -18.50 | V | QP |
| 416.0600 | 40.64 | -15.49 | 25.15 | 46.00 | -20.85 | V | QP |
| 460.6800 | 45.89 | -15.15 | 30.74 | 46.00 | -15.26 | V | QP |
| 593.5700 | 32.38 | -12.98 | 19.40 | 46.00 | -26.60 | V | QP |
| 789.5100 | 29.55 | -11.17 | 18.38 | 46.00 | -27.62 | V | QP |
| 129.9100 | 44.22 | -20.75 | 23.47 | 43.50 | -20.03 | H | QP |
| 181.3200 | 51.31 | -22.94 | 28.37 | 43.50 | -15.13 | H | QP |
| 275.4100 | 34.22 | -20.44 | 13.78 | 46.00 | -32.22 | H | QP |
| 352.0400 | 29.47 | -17.61 | 11.86 | 46.00 | -34.14 | H | QP |
| 416.0600 | 32.97 | -15.49 | 17.48 | 46.00 | -28.52 | H | QP |
| 611.0300 | 28.24 | -12.64 | 15.60 | 46.00 | -30.40 | H | QP |

Notes:


1. No emission found between lowest internal used/generated frequency to 30MHz.
2. Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel))

Remark:


1. Radiated emissions measured in frequency range from 9 kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.
4. Frequency (MHz). = Emission frequency in MHz
 Reading (dBuV/m) = Receiver reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Measured (dBuV/m) – Limits (dBuV/m)
 Antenna Pole (H/V) = Current carrying line of reading



Vertical

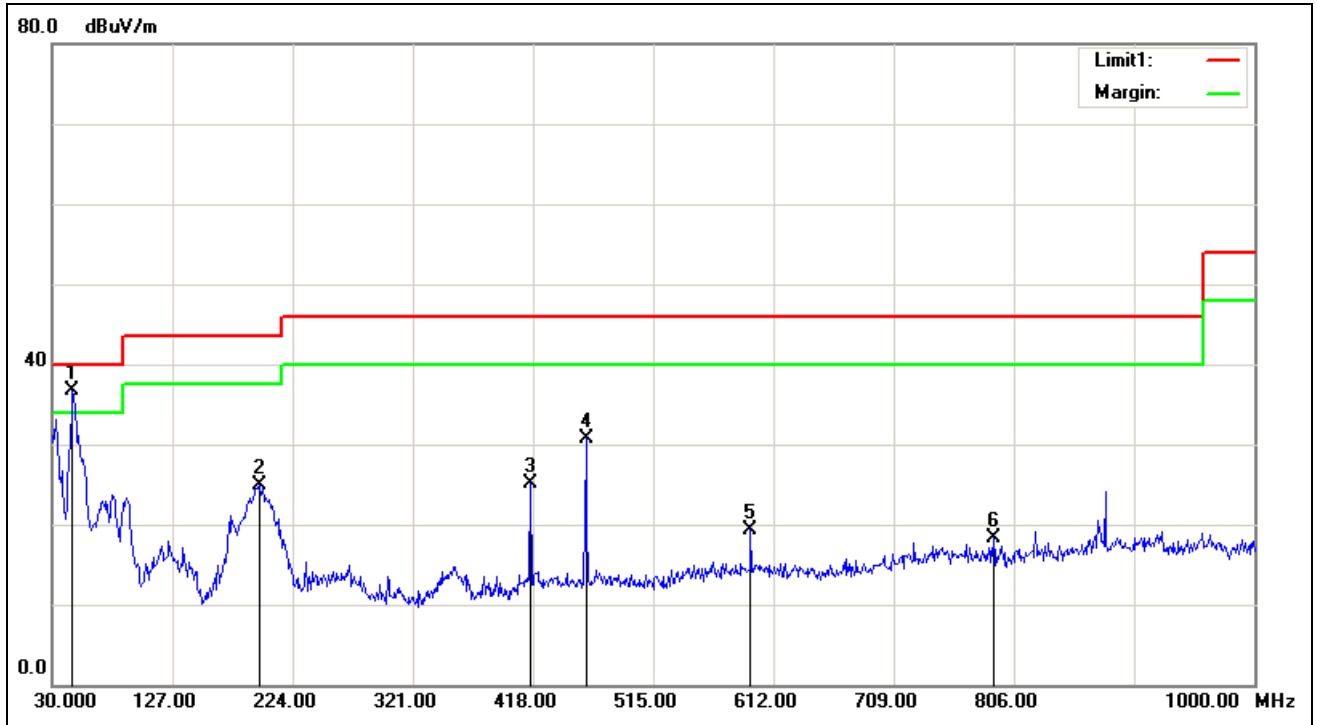

Horizontal

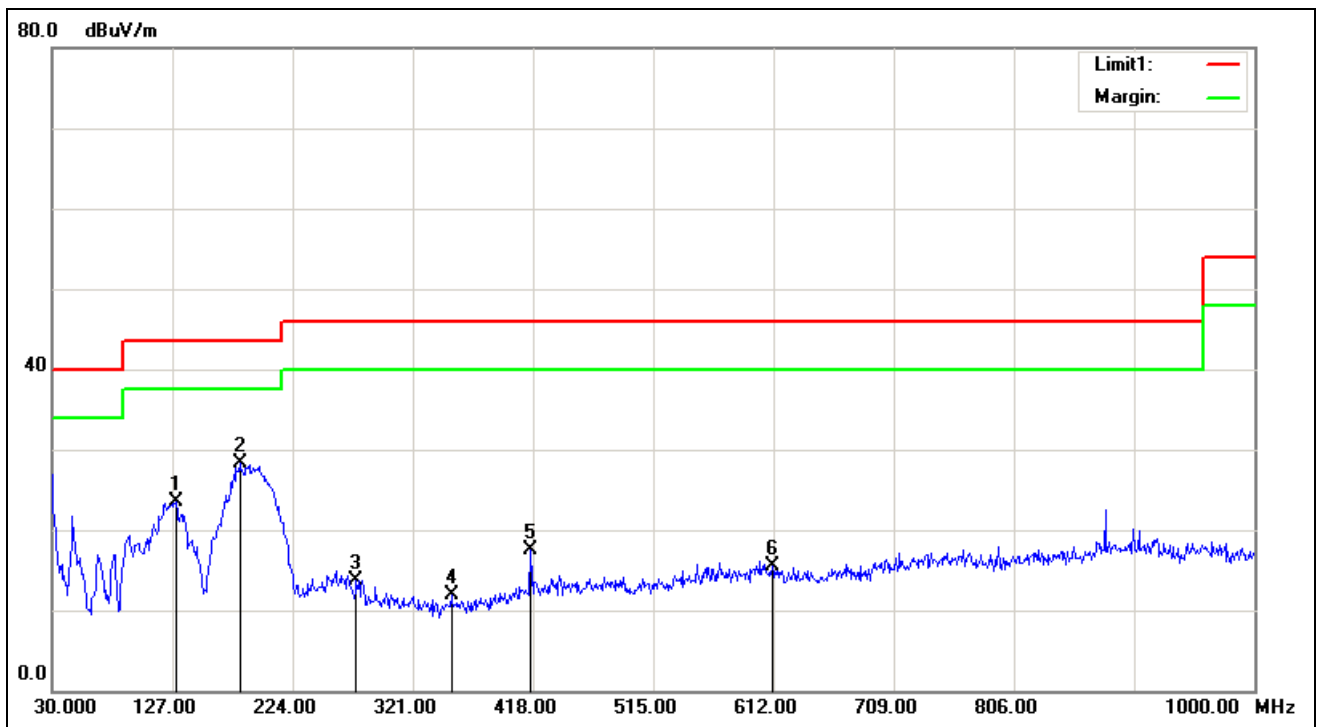



Above 1 GHz

Test Mode: GFSK (CH Low)

Tested by: Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH

Date: April 10, 2018

| Frequency (MHz) | Reading (dBµV) | Correction Factor (dB/m) | Result (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 1450.000 | 47.07 | -6.97 | 40.10 | 74.00 | -33.90 | V | peak |
| 2260.000 | 46.13 | -3.58 | 42.55 | 74.00 | -31.45 | V | peak |
| 2692.000 | 45.69 | -1.91 | 43.78 | 74.00 | -30.22 | V | peak |
| 3169.000 | 46.74 | -1.08 | 45.66 | 74.00 | -28.34 | V | peak |
| 4276.000 | 42.65 | 2.56 | 45.21 | 74.00 | -28.79 | V | peak |
| 4762.000 | 44.89 | 4.20 | 49.09 | 74.00 | -24.91 | V | peak |
| | | | | | | | |
| 1378.000 | 48.77 | -7.14 | 41.63 | 74.00 | -32.37 | H | peak |
| 2062.000 | 46.86 | -4.66 | 42.20 | 74.00 | -31.80 | H | peak |
| 2656.000 | 45.88 | -1.98 | 43.90 | 74.00 | -30.10 | H | peak |
| 3727.000 | 42.47 | 0.44 | 42.91 | 74.00 | -31.09 | H | peak |
| 4240.000 | 43.22 | 2.43 | 45.65 | 74.00 | -28.35 | H | peak |
| 4717.000 | 41.65 | 4.06 | 45.71 | 74.00 | -28.29 | H | peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: GFSK (CH Mid)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: March 28, 2018

| Frequency (MHz) | Reading (dBμV) | Correction Factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 1324.000 | 47.90 | -7.34 | 40.56 | 74.00 | -33.44 | V | peak |
| 2260.000 | 46.16 | -3.58 | 42.58 | 74.00 | -31.42 | V | peak |
| 2692.000 | 45.27 | -1.91 | 43.36 | 74.00 | -30.64 | V | peak |
| 3169.000 | 47.58 | -1.08 | 46.50 | 74.00 | -27.50 | V | peak |
| 3961.000 | 43.36 | 1.43 | 44.79 | 74.00 | -29.21 | V | peak |
| 4762.000 | 44.62 | 4.20 | 48.82 | 74.00 | -25.18 | V | peak |
| 2107.000 | 45.85 | -4.41 | 41.44 | 74.00 | -32.56 | H | peak |
| 2233.000 | 46.05 | -3.72 | 42.33 | 74.00 | -31.67 | H | peak |
| 2710.000 | 45.41 | -1.88 | 43.53 | 74.00 | -30.47 | H | peak |
| 3601.000 | 43.43 | -0.09 | 43.34 | 74.00 | -30.66 | H | peak |
| 3718.000 | 43.08 | 0.40 | 43.48 | 74.00 | -30.52 | H | peak |
| 4438.000 | 42.37 | 3.13 | 45.50 | 74.00 | -28.50 | H | peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: GFSK (CH High)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 21, 2018

| Frequency (MHz) | Reading (dBμV) | Correction Factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 2233.000 | 45.28 | -3.72 | 41.56 | 74.00 | -32.44 | V | peak |
| 2692.000 | 46.24 | -1.91 | 44.33 | 74.00 | -29.67 | V | peak |
| 3169.000 | 47.44 | -1.08 | 46.36 | 74.00 | -27.64 | V | peak |
| 3961.000 | 42.93 | 1.43 | 44.36 | 74.00 | -29.64 | V | peak |
| 4177.000 | 43.44 | 2.21 | 45.65 | 74.00 | -28.35 | V | peak |
| 4762.000 | 44.24 | 4.20 | 48.44 | 74.00 | -25.56 | V | peak |
| 1963.000 | 44.41 | -5.23 | 39.18 | 74.00 | -34.82 | H | peak |
| 2674.000 | 45.32 | -1.95 | 43.37 | 74.00 | -30.63 | H | peak |
| 2809.000 | 44.12 | -1.70 | 42.42 | 74.00 | -31.58 | H | peak |
| 3466.000 | 43.56 | -0.58 | 42.98 | 74.00 | -31.02 | H | peak |
| 3925.000 | 42.24 | 1.27 | 43.51 | 74.00 | -30.49 | H | peak |
| 4159.000 | 42.56 | 2.15 | 44.71 | 74.00 | -29.29 | H | peak |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS


| Name of Equipment | Manufacturer | Model | Serial Number | Last Calibration | Calibration Due |
|-------------------|--------------|--------|---------------|------------------|-----------------|
| Spectrum Analyzer | Agilent | N9010A | MY55370330 | 01/27/2018 | 01/26/2019 |

7.3.3. TEST PROCEDURES (please refer to measurement standard)

8.1 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

7.3.4. TEST SETUP

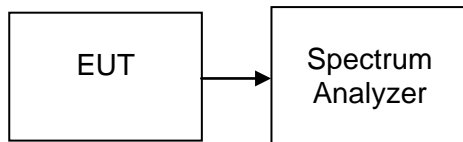

7.3.5. TEST RESULTS

No non-compliance noted


Test Data

| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Margin (kHz) |
|---------|-----------------|-----------------|-------------|--------------|
| Low | 2402 | 710.3 | >500 | PASS |
| Mid | 2440 | 702.8 | | PASS |
| High | 2480 | 705.6 | | PASS |





Test Plot

6dB Bandwidth (CH Low)

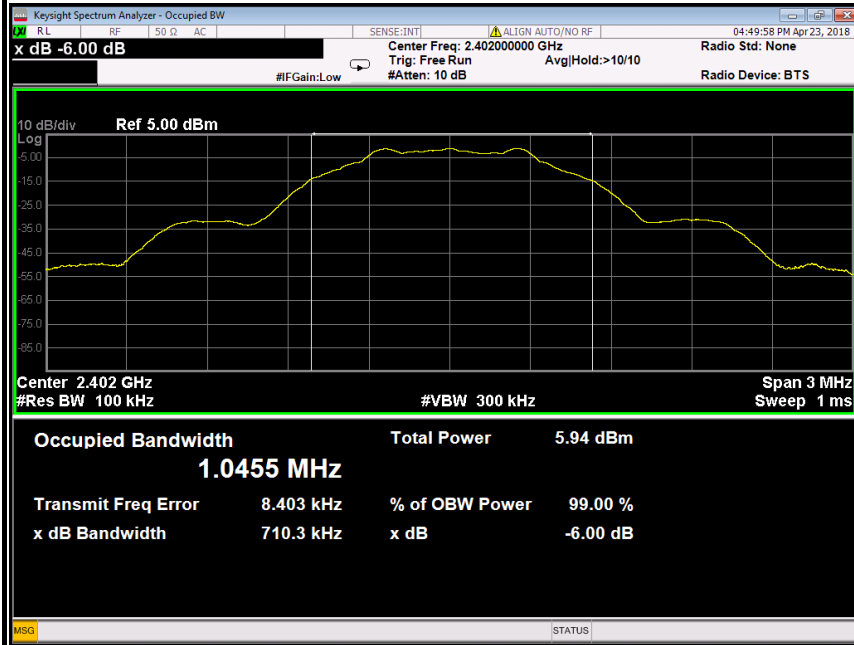

6dB Bandwidth (CH Mid)

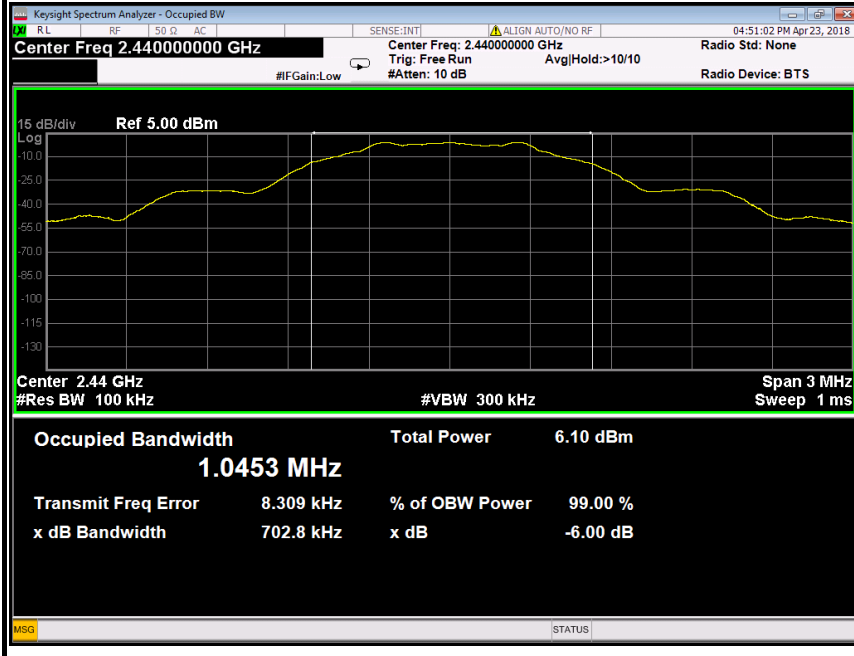

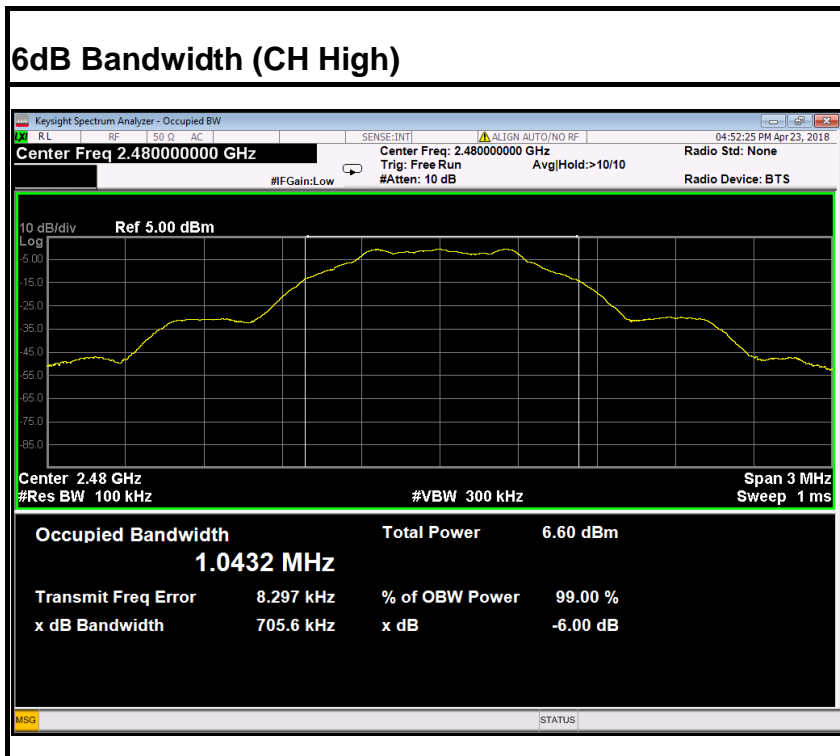



7.4. ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

MEASUREMENT PARAMETERS

| Measurement parameter | |
|-----------------------|----------|
| Detector | Peak |
| Sweep time | Auto |
| Resolution bandwidth | 3 MHz |
| Video bandwidth | 3 MHz |
| Trace-Mode | Max hold |

LIMITS

| FCC | IC |
|--------------|----|
| Antenna Gain | |
| 6 dBi | |

TEST RESULTS

GFSK

| T _{nom} | V _{nom} | Lowest channel 2402MHz | Middle channel 2440MHz | Highest channel 2480MHz |
|---|------------------|----------------------------------|---------------------------|----------------------------|
| Conducted power [dBm] Measured with GFSK modulation | | 3.49 | 3.68 | 3.69 |
| Radiated power [dBm] Measured with GFSK modulation | | 3.78 | 3.86 | 3.94 |
| Gain [dBi] Calculated | | 0.29 | 0.18 | 0.25 |
| Measurement uncertainty | | ± 1.5 dB (cond.) / ± 3 dB (rad.) | | |



7.5. PEAK OUTPUT POWER

7.5.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.5.2. TEST INSTRUMENTS

| Name of Equipment | Manufacturer | Model | Serial Number | Last Calibration | Calibration Due |
|-------------------|--------------|---------|---------------|------------------|-----------------|
| Power Meter | Anritsu | ML2495A | 1204003 | 02/21/2018 | 02/20/2019 |
| Power Sensor | Anritsu | MA2411B | 1126150 | 02/21/2018 | 02/20/2019 |

7.5.3. TEST PROCEDURES (please refer to measurement standard)

9.1.1 RBW \geq DTS bandwidth

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.


- a) Set the RBW \geq *DTS bandwidth*.
- b) Set VBW \geq 3 RBW.
- c) Set span \geq 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

9.1.2 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.



7.5.4. TEST SETUP

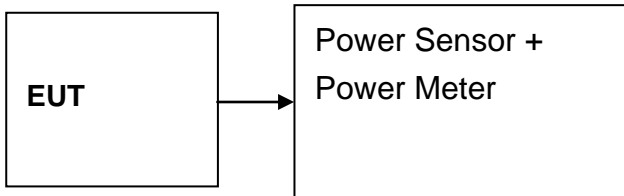

7.5.5. TEST RESULTS

No non-compliance noted

Test Data

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Peak /AVG | Result |
|---------|-----------------|--------------------|------------------|-----------|-----------|--------|
| Low | 2402 | 3.49 | 0.00223 | 1 | peak | PASS |
| Mid | 2440 | 3.68 | 0.00233 | | | PASS |
| High | 2480 | 3.69 | 0.00234 | | | PASS |
| Low | 2402 | 3.26 | 0.00212 | 1 | AVG | PASS |
| Mid | 2440 | 3.46 | 0.00222 | | | PASS |
| High | 2480 | 3.46 | 0.00222 | | | PASS |



7.6. BAND EDGES MEASUREMENT

7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.6.2. TEST INSTRUMENTS

| Radiated Emission Test Site 966 (2) | | | | | |
|-------------------------------------|----------------|--------------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| PSA Series Spectrum Analyzer | Agilent | N9010A | MY52221469 | 01/27/2018 | 01/26/2019 |
| EMI TEST RECEIVER | ROHDE&SCHWARZ | ESCI | 100783 | 02/21/2018 | 02/20/2019 |
| Amplifier | EMEC | EM330 | 060661 | 03/18/2018 | 03/17/2019 |
| High Noise Amplifier | Agilent | 8449B | 3008A01838 | 02/21/2018 | 02/20/2019 |
| Loop Antenna | COM-POWER | AL-130 | 121044 | 09/25/2017 | 09/24/2018 |
| Bilog Antenna | SCHAFFNER | CBL6143 | 5082 | 02/21/2018 | 02/20/2019 |
| Horn Antenna | SCHWARZBECK | BBHA9120 | D286 | 02/27/2018 | 02/27/2019 |
| Board-Band Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-497 | 02/27/2018 | 02/27/2019 |
| Turn Table | N/A | N/A | N/A | N.C.R | N.C.R |
| Antenna Tower | SUNOL | TLT2 | N/A | N.C.R | N.C.R |
| Controller | Sunol Sciences | SC104V | 022310-1 | N.C.R | N.C.R |
| Controller | CT | N/A | N/A | N.C.R | N.C.R |
| Temp. / Humidity Meter | Anymetre | JR913 | N/A | 01/29/2018 | 01/28/2019 |
| Test S/W | FARAD | LZ-RF / CCS-SZ-3A2 | | | |


- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The FCC Site Registration number is 101879.
 3. N.C.R = No Calibration Required.



7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

7.6.4. TEST SETUP


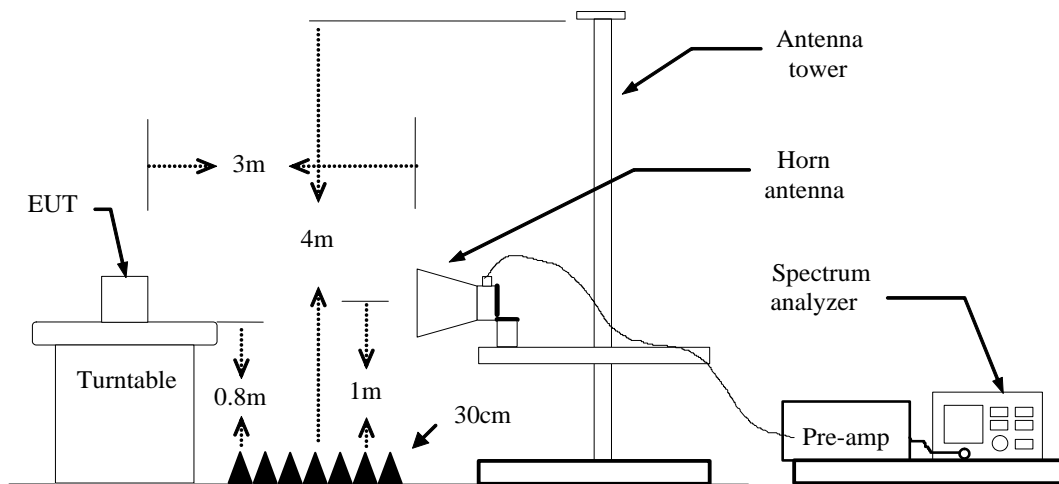





7.6.5. TEST RESULTS

Test Plot

Band Edges (CH Low)

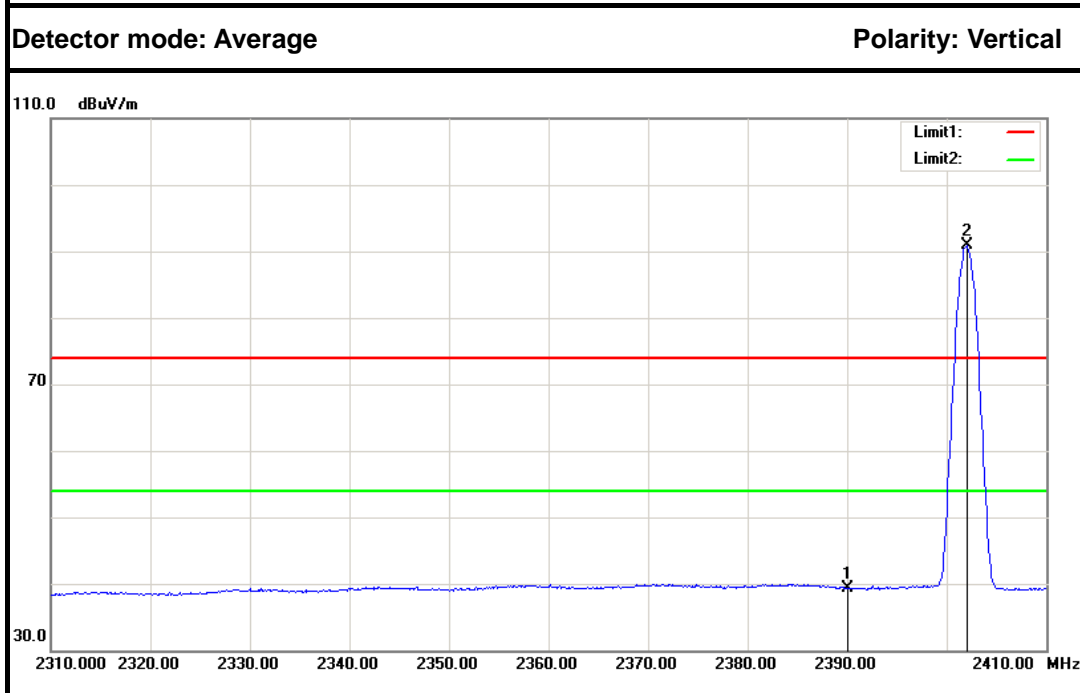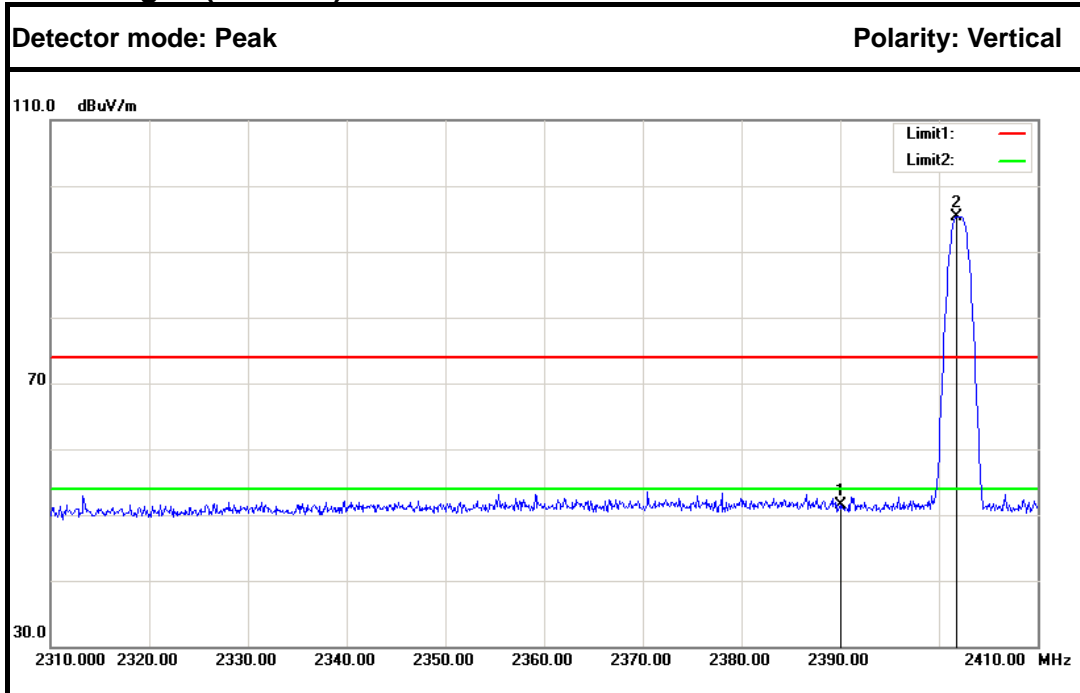



| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1 | 2390.000 | 54.29 | -2.86 | 51.43 | 74.00 | -22.57 | Peak | Vertical |
| 2 | 2401.800 | 98.12 | -2.80 | 95.32 | --- | --- | Peak | Vertical |
| 1 | 2390.000 | 42.10 | -2.86 | 39.24 | 54.00 | -14.76 | Average | Vertical |
| 2 | 2402.000 | 93.67 | -2.80 | 90.87 | --- | --- | Average | Vertical |

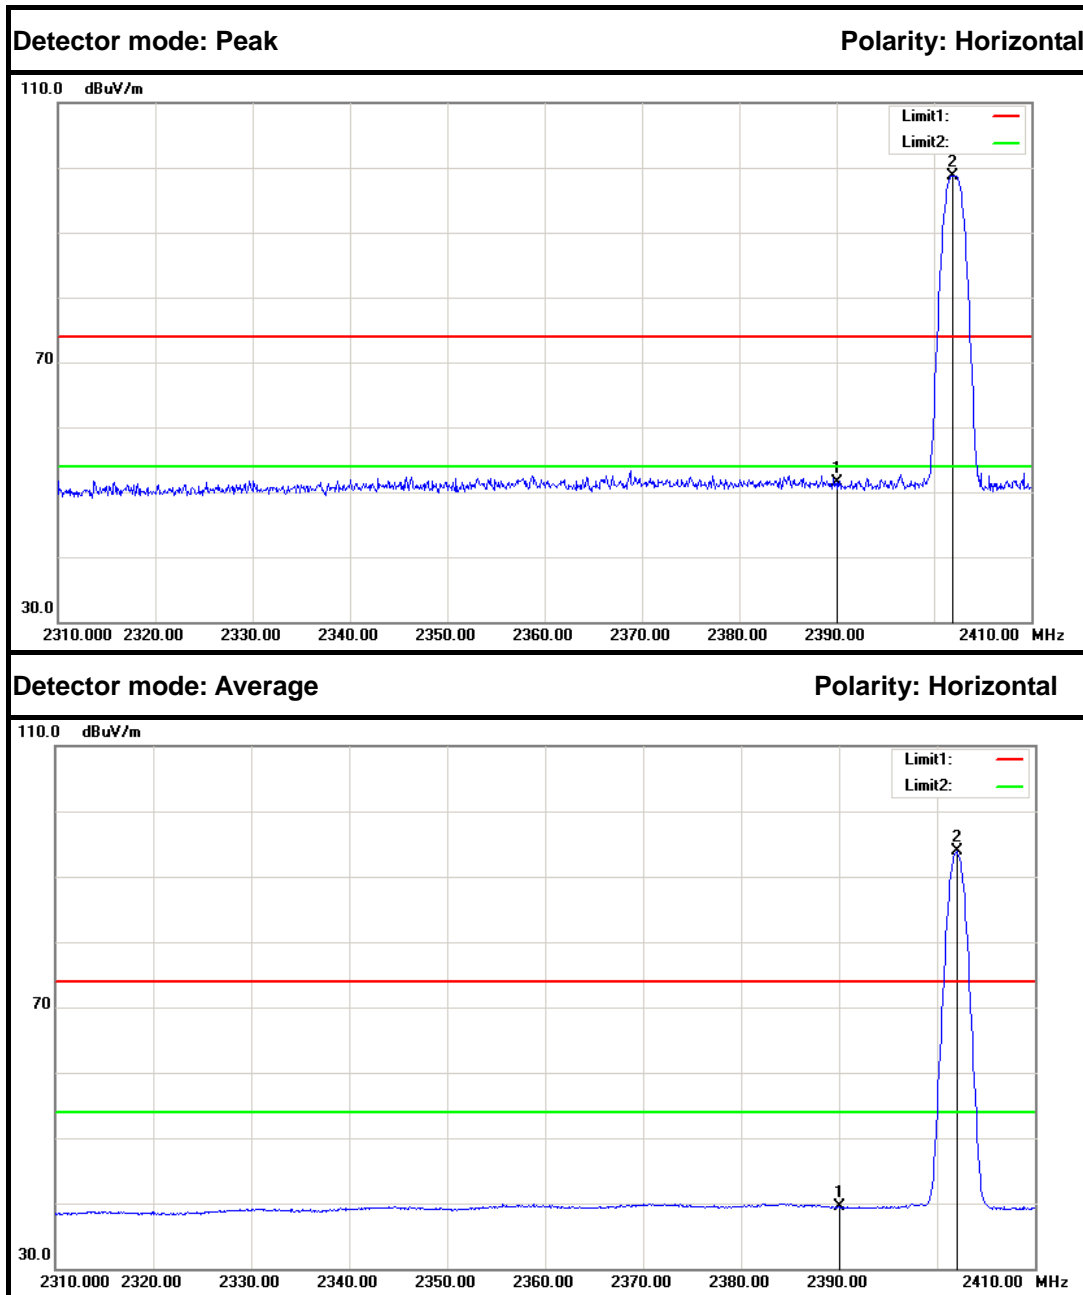



| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1 | 2390.000 | 54.33 | -2.86 | 51.47 | 74.00 | -22.53 | Peak | Horizontal |
| 2 | 2401.900 | 101.47 | -2.80 | 98.67 | --- | --- | Peak | Horizontal |
| 1 | 2390.000 | 42.41 | -2.86 | 39.55 | 54.00 | -14.45 | Average | Horizontal |
| 2 | 2402.000 | 96.66 | -2.80 | 93.86 | --- | --- | Average | Horizontal |



Band Edges (CH-High)

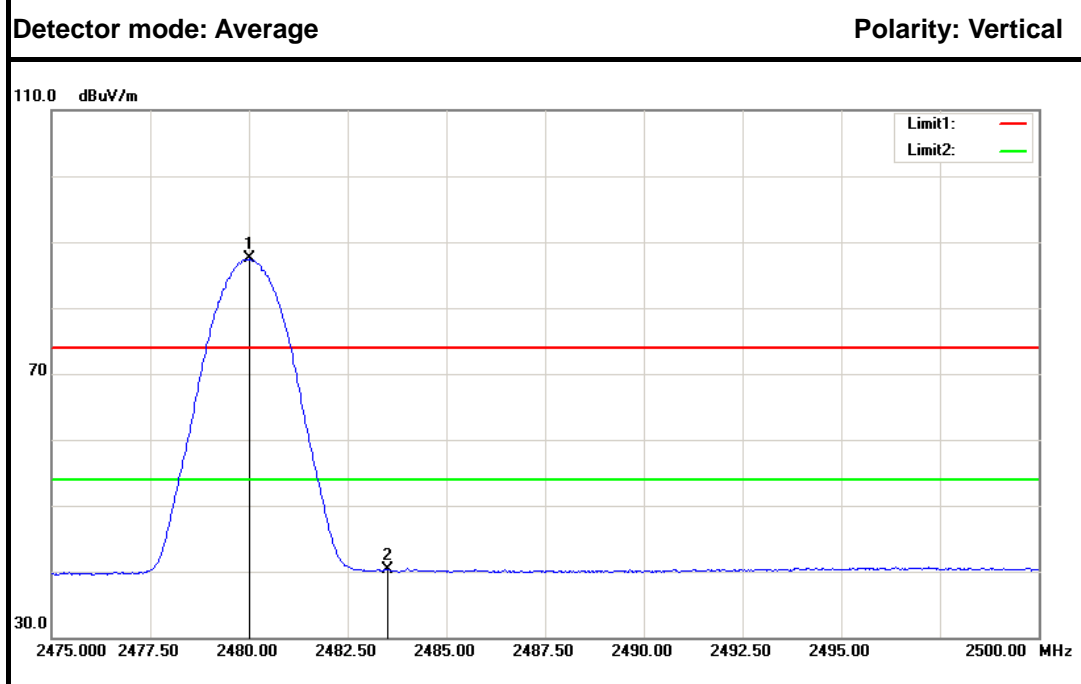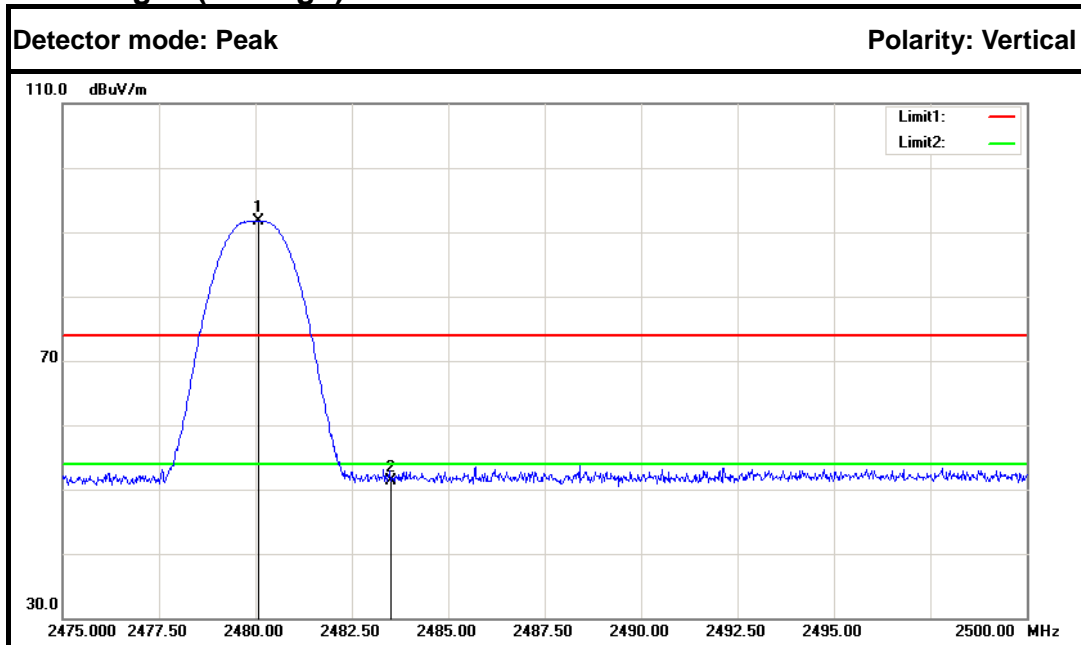

| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1. | 2480.075 | 94.05 | -2.37 | 91.68 | --- | --- | Peak | Vertical |
| 2. | 2483.500 | 53.73 | -2.35 | 51.38 | 74.00 | -22.62 | Peak | Vertical |
| 1. | 2480.025 | 89.81 | -2.37 | 87.44 | --- | --- | Average | Vertical |
| 2. | 2483.500 | 42.57 | -2.35 | 40.22 | 54.00 | -13.78 | Average | Vertical |

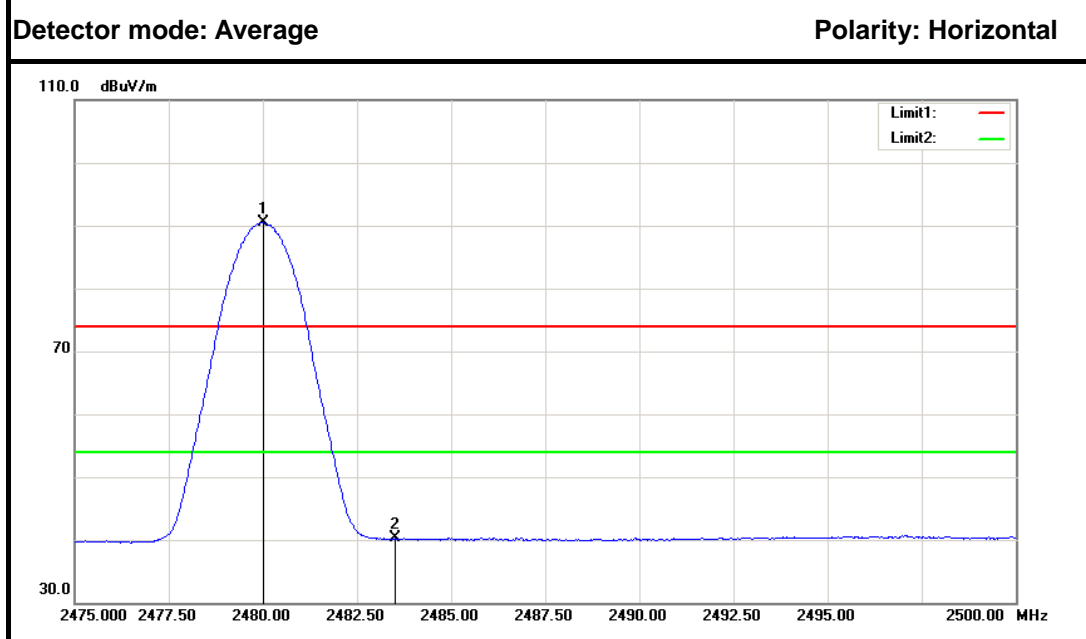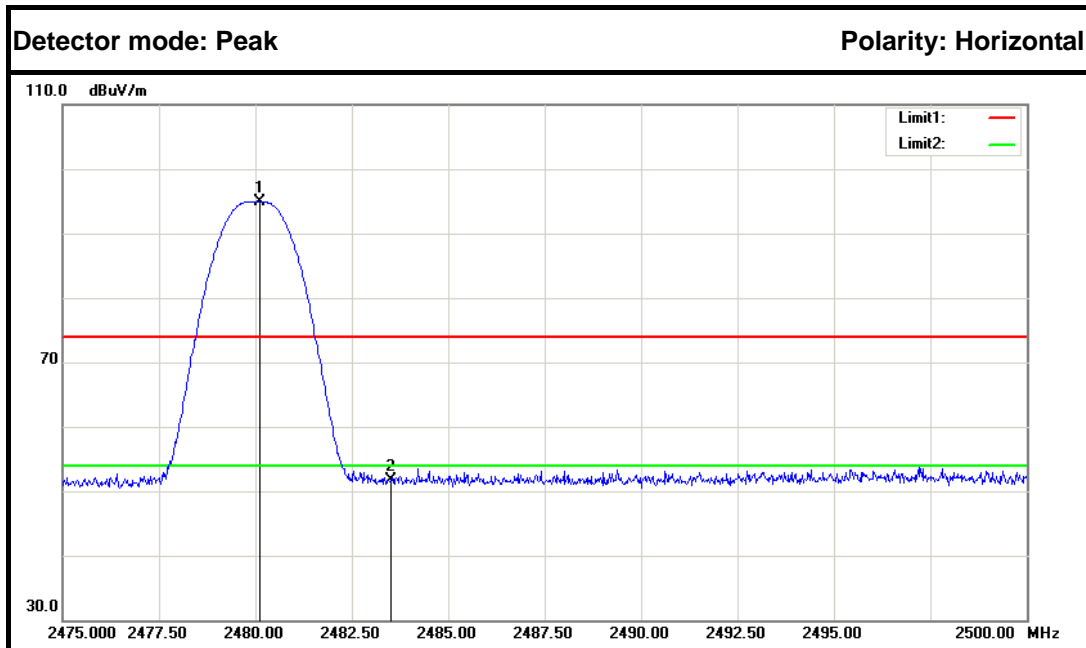

| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1 | 2480.125 | 97.29 | -2.37 | 94.92 | --- | --- | Peak | Horizontal |
| 2 | 2483.500 | 53.99 | -2.35 | 51.64 | 74.00 | -22.36 | Peak | Horizontal |
| 1 | 2480.025 | 92.85 | -2.37 | 90.48 | --- | --- | Average | Horizontal |
| 2 | 2483.500 | 42.59 | -2.35 | 40.24 | 54.00 | -13.76 | Average | Horizontal |



7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.


7.7.2. TEST INSTRUMENTS

| Name of Equipment | Manufacturer | Model | Serial Number | Last Calibration | Calibration Due |
|-------------------|--------------|--------|---------------|------------------|-----------------|
| Spectrum Analyzer | Agilent | N9010A | MY55370330 | 01/27/2018 | 01/26/2019 |

7.7.3. TEST PROCEDURES (please refer to measurement standard)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.7.4. TEST SETUP

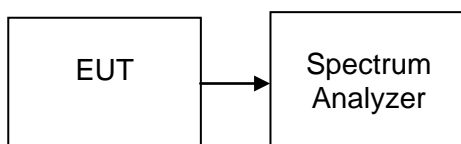



7.7.5. TEST RESULTS

No non-compliance noted

Test Data

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Test Result |
|---------|-----------------|------------|-------------|-------------|
| Low | 2402 | -15.865 | 8.00 | PASS |
| Mid | 2440 | -15.738 | | PASS |
| High | 2480 | -15.161 | | PASS |



Test Plot

